
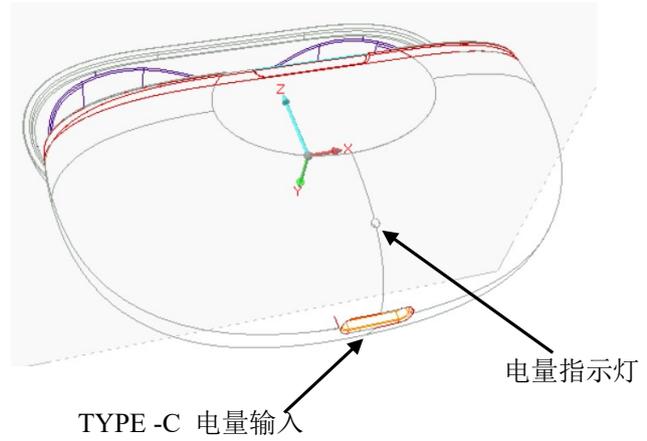
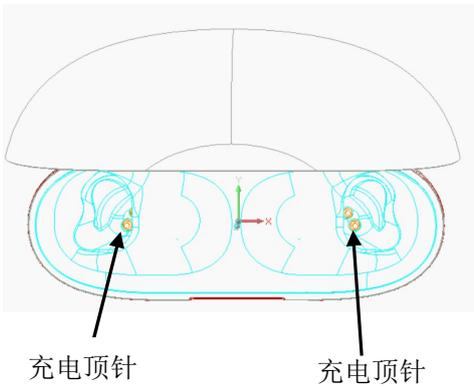
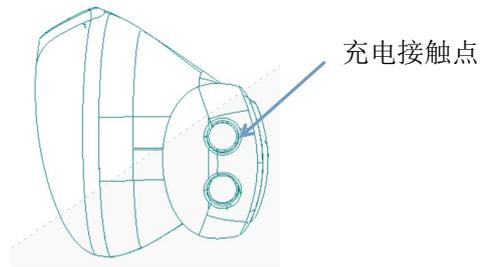


耳机使用说明书

产品示意图

FCC ID: 2BBAA-AIR7

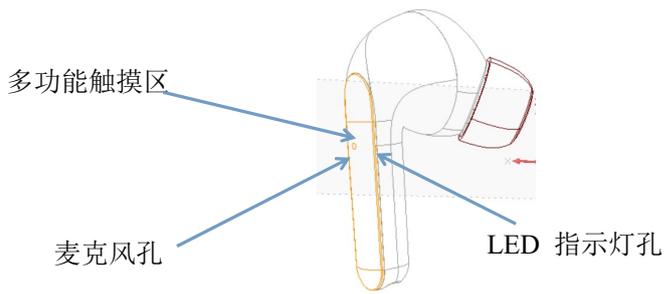

包装清单

air7 真无线耳机主机
air7 真无线耳机充电盒
TYPE-C 充电线
大小耳帽
使用说明书

产品规格

产品型号: air7
电池规格: 耳机 3.7V

支持模式：HFP/HSP/ A2DP/AVRCP

灵敏度：103dB ±3dB S.P.L at 1KHz

信号距离：10 米（无任何较大障碍物的理想环境中）

播放时间：约 3.5 小时

通话时间：约 3.5 小时

待机时间：约 80 小时

充电时间：给充电仓充电约 1.5 小时，充电仓给耳机充电约 1 小时

充电仓给耳机充电次数：约 2 次

功能操作说明

1. 开机

将耳机从充电仓拿出自动开机或长触左右耳机多功能键 3 秒开机。

2. 关机

将耳机放入充电仓自动关机长触左右耳机多功能键 5 秒关机。

3. 开机回连

当配对成功后，第二次开机时蓝牙耳机优先进入回连状态自动回连已连接过的手机。

4. 播放/暂停

在待机状态下，单击左右耳机多功能区均可直接播放音乐，播放时单击左右耳机多功能区均可暂停播放。

5. 切换歌曲

播放音乐时长触左耳机多功能键 2 秒同时响“嘀”一声切换到上一曲，长触右耳机多功能键 2 秒同时响“嘀”一声切换到下一曲。

6. 音量加减

双击左耳机多功能键逐级加大音量，双击右耳机多功能键逐级减小音量

7. 来电接听

手机来电时，单击左右耳机多功能键均可接听电话。

8. 来电挂断

手机通话时，单击左右耳机多功能区均可挂断电话。

9. 来电拒接

手机来电时，长按左右耳机多功能键 2 秒均可拒接来电。

10 末号重拨

在待机或者播放音乐时，三击左耳机多功能区即可拨打您通话记录中最后一个拨打过的电话。

11. 启动语音助手

三击右耳机多功能区即可启动苹果 Siri 或谷歌语音助手进行语音控制手机操作。

12. 低电量提示

当耳机电池电量不足时，间隔 30 秒播放一次电量不足提示音，直至耳机低电关机。

配对方式

普通配对方式

1.从充电仓取出或者同时长按左、右耳机多功能区 3 秒开机，直至指示灯交替闪烁，进入对耳搜索配对状态，进入对耳自动配对，配对成功后主耳指示灯持续交替闪烁，同时播放对耳配对成功提示音。

2.启动手机或者其它设备的无线功能，如果是安卓系统手机或者设备请点击手机“搜寻无线设备”选项，如果是 IOS 系统的手机或者设备则会自动搜索设备；当搜寻到该无线耳机的型号后，点击进入配对；当配对成功后，主耳机会发出连接成功的提示音，左右耳机指示灯变为慢闪，进入连接待机状态，配对成功右耳机为右声道，左耳机为左声道。

3.两只耳机也可单独与手机进行配对使用，操作方法可按上步骤 2 操作手法进行操作。

充电操作

1.将 TYPE-C 充电线一头插上充电仓，一头插上充电器即可给充电仓充电，指示灯会闪烁，长量红灯，电已充满。

2.给耳机充电：将耳机放入充电仓即可自动充电，充电时耳机指示灯为红色，充满电后熄灭；给耳机充电时，充电仓的灯蓝色，当耳机充满电后，灯会熄灭。


注意事项

- 1.请在安全的环境下充电。在给充电仓充电时当充电指示灯熄灭后请尽快将充电仓与 TYPE-C 充电线分开，以免在长时间插着充电对充电仓造成损伤。
- 2.在音乐播放时，请将音乐调至合适音量大小，以免长期在大音量状态下对听力造成损伤。
- 3.尽量避免在有干扰源的地方使用本耳机，否则有可能对耳机信号产生影响。
- 4.尽量避免在有腐蚀的环境中使用本耳机，以免对耳机的功能产生影响。




温馨提示:在您使用本无线耳机听音乐或者通话时，请注意适当调节音量大小，以免过大的音量对您的听力造成影响！

Earphone user manual

FCC ID: 2BBAA-AIR7

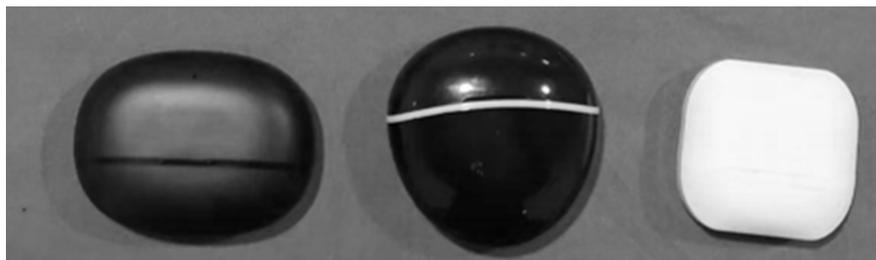


Product diagram

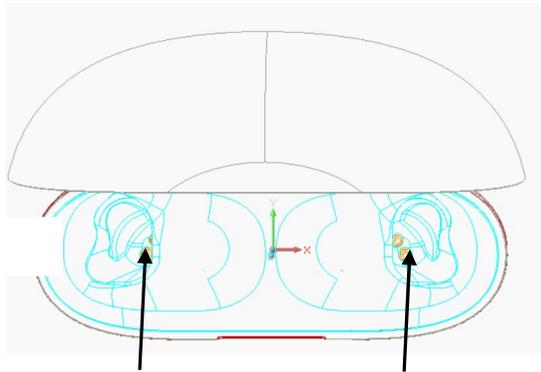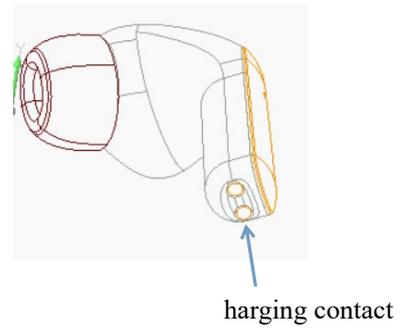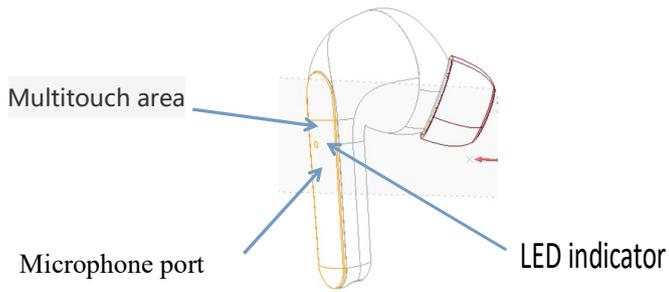

Charging thimble

Charging thimble

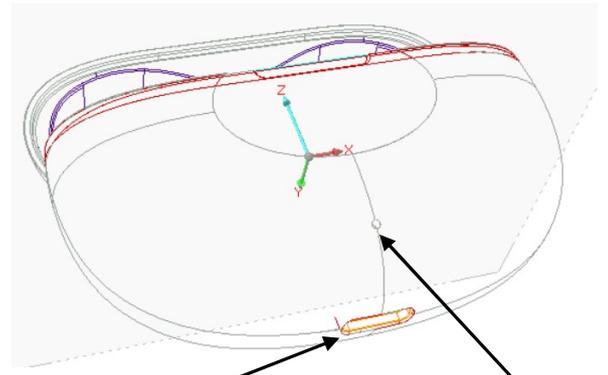

TYPE-C power input

Led charge indication

Packing list

air7 true wireless headset host

air7 real wireless headset charging box

Type-c charging cable

Large and small ear Cap

Instruction manual

Product specification

Product model: air7

Battery specification: earphone 3.7v ; Charging bin 3.7v

Supported mode: HFP/HSP/ A2DP/AVRCP

Sensitivity: 103dB ±3dB S.P.L at 1KHz

Signal distance: 10 m (in an ideal environment without any large obstacles)

Playing time: about 3.5 hours

Talk time: approximately 3.5 hours

Standby time: about 80 hours

Charging time: charge the charging warehouse for about 1.5 hours,
and charge the headset for about 1 hour

Charging times for the headset: about 2 times

Functional instructions

1. Boot

Take the headset out of the charging bin and start it automatically or long press the left and right multi-function button of the headset for 3 seconds.

2. Shut down

Put the earphone into the charging chamber and turn it off automatically. Long press the left and right earphone multifunction keys for 5 seconds to turn it off

3. Boot back

When the pairing is successful, the bluetooth headset will first enter the state of reconnect when the second time is started and automatically reconnect the connected phone.

4. Play/pause

In standby state, click the left or right earphone multifunction button to play music directly, while click the left or right earphone multifunction button to pause playing.

5. Switch songs

Press the left earphone muti_function button for 2 seconds to play music, and then press the right earphone muti_function button for 2 seconds to play music.

6. Volume up and down

Double-click the left earphone multifunction button to increase the volume step by step, and double-click the right earphone multifunction button to decrease the volume step by step

7. Answer incoming calls

When the phone calls, click on the multi-function key around earphones can answer the phone, earphones with voice noise reduction function, make the call more clear.

8. Call hang up

When talking on the mobile phone, you can hang up the phone by clicking the left or right earphone multifunction button.

9. Call rejection

When the phone calls, long press the left and right earphone multifunction button for 2 seconds to reject the call.

10. Redial

When you are on standby or playing music, you can make the last call in your phone record by three clicks of the left earphone multifunction button.

11. Start voice assistant

Three clicks on the right earphone multifunction button can activate apple's Siri or Google voice assistant for voice control of the phone operation.

12. Low battery alert

When the battery of bluetooth headset is low, play the warning sound of low battery at an interval of 30 seconds until the headset is low battery and turns off.

pairing method

1. Take it out from the charging bin or press the left and right multi-function area for 3 seconds at the same time, turn it on until the indicator light flashes alternately, enter the pair-ear search matching state, enter the pair-ear automatic matching state, after the successful pairing, the main ear indicator continued to flicker alternately, while playing the pair-ear pairing success cue tone.

2. Enable wireless capabilities on your phone or other devices. If it's an android phone or device, click the "Search for wireless devices" option on your phone. If It's an IOS phone or device, it will search for devices automatically After searching for the model of the wireless headset, click enter the match. When the match is successful, the main headset will give a notification tone of successful connection, and the left and right headset lights will turn to slow flash, entering the state of connection standby, the right earphone is the right channel and the left Earphone is the left channel.

3. The two earphones can also be paired with the mobile phone independently. The lamp operation method can be operated according to the operation method in step 2 above.

Charging operation

1. Plug one end of the TYPE-C charging cable into the USB port of the charging warehouse and plug one end of the charger to charge the charging warehouse. The will display the latest power.
2. Charge the earphone: put the earphone into the charging bin to charge it automatically. The lamp earphone indicator is red when charging, and it will be off after being fully charged. The lamp of the charging cabin will display the remaining power. When the headset is fully charged, the lamp of the charging cabin will go out.

Precautions

1. Please charge in a safe environment. When charging the charging warehouse, please separate the charging warehouse from the TYPE-C charging cable as soon as possible after the charging indicator is off, so as to avoid damage to the charging warehouse caused by the long time of charging.
2. When the music is playing, please adjust the music to the appropriate volume to avoid long-term damage to the hearing under the condition of high volume.
3. Try to avoid using the earphone where there is interference source, otherwise it may affect the earphone signal.
4. Try to avoid using the earphone in a corrosive environment, so as not to affect the function of the earphone.

Tips: when you use this bluetooth headset to listen to music or talk, please pay attention to adjust the volume, so as not to affect your listening too much!

Any Changes expressly or modifications not approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device,

pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment .

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.