



FCC Test Report

Report Reference No......: HK2407314284-2E
FCC ID.....: 2BBBN-VISIONSYNC
Compiled by
(position+printed name+signature)..: RF Department Manager Len Liao

Len Liao

Supervised by
(position+printed name+signature)..: Technical Manager Sliver Wan

Sliver Wan

Approved by
(position+printed name+signature)..: General Manager Jason Zhou

Jason Zhou

Date of issue.....: Aug. 21, 2024

Testing Laboratory Name: **Shenzhen HUAK Testing Technology Co., Ltd.**

Address: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name.....: **Hangzhou Tanlink Technology Co.,Ltd.**

Address: Room 701, South Building, Building 3, No.16, Longtan Road, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China

Test specification

Standard.....: **FCC CFR Title 47 Part 2, Part 24E**

TRF Originator.....: Shenzhen HUAK Testing Technology Co., Ltd.

Shenzhen HUAK Testing Technology Co., Ltd.All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd.as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: 4G driving recorder

Trade Mark: Redtiger

Manufacturer.....: **Hangzhou Tanlink Technology Co.,Ltd.**

Model/Type reference.....: VisionSync 10

Series Models: VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro, VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro, LinkStream 10, LinkStream 30

Modulation Type.....: QPSK, 16QAM

Rating: DC 5V from Type-C

Hardware version: V2.0

Software version.....: V2.0

Result.....: **PASS**

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



TEST REPORT

Test Report No. :	HK2407314284-2E	Aug. 21, 2024
		Date of issue

Equipment under Test : 4G driving recorder

Model /Type : VisionSync 10

Series Models : VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro, VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro, LinkStream 10, LinkStream 30

Applicant : **Hangzhou Tanlink Technology Co.,Ltd.**

Address : Room 701, South Building, Building 3, No.16, Longtan Road, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China

Manufacturer : **Hangzhou Tanlink Technology Co.,Ltd.**

Address : Room 701, South Building, Building 3, No.16, Longtan Road, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

1	<u>Test Standards</u>	<u>5</u>
2	<u>Summary</u>	<u>6</u>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment Under Test	6
2.4	Short Description of The Equipment Under Test (EUT)	6
2.5	Test Frequency List	7
2.6	Normal Accessory Setting	7
2.7	EUT Configuration	7
2.8	Related Submittal(s) / Grant (s)	7
2.9	Modifications	7
2.10	General Test Conditions/Configurations	8
3	<u>Test Environment</u>	<u>9</u>
3.1	Information of The Test Laboratory	9
3.2	Environmental Conditions	9
3.3	Test Description	9
3.4	Equipments Used During The Test	10
4	<u>Test Conditions and Results</u>	<u>11</u>
4.1	Output Power	11
4.2	Peak-to-Average Ratio (PAR)	17
4.3	Occupied Bandwidth and Emission Bandwidth	24
4.4	Band Edge Compliance	31
4.5	Spurious Emission on Antenna Port	36
4.6	Radiated Spurious Emission	49
4.7	Frequency Stability	57
5	<u>Test Setup Photos of the EUT</u>	<u>59</u>
6	<u>Photos of the EUT</u>	<u>60</u>



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Aug. 21, 2024	Jason Zhou

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Address: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1 Test Standards

The tests were performed according to following standards:

[FCC Part 24](#): Public Mobile Services.

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): Unintentional Radiators.

[FCC Part 2](#): Frequency Allocations And Radio Treaty Matters; General Rules And Regulations.

[KDB971168 D01:v02r02](#): Measurement Guidance For Certification Of Licensed Digital Transmitters.

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.



2 Summary

2.1 General Remarks

Date of receipt of test sample	:	Jul. 31, 2024
Testing commenced on	:	Jul. 31, 2024
Testing concluded on	:	Aug. 21, 2024

2.2 Product Description

The Hangzhou Tanlink Technology Co.,Ltd.'s Model: VisionSync 10 or the "EUT" as referred to in this report; more general information as follows,for more details, refer to the user's manual of the EUT.

Name of EUT:	4G driving recorder
Model/Type reference:	VisionSync 10
Series Models:	VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro, VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro, LinkStream 10, LinkStream 30
Power supply:	DC 5V from Type-C
Modulation Type:	QPSK,16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	1.17dBi
Operation Frequency Band:	LTE Band 2
Operation frequency:	LTE Band 2: 1850~1910 MHz(TX), 1930~1990 MHz(TX)
LTE Release:	R8
Extreme temp. Tolerance:	-30°C to +70°C
Extreme vol. Limits:	4.25VDC to5.75VDC (nominal: 5.0VDC)

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V/ 60 Hz	<input type="radio"/> 115V/60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5V from Type-C

2.4 Short Description of The Equipment Under Test (EUT)

2.4.1 General Description

This is a 4G driving recorder.

For more details, refer to the user's manual of the EUT.



2.5 Test Frequency List

TX Channel Bandwidth	Frequency (MHz)	channel
1.4 MHz	1850.7	18607
	1880.0	18900
	1909.3	19193
3 MHz	1851.5	18615
	1880.0	18900
	1908.5	19185
5 MHz	1852.5	18625
	1880.0	18900
	1907.5	19175
10 MHz	1855.0	18650
	1880.0	18900
	1905.0	19150
15 MHz	1857.5	18675
	1880.0	18900
	1902.5	19125
20 MHz	1860.0	18700
	1880.0	18900
	1900.0	19100

2.6 Normal Accessory Setting

Fully charged battery was used during the test.

2.7 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer
- supplied by the lab

<input type="radio"/> Power Cable	Length (m) :	/
	Shield :	/
	Detachable :	/
<input type="radio"/> Multimeter	Manufacturer :	/
	Model No. :	/

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2BBBN-VISIONSYNC** filing to comply with FCC Part 24, Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



2.10 General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	4.25V
	VN	5.0V
	VH	5.75V

NOTE: VL=lower extreme test voltage VN=nominal voltage
 VH=upper extreme test voltage TN=normal temperature



3 Test Environment

3.1 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

PCSBand (1850-1915MHz pairedwith 1930-1995MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic)Radiated Output Power	Part§2.1046, Part§24.232	EIRP ≤ 2W	Pass
Peak-Average Ratio	Part§2.1046, Part§24.232	FCC:Limit≤13dB	Pass
Bandwidth	Part§2.1049 RSS-133	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	Part§2.1051, Part§24.238	≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	Part§2.1051, Part§24.238	≤-13dBm/1MHz, from 9kHz to10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	Part§2.1053, Part§24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	Part§2.1055, Part§24.235	FCC:within authorized frequency block.	Pass

NOTE 1:For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

Remark:

1. The measurement uncertainty is not included in the test result.



3.4 Equipments Used During The Test

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	2025/02/19
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	2025/02/19
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	2025/02/19
4	Spectrum analyzer	Agilent	N9020A	HKE-048	2024/02/20	2025/02/19
5	Spectrum analyzer	R&S	FSV3044	HKE-126	2024/02/20	2025/02/19
6	Preamplifier	EMCI	EMC051845 S	HKE-006	2024/02/20	2025/02/19
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	2025/02/19
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	2025/02/19
9	6d Attenuator	Pasternack	6db	HKE-184	2024/02/20	2025/02/19
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB9168	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2024/02/20	2025/02/19
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	2025/02/19
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	2025/02/19
19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	2025/02/19
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4 Test Conditions and Results


4.1 Output Power

4.1.1 Conducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

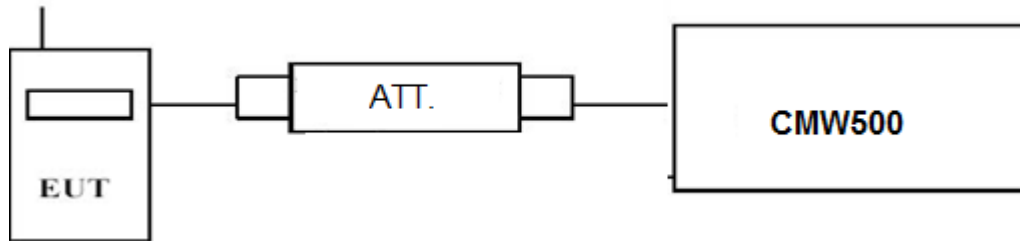

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2;

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	23.09	22.35
		1 RB high	23.11	22.38
		50% RB mid	23.00	22.20
		100% RB	23.20	21.76
	1880.0	1 RB low	23.19	21.82
		1 RB high	23.24	21.74
		50% RB mid	22.06	21.17
		100% RB	22.80	22.18
	1909.3	1 RB low	22.74	22.18
		1 RB high	22.63	22.05
		50% RB mid	22.89	21.59
		100% RB	22.92	21.60
3 MHz	1851.5	1 RB low	22.94	22.03
		1 RB high	22.91	22.01
		50% RB mid	22.78	21.86
		100% RB	22.02	21.19
	1880.0	1 RB low	22.02	21.19



		1 RB high	21.94	21.09		
		50% RB mid	21.98	21.04		
		100% RB	22.67	21.59		
	1908.5	1 RB low	22.61	21.42		
		1 RB high	22.54	21.41		
		50% RB mid	21.74	21.17		
		100% RB	21.63	21.16		
		5 MHz	1852.5	1 RB low	23.11	21.51
				1 RB high	22.92	21.32
50% RB mid	22.98			21.25		
1880.0	100% RB		22.09	21.05		
	1 RB low		22.10	21.05		
	1 RB high		21.90	20.91		
1907.5	50% RB mid		21.90	21.07		
	100% RB		22.74	21.17		
	1 RB low		22.62	21.11		
10 MHz	1855.0	1 RB high	22.63	21.12		
		50% RB mid	21.78	21.15		
		100% RB	21.79	21.14		
	1880.0	1 RB low	23.07	22.14		
		1 RB high	22.83	21.86		
		50% RB mid	22.83	21.95		
		100% RB	22.02	20.93		
		1 RB low	22.02	20.93		
		1 RB high	21.90	20.88		
1905.0	50% RB mid	21.97	21.39			
	100% RB	22.95	22.01			
	1 RB low	22.70	21.82			
15 MHz	1857.5	1 RB high	22.49	21.51		
		50% RB mid	21.89	20.96		
		100% RB	21.79	20.69		
	1880.0	1 RB low	23.17	22.16		
		1 RB high	22.85	21.90		
		50% RB mid	23.04	21.77		
		100% RB	22.04	22.03		
		1 RB low	22.03	22.03		
		1 RB high	22.04	22.04		
1902.5	50% RB mid	22.04	21.08			
	100% RB	23.03	22.28			
	1 RB low	22.57	21.88			
20 MHz	1860.0	1 RB high	22.51	21.73		
		50% RB mid	21.80	21.80		
		100% RB	21.79	21.80		
	1880.0	1 RB low	23.25	21.99		
		1 RB high	23.37	22.14		
		50% RB mid	23.35	22.23		
		100% RB	22.04	21.61		
		1 RB low	22.06	21.62		
		1 RB high	22.20	21.44		
1900.0	50% RB mid	22.17	21.34			
	100% RB	23.10	21.95			
	1 RB low	22.57	21.58			
		1 RB high	22.91	21.85		
		50% RB mid	21.92	21.01		
		100% RB	21.92	21.00		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

TEST CONFIGURATION

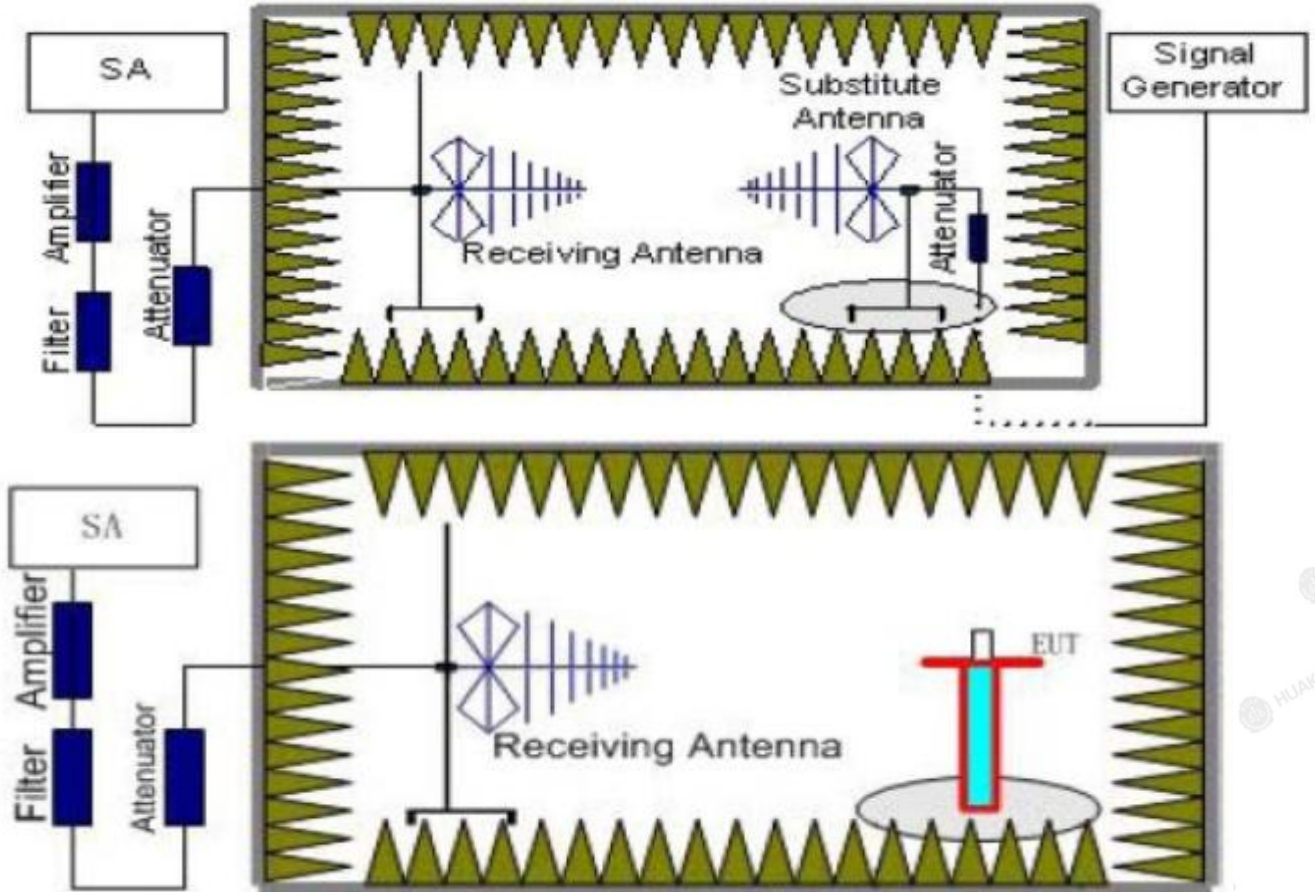

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna.



- A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} - P_{cl} + G_a$
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
 $Power(EIRP) = P_{Mea} - P_{cl} + G_a$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.

TEST RESULTS

Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
- $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-16.97	3.41	10.24	33.60	23.46	33.01	9.55	V
1880.0	-17.25	3.49	10.24	33.60	23.1	33.01	9.91	V
1909.3	-17.16	3.55	10.23	33.60	23.12	33.01	9.89	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-17.71	3.41	10.24	33.60	22.72	33.01	10.29	V
1880.0	-16.36	3.49	10.24	33.60	23.99	33.01	9.02	V
1908.5	-17.1	3.55	10.23	33.60	23.18	33.01	9.83	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-16.5	3.41	10.24	33.60	23.93	33.01	9.08	V
1880.0	-17.27	3.49	10.24	33.60	23.08	33.01	9.93	V
1907.5	-16.99	3.55	10.23	33.60	23.29	33.01	9.72	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-17.42	3.41	10.24	33.60	23.01	33.01	10	V
1880.0	-16.27	3.49	10.24	33.60	24.08	33.01	8.93	V
1905.0	-16.78	3.55	10.23	33.60	23.5	33.01	9.51	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-17.16	3.41	10.24	33.60	23.27	33.01	9.74	V
1880.0	-16.4	3.49	10.24	33.60	23.95	33.01	9.06	V
1902.5	-17.26	3.55	10.23	33.60	23.02	33.01	9.99	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-18.04	3.41	10.24	33.60	22.39	33.01	10.62	V
1880.0	-17	3.49	10.24	33.60	23.35	33.01	9.66	V
1900.0	-17.29	3.55	10.23	33.60	22.99	33.01	10.02	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-17.17	3.41	10.24	33.60	23.26	33.01	9.75	V
1880.0	-17.11	3.49	10.24	33.60	23.24	33.01	9.77	V
1909.3	-17.33	3.55	10.23	33.60	22.95	33.01	10.06	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-17.71	3.41	10.24	33.60	22.72	33.01	10.29	V
1880.0	-16.86	3.49	10.24	33.60	23.49	33.01	9.52	V
1908.5	-17.25	3.55	10.23	33.60	23.03	33.01	9.98	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-16.95	3.41	10.24	33.60	23.48	33.01	9.53	V
1880.0	-16.67	3.49	10.24	33.60	23.68	33.01	9.33	V
1907.5	-16.82	3.55	10.23	33.60	23.46	33.01	9.55	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-18.03	3.41	10.24	33.60	22.4	33.01	10.61	V
1880.0	-16.52	3.49	10.24	33.60	23.83	33.01	9.18	V
1905.0	-17.52	3.55	10.23	33.60	22.76	33.01	10.25	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-17.2	3.41	10.24	33.60	23.23	33.01	9.78	V
1880.0	-16.66	3.49	10.24	33.60	23.69	33.01	9.32	V
1902.5	-16.82	3.55	10.23	33.60	23.46	33.01	9.55	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-17.62	3.41	10.24	33.60	22.81	33.01	10.2	V
1880.0	-17.11	3.49	10.24	33.60	23.24	33.01	9.77	V
1900.0	-17.37	3.55	10.23	33.60	22.91	33.01	10.1	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

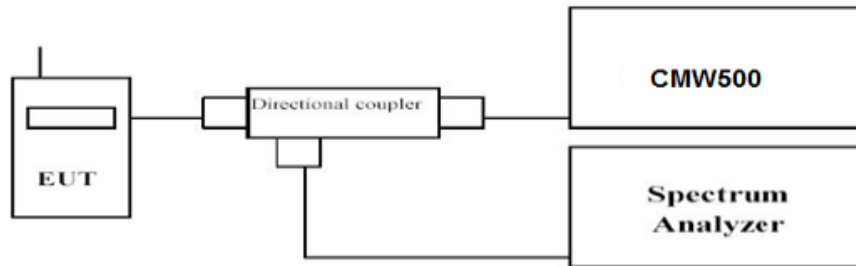

TEST PROCEDURE

1. Refer to instrument’s analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal’s occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
1.4 MHz	1850.7	1RB#0	4.51	5.34
	1880.0		4.81	5.61
	1909.3		4.93	5.84
3 MHz	1851.5	1RB#0	4.41	5.43
	1880.0		4.80	5.79
	1908.5		4.97	5.96
5 MHz	1852.5	1RB#0	4.46	5.44
	1880.0		4.92	5.66
	1907.5		5.13	5.77
10 MHz	1855.0	1RB#0	4.48	5.32
	1880.0		4.79	5.65
	1905.0		4.99	5.87
15 MHz	1857.5	1RB#0	4.55	5.39
	1880.0		8.45	5.77
	1902.5		5.05	5.92
20 MHz	1860.0	1RB#0	4.34	5.20
	1880.0		4.83	5.87
	1900.0		4.85	5.60

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




LTE FDD Band 2 – 1.4 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel

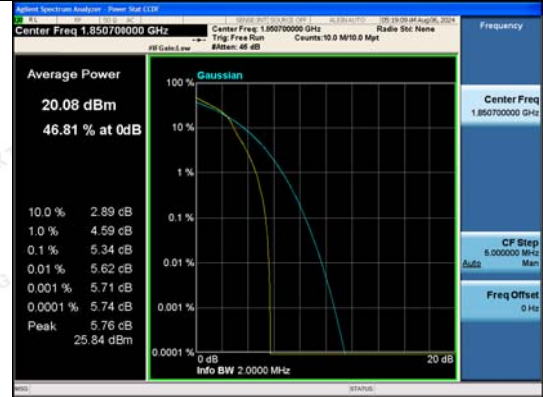

1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 2-3MHz Channel Bandwidth PAPR

QPSK

16QAM


Low Channel

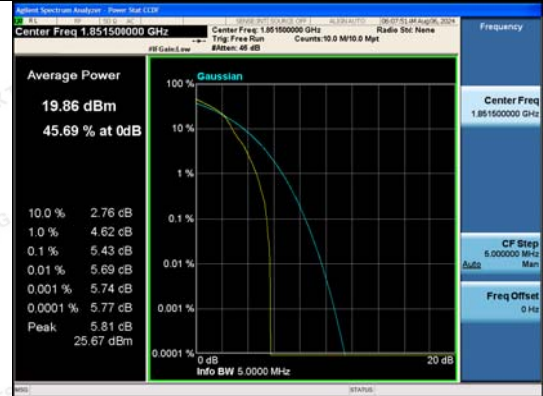

1RB#0

1RB#0

Middle Channel

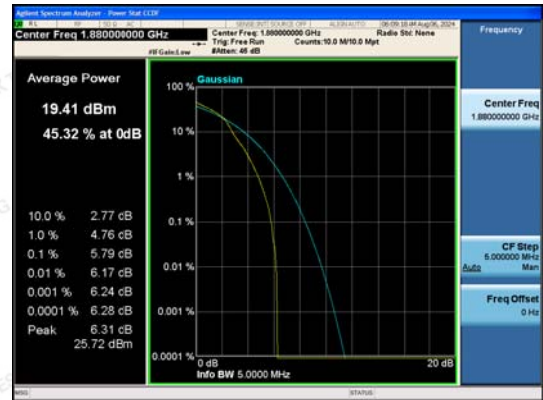

1RB#0

1RB#0

High Channel




1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

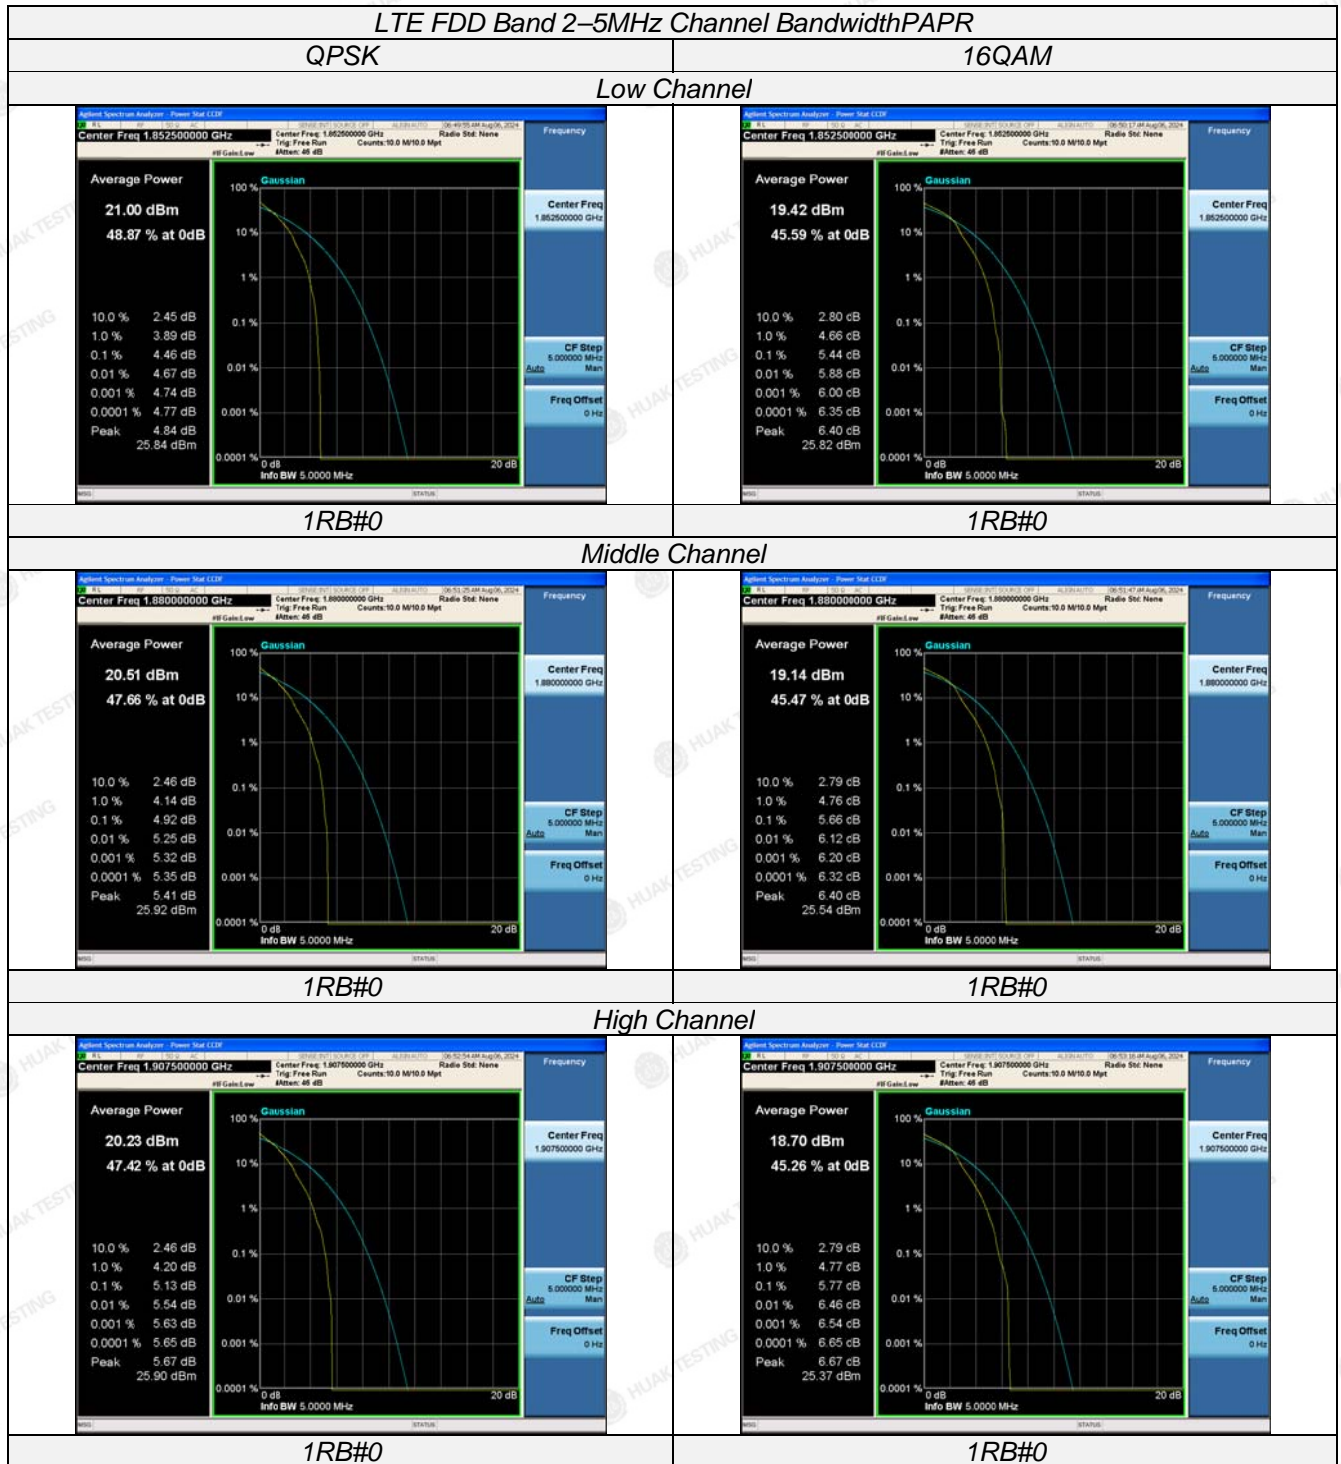

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The HUAJ is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

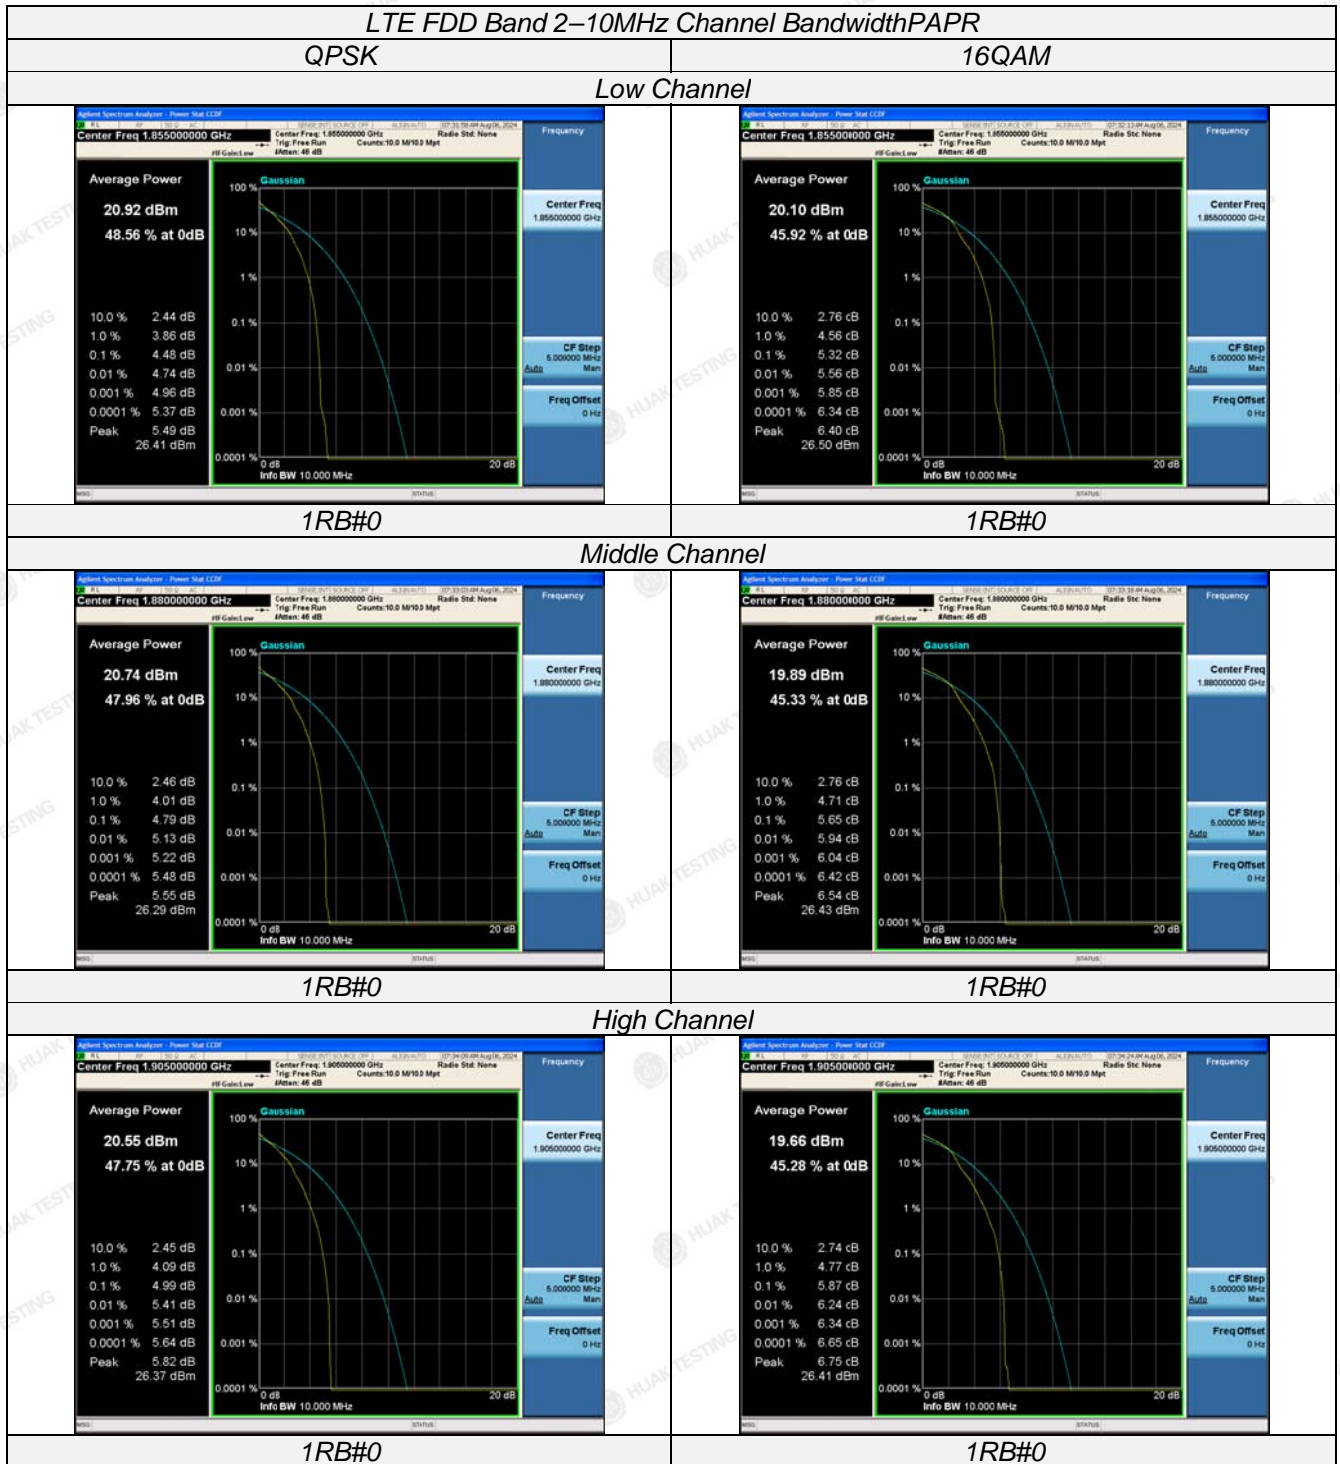

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. This document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

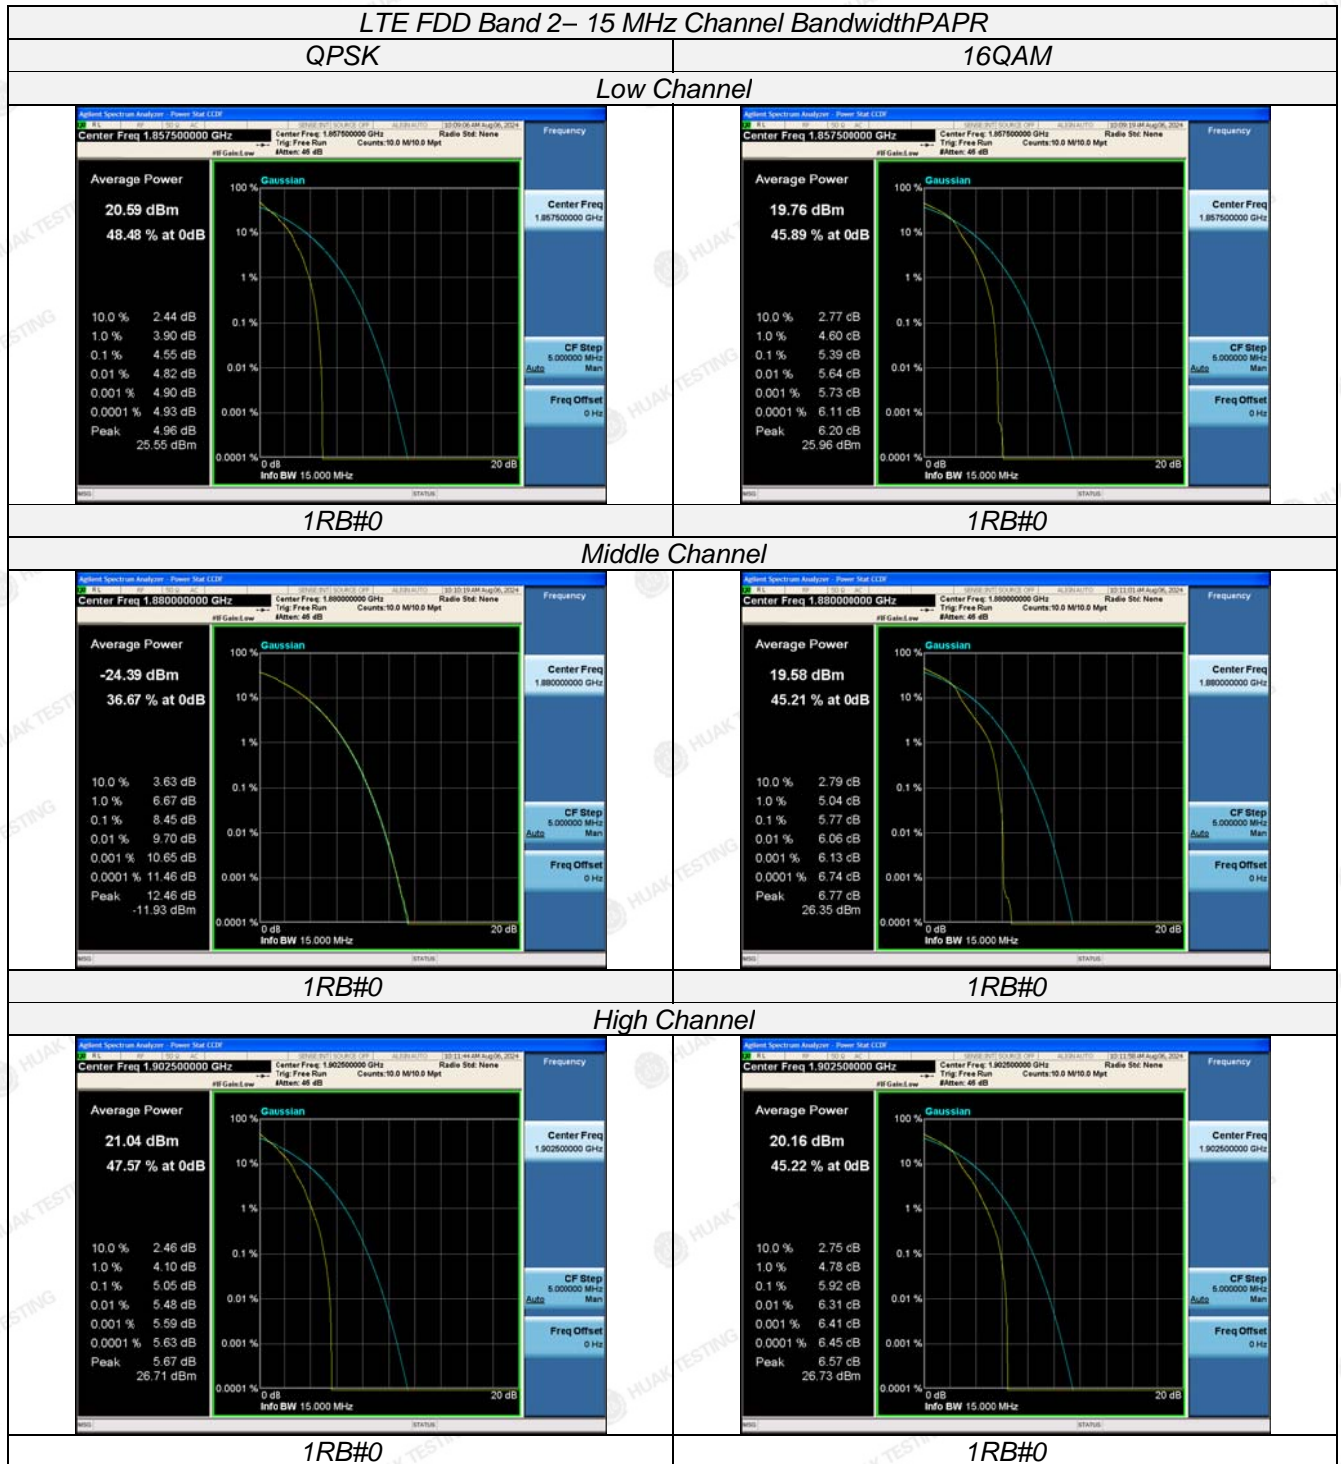

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

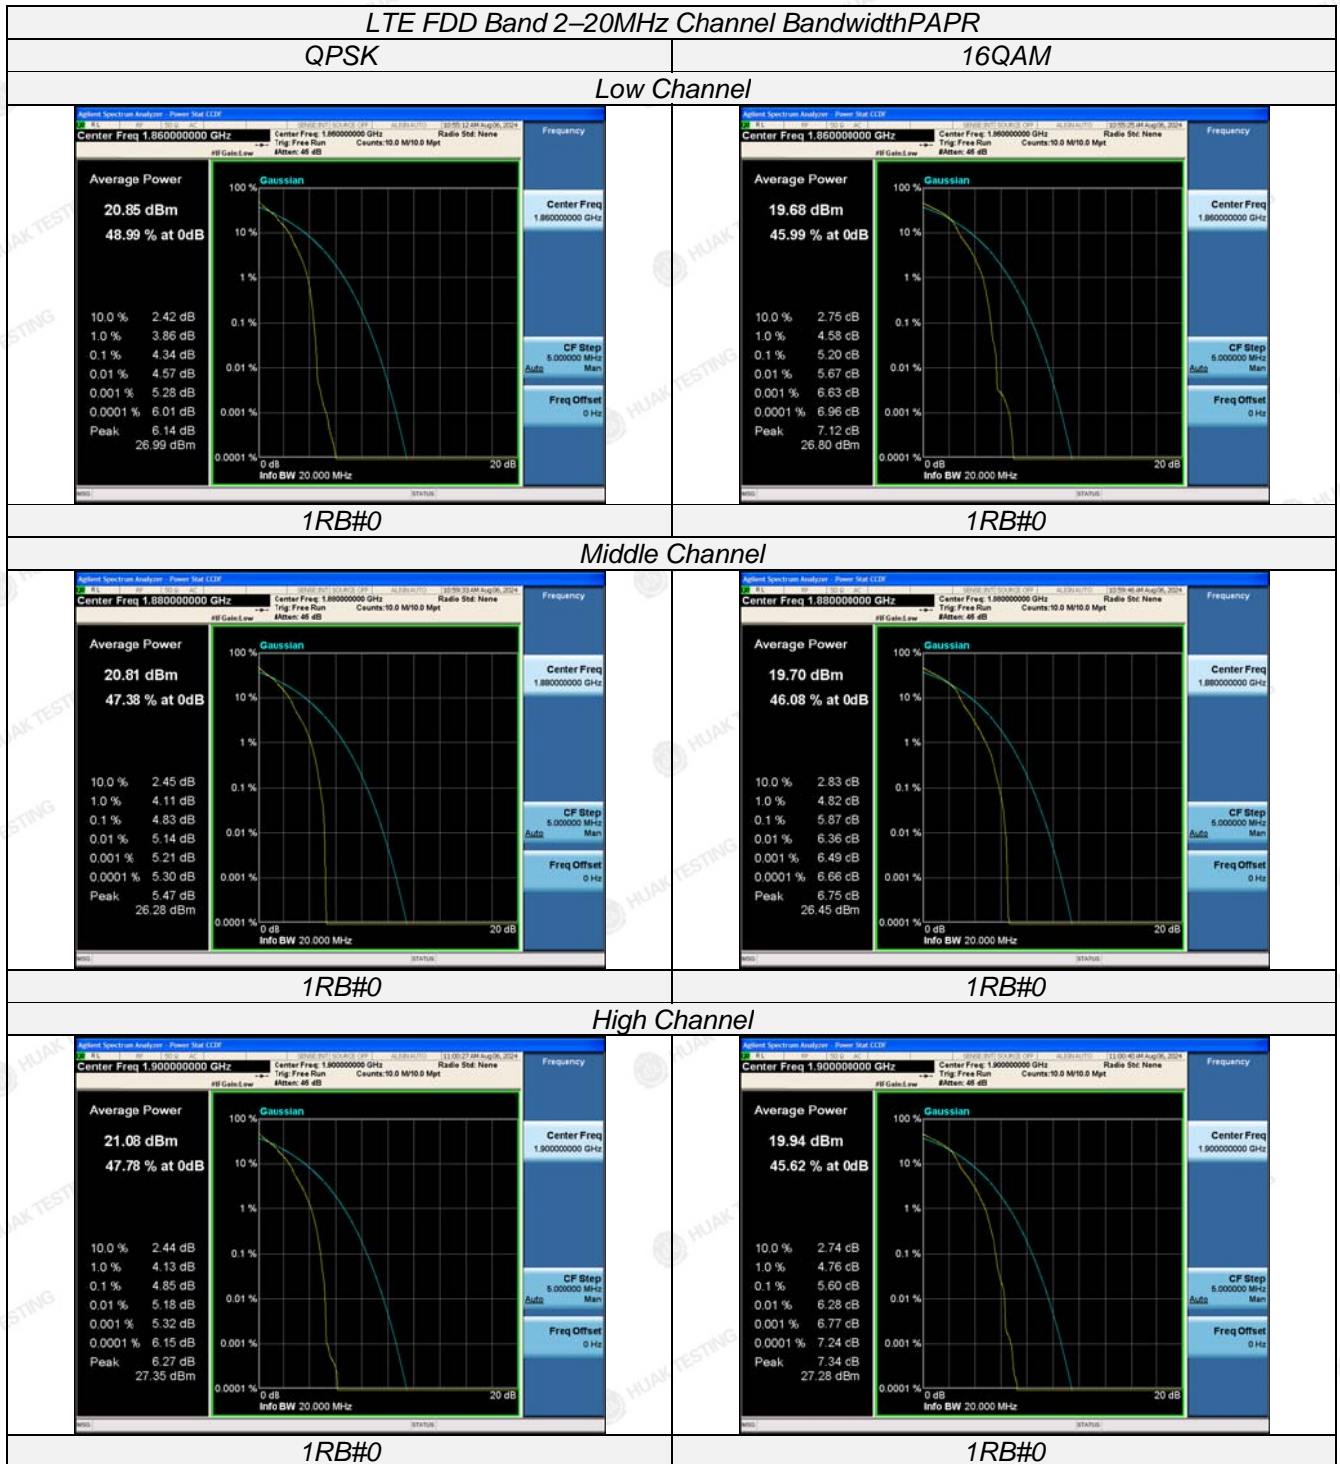

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

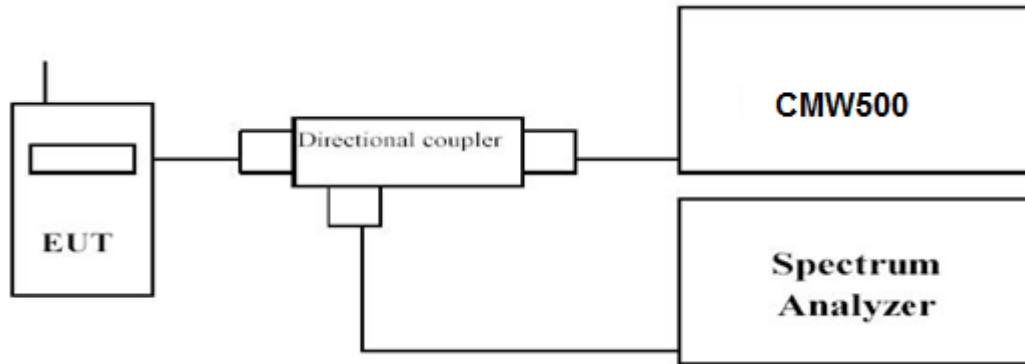

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW ≥ 3 times RBW. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS







Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

LTE FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	1850.7	1.241	1.250	1.0906	1.0993
		1880.0	1.243	1.252	1.0915	1.1026
		1909.3	1.244	1.251	1.0918	1.1015
3 MHz	15RB#0	1851.5	3.038	3.028	2.7129	2.6987
		1880.0	3.006	3.024	2.7087	2.7049
		1908.5	3.006	3.017	2.7117	2.6975
5 MHz	25RB#0	1852.5	4.978	4.971	4.5124	4.5052
		1880.0	4.991	4.968	4.5106	4.5025
		1907.5	4.988	4.962	4.5053	4.5009
10 MHz	50RB#0	1855.0	9.924	9.957	9.0014	8.9859
		1880.0	9.929	9.920	9.0063	8.9958
		1905.0	9.919	9.905	8.9946	8.9958
15 MHz	75RB#0	1857.5	14.99	14.96	13.516	13.498
		1880.0	14.95	14.98	13.515	13.529
		1902.5	14.92	14.90	13.488	13.491
20 MHz	100RB#0	1860.0	19.71	19.71	17.987	18.027
		1880.0	19.89	19.85	18.089	18.044
		1900.0	19.79	19.68	18.005	18.005

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

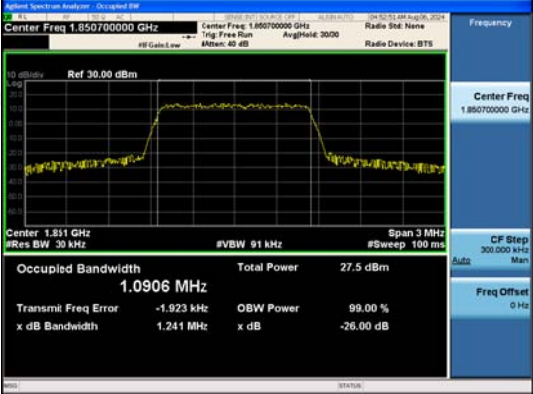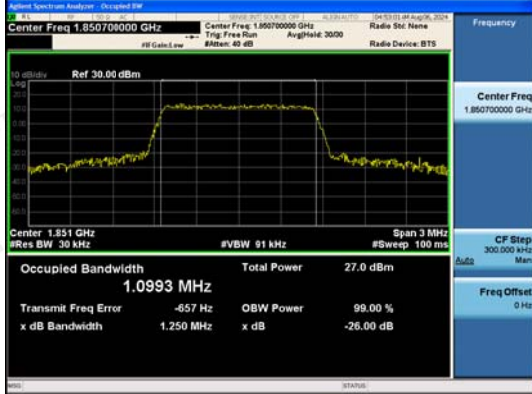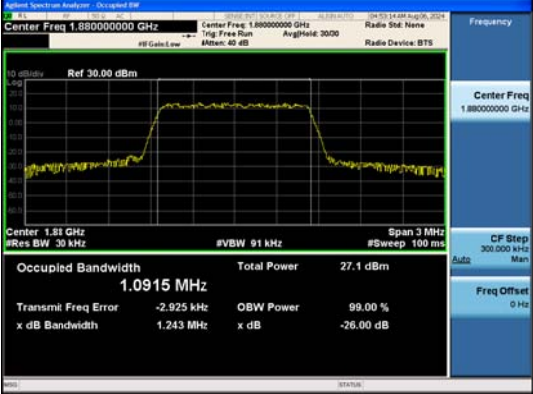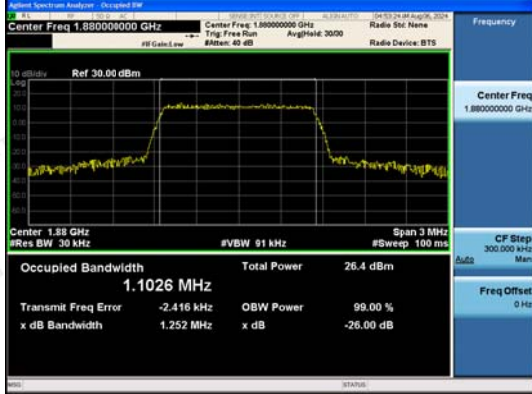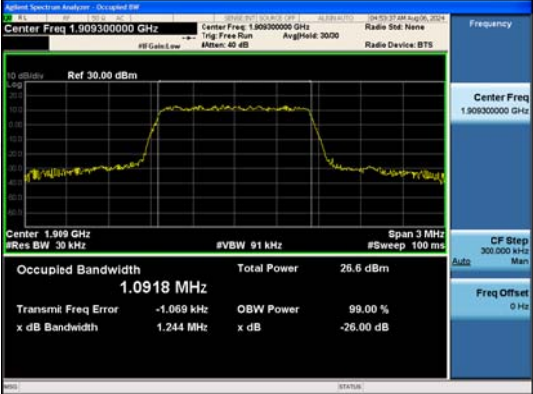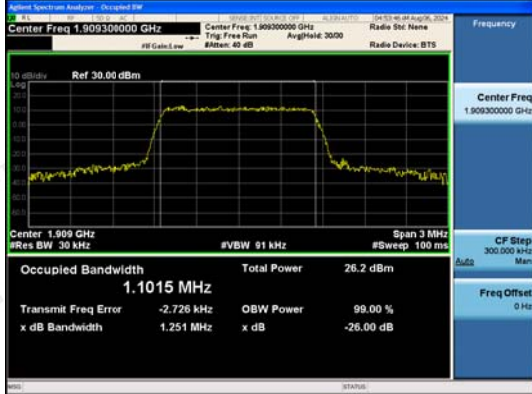

LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
 <p>Center Freq 1.850700000 GHz</p> <p>Center Freq 1.850700000 GHz</p> <p>Center Freq 1.851 GHz</p> <p>Occupied Bandwidth 1.0906 MHz</p> <p>Total Power 27.5 dBm</p> <p>Transmit Freq Error -1.923 kHz</p> <p>x dB Bandwidth 1.241 MHz</p>	 <p>Center Freq 1.850700000 GHz</p> <p>Center Freq 1.850700000 GHz</p> <p>Center Freq 1.851 GHz</p> <p>Occupied Bandwidth 1.0993 MHz</p> <p>Total Power 27.0 dBm</p> <p>Transmit Freq Error -657 Hz</p> <p>x dB Bandwidth 1.250 MHz</p>
6RB#0	6RB#0
Middle Channel	
 <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.881 GHz</p> <p>Occupied Bandwidth 1.0915 MHz</p> <p>Total Power 27.1 dBm</p> <p>Transmit Freq Error -2.925 kHz</p> <p>x dB Bandwidth 1.243 MHz</p>	 <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.88 GHz</p> <p>Occupied Bandwidth 1.1026 MHz</p> <p>Total Power 26.4 dBm</p> <p>Transmit Freq Error -2.416 kHz</p> <p>x dB Bandwidth 1.252 MHz</p>
6RB#0	6RB#0
High Channel	
 <p>Center Freq 1.909300000 GHz</p> <p>Center Freq 1.909300000 GHz</p> <p>Center Freq 1.909 GHz</p> <p>Occupied Bandwidth 1.0918 MHz</p> <p>Total Power 26.6 dBm</p> <p>Transmit Freq Error -1.069 kHz</p> <p>x dB Bandwidth 1.244 MHz</p>	 <p>Center Freq 1.909300000 GHz</p> <p>Center Freq 1.909300000 GHz</p> <p>Center Freq 1.909 GHz</p> <p>Occupied Bandwidth 1.1015 MHz</p> <p>Total Power 26.2 dBm</p> <p>Transmit Freq Error -2.726 kHz</p> <p>x dB Bandwidth 1.251 MHz</p>
6RB#0	6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 2-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM

Low Channel

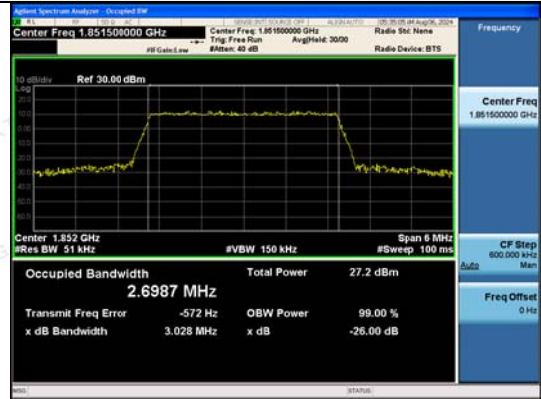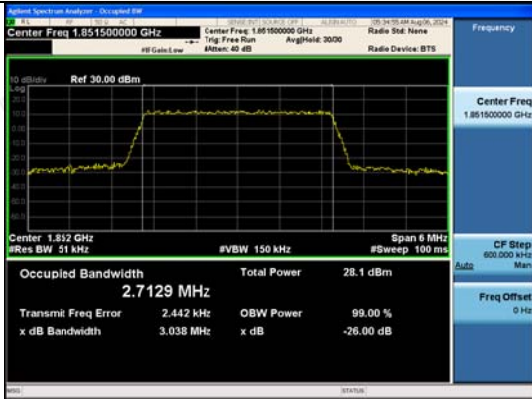

15RB#0

15RB#0


Middle Channel



15RB#0

15RB#0

High Channel

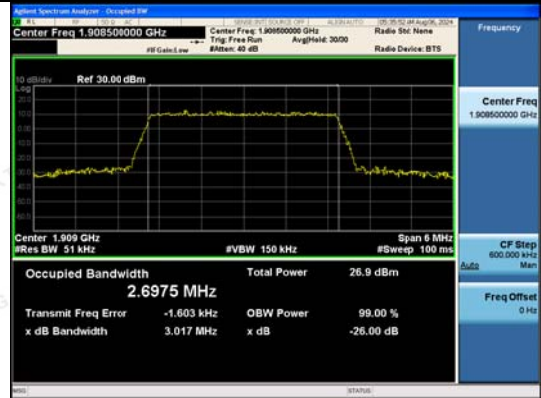

15RB#0

15RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China








LTE FDD Band 2-5MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
<p>Center Freq 1.852500000 GHz</p> <p>Center Freq 1.852500000 GHz</p> <p>Center Freq 1.852500000 GHz</p> <p>Occupied Bandwidth 4.5124 MHz</p> <p>Total Power 28.7 dBm</p> <p>Transmit Freq Error -6.206 kHz</p> <p>x dB Bandwidth 4.978 MHz</p>	<p>Center Freq 1.852500000 GHz</p> <p>Center Freq 1.852500000 GHz</p> <p>Center Freq 1.852500000 GHz</p> <p>Occupied Bandwidth 4.5052 MHz</p> <p>Total Power 27.9 dBm</p> <p>Transmit Freq Error -2.715 kHz</p> <p>x dB Bandwidth 4.971 MHz</p>
25RB#0	25RB#0
Middle Channel	
<p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth 4.5106 MHz</p> <p>Total Power 28.4 dBm</p> <p>Transmit Freq Error -7.398 kHz</p> <p>x dB Bandwidth 4.991 MHz</p>	<p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth 4.5025 MHz</p> <p>Total Power 27.9 dBm</p> <p>Transmit Freq Error -6.570 kHz</p> <p>x dB Bandwidth 4.968 MHz</p>
25RB#0	25RB#0
High Channel	
<p>Center Freq 1.907500000 GHz</p> <p>Center Freq 1.907500000 GHz</p> <p>Center Freq 1.907500000 GHz</p> <p>Occupied Bandwidth 4.5053 MHz</p> <p>Total Power 28.2 dBm</p> <p>Transmit Freq Error -6.301 kHz</p> <p>x dB Bandwidth 4.988 MHz</p>	<p>Center Freq 1.907500000 GHz</p> <p>Center Freq 1.907500000 GHz</p> <p>Center Freq 1.907500000 GHz</p> <p>Occupied Bandwidth 4.5009 MHz</p> <p>Total Power 27.7 dBm</p> <p>Transmit Freq Error -5.251 kHz</p> <p>x dB Bandwidth 4.962 MHz</p>
25RB#0	25RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

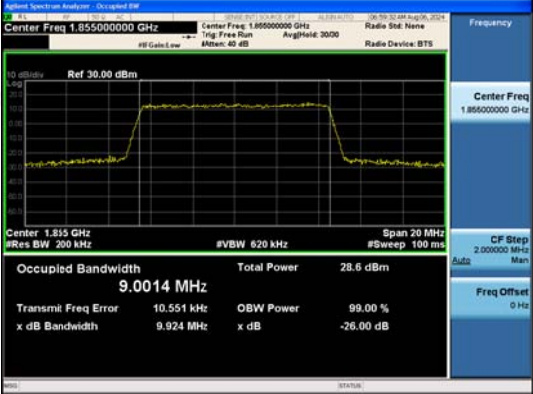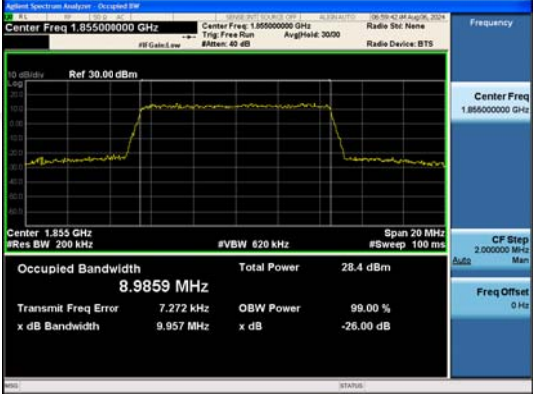

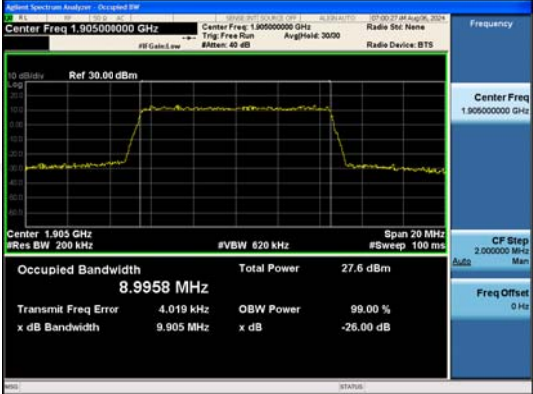LTE FDD Band 2-10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
 <p>Center Freq 1.855000000 GHz</p> <p>Center Freq 1.855000000 GHz</p> <p>Center Freq 1.855000000 GHz</p> <p>Occupied Bandwidth 9.0014 MHz</p> <p>Total Power 28.6 dBm</p> <p>Transmit Freq Error 10.551 kHz</p> <p>x dB Bandwidth 9.924 MHz</p>	 <p>Center Freq 1.855000000 GHz</p> <p>Center Freq 1.855000000 GHz</p> <p>Center Freq 1.855000000 GHz</p> <p>Occupied Bandwidth 8.9859 MHz</p> <p>Total Power 28.4 dBm</p> <p>Transmit Freq Error 7.272 kHz</p> <p>x dB Bandwidth 9.957 MHz</p>
50RB#0	50RB#0
Middle Channel	
 <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth 9.0063 MHz</p> <p>Total Power 28.3 dBm</p> <p>Transmit Freq Error 2.667 kHz</p> <p>x dB Bandwidth 9.929 MHz</p>	 <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Center Freq 1.880000000 GHz</p> <p>Occupied Bandwidth 8.9958 MHz</p> <p>Total Power 28.0 dBm</p> <p>Transmit Freq Error -795 Hz</p> <p>x dB Bandwidth 9.920 MHz</p>
50RB#0	50RB#0
High Channel	
 <p>Center Freq 1.905000000 GHz</p> <p>Center Freq 1.905000000 GHz</p> <p>Center Freq 1.905000000 GHz</p> <p>Occupied Bandwidth 8.9946 MHz</p> <p>Total Power 28.2 dBm</p> <p>Transmit Freq Error 11.229 kHz</p> <p>x dB Bandwidth 9.919 MHz</p>	 <p>Center Freq 1.905000000 GHz</p> <p>Center Freq 1.905000000 GHz</p> <p>Center Freq 1.905000000 GHz</p> <p>Occupied Bandwidth 8.9958 MHz</p> <p>Total Power 27.6 dBm</p> <p>Transmit Freq Error 4.019 kHz</p> <p>x dB Bandwidth 9.905 MHz</p>
50RB#0	50RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 2-15MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM


Low Channel

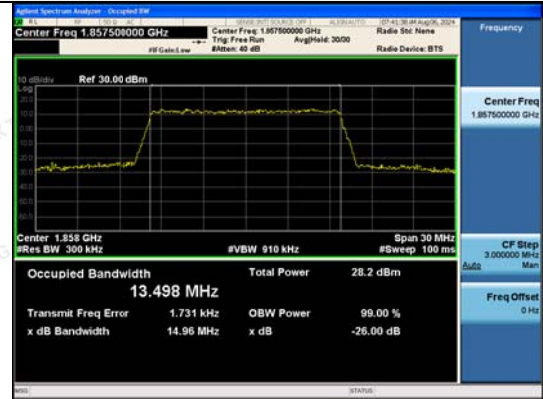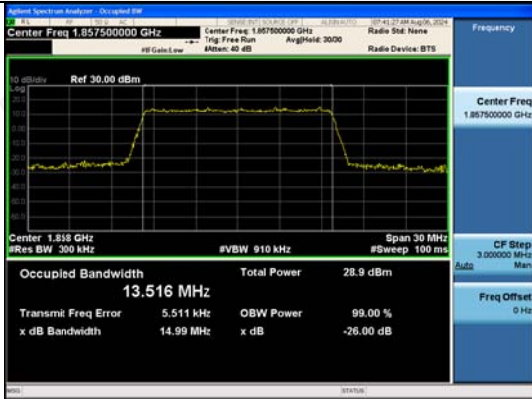

75RB#0

75RB#0

Middle Channel

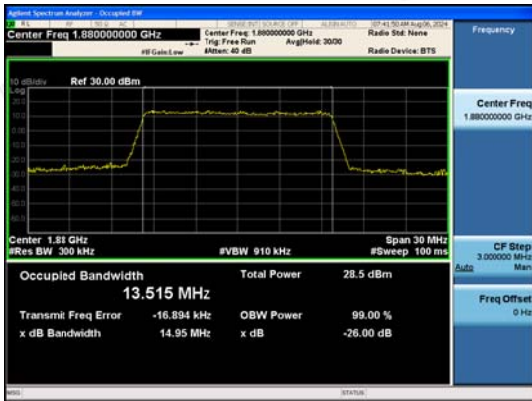

75RB#0

75RB#0

High Channel



75RB#0

75RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 2-20MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

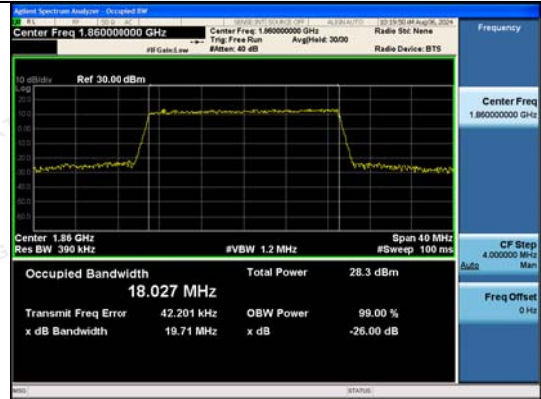

100RB#0

100RB#0

Middle Channel

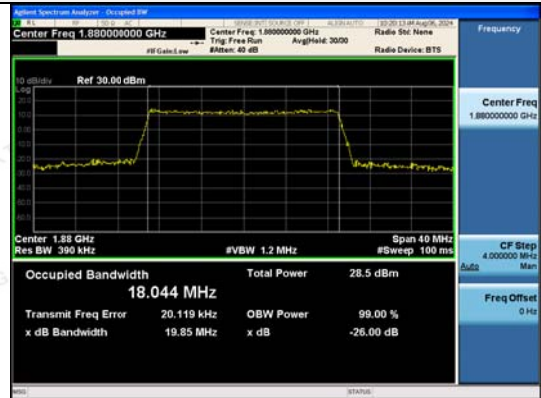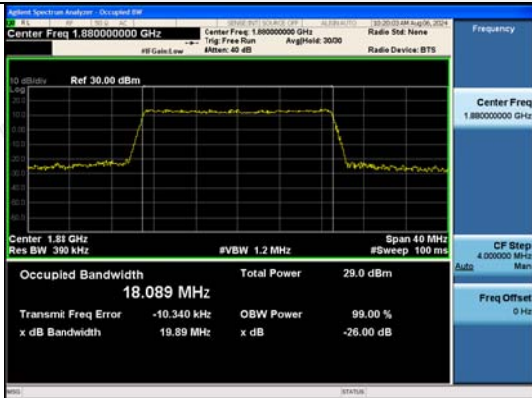

100RB#0

100RB#0

High Channel



100RB#0

100RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




4.4 Band Edge Compliance

LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

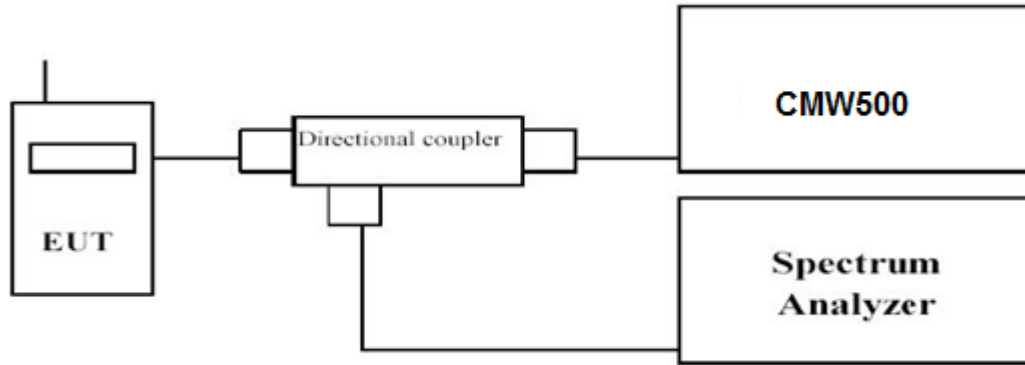



TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.

TEST RESULTS

Remark:


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.

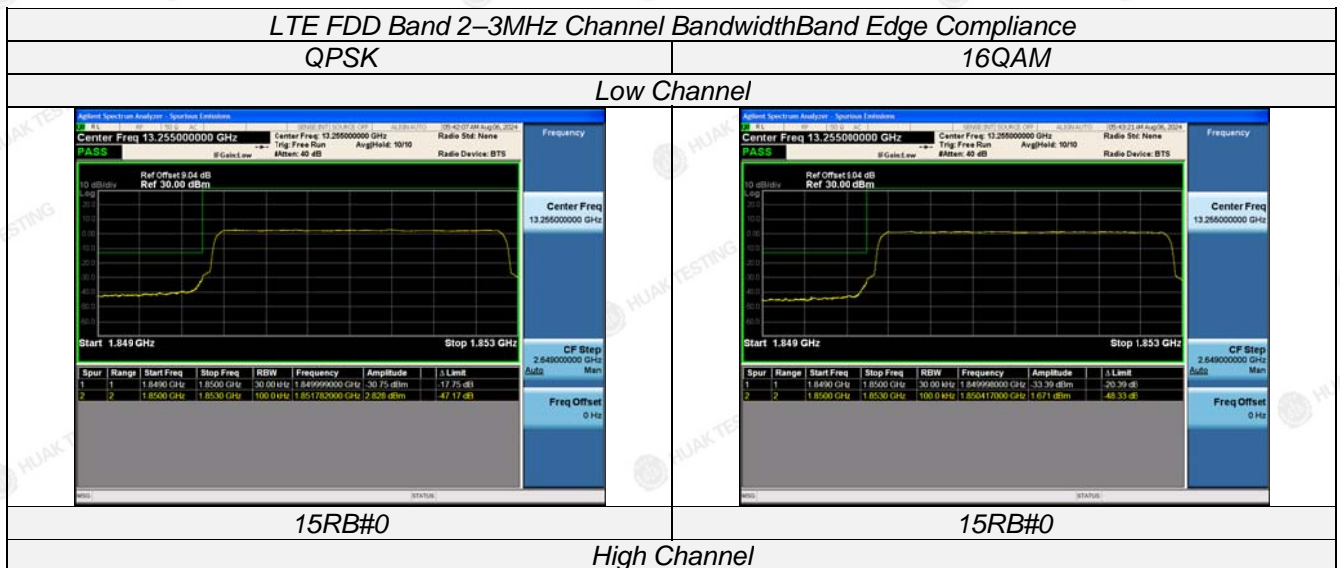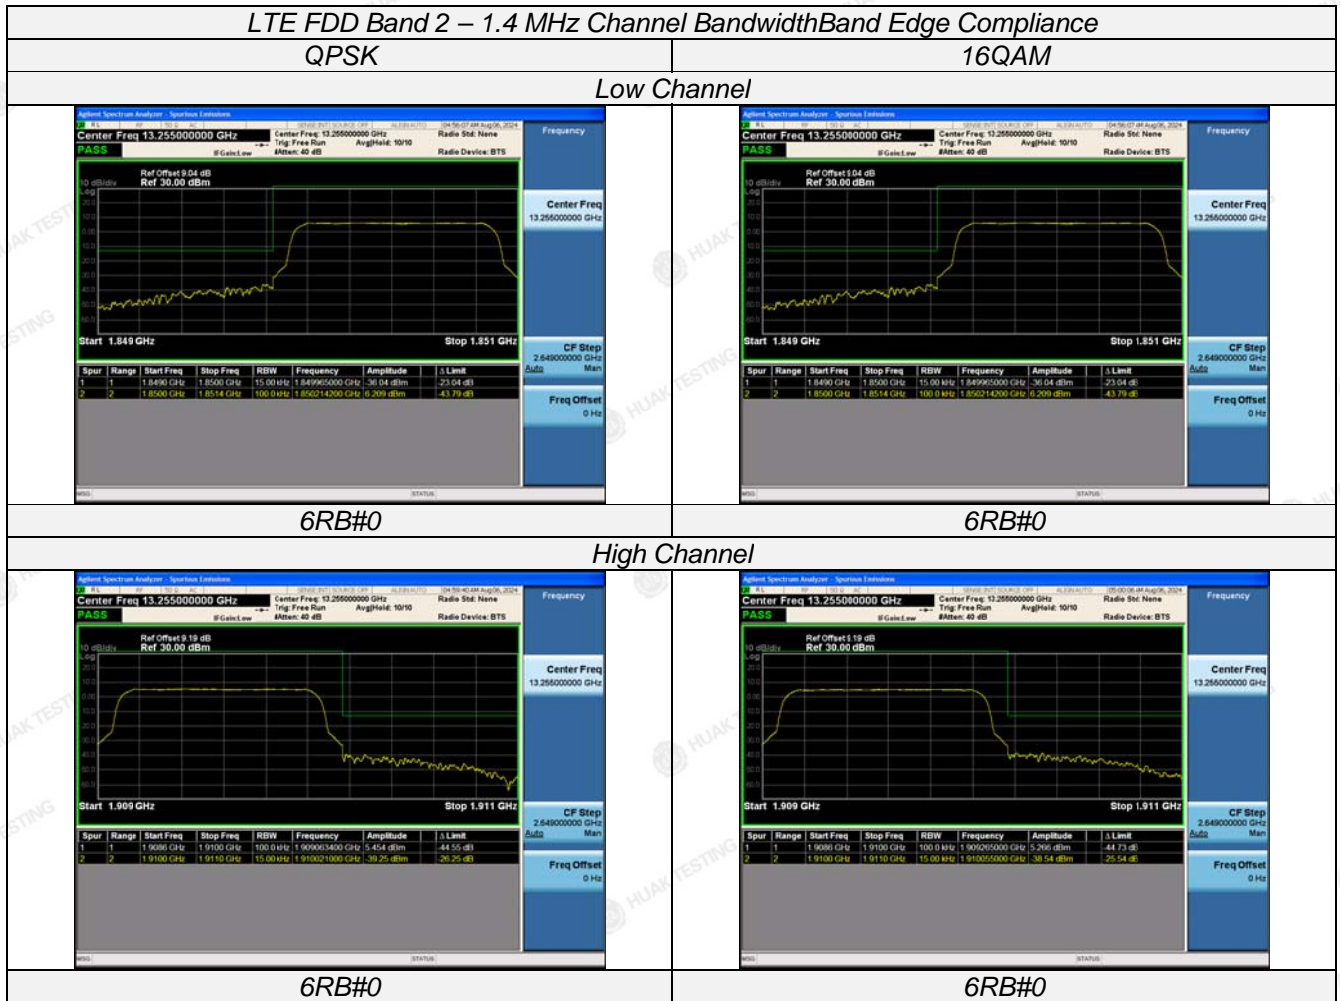

The results shown in this test report refer only to the sample(s) unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com



Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

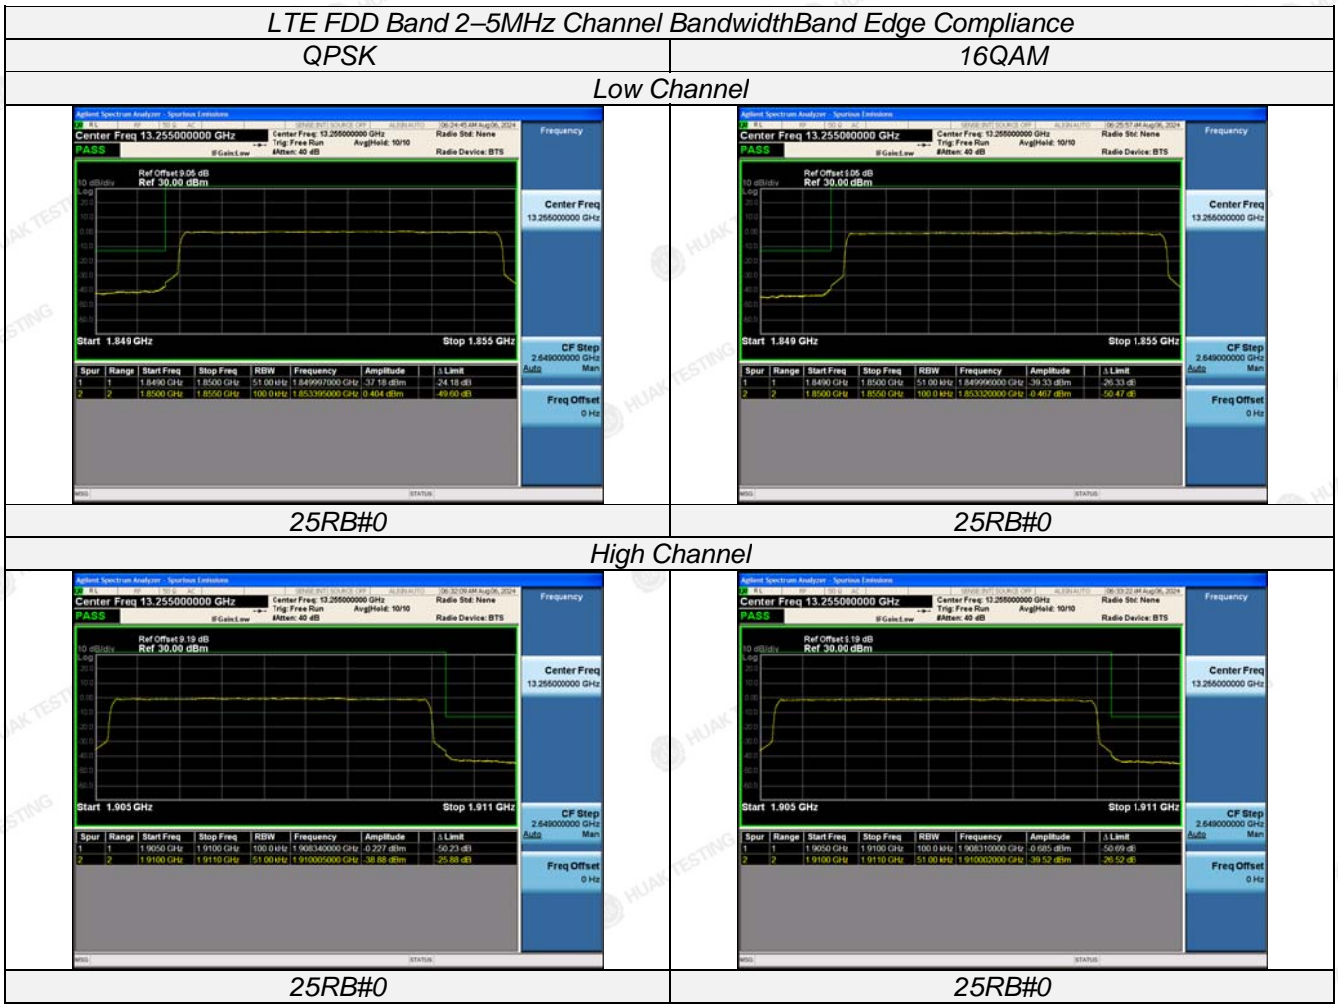

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

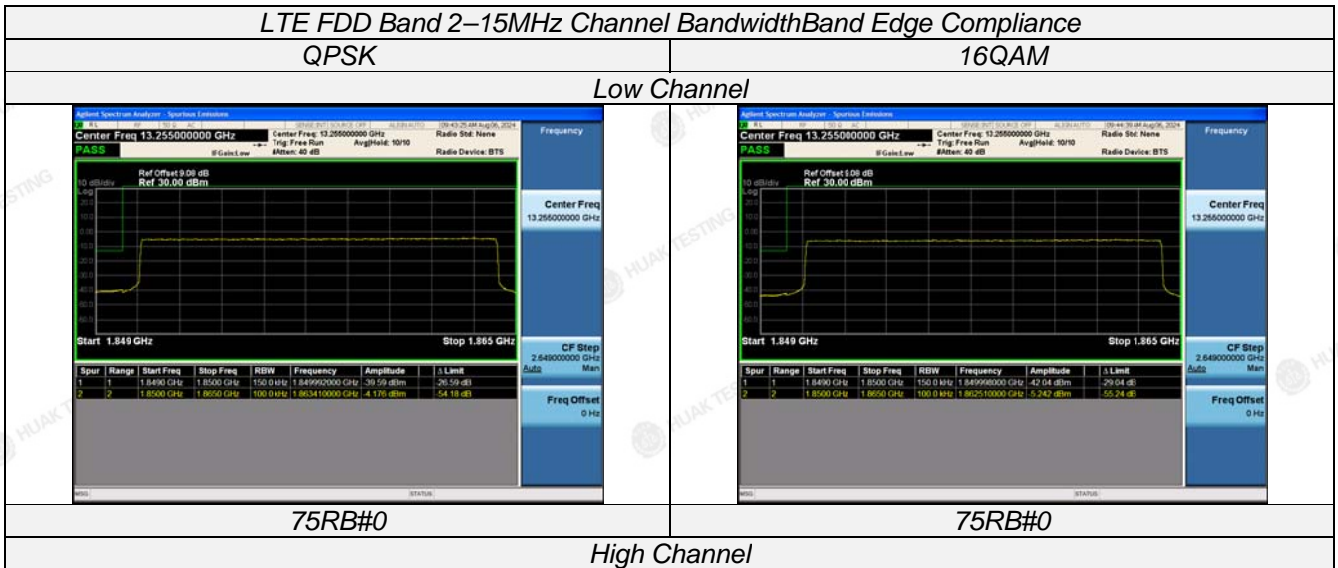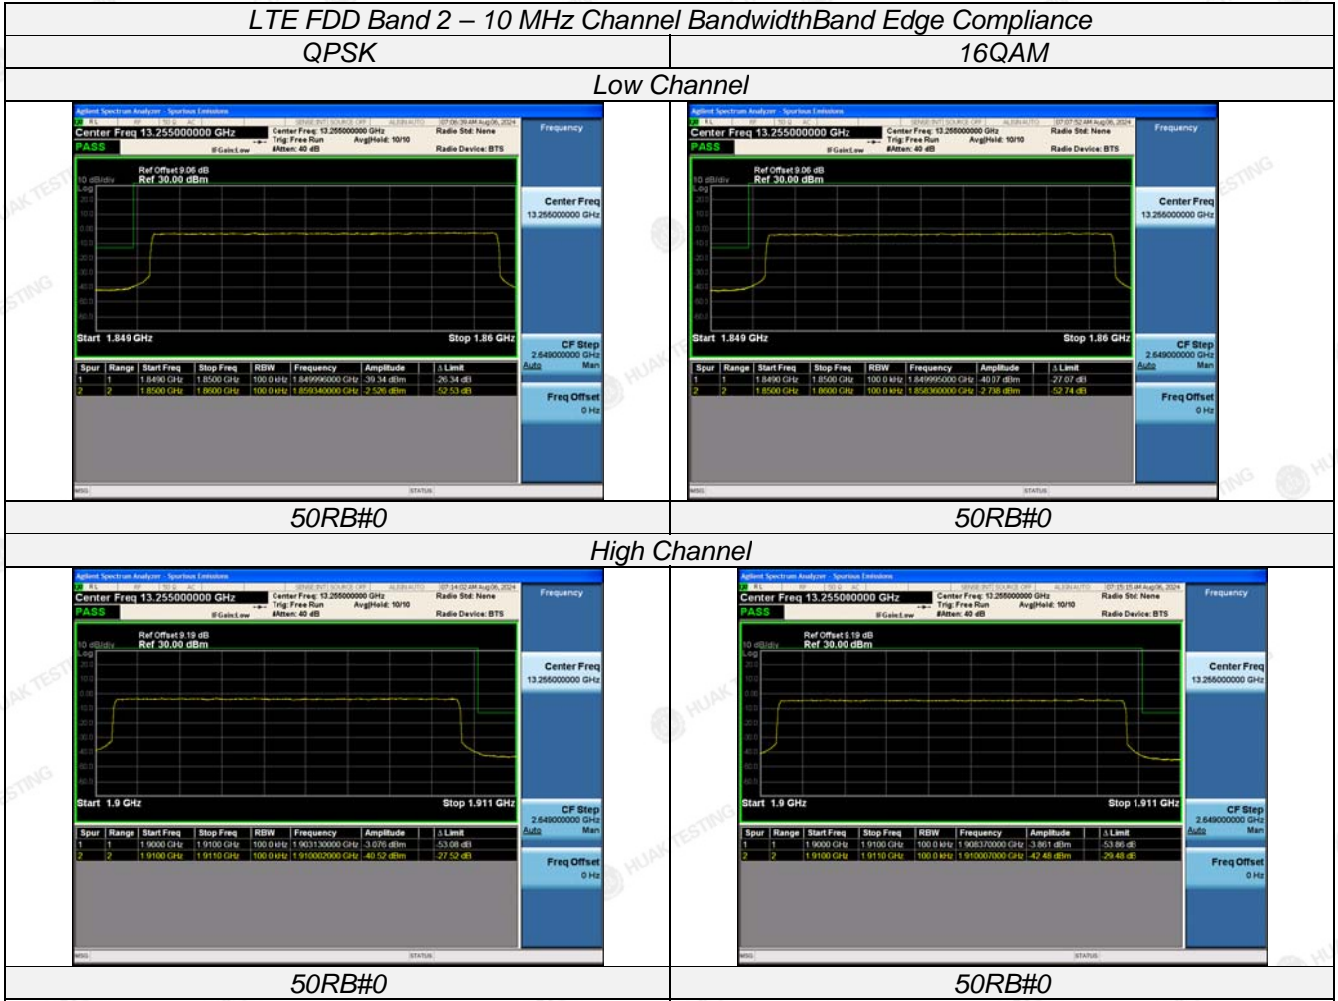

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

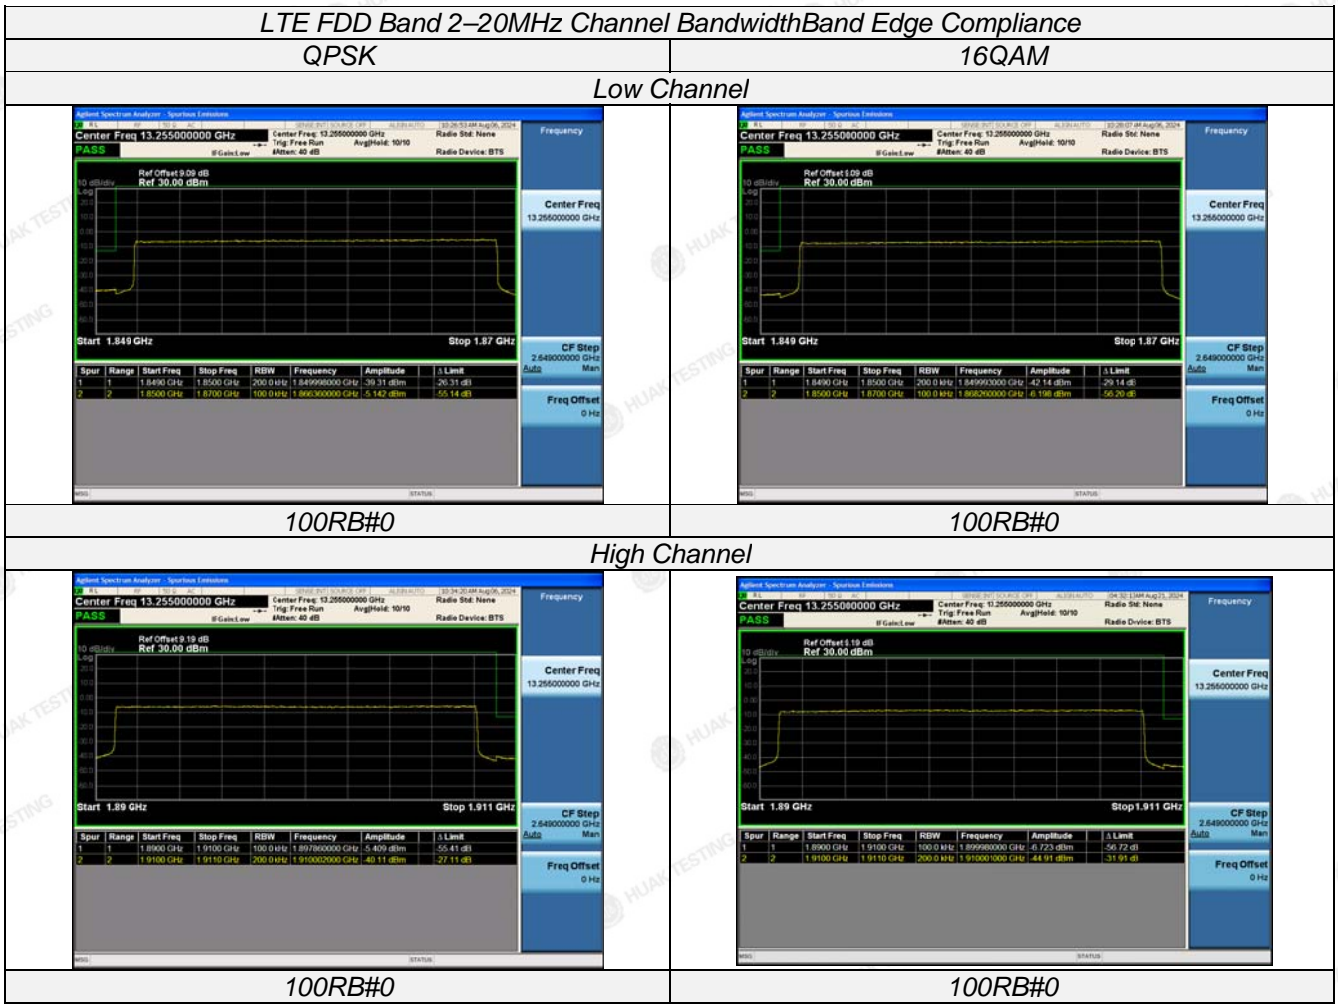

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.5 Spurious Emission on Antenna Port

LIMIT

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

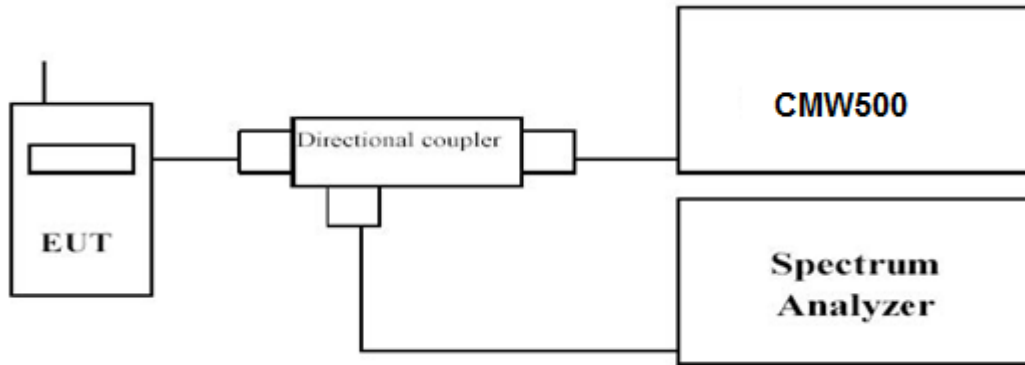

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 2	0.01~20	100KHz	300KHz	Auto

TEST RESULTS

Remark:


- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case at the QPSK Mode for each Channel Bandwidth of LTE FDD Band 2.



LTE FDD Band 2-1.4MHz Channel Bandwidth

Low Channel

QPSK

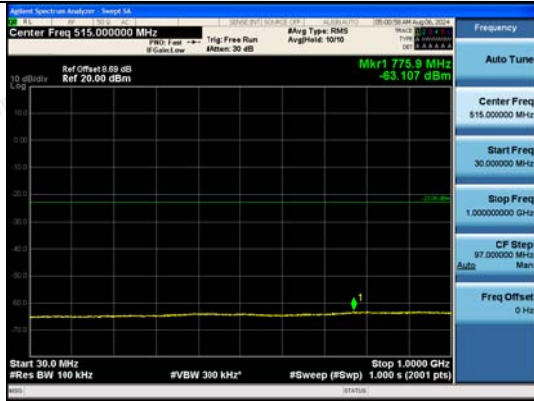

30MHz~1GHz



1GHz~3GHz




3GHz~20GHz


LTE FDD Band 2-1.4MHz Channel Bandwidth

Middle Channel

QPSK

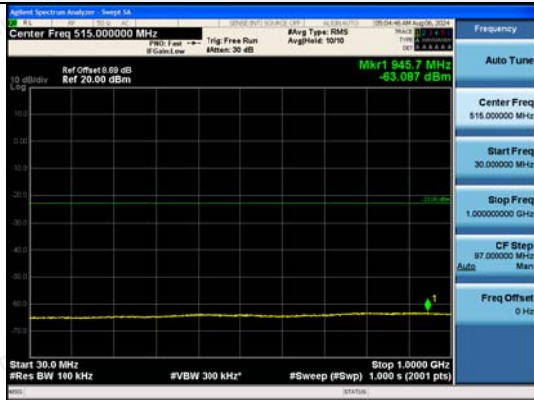

30MHz~1GHz

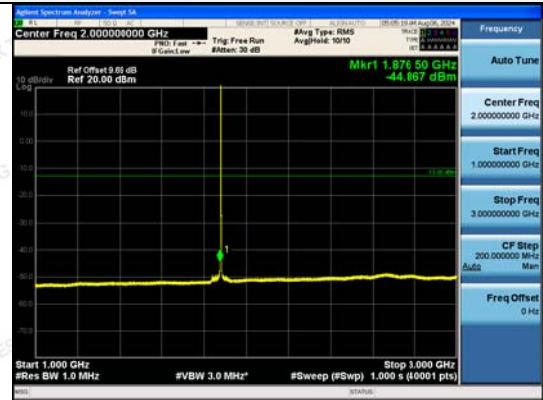


1GHz~3GHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

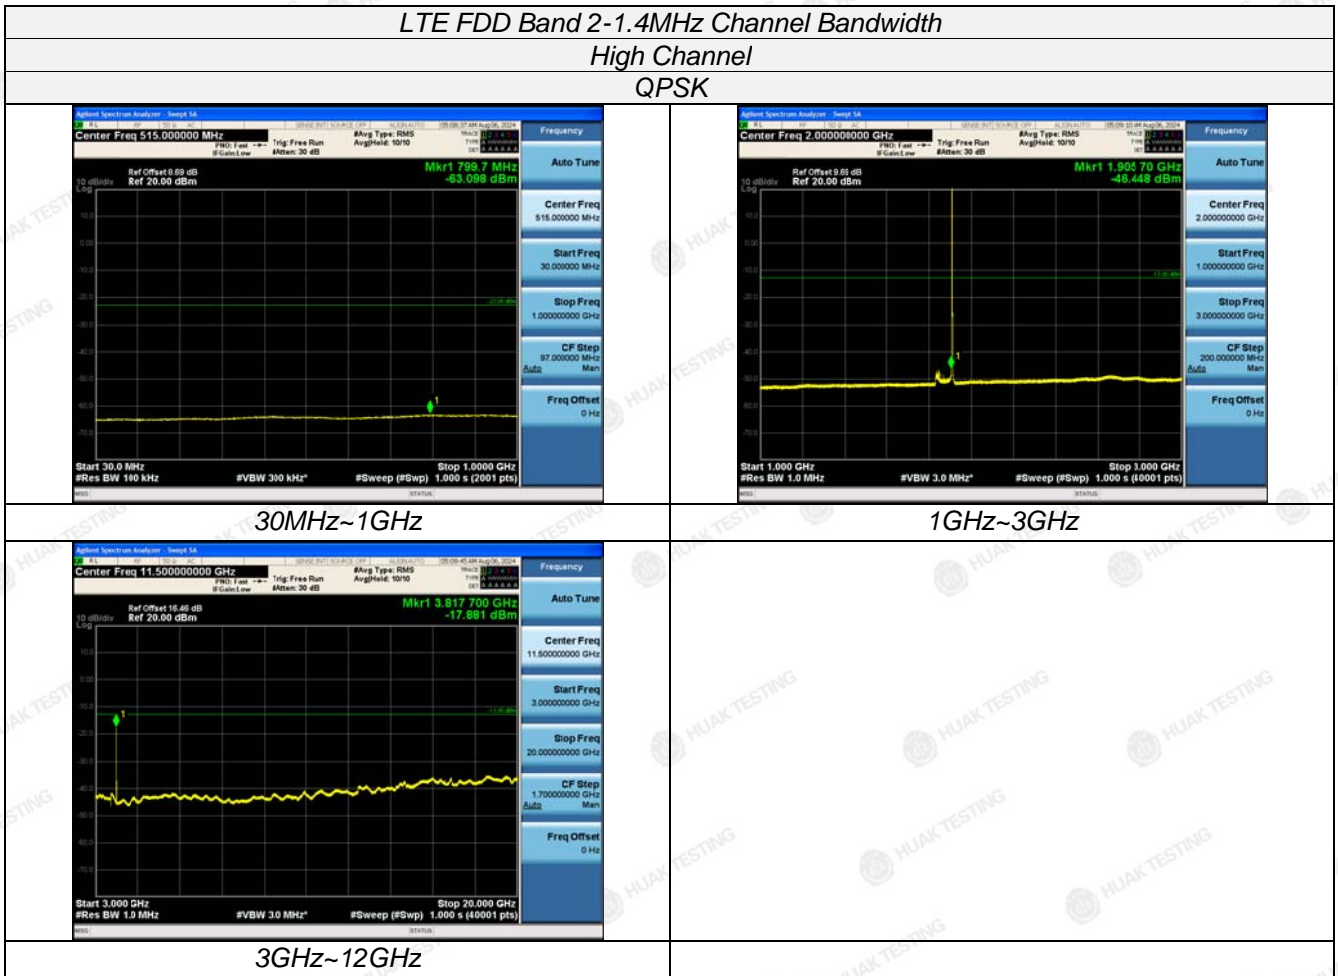

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 2-3MHz Channel Bandwidth

Low Channel

QPSK

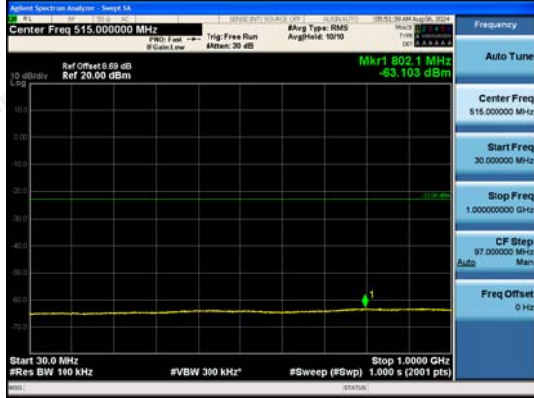

30MHz~1GHz

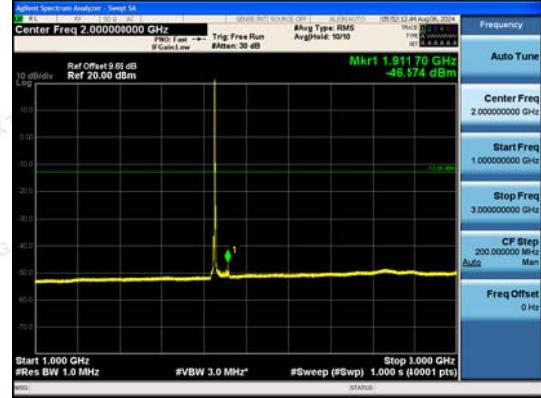

1GHz~3GHz



3GHz~12GHz


LTE FDD Band 2-3MHz Channel Bandwidth

Middle Channel

QPSK



30MHz~1GHz

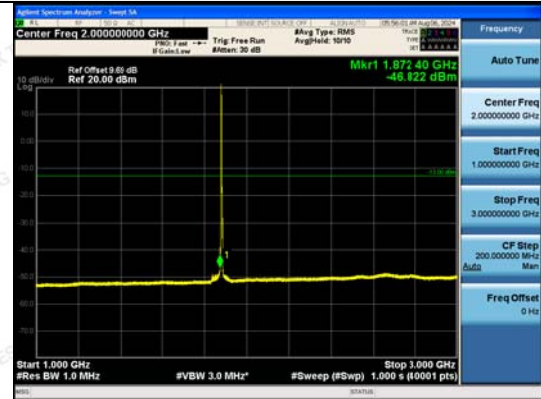

1GHz~3GHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2-3MHz Channel Bandwidth
High Channel
QPSK



30MHz~1GHz

1GHz~3GHz






LTE FDD Band 2-5 MHz Channel Bandwidth

Low Channel

QPSK



30MHz~1GHz

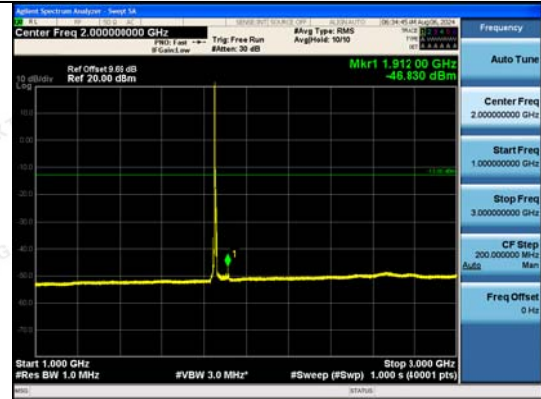

1GHz~3GHz




3GHz~12GHz


LTE FDD Band 2-5 MHz Channel Bandwidth

Middle Channel

QPSK

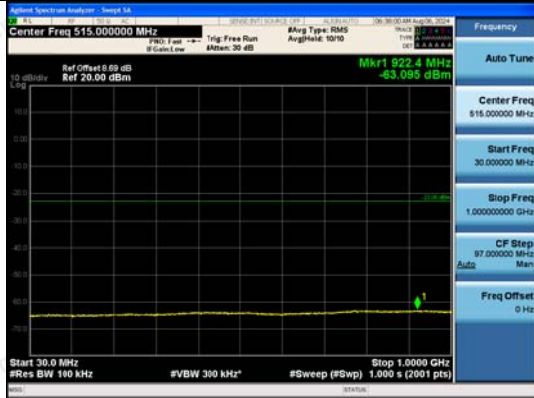

30MHz~1GHz

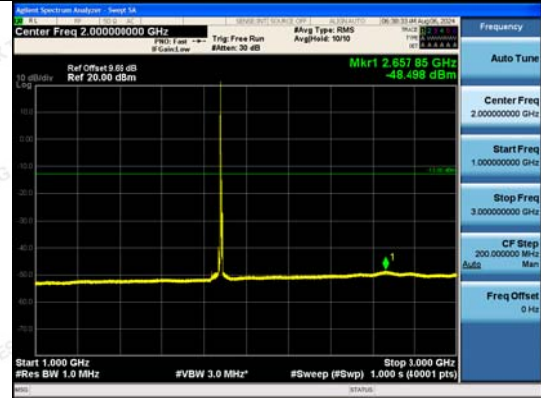

1GHz~3GHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2-5 MHz Channel Bandwidth
High Channel
QPSK



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 2-10 MHz Channel Bandwidth

Low Channel

QPSK



30MHz~1GHz

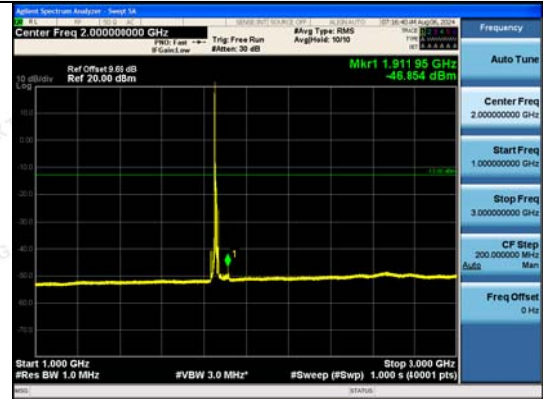

1GHz~3GHz




3GHz~12GHz


LTE FDD Band 2-10 MHz Channel Bandwidth

Middle Channel

QPSK

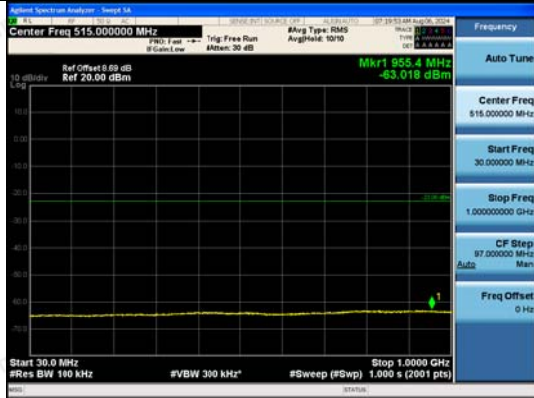

30MHz~1GHz

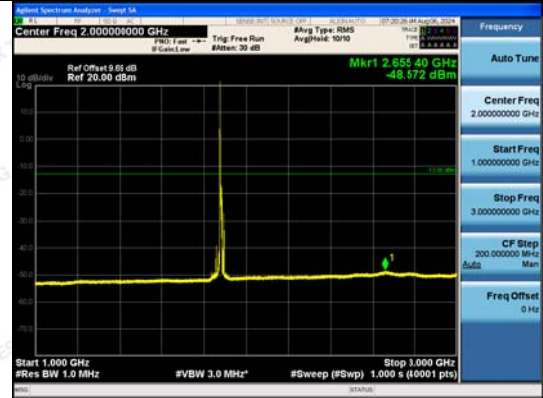

1GHz~3GHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2-10 MHz Channel Bandwidth
High Channel
QPSK



30MHz~1GHz

1GHz~3GHz



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 2-15 MHz Channel Bandwidth

Low Channel

QPSK



30MHz~1GHz

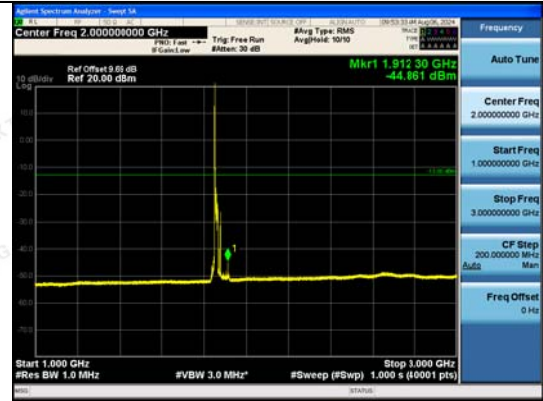

1GHz~3GHz



3GHz~12GHz


LTE FDD Band 2-15 MHz Channel Bandwidth

Middle Channel

QPSK



30MHz~1GHz

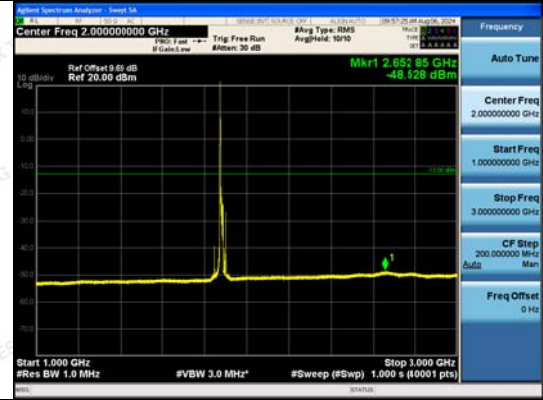

1GHz~3GHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2-15 MHz Channel Bandwidth
High Channel
QPSK



30MHz~1GHz

1GHz~3GHz



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 2-20 MHz Channel Bandwidth

Low Channel

QPSK

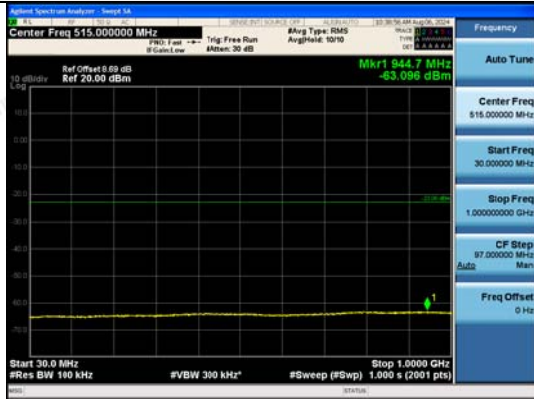

30MHz~1GHz

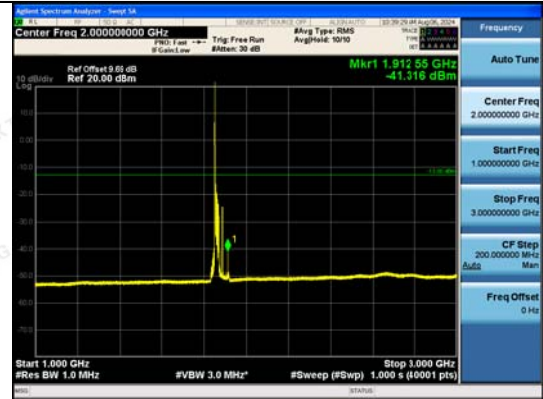

1GHz~3GHz




3GHz~12GHz


LTE FDD Band 2-20 MHz Channel Bandwidth

Middle Channel

QPSK

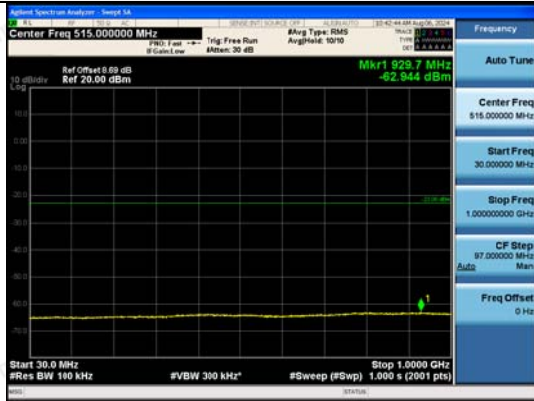

30MHz~1GHz

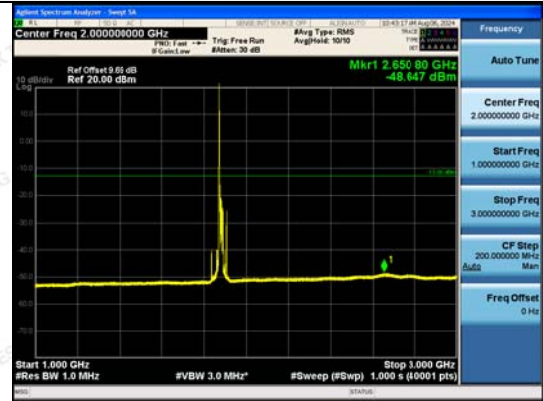

1GHz~3GHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2-20 MHz Channel Bandwidth
High Channel
QPSK



30MHz~1GHz

1GHz~3GHz



3GHz~12GHz

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.6 Radiated Spurious Emission

TEST APPLICABLE

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

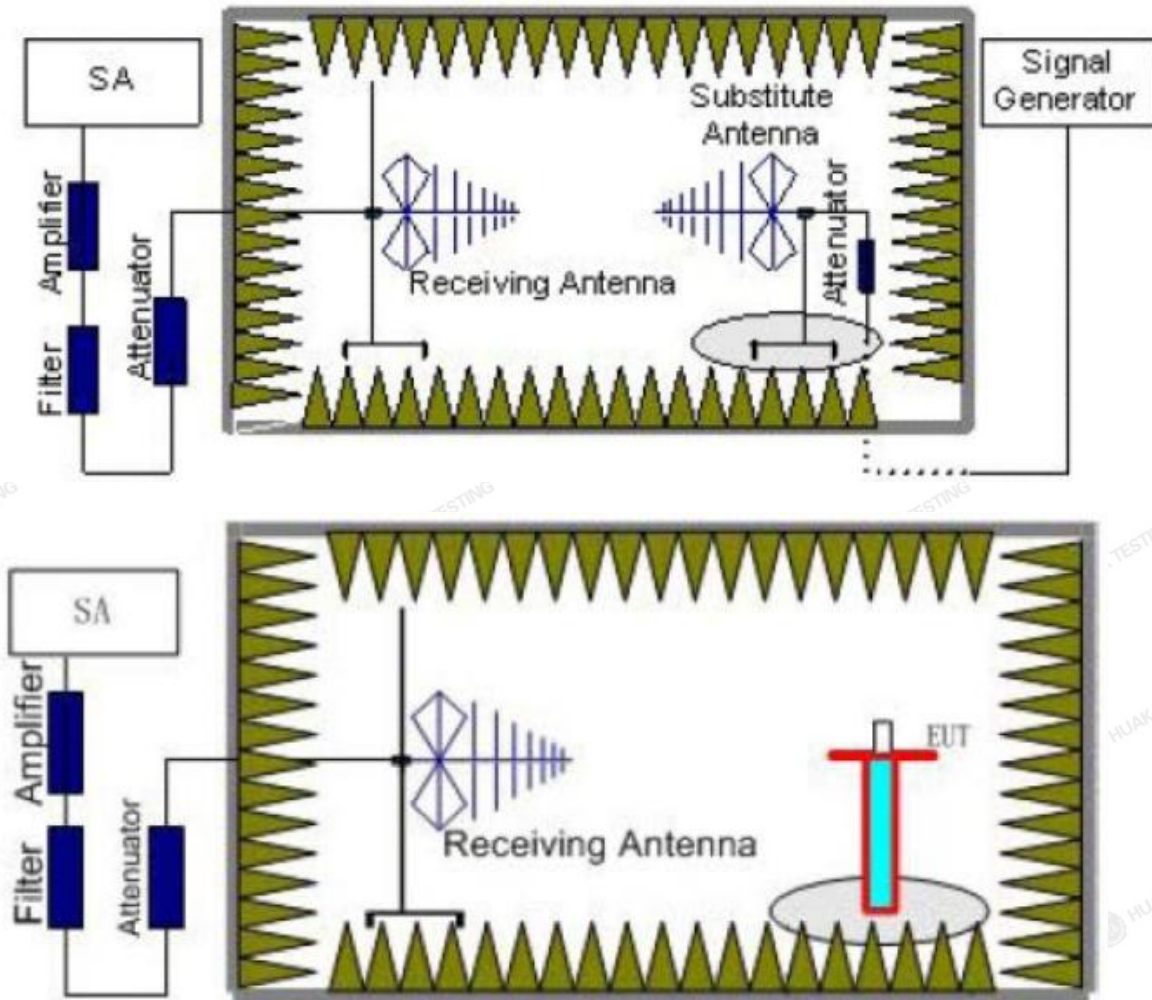

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).



- The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- An amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test. The measurement results are obtained as described below:
 $Power(EIRP) = P_{Mea} - P_{Ag} - P_{cl} + G_a$
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi$.
- In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 2	0.03~1	100KHz	300KHz	10
	1~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE FDD Band 2	Low	30MHz -20GHz	PASS
	Middle	30MHz -20GHz	PASS
	High	30MHz -20GHz	PASS

Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
- $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
- Not recorded other points as values lower than limits.
- Margin = Limit - EIRP

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.4	-42.16	4.39	3.00	12.34	-34.21	-13.00	21.21	H
5552.1	-44.56	5.31	3.00	13.52	-36.35	-13.00	23.35	H
3701.4	-44.97	4.39	3.00	12.34	-37.02	-13.00	24.02	V
5552.1	-45.89	5.31	3.00	13.52	-37.68	-13.00	24.68	V



LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_Middle Channel

Table with 9 columns: Frequency (MHz), P_Mea (dBm), P_cl (dB), Diatance, G_a Antenna Gain(dB), Peak EIRP (dBm), Limit (dBm), Margin (dB), Polarization. Rows include frequencies 3760.0, 5640.0, 3760.0, 5640.0.

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_High Channel

Table with 9 columns: Frequency (MHz), P_Mea (dBm), P_cl (dB), Diatance, G_a Antenna Gain(dB), Peak EIRP (dBm), Limit (dBm), Margin (dB), Polarization. Rows include frequencies 3806.6, 5709.9, 3806.6, 5709.9.

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_Low Channel

Table with 9 columns: Frequency (MHz), P_Mea (dBm), P_cl (dB), Diatance, G_a Antenna Gain(dB), Peak EIRP (dBm), Limit (dBm), Margin (dB), Polarization. Rows include frequencies 3703.0, 5554.5, 3703.0, 5554.5.

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_Middle Channel

Table with 9 columns: Frequency (MHz), P_Mea (dBm), P_cl (dB), Diatance, G_a Antenna Gain(dB), Peak EIRP (dBm), Limit (dBm), Margin (dB), Polarization. Rows include frequencies 3760.0, 5640.0, 3760.0, 5640.0.

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_High Channel

Table with 9 columns: Frequency (MHz), P_Mea (dBm), P_cl (dB), Diatance, G_a Antenna Gain(dB), Peak EIRP (dBm), Limit (dBm), Margin (dB), Polarization. Rows include frequencies 3817.0, 5725.5, 3817.0, 5725.5.

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_Low Channel

Table with 9 columns: Frequency (MHz), P_Mea (dBm), P_cl (dB), Diatance, G_a Antenna Gain(dB), Peak EIRP (dBm), Limit (dBm), Margin (dB), Polarization. Rows include frequencies 3705.0, 5557.5, 3705.0, 5557.5.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-42.04	4.41	3.00	12.34	-34.11	-13.00	21.11	H
5640.0	-44.66	5.38	3.00	13.58	-36.46	-13.00	23.46	H
3760.0	-45.48	4.41	3.00	12.34	-37.55	-13.00	24.55	V
5640.0	-46.04	5.38	3.00	13.58	-37.84	-13.00	24.84	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.0	-42.01	4.45	3.00	12.45	-34.01	-13.00	21.01	H
5722.5	-44.23	5.47	3.00	13.66	-36.04	-13.00	23.04	H
3815.0	-45.38	4.45	3.00	12.45	-37.38	-13.00	24.38	V
5722.5	-45.74	5.48	3.00	13.66	-37.56	-13.00	24.56	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.0	-42.55	4.39	3.00	12.34	-34.6	-13.00	21.6	H
5565.0	-44.65	5.31	3.00	13.52	-36.44	-13.00	23.44	H
3710.0	-44.81	4.39	3.00	12.34	-36.86	-13.00	23.86	V
5565.0	-45.43	5.31	3.00	13.52	-37.22	-13.00	24.22	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-42.2	4.41	3.00	12.34	-34.27	-13.00	21.27	H
5640.0	-44.77	5.38	3.00	13.58	-36.57	-13.00	23.57	H
3760.0	-45.1	4.41	3.00	12.34	-37.17	-13.00	24.17	V
5640.0	-45.36	5.38	3.00	13.58	-37.16	-13.00	24.16	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810.0	-42.46	4.45	3.00	12.45	-34.46	-13.00	21.46	H
5715.0	-44.19	5.47	3.00	13.66	-36	-13.00	23	H
3810.0	-45.06	4.45	3.00	12.45	-37.06	-13.00	24.06	V
5715.0	-45.87	5.48	3.00	13.66	-37.69	-13.00	24.69	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-42.4	4.39	3.00	12.34	-34.45	-13.00	21.45	H
5572.5	-44.45	5.31	3.00	13.52	-36.24	-13.00	23.24	H
3715.0	-45.35	4.39	3.00	12.34	-37.4	-13.00	24.4	V
5572.5	-45.85	5.31	3.00	13.52	-37.64	-13.00	24.64	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-42.16	4.41	3.00	12.34	-34.23	-13.00	21.23	H
5640.0	-44.06	5.38	3.00	13.58	-35.86	-13.00	22.86	H
3760.0	-45.64	4.41	3.00	12.34	-37.71	-13.00	24.71	V
5640.0	-45.98	5.38	3.00	13.58	-37.78	-13.00	24.78	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3805.0	-42.16	4.45	3.00	12.45	-34.16	-13.00	21.16	H
5707.5	-44.85	5.47	3.00	13.66	-36.66	-13.00	23.66	H
3805.0	-44.86	4.45	3.00	12.45	-36.86	-13.00	23.86	V
5707.5	-46.16	5.48	3.00	13.66	-37.98	-13.00	24.98	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-42.65	4.39	3.00	12.34	-34.7	-13.00	21.7	H
5572.5	-44.86	5.31	3.00	13.52	-36.65	-13.00	23.65	H
3715.0	-45.65	4.39	3.00	12.34	-37.7	-13.00	24.7	V
5572.5	-45.36	5.31	3.00	13.52	-37.15	-13.00	24.15	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.0	-42.25	4.41	3.00	12.34	-34.32	-13.00	21.32	H
5580.0	-44.73	5.38	3.00	13.58	-36.53	-13.00	23.53	H
3720.0	-44.82	4.41	3.00	12.34	-36.89	-13.00	23.89	V
5580.0	-46.22	5.38	3.00	13.58	-38.02	-13.00	25.02	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.0	-42.34	4.45	3.00	12.45	-34.34	-13.00	21.34	H
5700.0	-44.5	5.47	3.00	13.66	-36.31	-13.00	23.31	H
3800.0	-44.91	4.45	3.00	12.45	-36.91	-13.00	23.91	V
5700.0	-46.08	5.48	3.00	13.66	-37.9	-13.00	24.9	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.4	-42.55	4.39	3.00	12.34	-34.6	-13.00	21.6	H
5552.1	-43.93	5.31	3.00	13.52	-35.72	-13.00	22.72	H
3701.4	-45.38	4.39	3.00	12.34	-37.43	-13.00	24.43	V
5552.1	-45.83	5.31	3.00	13.52	-37.62	-13.00	24.62	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-42.14	4.41	3.00	12.34	-34.21	-13.00	21.21	H
5640.0	-44.55	5.38	3.00	13.58	-36.35	-13.00	23.35	H
3760.0	-45.65	4.41	3.00	12.34	-37.72	-13.00	24.72	V
5640.0	-46.17	5.38	3.00	13.58	-37.97	-13.00	24.97	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3806.6	-41.78	4.45	3.00	12.45	-33.78	-13.00	20.78	H
5709.9	-44.75	5.47	3.00	13.66	-36.56	-13.00	23.56	H
3806.6	-44.71	4.45	3.00	12.45	-36.71	-13.00	23.71	V
5709.9	-46.1	5.48	3.00	13.66	-37.92	-13.00	24.92	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3703.0	-42.33	4.39	3.00	12.34	-34.38	-13.00	21.38	H
5554.5	-44.3	5.31	3.00	13.52	-36.09	-13.00	23.09	H
3703.0	-45.37	4.39	3.00	12.34	-37.42	-13.00	24.42	V
5554.5	-45.83	5.31	3.00	13.52	-37.62	-13.00	24.62	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-42.64	4.41	3.00	12.34	-34.71	-13.00	21.71	H
5640.0	-44.31	5.38	3.00	13.58	-36.11	-13.00	23.11	H
3760.0	-45.62	4.41	3.00	12.34	-37.69	-13.00	24.69	V
5640.0	-45.97	5.38	3.00	13.58	-37.77	-13.00	24.77	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3817.0	-42.19	4.45	3.00	12.45	-34.19	-13.00	21.19	H
5725.5	-44.79	5.47	3.00	13.66	-36.6	-13.00	23.6	H
3817.0	-44.85	4.45	3.00	12.45	-36.85	-13.00	23.85	V
5725.5	-45.94	5.48	3.00	13.66	-37.76	-13.00	24.76	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705.0	-42.42	4.39	3.00	12.34	-34.47	-13.00	21.47	H
5557.5	-44.23	5.31	3.00	13.52	-36.02	-13.00	23.02	H
3705.0	-45.67	4.39	3.00	12.34	-37.72	-13.00	24.72	V
5557.5	-46.21	5.31	3.00	13.52	-38	-13.00	25	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.95	4.41	3.00	12.34	-34.02	-13.00	21.02	H
5640.0	-44.23	5.38	3.00	13.58	-36.03	-13.00	23.03	H
3760.0	-45	4.41	3.00	12.34	-37.07	-13.00	24.07	V
5640.0	-45.55	5.38	3.00	13.58	-37.35	-13.00	24.35	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.0	-42.39	4.45	3.00	12.45	-34.39	-13.00	21.39	H
5722.5	-44.47	5.47	3.00	13.66	-36.28	-13.00	23.28	H
3815.0	-44.75	4.45	3.00	12.45	-36.75	-13.00	23.75	V
5722.5	-45.73	5.48	3.00	13.66	-37.55	-13.00	24.55	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.0	-42.33	4.39	3.00	12.34	-34.38	-13.00	21.38	H
5565.0	-43.94	5.31	3.00	13.52	-35.73	-13.00	22.73	H
3710.0	-44.84	4.39	3.00	12.34	-36.89	-13.00	23.89	V
5565.0	-45.55	5.31	3.00	13.52	-37.34	-13.00	24.34	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.98	4.41	3.00	12.34	-34.05	-13.00	21.05	H
5640.0	-44.2	5.38	3.00	13.58	-36	-13.00	23	H
3760.0	-44.93	4.41	3.00	12.34	-37	-13.00	24	V
5640.0	-46.2	5.38	3.00	13.58	-38	-13.00	25	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810.0	-42.28	4.45	3.00	12.45	-34.28	-13.00	21.28	H
5715.0	-44.37	5.47	3.00	13.66	-36.18	-13.00	23.18	H
3810.0	-44.82	4.45	3.00	12.45	-36.82	-13.00	23.82	V
5715.0	-45.92	5.48	3.00	13.66	-37.74	-13.00	24.74	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-41.75	4.39	3.00	12.34	-33.8	-13.00	20.8	H
5572.5	-44.35	5.31	3.00	13.52	-36.14	-13.00	23.14	H
3715.0	-44.99	4.39	3.00	12.34	-37.04	-13.00	24.04	V
5572.5	-45.54	5.31	3.00	13.52	-37.33	-13.00	24.33	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-42.14	4.41	3.00	12.34	-34.21	-13.00	21.21	H
5640.0	-44.12	5.38	3.00	13.58	-35.92	-13.00	22.92	H
3760.0	-44.81	4.41	3.00	12.34	-36.88	-13.00	23.88	V
5640.0	-45.48	5.38	3.00	13.58	-37.28	-13.00	24.28	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3805.0	-42.16	4.45	3.00	12.45	-34.16	-13.00	21.16	H
5707.5	-44.22	5.47	3.00	13.66	-36.03	-13.00	23.03	H
3805.0	-44.8	4.45	3.00	12.45	-36.8	-13.00	23.8	V
5707.5	-45.86	5.48	3.00	13.66	-37.68	-13.00	24.68	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-42.65	4.39	3.00	12.34	-34.7	-13.00	21.7	H
5572.5	-44.15	5.31	3.00	13.52	-35.94	-13.00	22.94	H
3715.0	-45.68	4.39	3.00	12.34	-37.73	-13.00	24.73	V
5572.5	-45.65	5.31	3.00	13.52	-37.44	-13.00	24.44	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.0	-42.45	4.41	3.00	12.34	-34.52	-13.00	21.52	H
5580.0	-44.2	5.38	3.00	13.58	-36	-13.00	23	H
3720.0	-44.96	4.41	3.00	12.34	-37.03	-13.00	24.03	V
5580.0	-45.46	5.38	3.00	13.58	-37.26	-13.00	24.26	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.0	-41.99	4.45	3.00	12.45	-33.99	-13.00	20.99	H
5700.0	-44.61	5.47	3.00	13.66	-36.42	-13.00	23.42	H
3800.0	-44.99	4.45	3.00	12.45	-36.99	-13.00	23.99	V
5700.0	-45.25	5.48	3.00	13.66	-37.07	-13.00	24.07	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




4.7 Frequency Stability

LIMIT

According to §24.235, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

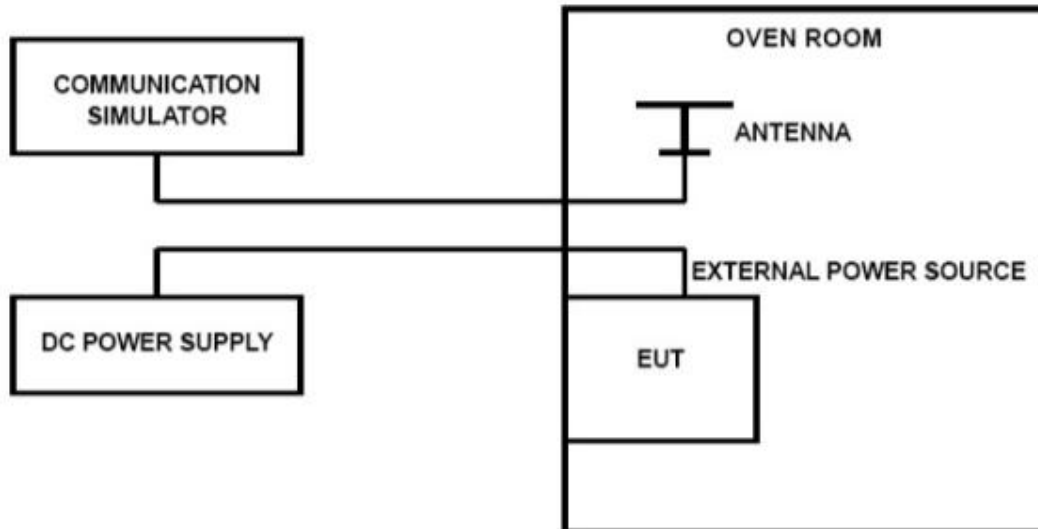

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D.

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.



TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case.

LTE Band 2, 1.4MHz bandwidth , QPSK (worst case of all bandwidths)

LTE FDD Band 2					
DC Power(V)	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	20	36.33	0.019630	±2.50	PASS
5.0	20	-13.56	-0.007327	±2.50	PASS
5.75	20	8.47	0.004577	±2.50	PASS
5.0	-30	22.06	0.011920	±2.50	PASS
5.0	-20	41.44	0.022392	±2.50	PASS
5.0	-10	21.36	0.011542	±2.50	PASS
5.0	0	38.02	0.020544	±2.50	PASS
5.0	10	5.02	0.002712	±2.50	PASS
5.0	20	23.29	0.012584	±2.50	PASS
5.0	30	34.59	0.018690	±2.50	PASS
5.0	40	40.76	0.022024	±2.50	PASS
5.0	50	48.17	0.026028	±2.50	PASS



LTE Band 2, 1.4MHz bandwidth , 16QAM (worst case of all bandwidths)

LTE FDD Band 2					
DC Power(V)	Temperature (°C)	Frequency error(Hz)	Frequency error(ppm)	Limit (ppm)	Verdict
4.25	20	21.60	0.011671	±2.50	PASS
5.0	20	17.62	0.009521	±2.50	PASS
5.75	20	-6.44	-0.003480	±2.50	PASS
5.0	-30	28.25	0.015264	±2.50	PASS
5.0	-20	19.48	0.010526	±2.50	PASS
5.0	-10	48.68	0.026304	±2.50	PASS
5.0	0	34.86	0.018543	±2.50	PASS
5.0	10	40.37	0.021473	±2.50	PASS
5.0	20	18.75	0.009973	±2.50	PASS
5.0	30	21.83	0.011612	±2.50	PASS
5.0	40	-5.38	-0.002862	±2.50	PASS
5.0	50	45.85	0.024388	±2.50	PASS

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



5 Test Setup Photos of the EUT

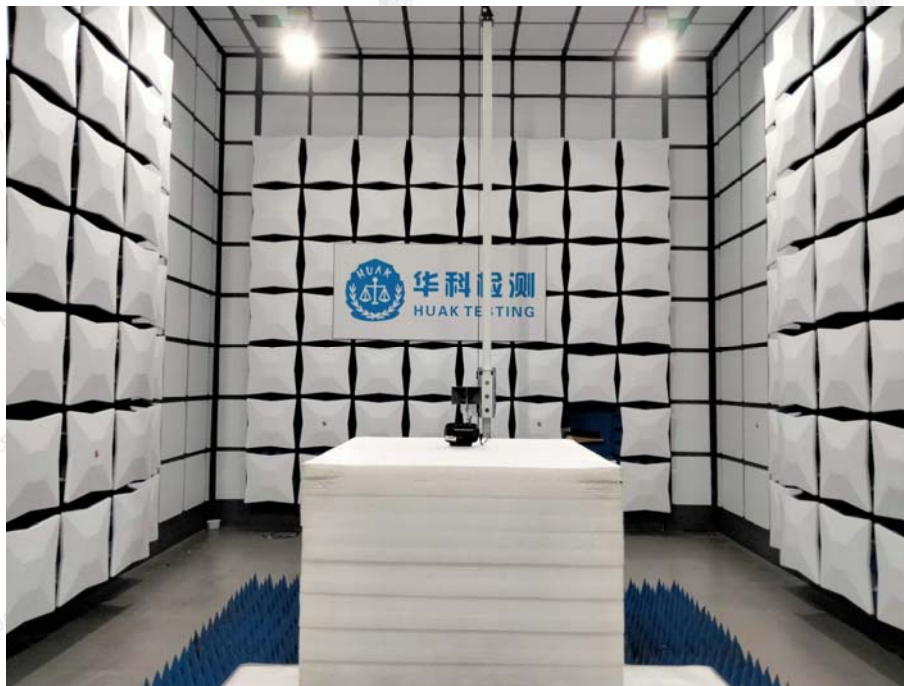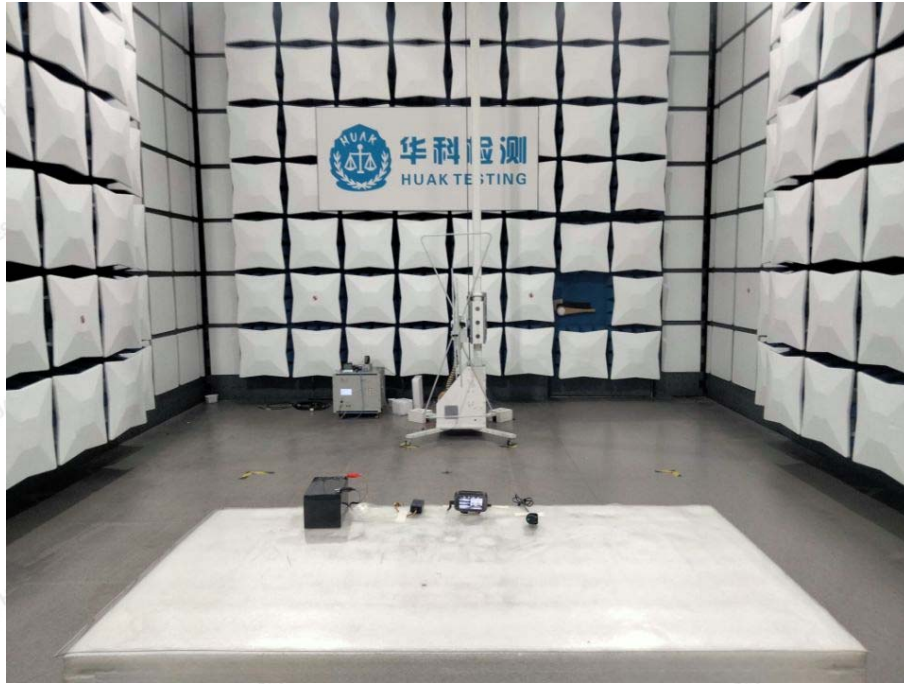

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



6 Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

.....**End of Report**.....