



**FCC Test Report**

Report Reference No.: **HK2407314284-10E**  
FCC ID : **2BBBN-VISIONSYNC**  
Compiled by  
( position+printed name+signature) .: RF Department Manager Len Liao

*Len Liao*

Supervised by  
( position+printed name+signature) .: Technical Manager Sliver Wan

*Sliver Wan*

Approved by  
( position+printed name+signature) .: General Manager Jason Zhou

*Jason Zhou*

Date of issue .....: Sept. 18, 2024

Testing Laboratory Name.....: **Shenzhen HUAK Testing Technology Co., Ltd.**

Address .....: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,  
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name .....: **Hangzhou Tanlink Technology Co.,Ltd.**

Address .....: Room 701, South Building, Building 3, No.16, Longtan Road,  
Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China

Test specification .....:

Standard.....: **FCC CFR Title 47 Part 2, Part 22H**

**Shenzhen HUAK Testing Technology Co., Ltd.All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd .takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: 4G driving recorder

Trade Mark.....: Redtiger

Manufacturer .....: **Hangzhou Tanlink Technology Co.,Ltd.**

Model/Type reference .....: VisionSync 10

Series Models .....: VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro,  
VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro,  
LinkStream 10, LinkStream 30

Ratings .....: DC 5V from Type-C

Modulation .....: QPSK, 16QAM

Hardware version .....: V2.0

Software version .....: V2.0

Frequency .....: LTE Band 26

Result .....: **PASS**



**TEST REPORT**

<b>Test Report No. :</b>	<b>HK2407314284-10E</b>	Sept. 18, 2024
		Date of issue

Equipment under Test : 4G driving recorder

Model /Type : VisionSync 10

Series Models : VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro, VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro, LinkStream 10, LinkStream 30

**Applicant** : **Hangzhou Tanlink Technology Co.,Ltd.**

**Address** : Room 701, South Building, Building 3, No.16, Longtan Road, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China

**Manufacturer** : **Hangzhou Tanlink Technology Co.,Ltd.**

**Address** : Room 701, South Building, Building 3, No.16, Longtan Road, Cangqian Street, Yuhang District, Hangzhou, Zhejiang, China

<b>Test result</b>	<b>Pass</b>
--------------------	-------------

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



**TABLE OF CONTENTS**

**1. SUMMARY ..... 4**

**1.1 Test Standards..... 4**

**1.2 Test Description..... 5**

**2. EUT DESCRIPTION ..... 6**

**3. GENERAL INFORMATION ..... 7**

**3.1. Test environment and mode..... 7**

**3.2. Test Mode..... 8**

**3.3. Description of Support Units..... 8**

**3.4. Configuration of Tested System ..... 9**

**3.5. Measurement Results Explanation Example..... 9**

**3.6. Equipments Used during the Test ..... 10**

**4. FACILITIES AND ACCREDITATIONS ..... 12**

**4.1. Information of The Test Laboratory ..... 12**

**4.2. Measurement Uncertainty..... 12**

**5. TEST RESULTS AND MEASUREMENT DATA ..... 13**

**5.1. Conducted Output Power Measurement ..... 13**

**5.2. Radiated Output Power..... 16**

**5.3. Peak to Average Ratio..... 19**

**5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement ..... 25**

**5.5. Band Edge and Conducted Spurious Emission Measurement ..... 32**

**5.6. Field Strength of Spurious Radiation Measurement ..... 53**

**5.7. Frequency Stability Measurement ..... 61**

**6. PHOTOGRAPHS OF TEST SETUP..... 63**

**7. PHOTOGRAPHS OF EUT..... 64**



## 1. SUMMARY

### 1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 2](#): Frequency Allocations And Radio Treaty Matters; General Rules And Regulations.

[FCC Part 22 Subpart H](#): Private Land Mobile Radio Services.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

[FCC KDB 971168D01 v03r01](#) Power Meas License Digital Systems.



### 1.2 Test Description

Test Item	FCCRuleNo	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913	EIRP ≤ 7W	Pass
Peak-Average Ratio	§22.917	FCC:Limit≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	Pass
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	§2.1051, §22.917	≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to Thefrequency block.	Pass
Spurious Emission at AntennaTerminals	§2.1051, §22.917	≤-13dBm/1MHz, from9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1051, §22.917	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §22.355,	FCC:within authorized frequency block.	Pass
NOTE 1:For theverdict, the“N/A”denotes“not applicable”, the“N/T”denotes “nottested”.			

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



## 2. EUT DESCRIPTION

<b>Product Name:</b>	4G driving recorder
<b>Model :</b>	VisionSync 10
<b>Series Models:</b>	VisionSync 30, VisionSync 30 Pro, VisionSync 50, VisionSync 50 Pro, VisionSync 70, VisionSync 70 Pro, VisionSync 90, VisionSync 90 Pro, LinkStream 10, LinkStream 30
<b>Trade Mark:</b>	Redtiger
<b>Tx Frequency:</b>	LTE Band 26: 824 MHz ~ 849 MHz
<b>Rx Frequency:</b>	LTE Band 26: 869MHz ~ 894 MHz
<b>Bandwidth:</b>	LTE Band 26: 1.4MHz /3MHz /5MHz /10MHz /15MHz
<b>Type of Modulation:</b>	QPSK/16QAM
<b>Antenna Type:</b>	Internal Antenna
<b>Antenna Gain:</b>	LTE Band 26: -1.43dBi
<b>Power Supply:</b>	DC 5V from Type-C



### 3. GENERAL INFORMATION

#### 3.1. Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

#### Description Operation Frequency

LTE Band 26(1.4MHz)		LTE Band 26(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26797	824.7	26805	825.5
26915	836.5	26915	836.5
27033	848.3	27025	847.5
LTE Band 26(5MHz)		LTE Band 26(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26815	826.5	26840	829.0
26915	836.5	26915	836.5
27015	846.5	26990	844.0
LTE Band 26(15MHz)			
Channel	Frequency (MHz)		
26865	831.5		
26915	836.5		
26965	841.5		

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



### 3.2. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 26	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz/ 15MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz/ 15MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

### 3.3. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.





**3.6. Equipments Used during the Test**

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	L.I.S.N.	R&S	ENV216	HKE-002	2024/02/20	2025/02/19
2	L.I.S.N.	R&S	ENV216	HKE-059	2024/02/20	2025/02/19
3	EMI Test Receiver	R&S	ESR	HKE-005	2024/02/20	2025/02/19
4	Spectrum analyzer	Agilent	N9020A	HKE-048	2024/02/20	2025/02/19
5	Spectrum	R&S	FSV3044	HKE-126	2024/02/20	2025/02/19
6	Preamplifier	EMCI	EMC05184 5S	HKE-006	2024/02/20	2025/02/19
7	Preamplifier	Schwarzbeck	BBV 9743	HKE-016	2024/02/20	2025/02/19
8	Preamplifier	A.H. Systems	SAS-574	HKE-182	2024/02/20	2025/02/19
9	6d Attenuator	Pasternack	6db	HKE-184	2024/02/20	2025/02/19
10	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	2024/02/20	2025/02/19
11	Broadband Antenna	Schwarzbeck	VULB916 8	HKE-167	2024/02/21	2026/02/20
12	Loop Antenna	COM-POWER	AL-130R	HKE-014	2024/02/21	2026/02/20
13	Horn Antenna	Schwarzbeck	9120D	HKE-013	2024/02/21	2026/02/20
14	EMI Test Software	Tonscend	JS32-CE 2.5.0.6	HKE-081	/	/
15	EMI Test Software	Tonscend	JS32-RE 5.0.0	HKE-082	/	/
16	RF Automatic control unit	Tonscend	JS0806-1	HKE-096	2024/02/20	2025/02/19
17	High pass filter unit	Tonscend	JS0806-F	HKE-055	2024/02/20	2025/02/19
18	Wireless Communication Test Set	R&S	CMU200	HKE-026	2024/02/20	2025/02/19

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



19	Wireless Communication Test Set	R&S	CMW500	HKE-027	2024/02/20	2025/02/19
20	High-low temperature chamber	Guangke	HT-80L	HKE-118	2024/06/10	2025/06/09
21	Temperature and humidity meter	Boyang	HTC-1	HKE-075	2024/06/10	2025/06/09
22	RF Test Software	Tonscend	JS1120 Version 3.1.46	HKE-183	/	/

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 4. FACILITIES AND ACCREDITATIONS

### 4.1. Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

### 4.2. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .




## 5. TEST RESULTS AND MEASUREMENT DATA

### 5.1. Conducted Output Power Measurement

#### TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

#### TEST CONFIGURATION

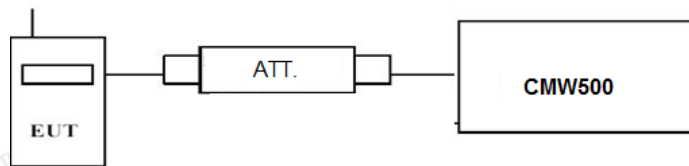

#### TEST PROCEDURE

##### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

#### TEST RESULTS



Conducted Measurement:

LTE FDD Band 26				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1 RB low	824.7	22.79	22.05
		836.5	22.72	22.02
		848.3	22.83	22.14
	1 RB high	824.7	22.90	21.84
		836.5	22.87	21.77
		848.3	22.95	21.84
	50% RB mid	824.7	21.86	21.01
		836.5	23.07	22.69
		848.3	23.11	22.52
	100% RB	824.7	23.04	22.67
		836.5	23.09	21.93
		848.3	23.08	21.76
3 MHz	1 RB low	825.5	22.82	21.64
		836.5	22.81	21.56
		847.5	22.77	21.59
	1 RB high	825.5	22.02	21.23
		836.5	22.02	21.14
		847.5	21.95	21.13
	50% RB mid	825.5	21.90	20.96
		836.5	23.07	21.49
		847.5	23.10	21.42
	100% RB	825.5	23.09	21.44
		836.5	21.96	21.10
		847.5	21.97	21.11
5 MHz	1 RB low	826.5	23.06	21.55
		836.5	22.99	21.39
		846.5	22.97	21.40
	1 RB high	826.5	22.01	21.02
		836.5	22.01	21.02
		846.5	21.98	21.06
	50% RB mid	826.5	22.01	21.12
		836.5	22.99	22.16
		846.5	23.11	22.10
	100% RB	826.5	23.11	22.23
		836.5	22.06	21.16
		846.5	21.97	21.17

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



10 MHz	1 RB low	829.0	22.94	22.15
		836.5	22.92	21.96
		844.0	23.01	21.65
	1 RB high	829.0	21.97	21.00
		836.5	21.97	21.00
		844.0	22.10	21.04
	50% RB mid	829.0	22.13	21.06
		836.5	23.05	21.93
		844.0	23.06	21.94
	100% RB	829.0	23.12	21.99
		836.5	22.09	21.13
		844.0	21.96	21.15
15 MHz	1 RB low	831.5	22.99	22.16
		836.5	22.96	22.02
		841.5	23.04	22.18
	1 RB high	831.5	22.02	22.01
		836.5	22.17	21.87
		841.5	22.23	22.17
	50% RB mid	831.5	22.07	21.11
		836.5	22.68	21.69
		841.5	22.60	21.72
	100% RB	831.5	22.84	21.89
		836.5	22.16	22.16
		841.5	22.33	22.36

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


## 5.2. Radiated Output Power

### LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H.232(b) specifies, "Mobile/portable stations are limited to 7 watts e.i.r.p.

### TEST CONFIGURATION

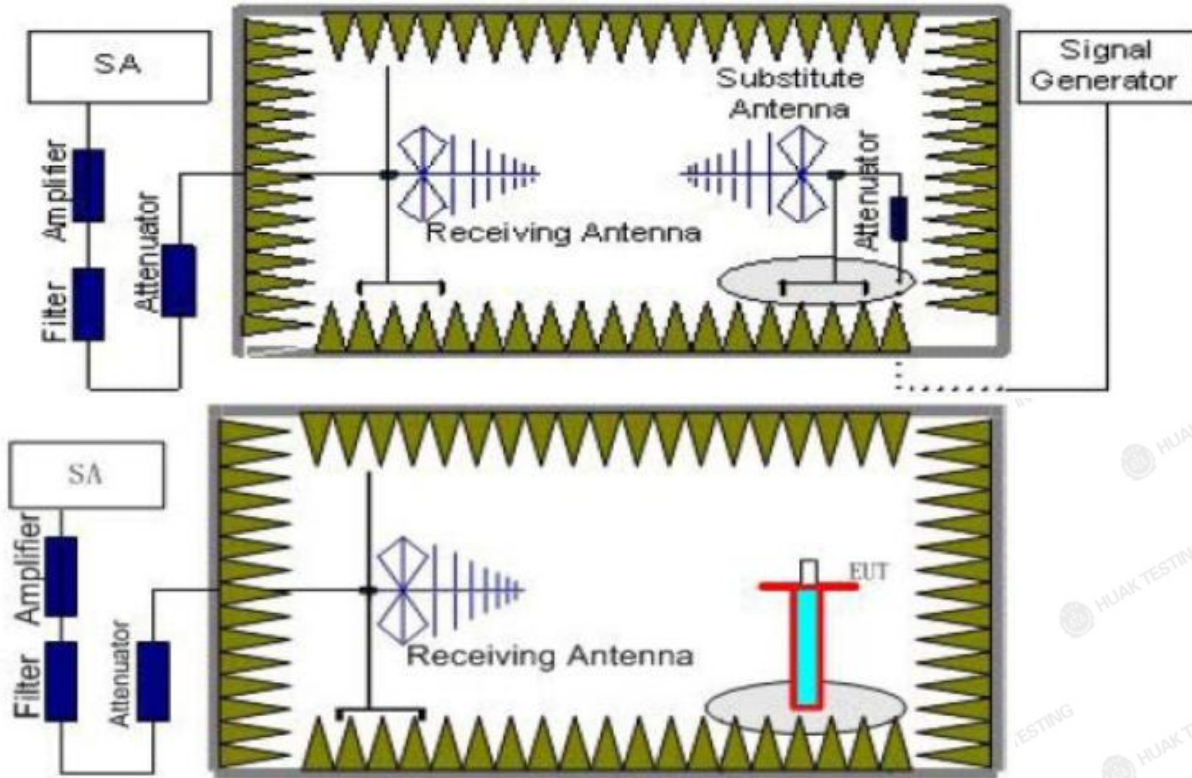

### TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.





- 5. reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:  $Power(EIRP)=P_{Mea}-P_{Ag}-P_{cl}+G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power

Amplifier for substitution test; The measurement results are amend as described below:

$Power(EIRP)=P_{Mea}-P_{cl}+G_a$

- 7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP-2.15dBi$ .

**TEST RESULTS**

**Radiated Measurement:**

Remark:

- 1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.
- 2.  $EIRP=P_{Mea}(dBm)-P_{cl}(dB)+P_{Ag}(dB)+G_a(dBi)$
- 3. We measured both Horizontal and Vertical direction, recorded worst case direction.

*LTE FDDBand 26\_Channel Bandwidth 1.4MHz\_QPSK*

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-18.25	2.42	8.45	36.82	24.6	22.45	38.45	16	V
836.5	-17.19	2.46	8.45	36.82	25.62	23.47	38.45	14.98	V
848.3	-18.68	2.53	8.36	36.82	23.97	21.82	38.45	16.63	V

*LTE FDDBand 26\_Channel Bandwidth 3MHz\_QPSK*

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-18.62	2.42	8.45	36.82	24.23	22.08	38.45	16.37	V
836.5	-17.29	2.46	8.45	36.82	25.52	23.37	38.45	15.08	V
847.5	-18.15	2.53	8.36	36.82	24.5	22.35	38.45	16.1	V

*LTE FDD Band 26\_Channel Bandwidth 5MHz\_QPSK*

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-17.93	2.42	8.45	36.82	24.92	22.77	38.45	15.68	V
836.5	-17.11	2.46	8.45	36.82	25.7	23.55	38.45	14.9	V
846.5	-17.85	2.53	8.36	36.82	24.8	22.65	38.45	15.8	V

*LTE FDD Band 26\_Channel Bandwidth 10MHz\_QPSK*

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{Ag}$ (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.08	2.42	8.45	36.82	24.77	22.62	38.45	15.83	V
836.5	-17.04	2.46	8.45	36.82	25.77	23.62	38.45	14.83	V
844.0	-18.36	2.53	8.36	36.82	24.29	22.14	38.45	16.31	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 26\_Channel Bandwidth 15MHz\_QPSK

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-18.11	2.42	8.45	36.82	24.74	22.59	38.45	15.86	V
836.5	-16.71	2.46	8.45	36.82	26.1	23.95	38.45	14.5	V
841.5	-18.39	2.53	8.36	36.82	24.26	22.11	38.45	16.34	V

LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-18.83	2.42	8.45	36.82	24.02	21.87	38.45	16.58	V
836.5	-17.29	2.46	8.45	36.82	25.52	23.37	38.45	15.08	V
848.3	-18.14	2.53	8.36	36.82	24.51	22.36	38.45	16.09	V

LTE FDD Band 26\_Channel Bandwidth 3MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-17.99	2.42	8.45	36.82	24.86	22.71	38.45	15.74	V
836.5	-17.23	2.46	8.45	36.82	25.58	23.43	38.45	15.02	V
847.5	-18.43	2.53	8.36	36.82	24.22	22.07	38.45	16.38	V

LTE FDD Band 26\_Channel Bandwidth 5MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-18.06	2.42	8.45	36.82	24.79	22.64	38.45	15.81	V
836.5	-16.82	2.46	8.45	36.82	25.99	23.84	38.45	14.61	V
846.5	-18.59	2.53	8.36	36.82	24.06	21.91	38.45	16.54	V

LTE FDD Band 26\_Channel Bandwidth 10MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.4	2.42	8.45	36.82	24.45	22.3	38.45	16.15	V
836.5	-16.63	2.46	8.45	36.82	26.18	24.03	38.45	14.42	V
844.0	-18.11	2.53	8.36	36.82	24.54	22.39	38.45	16.06	V

LTE FDD Band 26\_Channel Bandwidth 15MHz\_16QAM

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-18.45	2.42	8.45	36.82	24.4	22.25	38.45	16.2	V
836.5	-16.52	2.46	8.45	36.82	26.29	24.14	38.45	14.31	V
841.5	-18.71	2.53	8.36	36.82	23.94	21.79	38.45	16.66	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 5.3. Peak to Average Ratio

**LIMIT**

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

**TEST CONFIGURATION**

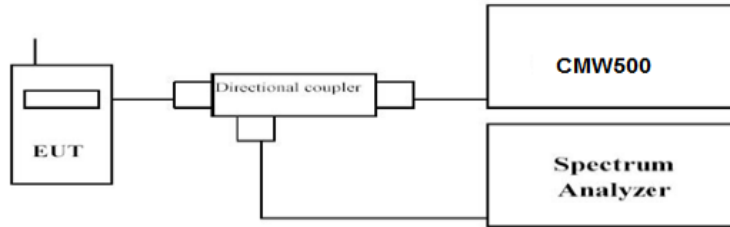

**TEST PROCEDURE**

1. Refer to instrument’s analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth ≥ signal’s occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms;
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

**TEST RESULTS**

*Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.

LTE FDD Band 26				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	824.7	1RB#0	5.07	6.02
	836.5		5.24	5.95
	848.3		5.19	6.15
3 MHz	825.5	1RB#0	5.28	6.16
	836.5		5.18	5.95
	847.5		5.30	6.15
5 MHz	826.5	1RB#0	5.29	5.81
	836.5		5.21	5.83
	846.5		5.08	5.71
10 MHz	829.0	1RB#0	5.08	5.76
	836.5		4.87	5.59
	844.0		5.35	6.08
15 MHz	831.5	1RB#0	8.48	5.91
	836.5		4.74	5.49
	841.5		5.23	6.08


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 26-1.4MHz Channel Bandwidth PAPR

QPSK



16QAM

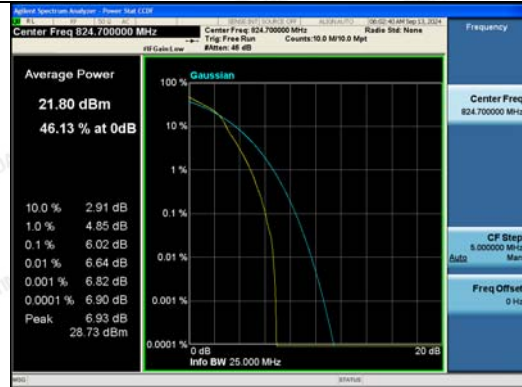

1RB#0

1RB#0

Low Channel

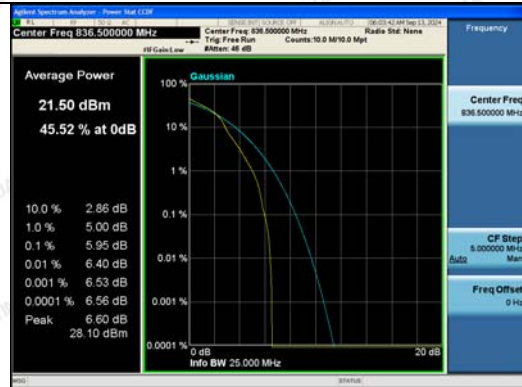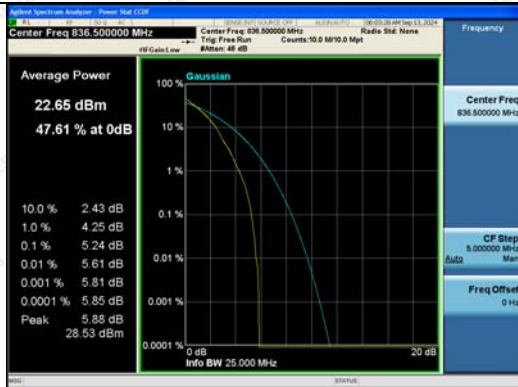

1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0



High Channel



LTE FDD Band 26-3MHz Channel Bandwidth PAPR

QPSK



16QAM

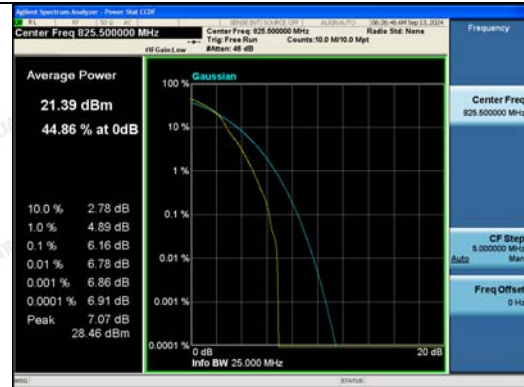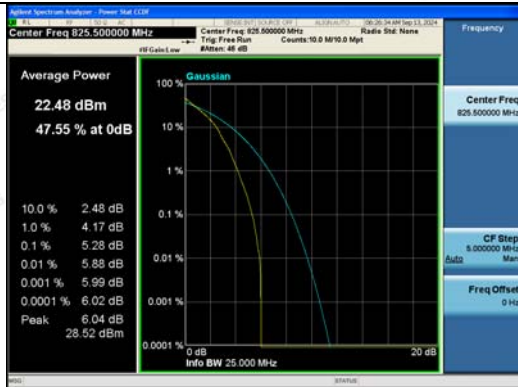

1RB#0

1RB#0


Low Channel

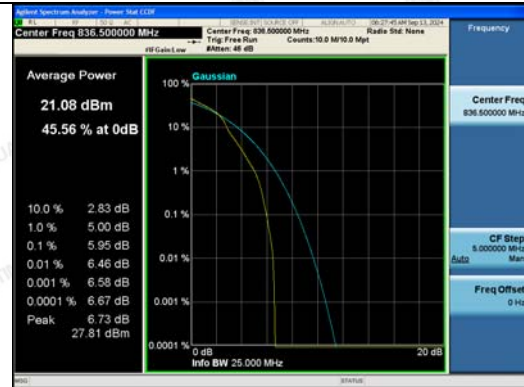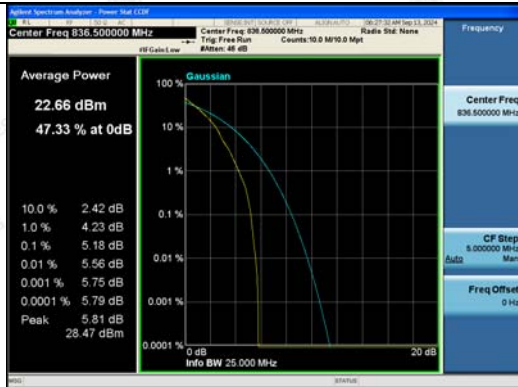

1RB#0

1RB#0

Middle Channel

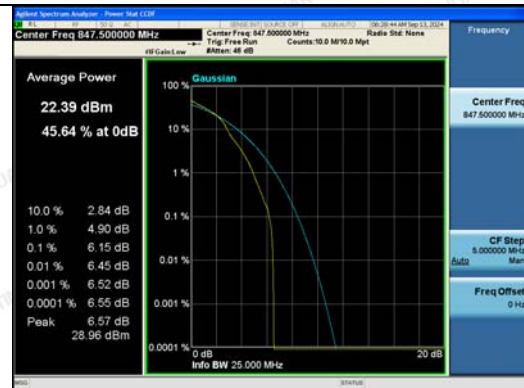

1RB#0

1RB#0



High Channel



LTE FDD Band 26-5MHz Channel Bandwidth PAPR

QPSK



16QAM

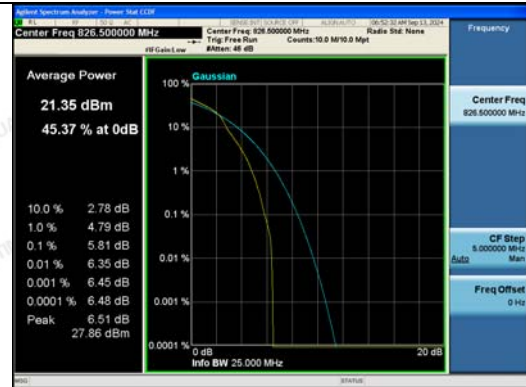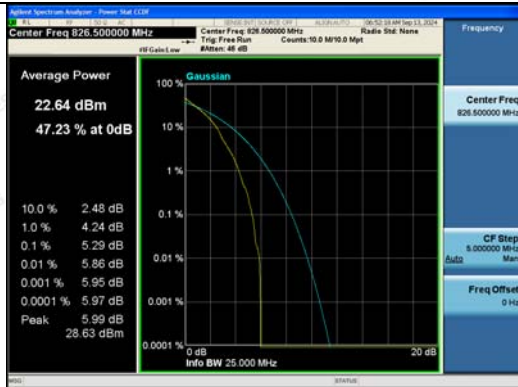

1RB#0

1RB#0



Low Channel

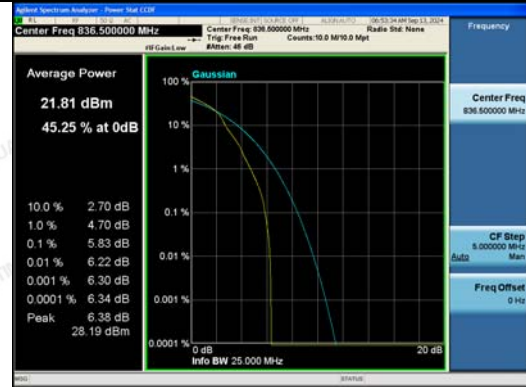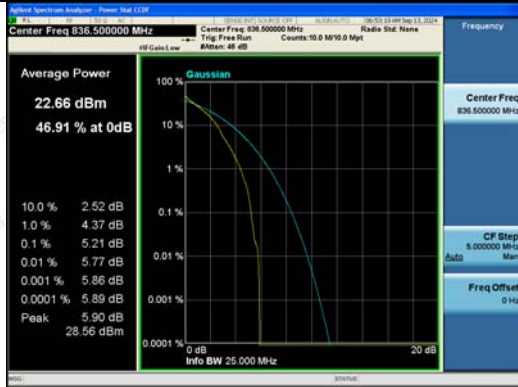

1RB#0

1RB#0

Middle Channel

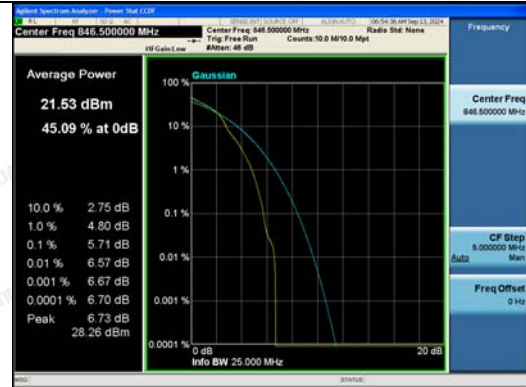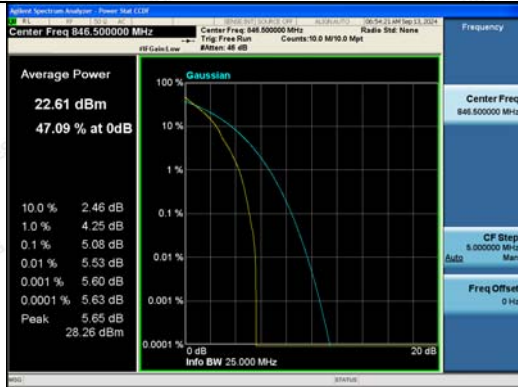

1RB#0

1RB#0


High Channel



LTE FDD Band 26-10MHz Channel Bandwidth PAPR

QPSK



16QAM

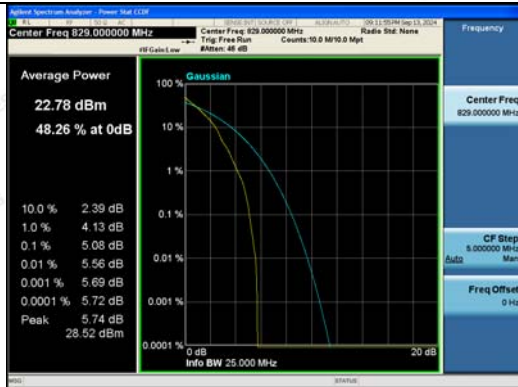

1RB#0

1RB#0


Low Channel

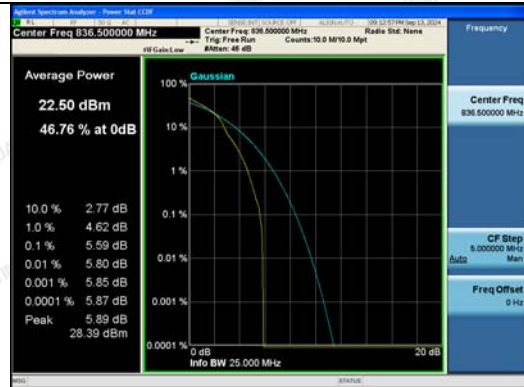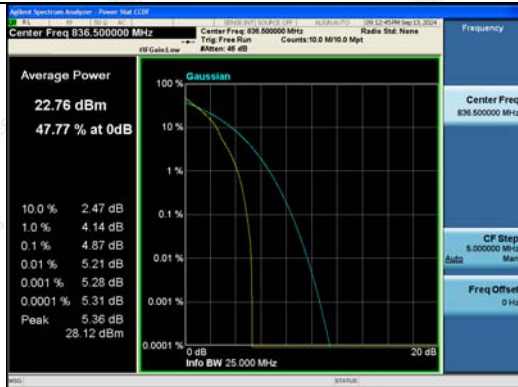

1RB#0

1RB#0

Middle Channel

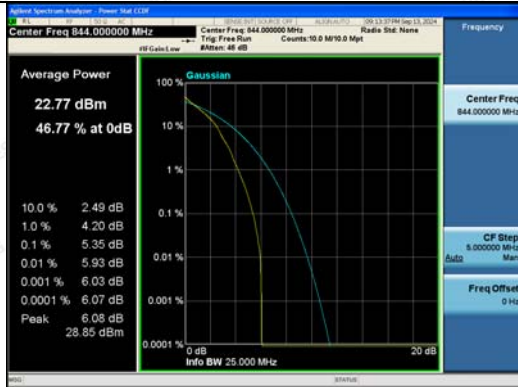

1RB#0

1RB#0


High Channel



LTE FDD Band 26-15MHz Channel Bandwidth PAPR

QPSK


16QAM

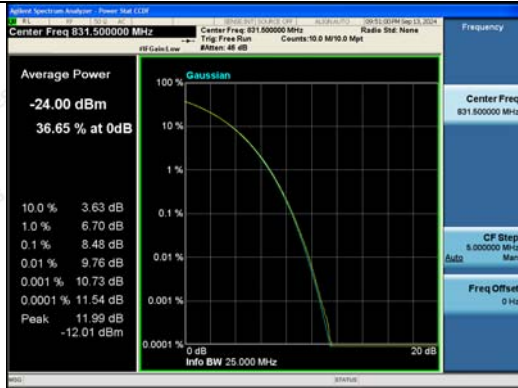

1RB#0

1RB#0


Low Channel

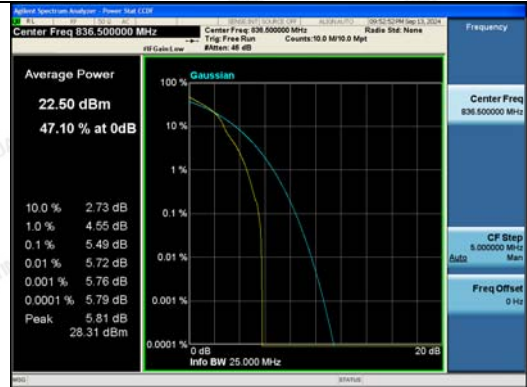

1RB#0

1RB#0

Middle Channel

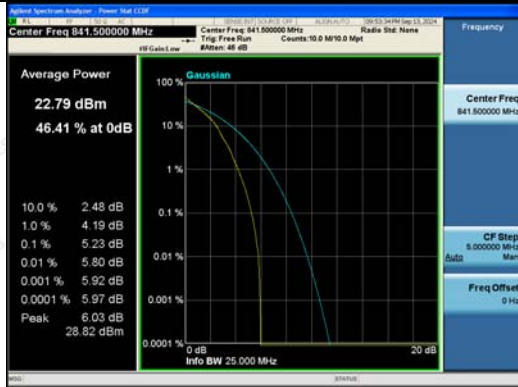

1RB#0

1RB#0

High Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



### 5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 5.4.1. Test Specification
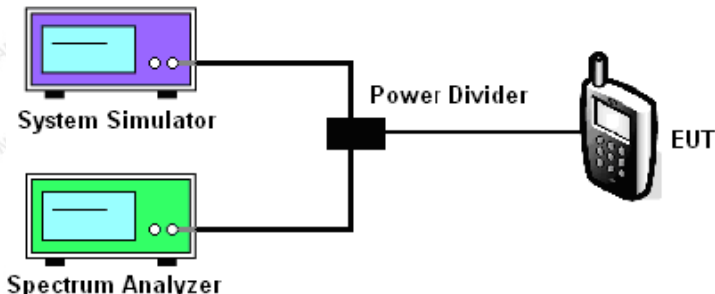
<b>Test Method:</b>	FCC part 2.1049
<b>Limit:</b>	N/A
<b>Test Setup:</b>	 <p>The diagram illustrates the test setup. On the left, there are two computer monitors: the top one is labeled 'System Simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both are connected to a central black box labeled 'Power Divider'. From the 'Power Divider', a cable extends to the right, connecting to a mobile phone icon labeled 'EUT'.</p>
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03 Section 4.2.</li> <li>2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.</li> <li>3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold.</li> <li>5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.</li> </ol>
<b>Test Result:</b>	PASS

### TEST RESULTS

**Remark:**

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.



LTE FDD Band 26						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	824.7	1.249	1.242	1.0988	1.0896
		836.5	1.244	1.253	1.0908	1.1008
		848.3	1.238	1.252	1.0950	1.0971
3 MHz	15RB#0	825.5	3.032	3.033	2.7116	2.6980
		836.5	3.023	3.028	2.7074	2.7065
		847.5	3.037	3.014	2.7088	2.7042
5 MHz	25RB#0	826.5	4.971	4.976	4.5086	4.5066
		836.5	4.976	4.984	4.5023	4.5108
		846.5	5.000	4.992	4.5039	4.5308
10 MHz	50RB#0	829.0	9.904	9.902	8.9617	8.9727
		836.5	9.910	9.889	9.0062	9.0032
		844.0	9.906	9.910	8.9861	8.9851
15 MHz	75RB#0	831.5	14.89	14.96	13.447	13.492
		836.5	15.04	14.92	13.510	13.501
		841.5	14.96	14.85	13.466	13.478

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-1.4MHz Channel Bandwidth	
QPSK	16QAM
<p>Center Freq 824.700000 MHz</p> <p>Occupied Bandwidth: 1.0988 MHz</p> <p>Total Power: 29.6 dBm</p>	<p>Center Freq 824.700000 MHz</p> <p>Occupied Bandwidth: 1.0896 MHz</p> <p>Total Power: 28.9 dBm</p>
6RB#0	6RB#0
Low Channel	
<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 1.0908 MHz</p> <p>Total Power: 29.6 dBm</p>	<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 1.1008 MHz</p> <p>Total Power: 28.8 dBm</p>
6RB#0	6RB#0
Middle Channel	
<p>Center Freq 848.300000 MHz</p> <p>Occupied Bandwidth: 1.0950 MHz</p> <p>Total Power: 29.6 dBm</p>	<p>Center Freq 848.300000 MHz</p> <p>Occupied Bandwidth: 1.0971 MHz</p> <p>Total Power: 29.1 dBm</p>
6RB#0	6RB#0
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-3MHz Channel Bandwidth	
QPSK	16QAM
<p>Center Freq 825.500000 MHz</p> <p>Occupied Bandwidth: 2.7116 MHz</p> <p>Total Power: 29.9 dBm</p>	<p>Center Freq 825.500000 MHz</p> <p>Occupied Bandwidth: 2.6980 MHz</p> <p>Total Power: 28.9 dBm</p>
15RB#0	15RB#0
Low Channel	
<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 2.7074 MHz</p> <p>Total Power: 30.1 dBm</p>	<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 2.7065 MHz</p> <p>Total Power: 29.1 dBm</p>
15RB#0	15RB#0
Middle Channel	
<p>Center Freq 847.500000 MHz</p> <p>Occupied Bandwidth: 2.7088 MHz</p> <p>Total Power: 29.9 dBm</p>	<p>Center Freq 847.500000 MHz</p> <p>Occupied Bandwidth: 2.7042 MHz</p> <p>Total Power: 29.0 dBm</p>
15RB#0	15RB#0
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-5MHz Channel Bandwidth	
QPSK	16QAM
<p>Center Freq 826.500000 MHz</p> <p>Occupied Bandwidth: 4.5086 MHz</p> <p>Total Power: 30.6 dBm</p>	<p>Center Freq 826.500000 MHz</p> <p>Occupied Bandwidth: 4.5066 MHz</p> <p>Total Power: 29.7 dBm</p>
25RB#0	25RB#0
Low Channel	
<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 4.5023 MHz</p> <p>Total Power: 30.6 dBm</p>	<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 4.5108 MHz</p> <p>Total Power: 29.6 dBm</p>
25RB#0	25RB#0
Middle Channel	
<p>Center Freq 846.500000 MHz</p> <p>Occupied Bandwidth: 4.5039 MHz</p> <p>Total Power: 30.5 dBm</p>	<p>Center Freq 846.500000 MHz</p> <p>Occupied Bandwidth: 4.5308 MHz</p> <p>Total Power: 29.6 dBm</p>
25RB#0	25RB#0
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-10MHz Channel Bandwidth	
QPSK	16QAM
<p>Center Freq 829.000000 MHz</p> <p>Occupied Bandwidth: 8.9617 MHz</p> <p>Total Power: 30.6 dBm</p>	<p>Center Freq 829.000000 MHz</p> <p>Occupied Bandwidth: 8.9727 MHz</p> <p>Total Power: 29.8 dBm</p>
50RB#0	50RB#0
Low Channel	
<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 9.0062 MHz</p> <p>Total Power: 30.5 dBm</p>	<p>Center Freq 836.500000 MHz</p> <p>Occupied Bandwidth: 9.0032 MHz</p> <p>Total Power: 29.7 dBm</p>
50RB#0	50RB#0
Middle Channel	
<p>Center Freq 844.000000 MHz</p> <p>Occupied Bandwidth: 8.9861 MHz</p> <p>Total Power: 30.7 dBm</p>	<p>Center Freq 844.000000 MHz</p> <p>Occupied Bandwidth: 8.9851 MHz</p> <p>Total Power: 30.2 dBm</p>
50RB#0	50RB#0
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



<i>LTE FDD Band 26-15MHz Channel Bandwidth</i>	
<i>QPSK</i>	<i>16QAM</i>
<p>Center Freq 831.500000 MHz</p> <p>Center Freq 831.5 MHz</p> <p>Res BW 300 kHz</p> <p>#VBW 910 kHz</p> <p>Span 30 MHz</p> <p>#Sweep 100 ms</p> <p>CF Step 3.000000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 13.447 MHz</p> <p>Total Power 31.0 dBm</p> <p>Transmit Freq Error -17.522 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.89 MHz</p> <p>x dB -26.00 dB</p>	<p>Center Freq 831.500000 MHz</p> <p>Center Freq 831.5 MHz</p> <p>Res BW 300 kHz</p> <p>#VBW 910 kHz</p> <p>Span 30 MHz</p> <p>#Sweep 100 ms</p> <p>CF Step 3.000000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 13.492 MHz</p> <p>Total Power 30.2 dBm</p> <p>Transmit Freq Error -26.675 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.96 MHz</p> <p>x dB -26.00 dB</p>
<i>75RB#0</i>	<i>75RB#0</i>
<i>Low Channel</i>	
<p>Center Freq 836.500000 MHz</p> <p>Center Freq 836.5 MHz</p> <p>Res BW 300 kHz</p> <p>#VBW 910 kHz</p> <p>Span 30 MHz</p> <p>#Sweep 100 ms</p> <p>CF Step 3.000000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 13.510 MHz</p> <p>Total Power 30.9 dBm</p> <p>Transmit Freq Error -10.422 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.04 MHz</p> <p>x dB -26.00 dB</p>	<p>Center Freq 836.500000 MHz</p> <p>Center Freq 836.5 MHz</p> <p>Res BW 300 kHz</p> <p>#VBW 910 kHz</p> <p>Span 30 MHz</p> <p>#Sweep 100 ms</p> <p>CF Step 3.000000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 13.501 MHz</p> <p>Total Power 30.2 dBm</p> <p>Transmit Freq Error -13.825 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.92 MHz</p> <p>x dB -26.00 dB</p>
<i>75RB#0</i>	<i>75RB#0</i>
<i>Middle Channel</i>	
<p>Center Freq 841.500000 MHz</p> <p>Center Freq 841.5 MHz</p> <p>Res BW 300 kHz</p> <p>#VBW 910 kHz</p> <p>Span 30 MHz</p> <p>#Sweep 100 ms</p> <p>CF Step 3.000000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 13.466 MHz</p> <p>Total Power 31.1 dBm</p> <p>Transmit Freq Error -19.092 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.96 MHz</p> <p>x dB -26.00 dB</p>	<p>Center Freq 841.500000 MHz</p> <p>Center Freq 841.5 MHz</p> <p>Res BW 300 kHz</p> <p>#VBW 910 kHz</p> <p>Span 30 MHz</p> <p>#Sweep 100 ms</p> <p>CF Step 3.000000 MHz</p> <p>Auto</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 13.478 MHz</p> <p>Total Power 30.4 dBm</p> <p>Transmit Freq Error -21.210 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.85 MHz</p> <p>x dB -26.00 dB</p>
<i>75RB#0</i>	<i>75RB#0</i>
<i>High Channel</i>	


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 5.5. Band Edge and Conducted Spurious Emission Measurement

### 5.5.1. Test Specification
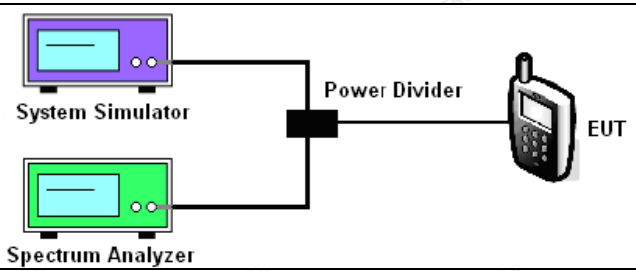
<b>Test Requirement:</b>	FCC part 22.917
<b>Test Method:</b>	FCC part 2.1051
<b>Limit:</b>	the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.
<b>Test Setup:</b>	 <p>The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a central Power Divider (black box). The Power Divider is also connected to the EUT (Equipment Under Test, represented by a mobile phone icon).</p>
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03 Section 6.0.</li> <li>2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.</li> <li>3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.</li> <li>4. The band edges of low and high channels for the highest RF powers were measured.</li> <li>5. The conducted spurious emission for the whole frequency range was taken.</li> <li>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li> </ol>
<b>Test Result:</b>	PASS

## TEST RESULTS

### Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.





LTE FDD Band 26-1.4MHz Channel Bandwidth Band Edge Compliance	
QPSK	16QAM
<p>6RB#0</p>	<p>6RB#0</p>
Low Channel	
<p>6RB#0</p>	<p>6RB#0</p>
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-3MHz Channel Bandwidth Band Edge Compliance	
QPSK	16QAM
<p>15RB#0</p>	<p>15RB#0</p>
Low Channel	
<p>15RB#0</p>	<p>15RB#0</p>
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-5MHz Channel Bandwidth Band Edge Compliance	
QPSK	16QAM
<p>25RB#0</p>	<p>25RB#0</p>
Low Channel	
<p>25RB#0</p>	<p>25RB#0</p>
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-10MHz Channel Bandwidth Band Edge Compliance	
QPSK	16QAM
<p>50RB#0</p>	<p>50RB#0</p>
Low Channel	
<p>50RB#0</p>	<p>50RB#0</p>
High Channel	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-15MHz Channel Bandwidth Band Edge Compliance																																																	
QPSK	16QAM																																																
<p>Center Freq: 13.255000000 GHz</p> <p>Start: 823 MHz, Stop: 839 MHz</p> <p>Ref Offset: 8.69 dB, Ref: 23.00 dBm</p> <table border="1"> <thead> <tr> <th>Spur</th> <th>Range</th> <th>Start Freq</th> <th>Stop Freq</th> <th>RBW</th> <th>Frequency</th> <th>Amplitude</th> <th>Δ Limit</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>823.00 MHz</td> <td>824.00 MHz</td> <td>150.0 MHz</td> <td>823.975000 MHz</td> <td>-28.44 dBm</td> <td>-25.44 dB</td> </tr> <tr> <td>2</td> <td></td> <td>824.00 MHz</td> <td>839.00 MHz</td> <td>100.0 MHz</td> <td>825.965000 MHz</td> <td>-3.059 dBm</td> <td>-52.06 dB</td> </tr> </tbody> </table>	Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit	1		823.00 MHz	824.00 MHz	150.0 MHz	823.975000 MHz	-28.44 dBm	-25.44 dB	2		824.00 MHz	839.00 MHz	100.0 MHz	825.965000 MHz	-3.059 dBm	-52.06 dB	<p>Center Freq: 13.255000000 GHz</p> <p>Start: 823 MHz, Stop: 839 MHz</p> <p>Ref Offset: 8.69 dB, Ref: 23.00 dBm</p> <table border="1"> <thead> <tr> <th>Spur</th> <th>Range</th> <th>Start Freq</th> <th>Stop Freq</th> <th>RBW</th> <th>Frequency</th> <th>Amplitude</th> <th>Δ Limit</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>823.00 MHz</td> <td>824.00 MHz</td> <td>150.0 MHz</td> <td>823.995000 MHz</td> <td>-28.43 dBm</td> <td>-26.43 dB</td> </tr> <tr> <td>2</td> <td></td> <td>824.00 MHz</td> <td>839.00 MHz</td> <td>100.0 MHz</td> <td>827.760000 MHz</td> <td>-3.107 dBm</td> <td>-53.01 dB</td> </tr> </tbody> </table>	Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit	1		823.00 MHz	824.00 MHz	150.0 MHz	823.995000 MHz	-28.43 dBm	-26.43 dB	2		824.00 MHz	839.00 MHz	100.0 MHz	827.760000 MHz	-3.107 dBm	-53.01 dB
Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit																																										
1		823.00 MHz	824.00 MHz	150.0 MHz	823.975000 MHz	-28.44 dBm	-25.44 dB																																										
2		824.00 MHz	839.00 MHz	100.0 MHz	825.965000 MHz	-3.059 dBm	-52.06 dB																																										
Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit																																										
1		823.00 MHz	824.00 MHz	150.0 MHz	823.995000 MHz	-28.43 dBm	-26.43 dB																																										
2		824.00 MHz	839.00 MHz	100.0 MHz	827.760000 MHz	-3.107 dBm	-53.01 dB																																										
75RB#0	75RB#0																																																
Low Channel																																																	
<p>Center Freq: 13.255000000 GHz</p> <p>Start: 834 MHz, Stop: 850 MHz</p> <p>Ref Offset: 8.71 dB, Ref: 23.00 dBm</p> <table border="1"> <thead> <tr> <th>Spur</th> <th>Range</th> <th>Start Freq</th> <th>Stop Freq</th> <th>RBW</th> <th>Frequency</th> <th>Amplitude</th> <th>Δ Limit</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>834.00 MHz</td> <td>849.00 MHz</td> <td>150.0 MHz</td> <td>838.250000 MHz</td> <td>-2.137 dBm</td> <td>-5.14 dB</td> </tr> <tr> <td>2</td> <td></td> <td>849.00 MHz</td> <td>850.00 MHz</td> <td>150.0 MHz</td> <td>849.000000 MHz</td> <td>-40.85 dBm</td> <td>-27.85 dB</td> </tr> </tbody> </table>	Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit	1		834.00 MHz	849.00 MHz	150.0 MHz	838.250000 MHz	-2.137 dBm	-5.14 dB	2		849.00 MHz	850.00 MHz	150.0 MHz	849.000000 MHz	-40.85 dBm	-27.85 dB	<p>Center Freq: 13.255000000 GHz</p> <p>Start: 834 MHz, Stop: 850 MHz</p> <p>Ref Offset: 8.71 dB, Ref: 23.00 dBm</p> <table border="1"> <thead> <tr> <th>Spur</th> <th>Range</th> <th>Start Freq</th> <th>Stop Freq</th> <th>RBW</th> <th>Frequency</th> <th>Amplitude</th> <th>Δ Limit</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>834.00 MHz</td> <td>849.00 MHz</td> <td>150.0 MHz</td> <td>848.540000 MHz</td> <td>-3.021 dBm</td> <td>-53.02 dB</td> </tr> <tr> <td>2</td> <td></td> <td>849.00 MHz</td> <td>850.00 MHz</td> <td>150.0 MHz</td> <td>849.000000 MHz</td> <td>-41.759 dBm</td> <td>-28.76 dB</td> </tr> </tbody> </table>	Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit	1		834.00 MHz	849.00 MHz	150.0 MHz	848.540000 MHz	-3.021 dBm	-53.02 dB	2		849.00 MHz	850.00 MHz	150.0 MHz	849.000000 MHz	-41.759 dBm	-28.76 dB
Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit																																										
1		834.00 MHz	849.00 MHz	150.0 MHz	838.250000 MHz	-2.137 dBm	-5.14 dB																																										
2		849.00 MHz	850.00 MHz	150.0 MHz	849.000000 MHz	-40.85 dBm	-27.85 dB																																										
Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit																																										
1		834.00 MHz	849.00 MHz	150.0 MHz	848.540000 MHz	-3.021 dBm	-53.02 dB																																										
2		849.00 MHz	850.00 MHz	150.0 MHz	849.000000 MHz	-41.759 dBm	-28.76 dB																																										
75RB#0	75RB#0																																																
High Channel																																																	

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




Conducted Measurement:

LTE FDD Band 26-1.4MHz Channel Bandwidth	
Low Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

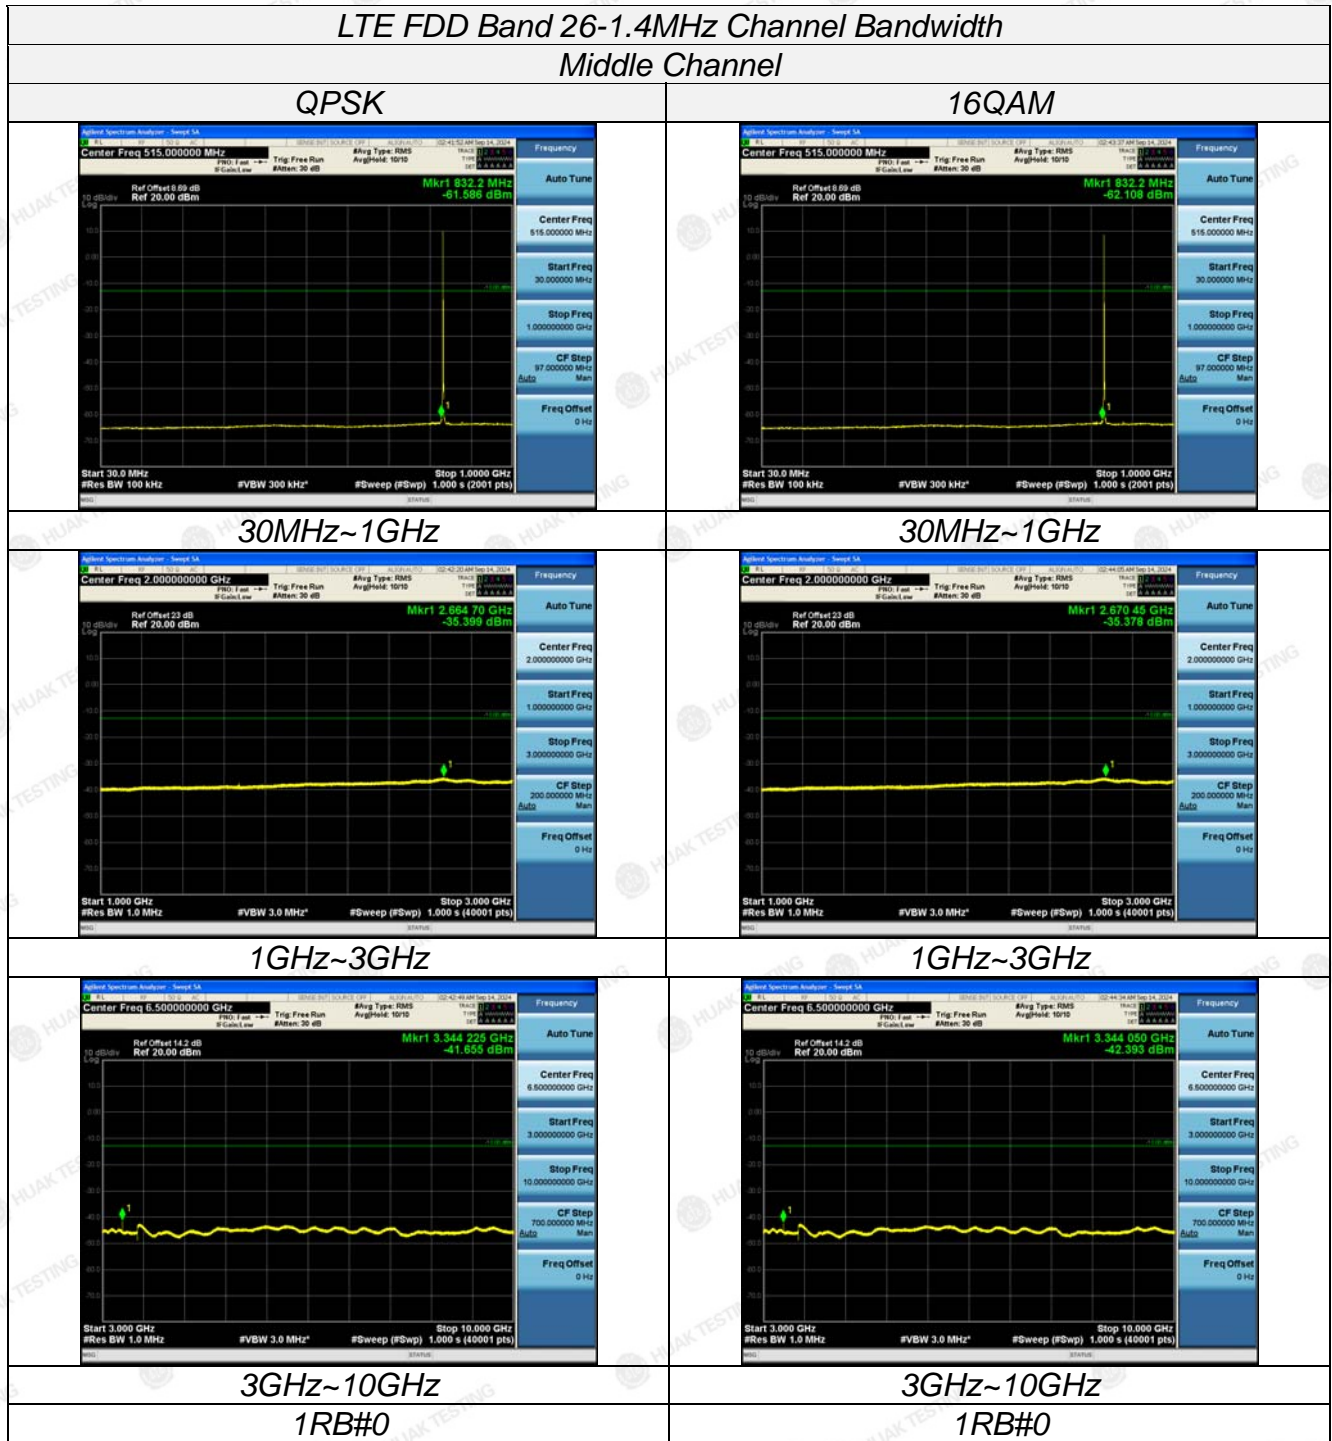

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-1.4MHz Channel Bandwidth	
High Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 26-3MHz Channel Bandwidth	
Low Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26-3MHz Channel Bandwidth Middle Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China







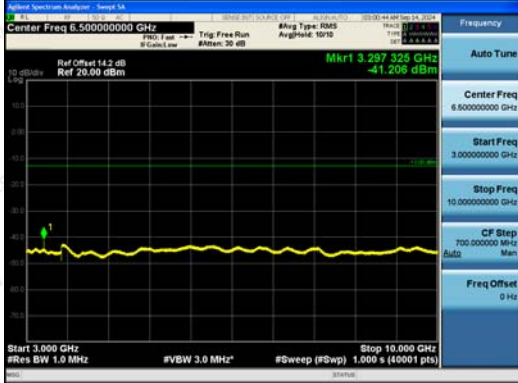
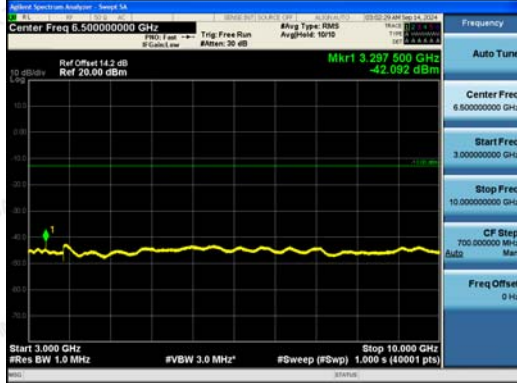
LTE FDD Band 26-3MHz Channel Bandwidth High Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

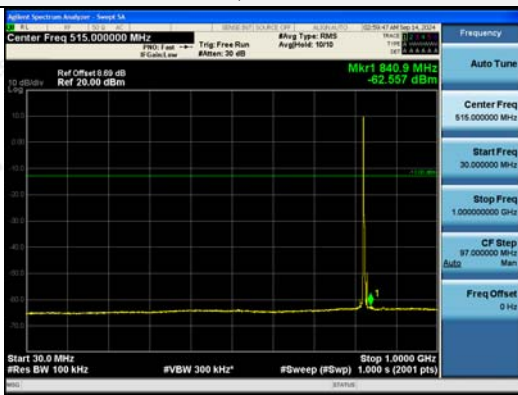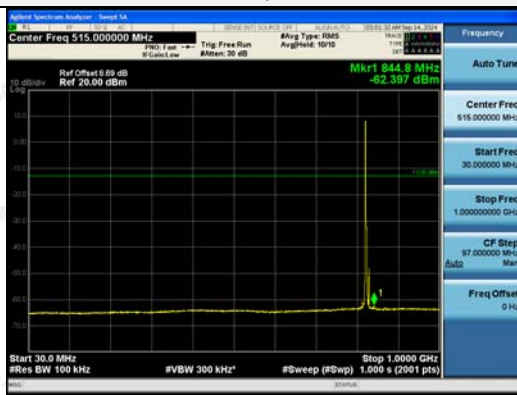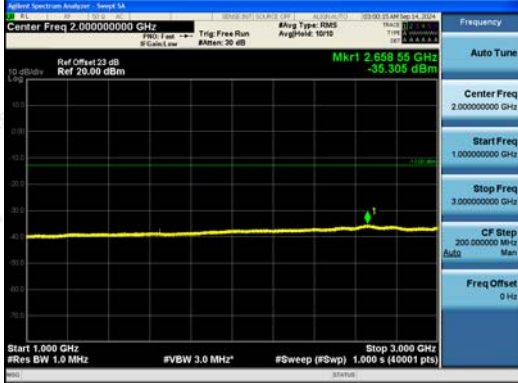


LTE FDD Band 26-5MHz Channel Bandwidth	
Low Channel	
QPSK	16QAM
	
30MHz~1GHz	30MHz~1GHz
	
1GHz~3GHz	1GHz~3GHz
	
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

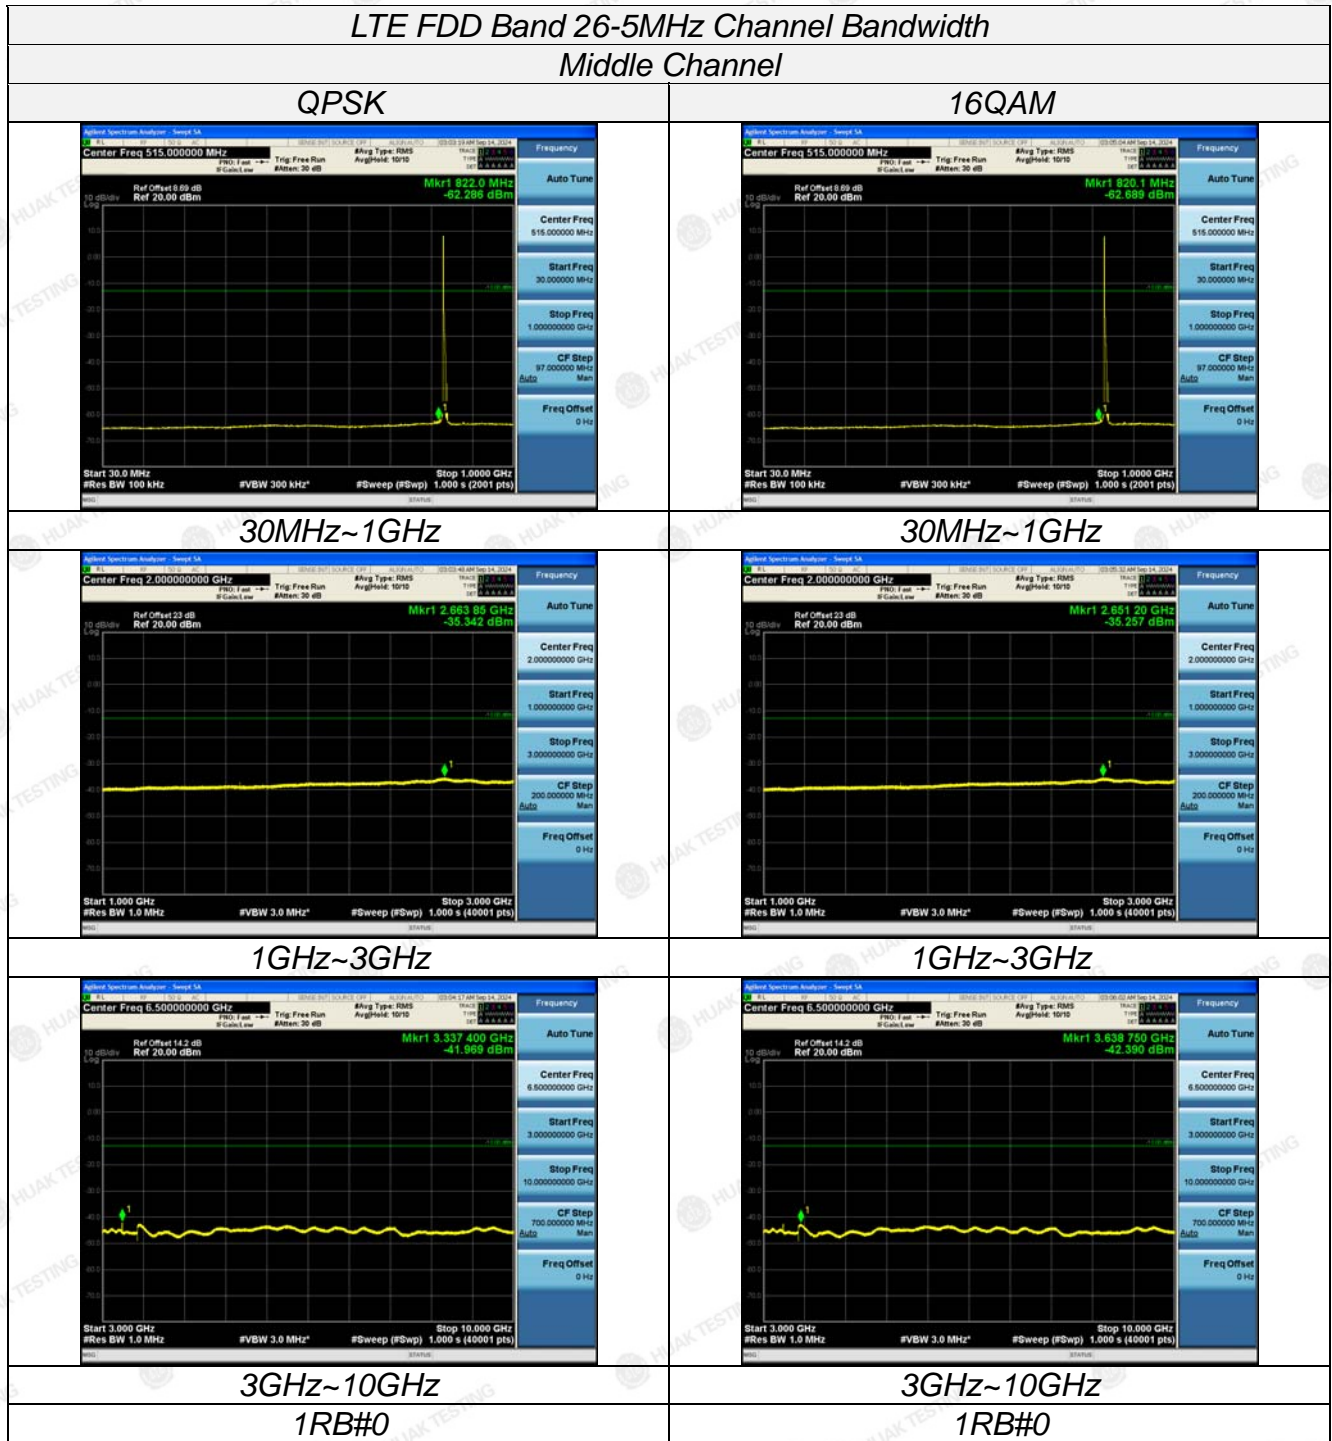

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China









LTE FDD Band 26-5MHz Channel Bandwidth High Channel	
QPSK	16QAM
30MHz~1GHz	30MHz~1GHz
1GHz~3GHz	1GHz~3GHz
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

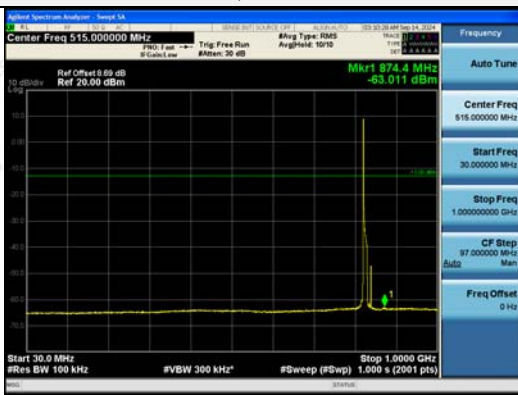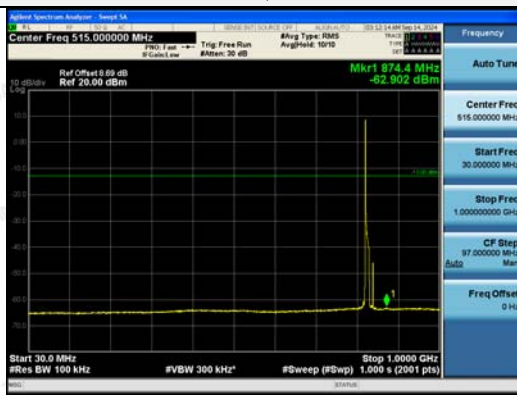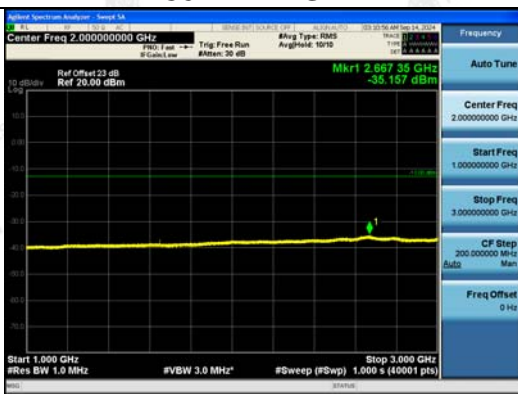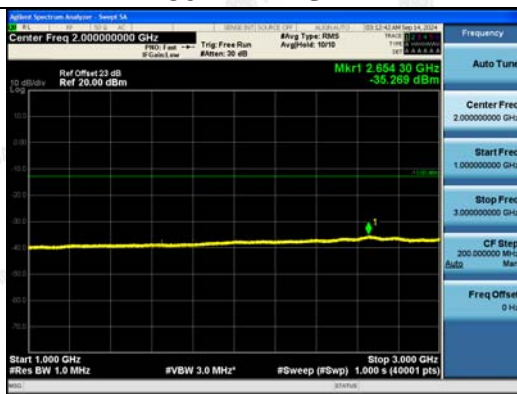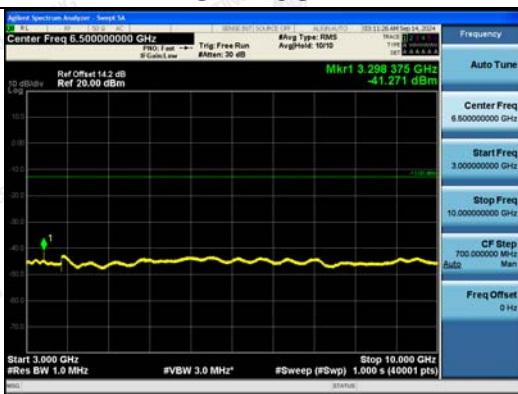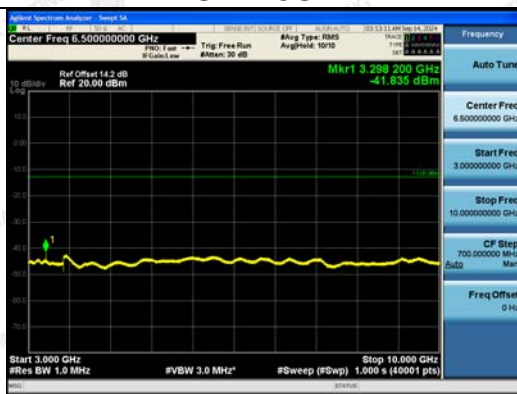

LTE FDD Band 26-10MHz Channel Bandwidth	
Low Channel	
QPSK	16QAM
	
30MHz~1GHz	30MHz~1GHz
	
1GHz~3GHz	1GHz~3GHz
	
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




LTE FDD Band 26-10MHz Channel Bandwidth Middle Channel	
QPSK	16QAM
<b>30MHz~1GHz</b>	<b>30MHz~1GHz</b>
<b>1GHz~3GHz</b>	<b>1GHz~3GHz</b>
<b>3GHz~10GHz</b>	<b>3GHz~10GHz</b>
<b>1RB#0</b>	<b>1RB#0</b>

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

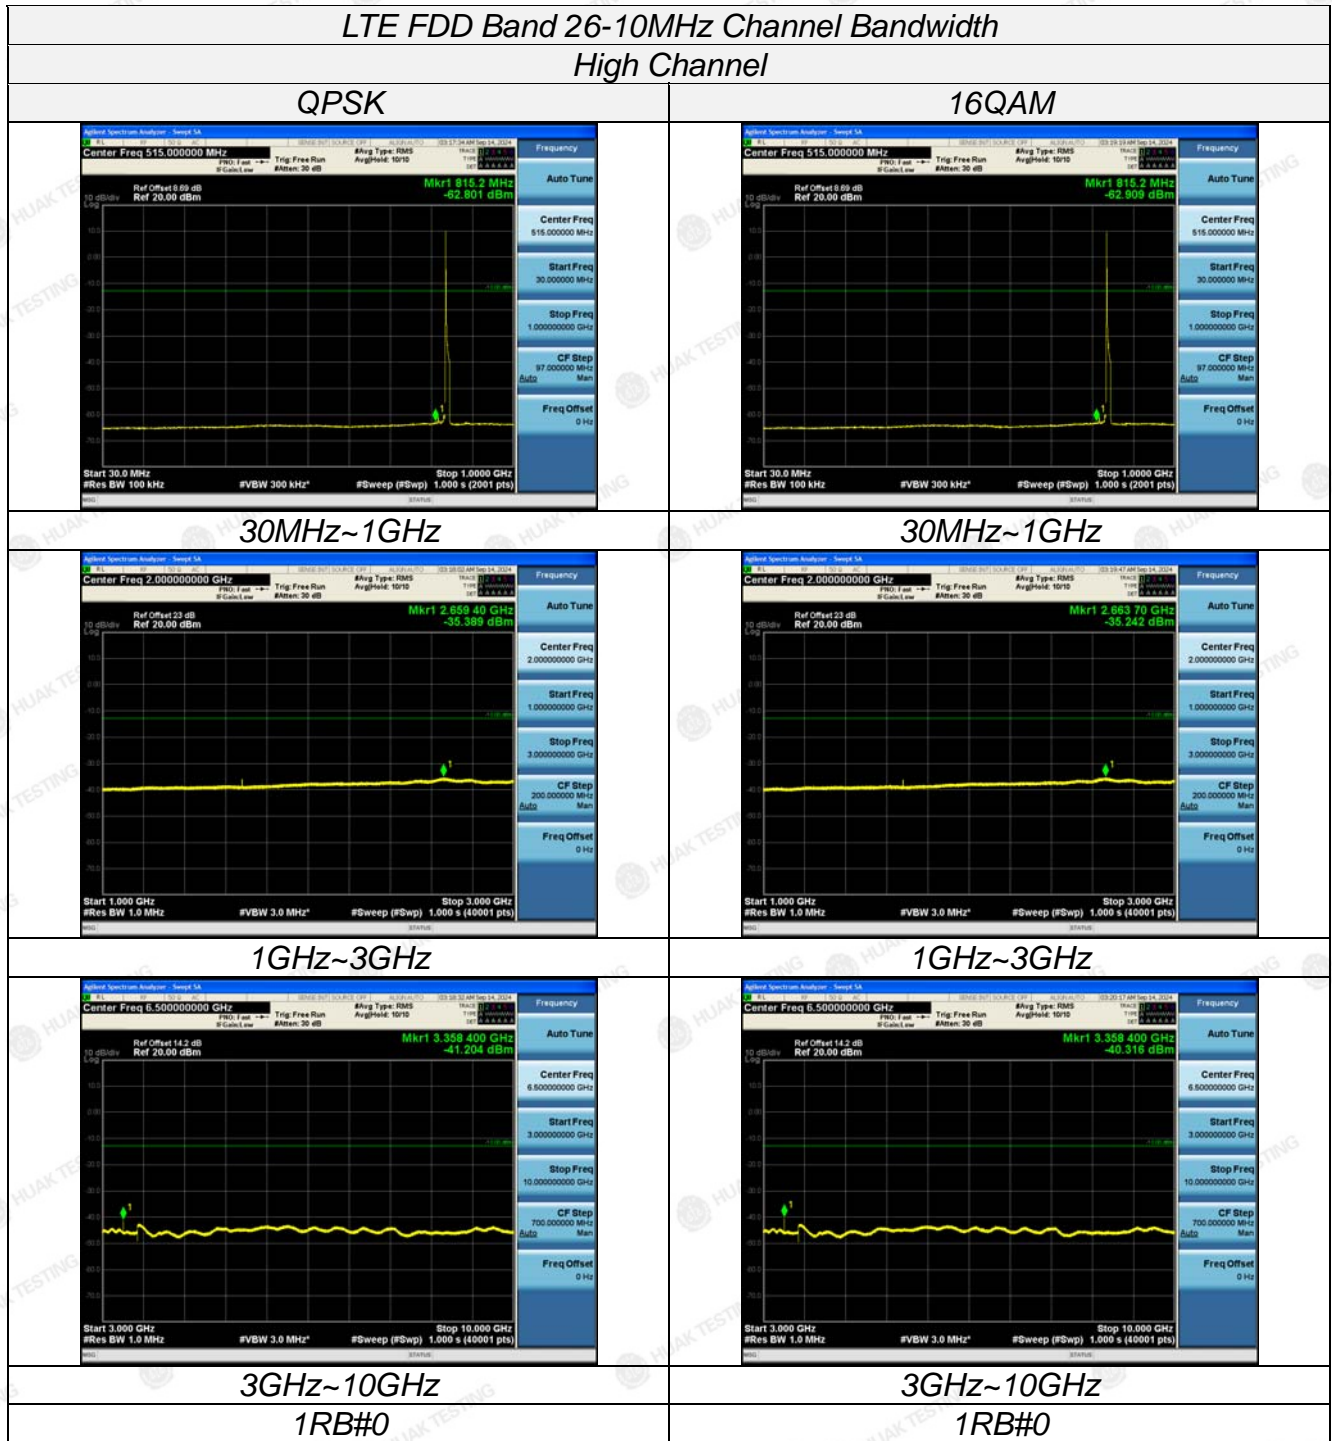




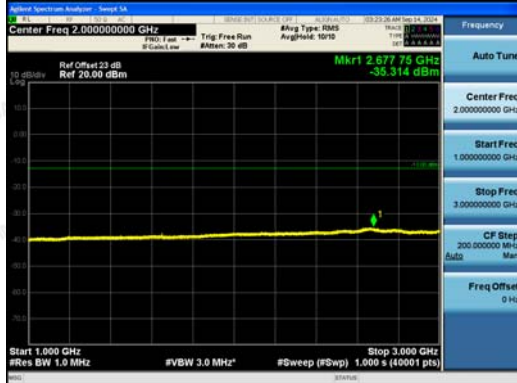
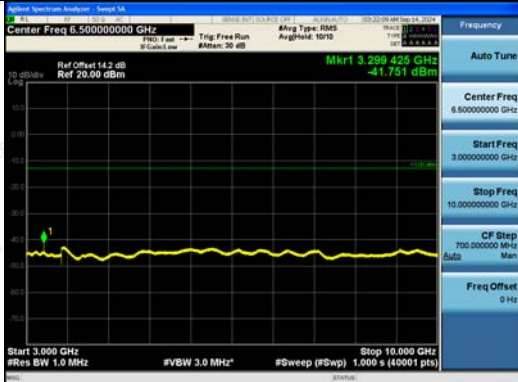
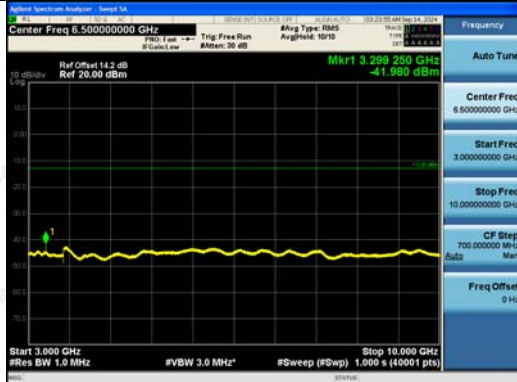


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

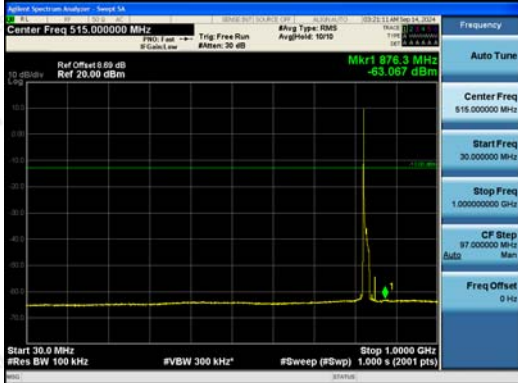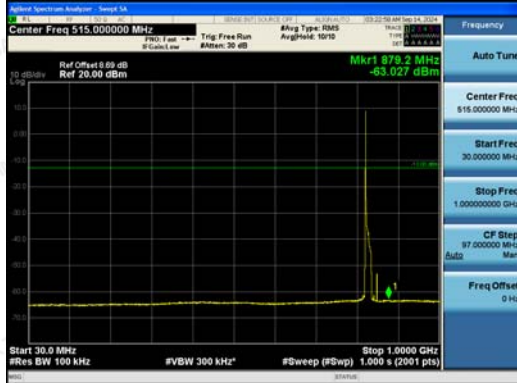


LTE FDD Band 26-15MHz Channel Bandwidth	
Low Channel	
QPSK	16QAM
	
30MHz~1GHz	30MHz~1GHz
	
1GHz~3GHz	1GHz~3GHz
	
3GHz~10GHz	3GHz~10GHz
1RB#0	1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

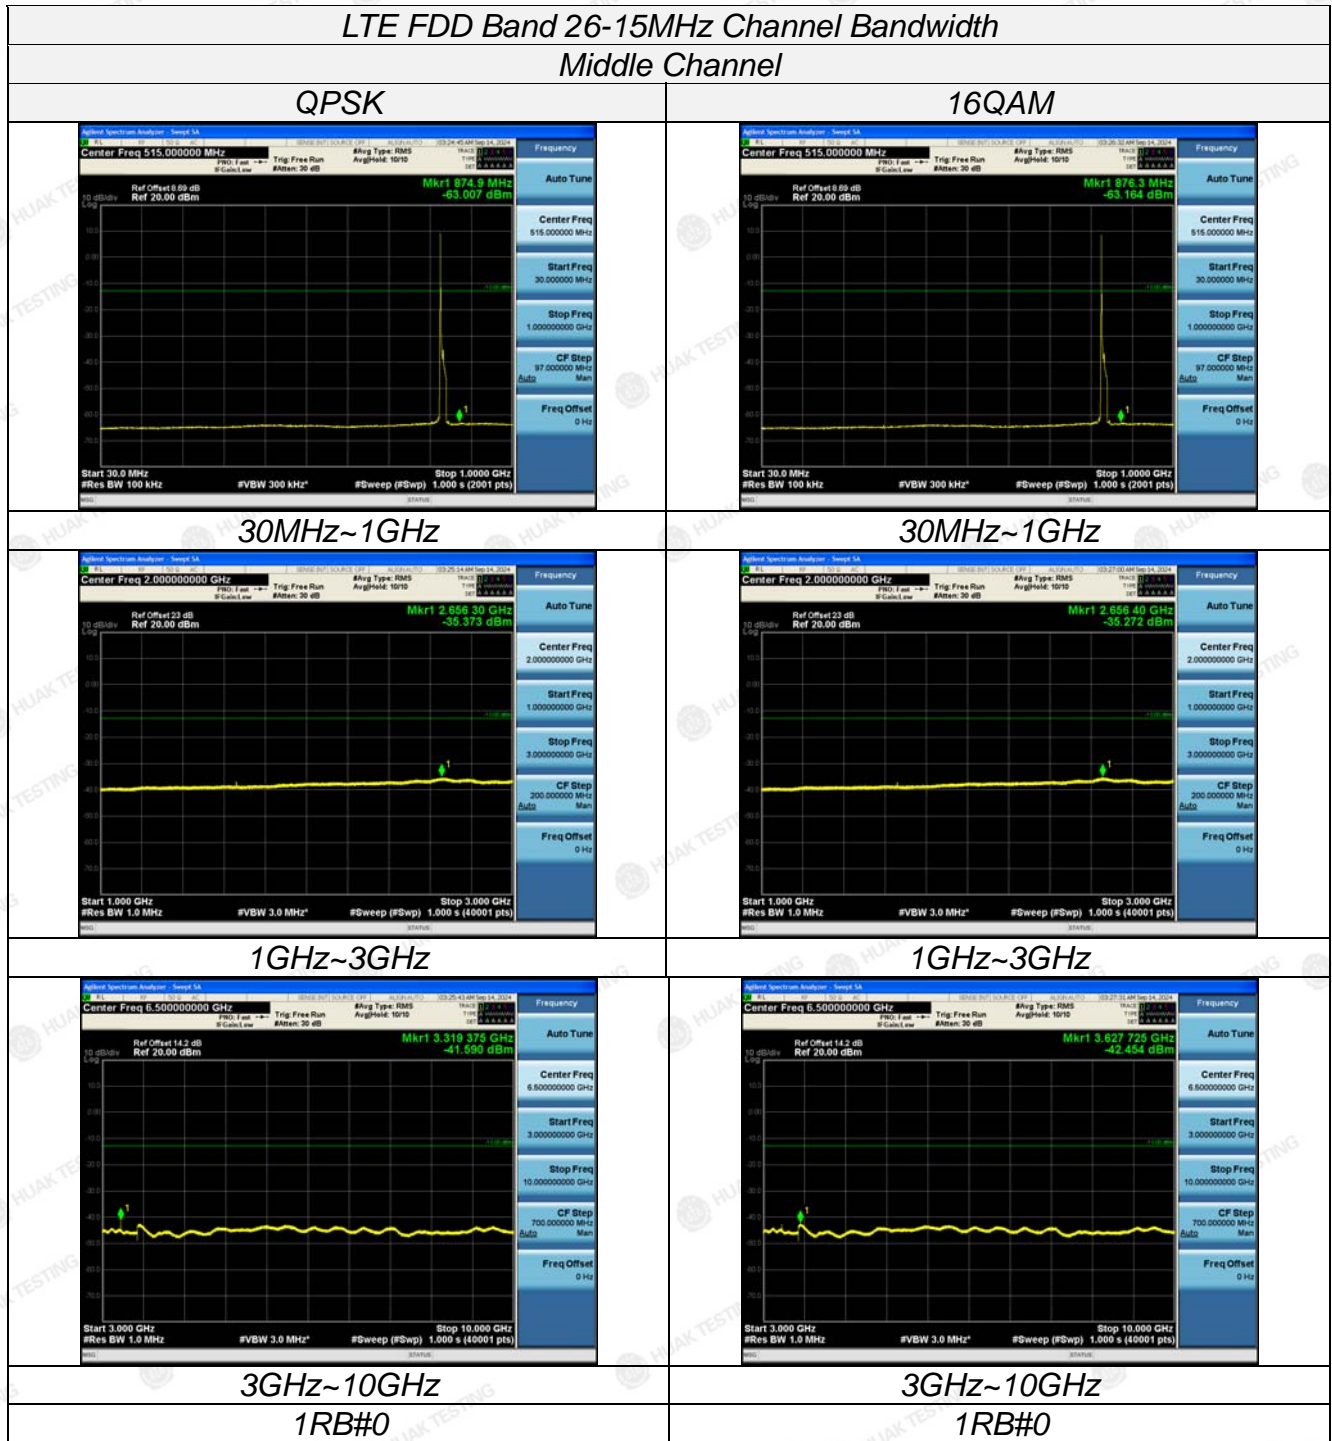

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

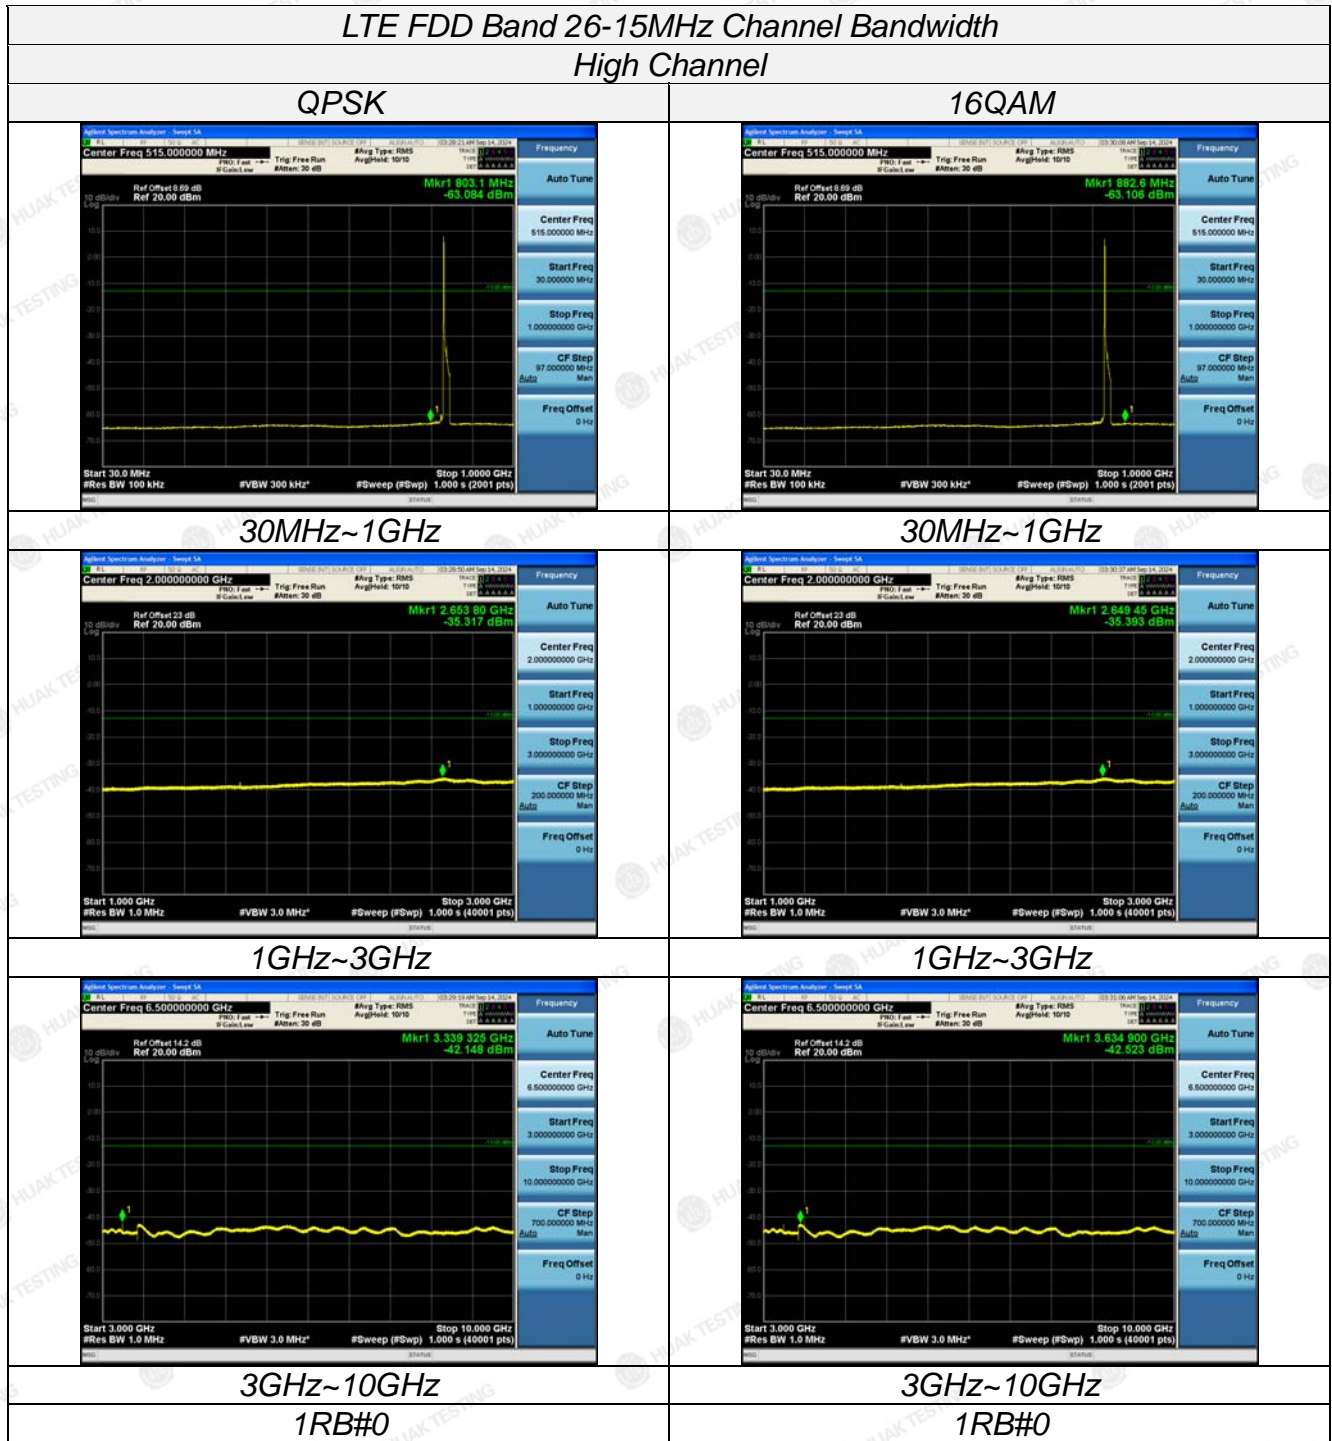



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 5.6. Field Strength of Spurious Radiation Measurement

### 5.6.1. Test Specification
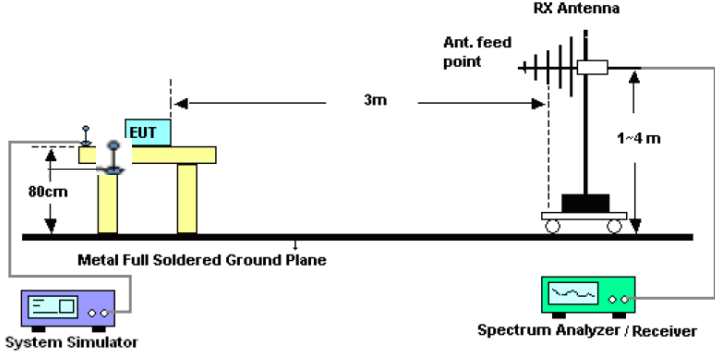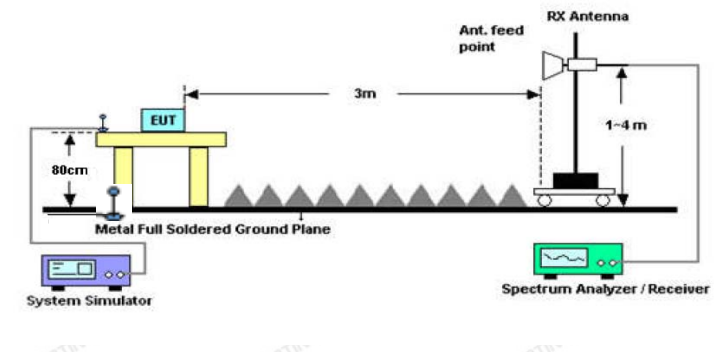
<p><b>Test Requirement:</b></p>	<p>FCC part22.917</p>
<p><b>Test Method:</b></p>	<p>FCC part 2.1053</p>
<p><b>Limit:</b></p>	<p>30MHz~20GHz -13dBm</p>
<p><b>Test setup:</b></p>	<p>From 30MHz to 1GHz</p>  <p>Above 1GHz</p> 
<p><b>Test Procedure:</b></p>	<ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03 Section 5.8 and ANSI / TIA-603-D-2010Section 2.2.12.</li> <li>2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.</li> <li>3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.</li> <li>4. The table was rotated 360 degrees to determine the position of the highest spurious emission.</li> <li>5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.</li> </ol>



	6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission. 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.  8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. 9. Taking the record of output power at antenna port. 10. Repeat step 7 to step 8 for another polarization. 11. $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$ 12. $ERP (dBm) = EIRP - 2.15$ 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
<b>Test results:</b>	<b>PASS</b>

**Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.
  2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
  3. We were not recorded other points as values lower than limits.
  4.  $Margin = Limit - EIRP$
- LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.4	-35.23	2.86	3.00	7.25	-30.84	-13.00	17.84	H
2474.1	-43.95	2.94	3.00	9.53	-37.36	-13.00	24.36	H
1649.4	-43.79	2.86	3.00	7.25	-39.4	-13.00	26.4	V
2474.1	-46.73	2.94	3.00	9.53	-40.14	-13.00	27.14	V

*LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-35.58	2.86	3.00	7.25	-31.19	-13.00	18.19	H
2509.5	-43.1	2.94	3.00	9.53	-36.51	-13.00	23.51	H
1673.0	-44.28	2.86	3.00	7.25	-39.89	-13.00	26.89	V
2509.5	-47.28	2.94	3.00	9.53	-40.69	-13.00	27.69	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_QPSK\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-45.82	2.86	3.00	7.82	-40.86	-13.00	27.86	H
2544.9	-46.79	2.94	3.00	9.35	-40.38	-13.00	27.38	H
1696.6	-45.6	2.86	3.00	7.82	-40.64	-13.00	27.64	V
2544.9	-47.99	2.94	3.00	9.35	-41.58	-13.00	28.58	V

LTE FDD Band 26\_Channel Bandwidth 3MHz\_QPSK\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.0	-46.42	2.86	3.00	7.25	-42.03	-13.00	29.03	H
2476.5	-43.96	2.94	3.00	9.53	-37.37	-13.00	24.37	H
1651.0	-46.23	2.86	3.00	7.25	-41.84	-13.00	28.84	V
2476.5	-48.38	2.94	3.00	9.53	-41.79	-13.00	28.79	V

LTE FDD Band 26\_Channel Bandwidth 3MHz\_QPSK\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.23	2.86	3.00	7.25	-40.84	-13.00	27.84	H
2509.5	-43.64	2.94	3.00	9.53	-37.05	-13.00	24.05	H
1673.0	-47.14	2.86	3.00	7.25	-42.75	-13.00	29.75	V
2509.5	-48.41	2.94	3.00	9.53	-41.82	-13.00	28.82	V

LTE FDD Band 26\_Channel Bandwidth 3MHz\_QPSK\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695.0	-46.05	2.86	3.00	7.82	-41.09	-13.00	28.09	H
2542.5	-46.06	2.94	3.00	9.35	-39.65	-13.00	26.65	H
1695.0	-44.95	2.86	3.00	7.82	-39.99	-13.00	26.99	V
2542.5	-47.67	2.94	3.00	9.35	-41.26	-13.00	28.26	V

LTE FDD Band 26\_Channel Bandwidth 5MHz\_QPSK\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.0	-45.14	2.86	3.00	7.25	-40.75	-13.00	27.75	H
2479.5	-44.86	2.94	3.00	9.53	-38.27	-13.00	25.27	H
1653.0	-46.06	2.86	3.00	7.25	-41.67	-13.00	28.67	V
2479.5	-48.12	2.94	3.00	9.53	-41.53	-13.00	28.53	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-46.19	2.86	3.00	7.25	-41.8	-13.00	28.8	H
2509.5	-46.26	2.94	3.00	9.53	-39.67	-13.00	26.67	H
1673.0	-45.05	2.86	3.00	7.25	-40.66	-13.00	27.66	V
2509.5	-48.21	2.94	3.00	9.53	-41.62	-13.00	28.62	V

LTE FDD Band 26\_Channel Bandwidth 5MHz\_QPSK\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.0	-46.82	2.86	3.00	7.82	-41.86	-13.00	28.86	H
2539.5	-45.07	2.94	3.00	9.35	-38.66	-13.00	25.66	H
1693.0	-46.29	2.86	3.00	7.82	-41.33	-13.00	28.33	V
2539.5	-47.76	2.94	3.00	9.35	-41.35	-13.00	28.35	V

LTE FDD Band 26\_Channel Bandwidth 10MHz\_QPSK\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.0	-44.57	2.86	3.00	7.25	-40.18	-13.00	27.18	H
2487.0	-43.52	2.94	3.00	9.53	-36.93	-13.00	23.93	H
1658.0	-45.68	2.86	3.00	7.25	-41.29	-13.00	28.29	V
2487.0	-46.96	2.94	3.00	9.53	-40.37	-13.00	27.37	V

LTE FDD Band 26\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.82	2.86	3.00	7.25	-41.43	-13.00	28.43	H
2509.5	-47.04	2.94	3.00	9.53	-40.45	-13.00	27.45	H
1673.0	-45.05	2.86	3.00	7.25	-40.66	-13.00	27.66	V
2509.5	-46.21	2.94	3.00	9.53	-39.62	-13.00	26.62	V

LTE FDD Band 26\_Channel Bandwidth 10MHz\_QPSK\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.0	-46.04	2.86	3.00	7.82	-41.08	-13.00	28.08	H
2532.0	-44.91	2.94	3.00	9.35	-38.5	-13.00	25.5	H
1688.0	-43.69	2.86	3.00	7.82	-38.73	-13.00	25.73	V
2532.0	-48.03	2.94	3.00	9.35	-41.62	-13.00	28.62	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 26\_Channel Bandwidth 15MHz\_QPSK\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1663.0	-43.54	2.86	3.00	7.25	-39.15	-13.00	26.15	H
2494.5	-46.29	2.94	3.00	9.53	-39.7	-13.00	26.7	H
1663.0	-44.23	2.86	3.00	7.25	-39.84	-13.00	26.84	V
2494.5	-46.61	2.94	3.00	9.53	-40.02	-13.00	27.02	V

LTE FDD Band 26\_Channel Bandwidth 15MHz\_QPSK\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-46.38	2.86	3.00	7.25	-41.99	-13.00	28.99	H
2509.5	-45.28	2.94	3.00	9.53	-38.69	-13.00	25.69	H
1673.0	-43.65	2.86	3.00	7.25	-39.26	-13.00	26.26	V
2509.5	-48.18	2.94	3.00	9.53	-41.59	-13.00	28.59	V

LTE FDD Band 26\_Channel Bandwidth 15MHz\_QPSK\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1683.0	-45.51	2.86	3.00	7.82	-40.55	-13.00	27.55	H
2524.5	-43.88	2.94	3.00	9.35	-37.47	-13.00	24.47	H
1683.0	-46.64	2.86	3.00	7.82	-41.68	-13.00	28.68	V
2524.5	-47.38	2.94	3.00	9.35	-40.97	-13.00	27.97	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.4	-45.19	2.86	3.00	7.25	-40.8	-13.00	27.8	H
2474.1	-44.76	2.94	3.00	9.53	-38.17	-13.00	25.17	H
1649.4	-45.54	2.86	3.00	7.25	-41.15	-13.00	28.15	V
2474.1	-47.93	2.94	3.00	9.53	-41.34	-13.00	28.34	V

LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.56	2.86	3.00	7.25	-41.17	-13.00	28.17	H
2509.5	-45.19	2.94	3.00	9.53	-38.6	-13.00	25.6	H
1673.0	-46.63	2.86	3.00	7.25	-42.24	-13.00	29.24	V
2509.5	-48.04	2.94	3.00	9.53	-41.45	-13.00	28.45	V

LTE FDD Band 26\_Channel Bandwidth 1.4MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-45.13	2.86	3.00	7.82	-40.17	-13.00	27.17	H
2544.9	-46.11	2.94	3.00	9.35	-39.7	-13.00	26.7	H
1696.6	-45.56	2.86	3.00	7.82	-40.6	-13.00	27.6	V
2544.9	-50.24	2.94	3.00	9.35	-43.83	-13.00	30.83	V

LTE FDD Band 26\_Channel Bandwidth 3MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.0	-45.96	2.86	3.00	7.25	-41.57	-13.00	28.57	H
2476.5	-43.49	2.94	3.00	9.53	-36.9	-13.00	23.9	H
1651.0	-45.52	2.86	3.00	7.25	-41.13	-13.00	28.13	V
2476.5	-48.09	2.94	3.00	9.53	-41.5	-13.00	28.5	V

LTE FDD Band 26\_Channel Bandwidth 3MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-46.42	2.86	3.00	7.25	-42.03	-13.00	29.03	H
2509.5	-45.37	2.94	3.00	9.53	-38.78	-13.00	25.78	H
1673.0	-44.95	2.86	3.00	7.25	-40.56	-13.00	27.56	V
2509.5	-47.76	2.94	3.00	9.53	-41.17	-13.00	28.17	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26\_Channel Bandwidth 3MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695.0	-44.29	2.86	3.00	7.82	-39.33	-13.00	26.33	H
2542.5	-42.87	2.94	3.00	9.35	-36.46	-13.00	23.46	H
1695.0	-45.29	2.86	3.00	7.82	-40.33	-13.00	27.33	V
2542.5	-49.96	2.94	3.00	9.35	-43.55	-13.00	30.55	V

LTE FDD Band 26\_Channel Bandwidth 5MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.0	-45.88	2.86	3.00	7.25	-41.49	-13.00	28.49	H
2479.5	-44.82	2.94	3.00	9.53	-38.23	-13.00	25.23	H
1653.0	-46.17	2.86	3.00	7.25	-41.78	-13.00	28.78	V
2479.5	-48.29	2.94	3.00	9.53	-41.7	-13.00	28.7	V

LTE FDD Band 26\_Channel Bandwidth 5MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.42	2.86	3.00	7.25	-41.03	-13.00	28.03	H
2509.5	-46.9	2.94	3.00	9.53	-40.31	-13.00	27.31	H
1673.0	-44.95	2.86	3.00	7.25	-40.56	-13.00	27.56	V
2509.5	-46.97	2.94	3.00	9.53	-40.38	-13.00	27.38	V

LTE FDD Band 26\_Channel Bandwidth 5MHz\_16QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.0	-44.98	2.86	3.00	7.82	-40.02	-13.00	27.02	H
2539.5	-45.26	2.94	3.00	9.35	-38.85	-13.00	25.85	H
1693.0	-47.36	2.86	3.00	7.82	-42.4	-13.00	29.4	V
2539.5	-49.67	2.94	3.00	9.35	-43.26	-13.00	30.26	V

LTE FDD Band 26\_Channel Bandwidth 10MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.0	-45.11	2.86	3.00	7.25	-40.72	-13.00	27.72	H
2487.0	-44.84	2.94	3.00	9.53	-38.25	-13.00	25.25	H
1658.0	-46.94	2.86	3.00	7.25	-42.55	-13.00	29.55	V
2487.0	-48.36	2.94	3.00	9.53	-41.77	-13.00	28.77	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



LTE FDD Band 26\_Channel Bandwidth 10MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-45.8	2.86	3.00	7.25	-41.41	-13.00	28.41	H
2509.5	-45.99	2.94	3.00	9.53	-39.4	-13.00	26.4	H
1673.0	-44.92	2.86	3.00	7.25	-40.53	-13.00	27.53	V
2509.5	-46.89	2.94	3.00	9.53	-40.3	-13.00	27.3	V

LTE FDD Band 26\_Channel Bandwidth 10MHz\_10QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.0	-45.36	2.86	3.00	7.82	-40.4	-13.00	27.4	H
2532.0	-44.96	2.94	3.00	9.35	-38.55	-13.00	25.55	H
1688.0	-47.16	2.86	3.00	7.82	-42.2	-13.00	29.2	V
2532.0	-48.17	2.94	3.00	9.35	-41.76	-13.00	28.76	V

LTE FDD Band 26\_Channel Bandwidth 15MHz\_16QAM\_Low Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1663.0	-45.09	2.86	3.00	7.25	-40.7	-13.00	27.7	H
2494.5	-45.19	2.94	3.00	9.53	-38.6	-13.00	25.6	H
1663.0	-44.04	2.86	3.00	7.25	-39.65	-13.00	26.65	V
2494.5	-48.08	2.94	3.00	9.53	-41.49	-13.00	28.49	V

LTE FDD Band 26\_Channel Bandwidth 15MHz\_16QAM\_Middle Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
167.03	-44.93	2.86	3.00	7.25	-40.54	-13.00	27.54	H
2509.5	-46.05	2.94	3.00	9.53	-39.46	-13.00	26.46	H
167.03	-43.18	2.86	3.00	7.25	-38.79	-13.00	25.79	V
2509.5	-47.26	2.94	3.00	9.53	-40.67	-13.00	27.67	V

LTE FDD Band 26\_Channel Bandwidth 15MHz\_10QAM\_High Channel

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1683.0	-45.09	2.86	3.00	7.82	-40.13	-13.00	27.13	H
2524.5	-44.82	2.94	3.00	9.35	-38.41	-13.00	25.41	H
1683.0	-47.01	2.86	3.00	7.82	-42.05	-13.00	29.05	V
2524.5	-47.12	2.94	3.00	9.35	-40.71	-13.00	27.71	V


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

## 5.7. Frequency Stability Measurement

### 5.7.1. Test Specification

<b>Test Requirement:</b>	FCC part 22.355
<b>Test Method:</b>	FCC Part 2.1055
<b>Limit:</b>	±2.5 ppm
<b>Test Setup:</b>	
<b>Test Procedure:</b>	<p><b>Test Procedures for Temperature Variation</b></p> <ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03 Section 9.0.</li> <li>2. The EUT was set up in the thermal chamber and connected with the system simulator.</li> <li>3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.</li> <li>4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.</li> </ol> <p><b>Test Procedures for Voltage Variation</b></p> <ol style="list-style-type: none"> <li>1. The testing follows FCC KDB 971168 D01v03 Section 9.0.</li> <li>2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.</li> <li>3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.</li> <li>4. The variation in frequency was measured for the worst case.</li> </ol>
<b>Test Result:</b>	PASS



**TEST RESULTS**

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case.

LTE Band 26, 1.4MHz bandwidth (worst case of all bandwidths)

**Frequency Error vs Voltage**

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
4.25	2.15	10.10	0.002607	0.012247	2.50
5.0	12.53	22.12	0.015193	0.026822	2.50
5.75	25.61	38.32	0.031054	0.046465	2.50


**Frequency Error vs Temperature**

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	24.81	12.13	0.029247	0.014299	2.50
-20°	10.39	32.77	0.012248	0.038630	2.50
-10°	37.14	1.87	0.043782	0.002204	2.50
0°	14.10	19.56	0.016621	0.023058	2.50
10°	45.42	38.64	0.053542	0.045550	2.50
20°	20.23	2.40	0.023848	0.002829	2.50
30°	41.56	18.77	0.048992	0.022127	2.50
40°	31.23	37.55	0.036815	0.044265	2.50
50°	6.69	4.52	0.007886	0.005328	2.50



## 6. PHOTOGRAPHS OF TEST SETUP

### Radiated Emission

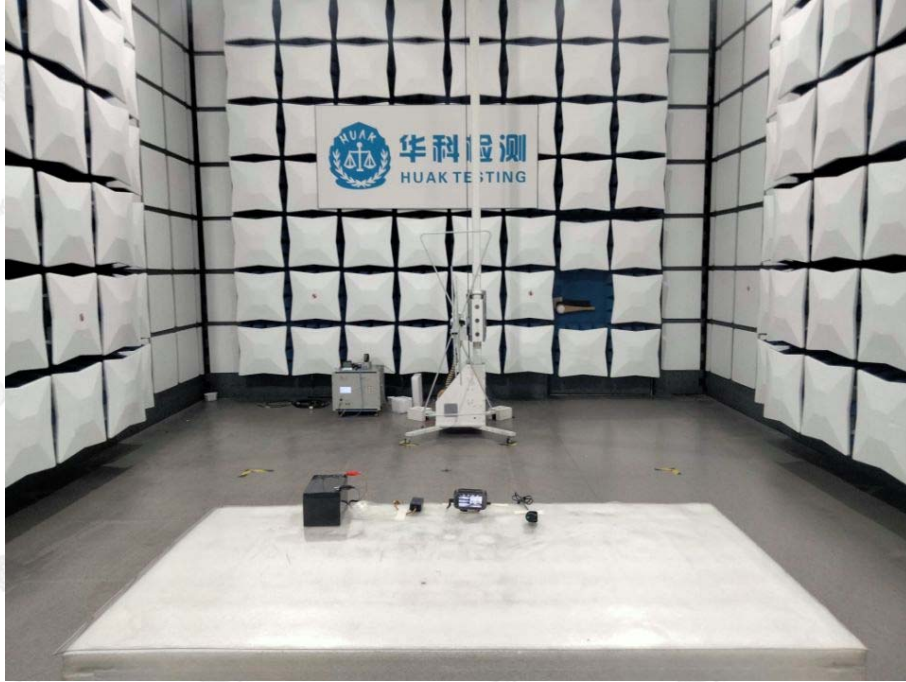

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Address: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 7. PHOTOGRAPHS OF EUT

Refer to test report ANNEX A of external photos and ANNEX B of internal photos

.....**End of Report**.....

