

# TEST REPORT

Product Name: Bluetooth headset  
FCC ID: 2BBQJ-MH22180  
Trademark: N/A  
Model Number: MH22180, MH22156, MH22173, MH22155, MH22134, MH22157, G50  
Prepared For: Shenzhen Cantianshu Information Technology Co.,Ltd  
Address: 701, Building D, Xinghe world Phase II, Minle Community, Minzhi Street, Longhua District, Shenzhen, China  
Manufacturer: Shenzhen Jiumutong Technology Co., Ltd.  
Address: 1602, Block A, Fencheng Zhigu Building, No. 60 Tiezai Road, Gongle Community, Xixiang Street, Bao'an District, Shenzhen  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Aug. 17, 2023  
Sample tested Date: Aug. 17, 2023 to Aug. 31, 2023  
Issue Date: Aug. 31, 2023  
Report No.: CTB230826024RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

*Zhou kui*Zhou Kui

Reviewed by:

*Arron Liu*Arron Liu

Approved by:

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	11
6.1 Block Diagram Of Test Setup .....	11
6.2 Limit .....	11
6.3 Test procedure .....	11
6.4 Test Result .....	13
<b>7. RADIATED SPURIOUS EMISSION</b> .....	15
7.1 Block Diagram Of Test Setup .....	15
7.2 Limit .....	15
7.3 Test procedure .....	16
7.4 Test Result .....	17
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	35
8.1 Block Diagram Of Test Setup .....	35
8.2 Limit .....	35
8.3 Test procedure .....	35
8.4 Test Result .....	36
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	46
9.1 Block Diagram Of Test Setup .....	46
9.2 Limit .....	46
9.3 Test procedure .....	46
9.4 Test Result .....	47
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	52
10.1 Block Diagram Of Test Setup .....	52
10.2 Limit .....	52
10.3 Test procedure .....	52
10.4 Test Result .....	52
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	57
11.1 Block Diagram Of Test Setup .....	57
11.2 Limit .....	57
11.3 Test procedure .....	57
11.4 Test Result .....	57
<b>12. HOPPING CHANNEL NUMBER</b> .....	62
12.1 Block Diagram Of Test Setup .....	62
12.2 Limit .....	62
12.3 Test procedure .....	62
12.4 Test Result .....	62
<b>13. DWELL TIME</b> .....	65
13.1 Block Diagram Of Test Setup .....	65

13.2 Limit ..... 65

13.3 Test procedure ..... 65

13.4 Test Result ..... 66

**14. PSEUDORANDOM FREQUENCY ..... 73**

14.1 Limit ..... 73

14.2 Test procedure ..... 73

14.3 Test Result ..... 74

**15. ANTENNA REQUIREMENT ..... 75**

**16. EUT TEST SETUP PHOTOGRAPHS ..... 76**

*(Note: N/A means not applicable)*

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB230826024RFX	Aug. 31, 2023	Original	Valid



## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s): MH22180, MH22156, MH22173, MH22155, MH22134, MH22157, G50

Model Description: All the model are the same circuit and RF module, only for model name. Test sample model: MH22180

Bluetooth Version: Bluetooth 5.0

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 2.629dBm

Type of Modulation: Bluetooth: GFSK,  $\pi/4$  DQPSK

Antenna installation: Bluetooth: Internal antenna

Antenna Gain: Bluetooth: 3.19dBi

Ratings: DC 5V charging from adapter  
DC 3.7V from battery

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XLBLQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2023.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2023.10.30

**Continuous disturbance**


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

**Radiated emission**

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

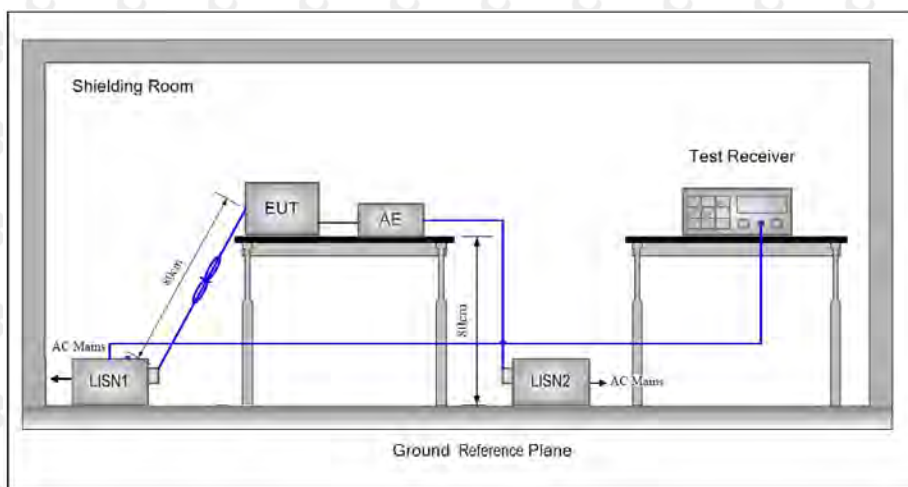

### 6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.




- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.



6.4 Test Result

L: Worst case-GFSK(low channel)

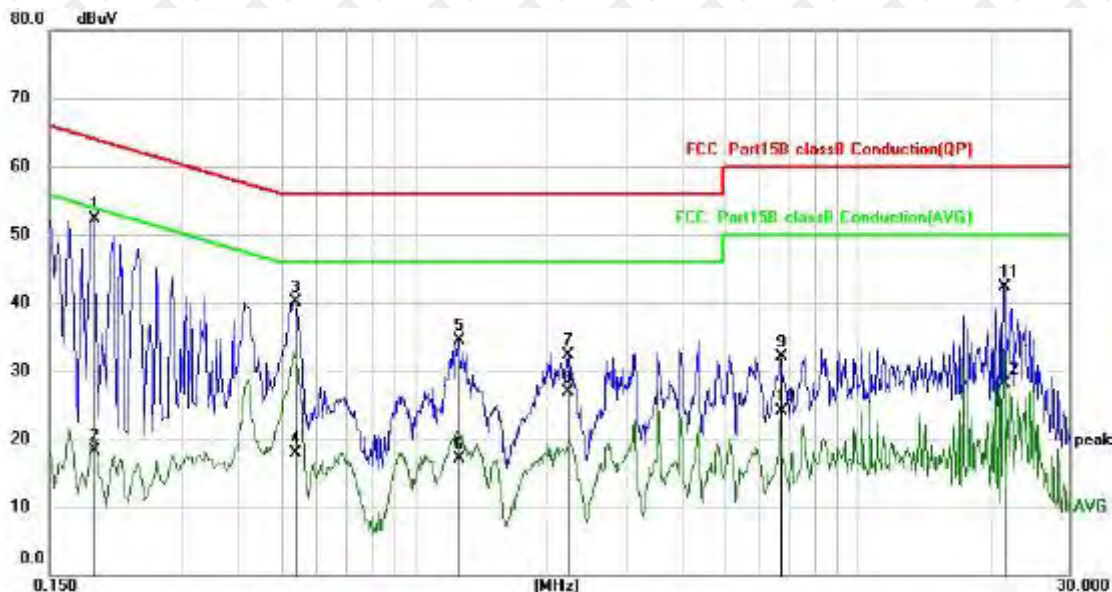


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1900	42.59	9.70	52.29	64.04	-11.75	QP
2		0.1900	8.55	9.70	18.25	54.04	-35.79	AVG
3		0.5380	30.51	9.69	40.20	56.00	-15.80	QP
4		0.5380	8.19	9.69	17.88	46.00	-28.12	AVG
5		1.2579	24.79	9.78	34.57	56.00	-21.43	QP
6		1.2579	7.28	9.78	17.06	46.00	-28.94	AVG
7		2.2180	22.44	9.82	32.26	56.00	-23.74	QP
8		2.2180	17.07	9.82	26.89	46.00	-19.11	AVG
9		6.7060	22.00	10.02	32.02	60.00	-27.98	QP
10		6.7060	13.99	10.02	24.01	50.00	-25.99	AVG
11		21.2780	31.58	10.63	42.21	60.00	-17.79	QP
12		21.2780	17.43	10.63	28.06	50.00	-21.94	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit  
 Measurement=Reading level+correct facto

N: Worst case-GFSK(low channel)

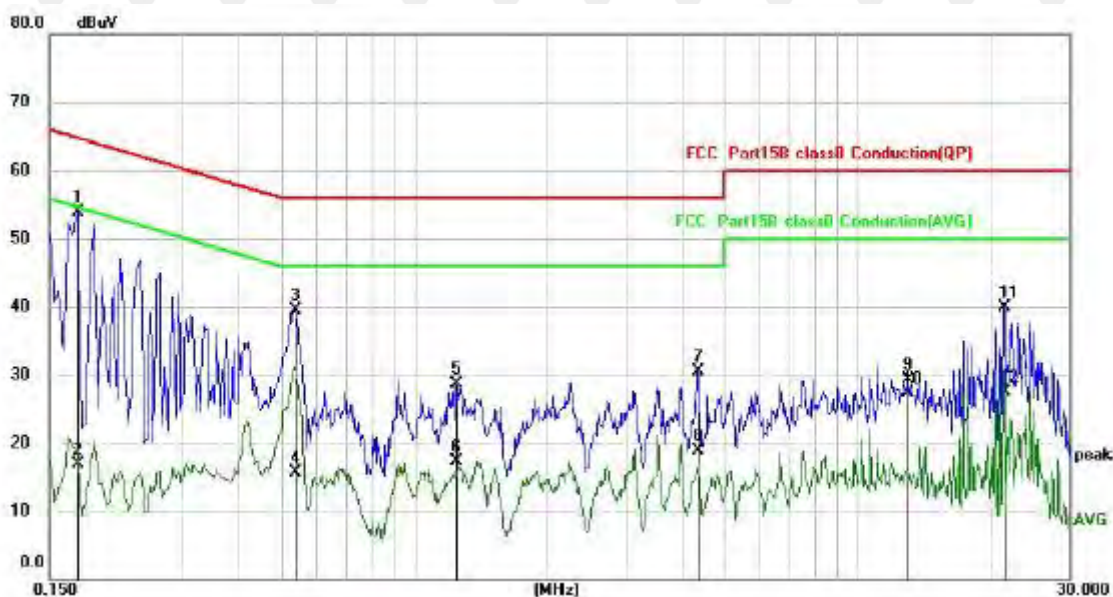

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1740	44.24	9.70	53.94	64.77	-10.83	QP
2		0.1740	7.27	9.70	16.97	54.77	-37.80	AVG
3		0.5380	29.87	9.69	39.56	56.00	-16.44	QP
4		0.5380	5.95	9.69	15.64	46.00	-30.36	AVG
5		1.2420	18.89	9.78	28.67	56.00	-27.33	QP
6		1.2420	7.51	9.78	17.29	46.00	-28.71	AVG
7		4.3460	20.61	9.91	30.52	56.00	-25.48	QP
8		4.3460	8.93	9.91	18.84	46.00	-27.16	AVG
9		12.9300	19.06	10.29	29.35	60.00	-30.65	QP
10		12.9300	17.01	10.29	27.30	50.00	-22.70	AVG
11		21.2860	29.26	10.63	39.89	60.00	-20.11	QP
12		21.2860	16.87	10.63	27.50	50.00	-22.50	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit  
 Measurement=Reading level+correct facto

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

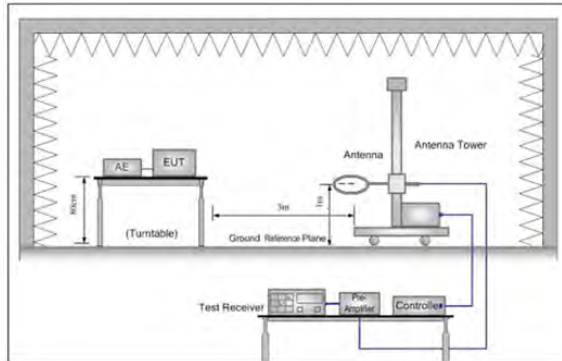


Figure 1. Below 30MHz

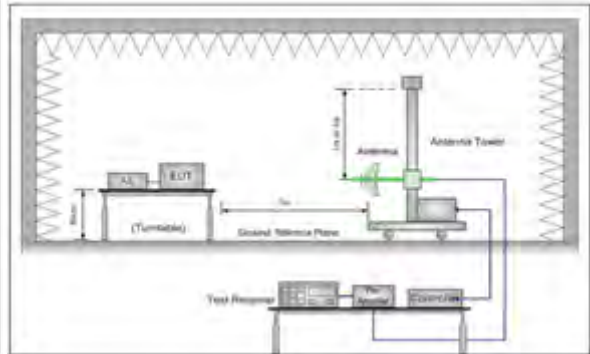


Figure 2. 30MHz to 1GHz

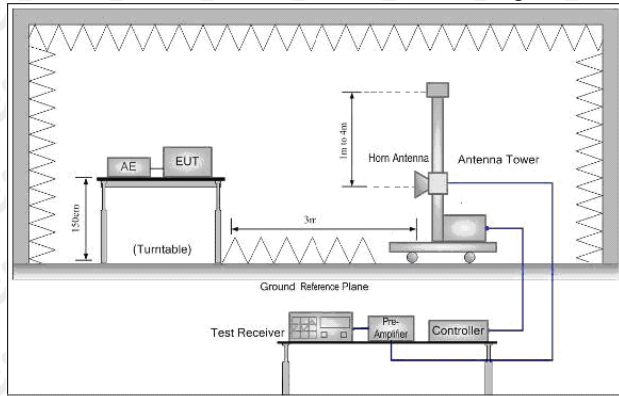


Figure 3. Above 1GHz

### 7.2 Limit

#### Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average




## 7.4 Test Result

### Right ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

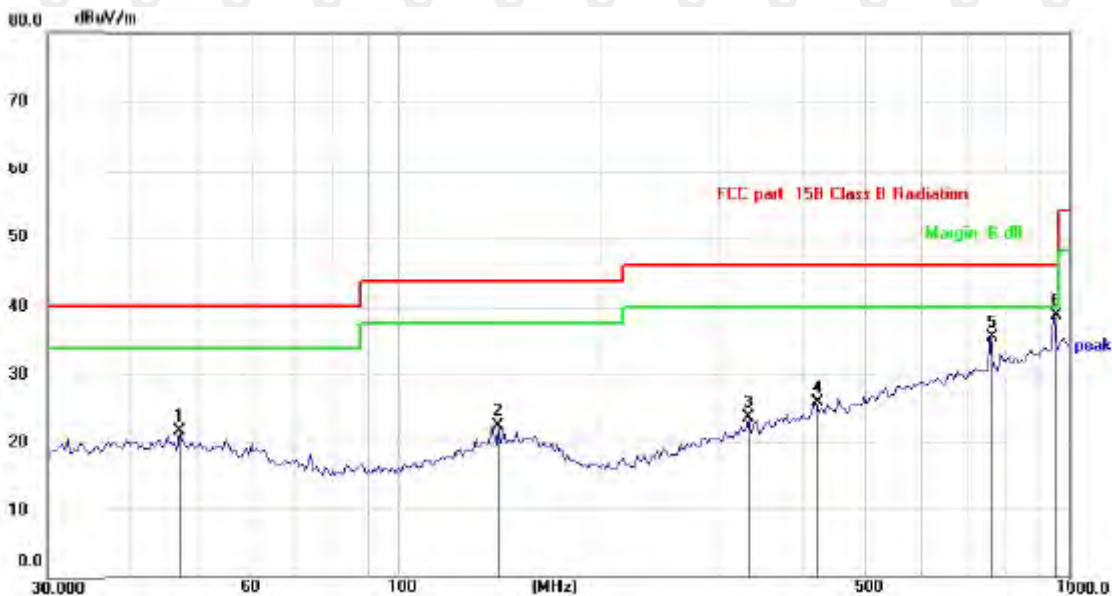

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		47.3255	28.26	-6.58	21.68	40.00	-18.32	QP
2		141.5777	27.96	-5.50	22.46	43.50	-21.04	QP
3		334.2722	28.15	-4.50	23.65	46.00	-22.35	QP
4		419.8436	27.92	-2.11	25.81	46.00	-20.19	QP
5		762.0385	30.41	5.05	35.46	46.00	-10.54	QP
6	*	948.7610	31.06	7.63	38.69	46.00	-7.31	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit  
 Measurement=Reading level+correct facto

Antenna polarity: V  
Worst case-GFSK(low channel)

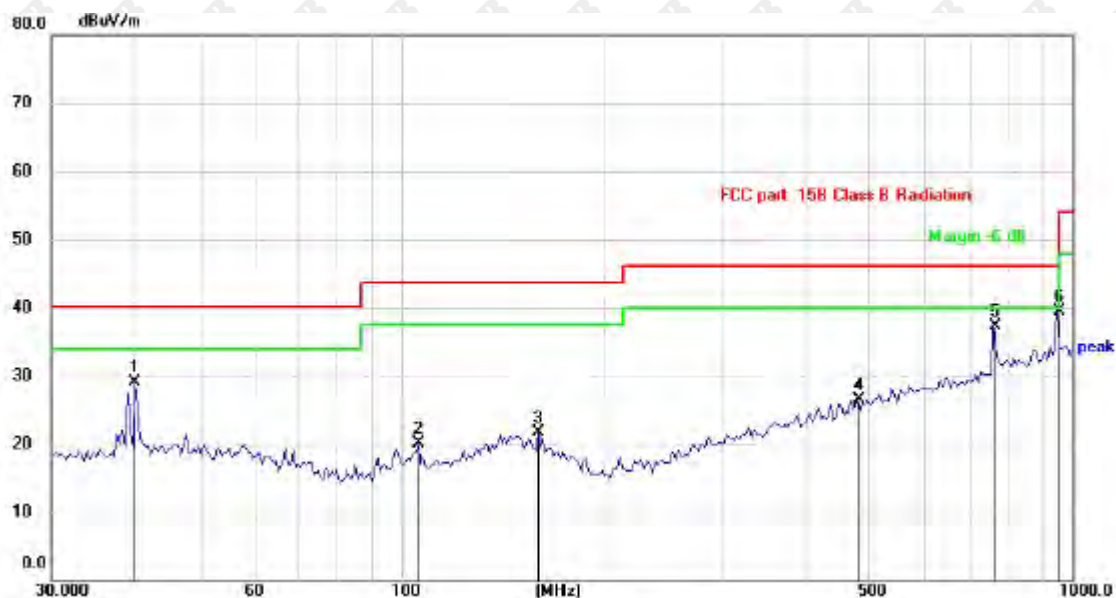

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		40.0644	35.67	-6.47	29.20	40.00	-10.80	QP
2		106.0126	29.26	-9.13	20.13	43.50	-23.37	QP
3		160.0648	27.25	-5.48	21.77	43.50	-21.73	QP
4		478.8456	27.09	-0.53	26.56	46.00	-19.44	QP
5		762.0385	32.21	5.05	37.26	46.00	-8.74	QP
6	*	948.7610	31.81	7.63	39.44	46.00	-6.56	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit  
Measurement=Reading level+correct facto

**Left ear:**  
 Below 1GHz Test Results:  
 Antenna polarity: H  
 Worst case-GFSK(low channel)



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		40.0644	29.60	-6.47	23.13	40.00	-16.87	QP
2		130.8369	33.07	-6.23	26.84	43.50	-16.66	QP
3		149.2239	32.27	-5.46	26.81	43.50	-16.69	QP
4		298.2681	39.34	-5.55	33.79	46.00	-12.21	QP
5		438.6554	32.81	-1.61	31.20	46.00	-14.80	QP
6	*	948.7610	30.91	7.63	38.54	46.00	-7.46	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement– Limit  
 Measurement=Reading level+correct facto



Antenna polarity: V  
Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		41.8596	38.80	-6.50	32.30	40.00	-7.70	QP
2		146.6304	40.67	-5.48	35.19	43.50	-8.31	QP
3		298.2681	33.49	-5.55	27.94	46.00	-18.06	QP
4		458.3102	38.10	-1.08	37.02	46.00	-8.98	QP
5		775.5169	29.87	5.31	35.18	46.00	-10.82	QP
6	*	948.7610	30.98	7.63	38.61	46.00	-7.39	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit  
Measurement=Reading level+correct facto



**Right ear:**

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	56.44	-3.65	52.79	74.00	-21.21	peak
4804	49.01	-3.65	45.36	54.00	-8.64	AVG
7206	61.32	-0.95	60.37	74.00	-13.63	peak
7206	42.77	-0.95	41.82	54.00	-12.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	56.85	-3.65	53.20	74.00	-20.80	peak
4804	49.42	-3.65	45.77	54.00	-8.23	AVG
7206	60.77	-0.95	59.82	74.00	-14.18	peak
7206	41.06	-0.95	40.11	54.00	-13.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## CH Middle (2441MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4882.00	58.44	-3.54	54.90	74.00	-19.10	peak
4882.00	49.62	-3.54	46.08	54.00	-7.92	AVG
7323.00	56.36	-0.81	55.55	74.00	-18.45	peak
7323.00	41.94	-0.81	41.13	54.00	-12.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4882.00	58.77	-3.54	55.23	74.00	-18.77	peak
4882.00	50.24	-3.54	46.70	54.00	-7.30	AVG
7323.00	58.43	-0.81	57.62	74.00	-16.38	peak
7323.00	43.13	-0.81	42.32	54.00	-11.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	57.41	-3.43	53.98	74.00	-20.02	peak
4960	48.58	-3.44	45.14	54.00	-8.86	AVG
7440	58.76	-0.77	57.99	74.00	-16.01	peak
7440	41.08	-0.77	40.31	54.00	-13.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	56.63	-3.43	53.20	74.00	-20.80	peak
4960	49.31	-3.44	45.87	54.00	-8.13	AVG
7440	60.18	-0.77	59.41	74.00	-14.59	peak
7440	41.08	-0.77	40.31	54.00	-13.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report



**Restricted bands around fundamental frequency (Radiated)**

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	56.50	-5.81	50.69	74.00	-23.31	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.89	-5.84	49.05	74.00	-24.95	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310.00	57.36	-5.81	51.55	74.00	-22.45	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.78	-5.84	50.94	74.00	-23.06	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	54.56	-5.81	48.75	74.00	-25.25	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.95	-6.06	48.89	74.00	-25.11	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	56.48	-5.81	50.67	74.00	-23.33	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.97	-6.06	47.91	74.00	-26.09	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	55.12	-5.81	49.31	74.00	-24.69	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.08	-5.84	50.24	74.00	-23.76	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	56.11	-5.81	50.30	74.00	-23.70	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.18	-5.84	48.34	74.00	-25.66	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	56.81	-5.81	51.00	74.00	-23.00	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.80	-6.06	48.74	74.00	-25.26	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	56.47	-5.81	50.66	74.00	-23.34	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.28	-6.06	48.22	74.00	-25.78	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

**Left ear:**

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	57.62	-3.65	53.97	74.00	-20.03	peak
4804	50.44	-3.65	46.79	54.00	-7.21	AVG
7206	61.26	-0.95	60.31	74.00	-13.69	peak
7206	41.95	-0.95	41.00	54.00	-13.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	58.44	-3.65	54.79	74.00	-19.21	peak
4804	50.90	-3.65	47.25	54.00	-6.75	AVG
7206	61.64	-0.95	60.69	74.00	-13.31	peak
7206	41.72	-0.95	40.77	54.00	-13.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	58.65	-3.54	55.11	74.00	-18.89	peak
4882.00	47.96	-3.54	44.42	54.00	-9.58	AVG
7323.00	57.53	-0.81	56.72	74.00	-17.28	peak
7323.00	42.93	-0.81	42.12	54.00	-11.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	57.08	-3.54	53.54	74.00	-20.46	peak
4882.00	50.01	-3.54	46.47	54.00	-7.53	AVG
7323.00	57.86	-0.81	57.05	74.00	-16.95	peak
7323.00	43.09	-0.81	42.28	54.00	-11.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	58.55	-3.43	55.12	74.00	-18.88	peak
4960	49.29	-3.44	45.85	54.00	-8.15	AVG
7440	60.64	-0.77	59.87	74.00	-14.13	peak
7440	40.10	-0.77	39.33	54.00	-14.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	56.62	-3.43	53.19	74.00	-20.81	peak
4960	48.51	-3.44	45.07	54.00	-8.93	AVG
7440	60.62	-0.77	59.85	74.00	-14.15	peak
7440	40.13	-0.77	39.36	54.00	-14.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

**Restricted bands around fundamental frequency (Radiated)**

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	56.74	-5.81	50.93	74.00	-23.07	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.41	-5.84	50.57	74.00	-23.43	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	56.81	-5.81	51.00	74.00	-23.00	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.14	-5.84	50.30	74.00	-23.70	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.65	-5.81	49.84	74.00	-24.16	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.61	-6.06	47.55	74.00	-26.45	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	56.10	-5.81	50.29	74.00	-23.71	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.64	-6.06	48.58	74.00	-25.42	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.



NO hopping

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	54.59	-5.81	48.78	74.00	-25.22	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.52	-5.84	47.68	74.00	-26.32	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	54.43	-5.81	48.62	74.00	-25.38	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.39	-5.84	47.55	74.00	-26.45	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.24	-5.81	49.43	74.00	-24.57	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.23	-6.06	48.17	74.00	-25.83	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	56.70	-5.81	50.89	74.00	-23.11	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.88	-6.06	48.82	74.00	-25.18	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

When the peak value is smaller than the AVG limit, AVG is not reflected.

**8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS**

8.1 Block Diagram Of Test Setup

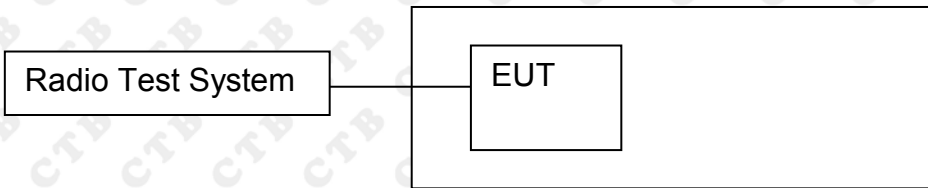

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold




## 8.4 Test Result

Right ear:

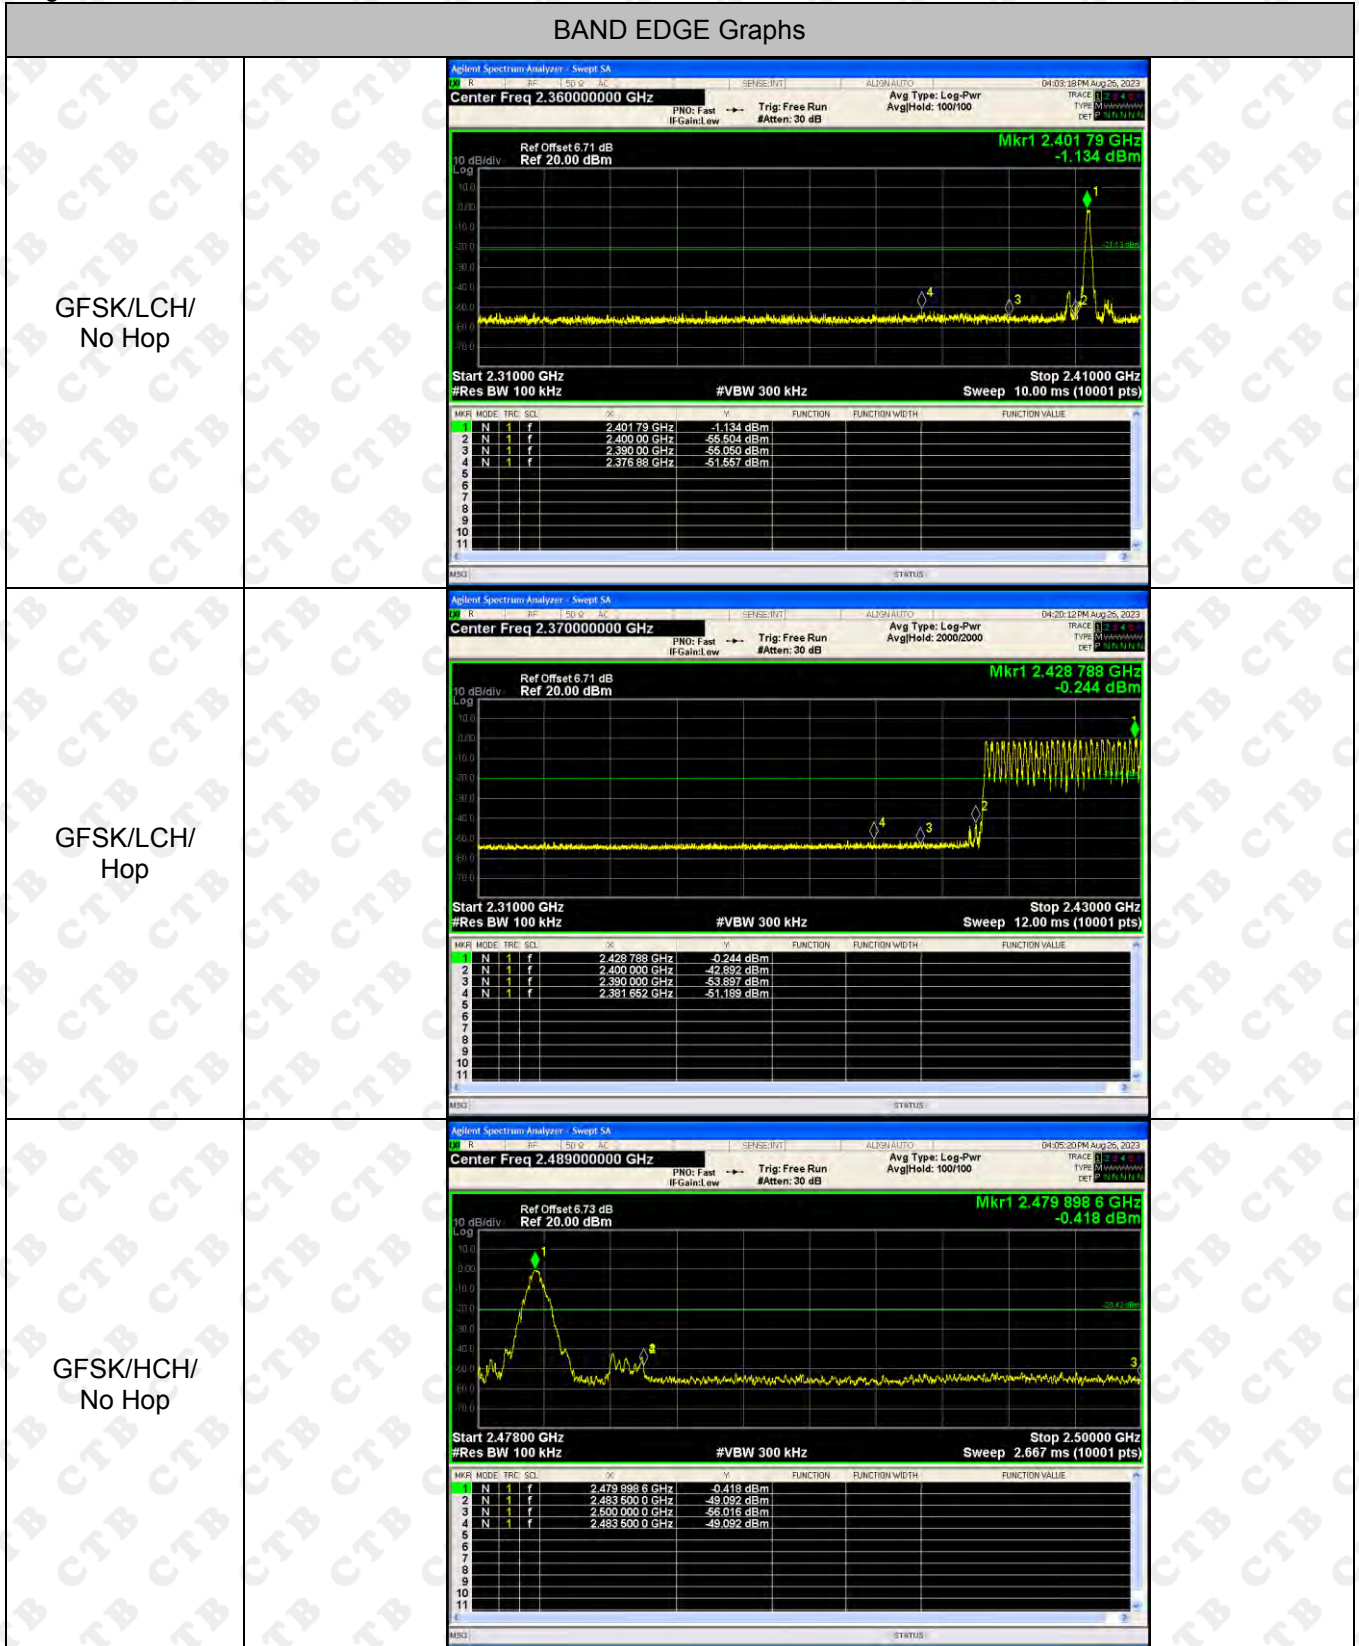


<p>GFSK/HCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.448 793 75 GHz 0.642 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SC</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.448 793 75 GHz</td> <td></td> <td></td> <td>0.642 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td></td> <td></td> <td>-51.225 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.600 000 00 GHz</td> <td></td> <td></td> <td>-54.184 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.487 275 00 GHz</td> <td></td> <td></td> <td>-50.410 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.448 793 75 GHz			0.642 dBm	2	N	1	f	2.483 500 00 GHz			-51.225 dBm	3	N	1	f	2.600 000 00 GHz			-54.184 dBm	4	N	1	f	2.487 275 00 GHz			-50.410 dBm
MKR MODE	TRC	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.448 793 75 GHz			0.642 dBm																																		
2	N	1	f	2.483 500 00 GHz			-51.225 dBm																																		
3	N	1	f	2.600 000 00 GHz			-54.184 dBm																																		
4	N	1	f	2.487 275 00 GHz			-50.410 dBm																																		
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.401 95 GHz -1.411 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SC</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 95 GHz</td> <td></td> <td></td> <td>-1.411 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td></td> <td></td> <td>-54.445 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td></td> <td></td> <td>-55.135 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.370 88 GHz</td> <td></td> <td></td> <td>-51.458 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 95 GHz			-1.411 dBm	2	N	1	f	2.400 00 GHz			-54.445 dBm	3	N	1	f	2.390 00 GHz			-55.135 dBm	4	N	1	f	2.370 88 GHz			-51.458 dBm
MKR MODE	TRC	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.401 95 GHz			-1.411 dBm																																		
2	N	1	f	2.400 00 GHz			-54.445 dBm																																		
3	N	1	f	2.390 00 GHz			-55.135 dBm																																		
4	N	1	f	2.370 88 GHz			-51.458 dBm																																		
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.423 940 GHz -0.946 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SC</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.423 940 GHz</td> <td></td> <td></td> <td>-0.946 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td></td> <td></td> <td>-43.981 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td></td> <td></td> <td>-53.219 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.353 850 GHz</td> <td></td> <td></td> <td>-51.415 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.423 940 GHz			-0.946 dBm	2	N	1	f	2.400 000 GHz			-43.981 dBm	3	N	1	f	2.390 000 GHz			-53.219 dBm	4	N	1	f	2.353 850 GHz			-51.415 dBm
MKR MODE	TRC	SC	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	1	f	2.423 940 GHz			-0.946 dBm																																		
2	N	1	f	2.400 000 GHz			-43.981 dBm																																		
3	N	1	f	2.390 000 GHz			-53.219 dBm																																		
4	N	1	f	2.353 850 GHz			-51.415 dBm																																		



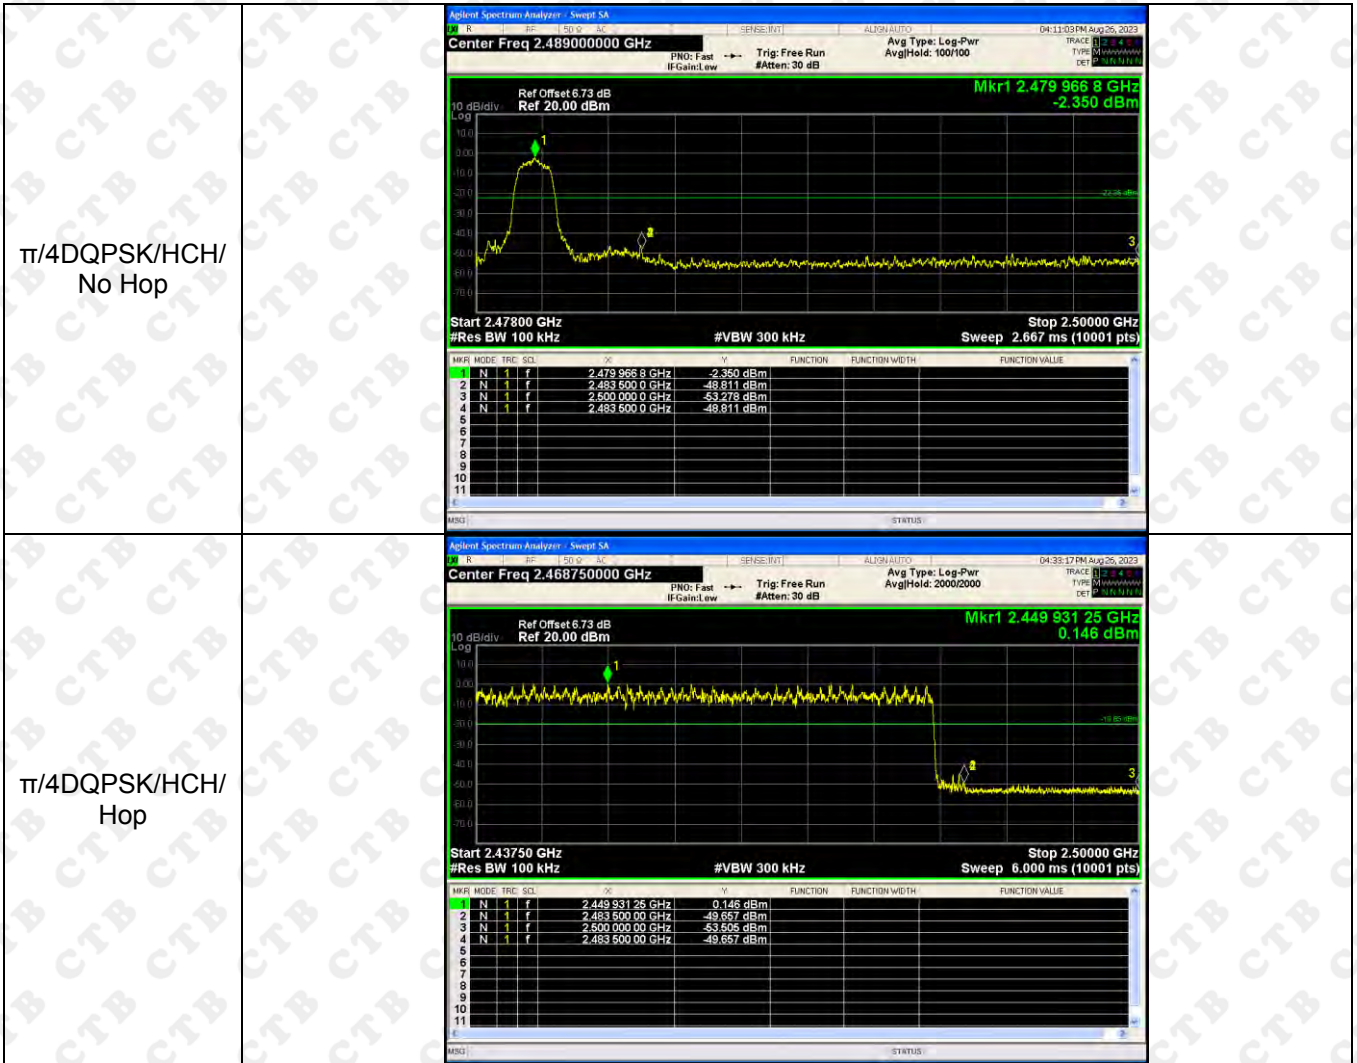


## RF Conducted Spurious Emissions Graphs


GFSK/LCH

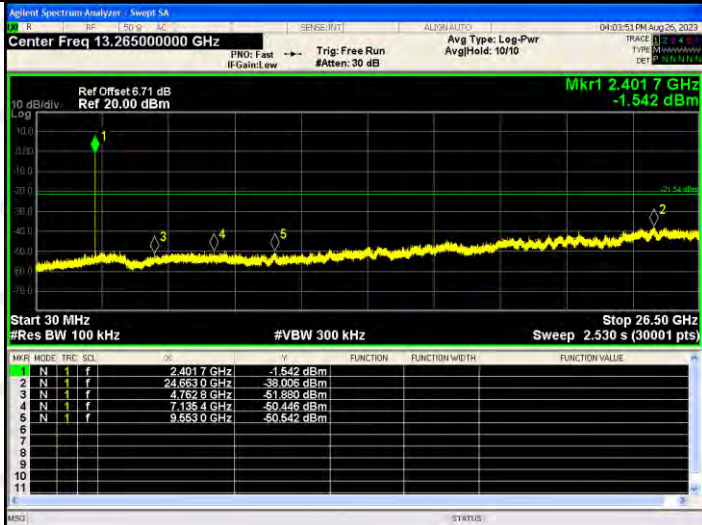



GFSK/MCH

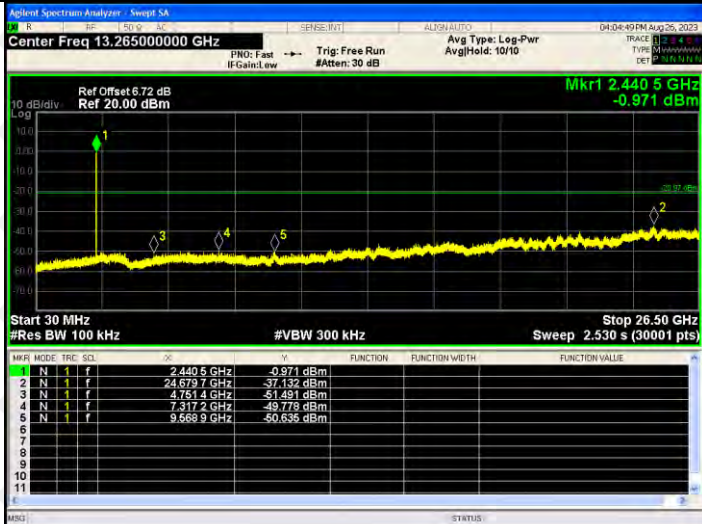


GFSK/HCH

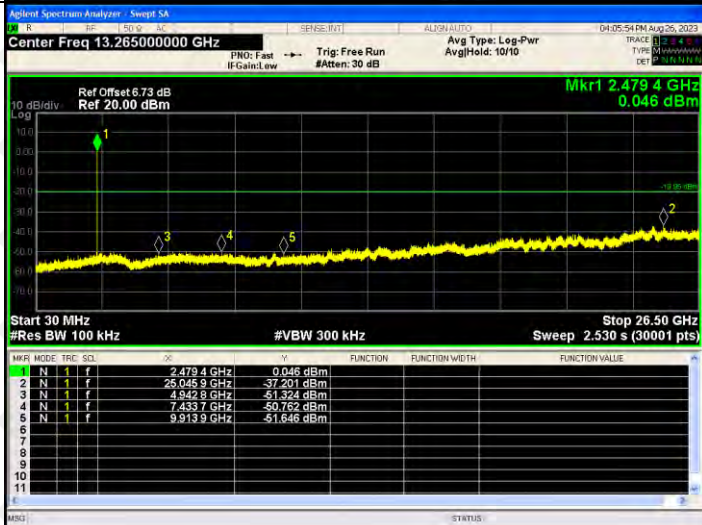

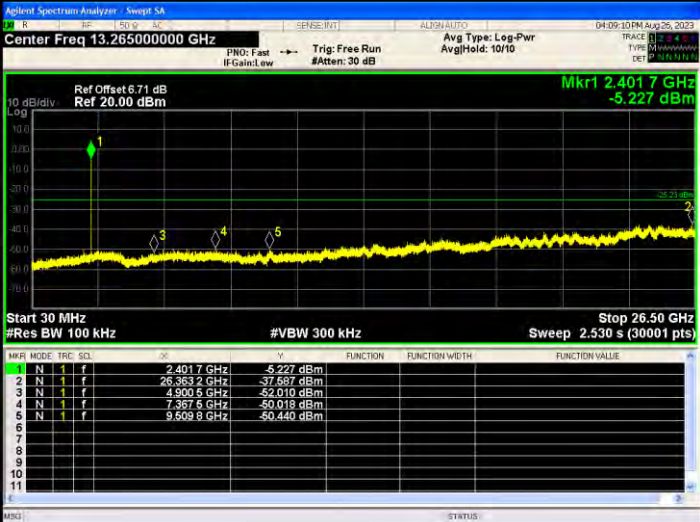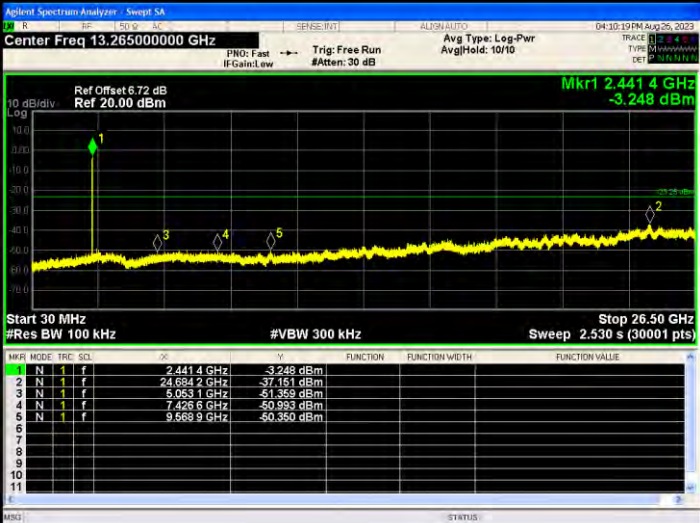


<p><math>\pi/4</math>DQPSK /LCH</p>	 <table border="1" data-bbox="592 548 1294 705"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4017 GHz</td><td>-5.227 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.3632 GHz</td><td>-37.687 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9005 GHz</td><td>-50.010 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.9975 GHz</td><td>-50.019 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6098 GHz</td><td>-50.440 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-5.227 dBm				2	N	1	f	26.3632 GHz	-37.687 dBm				3	N	1	f	4.9005 GHz	-50.010 dBm				4	N	1	f	7.9975 GHz	-50.019 dBm				5	N	1	f	9.6098 GHz	-50.440 dBm				6									7									8									9									10									11								
MNR	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4017 GHz	-5.227 dBm																																																																																																								
2	N	1	f	26.3632 GHz	-37.687 dBm																																																																																																								
3	N	1	f	4.9005 GHz	-50.010 dBm																																																																																																								
4	N	1	f	7.9975 GHz	-50.019 dBm																																																																																																								
5	N	1	f	9.6098 GHz	-50.440 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p><math>\pi/4</math>DQPSK/MCH</p>	 <table border="1" data-bbox="592 1086 1294 1243"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4414 GHz</td><td>-3.248 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6842 GHz</td><td>-37.151 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0651 GHz</td><td>-51.359 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4265 GHz</td><td>-50.993 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9689 GHz</td><td>-50.350 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-3.248 dBm				2	N	1	f	24.6842 GHz	-37.151 dBm				3	N	1	f	5.0651 GHz	-51.359 dBm				4	N	1	f	7.4265 GHz	-50.993 dBm				5	N	1	f	9.9689 GHz	-50.350 dBm				6									7									8									9									10									11								
MNR	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4414 GHz	-3.248 dBm																																																																																																								
2	N	1	f	24.6842 GHz	-37.151 dBm																																																																																																								
3	N	1	f	5.0651 GHz	-51.359 dBm																																																																																																								
4	N	1	f	7.4265 GHz	-50.993 dBm																																																																																																								
5	N	1	f	9.9689 GHz	-50.350 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p><math>\pi/4</math>DQPSK/HCH</p>	 <table border="1" data-bbox="592 1601 1294 1758"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4802 GHz</td><td>-4.264 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.3721 GHz</td><td>-37.460 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9675 GHz</td><td>-50.810 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4442 GHz</td><td>-50.635 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.7445 GHz</td><td>-51.467 dBm</td><td></td><td></td><td></td></tr> <tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-4.264 dBm				2	N	1	f	26.3721 GHz	-37.460 dBm				3	N	1	f	4.9675 GHz	-50.810 dBm				4	N	1	f	7.4442 GHz	-50.635 dBm				5	N	1	f	9.7445 GHz	-51.467 dBm				6									7									8									9									10									11								
MNR	MODE	TRF	SQL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4802 GHz	-4.264 dBm																																																																																																								
2	N	1	f	26.3721 GHz	-37.460 dBm																																																																																																								
3	N	1	f	4.9675 GHz	-50.810 dBm																																																																																																								
4	N	1	f	7.4442 GHz	-50.635 dBm																																																																																																								
5	N	1	f	9.7445 GHz	-51.467 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

Left ear:

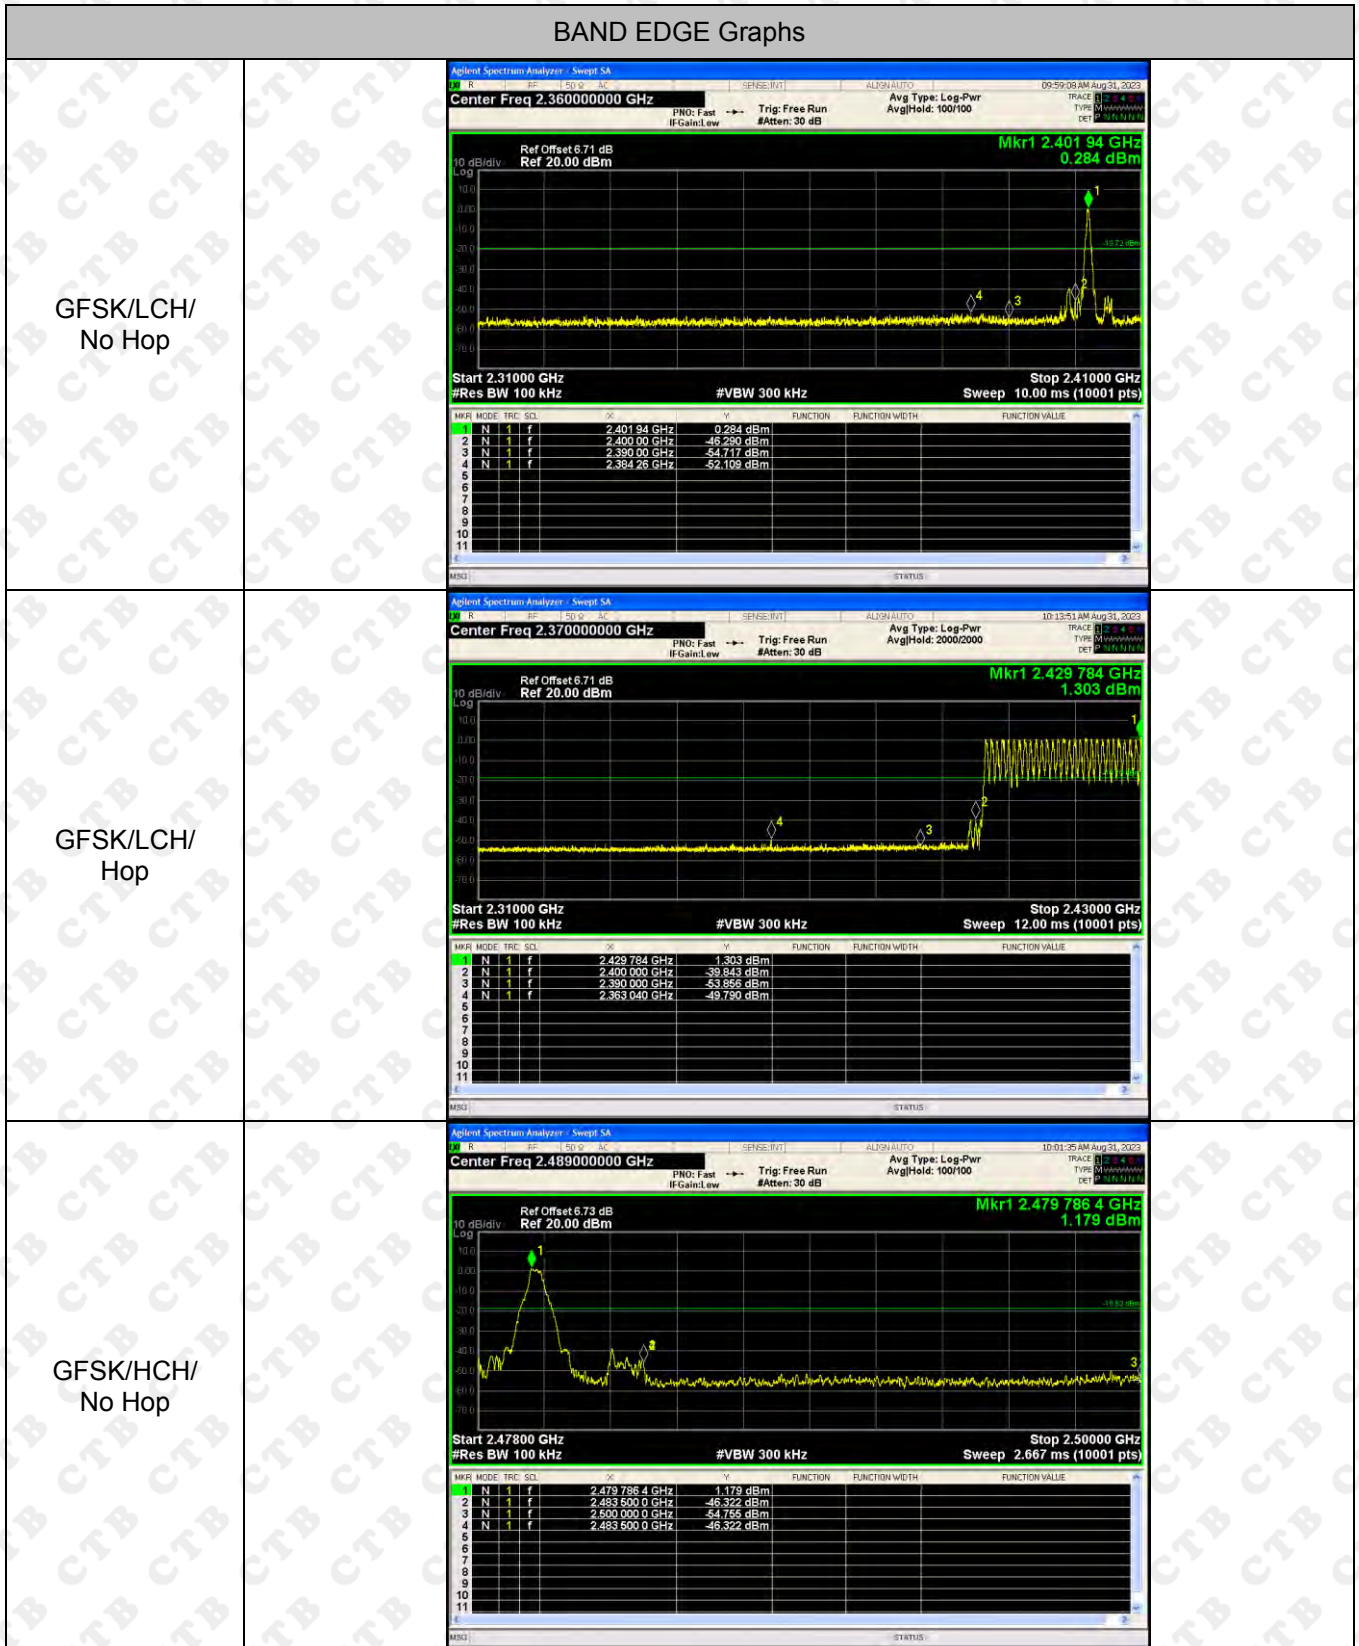




<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.44279375 GHz 1.936 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.44279375 GHz</td> <td></td> <td>1.936</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>2.48350000 GHz</td> <td></td> <td>-47.713</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>2.60000000 GHz</td> <td></td> <td>-54.109</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>2.48350000 GHz</td> <td></td> <td>-47.713</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.44279375 GHz		1.936				2	N	2.48350000 GHz		-47.713				3	N	2.60000000 GHz		-54.109				4	N	2.48350000 GHz		-47.713			
MKR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	2.44279375 GHz		1.936																																					
2	N	2.48350000 GHz		-47.713																																					
3	N	2.60000000 GHz		-54.109																																					
4	N	2.48350000 GHz		-47.713																																					
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40210 GHz -0.148 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.40210 GHz</td> <td></td> <td>-0.148</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>2.40000 GHz</td> <td></td> <td>-50.691</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>2.39000 GHz</td> <td></td> <td>-55.188</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>2.37099 GHz</td> <td></td> <td>-50.046</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.40210 GHz		-0.148				2	N	2.40000 GHz		-50.691				3	N	2.39000 GHz		-55.188				4	N	2.37099 GHz		-50.046			
MKR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	2.40210 GHz		-0.148																																					
2	N	2.40000 GHz		-50.691																																					
3	N	2.39000 GHz		-55.188																																					
4	N	2.37099 GHz		-50.046																																					
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.425798 GHz 0.959 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>2.425798 GHz</td> <td></td> <td>0.959</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>2.40000 GHz</td> <td></td> <td>-43.813</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>2.39000 GHz</td> <td></td> <td>-52.915</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>2.384124 GHz</td> <td></td> <td>-50.658</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.425798 GHz		0.959				2	N	2.40000 GHz		-43.813				3	N	2.39000 GHz		-52.915				4	N	2.384124 GHz		-50.658			
MKR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																		
1	N	2.425798 GHz		0.959																																					
2	N	2.40000 GHz		-43.813																																					
3	N	2.39000 GHz		-52.915																																					
4	N	2.384124 GHz		-50.658																																					

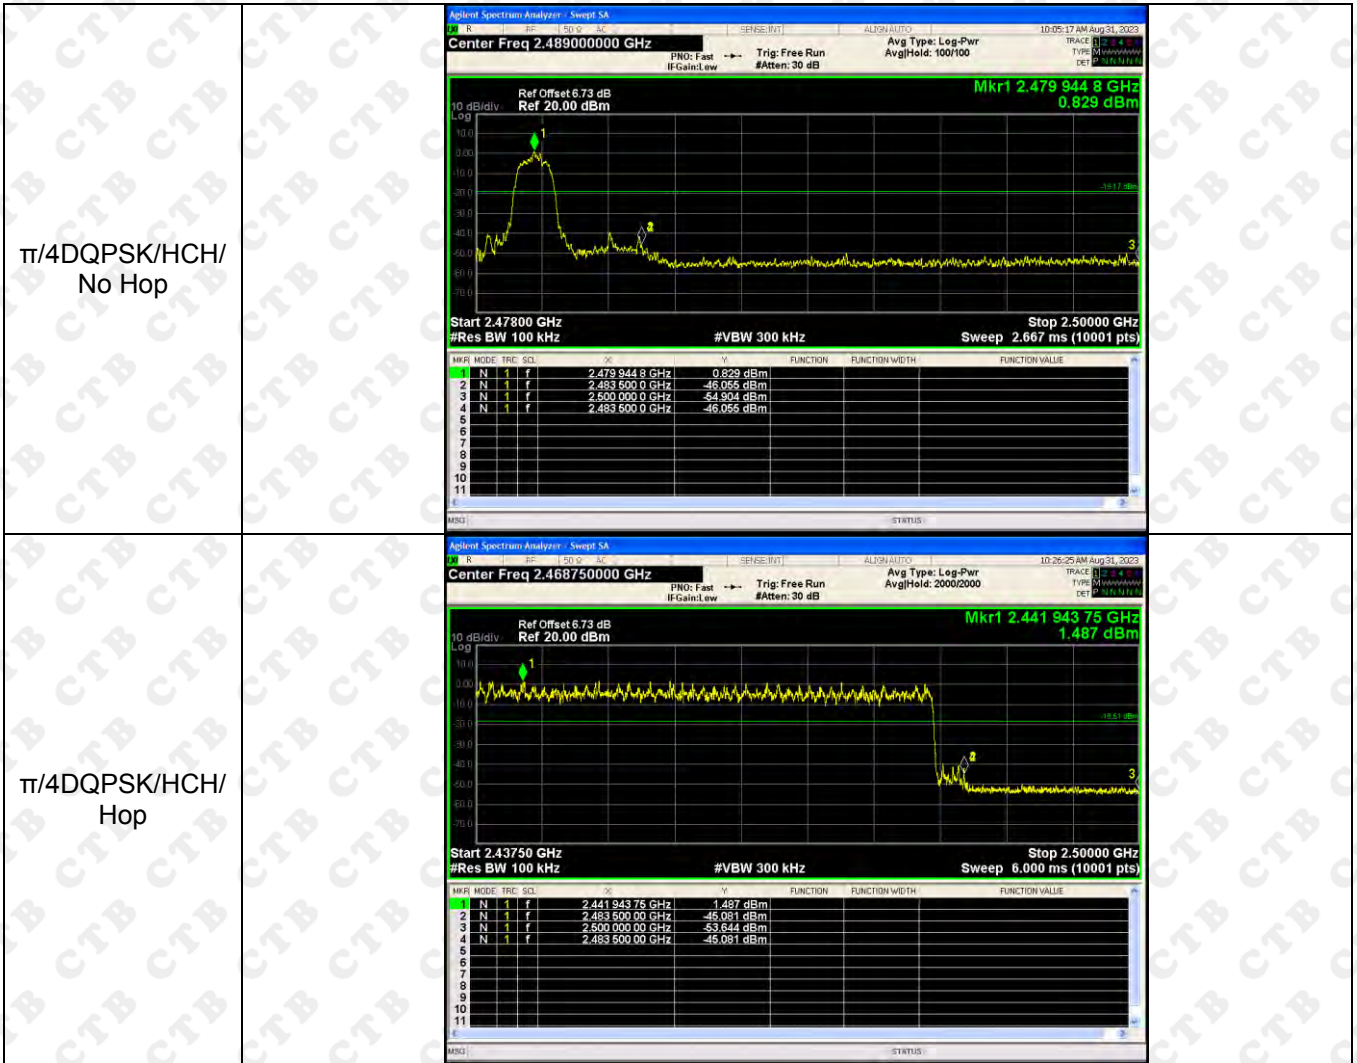




## RF Conducted Spurious Emissions Graphs


GFSK/LCH

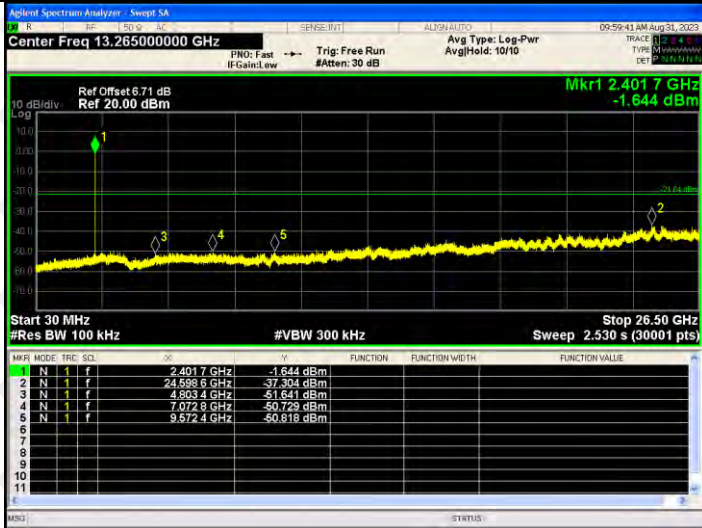

GFSK/MCH

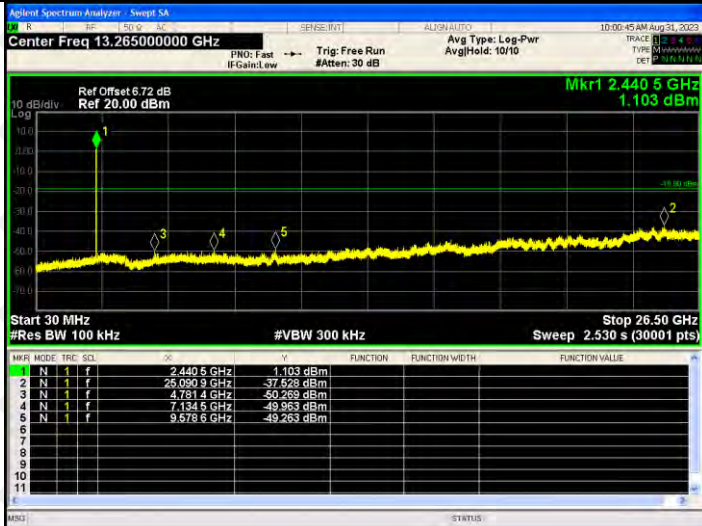

GFSK/HCH

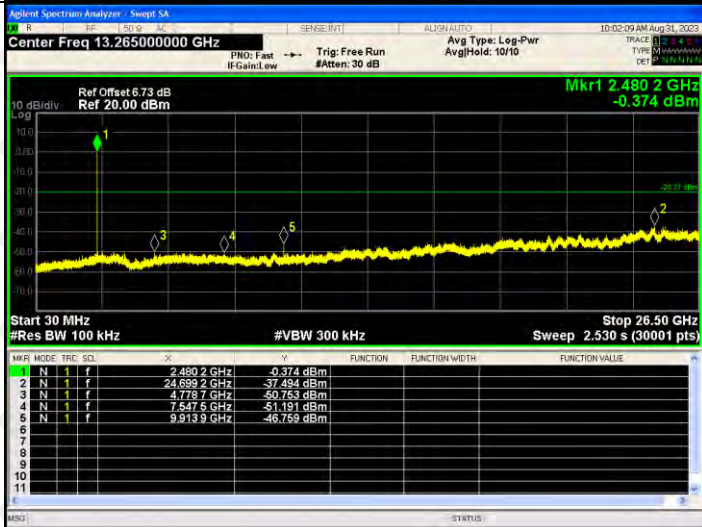


<p><math>\pi/4</math>DQPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>DB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td>2.4017 GHz</td><td></td><td></td><td>-3.812 dBm</td></tr> <tr><td>2</td><td>N</td><td>f</td><td>24.6489 GHz</td><td></td><td></td><td>-37.849 dBm</td></tr> <tr><td>3</td><td>N</td><td>f</td><td>4.8009 GHz</td><td></td><td></td><td>-43.810 dBm</td></tr> <tr><td>4</td><td>N</td><td>f</td><td>7.0153 GHz</td><td></td><td></td><td>-50.156 dBm</td></tr> <tr><td>5</td><td>N</td><td>f</td><td>9.6016 GHz</td><td></td><td></td><td>-49.705 dBm</td></tr> </tbody> </table>	MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	2.4017 GHz			-3.812 dBm	2	N	f	24.6489 GHz			-37.849 dBm	3	N	f	4.8009 GHz			-43.810 dBm	4	N	f	7.0153 GHz			-50.156 dBm	5	N	f	9.6016 GHz			-49.705 dBm
MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	f	2.4017 GHz			-3.812 dBm																																					
2	N	f	24.6489 GHz			-37.849 dBm																																					
3	N	f	4.8009 GHz			-43.810 dBm																																					
4	N	f	7.0153 GHz			-50.156 dBm																																					
5	N	f	9.6016 GHz			-49.705 dBm																																					
<p><math>\pi/4</math>DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>DB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td>2.4414 GHz</td><td></td><td></td><td>-2.625 dBm</td></tr> <tr><td>2</td><td>N</td><td>f</td><td>24.6268 GHz</td><td></td><td></td><td>-36.735 dBm</td></tr> <tr><td>3</td><td>N</td><td>f</td><td>4.8753 GHz</td><td></td><td></td><td>-51.353 dBm</td></tr> <tr><td>4</td><td>N</td><td>f</td><td>7.4894 GHz</td><td></td><td></td><td>-50.653 dBm</td></tr> <tr><td>5</td><td>N</td><td>f</td><td>9.7577 GHz</td><td></td><td></td><td>-48.059 dBm</td></tr> </tbody> </table>	MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	2.4414 GHz			-2.625 dBm	2	N	f	24.6268 GHz			-36.735 dBm	3	N	f	4.8753 GHz			-51.353 dBm	4	N	f	7.4894 GHz			-50.653 dBm	5	N	f	9.7577 GHz			-48.059 dBm
MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	f	2.4414 GHz			-2.625 dBm																																					
2	N	f	24.6268 GHz			-36.735 dBm																																					
3	N	f	4.8753 GHz			-51.353 dBm																																					
4	N	f	7.4894 GHz			-50.653 dBm																																					
5	N	f	9.7577 GHz			-48.059 dBm																																					
<p><math>\pi/4</math>DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>DB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>f</td><td>2.4802 GHz</td><td></td><td></td><td>-2.715 dBm</td></tr> <tr><td>2</td><td>N</td><td>f</td><td>24.6480 GHz</td><td></td><td></td><td>-37.490 dBm</td></tr> <tr><td>3</td><td>N</td><td>f</td><td>4.9559 GHz</td><td></td><td></td><td>-51.654 dBm</td></tr> <tr><td>4</td><td>N</td><td>f</td><td>7.4285 GHz</td><td></td><td></td><td>-50.558 dBm</td></tr> <tr><td>5</td><td>N</td><td>f</td><td>9.9139 GHz</td><td></td><td></td><td>-45.786 dBm</td></tr> </tbody> </table>	MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	f	2.4802 GHz			-2.715 dBm	2	N	f	24.6480 GHz			-37.490 dBm	3	N	f	4.9559 GHz			-51.654 dBm	4	N	f	7.4285 GHz			-50.558 dBm	5	N	f	9.9139 GHz			-45.786 dBm
MNR	MODE	FREQ	DB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																					
1	N	f	2.4802 GHz			-2.715 dBm																																					
2	N	f	24.6480 GHz			-37.490 dBm																																					
3	N	f	4.9559 GHz			-51.654 dBm																																					
4	N	f	7.4285 GHz			-50.558 dBm																																					
5	N	f	9.9139 GHz			-45.786 dBm																																					



## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

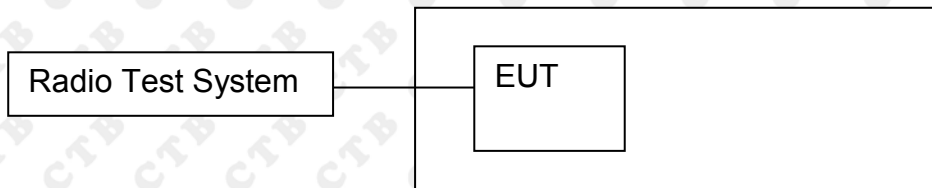

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

## 9.4 Test Result

Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	-1.09	20.97	PASS
	MCH	0.415	20.97	PASS
	HCH	0.046	20.97	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	-0.275	20.97	PASS
	MCH	1.225	20.97	PASS
	HCH	0.856	20.97	PASS

Left ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	0.598	20.97	PASS
	MCH	1.907	20.97	PASS
	HCH	1.192	20.97	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	1.355	20.97	PASS
	MCH	2.629	20.97	PASS
	HCH	1.895	20.97	PASS




Right ear:  
Test Graph:




Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40172 GHz -1.090 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44077 GHz 0.415 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47972 GHz 0.046 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40188 GHz -0.275 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44076 GHz 1.225 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47985 GHz 0.856 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

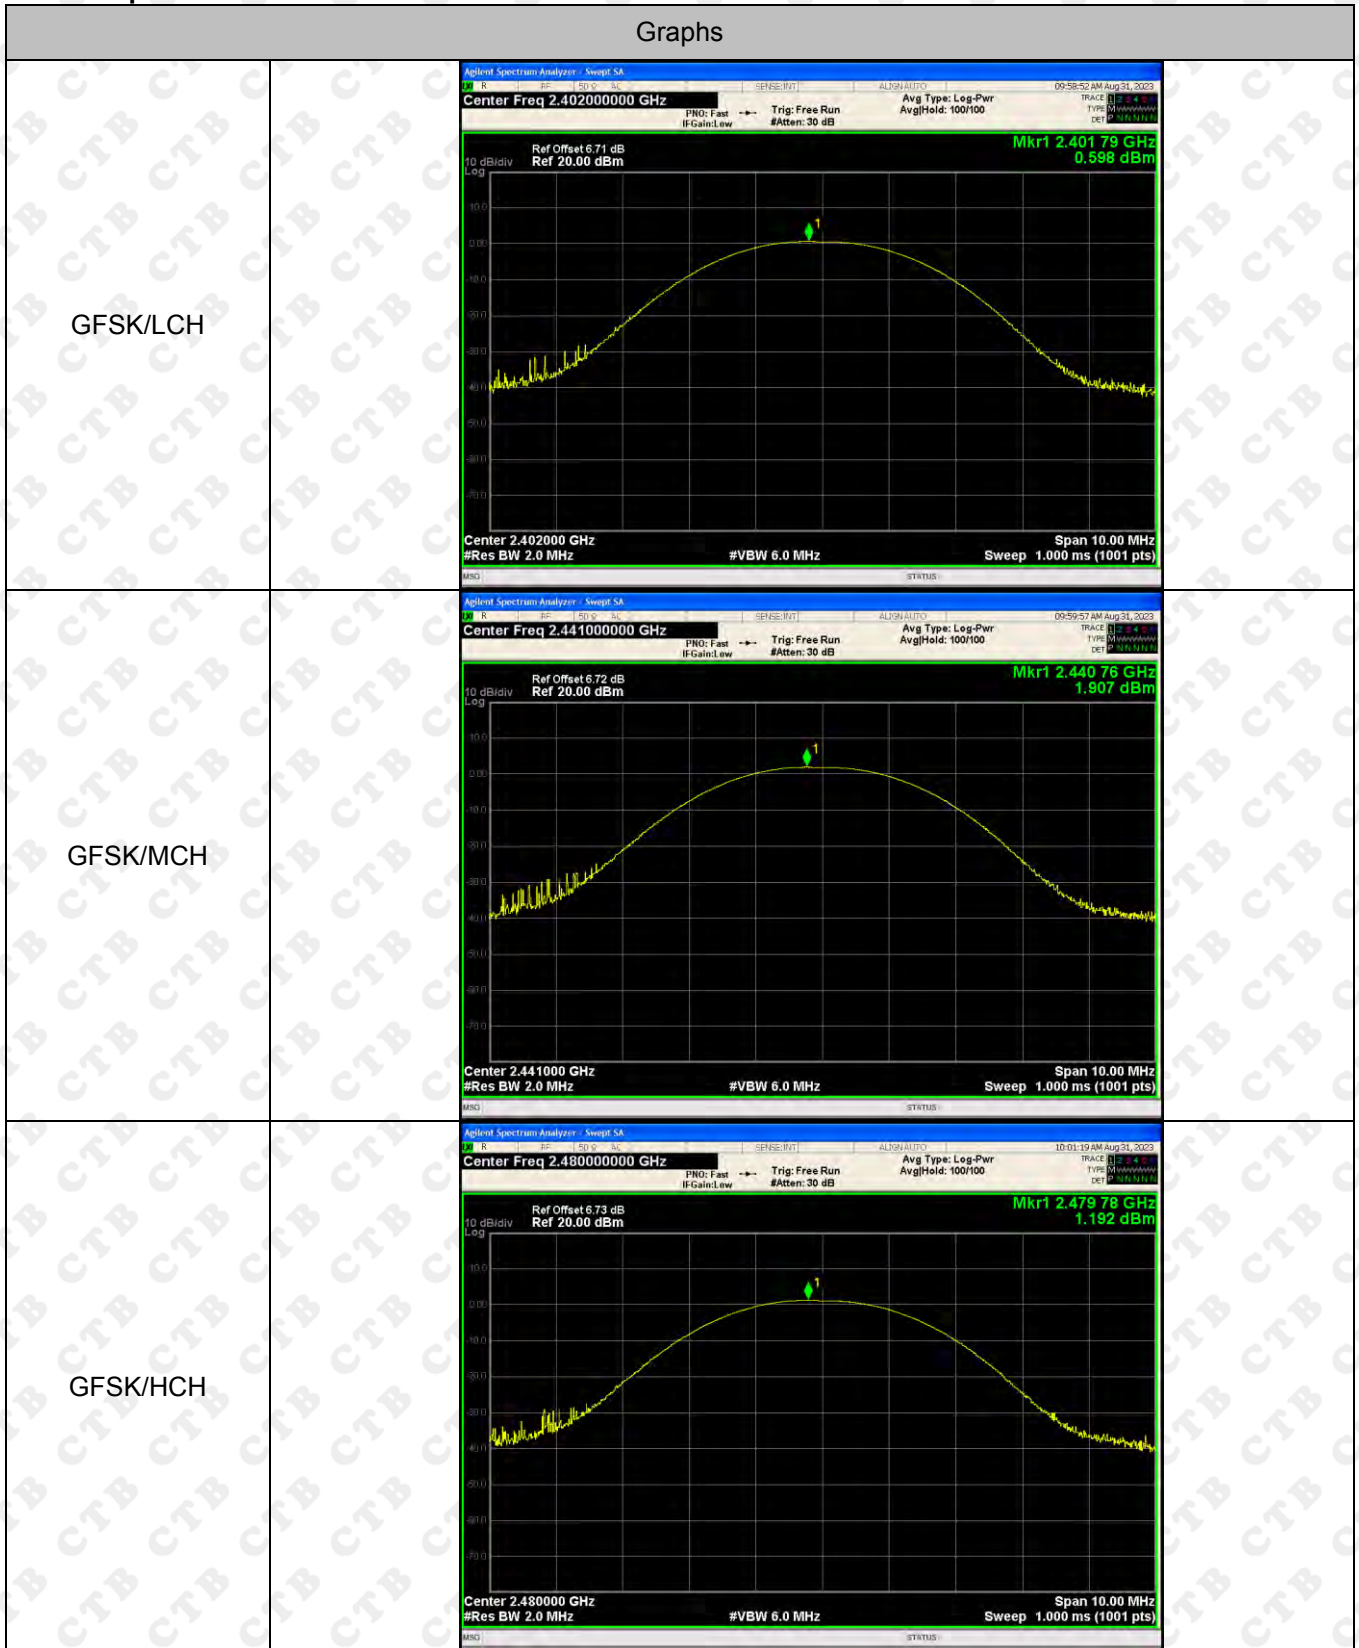

Left ear:  
Test Graph:




<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	



### 10. 20DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

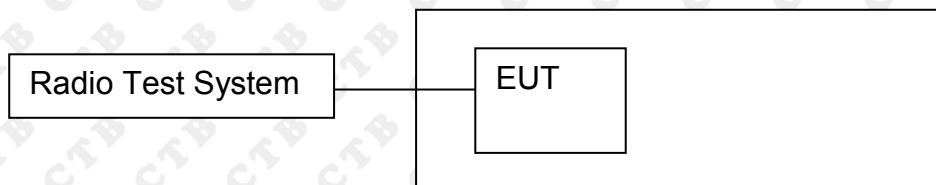

#### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

#### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 10.4 Test Result

Right ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.863	<b>PASS</b>
	Mid channel	0.87	<b>PASS</b>
	High channel	0.856	<b>PASS</b>
π/4DQPSK	Low channel	1.279	<b>PASS</b>
	Mid channel	1.278	<b>PASS</b>
	High channel	1.274	<b>PASS</b>

Left ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.875	<b>PASS</b>
	Mid channel	0.858	<b>PASS</b>
	High channel	0.878	<b>PASS</b>
π/4DQPSK	Low channel	1.268	<b>PASS</b>
	Mid channel	1.277	<b>PASS</b>
	High channel	1.275	<b>PASS</b>

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Right ear:  
Test Graph:

<p>GFSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 6.71 dB Ref 26.71 dBm Mkr3 2.402366 GHz -23.037 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 840.38 kHz Total Power 4.90 dBm Transmit Freq Error -65.451 kHz OBW Power 99.00 % x dB Bandwidth 863.2 kHz x dB -20.00 dB</p>	
<p>GFSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Mkr3 2.441371 GHz -22.228 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 822.34 kHz Total Power 6.76 dBm Transmit Freq Error -63.746 kHz OBW Power 99.00 % x dB Bandwidth 870.1 kHz x dB -20.00 dB</p>	
<p>GFSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 26.73 dBm Mkr3 2.48036 GHz -24.125 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 817.90 kHz Total Power 6.39 dBm Transmit Freq Error -68.363 kHz OBW Power 99.00 % x dB Bandwidth 856.2 kHz x dB -20.00 dB</p>	



<p><math>\pi/4</math>-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz #IF Gain: 1.0 #Atten: 30 dB Avg Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 6.71 dB Ref: 26.71 dBm Mkr3: 2.402574 GHz -22.318 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.82 dBm</td> </tr> <tr> <td>1.1828 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-65.402 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.279 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	4.82 dBm	1.1828 MHz			Transmit Freq Error	OBW Power	99.00 %	-65.402 kHz	x dB	-20.00 dB	x dB Bandwidth			1.279 MHz		
Occupied Bandwidth	Total Power	4.82 dBm																	
1.1828 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-65.402 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.279 MHz																			
<p><math>\pi/4</math>-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz #IF Gain: 1.0 #Atten: 30 dB Avg Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.441575 GHz -20.800 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.35 dBm</td> </tr> <tr> <td>1.1820 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-64.257 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.278 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.35 dBm	1.1820 MHz			Transmit Freq Error	OBW Power	99.00 %	-64.257 kHz	x dB	-20.00 dB	x dB Bandwidth			1.278 MHz		
Occupied Bandwidth	Total Power	6.35 dBm																	
1.1820 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-64.257 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.278 MHz																			
<p><math>\pi/4</math>-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz #IF Gain: 1.0 #Atten: 30 dB Avg Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 6.73 dB Ref: 26.73 dBm Mkr3: 2.480574 GHz -21.379 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.28 dBm</td> </tr> <tr> <td>1.1741 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-63.271 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.274 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	6.28 dBm	1.1741 MHz			Transmit Freq Error	OBW Power	99.00 %	-63.271 kHz	x dB	-20.00 dB	x dB Bandwidth			1.274 MHz		
Occupied Bandwidth	Total Power	6.28 dBm																	
1.1741 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-63.271 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.274 MHz																			



Left ear:  
Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 816.87 kHz Total Power 7.14 dBm Transmit Freq Error -68.908 kHz OBW Power 99.00 % x dB Bandwidth 875.1 kHz x dB -20.00 dB Mkr3 2.402369 GHz -21.424 dBm</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 822.85 kHz Total Power 8.15 dBm Transmit Freq Error -72.047 kHz OBW Power 99.00 % x dB Bandwidth 858.4 kHz x dB -20.00 dB Mkr3 2.441357 GHz -22.071 dBm</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 822.11 kHz Total Power 7.48 dBm Transmit Freq Error -67.476 kHz OBW Power 99.00 % x dB Bandwidth 878.1 kHz x dB -20.00 dB Mkr3 2.480372 GHz -21.136 dBm</p>

$\pi/4$ -DQPSK  
Low channel



$\pi/4$ -DQPSK  
Mid channel




$\pi/4$ -DQPSK  
High channel





## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

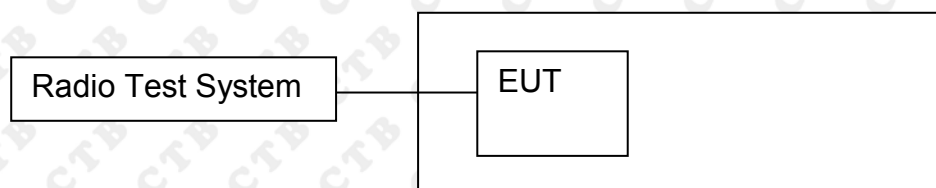

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result

Right ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.575	PASS
GFSK	MCH	0.994	0.580	PASS
GFSK	HCH	0.996	0.571	PASS
$\pi/4$ DQPSK	LCH	1.006	0.853	PASS
$\pi/4$ DQPSK	MCH	1.002	0.852	PASS
$\pi/4$ DQPSK	HCH	1.004	0.849	PASS

Left ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.583	PASS
GFSK	MCH	1.000	0.572	PASS
GFSK	HCH	1.008	0.585	PASS
$\pi/4$ DQPSK	LCH	1.004	0.845	PASS
$\pi/4$ DQPSK	MCH	0.996	0.851	PASS
$\pi/4$ DQPSK	HCH	0.998	0.850	PASS



Right ear:  
Test Graph



<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.006000000 MHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.006 MHz -0.078 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.006 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.078 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401934 GHz</td> <td></td> <td></td> <td>-4.452 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.006 MHz	( $\Delta$ )		-0.078 dB	2	F	1	f		2.401934 GHz			-4.452 dBm
MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.006 MHz	( $\Delta$ )		-0.078 dB																				
2	F	1	f		2.401934 GHz			-4.452 dBm																				
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.002000000 MHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.002 MHz 0.080 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.002 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.080 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440932 GHz</td> <td></td> <td></td> <td>-3.008 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		0.080 dB	2	F	1	f		2.440932 GHz			-3.008 dBm
MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		0.080 dB																				
2	F	1	f		2.440932 GHz			-3.008 dBm																				
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 994.000000 kHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 994 kHz 0.002 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>994 kHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.002 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478936 GHz</td> <td></td> <td></td> <td>-3.380 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	994 kHz	( $\Delta$ )		0.002 dB	2	F	1	f		2.478936 GHz			-3.380 dBm
MKR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	994 kHz	( $\Delta$ )		0.002 dB																				
2	F	1	f		2.478936 GHz			-3.380 dBm																				



Left ear:  
Test Graph






<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.004000000 MHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.004 MHz -0.166 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.004 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.166 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401830 GHz</td> <td></td> <td></td> <td>-6.601 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.004 MHz	( $\Delta$ )		-0.166 dB	2	F	1	f		2.401830 GHz			-6.601 dBm
MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.004 MHz	( $\Delta$ )		-0.166 dB																				
2	F	1	f		2.401830 GHz			-6.601 dBm																				
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 996.000000 kHz</p> <p>Ref Offset 6.72 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 996 kHz 0.018 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>996 kHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.018 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440996 GHz</td> <td></td> <td></td> <td>-5.140 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	996 kHz	( $\Delta$ )		0.018 dB	2	F	1	f		2.440996 GHz			-5.140 dBm
MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	996 kHz	( $\Delta$ )		0.018 dB																				
2	F	1	f		2.440996 GHz			-5.140 dBm																				
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 998.000000 kHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 998 kHz -2.000 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SC1</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>998 kHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-2.000 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478982 GHz</td> <td></td> <td></td> <td>-6.326 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	998 kHz	( $\Delta$ )		-2.000 dB	2	F	1	f		2.478982 GHz			-6.326 dBm
MKR	MODE	TRC	SC1	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	998 kHz	( $\Delta$ )		-2.000 dB																				
2	F	1	f		2.478982 GHz			-6.326 dBm																				

## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

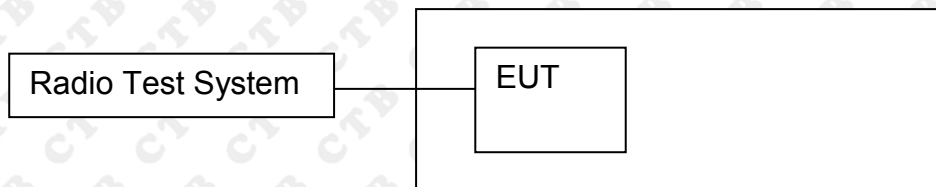

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 12.4 Test Result


Right ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	$\geq 15$	PASS
$\pi/4$ DQPSK	Hop	79	$\geq 15$	PASS

Left ear:


Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	$\geq 15$	PASS
$\pi/4$ DQPSK	Hop	79	$\geq 15$	PASS

Right ear:  
Test Graph

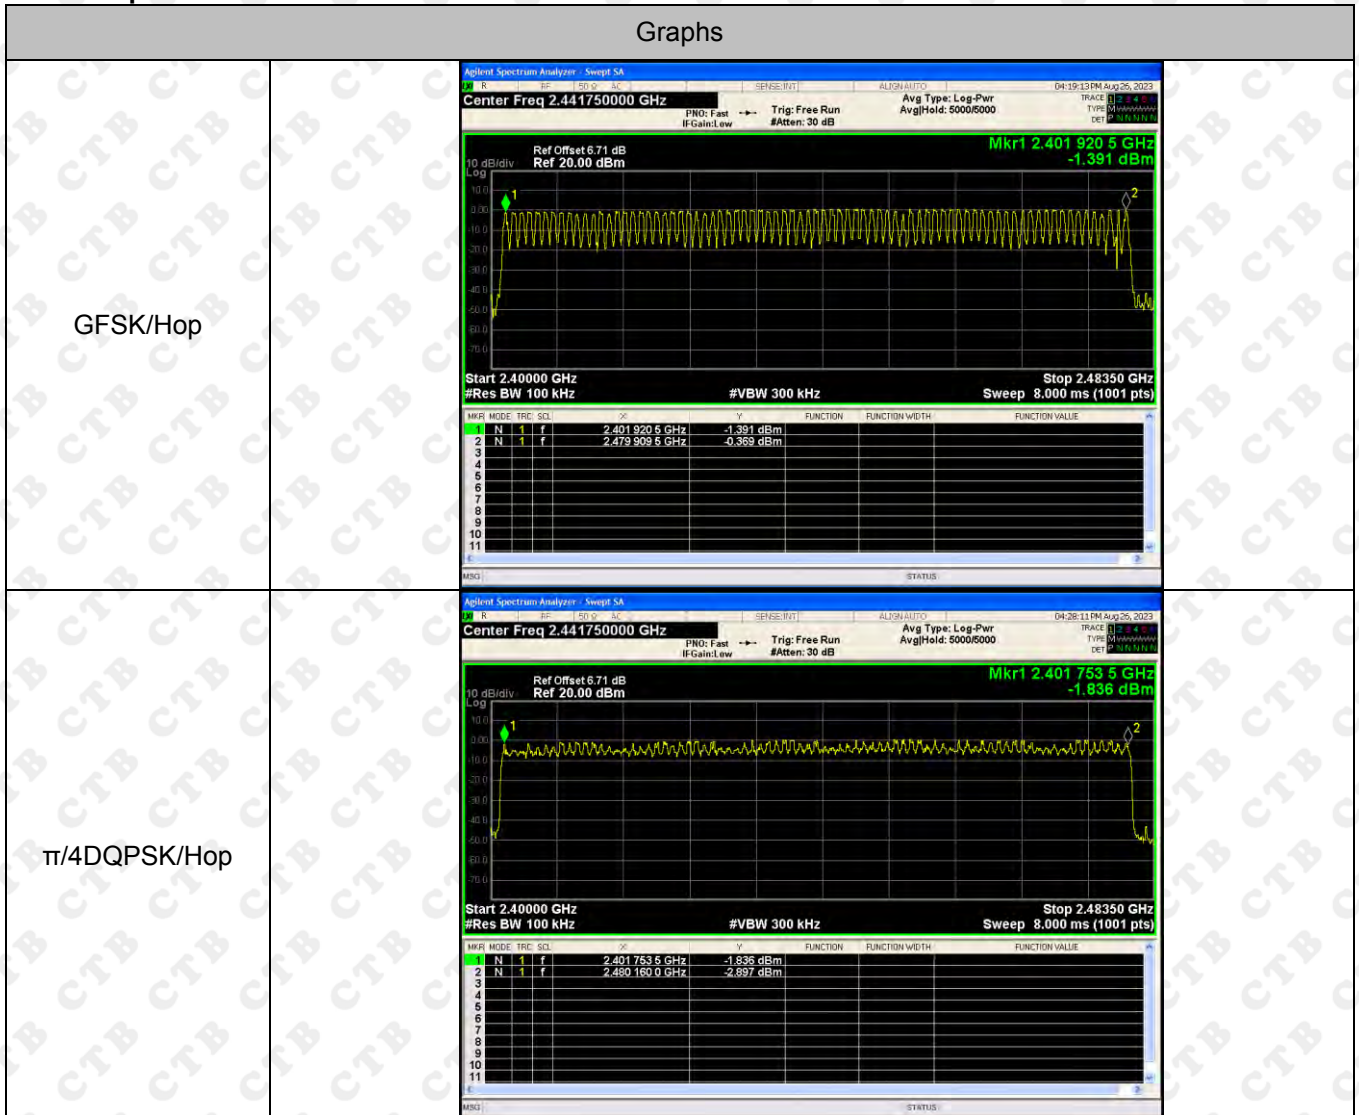




Left ear:  
Test Graph

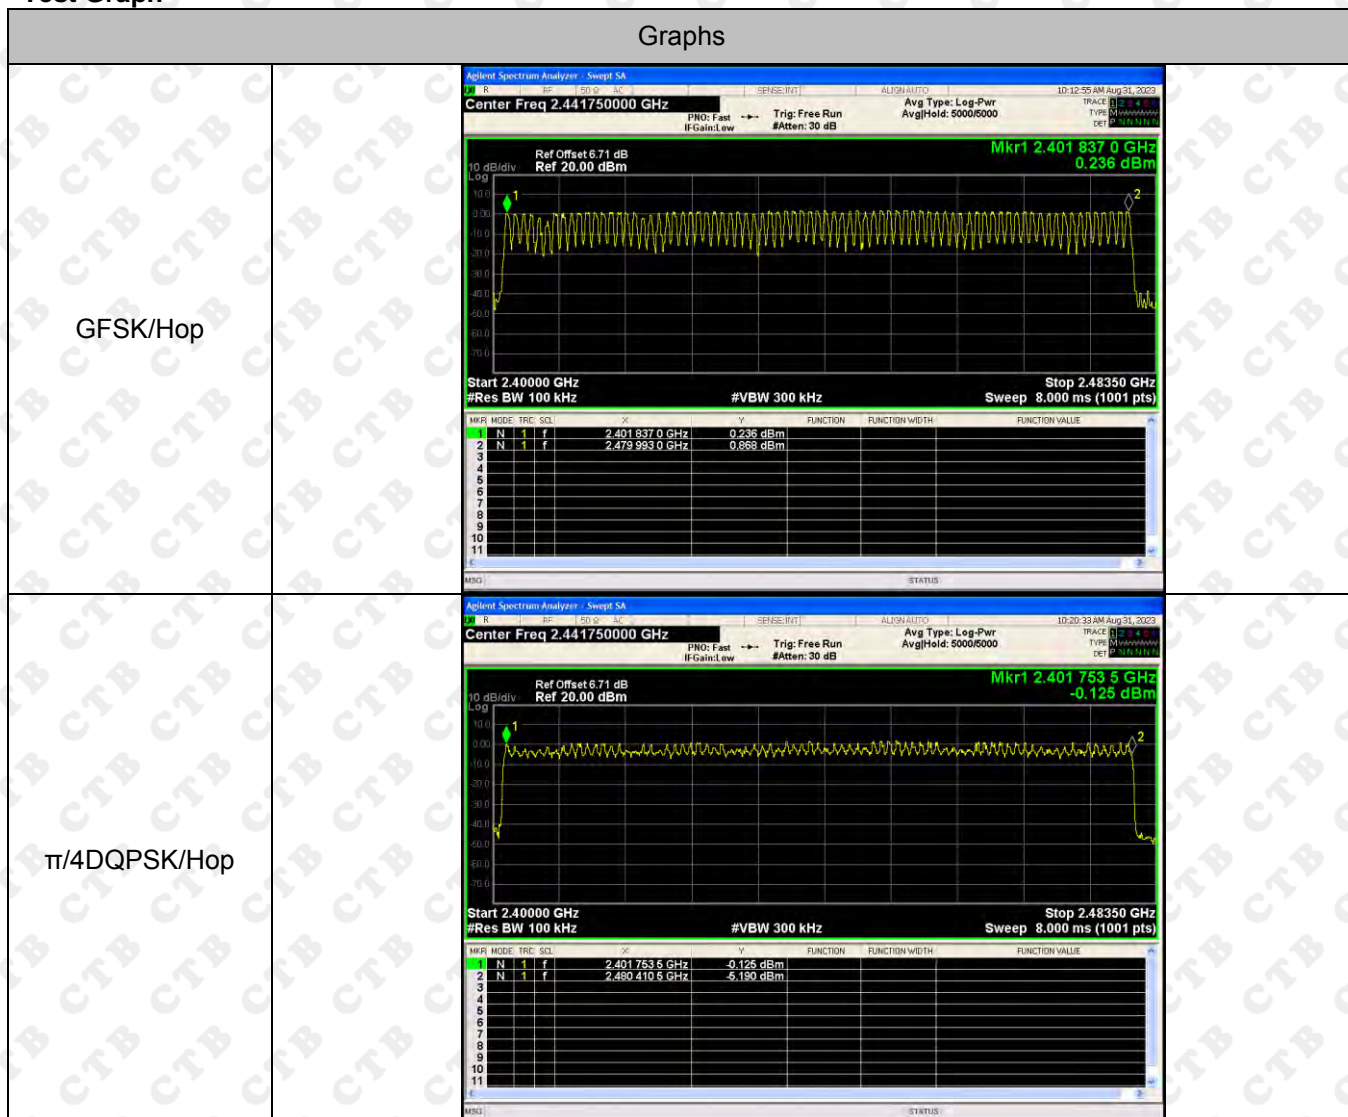

### 13. DWELL TIME

#### 13.1 Block Diagram Of Test Setup

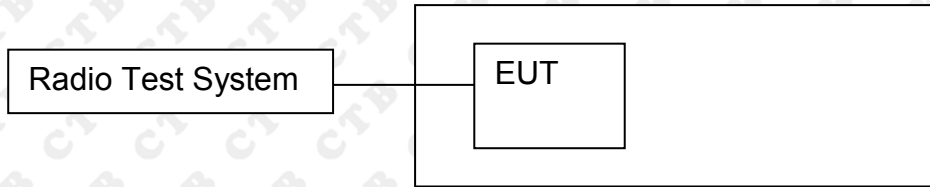

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

## 13.4 Test Result

Right ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.382	122.24	400	PASS
	DH1	MCH	0.382	122.24	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.888	308.053	400	PASS
	DH5	MCH	2.885	307.733	400	PASS
	DH5	HCH	2.887	307.947	400	PASS

Left ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.382	122.24	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.643	262.88	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.887	307.947	400	PASS
	DH5	MCH	2.887	307.947	400	PASS
	DH5	HCH	2.887	307.947	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5:  $1600/79/6*0.4*79*(MkrDelta)/1000$


DH3:  $1600/79/4*0.4*79*(MkrDelta)/1000$

DH1:  $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.



Right ear:  
Test Graph

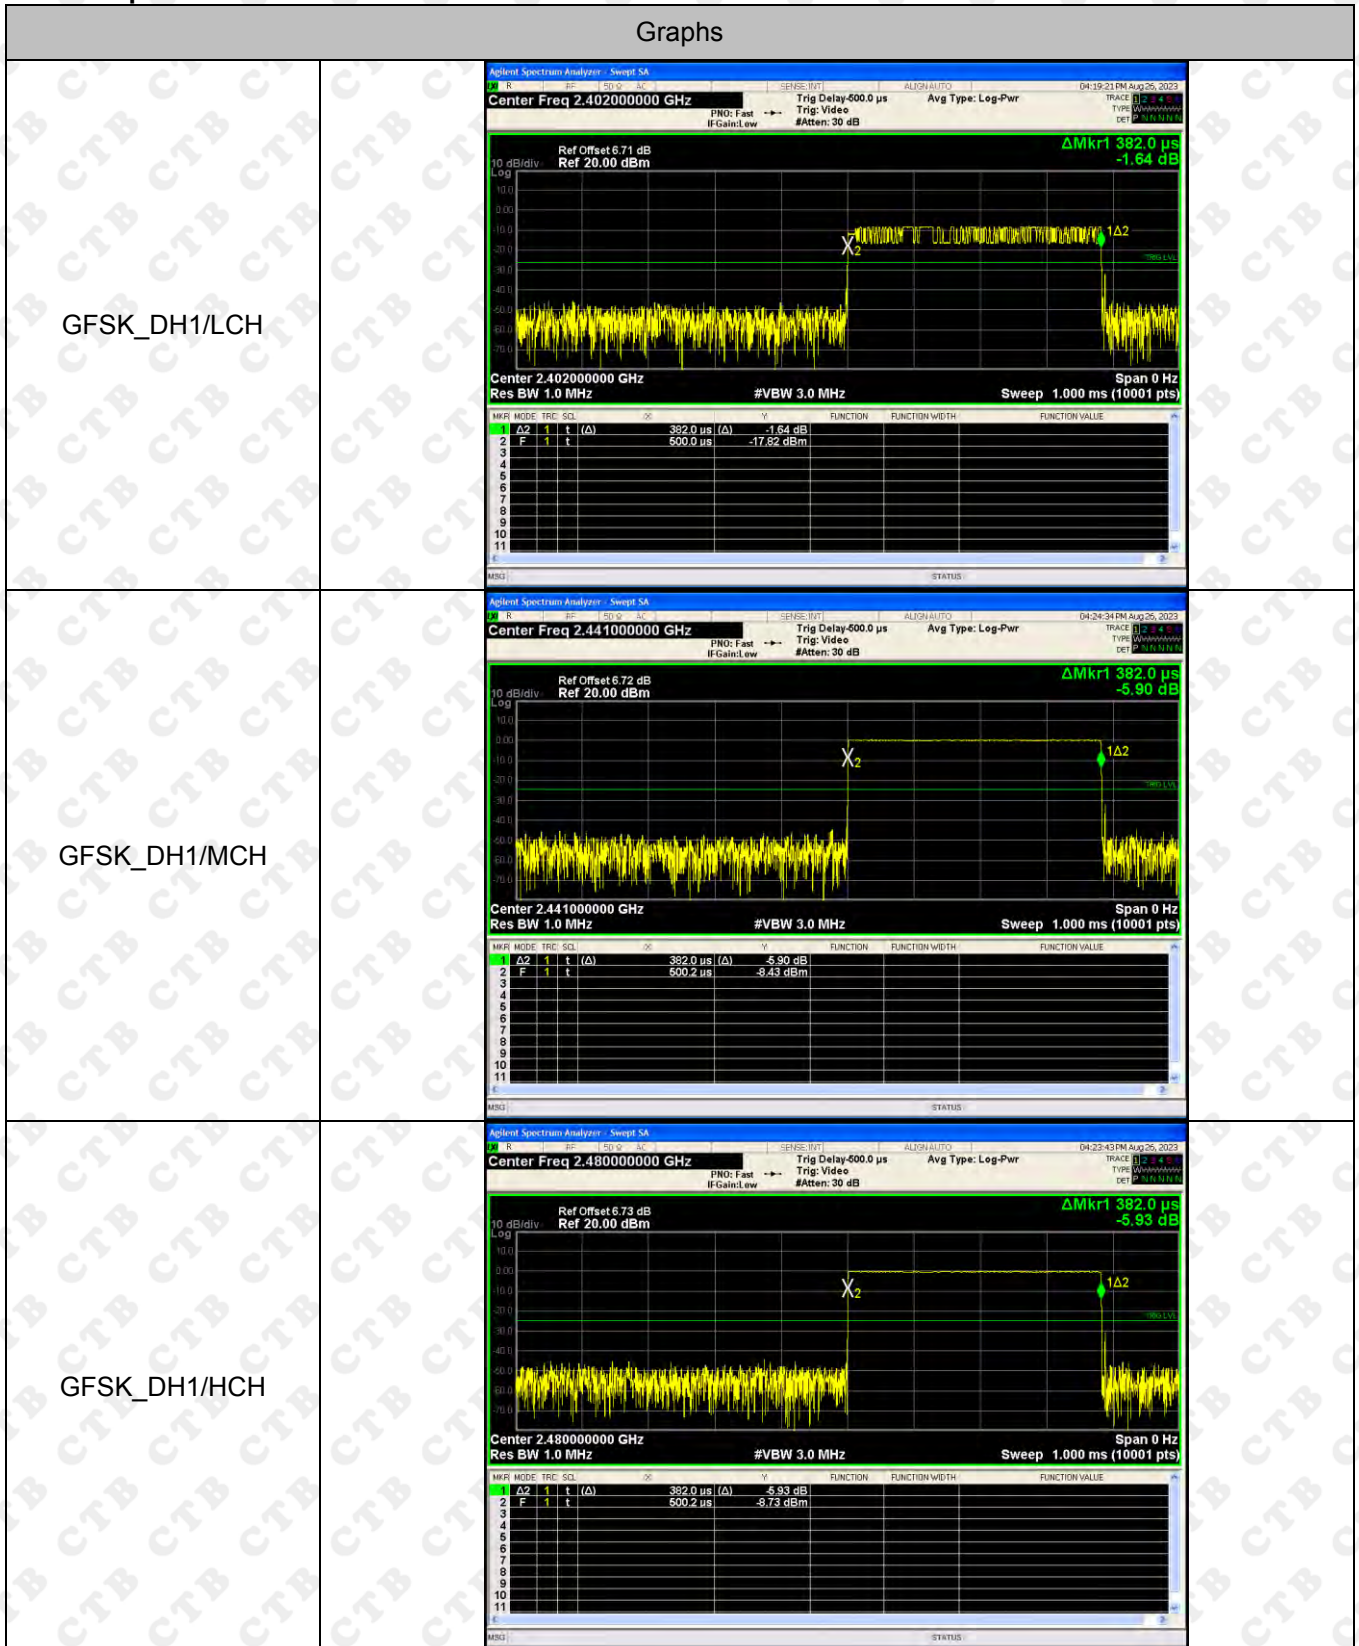


<p>GFSK_DH3/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Delta Mk r1 1.644 ms -6.47 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>QZ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms (A)</td> <td>-6.47 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td>-6.81 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	QZ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms (A)	-6.47 dB			2	F	1	t		500.1 us	-6.81 dBm		
MNR	MODE	TRC	SOL	QZ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms (A)	-6.47 dB																						
2	F	1	t		500.1 us	-6.81 dBm																						
<p>GFSK_DH3/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Delta Mk r1 1.644 ms -2.18 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>QZ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms (A)</td> <td>-2.18 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td>-7.58 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	QZ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms (A)	-2.18 dB			2	F	1	t		500.1 us	-7.58 dBm		
MNR	MODE	TRC	SOL	QZ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms (A)	-2.18 dB																						
2	F	1	t		500.1 us	-7.58 dBm																						
<p>GFSK_DH3/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Delta Mk r1 1.644 ms -6.66 dB Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>QZ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms (A)</td> <td>-6.66 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td>-6.00 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	QZ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms (A)	-6.66 dB			2	F	1	t		500.1 us	-6.00 dBm		
MNR	MODE	TRC	SOL	QZ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms (A)	-6.66 dB																						
2	F	1	t		500.1 us	-6.00 dBm																						




<p>GFSK_DH5/LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Delta Mkri 2.898 ms -16.62 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>Z</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.898 ms</td> <td>(A)</td> <td>-16.62 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-17.71 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	Z	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.898 ms	(A)	-16.62 dB		2	F	1	t		499.6 μs		-17.71 dBm	
MNR	MODE	TRG	SOL	Z	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.898 ms	(A)	-16.62 dB																					
2	F	1	t		499.6 μs		-17.71 dBm																					
<p>GFSK_DH5/MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Delta Mkri 2.895 ms -0.02 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>Z</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.895 ms</td> <td>(A)</td> <td>-0.02 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-13.60 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	Z	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.895 ms	(A)	-0.02 dB		2	F	1	t		499.6 μs		-13.60 dBm	
MNR	MODE	TRG	SOL	Z	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.895 ms	(A)	-0.02 dB																					
2	F	1	t		499.6 μs		-13.60 dBm																					
<p>GFSK_DH5/HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Delta Mkri 2.897 ms -1.67 dB Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>Z</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.897 ms</td> <td>(A)</td> <td>-1.67 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td></td> <td>-5.16 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	Z	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.897 ms	(A)	-1.67 dB		2	F	1	t		500.0 μs		-5.16 dBm	
MNR	MODE	TRG	SOL	Z	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.897 ms	(A)	-1.67 dB																					
2	F	1	t		500.0 μs		-5.16 dBm																					



Left ear:  
Test Graph

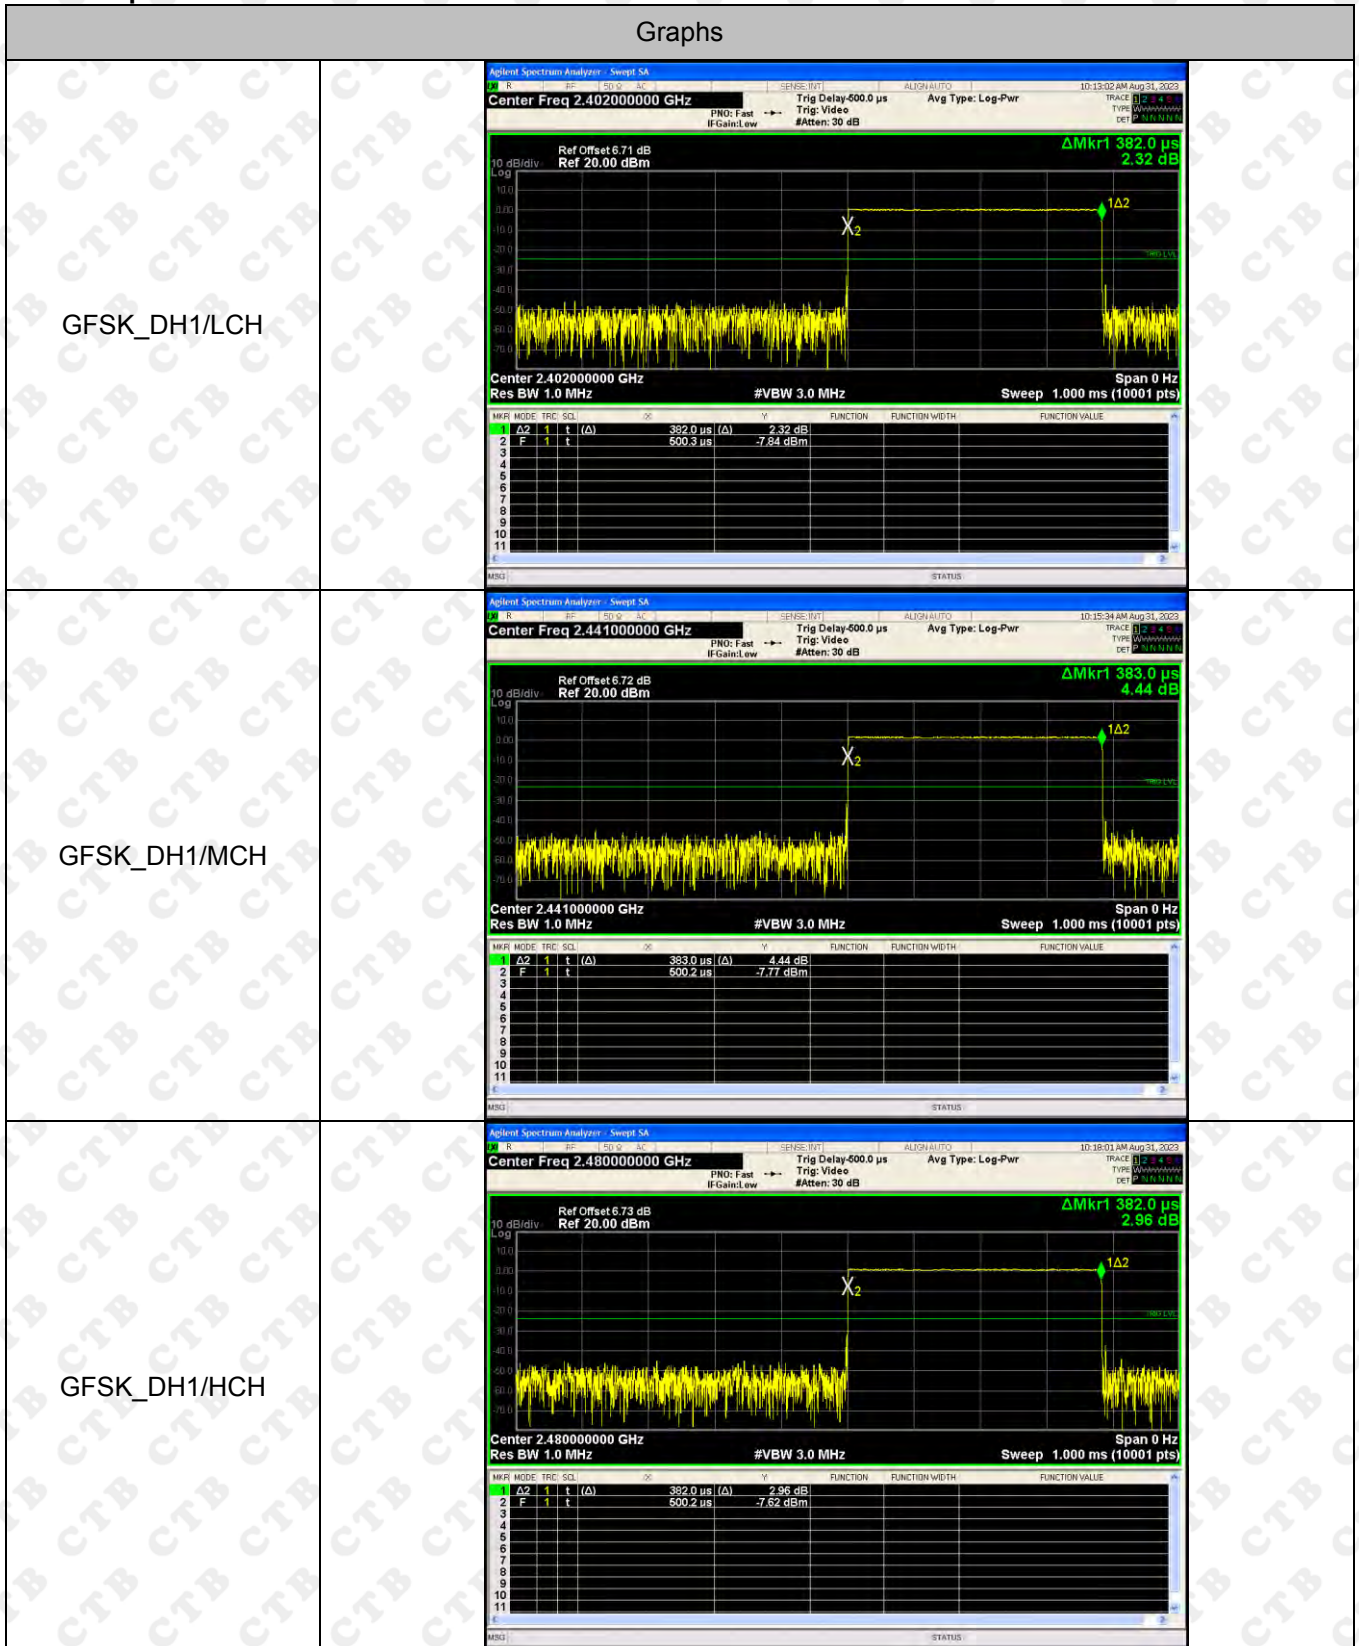
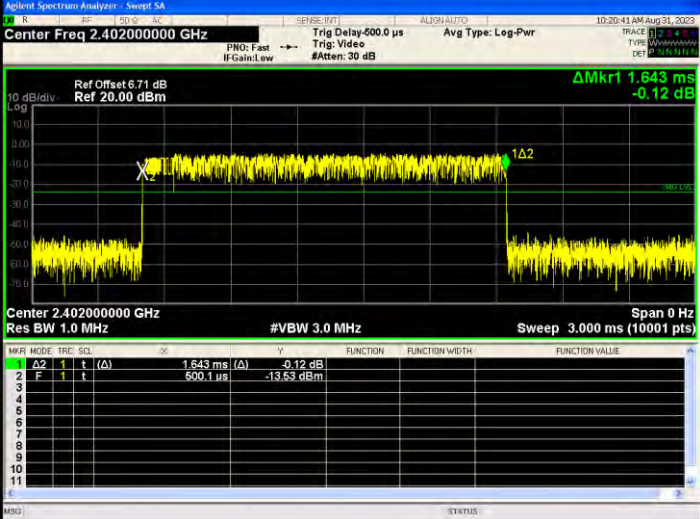
<p>GFSK_DH3/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Delta Mk r1 1.643 ms -0.12 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.643 ms</td> <td>(A)</td> <td>-0.12 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td></td> <td>-13.53 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.643 ms	(A)	-0.12 dB		2	F	1	t		500.1 us		-13.53 dBm	
MNR	MODE	TRG	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.643 ms	(A)	-0.12 dB																					
2	F	1	t		500.1 us		-13.53 dBm																					
<p>GFSK_DH3/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Delta Mk r1 1.644 ms -4.68 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms</td> <td>(A)</td> <td>-4.68 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 us</td> <td></td> <td>-13.38 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms	(A)	-4.68 dB		2	F	1	t		499.8 us		-13.38 dBm	
MNR	MODE	TRG	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms	(A)	-4.68 dB																					
2	F	1	t		499.8 us		-13.38 dBm																					
<p>GFSK_DH3/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Delta Mk r1 1.644 ms -4.82 dB Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms</td> <td>(A)</td> <td>-4.82 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td></td> <td>-13.99 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms	(A)	-4.82 dB		2	F	1	t		500.1 us		-13.99 dBm	
MNR	MODE	TRG	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms	(A)	-4.82 dB																					
2	F	1	t		500.1 us		-13.99 dBm																					



<p>GFSK_DH5/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Delta Mk1 2.897 ms -6.10 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>ZF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.897 ms</td> <td>(A)</td> <td>-6.10 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.0 us</td> <td></td> <td>-6.84 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	ZF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.897 ms	(A)	-6.10 dB		2	F	1	t		499.0 us		-6.84 dBm	
MNR	MODE	TRG	SOL	ZF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.897 ms	(A)	-6.10 dB																					
2	F	1	t		499.0 us		-6.84 dBm																					
<p>GFSK_DH5/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Delta Mk1 2.897 ms -0.95 dB Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>ZF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.897 ms</td> <td>(A)</td> <td>-0.95 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.0 us</td> <td></td> <td>-17.53 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	ZF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.897 ms	(A)	-0.95 dB		2	F	1	t		499.0 us		-17.53 dBm	
MNR	MODE	TRG	SOL	ZF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.897 ms	(A)	-0.95 dB																					
2	F	1	t		499.0 us		-17.53 dBm																					
<p>GFSK_DH5/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Delta Mk1 2.897 ms 1.70 dB Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SOL</th> <th>ZF</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.897 ms</td> <td>(A)</td> <td>1.70 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.0 us</td> <td></td> <td>-18.34 dBm</td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRG	SOL	ZF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.897 ms	(A)	1.70 dB		2	F	1	t		499.0 us		-18.34 dBm	
MNR	MODE	TRG	SOL	ZF	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	2.897 ms	(A)	1.70 dB																					
2	F	1	t		499.0 us		-18.34 dBm																					



### 14. PSEUDORANDOM FREQUENCY


#### 14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


#### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

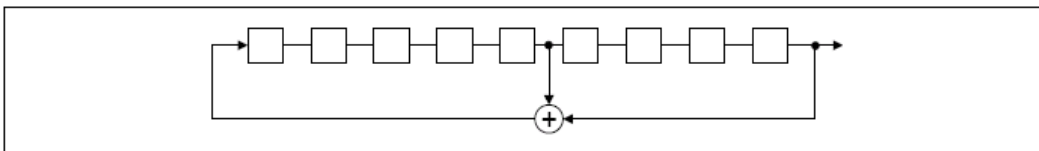

An example of Pseudorandom Frequency Hopping Sequence as follow:

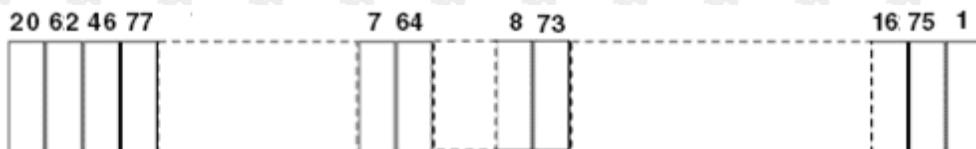

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

**15. ANTENNA REQUIREMENT****15.203 requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**15.247(b) (4) requirement:**

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**EUT Antenna:**


The antenna is Internal antenna. The best case gain of the antenna is 3.19dBi.




## 16. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

Below 1G

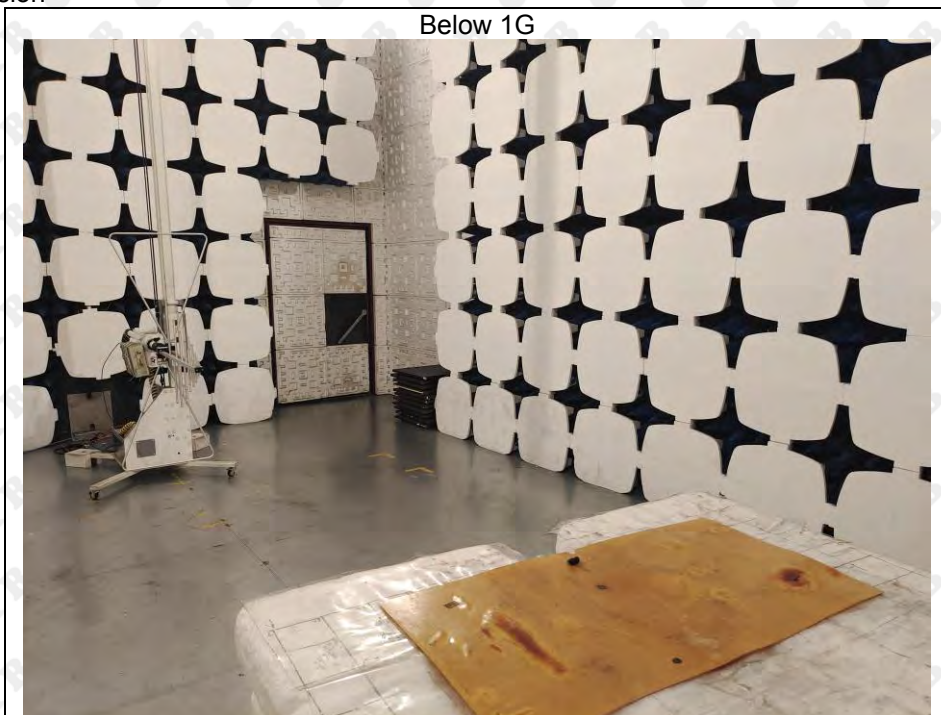

Above 1G

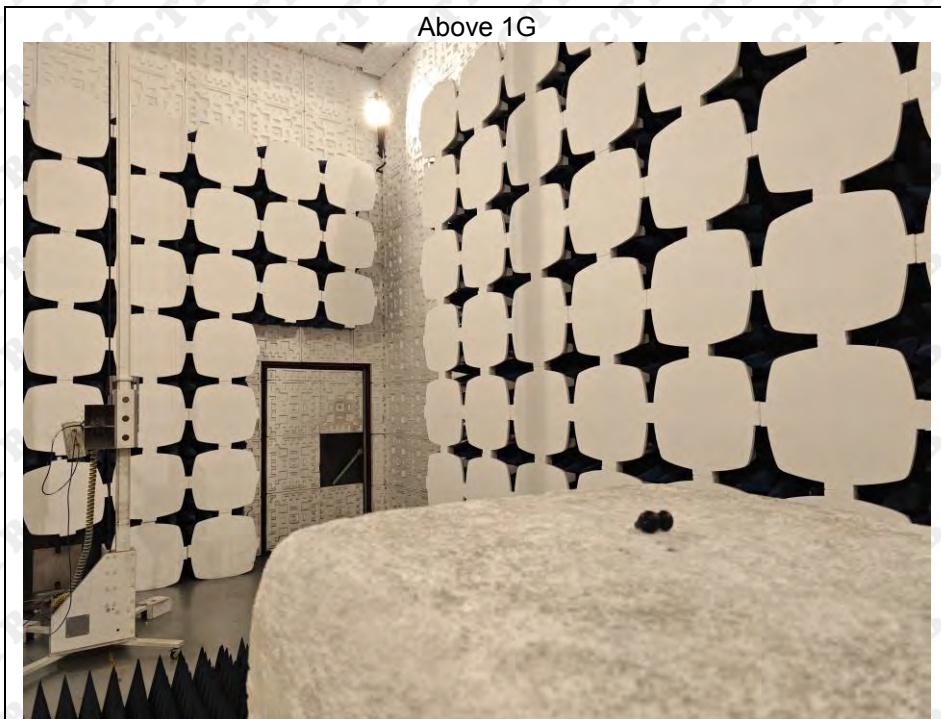

## Conducted emissions



※※※※ END OF REPORT ※※※※