



# FCC RF Test Report

**APPLICANT** : TP-LINK CORPORATION PTE. LTD.  
**EQUIPMENT** : AX1800 Wi-Fi 6 Range Extender  
**BRAND NAME** : tp-link  
**MODEL NAME** : RE605X  
**FCC ID** : 2BCGWRE605XV2  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Nov. 30, 2023 ~ Feb. 28, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 8

    1.6 Testing Location ..... 8

    1.7 Test Software..... 8

    1.8 Applicable Standards..... 9

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

    2.1 Carrier Frequency and Channel ..... 10

    2.2 Test Mode..... 11

    2.3 Connection Diagram of Test System..... 13

    2.4 Support Unit used in test configuration and system ..... 14

    2.5 EUT Operation Test Setup ..... 14

    2.6 Measurement Results Explanation Example..... 14

**3 TEST RESULT..... 15**

    3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 15

    3.2 Maximum Conducted Output Power Measurement ..... 20

    3.3 Power Spectral Density Measurement ..... 22

    3.4 Unwanted Emissions Measurement ..... 27

    3.5 AC Conducted Emission Measurement..... 32

    3.6 Antenna Requirements ..... 34

**4 LIST OF MEASURING EQUIPMENT ..... 36**

**5 MEASUREMENT UNCERTAINTY ..... 37**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm for UNII-1, and 24 dBm for UNII-2A/2C	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 17 dBm/MHz for UNII-1, and 11 dBm/MHz for UNII-2A/2C	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.50 dB at 5728.36 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 8.14 dB at 0.28 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

TP-LINK CORPORATION PTE. LTD.

7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

## 1.2 Manufacturer

TP-LINK CORPORATION PTE. LTD.

7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AX1800 Wi-Fi 6 Range Extender
Brand Name	tp-link
Model Name	RE605X
FCC ID	2BCGWRE605XV2
SN	Conducted: 22341K0000111 Conduction: 22341K0000119 Radiation: 22341K0000101
HW Version	V2.20
SW Version	re605xv2.2_us-up-ver1-0-2-P1[20230914-rel58320]
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
<b>Maximum Output Power to Antenna</b>	<p><b>MIMO &lt;Ant. 1+2&gt;</b></p> <p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 25.25 dBm / 0.3350 W  802.11n HT20 : 25.11 dBm / 0.3243 W  802.11n HT40 : 24.11 dBm / 0.2576 W  802.11ac VHT20: 25.16 dBm / 0.3281 W  802.11ac VHT40: 24.16 dBm / 0.2606 W  802.11ac VHT80: 17.40 dBm / 0.0550 W  802.11ax HE20: 25.27 dBm / 0.3365 W  802.11ax HE40: 24.22 dBm / 0.2642 W  802.11ax HE80: 17.48 dBm / 0.0560 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 21.54 dBm / 0.1426 W  802.11n HT20 : 22.52 dBm / 0.1786 W  802.11n HT40 : 22.71 dBm / 0.1866 W  802.11ac VHT20: 22.58 dBm / 0.1811 W  802.11ac VHT40: 22.78 dBm / 0.1897 W  802.11ac VHT80: 16.59 dBm / 0.0456 W  802.11ax HE20: 22.68 dBm / 0.1854 W  802.11ax HE40: 22.87 dBm / 0.1936 W  802.11ax HE80: 16.67 dBm / 0.0465 W</p> <p><b>&lt;5500 MHz ~ 5720 MHz &gt;</b>  802.11a : 21.13 dBm / 0.1297 W  802.11n HT20 : 21.92 dBm / 0.1556 W  802.11n HT40 : 23.46 dBm / 0.2218 W  802.11ac VHT20: 22.02 dBm / 0.1592 W  802.11ac VHT40: 23.53 dBm / 0.2254 W  802.11ac VHT80: 23.11 dBm / 0.2046 W  802.11ax HE20: 22.14 dBm / 0.1637 W  802.11ax HE40: 23.63 dBm / 0.2307 W  802.11ax HE80: 23.29 dBm / 0.2133 W</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 24.27 dBm / 0.2673 W  802.11n HT20 : 24.29 dBm / 0.2685 W  802.11n HT40 : 24.42 dBm / 0.2767 W  802.11ac VHT20: 24.33 dBm / 0.2710 W  802.11ac VHT40: 24.45 dBm / 0.2786 W  802.11ac VHT80: 23.40 dBm / 0.2188 W  802.11ax HE20: 24.41 dBm / 0.2761 W  802.11ax HE40: 24.48 dBm / 0.2805 W  802.11ax HE80: 23.47 dBm / 0.2223 W</p>



<p><b>99% Occupied Bandwidth</b></p>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 19.88 MHz  802.11ax HE20: 19.93 MHz  802.11ax HE40: 38.06 MHz  802.11ax HE80: 76.72 MHz  <b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 17.13 MHz  802.11ax HE20: 19.38 MHz  802.11ax HE40: 37.86 MHz  802.11ax HE80: 76.60 MHz  <b>&lt;5500 MHz ~ 5720 MHz&gt;</b>  802.11a : 17.83 MHz  802.11ax HE20: 19.78 MHz  802.11ax HE40: 37.96 MHz  802.11ax HE80: 77.20 MHz  <b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 21.73 MHz  802.11ax HE20: 22.88 MHz  802.11ax HE40: 38.76 MHz  802.11ax HE80: 77.56 MHz</p>												
<p><b>Antenna Type / Gain</b></p>	<p>&lt;Ant. 1/2&gt; : Dipole Antenna with gain 3.0 dBi</p>												
<p><b>Type of Modulation</b></p>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)  802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)  802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)</p>												
<p><b>Antenna Function Description</b></p>	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac/ax SISO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 a/n/ac/ax MIMO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 ac/ax Tx Beamforming</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11 a/n/ac/ax SISO	V	V	802.11 a/n/ac/ax MIMO	V	V	802.11 ac/ax Tx Beamforming	V	V
	Ant. 1	Ant. 2											
802.11 a/n/ac/ax SISO	V	V											
802.11 a/n/ac/ax MIMO	V	V											
802.11 ac/ax Tx Beamforming	V	V											

**Note:**

1. For SISO&MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
2. The EUT supports beamforming and MIMO CDD mode, and the CDD mode is the worst case. Therefore, all test items are evaluated in this report. The beamforming mode only evaluates the output power.
3. Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report, and power setting for 802.11n-HT20 and HT40 will not be greater than 802.11ac-VHT20 and VHT40.
4. For 802.11ac-VHT20/VHT40/VHT80 mode and 802.11ax-HE20/HE40/HE80 mode, the whole testing has assessed only 802.11ax-HE20/HE40/HE80 by referring to their higher conducted power.
5. 802.11ax mode only supports full RU for this device, so only the full RU is evaluated.



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b





## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 <sup>#</sup>	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "\*" are 40MHz bandwidth.
2. The above Frequency and Channel in "<sup>#</sup>" are 80MHz bandwidth.

## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table, the details refer to Appendix C.

### CDD Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Co-location mode
WLAN 2.4G 802.11g CH01 Tx + WLAN 5G 802.11ax HE80 CH140 Tx

Remark: For radiated simultaneous transmission test mode, the combination testing was assessed from the worst RSE link mode of WLAN 2.4G & 5G.

AC Conducted Emission	Mode 1 : WLAN Link(5G) + Power from AC




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-

## 2.3 Connection Diagram of Test System

For Conducted Emission:

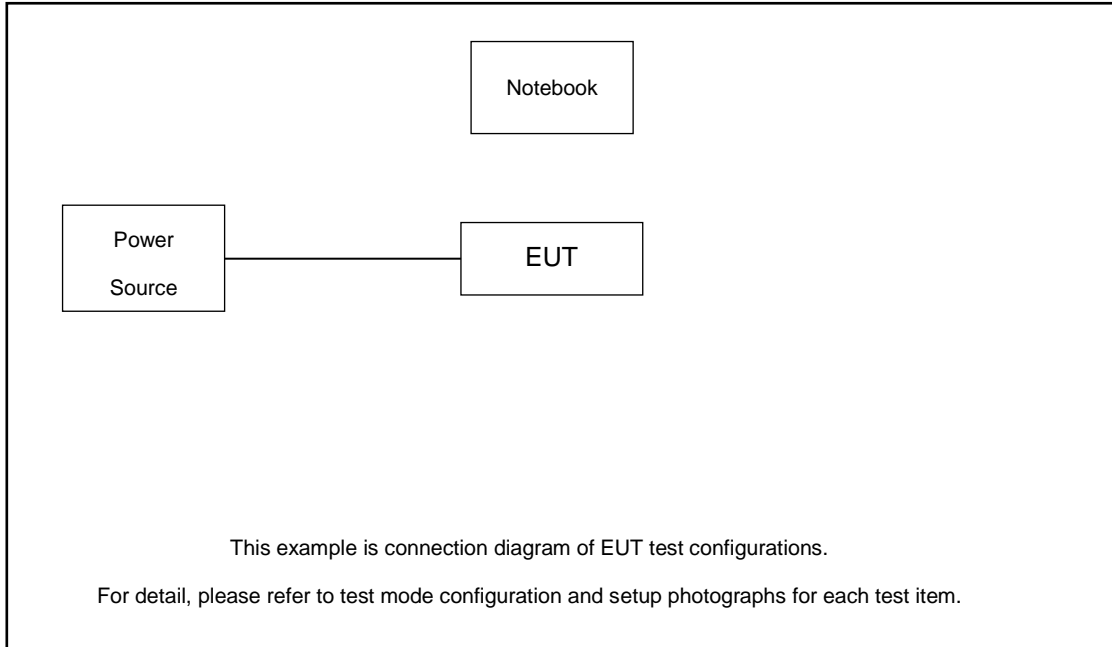

For Radiated Emission:

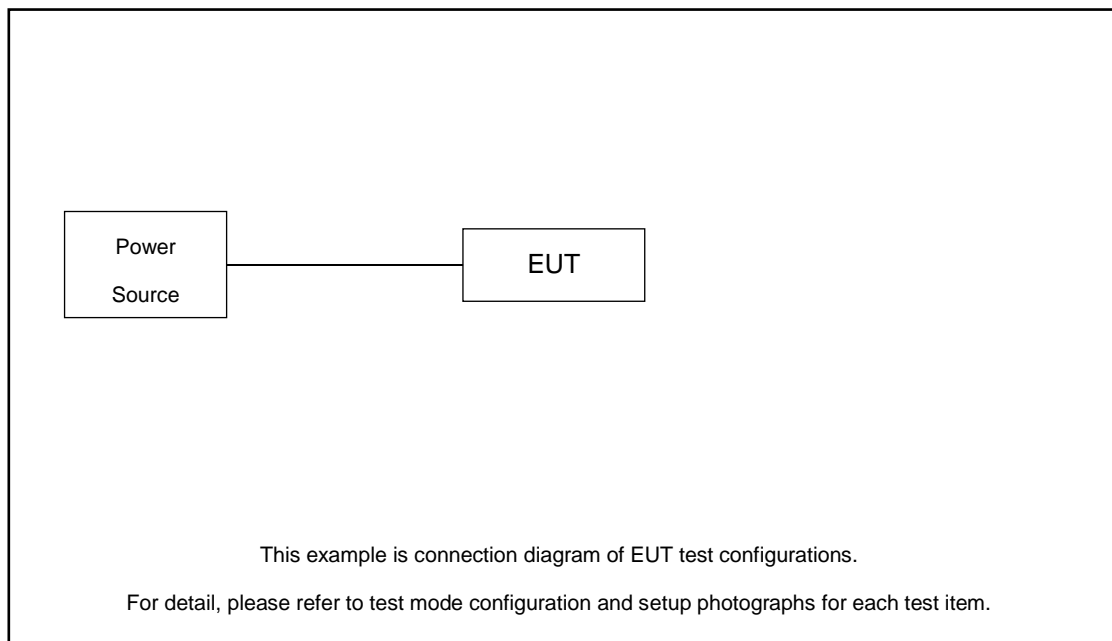



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	E540	FCC DoC	Lenovo	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

### 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the notebook under large package sizes transmission.

### 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 1.6 dB and 20dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 1.6 + 20 = 21.6 \text{ (dB)} \end{aligned}$$



### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

##### 3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> <li>Set RBW = approximately 1% of the emission bandwidth.</li> <li>Set the VBW &gt; RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</li> <li>For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.</li> <li>Measure and record the results in the test report.</li> </ol>
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> <li>Set RBW = 100kHz.</li> <li>Set the VBW ≥ 3 x RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 6 dB down from the peak of the emission.</li> <li>Measure and record the results in the test report.</li> </ol>

### 3.1.4 Test Setup


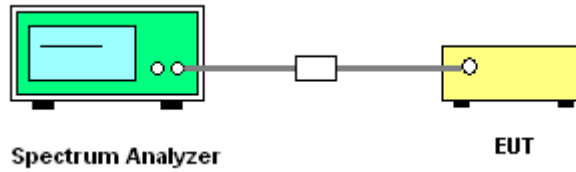




### 3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth



Please refer to Appendix A.

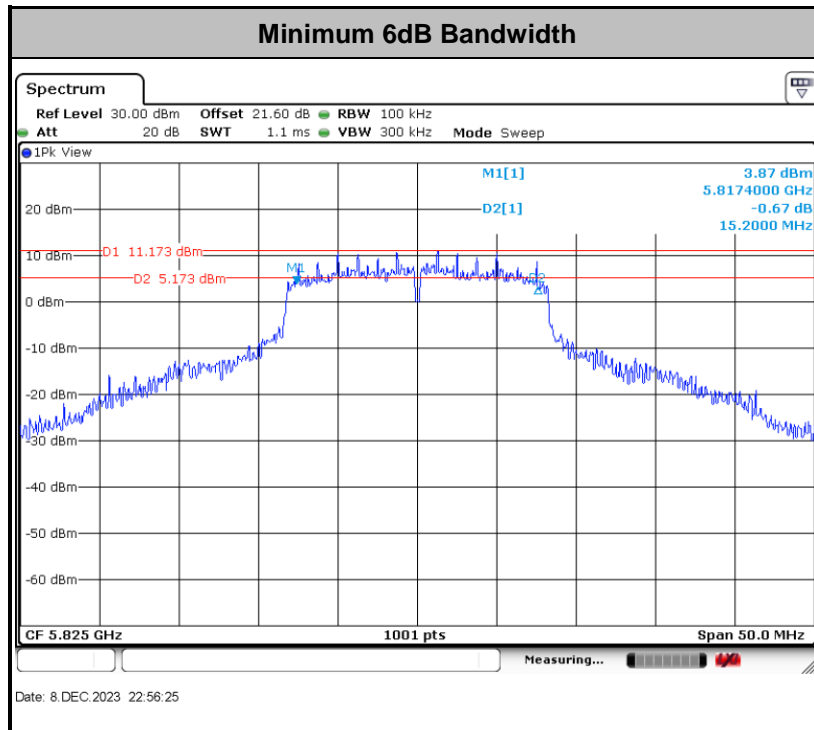



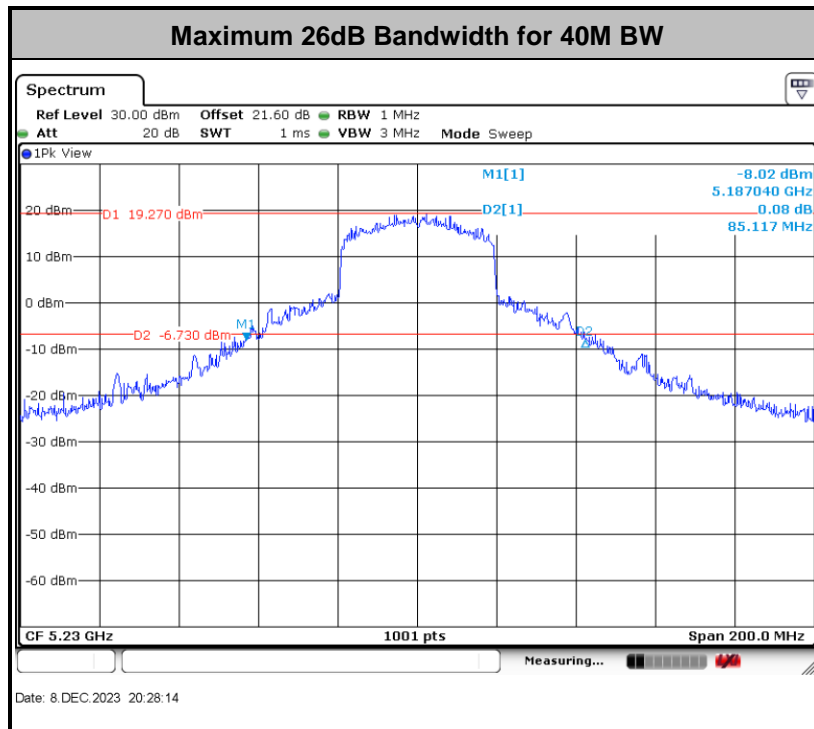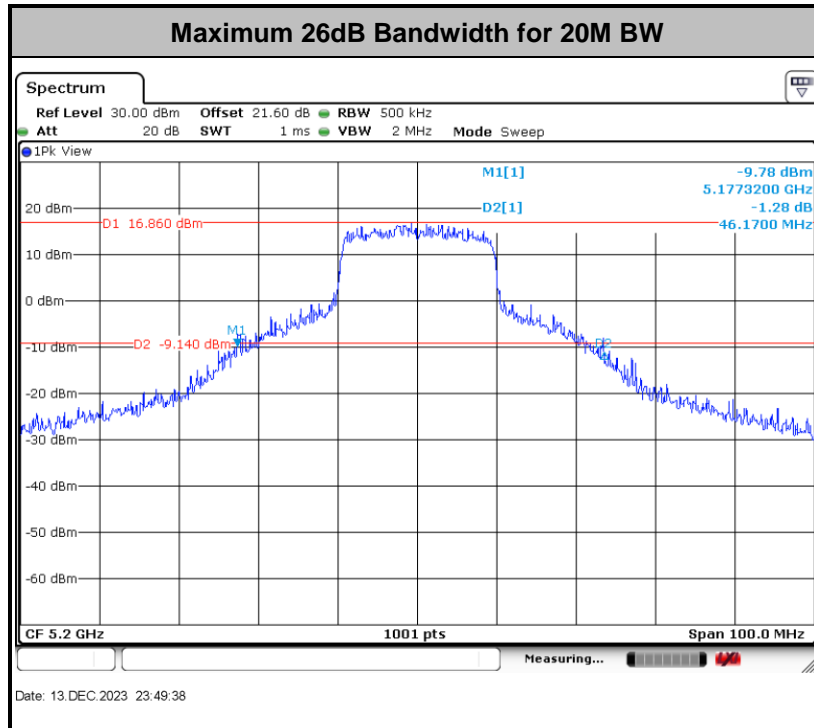

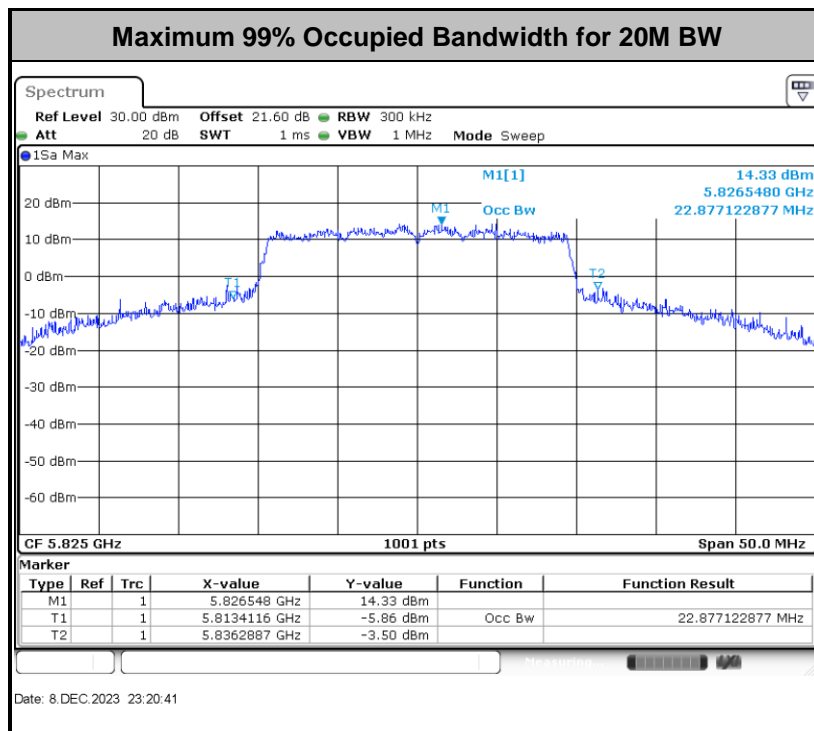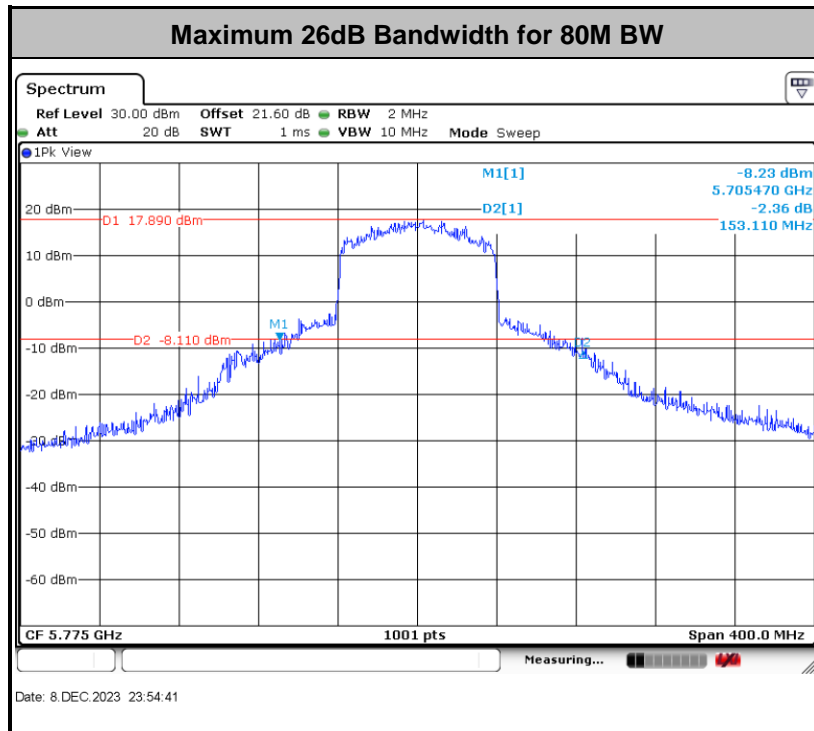

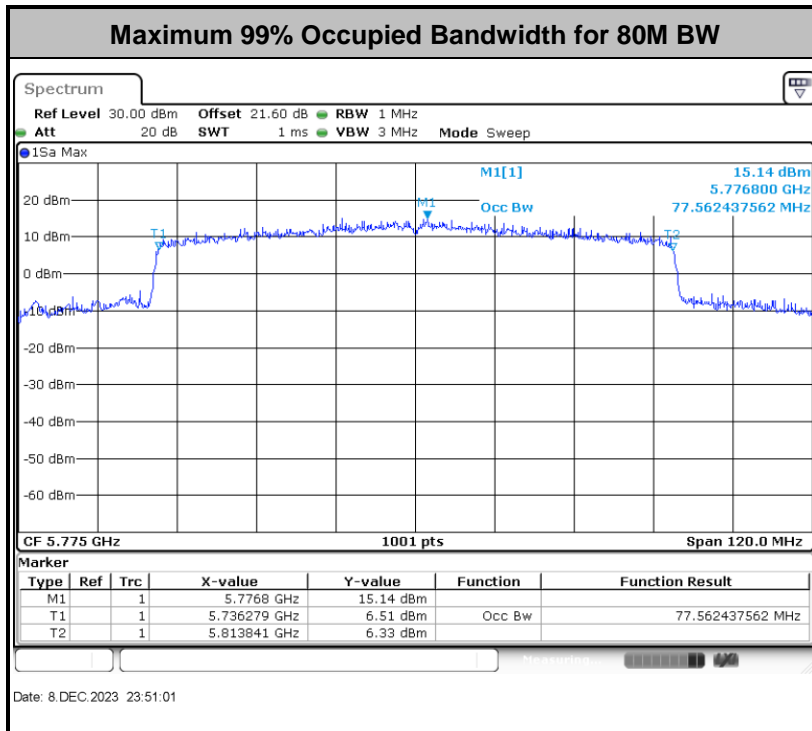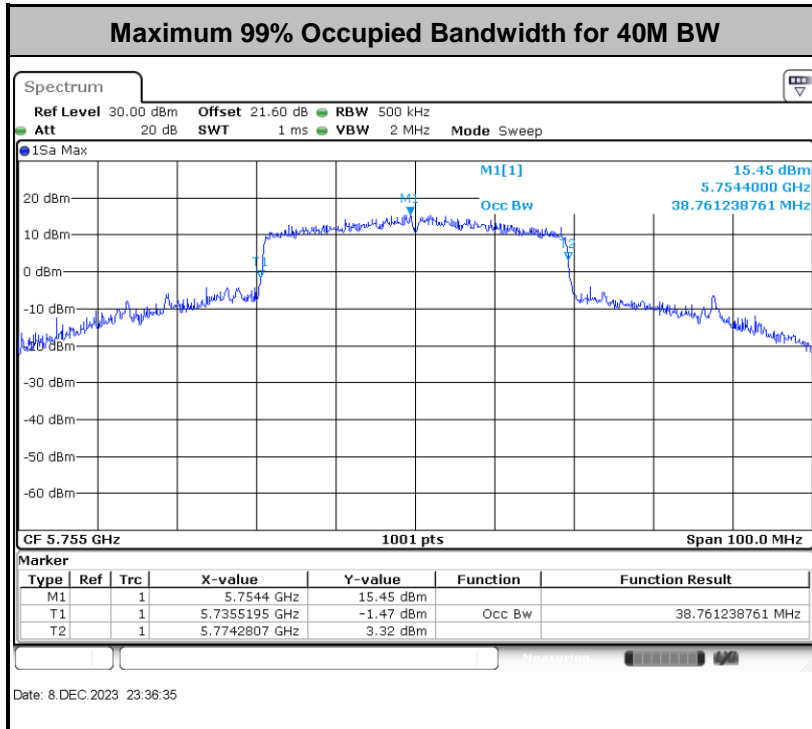

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log_{10} B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

#### <TXBF Modes>


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

### 3.2.4 Test Setup

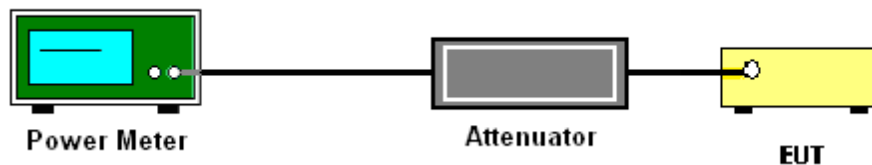

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.  
Section F) Maximum power spectral density.

#### **For devices operating in the bands UNII-1/2A/2C**

##### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

#### **For devices operating in the band UNII-3**

##### **# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB, where  $N_{ANT}$  is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit.

### 3.3.4 Test Setup

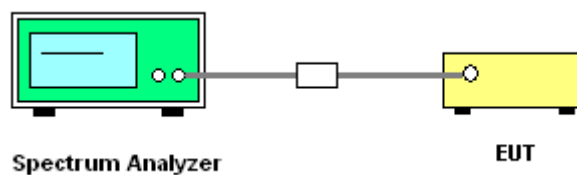






### 3.3.5 Test Result of Power Spectral Density



Please refer to Appendix A.

**For devices operating in the bands UNII-1/2A/2C**

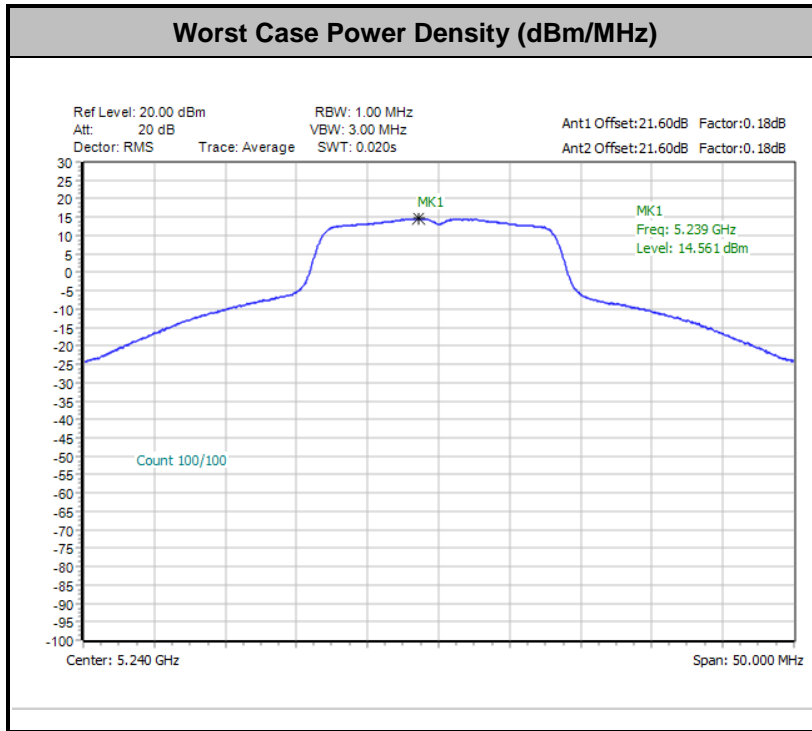



For devices operating in the band UNII-3

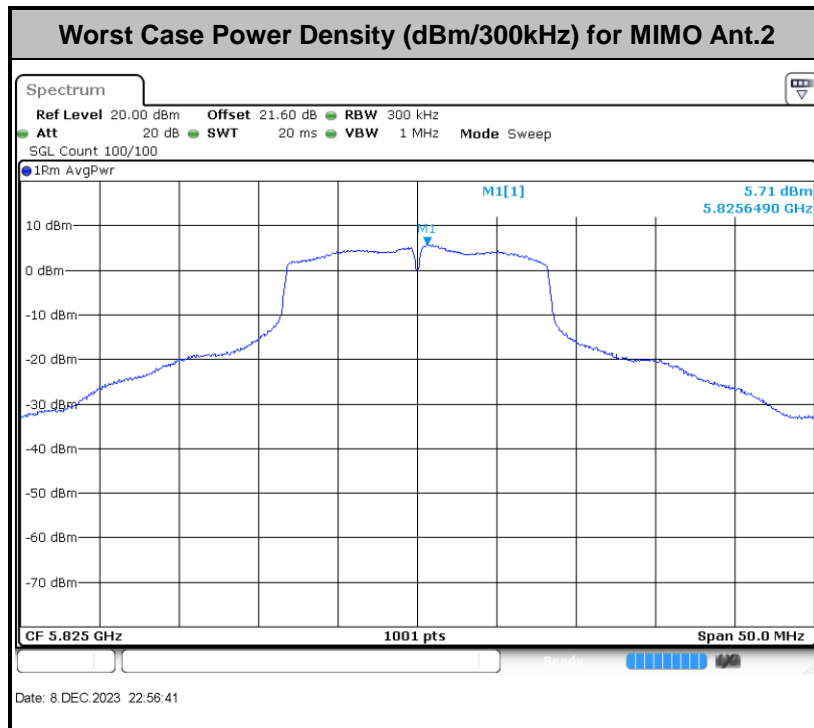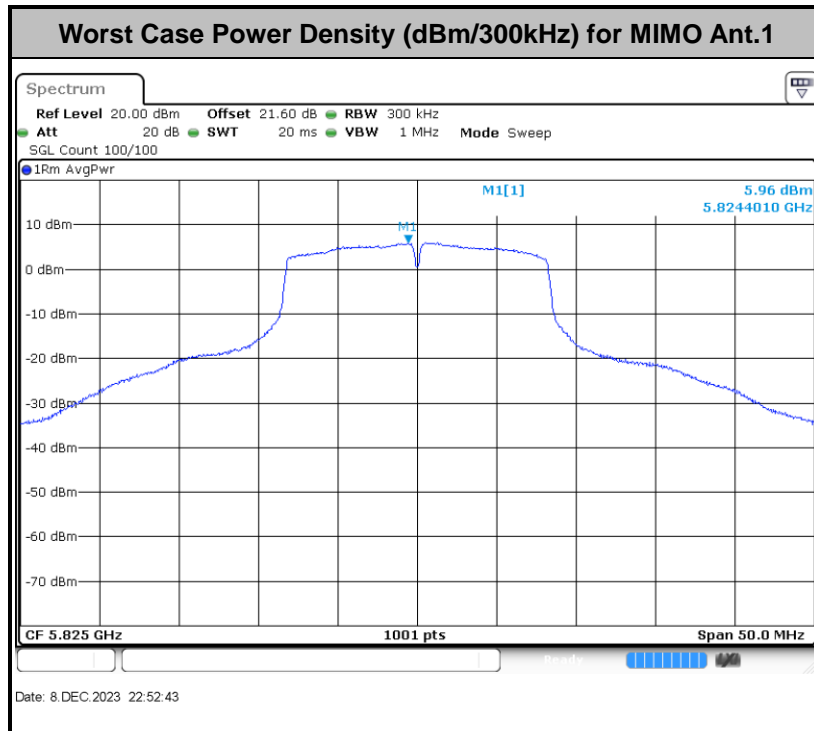



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27\text{dBm/MHz}$ .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27\text{ dBm/MHz}$ . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27\text{ dBm/MHz}$  in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of  $-27\text{ dBm/MHz}$ .

- (2) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of  $-27\text{ dBm/MHz}$  at 75 MHz or more above or below the band edge increasing linearly to  $10\text{ dBm/MHz}$  at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of  $15.6\text{ dBm/MHz}$  at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27\text{ dBm/MHz}$  at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) -104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

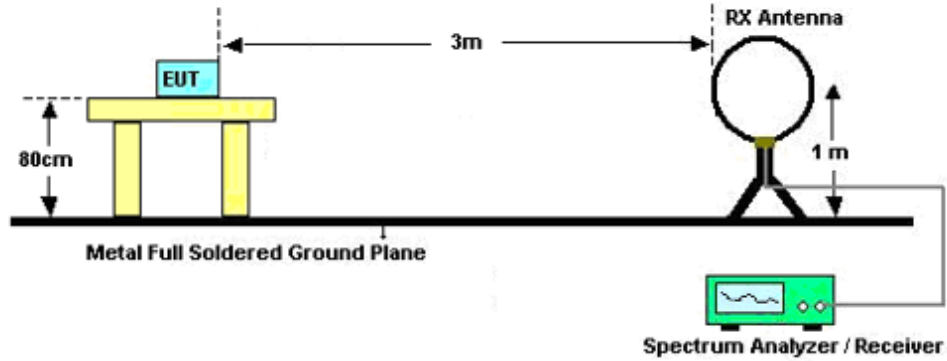

For radiated emissions from 30MHz to 1GHz

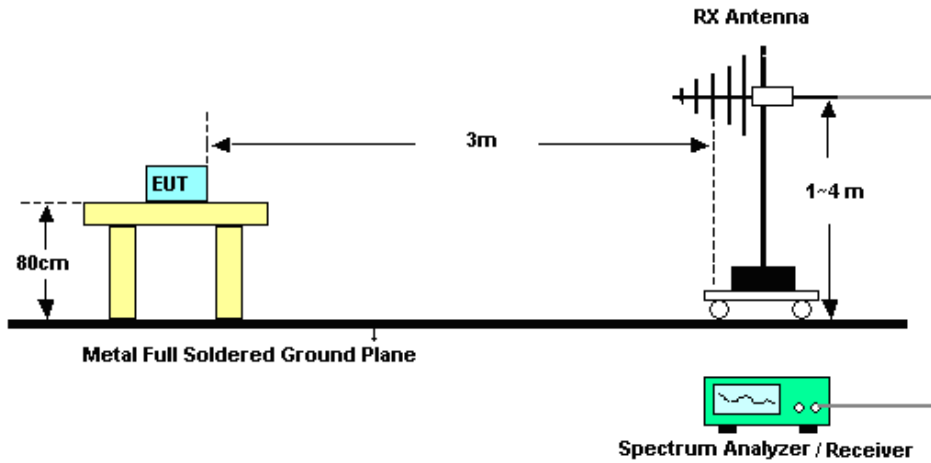

For radiated emissions above 1GHz

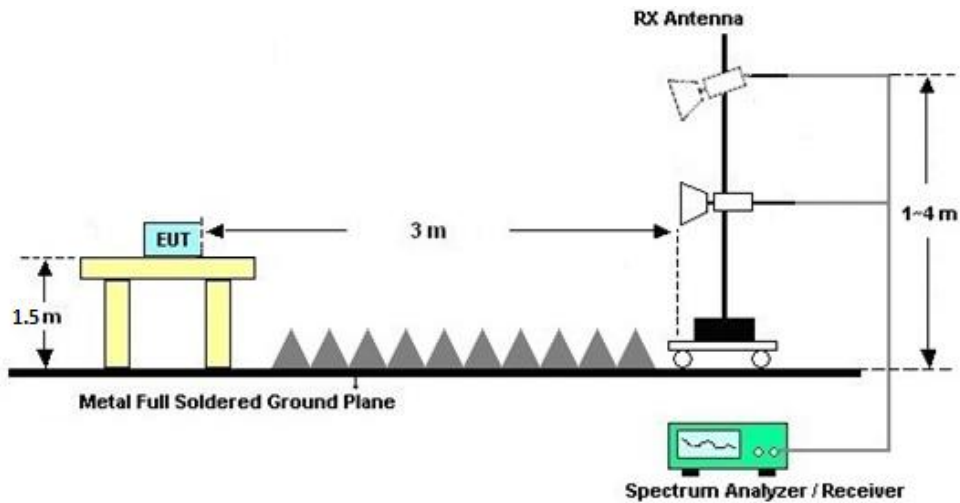



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.



### 3.5.4 Test Setup

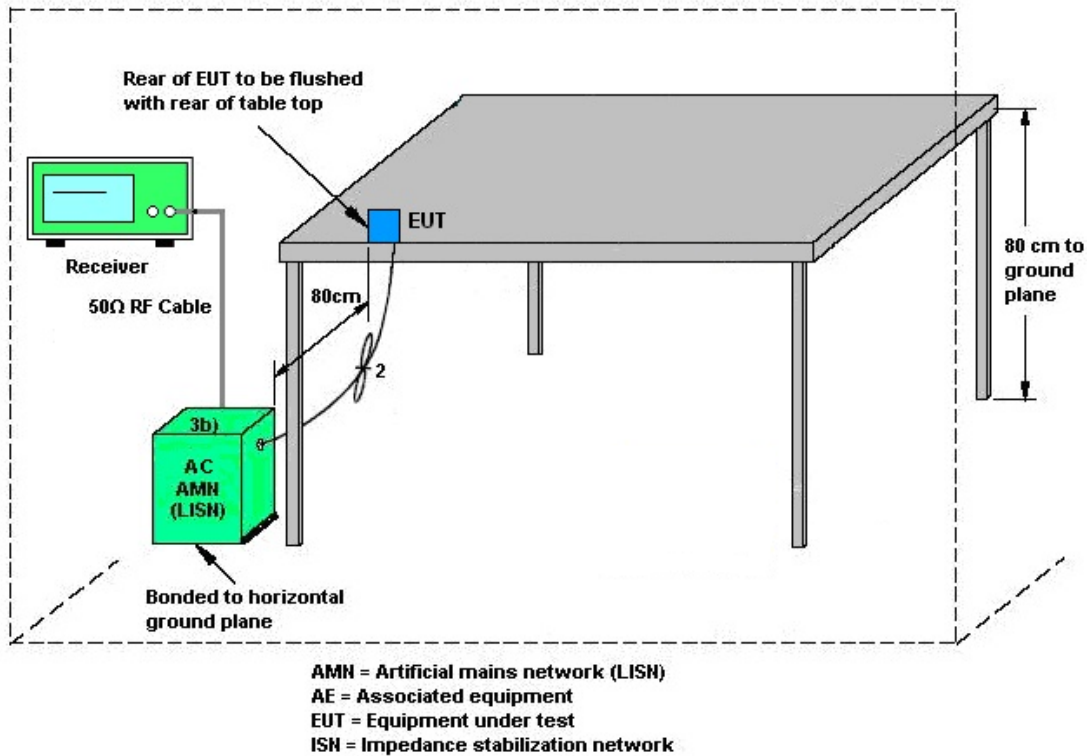

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.6 Antenna Requirements

#### 3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode for 802.11a/n/ac/ax modes.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
UNII-1	3.00	3.00	3.00	6.01	0.00	0.01
UNII-2A	3.00	3.00	3.00	6.01	0.00	0.01
UNII-2C	3.00	3.00	3.00	6.01	0.00	0.01
UNII-3	3.00	3.00	3.00	6.01	0.00	0.01

Power limit reduction = Composite gain – 6dBi, ( min = 0 )

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, ( min = 0 )

**TXBF modes**

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For TXBF transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

$N_{SS}$  = the number of independent spatial streams of data;

$N_{ANT}$  = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$  if the  $k$ th antenna is being fed by spatial stream  $j$ , or zero if it is not;  
 $G_k$  is the gain in dBi of the  $k$ th antenna.

The EUT supports beamforming for 802.11ac/ax modes.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

			<b>DG</b>	<b>DG</b>	<b>Power</b>	<b>PSD</b>
			<b>for</b>	<b>for</b>	<b>Limit</b>	<b>Limit</b>
	<b>Ant 1</b>	<b>Ant 2</b>	<b>Power</b>	<b>PSD</b>	<b>Reduction</b>	<b>Reduction</b>
	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dBi)</b>	<b>(dB)</b>	<b>(dB)</b>
<b>UNII-1</b>	3.00	3.00	6.01	6.01	0.01	0.01
<b>UNII-2A</b>	3.00	3.00	6.01	6.01	0.01	0.01
<b>UNII-2C</b>	3.00	3.00	6.01	6.01	0.01	0.01
<b>UNII-3</b>	3.00	3.00	6.01	6.01	0.01	0.01

$$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$$

$$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Dec. 08, 2023~ Dec. 13, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Dec. 08, 2023~ Dec. 13, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Dec. 08, 2023~ Dec. 13, 2023	Aug. 20, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 26, 2022	Dec. 09, 2023~ Feb. 28, 2024	Dec. 25, 2023	Radiation (03CH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023		Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Dec. 09, 2023~ Feb. 28, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Dec. 09, 2023~ Feb. 28, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Dec. 09, 2023~ Feb. 28, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Dec. 09, 2023~ Feb. 28, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 08, 2023	Dec. 09, 2023~ Feb. 28, 2024	Apr. 07, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Dec. 09, 2023~ Feb. 28, 2024	Apr. 03,2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Dec. 09, 2023~ Feb. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Dec. 09, 2023~ Feb. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Dec. 09, 2023~ Feb. 28, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	Oct. 18, 2023	Dec. 09, 2023~ Feb. 28, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 09, 2023~ Feb. 28, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 09, 2023~ Feb. 28, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Nov. 30, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Nov. 30, 2023	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Nov. 30, 2023	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	6160200008 91	100Vac~250Vac	Jul. 07, 2023	Nov. 30, 2023	Jul. 06, 2024	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7 dB
---	--------

### Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



## **Appendix A. Conducted Test Results**

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2023/12/8~12/13	Relative Humidity:	51~54	%

<CDD mode>:

Report Number : FR3N1401B

**TEST RESULTS DATA**  
**26dB and 99% OBW**

UNII-1													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	17.03	18.58	27.42	37.50	-	-	22.31	-	
11a	6Mbps	2	40	5200	17.43	18.58	28.62	40.12	-	-	22.41	-	
11a	6Mbps	2	44	5220	19.13	18.83	34.04	40.96	-	-	22.75	-	
11a	6Mbps	2	48	5240	19.68	19.88	34.55	41.12	-	-	22.94	-	
HE20	MCS0	2	36	5180	19.43	19.93	38.15	38.62	-	-	22.88	-	
HE20	MCS0	2	40	5200	19.83	19.68	38.24	46.17	-	-	22.94	-	
HE20	MCS0	2	44	5220	19.83	19.78	39.42	45.17	-	-	22.96	-	
HE20	MCS0	2	48	5240	19.03	19.33	41.55	45.19	-	-	22.79	-	
HE40	MCS0	2	38	5190	37.56	37.66	39.84	39.96	-	-	23.01	-	
HE40	MCS0	2	46	5230	37.86	38.06	76.96	85.12	-	-	23.01	-	
HE80	MCS0	2	42	5210	76.48	76.72	80.64	80.40	-	-	23.01	-	



**TEST RESULTS DATA**  
**Average Power Table**

UNII-1																
Mod.	Data Rate	N <sub>TX</sub>	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	Full	5180	0.18	0.18	19.74	20.43	23.11	30.00	3.00		Pass	19	
11a	6Mbps	2	40	Full	5200	0.18	0.18	20.64	21.38	24.04	30.00	3.00		Pass	20	
11a	6Mbps	2	48	Full	5240	0.18	0.18	21.85	22.59	25.25	30.00	3.00		Pass	21	
HT20	MCS0	2	36	Full	5180	0.20	0.19	18.91	19.56	22.26	30.00	3.00		Pass	18	
HT20	MCS0	2	40	Full	5200	0.20	0.19	21.66	22.35	25.03	30.00	3.00		Pass	21	
HT20	MCS0	2	48	Full	5240	0.20	0.19	21.70	22.46	25.11	30.00	3.00		Pass	21	
HT40	MCS0	2	38	Full	5190	0.54	0.52	16.62	17.19	19.92	30.00	3.00		Pass	15.5	
HT40	MCS0	2	46	Full	5230	0.54	0.52	20.74	21.44	24.11	30.00	3.00		Pass	19.5	
VHT20	MCS0	2	36	Full	5180	0.19	0.19	18.97	19.61	22.32	30.00	3.00		Pass	18	
VHT20	MCS0	2	40	Full	5200	0.19	0.19	21.70	22.40	25.08	30.00	3.00		Pass	21	
VHT20	MCS0	2	48	Full	5240	0.19	0.19	21.74	22.51	25.16	30.00	3.00		Pass	21	
VHT40	MCS0	2	38	Full	5190	0.51	0.51	16.65	17.23	19.96	30.00	3.00		Pass	15.5	
VHT40	MCS0	2	46	Full	5230	0.51	0.51	20.77	21.49	24.16	30.00	3.00		Pass	19.5	
VHT80	MCS0	2	42	Full	5210	0.72	0.72	14.08	14.68	17.40	30.00	3.00		Pass	13	
HE20	MCS0	2	36	Full	5180	0.25	0.25	19.08	19.70	22.41	30.00	3.00		Pass	18	
			40	Full	5200	0.25	0.25	21.87	22.55	25.23	30.00	3.00		Pass	21	
			48	Full	5240	0.25	0.25	21.85	22.63	25.27	30.00	3.00		Pass	21	
HE40	MCS0	2	38	Full	5190	0.55	0.55	16.70	17.29	20.01	30.00	3.00		Pass	15.5	
			46	Full	5230	0.55	0.55	20.83	21.56	24.22	30.00	3.00		Pass	19.5	
HE80	MCS0	2	42	Full	5210	0.78	0.78	14.15	14.76	17.48	30.00	3.00		Pass	13	

**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-1															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	Full	5180	0.18	0.18			13.87	16.99	6.01			Pass
11a	6Mbps	2	40	Full	5200	0.18	0.18			14.18	16.99	6.01			Pass
11a	6Mbps	2	44	Full	5220	0.18	0.18			14.55	16.99	6.01			Pass
11a	6Mbps	2	48	Full	5240	0.18	0.18			14.56	16.99	6.01			Pass
HE20	MCS0	2	36	Full	5180	0.25	0.25			12.42	16.99	6.01			Pass
HE20	MCS0	2	40	Full	5200	0.25	0.25			13.31	16.99	6.01			Pass
HE20	MCS0	2	44	Full	5220	0.25	0.25			13.65	16.99	6.01			Pass
HE20	MCS0	2	48	Full	5240	0.25	0.25			13.49	16.99	6.01			Pass
HE40	MCS0	2	38	Full	5190	0.55	0.55			8.16	16.99	6.01			Pass
HE40	MCS0	2	46	Full	5230	0.55	0.55			12.05	16.99	6.01			Pass
HE80	MCS0	2	42	Full	5210	0.78	0.78			3.36	16.99	6.01			Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

UNII-2A															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	16.63	17.13	20.16	25.50	23.21		29.21		23.98		
11a	6Mbps	2	60	5300	16.98	17.03	25.74	27.96	23.30		29.30		23.98		
11a	6Mbps	2	64	5320	16.93	17.13	25.56	27.48	23.29		29.29		23.98		
HE20	MCS0	2	52	5260	19.28	19.33	26.94	25.80	23.85		29.85		23.98		
HE20	MCS0	2	60	5300	19.38	19.33	23.64	25.44	23.86		29.86		23.98		
HE20	MCS0	2	64	5320	19.33	19.38	26.52	26.76	23.86		29.86		23.98		
HE40	MCS0	2	54	5270	37.66	37.76	44.16	43.08	23.98		30.00		23.98		
HE40	MCS0	2	62	5310	37.86	37.76	61.10	69.55	23.98		30.00		23.98		
HE80	MCS0	2	58	5290	76.60	76.48	80.88	80.64	23.98		30.00		23.98		

**TEST RESULTS DATA**  
**Average Power Table**

UNII-2A																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
11a	6Mbps	2	52	Full	5260	0.18	0.18	17.67	18.36	21.04	23.98	3.00	30	Pass	17.5		
11a	6Mbps	2	60	Full	5300	0.18	0.18	18.57	18.49	21.54	23.98	3.00	30	Pass	17.5		
11a	6Mbps	2	64	Full	5320	0.18	0.18	18.46	18.52	21.50	23.98	3.00	30	Pass	17.5		
HT20	MCS0	2	52	Full	5260	0.20	0.19	19.14	19.85	22.52	23.98	3.00	30	Pass	19		
HT20	MCS0	2	60	Full	5300	0.20	0.19	19.01	19.15	22.09	23.98	3.00	30	Pass	18		
HT20	MCS0	2	64	Full	5320	0.20	0.19	19.01	19.15	22.09	23.98	3.00	30	Pass	18		
HT40	MCS0	2	54	Full	5270	0.54	0.52	19.37	20.02	22.71	23.98	3.00	30	Pass	19		
HT40	MCS0	2	62	Full	5310	0.54	0.52	17.07	17.24	20.16	23.98	3.00	30	Pass	16		
VHT20	MCS0	2	52	Full	5260	0.19	0.19	19.21	19.90	22.58	23.98	3.00	30	Pass	19		
VHT20	MCS0	2	60	Full	5300	0.19	0.19	19.10	19.23	22.18	23.98	3.00	30	Pass	18		
VHT20	MCS0	2	64	Full	5320	0.19	0.19	19.11	19.24	22.19	23.98	3.00	30	Pass	18		
VHT40	MCS0	2	54	Full	5270	0.51	0.51	19.44	20.08	22.78	23.98	3.00	30	Pass	19		
VHT40	MCS0	2	62	Full	5310	0.51	0.51	17.11	17.29	20.21	23.98	3.00	30	Pass	16		
VHT80	MCS0	2	58	Full	5290	0.72	0.72	13.20	13.93	16.59	23.98	3.00	30	Pass	13		
HE20	MCS0	2	52	Full	5260	0.25	0.25	19.31	20.00	22.68	23.85	3.00	30	Pass	19		
			60	Full	5300	0.25	0.25	19.22	19.32	22.28	23.86	3.00	30	Pass	18		
			64	Full	5320	0.25	0.25	19.22	19.34	22.29	23.86	3.00	30	Pass	18		
HE40	MCS0	2	54	Full	5270	0.55	0.55	19.54	20.16	22.87	23.98	3.00	30	Pass	19		
			62	Full	5310	0.55	0.55	17.19	17.38	20.29	23.98	3.00	30	Pass	16		
HE80	MCS0	2	58	Full	5290	0.78	0.78	13.27	14.02	16.67	23.98	3.00	30	Pass	13		

**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-2A															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	Full	5260	0.18	0.18			10.54	10.99	6.01			Pass
11a	6Mbps	2	60	Full	5300	0.18	0.18			10.91	10.99	6.01			Pass
11a	6Mbps	2	64	Full	5320	0.18	0.18			10.88	10.99	6.01			Pass
HE20	MCS0	2	52	Full	5260	0.25	0.25			10.89	10.99	6.01			Pass
HE20	MCS0	2	60	Full	5300	0.25	0.25			10.63	10.99	6.01			Pass
HE20	MCS0	2	64	Full	5320	0.25	0.25			10.66	10.99	6.01			Pass
HE40	MCS0	2	54	Full	5270	0.55	0.55			9.08	10.99	6.01			Pass
HE40	MCS0	2	62	Full	5310	0.55	0.55			9.66	10.99	6.01			Pass
HE80	MCS0	2	58	Full	5290	0.78	0.78			2.09	10.99	6.01			Pass

**TEST RESULTS DATA**  
**26dB and 99% OBW**

UNII-2C															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	17.23	17.18	28.56	27.42	23.35		29.35		23.98		
11a	6Mbps	2	116	5580	16.93	17.23	27.54	28.92	23.29		29.29		23.98		
11a	6Mbps	2	140	5700	17.13	17.68	28.44	35.49	23.34		29.34		23.98		
11a	6Mbps	2	144	5720	17.43	17.83	34.32	35.85	23.41		29.41		23.98		
HE20	MCS0	2	100	5500	19.48	19.43	28.74	29.22	23.88		29.88		23.98		
HE20	MCS0	2	116	5580	19.48	19.48	26.22	29.46	23.90		29.90		23.98		
HE20	MCS0	2	140	5700	19.53	19.53	28.92	29.52	23.91		29.91		23.98		
HE20	MCS0	2	144	5720	19.48	19.78	35.04	37.36	23.90		29.90		23.98		
HE40	MCS0	2	102	5510	37.96	37.76	75.60	66.67	23.98		30.00		23.98		
HE40	MCS0	2	110	5550	37.86	37.76	74.98	74.71	23.98		30.00		23.98		
HE40	MCS0	2	134	5670	37.76	37.86	60.90	70.05	23.98		30.00		23.98		
HE40	MCS0	2	142	5710	37.86	37.96	75.40	73.56	23.98		30.00		23.98		
HE80	MCS0	2	106	5530	76.84	76.96	80.88	80.88	23.98		30.00		23.98		
HE80	MCS0	2	122	5610	76.96	77.20	95.52	98.16	23.98		30.00		23.98		
HE80	MCS0	2	138	5690	76.96	77.08	83.52	143.86	23.98		30.00		23.98		

**TEST RESULTS DATA**  
**Average Power Table**

UNII-2C																	
Mod.	Data Rate	N <sub>TX</sub>	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
11a	6Mbps	2	100	Full	5500	0.18	0.18	18.14	18.10	21.13	23.98	3.00	30	30	Pass	16.5	
11a	6Mbps	2	116	Full	5580	0.18	0.18	17.96	17.94	20.96	23.98	3.00	30	30	Pass	16.5	
11a	6Mbps	2	140	Full	5700	0.18	0.18	18.10	17.77	20.95	23.98	3.00	30	30	Pass	16.5	
11a	6Mbps	2	144	Full	5720	0.18	0.18	18.19	17.86	21.04	23.98	3.00	30	30	Pass	16.5	
HT20	MCS0	2	100	Full	5500	0.20	0.19	18.68	18.47	21.59	23.98	3.00	30	30	Pass	17	
HT20	MCS0	2	116	Full	5580	0.20	0.19	18.78	18.61	21.71	23.98	3.00	30	30	Pass	17.5	
HT20	MCS0	2	140	Full	5700	0.20	0.19	17.47	17.13	20.31	23.98	3.00	30	30	Pass	16	
HT20	MCS0	2	144	Full	5720	0.20	0.19	19.07	18.75	21.92	23.98	3.00	30	30	Pass	17.5	
HT40	MCS0	2	102	Full	5510	0.54	0.52	16.65	16.29	19.48	23.98	3.00	30	30	Pass	15	
HT40	MCS0	2	110	Full	5550	0.54	0.52	20.47	20.44	23.46	23.98	3.00	30	30	Pass	19	
HT40	MCS0	2	134	Full	5670	0.54	0.52	17.60	17.53	20.57	23.98	3.00	30	30	Pass	16.5	
HT40	MCS0	2	142	Full	5710	0.54	0.52	20.57	19.97	23.29	23.98	3.00	30	30	Pass	19	
VHT20	MCS0	2	100	Full	5500	0.19	0.19	18.76	18.57	21.68	23.98	3.00	30	30	Pass	17	
VHT20	MCS0	2	116	Full	5580	0.19	0.19	18.90	18.73	21.83	23.98	3.00	30	30	Pass	17.5	
VHT20	MCS0	2	140	Full	5700	0.19	0.19	17.52	17.19	20.37	23.98	3.00	30	30	Pass	16	
VHT20	MCS0	2	144	Full	5720	0.19	0.19	19.17	18.85	22.02	23.98	3.00	30	30	Pass	17.5	
VHT40	MCS0	2	102	Full	5510	0.51	0.51	16.69	16.35	19.54	23.98	3.00	30	30	Pass	15	
VHT40	MCS0	2	110	Full	5550	0.51	0.51	20.53	20.51	23.53	23.98	3.00	30	30	Pass	19	
VHT40	MCS0	2	134	Full	5670	0.51	0.51	17.63	17.59	20.62	23.98	3.00	30	30	Pass	16.5	
VHT40	MCS0	2	142	Full	5710	0.51	0.51	20.66	20.02	23.36	23.98	3.00	30	30	Pass	19	
VHT80	MCS0	2	106	Full	5530	0.72	0.72	12.73	12.26	15.51	23.98	3.00	30	30	Pass	11	
VHT80	MCS0	2	122	Full	5610	0.72	0.72	19.50	19.02	22.27	23.98	3.00	30	30	Pass	18	
VHT80	MCS0	2	138	Full	5690	0.72	0.72	20.22	19.98	23.11	23.98	3.00	30	30	Pass	19	
HE20	MCS0	2	100	Full	5500	0.25	0.25	18.85	18.68	21.78	23.98	3.00	30	30	Pass	17	
			116	Full	5580	0.25	0.25	19.00	18.86	21.94	23.98	3.00	30	30	Pass	17.5	
			140	Full	5700	0.25	0.25	17.63	17.30	20.48	23.98	3.00	30	30	Pass	16	
HE40	MCS0	2	144	Full	5720	0.25	0.25	19.30	18.96	22.14	23.98	3.00	30	30	Pass	17.5	
			102	Full	5510	0.55	0.55	16.78	16.44	19.62	23.98	3.00	30	30	Pass	15	
			110	Full	5550	0.55	0.55	20.63	20.62	23.63	23.98	3.00	30	30	Pass	19	
HE80	MCS0	2	134	Full	5670	0.55	0.55	17.73	17.70	20.72	23.98	3.00	30	30	Pass	16.5	
			142	Full	5710	0.55	0.55	20.76	20.14	23.47	23.98	3.00	30	30	Pass	19	
			106	Full	5530	0.78	0.78	12.80	12.33	15.59	23.98	3.00	30	30	Pass	11	
HE80	MCS0	2	122	Full	5610	0.78	0.78	19.58	19.10	22.36	23.98	3.00	30	30	Pass	18	
			138	Full	5690	0.78	0.78	20.37	20.18	23.29	23.98	3.00	30	30	Pass	19	

**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-2C															
Mod.	Data Rate	NTX	CH.		Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	Full	5500	0.18	0.18			10.88	10.99	6.01			Pass
11a	6Mbps	2	116	Full	5580	0.18	0.18			10.48	10.99	6.01			Pass
11a	6Mbps	2	140	Full	5700	0.18	0.18			10.61	10.99	6.01			Pass
11a	6Mbps	2	144	Full	5720	0.18	0.18			10.68	10.99	6.01			Pass
HE20	MCS0	2	100	Full	5500	0.25	0.25			10.65	10.99	6.01			Pass
HE20	MCS0	2	116	Full	5580	0.25	0.25			10.51	10.99	6.01			Pass
HE20	MCS0	2	140	Full	5700	0.25	0.25			10.64	10.99	6.01			Pass
HE20	MCS0	2	144	Full	5720	0.25	0.25			10.63	10.99	6.01			Pass
HE40	MCS0	2	102	Full	5510	0.55	0.55			10.24	10.99	6.01			Pass
HE40	MCS0	2	110	Full	5550	0.55	0.55			9.90	10.99	6.01			Pass
HE40	MCS0	2	134	Full	5670	0.55	0.55			9.40	10.99	6.01			Pass
HE40	MCS0	2	142	Full	5710	0.55	0.55			9.69	10.99	6.01			Pass
HE80	MCS0	2	106	Full	5530	0.78	0.78			6.47	10.99	6.01			Pass
HE80	MCS0	2	122	Full	5610	0.78	0.78			6.87	10.99	6.01			Pass
HE80	MCS0	2	138	Full	5690	0.78	0.78			6.68	10.99	6.01			Pass



**TEST RESULTS DATA**  
**6dB and 26dB EBW and 99% OBW**

UNII-3													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	18.63	20.28	37.76	40.90	16.35	16.35	0.5		Pass
11a	6Mbps	2	157	5785	19.73	21.73	37.68	40.45	15.40	16.40	0.5		Pass
11a	6Mbps	2	165	5825	18.93	20.88	37.40	39.83	15.40	15.20	0.5		Pass
HE20	MCS0	2	149	5745	21.23	22.03	43.47	44.89	18.70	18.20	0.5		Pass
HE20	MCS0	2	157	5785	21.43	22.78	43.23	42.54	18.95	18.10	0.5		Pass
HE20	MCS0	2	165	5825	20.73	22.88	42.14	44.69	18.85	18.70	0.5		Pass
HE40	MCS0	2	151	5755	38.76	38.66	82.32	75.91	35.73	35.28	0.5		Pass
HE40	MCS0	2	159	5795	38.56	38.46	75.84	77.61	35.19	35.19	0.5		Pass
HE80	MCS0	2	155	5775	77.44	77.56	153.11	150.24	75.52	75.52	0.5		Pass

**TEST RESULTS DATA**  
**Average Power Table**

UNII-3																
Mod.	Data Rate	N <sub>TX</sub>	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	Full	5745	0.18	0.18	21.45	21.05	24.27	30.00	30.00	3.00	3.00	Pass	21
11a	6Mbps	2	157	Full	5785	0.18	0.18	21.43	21.02	24.24	30.00	30.00	3.00	3.00	Pass	21
11a	6Mbps	2	165	Full	5825	0.18	0.18	21.38	21.01	24.21	30.00	30.00	3.00	3.00	Pass	21
HT20	MCS0	2	149	Full	5745	0.20	0.19	21.48	21.06	24.29	30.00	30.00	3.00	3.00	Pass	21
HT20	MCS0	2	157	Full	5785	0.20	0.19	21.45	21.03	24.26	30.00	30.00	3.00	3.00	Pass	21
HT20	MCS0	2	165	Full	5825	0.20	0.19	21.41	21.02	24.23	30.00	30.00	3.00	3.00	Pass	21
HT40	MCS0	2	151	Full	5755	0.54	0.52	21.72	21.01	24.39	30.00	30.00	3.00	3.00	Pass	21
HT40	MCS0	2	159	Full	5795	0.54	0.52	21.78	21.01	24.42	30.00	30.00	3.00	3.00	Pass	21
VHT20	MCS0	2	149	Full	5745	0.19	0.19	21.54	21.09	24.33	30.00	30.00	3.00	3.00	Pass	21
VHT20	MCS0	2	157	Full	5785	0.19	0.19	21.52	21.05	24.30	30.00	30.00	3.00	3.00	Pass	21
VHT20	MCS0	2	165	Full	5825	0.19	0.19	21.50	21.04	24.29	30.00	30.00	3.00	3.00	Pass	21
VHT40	MCS0	2	151	Full	5755	0.51	0.51	21.77	21.02	24.42	30.00	30.00	3.00	3.00	Pass	21
VHT40	MCS0	2	159	Full	5795	0.51	0.51	21.81	21.03	24.45	30.00	30.00	3.00	3.00	Pass	21
VHT80	MCS0	2	155	Full	5775	0.72	0.72	20.74	20.01	23.40	30.00	30.00	3.00	3.00	Pass	20
HE20	MCS0	2	149	Full	5745	0.25	0.25	21.64	21.14	24.41	30.00	30.00	3.00	3.00	Pass	21
HE20	MCS0	2	157	Full	5785	0.25	0.25	21.62	21.10	24.38	30.00	30.00	3.00	3.00	Pass	21
HE20	MCS0	2	165	Full	5825	0.25	0.25	21.61	21.09	24.37	30.00	30.00	3.00	3.00	Pass	21
HE40	MCS0	2	151	Full	5755	0.55	0.55	21.81	21.06	24.46	30.00	30.00	3.00	3.00	Pass	21
HE40	MCS0	2	159	Full	5795	0.55	0.55	21.85	21.05	24.48	30.00	30.00	3.00	3.00	Pass	21
HE80	MCS0	2	155	Full	5775	0.78	0.78	20.81	20.07	23.47	30.00	30.00	3.00	3.00	Pass	20

**TEST RESULTS DATA**  
**Power Spectral Density**

UNII-3																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	Full	5745	0.18	0.18	2.22	8.33	7.69	11.34	29.99	6.01		Pass		
11a	6Mbps	2	157	Full	5785	0.18	0.18	2.22	8.33	7.73	11.34	29.99	6.01		Pass		
11a	6Mbps	2	165	Full	5825	0.18	0.18	2.22	8.36	8.11	11.37	29.99	6.01		Pass		
HE20	MCS0	2	149	Full	5745	0.25	0.25	2.22	7.52	7.16	10.53	29.99	6.01		Pass		
HE20	MCS0	2	157	Full	5785	0.25	0.25	2.22	7.73	7.29	10.74	29.99	6.01		Pass		
HE20	MCS0	2	165	Full	5825	0.25	0.25	2.22	7.79	7.24	10.80	29.99	6.01		Pass		
HE40	MCS0	2	151	Full	5755	0.55	0.55	2.22	5.38	5.07	8.39	29.99	6.01		Pass		
HE40	MCS0	2	159	Full	5795	0.55	0.55	2.22	5.63	4.83	8.64	29.99	6.01		Pass		
HE80	MCS0	2	155	Full	5775	0.78	0.00	2.22	0.73	1.37	4.38	29.99	6.01		Pass		

**TEST RESULTS DATA**  
**Average Power Table**

UNII-1																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
VHT20	MCS0	2	36	Full	5180	0.19	0.19	18.97	19.61	22.32	29.99	6.01		Pass	18	
VHT20	MCS0	2	40	Full	5200	0.19	0.19	21.70	22.40	25.08	29.99	6.01		Pass	21	
VHT20	MCS0	2	48	Full	5240	0.19	0.19	21.74	22.51	25.16	29.99	6.01		Pass	21	
VHT40	MCS0	2	38	Full	5190	0.51	0.51	16.65	17.23	19.96	29.99	6.01		Pass	15.5	
VHT40	MCS0	2	46	Full	5230	0.51	0.51	20.77	21.49	24.16	29.99	6.01		Pass	19.5	
VHT80	MCS0	2	42	Full	5210	0.72	0.72	14.08	14.68	17.40	29.99	6.01		Pass	13	
HE20	MCS0	2	36	Full	5180	0.25	0.25	19.08	19.70	22.41	29.99	6.01		Pass	18	
			40	Full	5200	0.25	0.25	21.87	22.55	25.23	29.99	6.01		Pass	21	
			48	Full	5240	0.25	0.25	21.85	22.63	25.27	29.99	6.01		Pass	21	
HE40	MCS0	2	38	Full	5190	0.55	0.55	16.70	17.29	20.01	29.99	6.01		Pass	15.5	
			46	Full	5230	0.55	0.55	20.83	21.56	24.22	29.99	6.01		Pass	19.5	
HE80	MCS0	2	42	Full	5210	0.78	0.78	14.15	14.76	17.48	29.99	6.01		Pass	13	

**TEST RESULTS DATA**  
**Average Power Table**

UNII-2A																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
VHT20	MCS0	2	52	Full	5260	0.19	0.19	19.21	19.90	22.58	23.97	6.01	30	Pass	19		
VHT20	MCS0	2	60	Full	5300	0.19	0.19	19.10	19.23	22.18	23.97	6.01	30	Pass	18		
VHT20	MCS0	2	64	Full	5320	0.19	0.19	19.11	19.24	22.19	23.97	6.01	30	Pass	18		
VHT40	MCS0	2	54	Full	5270	0.51	0.51	19.44	20.08	22.78	23.97	6.01	30	Pass	19		
VHT40	MCS0	2	62	Full	5310	0.51	0.51	17.11	17.29	20.21	23.97	6.01	30	Pass	16		
VHT80	MCS0	2	58	Full	5290	0.72	0.72	13.20	13.93	16.59	23.97	6.01	30	Pass	13		
HE20	MCS0	2	52	Full	5260	0.25	0.25	19.31	20.00	22.68	23.84	6.01	30	Pass	19		
			60	Full	5300	0.25	0.25	19.22	19.32	22.28	23.85	6.01	30	Pass	18		
			64	Full	5320	0.25	0.25	19.22	19.34	22.29	23.85	6.01	30	Pass	18		
HE40	MCS0	2	54	Full	5270	0.55	0.55	19.54	20.16	22.87	23.97	6.01	30	Pass	19		
			62	Full	5310	0.55	0.55	17.19	17.38	20.29	23.97	6.01	30	Pass	16		
HE80	MCS0	2	58	Full	5290	0.78	0.78	13.27	14.02	16.67	23.97	6.01	30	Pass	13		

**TEST RESULTS DATA**  
**Average Power Table**

UNII-2C																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
VHT20	MCS0	2	100	Full	5500	0.19	0.19	18.76	18.57	21.68	23.97	6.01	30	Pass	17		
VHT20	MCS0	2	116	Full	5580	0.19	0.19	18.90	18.73	21.83	23.97	6.01	30	Pass	17.5		
VHT20	MCS0	2	140	Full	5700	0.19	0.19	17.52	17.19	20.37	23.97	6.01	30	Pass	16		
VHT20	MCS0	2	144	Full	5720	0.19	0.19	19.17	18.85	22.02	23.97	6.01	30	Pass	17.5		
VHT40	MCS0	2	102	Full	5510	0.51	0.51	16.69	16.35	19.54	23.97	6.01	30	Pass	15		
VHT40	MCS0	2	110	Full	5550	0.51	0.51	20.53	20.51	23.53	23.97	6.01	30	Pass	19		
VHT40	MCS0	2	134	Full	5670	0.51	0.51	17.63	17.59	20.62	23.97	6.01	30	Pass	16.5		
VHT40	MCS0	2	142	Full	5710	0.51	0.51	20.66	20.02	23.36	23.97	6.01	30	Pass	19		
VHT80	MCS0	2	106	Full	5530	0.72	0.72	12.73	12.26	15.51	23.97	6.01	30	Pass	11		
VHT80	MCS0	2	122	Full	5610	0.72	0.72	19.50	19.02	22.27	23.97	6.01	30	Pass	18		
VHT80	MCS0	2	138	Full	5690	0.72	0.72	20.22	19.98	23.11	23.97	6.01	30	Pass	19		
HE20	MCS0	2	100	Full	5500	0.25	0.25	18.85	18.68	21.78	23.97	6.01	30	Pass	17		
			116	Full	5580	0.25	0.25	19.00	18.86	21.94	23.97	6.01	30	Pass	17.5		
			140	Full	5700	0.25	0.25	17.63	17.30	20.48	23.97	6.01	30	Pass	16		
			144	Full	5720	0.25	0.25	19.30	18.96	22.14	23.97	6.01	30	Pass	17.5		
HE40	MCS0	2	102	Full	5510	0.55	0.55	16.78	16.44	19.62	23.97	6.01	30	Pass	15		
			110	Full	5550	0.55	0.55	20.63	20.62	23.63	23.97	6.01	30	Pass	19		
			134	Full	5670	0.55	0.55	17.73	17.70	20.72	23.97	6.01	30	Pass	16.5		
			142	Full	5710	0.55	0.55	20.76	20.14	23.47	23.97	6.01	30	Pass	19		
HE80	MCS0	2	106	Full	5530	0.78	0.78	12.80	12.33	15.59	23.97	6.01	30	Pass	11		
			122	Full	5610	0.78	0.78	19.58	19.10	22.36	23.97	6.01	30	Pass	18		
			138	Full	5690	0.78	0.78	20.37	20.18	23.29	23.97	6.01	30	Pass	19		


**TEST RESULTS DATA**  
**Average Power Table**

UNII-3																
Mod.	Data Rate	N <sub>TX</sub>	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
VHT20	MCS0	2	149	Full	5745	0.19	0.19	21.54	21.09	24.33	29.99	6.01		Pass	21	
VHT20	MCS0	2	157	Full	5785	0.19	0.19	21.52	21.05	24.30	29.99	6.01		Pass	21	
VHT20	MCS0	2	165	Full	5825	0.19	0.19	21.50	21.04	24.29	29.99	6.01		Pass	21	
VHT40	MCS0	2	151	Full	5755	0.51	0.51	21.77	21.02	24.42	29.99	6.01		Pass	21	
VHT40	MCS0	2	159	Full	5795	0.51	0.51	21.81	21.03	24.45	29.99	6.01		Pass	21	
VHT80	MCS0	2	155	Full	5775	0.72	0.72	20.74	20.01	23.40	29.99	6.01		Pass	20	
HE20	MCS0	2	149	Full	5745	0.25	0.25	21.64	21.14	24.41	29.99	6.01		Pass	21	
HE20	MCS0	2	157	Full	5785	0.25	0.25	21.62	21.10	24.38	29.99	6.01		Pass	21	
HE20	MCS0	2	165	Full	5825	0.25	0.25	21.61	21.09	24.37	29.99	6.01		Pass	21	
HE40	MCS0	2	151	Full	5755	0.55	0.55	21.81	21.06	24.46	29.99	6.01		Pass	21	
HE40	MCS0	2	159	Full	5795	0.55	0.55	21.85	21.05	24.48	29.99	6.01		Pass	21	
HE80	MCS0	2	155	Full	5775	0.78	0.78	20.81	20.07	23.47	29.99	6.01		Pass	20	



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

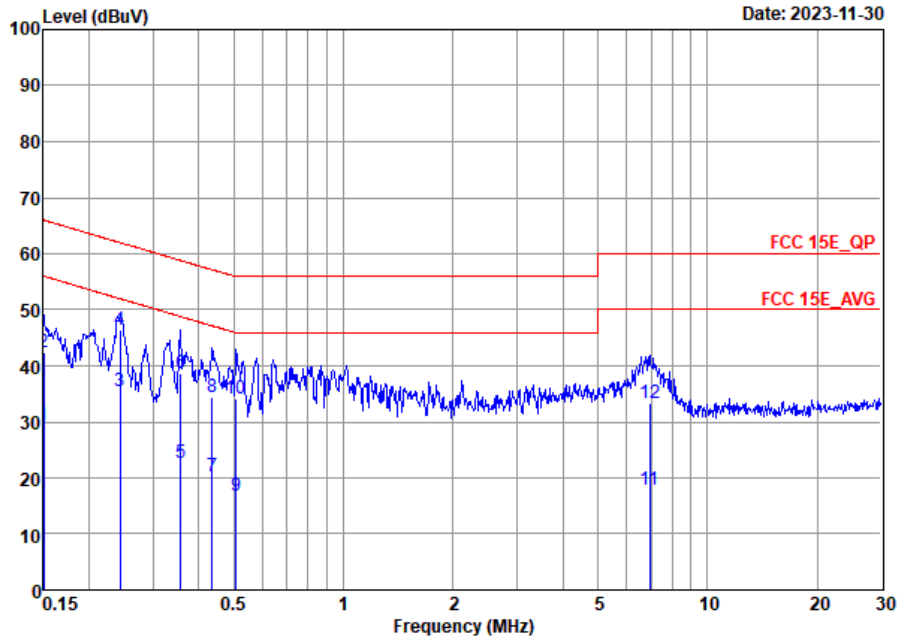


Site : CO01-SZ  
 Condition: FCC 15E\_QP AC LISN 100063\_L LINE  
 Project : 3N1401  
 Mode : Mode 1  
 SN : 22341K0000119

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	29.42	-26.58	56.00	8.90	10.39	10.13	Average
2	0.15	42.42	-23.58	66.00	21.90	10.39	10.13	QP
3	0.24	35.42	-16.58	52.00	15.10	10.17	10.15	Average
4 *	0.24	46.52	-15.48	62.00	26.20	10.17	10.15	QP
5	0.36	22.72	-26.06	48.78	2.29	10.27	10.16	Average
6	0.36	38.72	-20.06	58.78	18.29	10.27	10.16	QP
7	0.44	20.24	-26.91	47.15	-0.30	10.38	10.16	Average
8	0.44	34.44	-22.71	57.15	13.90	10.38	10.16	QP
9	0.51	16.91	-29.09	46.00	-3.50	10.25	10.16	Average
10	0.51	34.11	-21.89	56.00	13.70	10.25	10.16	QP
11	6.95	17.81	-32.19	50.00	-3.00	10.45	10.36	Average
12	6.95	33.31	-26.69	60.00	12.50	10.45	10.36	QP





Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

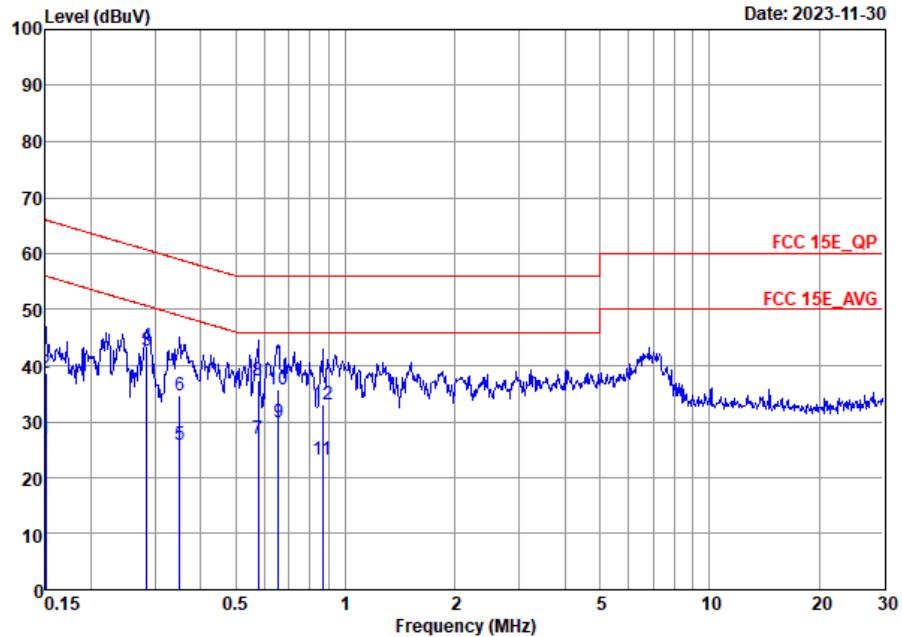

Site : CO01-SZ  
 Condition: FCC 15E\_QP AC LISN 100063\_N NEUTRAL  
 Project : 3N1401  
 Mode : Mode 1  
 SN : 22341K0000119

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	26.86	-29.14	56.00	6.60	10.13	10.13	Average
2	0.15	38.76	-27.24	66.00	18.50	10.13	10.13	QP
3 *	0.28	42.54	-8.14	50.68	22.00	10.39	10.15	Average
4	0.28	43.34	-17.34	60.68	22.80	10.39	10.15	QP
5	0.35	25.79	-23.17	48.96	5.30	10.33	10.16	Average
6	0.35	34.79	-24.17	58.96	14.30	10.33	10.16	QP
7	0.58	27.01	-18.99	46.00	6.70	10.15	10.16	Average
8	0.58	37.31	-18.69	56.00	17.00	10.15	10.16	QP
9	0.65	29.83	-16.17	46.00	9.40	10.27	10.16	Average
10	0.65	35.63	-20.37	56.00	15.20	10.27	10.16	QP
11	0.87	23.10	-22.90	46.00	2.60	10.34	10.16	Average
12	0.87	33.10	-22.90	56.00	12.60	10.34	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

Test Engineer :	Shiwei Wen	Relative Humidity :	50%
		Temperature :	20-22°C

### Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD 1+2	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD 1+2	802.11a	40	5200	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD 1+2	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	CDD 1+2	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	CDD 1+2	802.11ax HE20	40	5200	MCS0	Full RU	-
Mode 6	U-NII-1	5.15-5.25	CDD 1+2	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	CDD 1+2	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 8	U-NII-1	5.15-5.25	CDD 1+2	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	CDD 1+2	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 10	U-NII-2A	5.25-5.35	CDD 1+2	802.11a	52	5260	6Mbps	-	-
Mode 11	U-NII-2A	5.25-5.35	CDD 1+2	802.11a	60	5300	6Mbps	-	-
Mode 12	U-NII-2A	5.25-5.35	CDD 1+2	802.11a	64	5320	6Mbps	-	-
Mode 13	U-NII-2A	5.25-5.35	CDD 1+2	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	CDD 1+2	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	CDD 1+2	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 16	U-NII-2A	5.25-5.35	CDD 1+2	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 17	U-NII-2A	5.25-5.35	CDD 1+2	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	CDD 1+2	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 19	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	100	5500	6Mbps	-	-
Mode 20	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	116	5580	6Mbps	-	-
Mode 21	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	140	5700	6Mbps	-	-
Mode 22	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	144	5720	6Mbps	-	-
Mode 23	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 24	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 25	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 26	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE20	144	5720	MCS0	Full RU	-
Mode 27	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 28	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 29	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 30	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE40	142	5710	MCS0	Full RU	-
Mode 31	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE80	106	5530	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 32	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE80	138	5690	MCS0	Full RU	-
Mode 33	U-NII-3	5.725-5.85	CDD 1+2	802.11a	149	5745	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	CDD 1+2	802.11a	157	5785	6Mbps	-	-
Mode 35	U-NII-3	5.725-5.85	CDD 1+2	802.11a	165	5825	6Mbps	-	-
Mode 36	U-NII-3	5.725-5.85	CDD 1+2	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 37	U-NII-3	5.725-5.85	CDD 1+2	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 38	U-NII-3	5.725-5.85	CDD 1+2	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 39	U-NII-3	5.725-5.85	CDD 1+2	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 40	U-NII-3	5.725-5.85	CDD 1+2	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 41	U-NII-3	5.725-5.85	CDD 1+2	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 42	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	140	5700	6Mbps	-	LF
Mode 43	U-NII-3	5.725-5.85	CDD 1+2	802.11a	149	5745	6Mbps	-	LF
Mode 44	Co-location	2400-2483.5	CDD 1+2	802.11g	01	2412	6Mbps	-	-
		5.47-5.725	CDD 1+2	802.11a	140	5700	6Mbps		
Mode 45	U-NII-2C	5.47-5.725	CDD 1+2	802.11ax HE80	122	5610	MCS0	Full RU	-



Summary of each worse mode

Table with 11 columns: Mode, Modulation, Ch., Freq. (MHz), Level (dBuV/m), Limit (dBuV/m), Margin (dB), Pol., Peak Avg., Result, Remark. It contains 44 rows of test data.



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
23	802.11ax HE20	100	5467.12	66.84	68.30	-1.46	V	Peak	Pass	Band Edge
23	802.11ax HE20	100	11000.00	52.18	54.00	-1.82	V	Average	Pass	Harmonic
24	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
24	802.11ax HE20	116	11160.00	53.27	54.00	-0.73	V	Average	Pass	Harmonic
25	802.11ax HE20	140	5725.16	66.20	68.30	-2.10	V	Peak	Pass	Band Edge
25	802.11ax HE20	140	17100.00	50.81	68.30	-17.49	V	Peak	Pass	Harmonic
26	802.11ax HE20	144	5454.50	41.63	54.00	-12.37	V	Average	Pass	Band Edge
26	802.11ax HE20	144	11440.00	53.26	54.00	-0.74	V	Average	Pass	Harmonic
27	802.11ax HE40	102	5466.40	66.50	68.30	-1.80	V	Peak	Pass	Band Edge
27	802.11ax HE40	102	11020.00	47.20	54.00	-6.80	V	Average	Pass	Harmonic
28	802.11ax HE40	110	5467.60	67.72	68.30	-0.58	V	Peak	Pass	Band Edge
28	802.11ax HE40	110	11100.00	51.02	54.00	-2.98	V	Average	Pass	Harmonic
29	802.11ax HE40	134	5724.93	64.81	68.30	-3.49	V	Peak	Pass	Band Edge
29	802.11ax HE40	134	11340.00	45.56	54.00	-8.44	V	Average	Pass	Harmonic
30	802.11ax HE40	142	5859.30	67.74	68.30	-0.56	V	Peak	Pass	Band Edge
30	802.11ax HE40	142	11420.00	52.82	54.00	-1.18	V	Average	Pass	Harmonic
31	802.11ax HE80	106	5458.24	52.54	54.00	-1.46	V	Average	Pass	Band Edge
31	802.11ax HE80	106	16590.00	50.95	68.30	-17.35	V	Peak	Pass	Harmonic
32	802.11ax HE80	138	5870.30	66.68	68.30	-1.62	V	Peak	Pass	Band Edge
32	802.11ax HE80	138	11380.00	50.29	54.00	-3.71	V	Average	Pass	Harmonic
33	802.11a	149	5648.80	63.44	68.30	-4.86	V	Peak	Pass	Band Edge
33	802.11a	149	11490.00	53.49	54.00	-0.51	V	Average	Pass	Harmonic
34	802.11a	157	-	-	-	-	-	-	-	Band Edge
34	802.11a	157	11570.00	52.98	54.00	-1.02	V	Average	Pass	Harmonic
35	802.11a	165	5927.20	65.28	68.30	-3.02	V	Peak	Pass	Band Edge
35	802.11a	165	11650.00	52.73	54.00	-1.27	V	Average	Pass	Harmonic
36	802.11ax HE20	149	5649.80	67.28	68.30	-1.02	V	Peak	Pass	Band Edge
36	802.11ax HE20	149	11490.00	52.43	54.00	-1.57	V	Average	Pass	Harmonic
37	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
37	802.11ax HE20	157	11570.00	53.04	54.00	-0.96	V	Average	Pass	Harmonic
38	802.11ax HE20	165	5929.00	65.42	68.30	-2.88	V	Peak	Pass	Band Edge
38	802.11ax HE20	165	11650.00	52.47	54.00	-1.53	V	Average	Pass	Harmonic
39	802.11ax HE40	151	5644.40	67.46	68.30	-0.84	V	Peak	Pass	Band Edge
39	802.11ax HE40	151	11510.00	49.01	54.00	-4.99	V	Average	Pass	Harmonic
40	802.11ax HE40	159	5930.20	67.48	68.30	-0.82	V	Peak	Pass	Band Edge
40	802.11ax HE40	159	11590.00	49.97	54.00	-4.03	V	Average	Pass	Harmonic
41	802.11ax HE80	155	5647.80	65.59	68.30	-2.71	V	Peak	Pass	Band Edge
41	802.11ax HE80	155	17325.00	51.61	68.30	-16.69	V	Peak	Pass	Harmonic
42	802.11a	140	772.05	30.87	46	-15.13	V	Peak	Pass	LF
43	802.11a	149	938.89	30.24	46	-15.76	V	Peak	Pass	LF
44	Co-location		5725.40	67.56	68.30	-0.74	V	Peak	Pass	Band Edge
44			11400	51.51	54	-2.49	V	Average	Pass	Harmonic
45	802.11ax HE80	122	5725.10	62.74	68.30	-5.56	V	Peak	Pass	Band Edge
45	802.11ax HE80	122	-	-	-	-	-	-	-	Harmonic



<b>1</b>																																																																																		
<b>Mode</b>	<b>Band Edge</b>																																																																																	
<b>U-NII-1_5.15-5.25_802.11a_CH36_5180MHz</b>																																																																																		
<b>ANT</b>	<b>CDD 1+2</b>																																																																																	
<b>Pol.</b>	<b>Horizontal</b>																																																																																	
<b>Peak</b>	<b>Fundamental</b>																																																																																	
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.82</td> <td>57.52</td> <td>74.00</td> <td>-16.48</td> <td>43.34</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>1 Peak</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.86</td> <td>-----</td> <td>-----</td> <td>88.75</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>1 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>95.37</td> <td>-----</td> <td>-----</td> <td>81.26</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>1 Average</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5144.82	57.52	74.00	-16.48	43.34	34.87	11.09	31.78	100	1 Peak	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	102.86	-----	-----	88.75	34.86	11.07	31.82	100	1 Peak	2	5180.00	95.37	-----	-----	81.26	34.86	11.07	31.82	100	1 Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1	5144.82	57.52	74.00	-16.48	43.34	34.87	11.09	31.78	100	1 Peak																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1	5180.00	102.86	-----	-----	88.75	34.86	11.07	31.82	100	1 Peak																																																																								
2	5180.00	95.37	-----	-----	81.26	34.86	11.07	31.82	100	1 Average																																																																								
<b>Avg</b>	<b>Blank</b>																																																																																	
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>44.71</td> <td>54.00</td> <td>-9.29</td> <td>30.54</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>100</td> <td>1 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	44.71	54.00	-9.29	30.54	34.87	11.08	31.78	100	1 Average																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1	5150.00	44.71	54.00	-9.29	30.54	34.87	11.08	31.78	100	1 Average																																																																								



	<b>1</b>																																																																																					
<b>Mode</b>	<b>Band Edge</b>																																																																																					
	<b>U-NII-1_5.15-5.25_802.11a_CH36_5180MHz</b>																																																																																					
<b>ANT</b>	<b>CDD 1+2</b>																																																																																					
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																				
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.46</td> <td>70.51</td> <td>74.00</td> <td>-3.49</td> <td>56.33</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>11</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.46	70.51	74.00	-3.49	56.33	34.87	11.09	31.78	100	11	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>114.17</td> <td>-----</td> <td>-----</td> <td>100.06</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>11</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>107.63</td> <td>-----</td> <td>-----</td> <td>93.52</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>11</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	114.17	-----	-----	100.06	34.86	11.07	31.82	100	11	Peak	2	5180.00	107.63	-----	-----	93.52	34.86	11.07	31.82	100	11	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5148.46	70.51	74.00	-3.49	56.33	34.87	11.09	31.78	100	11	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5180.00	114.17	-----	-----	100.06	34.86	11.07	31.82	100	11	Peak																																																																											
2	5180.00	107.63	-----	-----	93.52	34.86	11.07	31.82	100	11	Average																																																																											
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.90</td> <td>52.75</td> <td>54.00</td> <td>-1.25</td> <td>38.57</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>11</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5146.90	52.75	54.00	-1.25	38.57	34.87	11.09	31.78	100	11	Average	<b>Blank</b>																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5146.90	52.75	54.00	-1.25	38.57	34.87	11.09	31.78	100	11	Average																																																																											



Mode	1																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																															
ANT	CDD 1+2																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>51.41</td> <td>68.30</td> <td>-16.89</td> <td>48.59</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>51.37</td> <td>74.00</td> <td>-22.63</td> <td>44.13</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	51.41	68.30	-16.89	48.59	39.44	14.15	50.77	--	Peak	2	15540.00	51.37	74.00	-22.63	44.13	41.82	16.85	51.43	--	Peak	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>59.70</td> <td>68.30</td> <td>-8.60</td> <td>56.88</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>43.36</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	59.70	68.30	-8.60	56.88	39.44	14.15	50.77	--	Peak	2	15540.00	50.60	74.00	-23.40	43.36	41.82	16.85	51.43	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10360.00	51.41	68.30	-16.89	48.59	39.44	14.15	50.77	--	Peak																																																																																						
2	15540.00	51.37	74.00	-22.63	44.13	41.82	16.85	51.43	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10360.00	59.70	68.30	-8.60	56.88	39.44	14.15	50.77	--	Peak																																																																																						
2	15540.00	50.60	74.00	-23.40	43.36	41.82	16.85	51.43	--	Peak																																																																																						





Mode	2																																																																																																		
	Harmonic																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz																																																																																																		
ANT	CDD 1+2																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg	<p>Date: 2023-12-12</p>	<p>Date: 2023-12-12</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>59.23</td> <td>68.30</td> <td>-9.07</td> <td>56.37</td> <td>39.46</td> <td>14.18</td> <td>50.78</td> <td>184</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15600.00</td> <td>49.77</td> <td>74.00</td> <td>-24.23</td> <td>42.50</td> <td>41.86</td> <td>16.89</td> <td>51.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10400.00	59.23	68.30	-9.07	56.37	39.46	14.18	50.78	184	88	Peak	2	15600.00	49.77	74.00	-24.23	42.50	41.86	16.89	51.48	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>67.59</td> <td>68.30</td> <td>-0.71</td> <td>64.73</td> <td>39.46</td> <td>14.18</td> <td>50.78</td> <td>362</td> <td>349</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15600.00</td> <td>50.27</td> <td>74.00</td> <td>-23.73</td> <td>43.00</td> <td>41.86</td> <td>16.89</td> <td>51.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10400.00	67.59	68.30	-0.71	64.73	39.46	14.18	50.78	362	349	Peak	2	15600.00	50.27	74.00	-23.73	43.00	41.86	16.89	51.48	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10400.00	59.23	68.30	-9.07	56.37	39.46	14.18	50.78	184	88	Peak																																																																																								
2	15600.00	49.77	74.00	-24.23	42.50	41.86	16.89	51.48	--	--	Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10400.00	67.59	68.30	-0.71	64.73	39.46	14.18	50.78	362	349	Peak																																																																																								
2	15600.00	50.27	74.00	-23.73	43.00	41.86	16.89	51.48	--	--	Peak																																																																																								



		3																																																																																				
Mode	Band Edge - L																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<p style="text-align: right;">Date: 2023-12-10</p>	<p style="text-align: right;">Date: 2023-12-10</p>																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.22</td> <td>53.75</td> <td>74.00</td> <td>-20.25</td> <td>39.56</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>120</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5142.22	53.75	74.00	-20.25	39.56	34.87	11.09	31.77	120	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>105.98</td> <td>-----</td> <td>-----</td> <td>91.99</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>120</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>98.52</td> <td>-----</td> <td>-----</td> <td>84.53</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>120</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5240.00	105.98	-----	-----	91.99	34.85	11.03	31.89	120	0	Peak	2	5240.00	98.52	-----	-----	84.53	34.85	11.03	31.89	120	0
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5142.22	53.75	74.00	-20.25	39.56	34.87	11.09	31.77	120	0	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5240.00	105.98	-----	-----	91.99	34.85	11.03	31.89	120	0	Peak																																																																											
2	5240.00	98.52	-----	-----	84.53	34.85	11.03	31.89	120	0	Average																																																																											
Avg	<p style="text-align: right;">Date: 2023-12-10</p>	Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.16</td> <td>42.60</td> <td>54.00</td> <td>-11.40</td> <td>28.42</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>120</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.16	42.60	54.00	-11.40	28.42	34.87	11.09	31.78	120	0	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5147.16	42.60	54.00	-11.40	28.42	34.87	11.09	31.78	120	0	Average																																																																											



	3																																				
Mode	Band Edge - R																																				
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																				
ANT	CDD 1+2																																				
Pol.	Horizontal	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5397.60</td> <td>51.68</td> <td>74.00</td> <td>-22.32</td> <td>38.04</td> <td>34.82</td> <td>10.91</td> <td>32.09</td> <td>120</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5397.60	51.68	74.00	-22.32	38.04	34.82	10.91	32.09	120	0
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5397.60	51.68	74.00	-22.32	38.04	34.82	10.91	32.09	120	0	Peak																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.52</td> <td>40.73</td> <td>54.00</td> <td>-13.27</td> <td>27.00</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>120</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5357.52	40.73	54.00	-13.27	27.00	34.83	10.94	32.04	120	0
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5357.52	40.73	54.00	-13.27	27.00	34.83	10.94	32.04	120	0	Average																										



	3																																																																																							
Mode	Band Edge - L																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																							
ANT	CDD 1+2																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.08</td> <td>64.90</td> <td>74.00</td> <td>-9.10</td> <td>50.72</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>184</td> <td>352</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.08	64.90	74.00	-9.10	50.72	34.87	11.09	31.78	184	352	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>122.07</td> <td>-----</td> <td>-----</td> <td>108.08</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>184</td> <td>352</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>115.22</td> <td>-----</td> <td>-----</td> <td>101.23</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>184</td> <td>352</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	122.07	-----	-----	108.08	34.85	11.03	31.89	184	352	Peak	2	5240.00	115.22	-----	-----	101.23	34.85	11.03	31.89	184	352	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5145.08	64.90	74.00	-9.10	50.72	34.87	11.09	31.78	184	352	Peak																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5240.00	122.07	-----	-----	108.08	34.85	11.03	31.89	184	352	Peak																																																																													
2	5240.00	115.22	-----	-----	101.23	34.85	11.03	31.89	184	352	Average																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>52.35</td> <td>54.00</td> <td>-1.65</td> <td>38.18</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>184</td> <td>352</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5150.00	52.35	54.00	-1.65	38.18	34.87	11.08	31.78	184	352	Average	Blank																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5150.00	52.35	54.00	-1.65	38.18	34.87	11.08	31.78	184	352	Average																																																																													



	<b>3</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-1_5.15-5.25_802.11a_CH48_5240MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.36</td> <td>59.07</td> <td>74.00</td> <td>-14.93</td> <td>45.34</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>184</td> <td>352</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5355.36	59.07	74.00	-14.93	45.34	34.83	10.94	32.04	184	352	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5355.36	59.07	74.00	-14.93	45.34	34.83	10.94	32.04	184	352	Peak																											
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.60</td> <td>48.42</td> <td>54.00</td> <td>-5.58</td> <td>34.69</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>184</td> <td>352</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5355.60	48.42	54.00	-5.58	34.69	34.83	10.94	32.04	184	352	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5355.60	48.42	54.00	-5.58	34.69	34.83	10.94	32.04	184	352	Average																											



Mode	3																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																
ANT	CDD 1+2																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>60.64</td> <td>68.30</td> <td>-7.66</td> <td>57.72</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>191 86 Peak</td> </tr> <tr> <td>2 15720.00</td> <td>49.69</td> <td>74.00</td> <td>-24.31</td> <td>42.35</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10480.00	60.64	68.30	-7.66	57.72	39.49	14.23	50.80	191 86 Peak	2 15720.00	49.69	74.00	-24.31	42.35	41.93	16.99	51.58	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>67.42</td> <td>68.30</td> <td>-0.88</td> <td>64.50</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>357 345 Peak</td> </tr> <tr> <td>2 15720.00</td> <td>55.24</td> <td>74.00</td> <td>-18.76</td> <td>47.90</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>202 344 Peak</td> </tr> <tr> <td>3 15720.00</td> <td>46.58</td> <td>54.00</td> <td>-7.42</td> <td>39.24</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>202 344 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10480.00	67.42	68.30	-0.88	64.50	39.49	14.23	50.80	357 345 Peak	2 15720.00	55.24	74.00	-18.76	47.90	41.93	16.99	51.58	202 344 Peak	3 15720.00	46.58	54.00	-7.42	39.24	41.93	16.99	51.58	202 344 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1 10480.00	60.64	68.30	-7.66	57.72	39.49	14.23	50.80	191 86 Peak																																																																																									
2 15720.00	49.69	74.00	-24.31	42.35	41.93	16.99	51.58	-- -- Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1 10480.00	67.42	68.30	-0.88	64.50	39.49	14.23	50.80	357 345 Peak																																																																																									
2 15720.00	55.24	74.00	-18.76	47.90	41.93	16.99	51.58	202 344 Peak																																																																																									
3 15720.00	46.58	54.00	-7.42	39.24	41.93	16.99	51.58	202 344 Average																																																																																									



<b>4</b>																																																									
<b>Mode</b>	<b>Band Edge</b>																																																								
<b>U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz</b>																																																									
<b>ANT</b>	<b>CDD 1+2</b>																																																								
<b>Pol.</b>	<b>Horizontal</b>																																																								
<b>Peak</b>	<b>Fundamental</b>																																																								
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.56</td> <td>58.57</td> <td>74.00</td> <td>-15.43</td> <td>44.38</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>100</td> <td>255</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5144.56	58.57	74.00	-15.43	44.38	34.87	11.09	31.77	100	255	Peak												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
						cm	deg																																																		
1	5144.56	58.57	74.00	-15.43	44.38	34.87	11.09	31.77	100	255	Peak																																														
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.36</td> <td>-----</td> <td>-----</td> <td>91.25</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>255</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>98.22</td> <td>-----</td> <td>-----</td> <td>84.11</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>255</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5180.00	105.36	-----	-----	91.25	34.86	11.07	31.82	100	255	Peak	2	5180.00	98.22	-----	-----	84.11	34.86	11.07	31.82	100	255	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
						cm	deg																																																		
1	5180.00	105.36	-----	-----	91.25	34.86	11.07	31.82	100	255	Peak																																														
2	5180.00	98.22	-----	-----	84.11	34.86	11.07	31.82	100	255	Average																																														
<b>Avg</b>	<b>Blank</b>																																																								
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.50</td> <td>46.44</td> <td>54.00</td> <td>-7.56</td> <td>32.26</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>255</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5149.50	46.44	54.00	-7.56	32.26	34.87	11.09	31.78	100	255	Average												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																		
						cm	deg																																																		
1	5149.50	46.44	54.00	-7.56	32.26	34.87	11.09	31.78	100	255	Average																																														





		<b>4</b>																																																																																				
<b>Mode</b>	<b>Band Edge</b>																																																																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz</b>																																																																																					
<b>ANT</b>	<b>CDD 1+2</b>																																																																																					
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.46</td> <td>68.16</td> <td>74.00</td> <td>-5.84</td> <td>53.98</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>10</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.46	68.16	74.00	-5.84	53.98	34.87	11.09	31.78	100	10	Peak	<p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>115.30</td> <td>-----</td> <td>101.19</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>10</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>108.70</td> <td>-----</td> <td>94.59</td> <td>34.86</td> <td>11.07</td> <td>31.82</td> <td>100</td> <td>10</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	115.30	-----	101.19	34.86	11.07	31.82	100	10	Peak	2	5180.00	108.70	-----	94.59	34.86	11.07	31.82	100	10	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5148.46	68.16	74.00	-5.84	53.98	34.87	11.09	31.78	100	10	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5180.00	115.30	-----	101.19	34.86	11.07	31.82	100	10	Peak																																																																												
2	5180.00	108.70	-----	94.59	34.86	11.07	31.82	100	10	Average																																																																												
<b>Avg</b>	<p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.72</td> <td>52.62</td> <td>54.00</td> <td>-1.38</td> <td>38.44</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>10</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.72	52.62	54.00	-1.38	38.44	34.87	11.09	31.78	100	10	Average	<b>Blank</b>																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5148.72	52.62	54.00	-1.38	38.44	34.87	11.09	31.78	100	10	Average																																																																											





Mode	4																																																																																														
	Harmonic																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																														
ANT	CDD 1+2																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>50.38</td> <td>68.30</td> <td>-17.92</td> <td>47.56</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>51.90</td> <td>74.00</td> <td>-22.10</td> <td>44.66</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	50.38	68.30	-17.92	47.56	39.44	14.15	50.77	-- -- Peak	2	15540.00	51.90	74.00	-22.10	44.66	41.82	16.85	51.43	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>55.87</td> <td>68.30</td> <td>-12.43</td> <td>53.05</td> <td>39.44</td> <td>14.15</td> <td>50.77</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.90</td> <td>74.00</td> <td>-23.10</td> <td>43.66</td> <td>41.82</td> <td>16.85</td> <td>51.43</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	55.87	68.30	-12.43	53.05	39.44	14.15	50.77	-- -- Peak	2	15540.00	50.90	74.00	-23.10	43.66	41.82	16.85	51.43
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10360.00	50.38	68.30	-17.92	47.56	39.44	14.15	50.77	-- -- Peak																																																																																						
2	15540.00	51.90	74.00	-22.10	44.66	41.82	16.85	51.43	-- -- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10360.00	55.87	68.30	-12.43	53.05	39.44	14.15	50.77	-- -- Peak																																																																																						
2	15540.00	50.90	74.00	-23.10	43.66	41.82	16.85	51.43	-- -- Peak																																																																																						

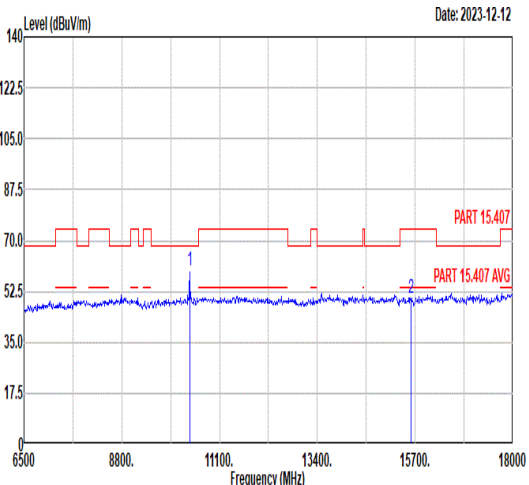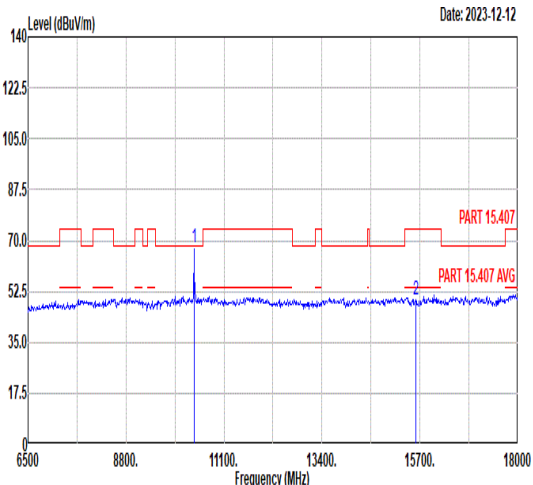

Mode	5																																																																																																		
	Harmonic																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH40_Full RU_5200MHz																																																																																																		
ANT	CDD 1+2																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg	 <p>Level (dBuV/m) vs Frequency (MHz) - Horizontal</p>	 <p>Level (dBuV/m) vs Frequency (MHz) - Vertical</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>59.62</td> <td>68.30</td> <td>-8.68</td> <td>56.76</td> <td>39.46</td> <td>14.18</td> <td>50.78</td> <td>185</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15600.00</td> <td>50.29</td> <td>74.00</td> <td>-23.71</td> <td>43.02</td> <td>41.86</td> <td>16.89</td> <td>51.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10400.00	59.62	68.30	-8.68	56.76	39.46	14.18	50.78	185	88	Peak	2	15600.00	50.29	74.00	-23.71	43.02	41.86	16.89	51.48	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>67.45</td> <td>68.30</td> <td>-0.85</td> <td>64.59</td> <td>39.46</td> <td>14.18</td> <td>50.78</td> <td>362</td> <td>350</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15600.00</td> <td>49.62</td> <td>74.00</td> <td>-24.38</td> <td>42.35</td> <td>41.86</td> <td>16.89</td> <td>51.48</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10400.00	67.45	68.30	-0.85	64.59	39.46	14.18	50.78	362	350	Peak	2	15600.00	49.62	74.00	-24.38	42.35	41.86	16.89	51.48	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10400.00	59.62	68.30	-8.68	56.76	39.46	14.18	50.78	185	88	Peak																																																																																								
2	15600.00	50.29	74.00	-23.71	43.02	41.86	16.89	51.48	--	--	Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10400.00	67.45	68.30	-0.85	64.59	39.46	14.18	50.78	362	350	Peak																																																																																								
2	15600.00	49.62	74.00	-24.38	42.35	41.86	16.89	51.48	--	--	Peak																																																																																								



		<b>6</b>																																																																																											
<b>Mode</b>	<b>Band Edge - L</b>																																																																																												
	<b>U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz</b>																																																																																												
<b>ANT</b>	<b>CDD 1+2</b>																																																																																												
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																											
<b>Peak</b>																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.86</td> <td>55.45</td> <td>74.00</td> <td>-18.55</td> <td>41.27</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>255</td> <td>Peak</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.86	55.45	74.00	-18.55	41.27	34.87	11.09	31.78	100	255	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>112.92</td> <td>-----</td> <td>98.93</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>100</td> <td>255</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>105.75</td> <td>-----</td> <td>91.76</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>100</td> <td>255</td> <td>Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	112.92	-----	98.93	34.85	11.03	31.89	100	255	Peak	2	5240.00	105.75	-----	91.76	34.85	11.03	31.89	100	255
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5145.86	55.45	74.00	-18.55	41.27	34.87	11.09	31.78	100	255	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5240.00	112.92	-----	98.93	34.85	11.03	31.89	100	255	Peak																																																																																			
2	5240.00	105.75	-----	91.76	34.85	11.03	31.89	100	255	Average																																																																																			
<b>Avg</b>			<b>Blank</b>																																																																																										
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.24</td> <td>45.62</td> <td>54.00</td> <td>-8.38</td> <td>31.44</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>255</td> <td>Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.24	45.62	54.00	-8.38	31.44	34.87	11.09	31.78	100	255	Average																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor		Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5149.24	45.62	54.00	-8.38	31.44	34.87	11.09	31.78	100	255	Average																																																																																		



	<b>6</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.92</td> <td>54.10</td> <td>74.00</td> <td>-19.90</td> <td>40.36</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>255</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5353.92	54.10	74.00	-19.90	40.36	34.83	10.94	32.03	100	255	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5353.92	54.10	74.00	-19.90	40.36	34.83	10.94	32.03	100	255	Peak																											
<b>Avg</b>	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.52</td> <td>43.14</td> <td>54.00</td> <td>-10.86</td> <td>29.40</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>255</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.52	43.14	54.00	-10.86	29.40	34.83	10.94	32.03	100	255	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5351.52	43.14	54.00	-10.86	29.40	34.83	10.94	32.03	100	255	Average																											



		<b>6</b>																																																																																		
<b>Mode</b>	<b>Band Edge - L</b>																																																																																			
	<b>U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz</b>																																																																																			
<b>ANT</b>	<b>CDD 1+2</b>																																																																																			
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																		
<b>Peak</b>																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.46</td> <td>65.15</td> <td>74.00</td> <td>-8.85</td> <td>50.97</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>179</td> <td>355</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.46	65.15	74.00	-8.85	50.97	34.87	11.09	31.78	179	355	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>120.45</td> <td>-----</td> <td>106.46</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>179</td> <td>355</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5240.00</td> <td>112.84</td> <td>-----</td> <td>98.85</td> <td>34.85</td> <td>11.03</td> <td>31.89</td> <td>179</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5240.00	120.45	-----	106.46	34.85	11.03	31.89	179	355	Peak	2	5240.00	112.84	-----	98.85	34.85	11.03	31.89	179	355
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5148.46	65.15	74.00	-8.85	50.97	34.87	11.09	31.78	179	355	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5240.00	120.45	-----	106.46	34.85	11.03	31.89	179	355	Peak																																																																										
2	5240.00	112.84	-----	98.85	34.85	11.03	31.89	179	355	Average																																																																										
<b>Avg</b>		<b>Blank</b>																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>52.45</td> <td>54.00</td> <td>-1.55</td> <td>38.28</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>179</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	52.45	54.00	-1.55	38.28	34.87	11.08	31.78	179	355	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5150.00	52.45	54.00	-1.55	38.28	34.87	11.08	31.78	179	355	Average																																																																									



	<b>6</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.20</td> <td>59.21</td> <td>74.00</td> <td>-14.79</td> <td>45.47</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>179</td> <td>355</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5353.20	59.21	74.00	-14.79	45.47	34.83	10.94	32.03	179	355	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5353.20	59.21	74.00	-14.79	45.47	34.83	10.94	32.03	179	355	Peak																											
<b>Avg</b>	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.72</td> <td>47.62</td> <td>54.00</td> <td>-6.38</td> <td>33.88</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>179</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.72	47.62	54.00	-6.38	33.88	34.83	10.94	32.03	179	355	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5352.72	47.62	54.00	-6.38	33.88	34.83	10.94	32.03	179	355	Average																											



Mode	6																																																																																											
	Harmonic																																																																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>59.34</td> <td>68.30</td> <td>-8.96</td> <td>56.42</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>185</td> <td>88 Peak</td> </tr> <tr> <td>2 15720.00</td> <td>49.71</td> <td>74.00</td> <td>-24.29</td> <td>42.37</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 10480.00	59.34	68.30	-8.96	56.42	39.49	14.23	50.80	185	88 Peak	2 15720.00	49.71	74.00	-24.29	42.37	41.93	16.99	51.58	--	-- Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>67.67</td> <td>68.30</td> <td>-0.63</td> <td>64.75</td> <td>39.49</td> <td>14.23</td> <td>50.80</td> <td>358</td> <td>345 Peak</td> </tr> <tr> <td>2 15720.00</td> <td>55.35</td> <td>74.00</td> <td>-18.65</td> <td>48.01</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>3 15720.00</td> <td>46.50</td> <td>54.00</td> <td>-7.50</td> <td>39.16</td> <td>41.93</td> <td>16.99</td> <td>51.58</td> <td>263</td> <td>340 Average</td> </tr> </tbody> </table>	Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 10480.00	67.67	68.30	-0.63	64.75	39.49	14.23	50.80	358	345 Peak	2 15720.00	55.35	74.00	-18.65	48.01	41.93	16.99	51.58	--	-- Peak	3 15720.00	46.50	54.00	-7.50	39.16	41.93	16.99	51.58	263	340 Average
	Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10480.00	59.34	68.30	-8.96	56.42	39.49	14.23	50.80	185	88 Peak																																																																																			
2 15720.00	49.71	74.00	-24.29	42.37	41.93	16.99	51.58	--	-- Peak																																																																																			
Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10480.00	67.67	68.30	-0.63	64.75	39.49	14.23	50.80	358	345 Peak																																																																																			
2 15720.00	55.35	74.00	-18.65	48.01	41.93	16.99	51.58	--	-- Peak																																																																																			
3 15720.00	46.50	54.00	-7.50	39.16	41.93	16.99	51.58	263	340 Average																																																																																			






		7																																																																																	
Mode	Band Edge - L																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																		
ANT	CDD 1+2																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>53.46</td> <td>74.00</td> <td>-20.54</td> <td>39.28</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>136</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.42	53.46	74.00	-20.54	39.28	34.87	11.09	31.78	136	0 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>97.84</td> <td>-----</td> <td>-----</td> <td>83.75</td> <td>34.86</td> <td>11.06</td> <td>31.83</td> <td>136</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5190.00</td> <td>90.36</td> <td>-----</td> <td>-----</td> <td>76.27</td> <td>34.86</td> <td>11.06</td> <td>31.83</td> <td>136</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	97.84	-----	-----	83.75	34.86	11.06	31.83	136	0 Peak	2	5190.00	90.36	-----	-----	76.27	34.86	11.06	31.83	136
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5147.42	53.46	74.00	-20.54	39.28	34.87	11.09	31.78	136	0 Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5190.00	97.84	-----	-----	83.75	34.86	11.06	31.83	136	0 Peak																																																																									
2	5190.00	90.36	-----	-----	76.27	34.86	11.06	31.83	136	0 Average																																																																									
Avg		Blank																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>42.85</td> <td>54.00</td> <td>-11.15</td> <td>28.68</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>136</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	42.85	54.00	-11.15	28.68	34.87	11.08	31.78	136	0 Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5150.00	42.85	54.00	-11.15	28.68	34.87	11.08	31.78	136	0 Average																																																																									





	7																																						
Mode	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																						
ANT	CDD 1+2																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5443.48</td> <td>52.14</td> <td>74.00</td> <td>-21.86</td> <td>38.42</td> <td>34.81</td> <td>11.05</td> <td>32.14</td> <td>136</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5443.48	52.14	74.00	-21.86	38.42	34.81	11.05	32.14	136	0	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5443.48	52.14	74.00	-21.86	38.42	34.81	11.05	32.14	136	0	Peak																												
Blank																																							
Avg	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5404.84</td> <td>41.63</td> <td>54.00</td> <td>-12.37</td> <td>28.01</td> <td>34.82</td> <td>10.90</td> <td>32.10</td> <td>136</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5404.84	41.63	54.00	-12.37	28.01	34.82	10.90	32.10	136	0	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5404.84	41.63	54.00	-12.37	28.01	34.82	10.90	32.10	136	0	Average																												
Blank																																							

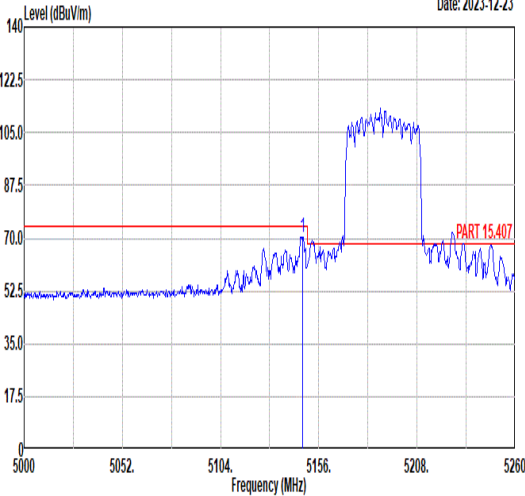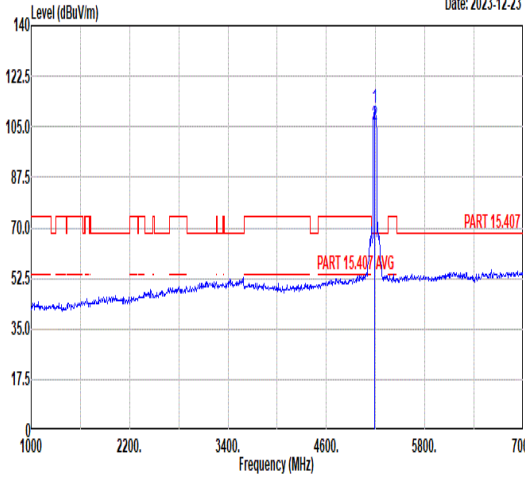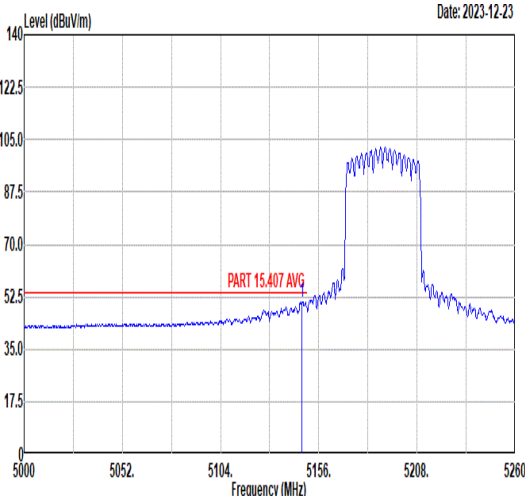

7																																																																																			
<b>Mode</b>	<b>Band Edge - L</b>																																																																																		
<b>U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz</b>																																																																																			
<b>ANT</b>	<b>CDD 1+2</b>																																																																																		
<b>Pol.</b>	<b>Vertical</b>																																																																																		
<b>Peak</b>	<b>Fundamental</b>																																																																																		
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;">  <p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>70.44</td> <td>74.00</td> <td>-3.56</td> <td>56.26</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>11</td> <td>Peak</td> </tr> </tbody> </table> </div> <div style="width: 48%;">  <p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>111.52</td> <td>-----</td> <td>97.43</td> <td>34.86</td> <td>11.06</td> <td>31.83</td> <td>100</td> <td>11</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5190.00</td> <td>105.55</td> <td>-----</td> <td>91.46</td> <td>34.86</td> <td>11.06</td> <td>31.83</td> <td>100</td> <td>11</td> <td>Average</td> </tr> </tbody> </table> </div> </div>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.42	70.44	74.00	-3.56	56.26	34.87	11.09	31.78	100	11	Peak	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	111.52	-----	97.43	34.86	11.06	31.83	100	11	Peak	2	5190.00	105.55	-----	91.46	34.86	11.06	31.83	100	11	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5147.42	70.44	74.00	-3.56	56.26	34.87	11.09	31.78	100	11	Peak																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5190.00	111.52	-----	97.43	34.86	11.06	31.83	100	11	Peak																																																																									
2	5190.00	105.55	-----	91.46	34.86	11.06	31.83	100	11	Average																																																																									
<b>Avg</b>	<b>Blank</b>																																																																																		
<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;">  <p style="text-align: right;">Date: 2023-12-23</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.16</td> <td>50.94</td> <td>54.00</td> <td>-3.06</td> <td>36.76</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>11</td> <td>Average</td> </tr> </tbody> </table> </div> <div style="width: 48%; text-align: center;"> <p><b>Blank</b></p> </div> </div>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.16	50.94	54.00	-3.06	36.76	34.87	11.09	31.78	100	11	Average																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5147.16	50.94	54.00	-3.06	36.76	34.87	11.09	31.78	100	11	Average																																																																								



	7																																				
Mode	Band Edge - R																																				
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																				
ANT	CDD 1+2																																				
Pol.	Vertical	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5382.44</td> <td>53.54</td> <td>74.00</td> <td>-20.46</td> <td>39.87</td> <td>34.82</td> <td>10.92</td> <td>32.07</td> <td>100</td> <td>11</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5382.44	53.54	74.00	-20.46	39.87	34.82	10.92	32.07	100	11
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5382.44	53.54	74.00	-20.46	39.87	34.82	10.92	32.07	100	11	Peak																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.52</td> <td>42.83</td> <td>54.00</td> <td>-11.17</td> <td>29.09</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>11</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.52	42.83	54.00	-11.17	29.09	34.83	10.94	32.03	100	11
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5350.52	42.83	54.00	-11.17	29.09	34.83	10.94	32.03	100	11	Average																										



Mode	7																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																															
ANT	CDD 1+2																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>49.25</td> <td>68.30</td> <td>-19.05</td> <td>46.42</td> <td>39.45</td> <td>14.16</td> <td>50.78</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>50.14</td> <td>74.00</td> <td>-23.86</td> <td>42.89</td> <td>41.84</td> <td>16.87</td> <td>51.46</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10380.00	49.25	68.30	-19.05	46.42	39.45	14.16	50.78	--	Peak	2	15570.00	50.14	74.00	-23.86	42.89	41.84	16.87	51.46	--	Peak	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>57.27</td> <td>68.30</td> <td>-11.03</td> <td>54.44</td> <td>39.45</td> <td>14.16</td> <td>50.78</td> <td>364</td> <td>347 Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>49.82</td> <td>74.00</td> <td>-24.18</td> <td>42.57</td> <td>41.84</td> <td>16.87</td> <td>51.46</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10380.00	57.27	68.30	-11.03	54.44	39.45	14.16	50.78	364	347 Peak	2	15570.00	49.82	74.00	-24.18	42.57	41.84	16.87	51.46	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10380.00	49.25	68.30	-19.05	46.42	39.45	14.16	50.78	--	Peak																																																																																						
2	15570.00	50.14	74.00	-23.86	42.89	41.84	16.87	51.46	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10380.00	57.27	68.30	-11.03	54.44	39.45	14.16	50.78	364	347 Peak																																																																																						
2	15570.00	49.82	74.00	-24.18	42.57	41.84	16.87	51.46	--	Peak																																																																																						






		<b>8</b>																																																																																																		
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																			
	<b>U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz</b>																																																																																																			
<b>ANT</b>	<b>CDD 1+2</b>																																																																																																			
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																																		
<b>Peak</b>																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.64</td> <td>56.85</td> <td>74.00</td> <td>-17.15</td> <td>42.67</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>117</td> <td>0 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5146.64	56.85	74.00	-17.15	42.67	34.87	11.09	31.78	117	0 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>100.66</td> <td>-----</td> <td>-----</td> <td>86.65</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>117</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5230.00</td> <td>93.38</td> <td>-----</td> <td>-----</td> <td>79.37</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>117</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5230.00	100.66	-----	-----	86.65	34.85	11.04	31.88	117	0 Peak	2	5230.00	93.38	-----	-----	79.37	34.85	11.04	31.88	117
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5146.64	56.85	74.00	-17.15	42.67	34.87	11.09	31.78	117	0 Peak																																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5230.00	100.66	-----	-----	86.65	34.85	11.04	31.88	117	0 Peak																																																																																										
2	5230.00	93.38	-----	-----	79.37	34.85	11.04	31.88	117	0 Average																																																																																										
<b>Avg</b>			<b>Blank</b>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.68</td> <td>43.49</td> <td>54.00</td> <td>-10.51</td> <td>29.31</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>117</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5147.68	43.49	54.00	-10.51	29.31	34.87	11.09	31.78	117	0 Average																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5147.68	43.49	54.00	-10.51	29.31	34.87	11.09	31.78	117	0 Average																																																																																										





	<b>8</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.16</td> <td>51.39</td> <td>74.00</td> <td>-22.61</td> <td>37.65</td> <td>34.81</td> <td>11.08</td> <td>32.15</td> <td>117</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5450.16	51.39	74.00	-22.61	37.65	34.81	11.08	32.15	117	0	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5450.16	51.39	74.00	-22.61	37.65	34.81	11.08	32.15	117	0	Peak																											
<b>Avg</b>	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5403.12</td> <td>41.51</td> <td>54.00</td> <td>-12.49</td> <td>27.88</td> <td>34.82</td> <td>10.90</td> <td>32.09</td> <td>117</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5403.12	41.51	54.00	-12.49	27.88	34.82	10.90	32.09	117	0	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5403.12	41.51	54.00	-12.49	27.88	34.82	10.90	32.09	117	0	Average																											

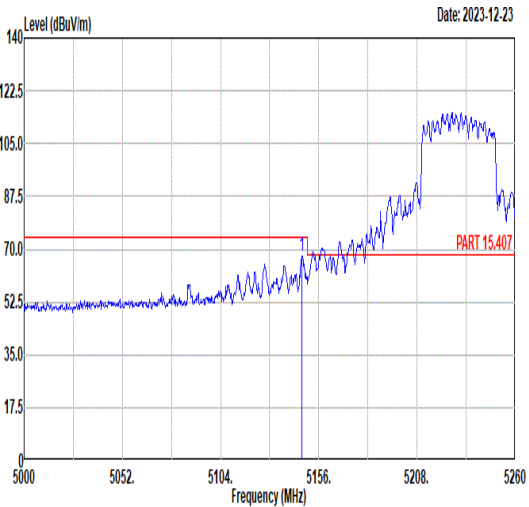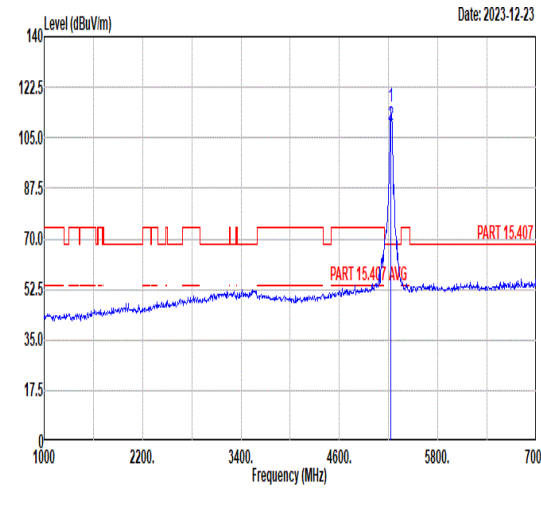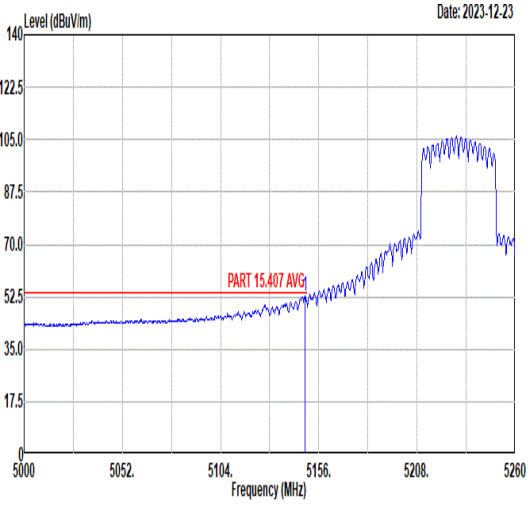

		<b>8</b>																																																																																																		
<b>Mode</b>	<b>Band Edge - L</b>																																																																																																			
	<b>U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz</b>																																																																																																			
<b>ANT</b>	<b>CDD 1+2</b>																																																																																																			
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																																		
<b>Peak</b>	 <p style="text-align: right;">Date: 2023-12-23</p>		 <p style="text-align: right;">Date: 2023-12-23</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.90</td> <td>67.64</td> <td>74.00</td> <td>-6.36</td> <td>53.46</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>5 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5146.90	67.64	74.00	-6.36	53.46	34.87	11.09	31.78	100	5 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>115.91</td> <td>-----</td> <td>-----</td> <td>101.90</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>100</td> <td>5 Peak</td> </tr> <tr> <td>2</td> <td>5230.00</td> <td>109.47</td> <td>-----</td> <td>-----</td> <td>95.46</td> <td>34.85</td> <td>11.04</td> <td>31.88</td> <td>100</td> <td>5 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5230.00	115.91	-----	-----	101.90	34.85	11.04	31.88	100	5 Peak	2	5230.00	109.47	-----	-----	95.46	34.85	11.04	31.88	100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5146.90	67.64	74.00	-6.36	53.46	34.87	11.09	31.78	100	5 Peak																																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5230.00	115.91	-----	-----	101.90	34.85	11.04	31.88	100	5 Peak																																																																																										
2	5230.00	109.47	-----	-----	95.46	34.85	11.04	31.88	100	5 Average																																																																																										
<b>Avg</b>	 <p style="text-align: right;">Date: 2023-12-23</p>		<b>Blank</b>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.72</td> <td>52.91</td> <td>54.00</td> <td>-1.09</td> <td>38.73</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>5 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5148.72	52.91	54.00	-1.09	38.73	34.87	11.09	31.78	100	5 Average																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5148.72	52.91	54.00	-1.09	38.73	34.87	11.09	31.78	100	5 Average																																																																																										

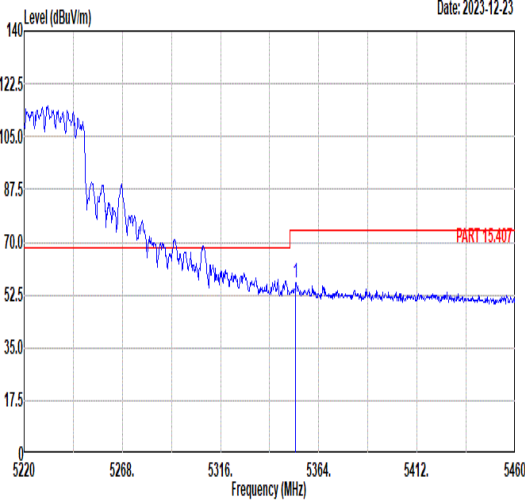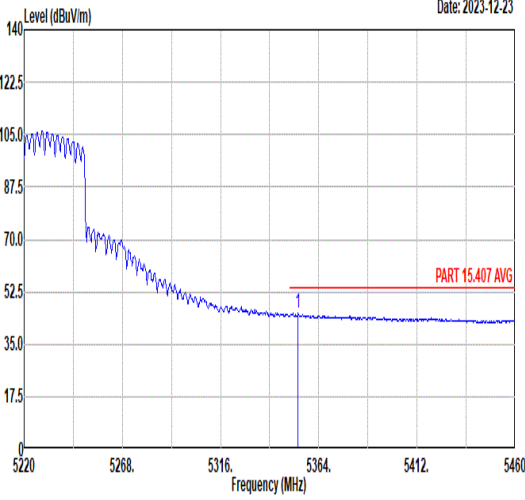

	<b>8</b>																																					
Mode	<b>Band Edge - R</b>																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz</b>																																					
ANT	<b>CDD 1+2</b>																																					
Pol.	<b>Vertical</b>	<b>Fundamental</b>																																				
Peak	 <table border="1" data-bbox="268 1115 735 1238"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.72</td> <td>56.67</td> <td>74.00</td> <td>-17.33</td> <td>42.93</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>5</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.72	56.67	74.00	-17.33	42.93	34.83	10.94	32.03	100	5	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5352.72	56.67	74.00	-17.33	42.93	34.83	10.94	32.03	100	5	Peak																											
Avg	 <table border="1" data-bbox="268 1796 735 1919"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.92</td> <td>45.37</td> <td>54.00</td> <td>-8.63</td> <td>31.63</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>5</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5353.92	45.37	54.00	-8.63	31.63	34.83	10.94	32.03	100	5	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5353.92	45.37	54.00	-8.63	31.63	34.83	10.94	32.03	100	5	Average																											





Mode	8																																																																																																			
	Harmonic																																																																																																			
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>54.63</td> <td>68.30</td> <td>-13.67</td> <td>51.73</td> <td>39.48</td> <td>14.21</td> <td>50.79</td> <td>187</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>51.32</td> <td>74.00</td> <td>-22.68</td> <td>43.99</td> <td>41.91</td> <td>16.97</td> <td>51.55</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10460.00	54.63	68.30	-13.67	51.73	39.48	14.21	50.79	187	88	Peak	2	15690.00	51.32	74.00	-22.68	43.99	41.91	16.97	51.55	--	--	Peak	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>59.97</td> <td>68.30</td> <td>-8.33</td> <td>57.07</td> <td>39.48</td> <td>14.21</td> <td>50.79</td> <td>349</td> <td>347</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>49.85</td> <td>74.00</td> <td>-24.15</td> <td>42.52</td> <td>41.91</td> <td>16.97</td> <td>51.55</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10460.00	59.97	68.30	-8.33	57.07	39.48	14.21	50.79	349	347	Peak	2	15690.00	49.85	74.00	-24.15	42.52	41.91	16.97	51.55	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10460.00	54.63	68.30	-13.67	51.73	39.48	14.21	50.79	187	88	Peak																																																																																									
2	15690.00	51.32	74.00	-22.68	43.99	41.91	16.97	51.55	--	--	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10460.00	59.97	68.30	-8.33	57.07	39.48	14.21	50.79	349	347	Peak																																																																																									
2	15690.00	49.85	74.00	-24.15	42.52	41.91	16.97	51.55	--	--	Peak																																																																																									






		<b>9</b>																																																																																								
<b>Mode</b>	<b>Band Edge - L</b>																																																																																									
	<b>U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz</b>																																																																																									
<b>ANT</b>	<b>CDD 1+2</b>																																																																																									
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																								
<b>Peak</b>																																																																																										
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Level</th> <th>Level</th> <th>Remark</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5131.82</td> <td>53.16</td> <td>74.00</td> <td>-20.84</td> <td>38.95</td> <td>34.87</td> <td>11.10</td> <td>31.76</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Level	Loss	Level	Level	Remark	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5131.82	53.16	74.00	-20.84	38.95	34.87	11.10	31.76	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Level</th> <th>Level</th> <th>Remark</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>93.56</td> <td>-----</td> <td>79.51</td> <td>34.86</td> <td>11.05</td> <td>31.86</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5210.00</td> <td>86.58</td> <td>-----</td> <td>72.53</td> <td>34.86</td> <td>11.05</td> <td>31.86</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Level	Loss	Level	Level	Remark	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	93.56	-----	79.51	34.86	11.05	31.86	100	360	Peak	2	5210.00	86.58	-----	72.53	34.86	11.05	31.86	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Level	Loss	Level	Level	Remark	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5131.82	53.16	74.00	-20.84	38.95	34.87	11.10	31.76	100	360	Peak																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Level	Loss	Level	Level	Remark	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5210.00	93.56	-----	79.51	34.86	11.05	31.86	100	360	Peak																																																																																
2	5210.00	86.58	-----	72.53	34.86	11.05	31.86	100	360	Average																																																																																
<b>Avg</b>		<b>Blank</b>																																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Level</th> <th>Level</th> <th>Remark</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.24</td> <td>44.49</td> <td>54.00</td> <td>-9.51</td> <td>30.31</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Level	Loss	Level	Level	Remark	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.24	44.49	54.00	-9.51	30.31	34.87	11.09	31.78	100	360	Average																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Level	Loss	Level	Level	Remark	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.24	44.49	54.00	-9.51	30.31	34.87	11.09	31.78	100	360	Average																																																																															



	<b>9</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.44</td> <td>51.85</td> <td>74.00</td> <td>-22.15</td> <td>38.11</td> <td>34.81</td> <td>11.08</td> <td>32.15</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5449.44	51.85	74.00	-22.15	38.11	34.81	11.08	32.15	100	360	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5449.44	51.85	74.00	-22.15	38.11	34.81	11.08	32.15	100	360	Peak																											
<b>Avg</b>	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.48</td> <td>43.27</td> <td>54.00</td> <td>-10.73</td> <td>29.53</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.48	43.27	54.00	-10.73	29.53	34.83	10.94	32.03	100	360	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5352.48	43.27	54.00	-10.73	29.53	34.83	10.94	32.03	100	360	Average																											

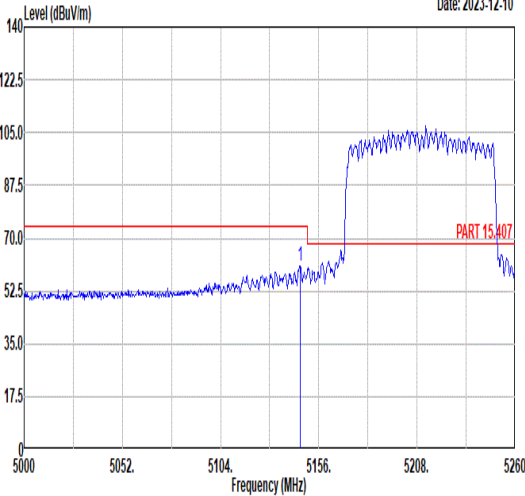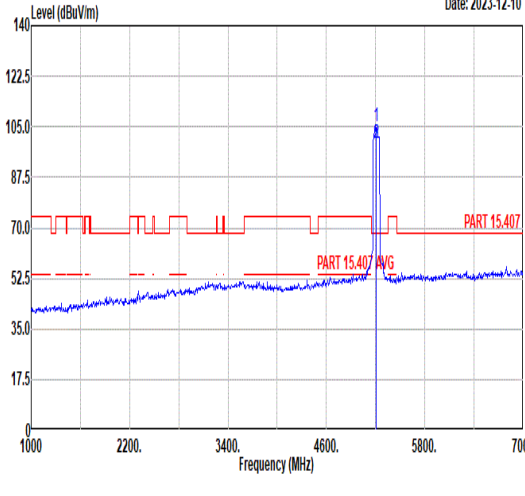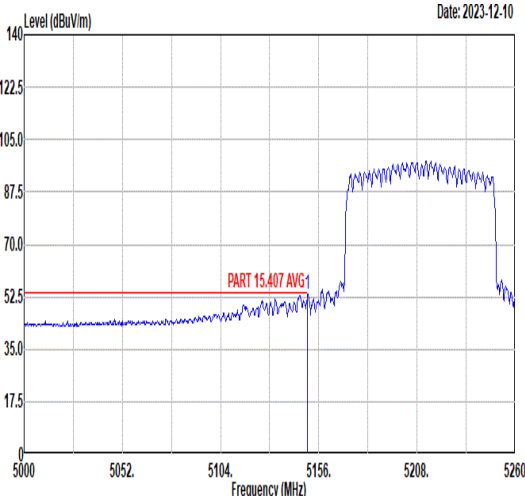

	<b>9</b>																																																																																					
<b>Mode</b>	<b>Band Edge - L</b>																																																																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz</b>																																																																																					
<b>ANT</b>	<b>CDD 1+2</b>																																																																																					
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																				
<b>Peak</b>	 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.12</td> <td>60.96</td> <td>74.00</td> <td>-13.04</td> <td>46.78</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>120</td> <td>318</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5146.12	60.96	74.00	-13.04	46.78	34.87	11.09	31.78	120	318	Peak	 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>104.88</td> <td>-----</td> <td>-----</td> <td>90.83</td> <td>34.86</td> <td>11.05</td> <td>31.86</td> <td>120</td> <td>318</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5210.00</td> <td>99.16</td> <td>-----</td> <td>-----</td> <td>85.11</td> <td>34.86</td> <td>11.05</td> <td>31.86</td> <td>120</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	104.88	-----	-----	90.83	34.86	11.05	31.86	120	318	Peak	2	5210.00	99.16	-----	-----	85.11	34.86	11.05	31.86	120	318	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5146.12	60.96	74.00	-13.04	46.78	34.87	11.09	31.78	120	318	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5210.00	104.88	-----	-----	90.83	34.86	11.05	31.86	120	318	Peak																																																																											
2	5210.00	99.16	-----	-----	85.11	34.86	11.05	31.86	120	318	Average																																																																											
<b>Avg</b>	 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>53.28</td> <td>54.00</td> <td>-0.72</td> <td>39.11</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>120</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	53.28	54.00	-0.72	39.11	34.87	11.08	31.78	120	318	Average	<b>Blank</b>																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5150.00	53.28	54.00	-0.72	39.11	34.87	11.08	31.78	120	318	Average																																																																											



	<b>9</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.52</td> <td>51.85</td> <td>74.00</td> <td>-22.15</td> <td>38.11</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>120</td> <td>318</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.52	51.85	74.00	-22.15	38.11	34.83	10.94	32.03	120	318	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5351.52	51.85	74.00	-22.15	38.11	34.83	10.94	32.03	120	318	Peak																											
<b>Avg</b>	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.56</td> <td>43.68</td> <td>54.00</td> <td>-10.32</td> <td>29.96</td> <td>34.81</td> <td>11.06</td> <td>32.15</td> <td>120</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5446.56	43.68	54.00	-10.32	29.96	34.81	11.06	32.15	120	318	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5446.56	43.68	54.00	-10.32	29.96	34.81	11.06	32.15	120	318	Average																											



Mode	9																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>50.79</td> <td>68.30</td> <td>-17.51</td> <td>47.91</td> <td>39.47</td> <td>14.19</td> <td>50.78</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>50.35</td> <td>74.00</td> <td>-23.65</td> <td>43.05</td> <td>41.88</td> <td>16.92</td> <td>51.50</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10420.00	50.79	68.30	-17.51	47.91	39.47	14.19	50.78	-- -- Peak	2	15630.00	50.35	74.00	-23.65	43.05	41.88	16.92	51.50	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>51.49</td> <td>68.30</td> <td>-16.81</td> <td>48.61</td> <td>39.47</td> <td>14.19</td> <td>50.78</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>50.61</td> <td>74.00</td> <td>-23.39</td> <td>43.31</td> <td>41.88</td> <td>16.92</td> <td>51.50</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10420.00	51.49	68.30	-16.81	48.61	39.47	14.19	50.78	-- -- Peak	2	15630.00	50.61	74.00	-23.39	43.31	41.88	16.92	51.50	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10420.00	50.79	68.30	-17.51	47.91	39.47	14.19	50.78	-- -- Peak																																																																																									
2	15630.00	50.35	74.00	-23.65	43.05	41.88	16.92	51.50	-- -- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10420.00	51.49	68.30	-16.81	48.61	39.47	14.19	50.78	-- -- Peak																																																																																									
2	15630.00	50.61	74.00	-23.39	43.31	41.88	16.92	51.50	-- -- Peak																																																																																									



		<b>10</b>																																																																																		
<b>Mode</b>	<b>Band Edge - L</b>																																																																																			
	<b>U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz</b>																																																																																			
<b>ANT</b>	<b>CDD 1+2</b>																																																																																			
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																		
<b>Peak</b>																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5004.16</td> <td>53.32</td> <td>74.00</td> <td>-20.68</td> <td>38.87</td> <td>34.90</td> <td>11.15</td> <td>31.60</td> <td>100</td> <td>0 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5004.16	53.32	74.00	-20.68	38.87	34.90	11.15	31.60	100	0 Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>107.23</td> <td>-----</td> <td>-----</td> <td>93.29</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>100</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>100.06</td> <td>-----</td> <td>-----</td> <td>86.12</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>100</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5260.00	107.23	-----	-----	93.29	34.85	11.01	31.92	100	0 Peak	2	5260.00	100.06	-----	-----	86.12	34.85	11.01	31.92	100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5004.16	53.32	74.00	-20.68	38.87	34.90	11.15	31.60	100	0 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5260.00	107.23	-----	-----	93.29	34.85	11.01	31.92	100	0 Peak																																																																										
2	5260.00	100.06	-----	-----	86.12	34.85	11.01	31.92	100	0 Average																																																																										
<b>Avg</b>			<b>Blank</b>																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>42.24</td> <td>54.00</td> <td>-11.76</td> <td>28.07</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>100</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	42.24	54.00	-11.76	28.07	34.87	11.08	31.78	100	0 Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5150.00	42.24	54.00	-11.76	28.07	34.87	11.08	31.78	100	0 Average																																																																										





	10																																					
Mode	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																					
ANT	CDD 1+2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5360.40</td> <td>53.42</td> <td>74.00</td> <td>-20.58</td> <td>39.69</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5360.40	53.42	74.00	-20.58	39.69	34.83	10.94	32.04	100	0	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5360.40	53.42	74.00	-20.58	39.69	34.83	10.94	32.04	100	0	Peak																											
Avg	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.32</td> <td>41.96</td> <td>54.00</td> <td>-12.04</td> <td>28.22</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.32	41.96	54.00	-12.04	28.22	34.83	10.94	32.03	100	0	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5350.32	41.96	54.00	-12.04	28.22	34.83	10.94	32.03	100	0	Average																											





	10																																																																																							
Mode	Band Edge - L																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																							
ANT	CDD 1+2																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.24</td> <td>62.24</td> <td>74.00</td> <td>-11.76</td> <td>48.06</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>180</td> <td>355</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.24	62.24	74.00	-11.76	48.06	34.87	11.09	31.78	180	355	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>121.91</td> <td>-----</td> <td>-----</td> <td>107.97</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>180</td> <td>355</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>114.66</td> <td>-----</td> <td>-----</td> <td>100.72</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>180</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5260.00	121.91	-----	-----	107.97	34.85	11.01	31.92	180	355	Peak	2	5260.00	114.66	-----	-----	100.72	34.85	11.01	31.92	180	355	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5149.24	62.24	74.00	-11.76	48.06	34.87	11.09	31.78	180	355	Peak																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5260.00	121.91	-----	-----	107.97	34.85	11.01	31.92	180	355	Peak																																																																													
2	5260.00	114.66	-----	-----	100.72	34.85	11.01	31.92	180	355	Average																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.24</td> <td>48.46</td> <td>54.00</td> <td>-5.54</td> <td>34.28</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>180</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.24	48.46	54.00	-5.54	34.28	34.87	11.09	31.78	180	355	Average	Blank																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5149.24	48.46	54.00	-5.54	34.28	34.87	11.09	31.78	180	355	Average																																																																													

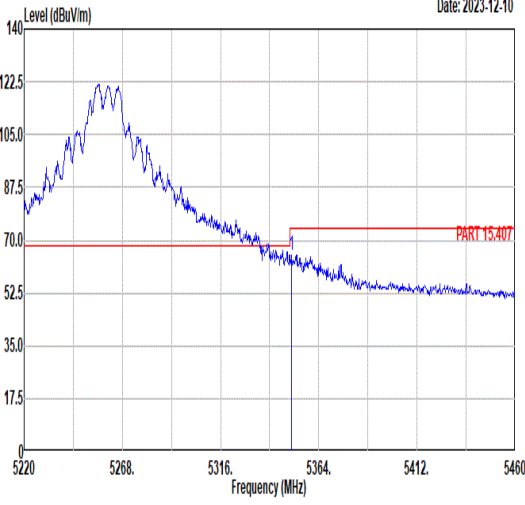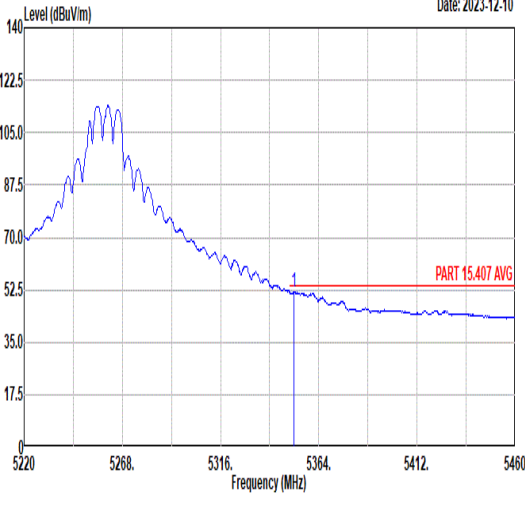

	<b>10</b>																																						
<b>Mode</b>	<b>Band Edge - R</b>																																						
	<b>U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz</b>																																						
<b>ANT</b>	<b>CDD 1+2</b>																																						
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																					
<b>Peak</b>	 <table border="1" data-bbox="268 1120 794 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.80</td> <td>65.07</td> <td>74.00</td> <td>-8.93</td> <td>51.33</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>180</td> <td>355</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.80	65.07	74.00	-8.93	51.33	34.83	10.94	32.03	180	355	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5350.80	65.07	74.00	-8.93	51.33	34.83	10.94	32.03	180	355	Peak																												
<b>Avg</b>	 <table border="1" data-bbox="268 1800 794 1915"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.76</td> <td>51.69</td> <td>54.00</td> <td>-2.31</td> <td>37.95</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>180</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.76	51.69	54.00	-2.31	37.95	34.83	10.94	32.03	180	355	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5351.76	51.69	54.00	-2.31	37.95	34.83	10.94	32.03	180	355	Average																												






Mode	10																																																																																																							
	Harmonic																																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																							
ANT	CDD 1+2																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg																																																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>61.55</td> <td>68.30</td> <td>-6.75</td> <td>58.60</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>186</td> <td>87</td> <td>Peak</td> </tr> <tr> <td>2 15780.00</td> <td>51.07</td> <td>74.00</td> <td>-22.93</td> <td>43.69</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 10520.00	61.55	68.30	-6.75	58.60	39.50	14.25	50.80	186	87	Peak	2 15780.00	51.07	74.00	-22.93	43.69	41.97	17.04	51.63	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>67.69</td> <td>68.30</td> <td>-0.61</td> <td>64.74</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>355</td> <td>349</td> <td>Peak</td> </tr> <tr> <td>2 15780.00</td> <td>56.42</td> <td>74.00</td> <td>-17.58</td> <td>49.04</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>277</td> <td>343</td> <td>Peak</td> </tr> <tr> <td>3 15780.00</td> <td>46.45</td> <td>54.00</td> <td>-7.55</td> <td>39.07</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>277</td> <td>343</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 10520.00	67.69	68.30	-0.61	64.74	39.50	14.25	50.80	355	349	Peak	2 15780.00	56.42	74.00	-17.58	49.04	41.97	17.04	51.63	277	343	Peak	3 15780.00	46.45	54.00	-7.55	39.07	41.97	17.04	51.63	277	343
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																	
1 10520.00	61.55	68.30	-6.75	58.60	39.50	14.25	50.80	186	87	Peak																																																																																														
2 15780.00	51.07	74.00	-22.93	43.69	41.97	17.04	51.63	--	--	Peak																																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																	
1 10520.00	67.69	68.30	-0.61	64.74	39.50	14.25	50.80	355	349	Peak																																																																																														
2 15780.00	56.42	74.00	-17.58	49.04	41.97	17.04	51.63	277	343	Peak																																																																																														
3 15780.00	46.45	54.00	-7.55	39.07	41.97	17.04	51.63	277	343	Average																																																																																														



Mode	11																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHZ																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>58.11</td> <td>74.00</td> <td>-15.89</td> <td>55.13</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>187</td> <td>89</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>48.62</td> <td>54.00</td> <td>-5.38</td> <td>45.64</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>187</td> <td>89</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>43.14</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	58.11	74.00	-15.89	55.13	39.48	14.30	50.80	187	89	Peak	2	10600.00	48.62	54.00	-5.38	45.64	39.48	14.30	50.80	187	89	Average	3	15900.00	50.60	74.00	-23.40	43.14	42.04	17.14	51.72	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>61.15</td> <td>74.00</td> <td>-12.85</td> <td>58.17</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>367</td> <td>345</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>53.13</td> <td>54.00</td> <td>-0.87</td> <td>50.15</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>367</td> <td>345</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>51.13</td> <td>74.00</td> <td>-22.87</td> <td>43.67</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	61.15	74.00	-12.85	58.17	39.48	14.30	50.80	367	345	Peak	2	10600.00	53.13	54.00	-0.87	50.15	39.48	14.30	50.80	367	345	Average	3	15900.00	51.13	74.00	-22.87	43.67	42.04	17.14	51.72	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	10600.00	58.11	74.00	-15.89	55.13	39.48	14.30	50.80	187	89	Peak																																																																																																																	
2	10600.00	48.62	54.00	-5.38	45.64	39.48	14.30	50.80	187	89	Average																																																																																																																	
3	15900.00	50.60	74.00	-23.40	43.14	42.04	17.14	51.72	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	10600.00	61.15	74.00	-12.85	58.17	39.48	14.30	50.80	367	345	Peak																																																																																																																	
2	10600.00	53.13	54.00	-0.87	50.15	39.48	14.30	50.80	367	345	Average																																																																																																																	
3	15900.00	51.13	74.00	-22.87	43.67	42.04	17.14	51.72	--	--	Peak																																																																																																																	

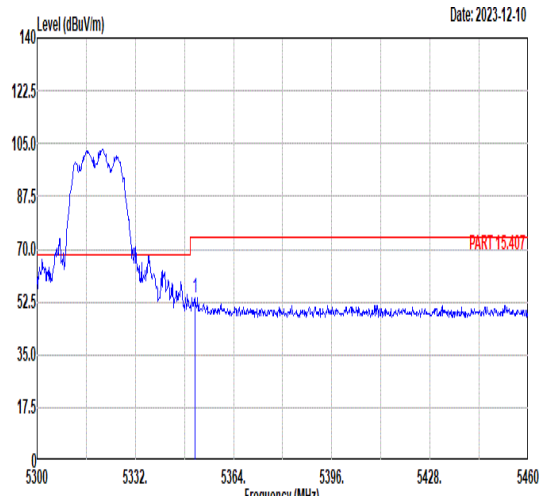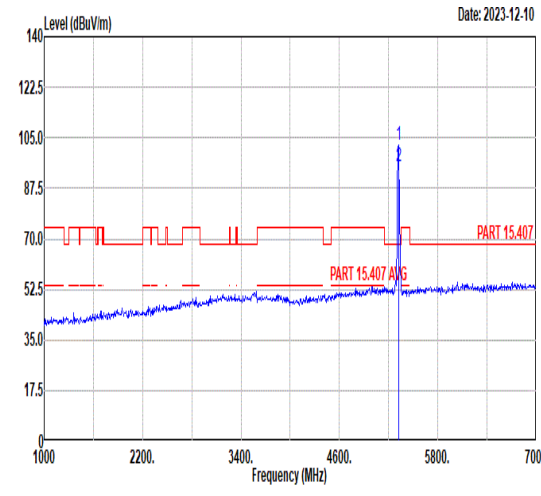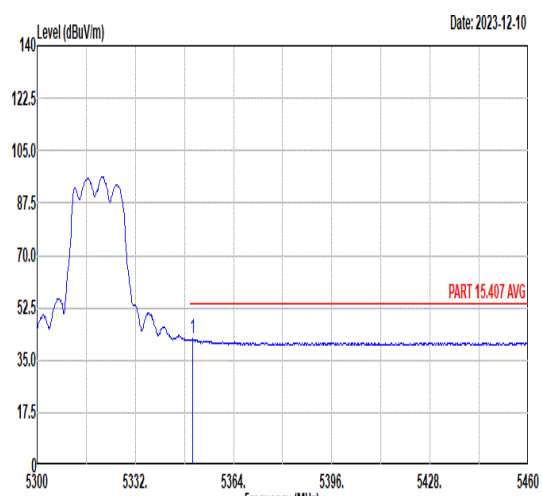

		12																																																																																							
Mode	Band Edge																																																																																								
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																								
ANT	CDD 1+2																																																																																								
Pol.	Horizontal	Fundamental																																																																																							
Peak	 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.52</td> <td>53.99</td> <td>74.00</td> <td>-20.01</td> <td>40.25</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>136</td> <td>10</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.52	53.99	74.00	-20.01	40.25	34.83	10.94	32.03	136	10	Peak	 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.42</td> <td>-----</td> <td>-----</td> <td>88.60</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>136</td> <td>10</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>95.03</td> <td>-----</td> <td>-----</td> <td>81.21</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>136</td> <td>10</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	102.42	-----	-----	88.60	34.84	10.97	31.99	136	10	Peak	2	5320.00	95.03	-----	-----	81.21	34.84	10.97	31.99	136	10	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5351.52	53.99	74.00	-20.01	40.25	34.83	10.94	32.03	136	10	Peak																																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5320.00	102.42	-----	-----	88.60	34.84	10.97	31.99	136	10	Peak																																																																														
2	5320.00	95.03	-----	-----	81.21	34.84	10.97	31.99	136	10	Average																																																																														
Avg	 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.72</td> <td>42.03</td> <td>54.00</td> <td>-11.97</td> <td>28.29</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>136</td> <td>10</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.72	42.03	54.00	-11.97	28.29	34.83	10.94	32.03	136	10	Average	Blank																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5350.72	42.03	54.00	-11.97	28.29	34.83	10.94	32.03	136	10	Average																																																																														



	12																																																																																							
Mode	Band Edge																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																							
ANT	CDD 1+2																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.52</td> <td>69.48</td> <td>74.00</td> <td>-4.52</td> <td>55.74</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>185</td> <td>355</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.52	69.48	74.00	-4.52	55.74	34.83	10.94	32.03	185	355	Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>115.45</td> <td>-----</td> <td>-----</td> <td>101.63</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>185</td> <td>355</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>108.72</td> <td>-----</td> <td>-----</td> <td>94.90</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>185</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	115.45	-----	-----	101.63	34.84	10.97	31.99	185	355	Peak	2	5320.00	108.72	-----	-----	94.90	34.84	10.97	31.99	185	355	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5351.52	69.48	74.00	-4.52	55.74	34.83	10.94	32.03	185	355	Peak																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5320.00	115.45	-----	-----	101.63	34.84	10.97	31.99	185	355	Peak																																																																													
2	5320.00	108.72	-----	-----	94.90	34.84	10.97	31.99	185	355	Average																																																																													
Avg	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.24</td> <td>50.63</td> <td>54.00</td> <td>-3.37</td> <td>36.89</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>185</td> <td>355</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.24	50.63	54.00	-3.37	36.89	34.83	10.94	32.03	185	355	Average	Blank																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5350.24	50.63	54.00	-3.37	36.89	34.83	10.94	32.03	185	355	Average																																																																													



Mode	12																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>58.13</td> <td>74.00</td> <td>-15.87</td> <td>55.14</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>185</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>48.75</td> <td>54.00</td> <td>-5.25</td> <td>45.76</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>185</td> <td>88</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>43.10</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	58.13	74.00	-15.87	55.14	39.47	14.32	50.80	185	88	Peak	2	10640.00	48.75	54.00	-5.25	45.76	39.47	14.32	50.80	185	88	Average	3	15960.00	50.60	74.00	-23.40	43.10	42.08	17.19	51.77	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>62.22</td> <td>74.00</td> <td>-11.78</td> <td>59.23</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>374</td> <td>343</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>53.24</td> <td>54.00</td> <td>-0.76</td> <td>50.25</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>374</td> <td>343</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>50.01</td> <td>74.00</td> <td>-23.99</td> <td>42.51</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	62.22	74.00	-11.78	59.23	39.47	14.32	50.80	374	343	Peak	2	10640.00	53.24	54.00	-0.76	50.25	39.47	14.32	50.80	374	343	Average	3	15960.00	50.01	74.00	-23.99	42.51	42.08	17.19	51.77	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	10640.00	58.13	74.00	-15.87	55.14	39.47	14.32	50.80	185	88	Peak																																																																																																																	
2	10640.00	48.75	54.00	-5.25	45.76	39.47	14.32	50.80	185	88	Average																																																																																																																	
3	15960.00	50.60	74.00	-23.40	43.10	42.08	17.19	51.77	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	10640.00	62.22	74.00	-11.78	59.23	39.47	14.32	50.80	374	343	Peak																																																																																																																	
2	10640.00	53.24	54.00	-0.76	50.25	39.47	14.32	50.80	374	343	Average																																																																																																																	
3	15960.00	50.01	74.00	-23.99	42.51	42.08	17.19	51.77	--	--	Peak																																																																																																																	



	13																																																																																							
Mode	Band Edge - L																																																																																							
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																																																																							
ANT	CDD 1+2																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5045.76</td> <td>52.66</td> <td>74.00</td> <td>-21.34</td> <td>38.28</td> <td>34.89</td> <td>11.14</td> <td>31.65</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5045.76	52.66	74.00	-21.34	38.28	34.89	11.14	31.65	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>105.83</td> <td>-----</td> <td>-----</td> <td>91.89</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>98.21</td> <td>-----</td> <td>-----</td> <td>84.27</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5260.00	105.83	-----	-----	91.89	34.85	11.01	31.92	100	360	Peak	2	5260.00	98.21	-----	-----	84.27	34.85	11.01	31.92	100	360	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5045.76	52.66	74.00	-21.34	38.28	34.89	11.14	31.65	100	360	Peak																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5260.00	105.83	-----	-----	91.89	34.85	11.01	31.92	100	360	Peak																																																																													
2	5260.00	98.21	-----	-----	84.27	34.85	11.01	31.92	100	360	Average																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>42.11</td> <td>54.00</td> <td>-11.89</td> <td>27.94</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5150.00	42.11	54.00	-11.89	27.94	34.87	11.08	31.78	100	360	Average	Blank																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5150.00	42.11	54.00	-11.89	27.94	34.87	11.08	31.78	100	360	Average																																																																													





	13																																					
Mode	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																					
ANT	CDD 1+2																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.92</td> <td>51.46</td> <td>74.00</td> <td>-22.54</td> <td>37.72</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5353.92	51.46	74.00	-22.54	37.72	34.83	10.94	32.03	100	360	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5353.92	51.46	74.00	-22.54	37.72	34.83	10.94	32.03	100	360	Peak																											
Blank																																						
Avg	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.28</td> <td>41.44</td> <td>54.00</td> <td>-12.56</td> <td>27.70</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.28	41.44	54.00	-12.56	27.70	34.83	10.94	32.03	100	360	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5351.28	41.44	54.00	-12.56	27.70	34.83	10.94	32.03	100	360	Average																											
Blank																																						



	13																																																																																					
Mode	Band Edge - L																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.60</td> <td>62.30</td> <td>74.00</td> <td>-11.70</td> <td>48.12</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>207</td> <td>320</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5145.60	62.30	74.00	-11.70	48.12	34.87	11.09	31.78	207	320	Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>116.71</td> <td>-----</td> <td>-----</td> <td>102.77</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>207</td> <td>320</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>109.18</td> <td>-----</td> <td>-----</td> <td>95.24</td> <td>34.85</td> <td>11.01</td> <td>31.92</td> <td>207</td> <td>320</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5260.00	116.71	-----	-----	102.77	34.85	11.01	31.92	207	320	Peak	2	5260.00	109.18	-----	-----	95.24	34.85	11.01	31.92	207	320	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5145.60	62.30	74.00	-11.70	48.12	34.87	11.09	31.78	207	320	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5260.00	116.71	-----	-----	102.77	34.85	11.01	31.92	207	320	Peak																																																																											
2	5260.00	109.18	-----	-----	95.24	34.85	11.01	31.92	207	320	Average																																																																											
Avg	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>48.59</td> <td>54.00</td> <td>-5.41</td> <td>34.41</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>207</td> <td>320</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.76	48.59	54.00	-5.41	34.41	34.87	11.09	31.78	207	320	Average	Blank																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5149.76	48.59	54.00	-5.41	34.41	34.87	11.09	31.78	207	320	Average																																																																											



		13																																			
Mode	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																				
ANT	CDD 1+2																																				
Pol.	Vertical	Fundamental																																			
Peak			Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.72</td> <td>64.67</td> <td>74.00</td> <td>-9.33</td> <td>50.93</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>207</td> <td>320</td> <td>Peak</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5352.72	64.67	74.00	-9.33	50.93	34.83	10.94	32.03	207
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5352.72	64.67	74.00	-9.33	50.93	34.83	10.94	32.03	207	320	Peak																										
Avg			Blank																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.56</td> <td>52.13</td> <td>54.00</td> <td>-1.87</td> <td>38.39</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>207</td> <td>320</td> <td>Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.56	52.13	54.00	-1.87	38.39	34.83	10.94	32.03	207
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5350.56	52.13	54.00	-1.87	38.39	34.83	10.94	32.03	207	320	Average																										



Mode	13																																																																																											
	Harmonic																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full RU_5260MHz																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>62.13</td> <td>68.30</td> <td>-6.17</td> <td>59.18</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>185</td> <td>89 Peak</td> </tr> <tr> <td>2 15780.00</td> <td>50.87</td> <td>74.00</td> <td>-23.13</td> <td>43.49</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	62.13	68.30	-6.17	59.18	39.50	14.25	50.80	185	89 Peak	2 15780.00	50.87	74.00	-23.13	43.49	41.97	17.04	51.63	--	-- Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>67.67</td> <td>68.30</td> <td>-0.63</td> <td>64.72</td> <td>39.50</td> <td>14.25</td> <td>50.80</td> <td>364</td> <td>346 Peak</td> </tr> <tr> <td>2 15780.00</td> <td>57.62</td> <td>74.00</td> <td>-16.38</td> <td>50.24</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>266</td> <td>345 Peak</td> </tr> <tr> <td>3 15780.00</td> <td>47.66</td> <td>54.00</td> <td>-6.34</td> <td>40.28</td> <td>41.97</td> <td>17.04</td> <td>51.63</td> <td>266</td> <td>345 Average</td> </tr> </tbody> </table>	Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	67.67	68.30	-0.63	64.72	39.50	14.25	50.80	364	346 Peak	2 15780.00	57.62	74.00	-16.38	50.24	41.97	17.04	51.63	266	345 Peak	3 15780.00	47.66	54.00	-6.34	40.28	41.97	17.04	51.63	266	345 Average
	Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 10520.00	62.13	68.30	-6.17	59.18	39.50	14.25	50.80	185	89 Peak																																																																																			
2 15780.00	50.87	74.00	-23.13	43.49	41.97	17.04	51.63	--	-- Peak																																																																																			
Freq	Limit Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1 10520.00	67.67	68.30	-0.63	64.72	39.50	14.25	50.80	364	346 Peak																																																																																			
2 15780.00	57.62	74.00	-16.38	50.24	41.97	17.04	51.63	266	345 Peak																																																																																			
3 15780.00	47.66	54.00	-6.34	40.28	41.97	17.04	51.63	266	345 Average																																																																																			



Mode	14																																																																																																																										
	Harmonic																																																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full RU_5300MHz																																																																																																																										
ANT	CDD 1+2																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																									
Peak Avg	<p>Date: 2023-12-12</p>	<p>Date: 2023-12-12</p>																																																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>58.37</td> <td>74.00</td> <td>-15.63</td> <td>55.39</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>184</td> <td>90</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>48.43</td> <td>54.00</td> <td>-5.57</td> <td>45.45</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>184</td> <td>90</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>51.24</td> <td>74.00</td> <td>-22.76</td> <td>43.78</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	58.37	74.00	-15.63	55.39	39.48	14.30	50.80	184	90	Peak	2	10600.00	48.43	54.00	-5.57	45.45	39.48	14.30	50.80	184	90	Average	3	15900.00	51.24	74.00	-22.76	43.78	42.04	17.14	51.72	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>63.16</td> <td>74.00</td> <td>-10.84</td> <td>60.18</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>358</td> <td>345</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10600.00</td> <td>53.34</td> <td>54.00</td> <td>-0.66</td> <td>50.36</td> <td>39.48</td> <td>14.30</td> <td>50.80</td> <td>358</td> <td>345</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15900.00</td> <td>51.73</td> <td>74.00</td> <td>-22.27</td> <td>44.27</td> <td>42.04</td> <td>17.14</td> <td>51.72</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	63.16	74.00	-10.84	60.18	39.48	14.30	50.80	358	345	Peak	2	10600.00	53.34	54.00	-0.66	50.36	39.48	14.30	50.80	358	345	Average	3	15900.00	51.73	74.00	-22.27	44.27	42.04	17.14	51.72	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																			
1	10600.00	58.37	74.00	-15.63	55.39	39.48	14.30	50.80	184	90	Peak																																																																																																																
2	10600.00	48.43	54.00	-5.57	45.45	39.48	14.30	50.80	184	90	Average																																																																																																																
3	15900.00	51.24	74.00	-22.76	43.78	42.04	17.14	51.72	--	--	Peak																																																																																																																
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																			
1	10600.00	63.16	74.00	-10.84	60.18	39.48	14.30	50.80	358	345	Peak																																																																																																																
2	10600.00	53.34	54.00	-0.66	50.36	39.48	14.30	50.80	358	345	Average																																																																																																																
3	15900.00	51.73	74.00	-22.27	44.27	42.04	17.14	51.72	--	--	Peak																																																																																																																



		15																																																																																				
Mode	Band Edge																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<p style="text-align: right;">Date: 2023-12-10</p>	<p style="text-align: right;">Date: 2023-12-10</p>																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.60</td> <td>54.05</td> <td>74.00</td> <td>-19.95</td> <td>40.31</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>132</td> <td>350</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5353.60	54.05	74.00	-19.95	40.31	34.83	10.94	32.03	132	350	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.30</td> <td>-----</td> <td>-----</td> <td>87.48</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>132</td> <td>350</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>94.00</td> <td>-----</td> <td>-----</td> <td>80.26</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>132</td> <td>350</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	101.30	-----	-----	87.48	34.84	10.97	31.99	132	350	Peak	2	5320.00	94.00	-----	-----	80.26	34.84	10.97	31.99	132	350
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5353.60	54.05	74.00	-19.95	40.31	34.83	10.94	32.03	132	350	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5320.00	101.30	-----	-----	87.48	34.84	10.97	31.99	132	350	Peak																																																																											
2	5320.00	94.00	-----	-----	80.26	34.84	10.97	31.99	132	350	Average																																																																											
Avg	<p style="text-align: right;">Date: 2023-12-10</p>	Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.72</td> <td>42.07</td> <td>54.00</td> <td>-11.93</td> <td>28.33</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>132</td> <td>350</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.72	42.07	54.00	-11.93	28.33	34.83	10.94	32.03	132	350	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5350.72	42.07	54.00	-11.93	28.33	34.83	10.94	32.03	132	350	Average																																																																											



		15																																																																																				
Mode	Band Edge																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.76</td> <td>64.96</td> <td>74.00</td> <td>-9.04</td> <td>51.22</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>215</td> <td>318</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5353.76	64.96	74.00	-9.04	51.22	34.83	10.94	32.03	215	318	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>114.93</td> <td>-----</td> <td>-----</td> <td>101.11</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>215</td> <td>318</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>107.08</td> <td>-----</td> <td>-----</td> <td>93.26</td> <td>34.84</td> <td>10.97</td> <td>31.99</td> <td>215</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	114.93	-----	-----	101.11	34.84	10.97	31.99	215	318	Peak	2	5320.00	107.08	-----	-----	93.26	34.84	10.97	31.99	215	318
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5353.76	64.96	74.00	-9.04	51.22	34.83	10.94	32.03	215	318	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5320.00	114.93	-----	-----	101.11	34.84	10.97	31.99	215	318	Peak																																																																											
2	5320.00	107.08	-----	-----	93.26	34.84	10.97	31.99	215	318	Average																																																																											
Avg		Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.72</td> <td>51.91</td> <td>54.00</td> <td>-2.09</td> <td>38.17</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>215</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.72	51.91	54.00	-2.09	38.17	34.83	10.94	32.03	215	318	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5350.72	51.91	54.00	-2.09	38.17	34.83	10.94	32.03	215	318	Average																																																																											



Mode	15																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full RU_5320MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>56.44</td> <td>74.00</td> <td>-17.56</td> <td>53.45</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>200</td> <td>90</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.64</td> <td>54.00</td> <td>-7.36</td> <td>43.65</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>200</td> <td>90</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.97</td> <td>74.00</td> <td>-24.03</td> <td>42.47</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	56.44	74.00	-17.56	53.45	39.47	14.32	50.80	200	90	Peak	2	10640.00	46.64	54.00	-7.36	43.65	39.47	14.32	50.80	200	90	Average	3	15960.00	49.97	74.00	-24.03	42.47	42.08	17.19	51.77	--	--	Peak	<p>Date: 2023-12-12</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>62.45</td> <td>74.00</td> <td>-11.55</td> <td>59.46</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>100</td> <td>336</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>52.51</td> <td>54.00</td> <td>-1.49</td> <td>49.52</td> <td>39.47</td> <td>14.32</td> <td>50.80</td> <td>100</td> <td>336</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>50.66</td> <td>74.00</td> <td>-23.34</td> <td>43.16</td> <td>42.08</td> <td>17.19</td> <td>51.77</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	62.45	74.00	-11.55	59.46	39.47	14.32	50.80	100	336	Peak	2	10640.00	52.51	54.00	-1.49	49.52	39.47	14.32	50.80	100	336	Average	3	15960.00	50.66	74.00	-23.34	43.16	42.08	17.19	51.77	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	10640.00	56.44	74.00	-17.56	53.45	39.47	14.32	50.80	200	90	Peak																																																																																																																	
2	10640.00	46.64	54.00	-7.36	43.65	39.47	14.32	50.80	200	90	Average																																																																																																																	
3	15960.00	49.97	74.00	-24.03	42.47	42.08	17.19	51.77	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	10640.00	62.45	74.00	-11.55	59.46	39.47	14.32	50.80	100	336	Peak																																																																																																																	
2	10640.00	52.51	54.00	-1.49	49.52	39.47	14.32	50.80	100	336	Average																																																																																																																	
3	15960.00	50.66	74.00	-23.34	43.16	42.08	17.19	51.77	--	--	Peak																																																																																																																	








		16																																																																																																		
Mode	Band Edge - L																																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Horizontal	Fundamental																																																																																																		
Peak																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5060.90</td> <td>52.99</td> <td>74.00</td> <td>-21.01</td> <td>38.63</td> <td>34.89</td> <td>11.14</td> <td>31.67</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5060.90	52.99	74.00	-21.01	38.63	34.89	11.14	31.67	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>102.55</td> <td>-----</td> <td>88.62</td> <td>34.85</td> <td>11.01</td> <td>31.93</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5270.00</td> <td>95.21</td> <td>-----</td> <td>81.28</td> <td>34.85</td> <td>11.01</td> <td>31.93</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5270.00	102.55	-----	88.62	34.85	11.01	31.93	100	360	Peak	2	5270.00	95.21	-----	81.28	34.85	11.01	31.93	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5060.90	52.99	74.00	-21.01	38.63	34.89	11.14	31.67	100	360	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5270.00	102.55	-----	88.62	34.85	11.01	31.93	100	360	Peak																																																																																										
2	5270.00	95.21	-----	81.28	34.85	11.01	31.93	100	360	Average																																																																																										
Avg		Blank																																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5120.05</td> <td>42.51</td> <td>54.00</td> <td>-11.49</td> <td>28.27</td> <td>34.88</td> <td>11.10</td> <td>31.74</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5120.05	42.51	54.00	-11.49	28.27	34.88	11.10	31.74	100	360	Average																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																													
							deg																																																																																													
1	5120.05	42.51	54.00	-11.49	28.27	34.88	11.10	31.74	100	360	Average																																																																																									



	16																																				
Mode	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																				
ANT	CDD 1+2																																				
Pol.	Horizontal	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.56</td> <td>52.84</td> <td>74.00</td> <td>-21.16</td> <td>39.10</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.56	52.84	74.00	-21.16	39.10	34.83	10.94	32.03	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5350.56	52.84	74.00	-21.16	39.10	34.83	10.94	32.03	100	360	Peak																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.76</td> <td>41.90</td> <td>54.00</td> <td>-12.10</td> <td>28.16</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5351.76	41.90	54.00	-12.10	28.16	34.83	10.94	32.03	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5351.76	41.90	54.00	-12.10	28.16	34.83	10.94	32.03	100	360	Average																										

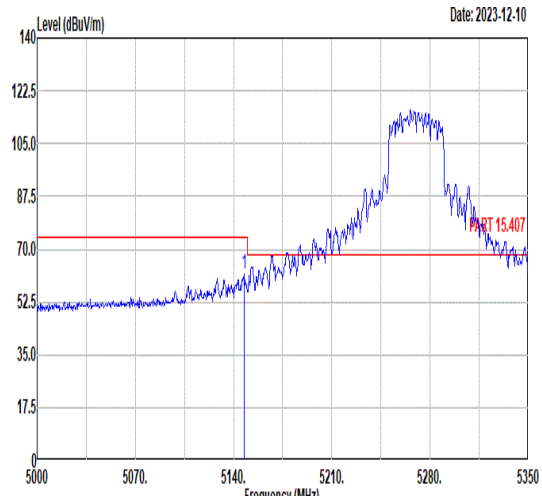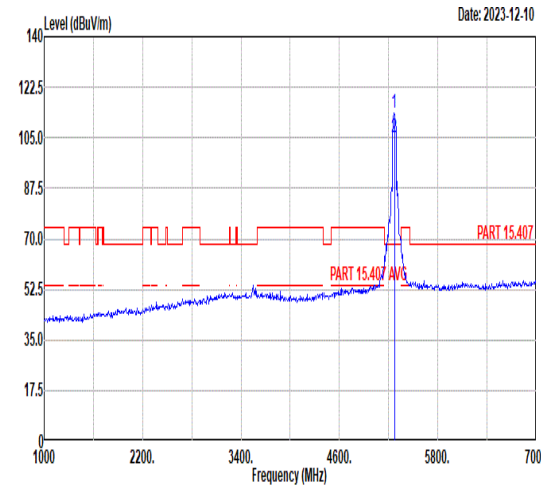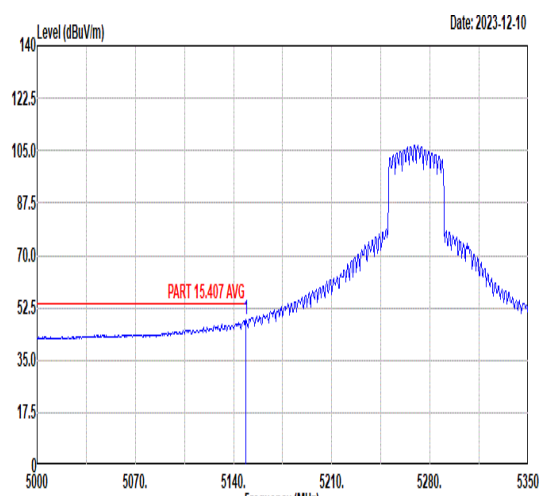

		16																																																																																																				
Mode	Band Edge - L																																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																																																																																					
ANT	CDD 1+2																																																																																																					
Pol.	Vertical	Fundamental																																																																																																				
Peak	 <p style="text-align: right;">Date: 2023-12-10</p>	 <p style="text-align: right;">Date: 2023-12-10</p>																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.70</td> <td>61.57</td> <td>74.00</td> <td>-12.43</td> <td>47.39</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>210</td> <td>321</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5147.70	61.57	74.00	-12.43	47.39	34.87	11.09	31.78	210	321	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>113.41</td> <td>-----</td> <td>-----</td> <td>99.48</td> <td>34.85</td> <td>11.01</td> <td>31.93</td> <td>210</td> <td>321</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5270.00</td> <td>105.20</td> <td>-----</td> <td>-----</td> <td>91.27</td> <td>34.85</td> <td>11.01</td> <td>31.93</td> <td>210</td> <td>321</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5270.00	113.41	-----	-----	99.48	34.85	11.01	31.93	210	321	Peak	2	5270.00	105.20	-----	-----	91.27	34.85	11.01	31.93	210	321
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																															
							deg																																																																																															
1	5147.70	61.57	74.00	-12.43	47.39	34.87	11.09	31.78	210	321	Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																															
							deg																																																																																															
1	5270.00	113.41	-----	-----	99.48	34.85	11.01	31.93	210	321	Peak																																																																																											
2	5270.00	105.20	-----	-----	91.27	34.85	11.01	31.93	210	321	Average																																																																																											
Avg	 <p style="text-align: right;">Date: 2023-12-10</p>	Blank																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.75</td> <td>48.38</td> <td>54.00</td> <td>-5.62</td> <td>34.20</td> <td>34.87</td> <td>11.09</td> <td>31.78</td> <td>210</td> <td>321</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5148.75	48.38	54.00	-5.62	34.20	34.87	11.09	31.78	210	321	Average																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																															
							deg																																																																																															
1	5148.75	48.38	54.00	-5.62	34.20	34.87	11.09	31.78	210	321	Average																																																																																											



	16																																		
Mode	Band Edge - R																																		
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																		
ANT	CDD 1+2																																		
Pol.	Vertical	Fundamental																																	
Peak																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5351.04</td> <td>69.56</td> <td>74.00</td> <td>-4.44</td> <td>55.82</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>210</td> <td>321 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5351.04	69.56	74.00	-4.44	55.82	34.83	10.94	32.03	210
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5351.04	69.56	74.00	-4.44	55.82	34.83	10.94	32.03	210	321 Peak																										
Avg																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5353.92</td> <td>52.41</td> <td>54.00</td> <td>-1.59</td> <td>38.67</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>210</td> <td>321 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5353.92	52.41	54.00	-1.59	38.67	34.83	10.94	32.03	210
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5353.92	52.41	54.00	-1.59	38.67	34.83	10.94	32.03	210	321 Average																										



Mode	16																																																																																																			
	Harmonic																																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full RU_5270MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>54.41</td> <td>68.30</td> <td>-13.89</td> <td>51.46</td> <td>39.49</td> <td>14.26</td> <td>50.80</td> <td>190</td> <td>88</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>50.44</td> <td>74.00</td> <td>-23.56</td> <td>43.04</td> <td>41.99</td> <td>17.06</td> <td>51.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10540.00	54.41	68.30	-13.89	51.46	39.49	14.26	50.80	190	88	Peak	2	15810.00	50.44	74.00	-23.56	43.04	41.99	17.06	51.65	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>60.42</td> <td>68.30</td> <td>-7.88</td> <td>57.47</td> <td>39.49</td> <td>14.26</td> <td>50.80</td> <td>235</td> <td>335</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>50.29</td> <td>74.00</td> <td>-23.71</td> <td>42.89</td> <td>41.99</td> <td>17.06</td> <td>51.65</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10540.00	60.42	68.30	-7.88	57.47	39.49	14.26	50.80	235	335	Peak	2	15810.00	50.29	74.00	-23.71	42.89	41.99	17.06	51.65	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10540.00	54.41	68.30	-13.89	51.46	39.49	14.26	50.80	190	88	Peak																																																																																									
2	15810.00	50.44	74.00	-23.56	43.04	41.99	17.06	51.65	--	--	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10540.00	60.42	68.30	-7.88	57.47	39.49	14.26	50.80	235	335	Peak																																																																																									
2	15810.00	50.29	74.00	-23.71	42.89	41.99	17.06	51.65	--	--	Peak																																																																																									






		17																																																																																		
Mode	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5091.70</td> <td>52.93</td> <td>74.00</td> <td>-21.07</td> <td>38.64</td> <td>34.88</td> <td>11.12</td> <td>31.71</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5091.70	52.93	74.00	-21.07	38.64	34.88	11.12	31.71	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>97.75</td> <td>-----</td> <td>83.92</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5310.00</td> <td>90.18</td> <td>-----</td> <td>76.35</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	97.75	-----	83.92	34.84	10.97	31.98	100	360	Peak	2	5310.00	90.18	-----	76.35	34.84	10.97	31.98	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5091.70	52.93	74.00	-21.07	38.64	34.88	11.12	31.71	100	360	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5310.00	97.75	-----	83.92	34.84	10.97	31.98	100	360	Peak																																																																										
2	5310.00	90.18	-----	76.35	34.84	10.97	31.98	100	360	Average																																																																										
Avg		Blank																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5040.25</td> <td>42.49</td> <td>54.00</td> <td>-11.51</td> <td>28.10</td> <td>34.89</td> <td>11.15</td> <td>31.65</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5040.25	42.49	54.00	-11.51	28.10	34.89	11.15	31.65	100	360	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5040.25	42.49	54.00	-11.51	28.10	34.89	11.15	31.65	100	360	Average																																																																									



	17																																				
Mode	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																				
ANT	CDD 1+2																																				
Pol.	Horizontal	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5360.16</td> <td>53.35</td> <td>74.00</td> <td>-20.65</td> <td>39.62</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5360.16	53.35	74.00	-20.65	39.62	34.83	10.94	32.04	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5360.16	53.35	74.00	-20.65	39.62	34.83	10.94	32.04	100	360	Peak																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.08</td> <td>42.74</td> <td>54.00</td> <td>-11.26</td> <td>29.00</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.08	42.74	54.00	-11.26	29.00	34.83	10.94	32.03	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5350.08	42.74	54.00	-11.26	29.00	34.83	10.94	32.03	100	360	Average																										

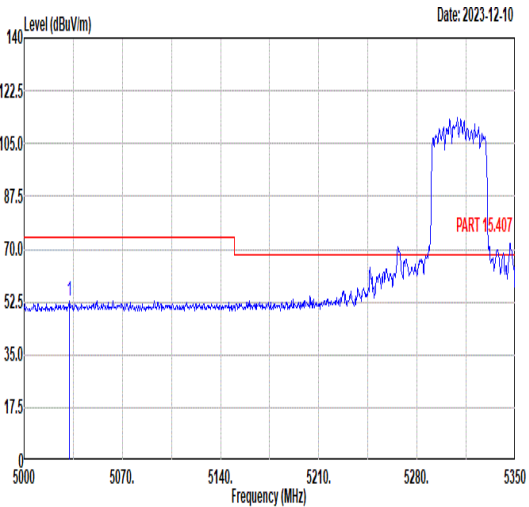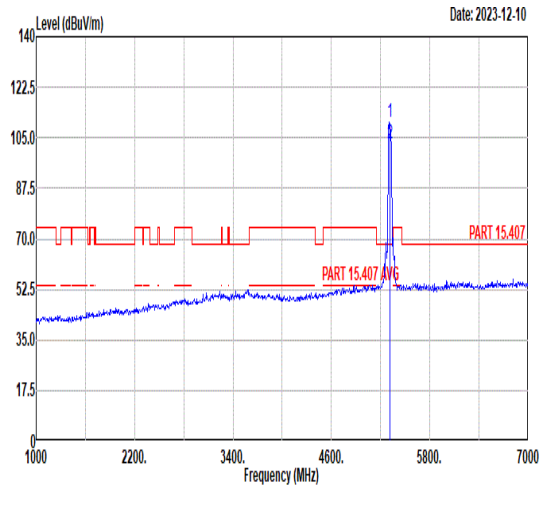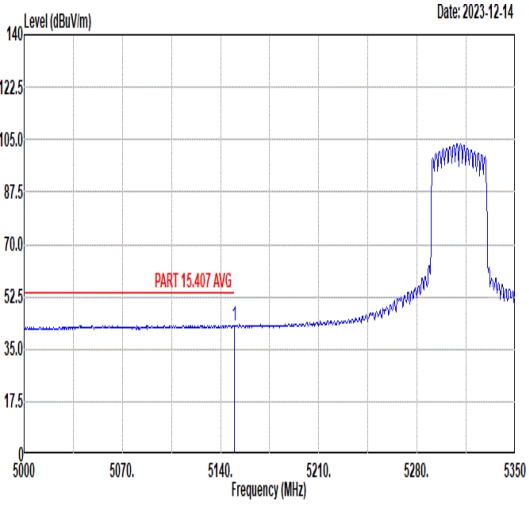

		17																																																																																			
Mode		Band Edge - L																																																																																			
		U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																																																																			
ANT		CDD 1+2																																																																																			
Pol.		Vertical	Fundamental																																																																																		
Peak		 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5032.20</td> <td>52.77</td> <td>74.00</td> <td>-21.23</td> <td>38.37</td> <td>34.89</td> <td>11.15</td> <td>31.64</td> <td>192</td> <td>328</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5032.20	52.77	74.00	-21.23	38.37	34.89	11.15	31.64	192	328	Peak	 <p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>110.48</td> <td>-----</td> <td>96.65</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>192</td> <td>328</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5310.00</td> <td>103.08</td> <td>-----</td> <td>89.25</td> <td>34.84</td> <td>10.97</td> <td>31.98</td> <td>192</td> <td>328</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	110.48	-----	96.65	34.84	10.97	31.98	192	328	Peak	2	5310.00	103.08	-----	89.25	34.84	10.97	31.98	192	328	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																														
1	5032.20	52.77	74.00	-21.23	38.37	34.89	11.15	31.64	192	328	Peak																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																														
1	5310.00	110.48	-----	96.65	34.84	10.97	31.98	192	328	Peak																																																																											
2	5310.00	103.08	-----	89.25	34.84	10.97	31.98	192	328	Average																																																																											
Avg		 <p style="text-align: right;">Date: 2023-12-14</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>43.02</td> <td>54.00</td> <td>-10.98</td> <td>28.85</td> <td>34.87</td> <td>11.08</td> <td>31.78</td> <td>192</td> <td>328</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	43.02	54.00	-10.98	28.85	34.87	11.08	31.78	192	328	Average	Blank																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																														
1	5150.00	43.02	54.00	-10.98	28.85	34.87	11.08	31.78	192	328	Average																																																																										





	17																																					
Mode	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																					
ANT	CDD 1+2																																					
Pol.	Vertical	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.32</td> <td>66.40</td> <td>74.00</td> <td>-7.60</td> <td>52.66</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>192</td> <td>328</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.32	66.40	74.00	-7.60	52.66	34.83	10.94	32.03	192	328	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5350.32	66.40	74.00	-7.60	52.66	34.83	10.94	32.03	192	328	Peak																											
Blank																																						
Avg	<p style="text-align: right;">Date: 2023-12-10</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.80</td> <td>52.80</td> <td>54.00</td> <td>-1.20</td> <td>39.06</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>192</td> <td>328</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.80	52.80	54.00	-1.20	39.06	34.83	10.94	32.03	192	328	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5350.80	52.80	54.00	-1.20	39.06	34.83	10.94	32.03	192	328	Average																											
Blank																																						



Mode	17																																																																																											
	Harmonic																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full RU_5310MHz																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10620.00</td> <td>50.02</td> <td>74.00</td> <td>-23.98</td> <td>47.03</td> <td>39.48</td> <td>14.31</td> <td>50.80</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 15930.00</td> <td>50.81</td> <td>74.00</td> <td>-23.19</td> <td>43.34</td> <td>42.06</td> <td>17.16</td> <td>51.75</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 10620.00	50.02	74.00	-23.98	47.03	39.48	14.31	50.80	--	-- Peak	2 15930.00	50.81	74.00	-23.19	43.34	42.06	17.16	51.75	--	-- Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10620.00</td> <td>56.46</td> <td>74.00</td> <td>-17.54</td> <td>53.47</td> <td>39.48</td> <td>14.31</td> <td>50.80</td> <td>159</td> <td>337 Peak</td> </tr> <tr> <td>2 10620.00</td> <td>47.84</td> <td>54.00</td> <td>-6.16</td> <td>44.85</td> <td>39.48</td> <td>14.31</td> <td>50.80</td> <td>159</td> <td>337 Average</td> </tr> <tr> <td>3 15930.00</td> <td>50.53</td> <td>74.00</td> <td>-23.47</td> <td>43.06</td> <td>42.06</td> <td>17.16</td> <td>51.75</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>	Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 10620.00	56.46	74.00	-17.54	53.47	39.48	14.31	50.80	159	337 Peak	2 10620.00	47.84	54.00	-6.16	44.85	39.48	14.31	50.80	159	337 Average	3 15930.00	50.53	74.00	-23.47	43.06	42.06	17.16	51.75	--	-- Peak
	Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10620.00	50.02	74.00	-23.98	47.03	39.48	14.31	50.80	--	-- Peak																																																																																			
2 15930.00	50.81	74.00	-23.19	43.34	42.06	17.16	51.75	--	-- Peak																																																																																			
Freq	Limit Level	Limit Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10620.00	56.46	74.00	-17.54	53.47	39.48	14.31	50.80	159	337 Peak																																																																																			
2 10620.00	47.84	54.00	-6.16	44.85	39.48	14.31	50.80	159	337 Average																																																																																			
3 15930.00	50.53	74.00	-23.47	43.06	42.06	17.16	51.75	--	-- Peak																																																																																			






		18																																																																																				
Mode	Band Edge - L																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5027.30</td> <td>52.63</td> <td>74.00</td> <td>-21.37</td> <td>38.22</td> <td>34.89</td> <td>11.15</td> <td>31.63</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5027.30	52.63	74.00	-21.37	38.22	34.89	11.15	31.63	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>91.42</td> <td>-----</td> <td>77.54</td> <td>34.84</td> <td>10.99</td> <td>31.95</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>84.22</td> <td>-----</td> <td>70.34</td> <td>34.84</td> <td>10.99</td> <td>31.95</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	91.42	-----	77.54	34.84	10.99	31.95	100	360	Peak	2	5290.00	84.22	-----	70.34	34.84	10.99	31.95	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5027.30	52.63	74.00	-21.37	38.22	34.89	11.15	31.63	100	360	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5290.00	91.42	-----	77.54	34.84	10.99	31.95	100	360	Peak																																																																												
2	5290.00	84.22	-----	70.34	34.84	10.99	31.95	100	360	Average																																																																												
Avg		Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5042.70</td> <td>44.13</td> <td>54.00</td> <td>-9.87</td> <td>29.74</td> <td>34.89</td> <td>11.15</td> <td>31.65</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5042.70	44.13	54.00	-9.87	29.74	34.89	11.15	31.65	100	360	Average																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5042.70	44.13	54.00	-9.87	29.74	34.89	11.15	31.65	100	360	Average																																																																											



	<b>18</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5428.08</td> <td>52.12</td> <td>74.00</td> <td>-21.88</td> <td>38.45</td> <td>34.81</td> <td>10.99</td> <td>32.13</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5428.08	52.12	74.00	-21.88	38.45	34.81	10.99	32.13	100	360	Peak	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5428.08	52.12	74.00	-21.88	38.45	34.81	10.99	32.13	100	360	Peak																											
<b>Avg</b>	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.68</td> <td>43.66</td> <td>54.00</td> <td>-10.34</td> <td>29.92</td> <td>34.83</td> <td>10.94</td> <td>32.03</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5353.68	43.66	54.00	-10.34	29.92	34.83	10.94	32.03	100	360	Average	<b>Blank</b>
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5353.68	43.66	54.00	-10.34	29.92	34.83	10.94	32.03	100	360	Average																											

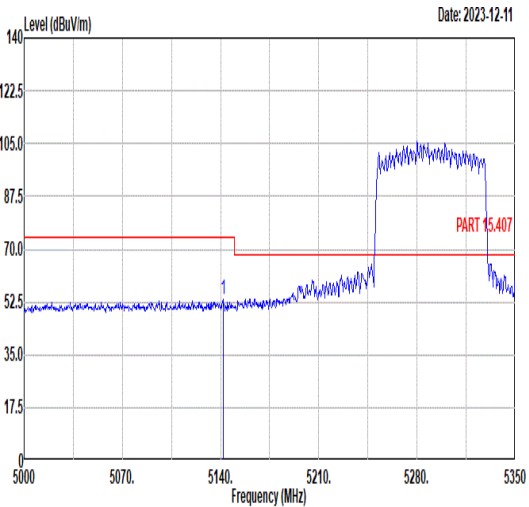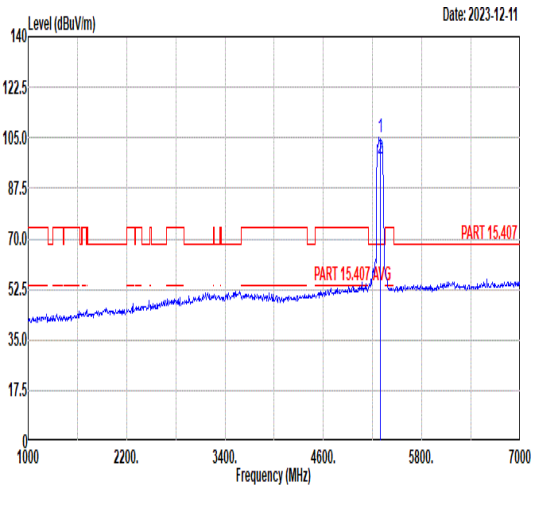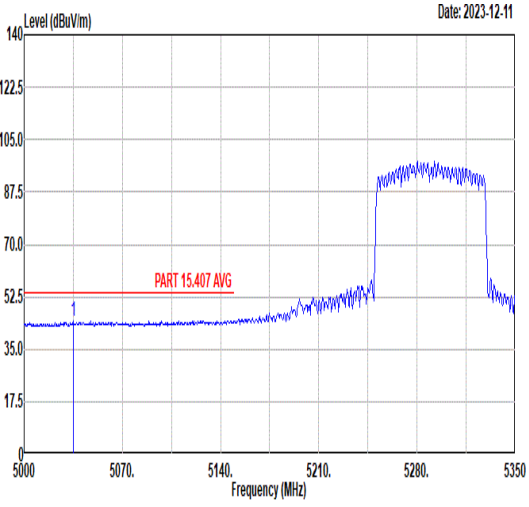

		18																																																																																																					
Mode	Band Edge - L																																																																																																						
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																						
ANT	CDD 1+2																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	 <p style="text-align: right;">Date: 2023-12-11</p>		 <p style="text-align: right;">Date: 2023-12-11</p>																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.75</td> <td>53.42</td> <td>74.00</td> <td>-20.58</td> <td>39.23</td> <td>34.87</td> <td>11.09</td> <td>31.77</td> <td>157</td> <td>321</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5141.75	53.42	74.00	-20.58	39.23	34.87	11.09	31.77	157	321	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>105.36</td> <td>-----</td> <td>-----</td> <td>91.48</td> <td>34.84</td> <td>10.99</td> <td>31.95</td> <td>157</td> <td>321</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>97.90</td> <td>-----</td> <td>-----</td> <td>84.02</td> <td>34.84</td> <td>10.99</td> <td>31.95</td> <td>157</td> <td>321</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5290.00	105.36	-----	-----	91.48	34.84	10.99	31.95	157	321	Peak	2	5290.00	97.90	-----	-----	84.02	34.84	10.99	31.95	157	321
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																
							deg																																																																																																
1	5141.75	53.42	74.00	-20.58	39.23	34.87	11.09	31.77	157	321	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																
							deg																																																																																																
1	5290.00	105.36	-----	-----	91.48	34.84	10.99	31.95	157	321	Peak																																																																																												
2	5290.00	97.90	-----	-----	84.02	34.84	10.99	31.95	157	321	Average																																																																																												
Avg	 <p style="text-align: right;">Date: 2023-12-11</p>		Blank																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5035.00</td> <td>44.48</td> <td>54.00</td> <td>-9.52</td> <td>30.08</td> <td>34.89</td> <td>11.15</td> <td>31.64</td> <td>157</td> <td>321</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5035.00	44.48	54.00	-9.52	30.08	34.89	11.15	31.64	157	321	Average																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																
							deg																																																																																																
1	5035.00	44.48	54.00	-9.52	30.08	34.89	11.15	31.64	157	321	Average																																																																																												



	<b>18</b>																																					
<b>Mode</b>	<b>Band Edge - R</b>																																					
	<b>U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz</b>																																					
<b>ANT</b>	<b>CDD 1+2</b>																																					
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																				
<b>Peak</b>	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.28</td> <td>59.98</td> <td>74.00</td> <td>-14.02</td> <td>46.25</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>157</td> <td>321</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5357.28	59.98	74.00	-14.02	46.25	34.83	10.94	32.04	157	321	Peak	<b>Blank</b>
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5357.28	59.98	74.00	-14.02	46.25	34.83	10.94	32.04	157	321	Peak																											
<b>Avg</b>	<p style="text-align: right;">Date: 2023-12-11</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.88</td> <td>52.66</td> <td>54.00</td> <td>-1.34</td> <td>38.93</td> <td>34.83</td> <td>10.94</td> <td>32.04</td> <td>157</td> <td>321</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5354.88	52.66	54.00	-1.34	38.93	34.83	10.94	32.04	157	321	Average	<b>Blank</b>
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5354.88	52.66	54.00	-1.34	38.93	34.83	10.94	32.04	157	321	Average																											



Mode	18																																																																																																										
	Harmonic																																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																										
ANT	CDD 1+2																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>49.81</td> <td>68.30</td> <td>-18.49</td> <td>46.84</td> <td>39.48</td> <td>14.29</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>50.14</td> <td>74.00</td> <td>-23.86</td> <td>42.71</td> <td>42.02</td> <td>17.11</td> <td>51.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10580.00	49.81	68.30	-18.49	46.84	39.48	14.29	50.80	--	--	Peak	2	15870.00	50.14	74.00	-23.86	42.71	42.02	17.11	51.70	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>50.32</td> <td>68.30</td> <td>-17.98</td> <td>47.35</td> <td>39.48</td> <td>14.29</td> <td>50.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>50.85</td> <td>74.00</td> <td>-23.15</td> <td>43.42</td> <td>42.02</td> <td>17.11</td> <td>51.70</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10580.00	50.32	68.30	-17.98	47.35	39.48	14.29	50.80	--	--	Peak	2	15870.00	50.85	74.00	-23.15	43.42	42.02	17.11	51.70	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	10580.00	49.81	68.30	-18.49	46.84	39.48	14.29	50.80	--	--	Peak																																																																																																
2	15870.00	50.14	74.00	-23.86	42.71	42.02	17.11	51.70	--	--	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	10580.00	50.32	68.30	-17.98	47.35	39.48	14.29	50.80	--	--	Peak																																																																																																
2	15870.00	50.85	74.00	-23.15	43.42	42.02	17.11	51.70	--	--	Peak																																																																																																



		19																																																																																																				
Mode	Band Edge																																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																					
ANT	CDD 1+2																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak																																																																																																						
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5367.76</td> <td>51.59</td> <td>74.00</td> <td>-22.41</td> <td>37.88</td> <td>34.83</td> <td>10.93</td> <td>32.05</td> <td>100</td> <td>5 Peak</td> </tr> <tr> <td>2</td> <td>5461.84</td> <td>50.77</td> <td>68.30</td> <td>-17.53</td> <td>37.00</td> <td>34.81</td> <td>11.13</td> <td>32.17</td> <td>100</td> <td>5 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5367.76	51.59	74.00	-22.41	37.88	34.83	10.93	32.05	100	5 Peak	2	5461.84	50.77	68.30	-17.53	37.00	34.81	11.13	32.17	100	5 Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.52</td> <td>-----</td> <td>-----</td> <td>85.64</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>100</td> <td>5 Peak</td> </tr> <tr> <td>2</td> <td>5500.00</td> <td>92.44</td> <td>-----</td> <td>-----</td> <td>78.56</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>100</td> <td>5 Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	99.52	-----	-----	85.64	34.80	11.29	32.21	100	5 Peak	2	5500.00	92.44	-----	-----	78.56	34.80	11.29	32.21	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5367.76	51.59	74.00	-22.41	37.88	34.83	10.93	32.05	100	5 Peak																																																																																												
2	5461.84	50.77	68.30	-17.53	37.00	34.81	11.13	32.17	100	5 Peak																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5500.00	99.52	-----	-----	85.64	34.80	11.29	32.21	100	5 Peak																																																																																												
2	5500.00	92.44	-----	-----	78.56	34.80	11.29	32.21	100	5 Average																																																																																												
Avg		Blank																																																																																																				
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>40.70</td> <td>54.00</td> <td>-13.30</td> <td>26.94</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>100</td> <td>5 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5460.00	40.70	54.00	-13.30	26.94	34.81	11.12	32.17	100	5 Average																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5460.00	40.70	54.00	-13.30	26.94	34.81	11.12	32.17	100	5 Average																																																																																												





		19																																																																																																									
Mode		Band Edge																																																																																																									
		U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																									
ANT		CDD 1+2																																																																																																									
Pol.		Vertical	Fundamental																																																																																																								
Peak		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.04</td> <td>58.47</td> <td>74.00</td> <td>-15.53</td> <td>44.71</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>186</td> <td>327</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5466.96</td> <td>62.28</td> <td>68.30</td> <td>-6.02</td> <td>48.49</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>186</td> <td>327</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.04	58.47	74.00	-15.53	44.71	34.81	11.11	32.16	186	327	Peak	2	5466.96	62.28	68.30	-6.02	48.49	34.81	11.15	32.17	186	327	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>113.26</td> <td>-----</td> <td>-----</td> <td>99.38</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>186</td> <td>327</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5500.00</td> <td>106.18</td> <td>-----</td> <td>-----</td> <td>92.30</td> <td>34.80</td> <td>11.29</td> <td>32.21</td> <td>186</td> <td>327</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	113.26	-----	-----	99.38	34.80	11.29	32.21	186	327	Peak	2	5500.00	106.18	-----	-----	92.30	34.80	11.29	32.21	186	327	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5457.04	58.47	74.00	-15.53	44.71	34.81	11.11	32.16	186	327	Peak																																																																																																
2	5466.96	62.28	68.30	-6.02	48.49	34.81	11.15	32.17	186	327	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5500.00	113.26	-----	-----	99.38	34.80	11.29	32.21	186	327	Peak																																																																																																
2	5500.00	106.18	-----	-----	92.30	34.80	11.29	32.21	186	327	Average																																																																																																
Avg		<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.68</td> <td>45.38</td> <td>54.00</td> <td>-8.62</td> <td>31.62</td> <td>34.81</td> <td>11.11</td> <td>32.16</td> <td>186</td> <td>327</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.68	45.38	54.00	-8.62	31.62	34.81	11.11	32.16	186	327	Average	Blank																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	5457.68	45.38	54.00	-8.62	31.62	34.81	11.11	32.16	186	327	Average																																																																																																



Mode	19																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>56.27</td> <td>74.00</td> <td>-17.73</td> <td>53.13</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>180</td> <td>91</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>46.46</td> <td>54.00</td> <td>-7.54</td> <td>43.32</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>180</td> <td>91</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>49.60</td> <td>68.30</td> <td>-18.70</td> <td>41.64</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	56.27	74.00	-17.73	53.13	39.40	14.54	50.80	180	91	Peak	2	11000.00	46.46	54.00	-7.54	43.32	39.40	14.54	50.80	180	91	Average	3	16500.00	49.60	68.30	-18.70	41.64	42.40	17.36	51.80	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>62.27</td> <td>74.00</td> <td>-11.73</td> <td>59.13</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>184</td> <td>263</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11000.00</td> <td>53.05</td> <td>54.00</td> <td>-0.95</td> <td>49.91</td> <td>39.40</td> <td>14.54</td> <td>50.80</td> <td>184</td> <td>263</td> <td>Average</td> </tr> <tr> <td>3</td> <td>16500.00</td> <td>49.70</td> <td>68.30</td> <td>-18.60</td> <td>41.74</td> <td>42.40</td> <td>17.36</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	62.27	74.00	-11.73	59.13	39.40	14.54	50.80	184	263	Peak	2	11000.00	53.05	54.00	-0.95	49.91	39.40	14.54	50.80	184	263	Average	3	16500.00	49.70	68.30	-18.60	41.74	42.40	17.36	51.80	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11000.00	56.27	74.00	-17.73	53.13	39.40	14.54	50.80	180	91	Peak																																																																																																																	
2	11000.00	46.46	54.00	-7.54	43.32	39.40	14.54	50.80	180	91	Average																																																																																																																	
3	16500.00	49.60	68.30	-18.70	41.64	42.40	17.36	51.80	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11000.00	62.27	74.00	-11.73	59.13	39.40	14.54	50.80	184	263	Peak																																																																																																																	
2	11000.00	53.05	54.00	-0.95	49.91	39.40	14.54	50.80	184	263	Average																																																																																																																	
3	16500.00	49.70	68.30	-18.60	41.74	42.40	17.36	51.80	--	--	Peak																																																																																																																	



Mode	20																																																																																																																				
	Harmonic																																																																																																																				
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																				
ANT	CDD 1+2																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																			
Peak Avg																																																																																																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>60.52</td> <td>74.00</td> <td>-13.48</td> <td>57.12</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>200</td> <td>90</td> <td>Peak</td> </tr> <tr> <td>2 11160.00</td> <td>49.37</td> <td>54.00</td> <td>-4.63</td> <td>45.97</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>200</td> <td>90</td> <td>Average</td> </tr> <tr> <td>3 16740.00</td> <td>50.11</td> <td>68.30</td> <td>-18.19</td> <td>41.98</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11160.00	60.52	74.00	-13.48	57.12	39.53	14.64	50.77	200	90	Peak	2 11160.00	49.37	54.00	-4.63	45.97	39.53	14.64	50.77	200	90	Average	3 16740.00	50.11	68.30	-18.19	41.98	42.45	17.43	51.75	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>66.86</td> <td>74.00</td> <td>-7.14</td> <td>63.46</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>176</td> <td>264</td> <td>Peak</td> </tr> <tr> <td>2 11160.00</td> <td>52.76</td> <td>54.00</td> <td>-1.24</td> <td>49.36</td> <td>39.53</td> <td>14.64</td> <td>50.77</td> <td>176</td> <td>264</td> <td>Average</td> </tr> <tr> <td>3 16740.00</td> <td>50.24</td> <td>68.30</td> <td>-18.06</td> <td>42.11</td> <td>42.45</td> <td>17.43</td> <td>51.75</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 11160.00	66.86	74.00	-7.14	63.46	39.53	14.64	50.77	176	264	Peak	2 11160.00	52.76	54.00	-1.24	49.36	39.53	14.64	50.77	176	264	Average	3 16740.00	50.24	68.30	-18.06	42.11	42.45	17.43	51.75	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1 11160.00	60.52	74.00	-13.48	57.12	39.53	14.64	50.77	200	90	Peak																																																																																																											
2 11160.00	49.37	54.00	-4.63	45.97	39.53	14.64	50.77	200	90	Average																																																																																																											
3 16740.00	50.11	68.30	-18.19	41.98	42.45	17.43	51.75	--	--	Peak																																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																													
1 11160.00	66.86	74.00	-7.14	63.46	39.53	14.64	50.77	176	264	Peak																																																																																																											
2 11160.00	52.76	54.00	-1.24	49.36	39.53	14.64	50.77	176	264	Average																																																																																																											
3 16740.00	50.24	68.30	-18.06	42.11	42.45	17.43	51.75	--	--	Peak																																																																																																											



Mode	21																																																																																		
	Band Edge																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																		
ANT	CDD 1+2																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.24</td> <td>64.00</td> <td>68.30</td> <td>-4.30</td> <td>49.62</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>246</td> <td>24</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.24	64.00	68.30	-4.30	49.62	35.12	11.65	32.39	246	24	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.32</td> <td>-----</td> <td>87.95</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>246</td> <td>24</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>94.62</td> <td>-----</td> <td>80.25</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>246</td> <td>24</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	102.32	-----	87.95	35.08	11.66	32.37	246	24	Peak	2	5700.00	94.62	-----	80.25	35.08	11.66	32.37	246	24
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																												
1	5725.24	64.00	68.30	-4.30	49.62	35.12	11.65	32.39	246	24	Peak																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																												
1	5700.00	102.32	-----	87.95	35.08	11.66	32.37	246	24	Peak																																																																									
2	5700.00	94.62	-----	80.25	35.08	11.66	32.37	246	24	Average																																																																									



Mode	21																																																																														
	Band Edge																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																														
ANT	CDD 1+2																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5728.36</td> <td>67.80</td> <td>68.30</td> <td>-0.50</td> <td>53.42</td> <td>35.12</td> <td>11.65</td> <td>32.39</td> <td>182</td> <td>342</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5728.36	67.80	68.30	-0.50	53.42	35.12	11.65	32.39	182	342	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>112.92</td> <td>-----</td> <td>-----</td> <td>98.55</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>182</td> <td>342</td> <td>Peak</td> </tr> <tr> <td>2 5700.00</td> <td>106.01</td> <td>-----</td> <td>-----</td> <td>91.64</td> <td>35.08</td> <td>11.66</td> <td>32.37</td> <td>182</td> <td>342</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5700.00	112.92	-----	-----	98.55	35.08	11.66	32.37	182	342	Peak	2 5700.00	106.01	-----	-----	91.64	35.08	11.66	32.37	182	342	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5728.36	67.80	68.30	-0.50	53.42	35.12	11.65	32.39	182	342	Peak																																																																					
Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5700.00	112.92	-----	-----	98.55	35.08	11.66	32.37	182	342	Peak																																																																					
2 5700.00	106.01	-----	-----	91.64	35.08	11.66	32.37	182	342	Average																																																																					



Mode	21																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																											
ANT	CDD 1+2																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>57.30</td> <td>74.00</td> <td>-16.70</td> <td>53.52</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>210</td> <td>95</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>49.43</td> <td>54.00</td> <td>-4.57</td> <td>45.65</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>210</td> <td>95</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>50.92</td> <td>68.30</td> <td>-17.38</td> <td>42.73</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	57.30	74.00	-16.70	53.52	39.72	14.78	50.72	210	95	Peak	2	11400.00	49.43	54.00	-4.57	45.65	39.72	14.78	50.72	210	95	Average	3	17100.00	50.92	68.30	-17.38	42.73	42.46	17.53	51.80	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>59.75</td> <td>74.00</td> <td>-14.25</td> <td>55.97</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>183</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11400.00</td> <td>51.24</td> <td>54.00</td> <td>-2.76</td> <td>47.46</td> <td>39.72</td> <td>14.78</td> <td>50.72</td> <td>183</td> <td>360</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17100.00</td> <td>50.87</td> <td>68.30</td> <td>-17.43</td> <td>42.68</td> <td>42.46</td> <td>17.53</td> <td>51.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	59.75	74.00	-14.25	55.97	39.72	14.78	50.72	183	360	Peak	2	11400.00	51.24	54.00	-2.76	47.46	39.72	14.78	50.72	183	360	Average	3	17100.00	50.87	68.30	-17.43	42.68	42.46	17.53	51.80	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11400.00	57.30	74.00	-16.70	53.52	39.72	14.78	50.72	210	95	Peak																																																																																																																	
2	11400.00	49.43	54.00	-4.57	45.65	39.72	14.78	50.72	210	95	Average																																																																																																																	
3	17100.00	50.92	68.30	-17.38	42.73	42.46	17.53	51.80	--	--	Peak																																																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																				
1	11400.00	59.75	74.00	-14.25	55.97	39.72	14.78	50.72	183	360	Peak																																																																																																																	
2	11400.00	51.24	54.00	-2.76	47.46	39.72	14.78	50.72	183	360	Average																																																																																																																	
3	17100.00	50.87	68.30	-17.43	42.68	42.46	17.53	51.80	--	--	Peak																																																																																																																	



	<b>22</b>																																																																								
<b>Mode</b>	<b>Band Edge</b>																																																																								
	<b>U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz</b>																																																																								
<b>ANT</b>	<b>CDD 1+2</b>																																																																								
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																							
<b>Peak</b>	<table border="1" data-bbox="271 1064 734 1232"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5376.40</td> <td>51.90</td> <td>74.00</td> <td>-22.10</td> <td>38.22</td> <td>34.82</td> <td>10.92</td> <td>32.06</td> <td>173</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5461.10</td> <td>51.43</td> <td>68.30</td> <td>-16.87</td> <td>37.67</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>173</td> <td>0 Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>107.08</td> <td>-----</td> <td>-----</td> <td>92.69</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>173</td> <td>0 Peak</td> </tr> <tr> <td>4</td> <td>5857.65</td> <td>53.47</td> <td>68.30</td> <td>-14.83</td> <td>39.14</td> <td>35.30</td> <td>11.52</td> <td>32.49</td> <td>173</td> <td>0 Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5376.40	51.90	74.00	-22.10	38.22	34.82	10.92	32.06	173	0 Peak	2	5461.10	51.43	68.30	-16.87	37.67	34.81	11.12	32.17	173	0 Peak	3	5720.00	107.08	-----	-----	92.69	35.11	11.66	32.38	173	0 Peak	4	5857.65	53.47	68.30	-14.83	39.14	35.30	11.52	32.49	173	0 Peak	<b>Blank</b>
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																	
1	5376.40	51.90	74.00	-22.10	38.22	34.82	10.92	32.06	173	0 Peak																																																															
2	5461.10	51.43	68.30	-16.87	37.67	34.81	11.12	32.17	173	0 Peak																																																															
3	5720.00	107.08	-----	-----	92.69	35.11	11.66	32.38	173	0 Peak																																																															
4	5857.65	53.47	68.30	-14.83	39.14	35.30	11.52	32.49	173	0 Peak																																																															
<b>Avg</b>	<table border="1" data-bbox="271 1769 734 1904"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>40.99</td> <td>54.00</td> <td>-13.01</td> <td>27.23</td> <td>34.81</td> <td>11.12</td> <td>32.17</td> <td>173</td> <td>0 Average</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>99.88</td> <td>-----</td> <td>-----</td> <td>85.49</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>173</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5460.00	40.99	54.00	-13.01	27.23	34.81	11.12	32.17	173	0 Average	2	5720.00	99.88	-----	-----	85.49	35.11	11.66	32.38	173	0 Average	<b>Blank</b>																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																	
1	5460.00	40.99	54.00	-13.01	27.23	34.81	11.12	32.17	173	0 Average																																																															
2	5720.00	99.88	-----	-----	85.49	35.11	11.66	32.38	173	0 Average																																																															



	22																																																																								
Mode	Band Edge																																																																								
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																								
ANT	CDD 1+2																																																																								
Pol.	Vertical	Fundamental																																																																							
Peak	<p style="text-align: right;">Date: 2023-12-13</p>																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5381.90</td> <td>52.90</td> <td>74.00</td> <td>-21.10</td> <td>39.23</td> <td>34.82</td> <td>10.92</td> <td>32.07</td> <td>100</td> <td>296</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5467.70</td> <td>52.03</td> <td>68.30</td> <td>-16.27</td> <td>38.24</td> <td>34.81</td> <td>11.15</td> <td>32.17</td> <td>100</td> <td>296</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>5720.00</td> <td>116.19</td> <td>-----</td> <td>-----</td> <td>101.80</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>296</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>5894.50</td> <td>53.88</td> <td>68.30</td> <td>-14.42</td> <td>39.60</td> <td>35.35</td> <td>11.45</td> <td>32.52</td> <td>100</td> <td>296</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5381.90	52.90	74.00	-21.10	39.23	34.82	10.92	32.07	100	296	Peak	2	5467.70	52.03	68.30	-16.27	38.24	34.81	11.15	32.17	100	296	Peak	3	5720.00	116.19	-----	-----	101.80	35.11	11.66	32.38	100	296	Peak	4	5894.50	53.88	68.30	-14.42	39.60	35.35	11.45	32.52	100	296
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5381.90	52.90	74.00	-21.10	39.23	34.82	10.92	32.07	100	296	Peak																																																														
2	5467.70	52.03	68.30	-16.27	38.24	34.81	11.15	32.17	100	296	Peak																																																														
3	5720.00	116.19	-----	-----	101.80	35.11	11.66	32.38	100	296	Peak																																																														
4	5894.50	53.88	68.30	-14.42	39.60	35.35	11.45	32.52	100	296	Peak																																																														
Avg	<p style="text-align: right;">Date: 2023-12-13</p>																																																																								
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.40</td> <td>41.94</td> <td>54.00</td> <td>-12.06</td> <td>28.20</td> <td>34.81</td> <td>11.09</td> <td>32.16</td> <td>100</td> <td>296</td> <td>Average</td> </tr> <tr> <td>2</td> <td>5720.00</td> <td>109.30</td> <td>-----</td> <td>-----</td> <td>94.91</td> <td>35.11</td> <td>11.66</td> <td>32.38</td> <td>100</td> <td>296</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5453.40	41.94	54.00	-12.06	28.20	34.81	11.09	32.16	100	296	Average	2	5720.00	109.30	-----	-----	94.91	35.11	11.66	32.38	100	296	Average																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	5453.40	41.94	54.00	-12.06	28.20	34.81	11.09	32.16	100	296	Average																																																														
2	5720.00	109.30	-----	-----	94.91	35.11	11.66	32.38	100	296	Average																																																														