



FCC RF Test Report

APPLICANT : TP-LINK CORPORATION PTE. LTD.,
EQUIPMENT : AX1500 Wi-Fi 6 Portable Router
BRAND NAME : tp-link
MODEL NAME : TL-WR1502X
FCC ID : 2BCGWWR1502X
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Nov. 26, 2023 ~ Dec. 01, 2023

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 8

 1.6 Testing Location 8

 1.7 Test Software..... 9

 1.8 Applicable Standards..... 9

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 10

 2.1 Carrier Frequency and Channel 10

 2.2 Test Mode..... 11

 2.3 Connection Diagram of Test System..... 13

 2.4 Support Unit used in test configuration and system 14

 2.5 EUT Operation Test Setup 14

 2.6 Measurement Results Explanation Example..... 14

3 TEST RESULT..... 15

 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 15

 3.2 Maximum Conducted Output Power Measurement 20

 3.3 Power Spectral Density Measurement 22

 3.4 Unwanted Emissions Measurement 27

 3.5 AC Conducted Emission Measurement..... 32

 3.6 Antenna Requirements 34

4 LIST OF MEASURING EQUIPMENT 36

5 MEASUREMENT UNCERTAINTY 37

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR3N0708B	Rev. 01	Initial issue of report	Dec. 19, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm for UNII-1, and 24 dBm for UNII-2A/2C	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 17 dBm/MHz for UNII-1, and 11 dBm/MHz for UNII-2A/2C	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.16 dB at 5352.96 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 5.09 dB at 0.43 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

TP-LINK CORPORATION PTE. LTD.,
7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

1.2 Manufacturer

TP-LINK CORPORATION PTE. LTD.,
7 Temasek Boulevard #29-03 Suntec Tower One, Singapore 038987

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AX1500 Wi-Fi 6 Portable Router
Brand Name	tp-link
Model Name	TL-WR1502X
FCC ID	2BCGWWR1502X
SN	Conducted: T23C026000001 Conduction/Radiation: T23C026000002
HW Version	V1.0
SW Version	1.0.0 Build 20231018 rel.70140
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p>MIMO <Ant. 1+2></p> <p><5180 MHz ~ 5240 MHz></p> <p>802.11a : 27.40 dBm / 0.5495 W 802.11ac VHT20: 27.44 dBm / 0.5546 W 802.11ac VHT40: 24.92 dBm / 0.3105 W 802.11ac VHT80: 21.61 dBm / 0.1449 W 802.11ax HE20: 27.57 dBm / 0.5715 W 802.11ax HE40: 25.06 dBm / 0.3206 W 802.11ax HE80: 21.74 dBm / 0.1493 W</p> <p><5260 MHz ~ 5320 MHz></p> <p>802.11a : 21.34 dBm / 0.1361 W 802.11ac VHT20: 21.60 dBm / 0.1445 W 802.11ac VHT40: 23.58 dBm / 0.2280 W 802.11ac VHT80: 21.81 dBm / 0.1517 W 802.11ax HE20: 21.73 dBm / 0.1489 W 802.11ax HE40: 23.66 dBm / 0.2323 W 802.11ax HE80: 21.93 dBm / 0.1560 W</p> <p><5500 MHz ~ 5720 MHz ></p> <p>802.11a : 21.66 dBm / 0.1466 W 802.11ac VHT20: 21.79 dBm / 0.1510 W 802.11ac VHT40: 23.75 dBm / 0.2371 W 802.11ac VHT80: 23.61 dBm / 0.2296 W 802.11ax HE20: 21.94 dBm / 0.1563 W 802.11ax HE40: 23.81 dBm / 0.2404 W 802.11ax HE80: 23.69 dBm / 0.2339 W</p> <p><5745 MHz ~ 5825 MHz></p> <p>802.11a : 26.72 dBm / 0.4699 W 802.11ac VHT20: 26.74 dBm / 0.4721 W 802.11ac VHT40: 26.82 dBm / 0.4808 W 802.11ac VHT80: 26.19 dBm / 0.4159 W 802.11ax HE20: 26.85 dBm / 0.4842 W 802.11ax HE40: 26.97 dBm / 0.4977 W 802.11ax HE80: 26.36 dBm / 0.4325 W</p>



<p>99% Occupied Bandwidth</p>	<p><5180 MHz ~ 5240 MHz> 802.11a: 27.42 MHz 802.11ax HE20: 26.42 MHz 802.11ax HE40: 37.56 MHz 802.11ax HE80: 76.72 MHz <5260 MHz ~ 5320 MHz> 802.11a: 16.33 MHz 802.11ax HE20: 18.73 MHz 802.11ax HE40: 37.36 MHz 802.11ax HE80: 77.20 MHz <5500 MHz ~ 5720 MHz> 802.11a: 16.38 MHz 802.11ax HE20: 18.83 MHz 802.11ax HE40: 37.46 MHz 802.11ax HE80: 77.44 MHz <5745 MHz ~ 5825 MHz> 802.11a: 27.77 MHz 802.11ax HE20: 26.82 MHz 802.11ax HE40: 49.15 MHz 802.11ax HE80: 85.71 MHz</p>												
<p>Antenna Type</p>	<p>PIFA Antenna</p>												
<p>Antenna Gain</p>	<p><5180 MHz ~ 5240 MHz> <Ant. 1> : 2.31 dBi <Ant. 2> : 3.00 dBi <5260 MHz ~ 5320 MHz> <Ant. 1> : 2.54 dBi <Ant. 2> : 2.78 dBi <5500 MHz ~ 5720 MHz> <Ant. 1> : 3.00 dBi <Ant. 2> : 2.61 dBi <5745 MHz ~ 5825 MHz> <Ant. 1> : 2.51 dBi <Ant. 2> : 2.71 dBi</p>												
<p>Type of Modulation</p>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)</p>												
<p>Antenna Function Description</p>	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac/ax SISO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 a/n/ac/ax MIMO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 ac/ax Tx Beamforming</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11 a/n/ac/ax SISO	V	V	802.11 a/n/ac/ax MIMO	V	V	802.11 ac/ax Tx Beamforming	V	V
	Ant. 1	Ant. 2											
802.11 a/n/ac/ax SISO	V	V											
802.11 a/n/ac/ax MIMO	V	V											
802.11 ac/ax Tx Beamforming	V	V											

Note:

1. For SISO&MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
2. The EUT supports beamforming and MIMO CDD mode, and the CDD mode is the worst case. Therefore, all test items are evaluated in this report. The beamforming mode only evaluates the



output power.

- 3. Due to the same modulation between 802.11n and 802.11ac, so 802.11n-HT20 and HT40 are covered by 802.11ac-VHT20 and VHT40 in this report, and power setting for 802.11n-HT20 and HT40 will not be greater than 802.11ac-VHT20 and VHT40.
- 4. For 802.11ac-VHT20/VHT40/VHT80 mode and 802.11ax-HE20/HE40/HE80 mode, the whole testing has assessed only 802.11ax-HE20/HE40/HE80 by referring to their higher conducted power.
- 5. 802.11ax mode only supports full RU for this device, so only the full RU is evaluated.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "#n" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

CDD Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Co-location mode
WLAN 2.4G 802.11g CH01 Tx + WLAN 5G 802.11ax HE80 CH58 Tx

AC Conducted Emission	Mode 1 : WIFI(5G) Link + WAN Link + LAN Link + USB Link with Hard Disk (Data from Notebook to Hard Disk) via EUT + USB Cable (Powered by Adapter)
Remark: For Radiated Test Cases, the tests were performed with Adapter and USB Cable.	




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	40/44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

For Conducted Emission:

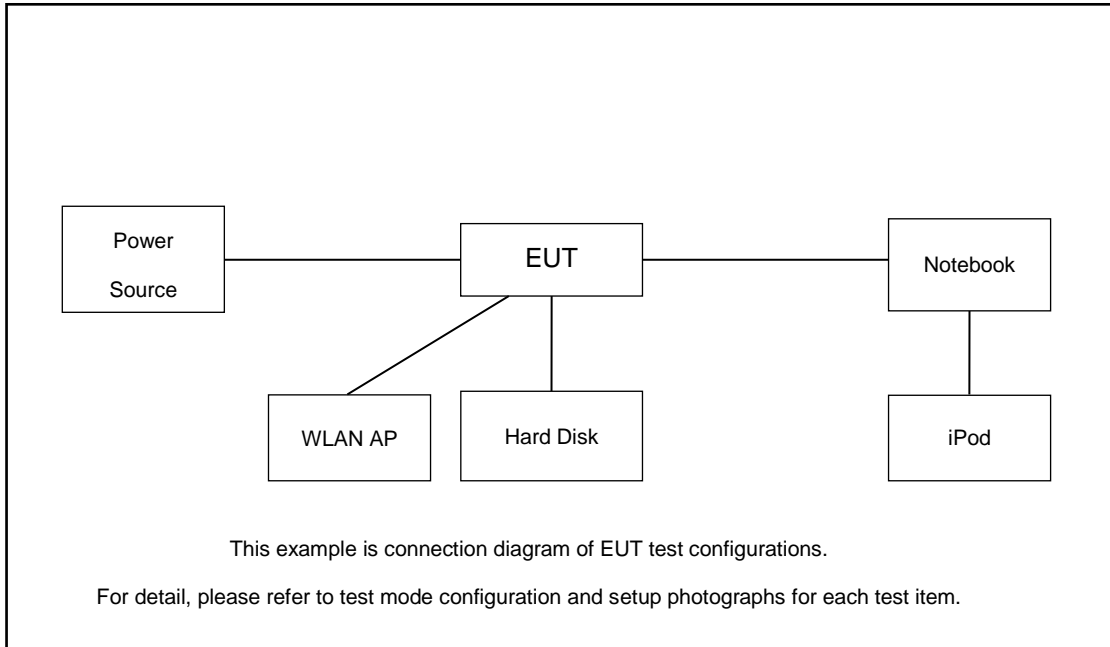

For Radiated Emission:

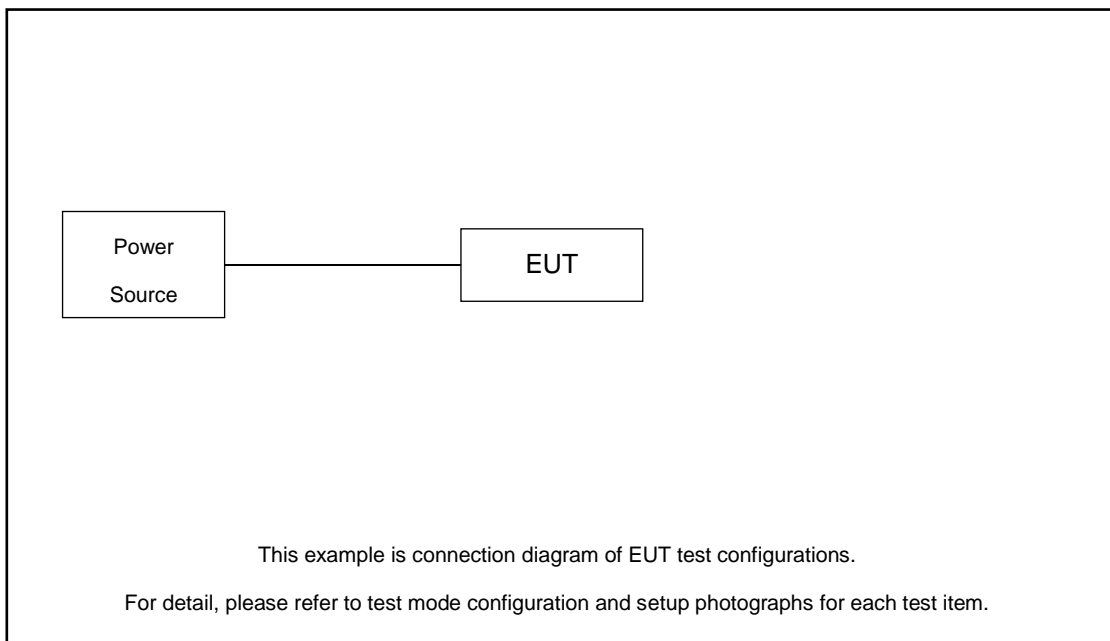



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Hard Disk	N/A	N/A	N/A	N/A	N/A
4.	iPod	Apple	MC69029/A	N/A	N/A	N/A
5.	RJ45 Cable	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.8 dB and 10dB attenuator.

$$\begin{aligned}
\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
&= 2.8 + 10 = 12.8 \text{ (dB)}
\end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> Set RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> Set RBW = 100kHz. Set the VBW ≥ 3 x RBW. Detector = Peak. Trace mode = max hold Measure the maximum width of the emission that is 6 dB down from the peak of the emission. Measure and record the results in the test report.



3.1.4 Test Setup


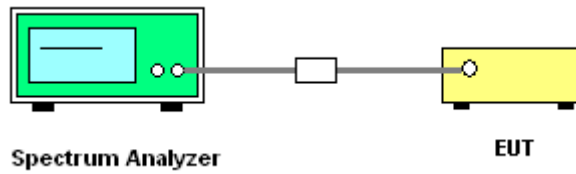




3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

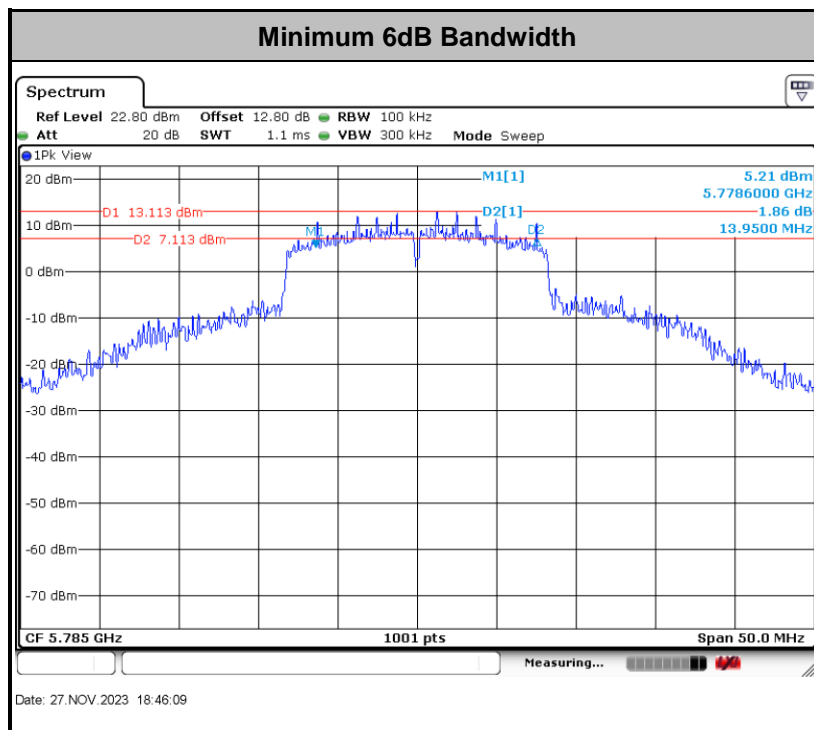

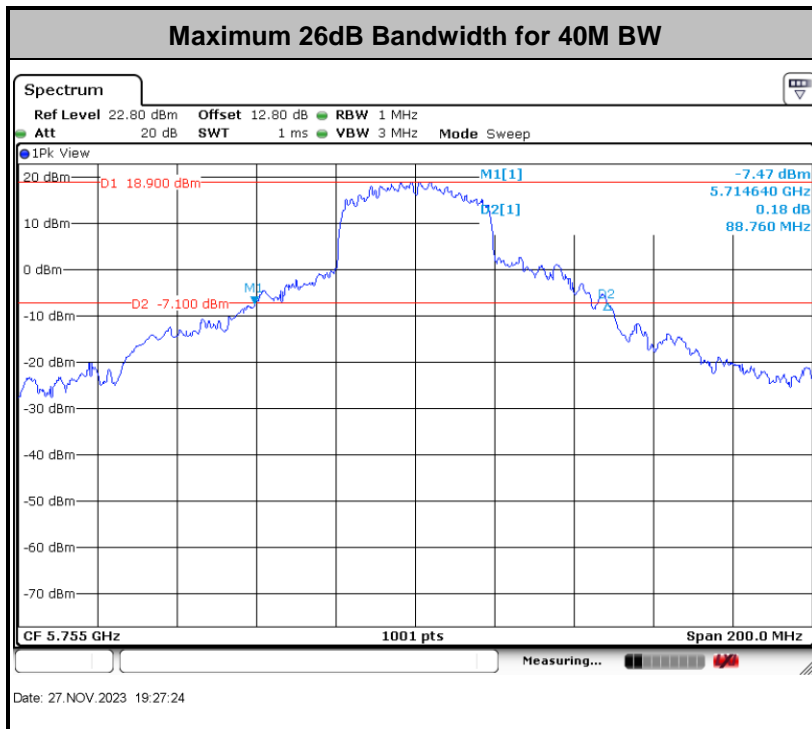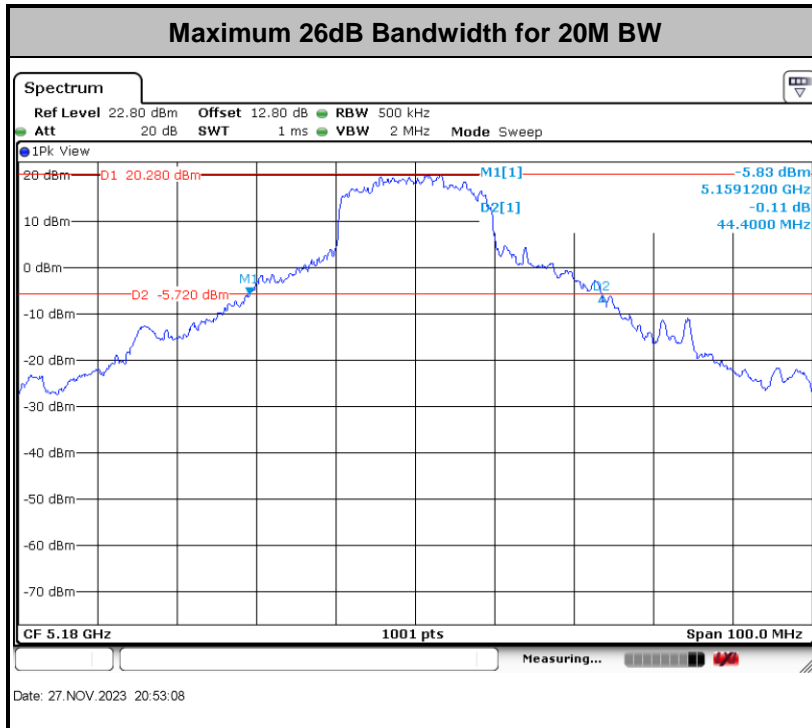

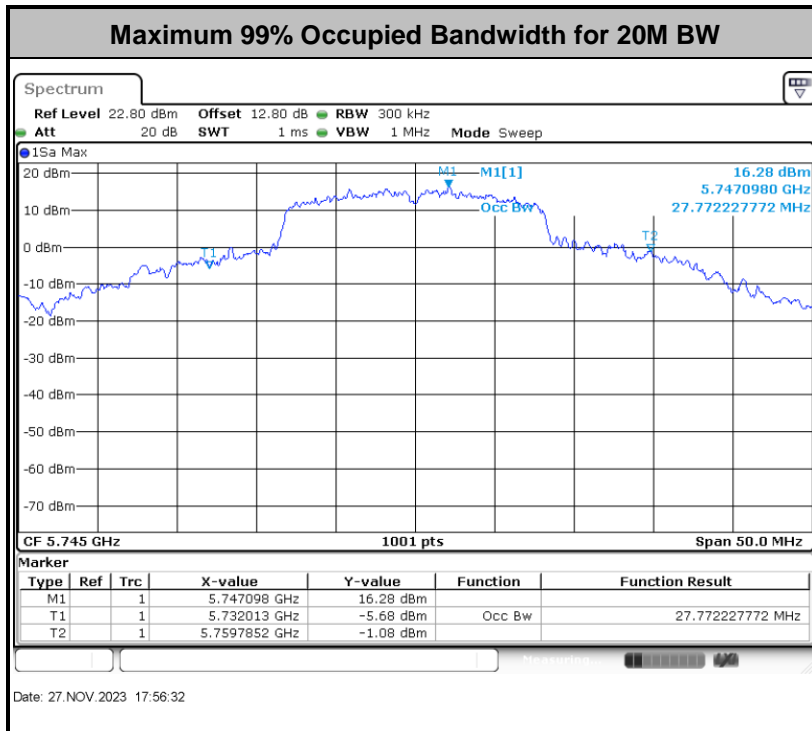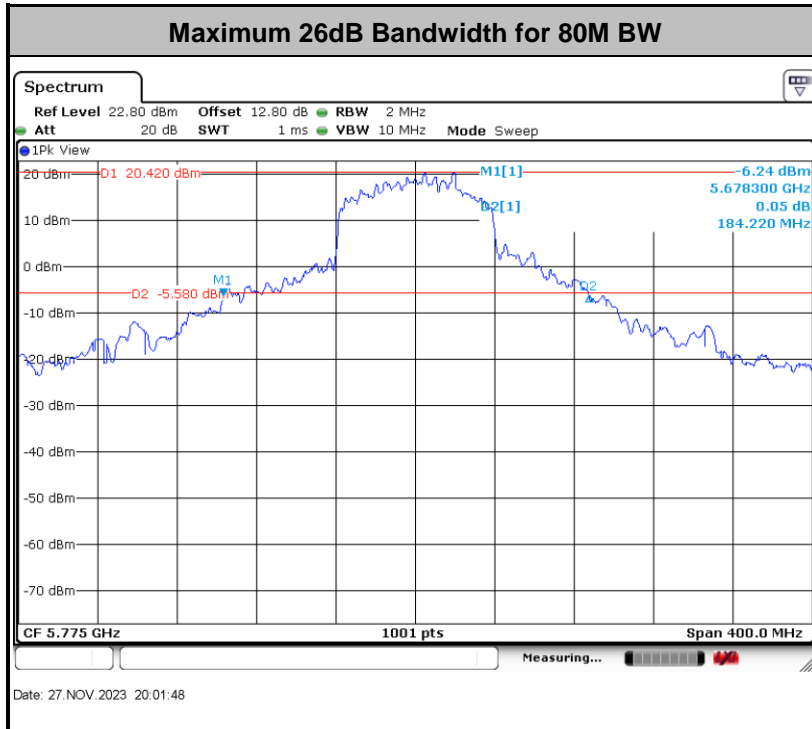

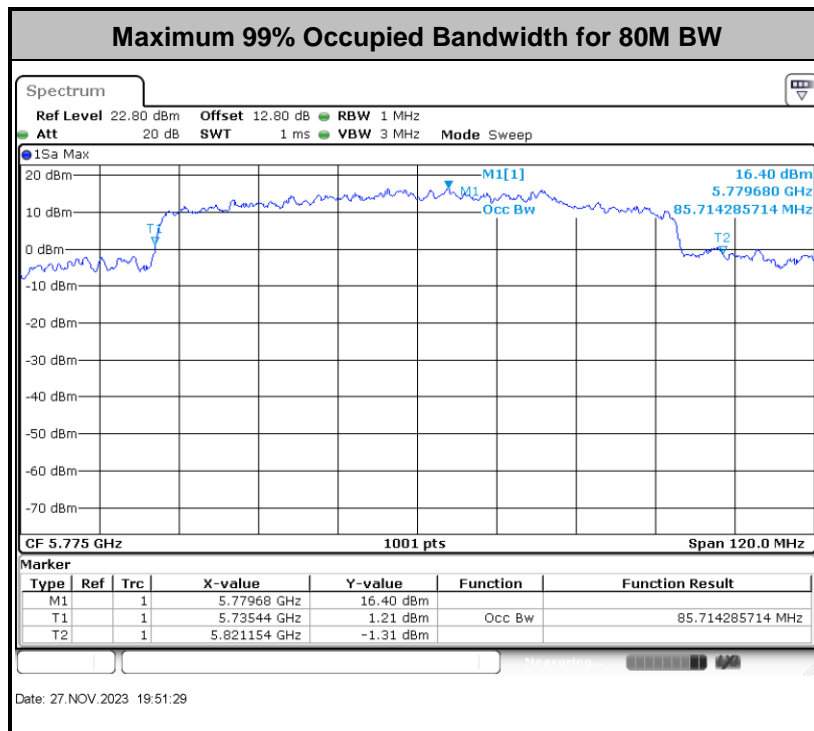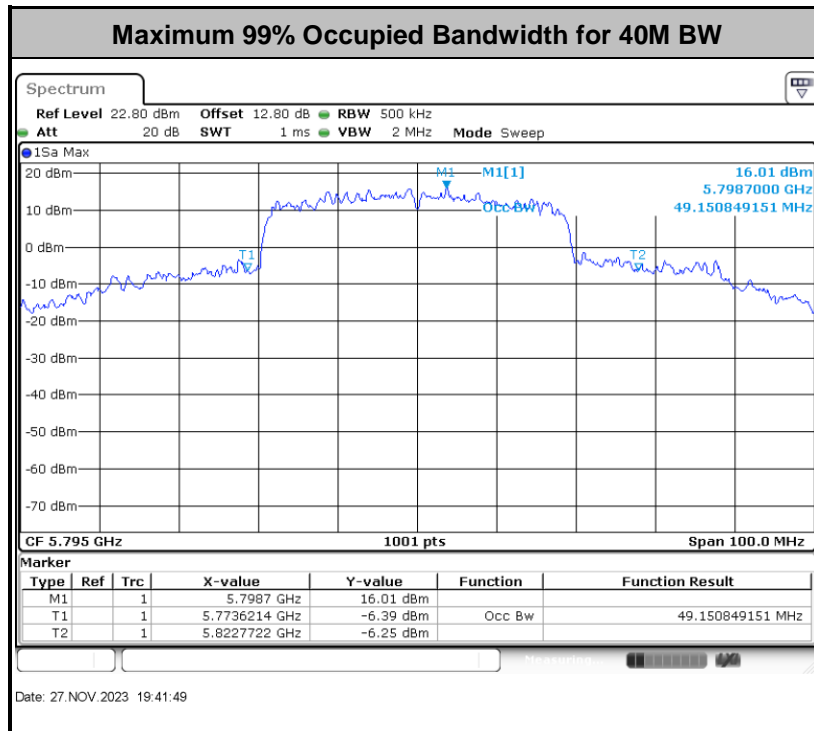

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

<TXBF Modes>


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 for TXBF modes.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

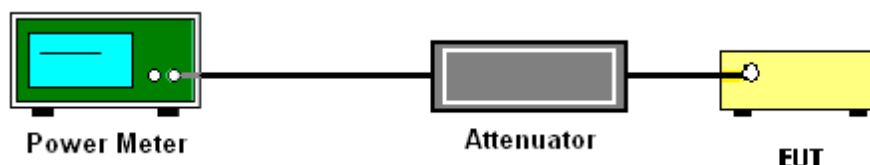

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW \geq 1 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add $10 \log(N_{ANT})$ dB, where N_{ANT} is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity $10 \log(N_{ANT})$ dB is added to each spectrum value before comparing to the emission limit.

3.3.4 Test Setup

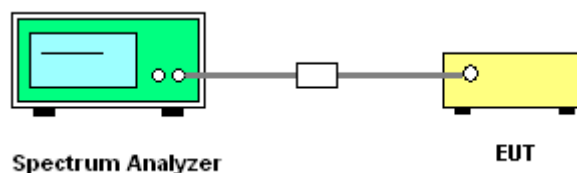




3.3.5 Test Result of Power Spectral Density



Please refer to Appendix A.

For devices operating in the bands UNII-1/2A/2C

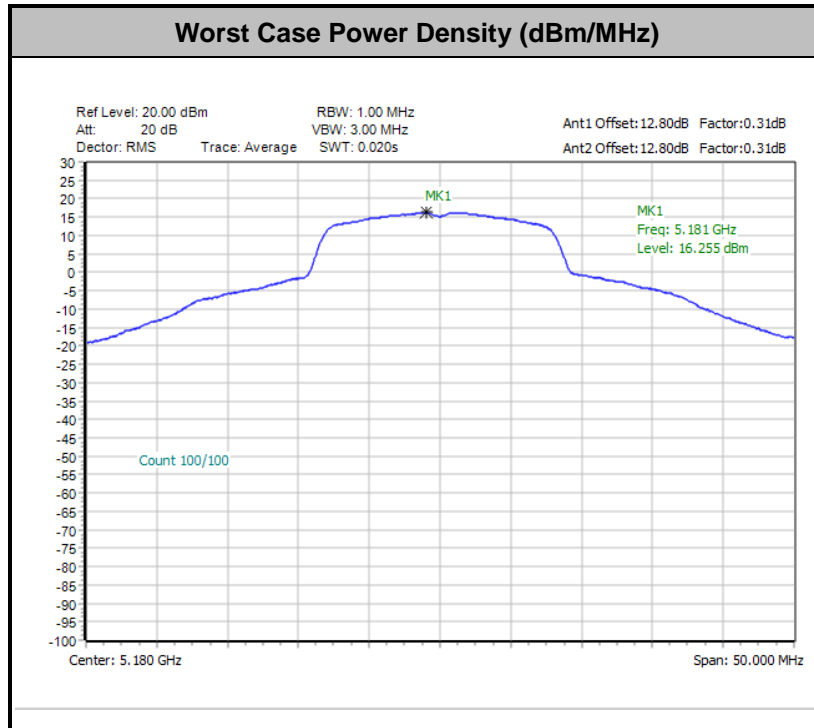



For devices operating in the band UNII-3

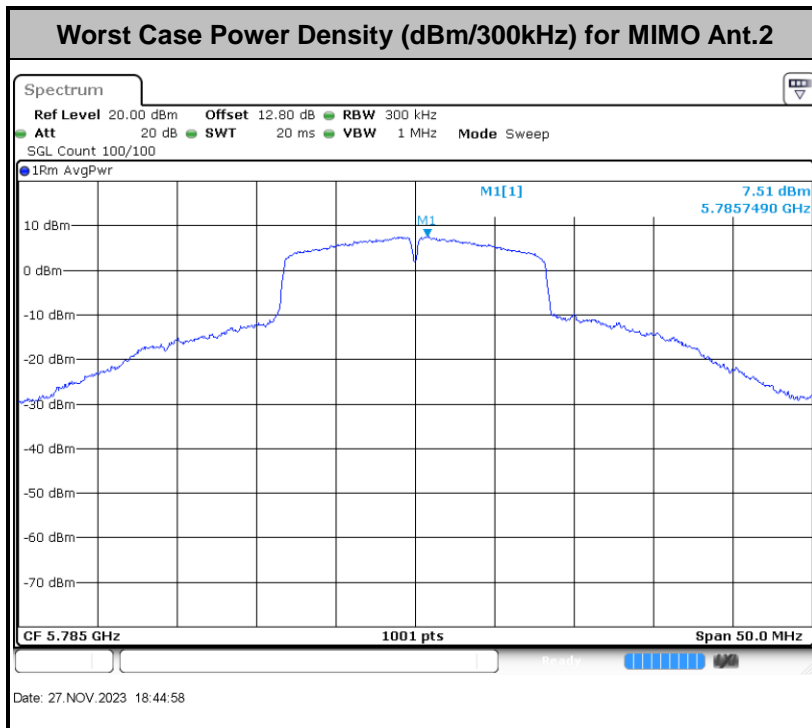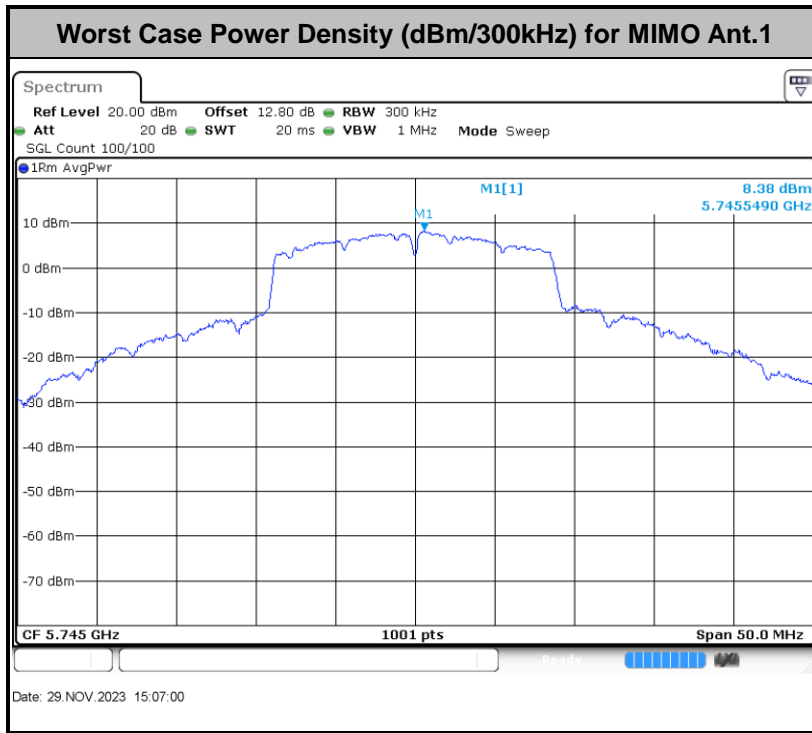



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

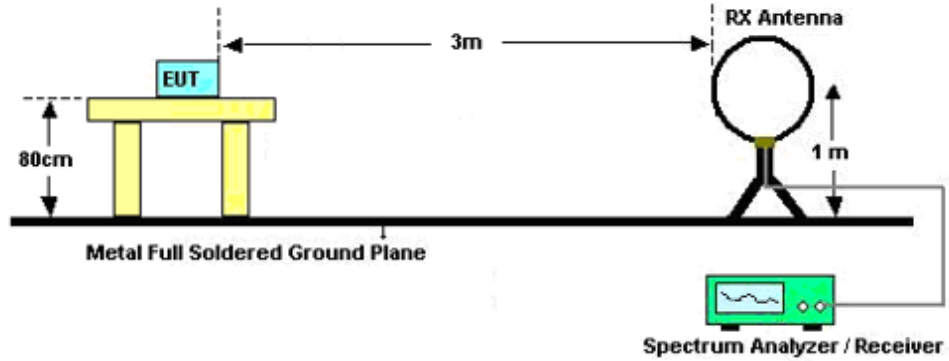

For radiated emissions from 30MHz to 1GHz

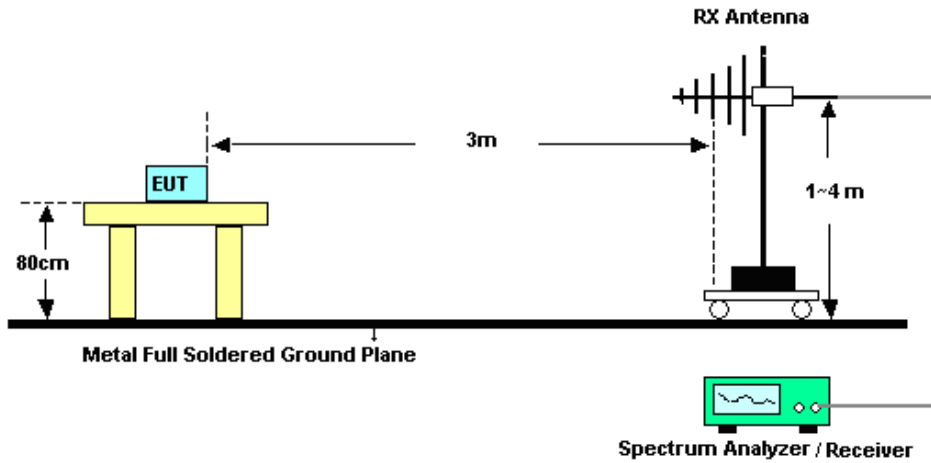

For radiated emissions above 1GHz

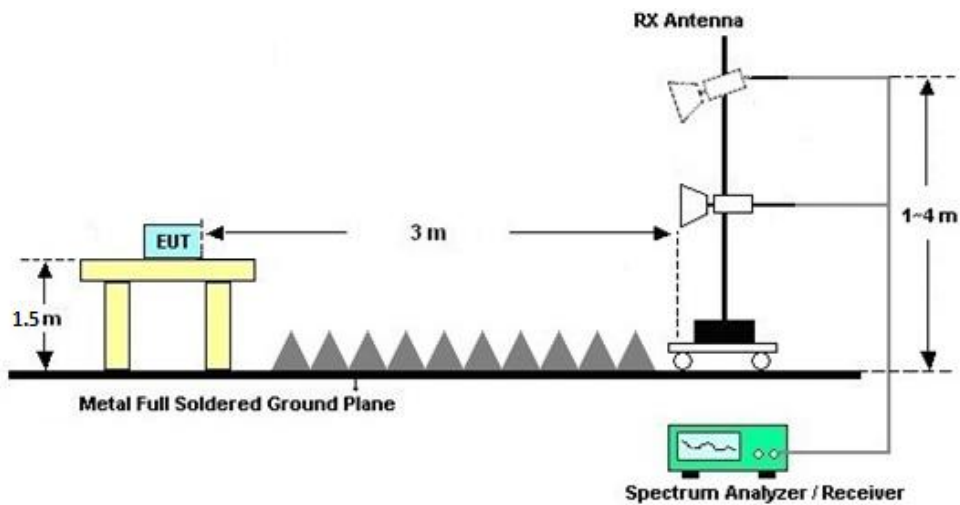



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

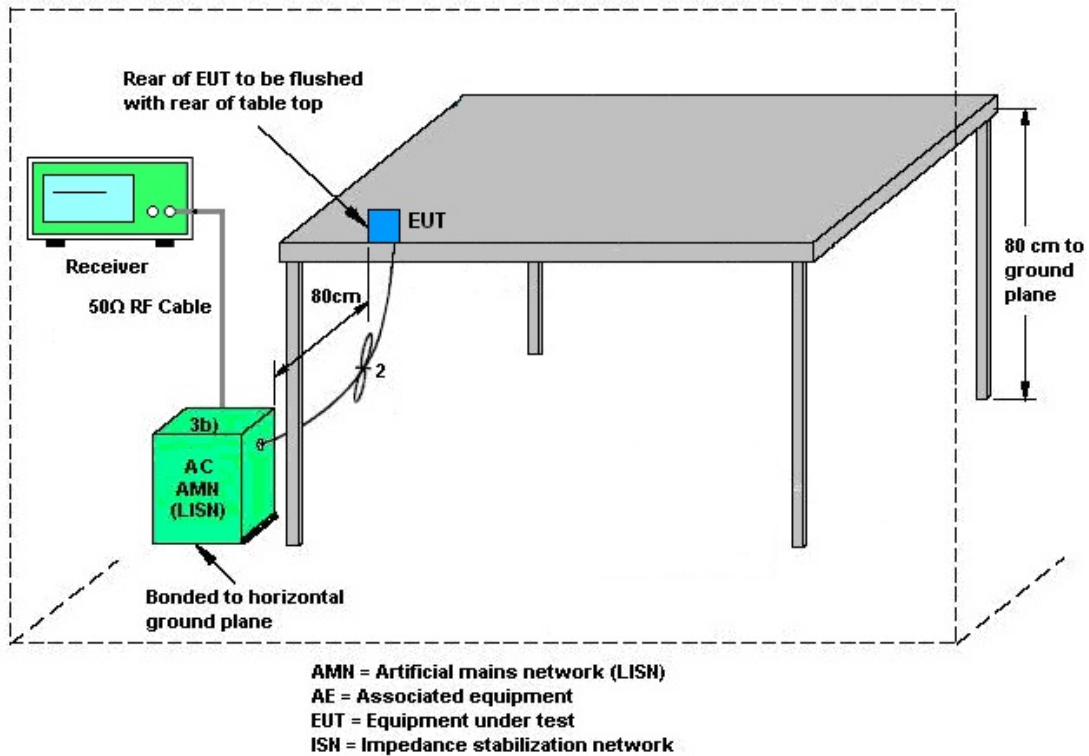

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode for 802.11a/n/ac/ax modes.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

	Ant. 1 (dBi)	Ant. 2 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
UNII-1	2.31	3.00	3.00	5.67	0.00	0.00
UNII-2A	2.54	2.78	2.78	5.67	0.00	0.00
UNII-2C	3.00	2.61	3.00	5.82	0.00	0.00
UNII-3	2.51	2.71	2.71	5.62	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

TXBF modes

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For TXBF transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports beamforming for 802.11ac/ax modes.

The directional gain calculation is following F)2)e)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 1	Ant 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
UNII-1	2.31	3.00	5.67	5.67	0.00	0.00
UNII-2A	2.54	2.78	5.67	5.67	0.00	0.00
UNII-2C	3.00	2.61	5.82	5.82	0.00	0.00
UNII-3	2.51	2.71	5.62	5.62	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Nov. 27, 2023~Nov. 29, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 27, 2022	Nov. 27, 2023~Nov. 29, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 27, 2022	Nov. 27, 2023~Nov. 29, 2023	Dec. 26, 2023	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	Nov. 26, 2023~Dec. 01, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	Nov. 26, 2023~Dec. 01, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Nov. 26, 2023~Dec. 01, 2023	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Nov. 26, 2023~Dec. 01, 2023	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	Nov. 26, 2023~Dec. 01, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Nov. 26, 2023~Dec. 01, 2023	Jul. 06, 2024	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 08, 2023	Nov. 26, 2023~Dec. 01, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2023	Nov. 26, 2023~Dec. 01, 2023	Oct. 17, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Nov. 26, 2023~Dec. 01, 2023	Oct. 17, 2024	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5G Hz	Dec. 26, 2022	Nov. 26, 2023~Dec. 01, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	6160100027 29	1 N/A	Oct. 18, 2023	Nov. 26, 2023~Dec. 01, 2023	Oct. 17, 2024	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Nov. 26, 2023~Dec. 01, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Nov. 26, 2023~Dec. 01, 2023	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Dec. 01, 2023	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Dec. 01, 2023	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Dec. 01, 2023	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	6160200008 91	100Vac~250Vac	Jul. 07, 2023	Dec. 01, 2023	Jul. 06, 2024	Conduction (CO01-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.7dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2023/11/27~11/29	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U NII-1													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	26.82	27.42	28.38	22.14	-	-	23.01		
11a	6Mbps	2	44	5220	26.72	26.52	40.96	41.96	-	-	23.01		
11a	6Mbps	2	48	5240	16.63	16.58	28.44	28.62	-	-	22.20		
HE20	MCS0	2	36	5180	24.83	26.42	43.38	44.40	-	-	23.01		
HE20	MCS0	2	44	5220	25.47	26.07	43.32	44.08	-	-	23.01		
HE20	MCS0	2	48	5240	18.83	18.88	23.46	25.14	-	-	22.75		
HE40	MCS0	2	38	5190	37.26	37.26	39.96	40.08	-	-	23.01		
HE40	MCS0	2	46	5230	37.56	37.56	60.30	73.76	-	-	23.01		
HE80	MCS0	2	42	5210	76.60	76.72	81.12	81.84	-	-	23.01		

TEST RESULTS DATA
Average Power Table

U NII-1																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	36	Full	5180	0.31	0.31	21.37	21.18	24.29	30.00	3.00	3.00	Pass	1950	
11a	6Mbps	2	40	Full	5200	0.31	0.31	24.20	24.32	27.27	30.00	3.00	3.00	Pass	2300	
11a	6Mbps	2	44	Full	5220	0.31	0.31	24.31	24.46	27.40	30.00	3.00	3.00	Pass	2300	
11a	6Mbps	2	48	Full	5240	0.31	0.31	21.84	21.99	24.93	30.00	3.00	3.00	Pass	2050	
VHT20	MCS0	2	36	Full	5180	0.36	0.33	20.59	20.37	23.49	30.00	3.00	3.00	Pass	1900	
VHT20	MCS0	2	40	Full	5200	0.36	0.33	24.21	24.37	27.30	30.00	3.00	3.00	Pass	2300	
VHT20	MCS0	2	44	Full	5220	0.36	0.33	24.34	24.52	27.44	30.00	3.00	3.00	Pass	2300	
VHT20	MCS0	2	48	Full	5240	0.36	0.33	21.55	21.69	24.63	30.00	3.00	3.00	Pass	2050	
VHT40	MCS0	2	38	Full	5190	0.66	0.66	19.82	19.60	22.72	30.00	3.00	3.00	Pass	1800	
VHT40	MCS0	2	46	Full	5230	0.66	0.66	21.81	22.01	24.92	30.00	3.00	3.00	Pass	2050	
VHT80	MCS0	2	42	Full	5210	0.19	0.19	18.73	18.46	21.61	30.00	3.00	3.00	Pass	1650	
HE20	MCS0	2	36	Full	5180	0.44	0.41	20.74	20.52	23.64	30.00	3.00	3.00	Pass	1900	
			40	Full	5200	0.44	0.41	24.31	24.51	27.42	30.00	3.00	3.00	Pass	2300	
			44	Full	5220	0.44	0.41	24.47	24.65	27.57	30.00	3.00	3.00	Pass	2300	
			48	Full	5240	0.44	0.41	21.67	21.80	24.74	30.00	3.00	3.00	Pass	2050	
HE40	MCS0	2	38	Full	5190	0.12	0.12	19.90	19.69	22.81	30.00	3.00	3.00	Pass	1800	
			46	Full	5230	0.12	0.12	21.95	22.14	25.06	30.00	3.00	3.00	Pass	2050	
HE80	MCS0	2	42	Full	5210	0.20	0.20	18.86	18.60	21.74	30.00	3.00	3.00	Pass	1650	

TEST RESULTS DATA
Power Spectral Density

U NII-1															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	Full	5180	0.31	0.31			16.26	17.00	5.67		Pass	
11a	6Mbps	2	44	Full	5220	0.31	0.31			15.85	17.00	5.67		Pass	
11a	6Mbps	2	48	Full	5240	0.31	0.31			15.76	17.00	5.67		Pass	
HE20	MCS0	2	36	Full	5180	0.44	0.41			15.55	17.00	5.67		Pass	
HE20	MCS0	2	44	Full	5220	0.44	0.41			15.39	17.00	5.67		Pass	
HE20	MCS0	2	48	Full	5240	0.44	0.41			15.46	17.00	5.67		Pass	
HE40	MCS0	2	38	Full	5190	0.12	0.12			13.05	17.00	5.67		Pass	
HE40	MCS0	2	46	Full	5230	0.12	0.12			12.75	17.00	5.67		Pass	
HE80	MCS0	2	42	Full	5210	0.20	0.20			10.15	17.00	5.67		Pass	

TEST RESULTS DATA
26dB and 99% OBW

U NII-2A															
Mod.	Data Rate	Nrx	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	5260	16.33	16.33	21.90	20.70	23.13		29.13		23.98		
11a	6Mbps	2	60	5300	16.28	16.23	18.54	18.36	23.10		29.10		23.64		
11a	6Mbps	2	64	5320	16.28	16.23	18.60	18.30	23.10		29.10		23.62		
HE20	MCS0	2	52	5260	18.73	18.73	20.46	20.46	23.73		29.73		23.98		
HE20	MCS0	2	60	5300	18.73	18.73	20.52	20.40	23.73		29.73		23.98		
HE20	MCS0	2	64	5320	18.73	18.73	20.46	20.40	23.73		29.73		23.98		
HE40	MCS0	2	54	5270	37.36	37.36	39.96	40.44	23.98		30.00		23.98		
HE40	MCS0	2	62	5310	37.26	37.36	39.96	39.96	23.98		30.00		23.98		
HE80	MCS0	2	58	5290	77.20	77.20	116.35	113.30	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

U NII-2A																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
11a	6Mbps	2	52	Full	5260	0.31	0.31	18.36	18.29	21.34	23.98	2.78	30	Pass	1650		
11a	6Mbps	2	60	Full	5300	0.31	0.31	18.00	18.03	21.03	23.64	2.78	30	Pass	1700		
11a	6Mbps	2	64	Full	5320	0.31	0.31	17.96	17.94	20.96	23.62	2.78	30	Pass	1700		
VHT20	MCS0	2	52	Full	5260	0.36	0.33	18.69	18.49	21.60	23.98	2.78	30	Pass	1700		
VHT20	MCS0	2	60	Full	5300	0.36	0.33	18.06	18.04	21.06	23.98	2.78	30	Pass	1700		
VHT20	MCS0	2	64	Full	5320	0.36	0.33	18.02	17.95	20.99	23.98	2.78	30	Pass	1700		
VHT40	MCS0	2	54	Full	5270	0.66	0.66	20.62	20.52	23.58	23.98	2.78	30	Pass	1850		
VHT40	MCS0	2	62	Full	5310	0.66	0.66	20.39	20.20	23.30	23.98	2.78	30	Pass	1850		
VHT80	MCS0	2	58	Full	5290	0.19	0.19	18.86	18.72	21.81	23.98	2.78	30	Pass	1700		
HE20	MCS0	2	52	Full	5260	0.44	0.41	18.81	18.64	21.73	23.73	2.78	30	Pass	1700		
			60	Full	5300	0.44	0.41	18.19	18.18	21.19	23.73	2.78	30	Pass	1700		
			64	Full	5320	0.44	0.41	18.16	18.09	21.13	23.73	2.78	30	Pass	1700		
HE40	MCS0	2	54	Full	5270	0.12	0.12	20.70	20.59	23.66	23.98	2.78	30	Pass	1850		
			62	Full	5310	0.12	0.12	20.45	20.25	23.36	23.98	2.78	30	Pass	1850		
HE80	MCS0	2	58	Full	5290	0.20	0.20	19.00	18.85	21.93	23.98	2.78	30	Pass	1700		

TEST RESULTS DATA
Power Spectral Density

U NII-2A															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	52	Full	5260	0.31	0.31			10.42	11.00		5.67		Pass
11a	6Mbps	2	60	Full	5300	0.31	0.31			10.67	11.00		5.67		Pass
11a	6Mbps	2	64	Full	5320	0.31	0.31			10.56	11.00		5.67		Pass
HE20	MCS0	2	52	Full	5260	0.44	0.41			10.50	11.00		5.67		Pass
HE20	MCS0	2	60	Full	5300	0.44	0.41			10.58	11.00		5.67		Pass
HE20	MCS0	2	64	Full	5320	0.44	0.41			10.55	11.00		5.67		Pass
HE40	MCS0	2	54	Full	5270	0.12	0.12			9.84	11.00		5.67		Pass
HE40	MCS0	2	62	Full	5310	0.12	0.12			9.45	11.00		5.67		Pass
HE80	MCS0	2	58	Full	5290	0.20	0.20			7.61	11.00		5.67		Pass

TEST RESULTS DATA
26dB and 99% OBW

U NII-2C															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	5500	16.38	16.28	22.02	21.90	23.12		29.12		23.98		
11a	6Mbps	2	116	5580	16.38	16.33	22.02	21.96	23.13		29.13		23.98		
11a	6Mbps	2	140	5700	16.38	16.33	25.68	21.96	23.13		29.13		23.98		
11a	6Mbps	2	144	5720	16.23	16.18	18.54	18.30	23.09		29.09		23.62		
HE20	MCS0	2	100	5500	18.78	18.73	20.40	20.46	23.73		29.73		23.98		
HE20	MCS0	2	116	5580	18.83	18.78	25.02	20.52	23.74		29.74		23.98		
HE20	MCS0	2	140	5700	18.78	18.83	22.68	22.44	23.74		29.74		23.98		
HE20	MCS0	2	144	5720	18.68	18.68	20.46	20.34	23.71		29.71		23.98		
HE40	MCS0	2	102	5510	37.36	37.36	40.08	40.32	23.98		30.00		23.98		
HE40	MCS0	2	110	5550	37.36	37.46	41.28	40.08	23.98		30.00		23.98		
HE40	MCS0	2	134	5670	37.36	37.46	39.96	46.80	23.98		30.00		23.98		
HE40	MCS0	2	142	5710	37.26	37.26	39.96	40.08	23.98		30.00		23.98		
HE80	MCS0	2	106	5530	77.32	77.20	115.47	101.79	23.98		30.00		23.98		
HE80	MCS0	2	122	5610	77.44	77.32	116.27	115.46	23.98		30.00		23.98		
HE80	MCS0	2	138	5690	76.84	76.84	98.64	98.40	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

U NII-2C																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
11a	6Mbps	2	100	Full	5500	0.31	0.31	18.42	18.36	21.40	23.98	3.00	30	Pass	1650		
11a	6Mbps	2	116	Full	5580	0.31	0.31	18.65	18.65	21.66	23.98	3.00	30	Pass	1650		
11a	6Mbps	2	140	Full	5700	0.31	0.31	18.31	18.15	21.24	23.98	3.00	30	Pass	1650		
11a	6Mbps	2	144	Full	5720	0.31	0.31	18.32	17.94	21.15	23.62	3.00	30	Pass	1650		
VHT20	MCS0	2	100	Full	5500	0.36	0.33	18.56	18.43	21.50	23.98	3.00	30	Pass	1700		
VHT20	MCS0	2	116	Full	5580	0.36	0.33	18.84	18.72	21.79	23.98	3.00	30	Pass	1700		
VHT20	MCS0	2	140	Full	5700	0.36	0.33	18.39	18.31	21.36	23.98	3.00	30	Pass	1700		
VHT20	MCS0	2	144	Full	5720	0.36	0.33	18.64	18.18	21.43	23.98	3.00	30	Pass	1700		
VHT40	MCS0	2	102	Full	5510	0.66	0.66	20.77	20.48	23.63	23.98	3.00	30	Pass	1850		
VHT40	MCS0	2	110	Full	5550	0.66	0.66	20.73	20.76	23.75	23.98	3.00	30	Pass	1850		
VHT40	MCS0	2	134	Full	5670	0.66	0.66	20.84	20.33	23.60	23.98	3.00	30	Pass	1850		
VHT40	MCS0	2	142	Full	5710	0.66	0.66	20.43	20.08	23.26	23.98	3.00	30	Pass	1850		
VHT80	MCS0	2	106	Full	5530	0.19	0.19	19.49	19.00	22.27	23.98	3.00	30	Pass	1700		
VHT80	MCS0	2	122	Full	5610	0.19	0.19	20.90	20.26	23.61	23.98	3.00	30	Pass	1800		
VHT80	MCS0	2	138	Full	5690	0.19	0.19	20.56	20.15	23.37	23.98	3.00	30	Pass	1800		
HE20	MCS0	2	100	Full	5500	0.44	0.41	18.70	18.57	21.64	23.98	3.00	30	Pass	1700		
			116	Full	5580	0.44	0.41	18.99	18.87	21.94	23.98	3.00	30	Pass	1700		
			140	Full	5700	0.44	0.41	18.55	18.46	21.51	23.98	3.00	30	Pass	1700		
			144	Full	5720	0.44	0.41	18.80	18.25	21.54	23.98	3.00	30	Pass	1700		
HE40	MCS0	2	102	Full	5510	0.12	0.12	20.84	20.52	23.69	23.98	3.00	30	Pass	1850		
			110	Full	5550	0.12	0.12	20.77	20.83	23.81	23.98	3.00	30	Pass	1850		
			134	Full	5670	0.12	0.12	20.94	20.38	23.68	23.98	3.00	30	Pass	1850		
			142	Full	5710	0.12	0.12	20.63	20.17	23.42	23.98	3.00	30	Pass	1850		
HE80	MCS0	2	106	Full	5530	0.20	0.20	19.62	19.15	22.40	23.98	3.00	30	Pass	1700		
			122	Full	5610	0.20	0.20	21.03	20.31	23.69	23.98	3.00	30	Pass	1800		
			138	Full	5690	0.20	0.20	20.64	20.25	23.46	23.98	3.00	30	Pass	1800		

TEST RESULTS DATA
Power Spectral Density

U NII-2C															
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	100	Full	5500	0.31	0.31			10.68	11.00	5.82		Pass	
11a	6Mbps	2	116	Full	5580	0.31	0.31			10.62	11.00	5.82		Pass	
11a	6Mbps	2	140	Full	5700	0.31	0.31			10.33	11.00	5.82		Pass	
11a	6Mbps	2	144	Full	5720	0.31	0.31			10.47	11.00	5.82		Pass	
HE20	MCS0	2	100	Full	5500	0.44	0.41			10.57	11.00	5.82		Pass	
HE20	MCS0	2	116	Full	5580	0.44	0.41			10.75	11.00	5.82		Pass	
HE20	MCS0	2	140	Full	5700	0.44	0.41			10.39	11.00	5.82		Pass	
HE20	MCS0	2	144	Full	5720	0.44	0.41			10.48	11.00	5.82		Pass	
HE40	MCS0	2	102	Full	5510	0.12	0.12			9.46	11.00	5.82		Pass	
HE40	MCS0	2	110	Full	5550	0.12	0.12			9.60	11.00	5.82		Pass	
HE40	MCS0	2	134	Full	5670	0.12	0.12			9.26	11.00	5.82		Pass	
HE40	MCS0	2	142	Full	5710	0.12	0.12			9.45	11.00	5.82		Pass	
HE80	MCS0	2	106	Full	5530	0.20	0.20			7.76	11.00	5.82		Pass	
HE80	MCS0	2	122	Full	5610	0.20	0.20			7.52	11.00	5.82		Pass	
HE80	MCS0	2	138	Full	5690	0.20	0.20			7.01	11.00	5.82		Pass	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U NII-3													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	5745	27.77	25.67	41.86	38.68	15.20	15.20	0.5	0.5	Pass
11a	6Mbps	2	157	5785	26.97	25.82	41.92	38.50	15.20	13.95	0.5	0.5	Pass
11a	6Mbps	2	165	5825	26.52	26.32	40.08	38.26	15.20	15.25	0.5	0.5	Pass
HE20	MCS0	2	149	5745	26.82	25.72	43.76	43.58	15.20	15.15	0.5	0.5	Pass
HE20	MCS0	2	157	5785	25.27	24.73	43.44	44.08	15.20	15.20	0.5	0.5	Pass
HE20	MCS0	2	165	5825	24.03	23.63	43.06	43.86	15.95	15.25	0.5	0.5	Pass
HE40	MCS0	2	151	5755	49.05	48.95	88.76	88.71	32.76	34.02	0.5	0.5	Pass
HE40	MCS0	2	159	5795	49.15	48.45	88.51	85.16	32.76	32.76	0.5	0.5	Pass
HE80	MCS0	2	155	5775	85.71	82.96	184.22	172.55	71.68	72.96	0.5	0.5	Pass

TEST RESULTS DATA
Average Power Table

U NII-3																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	149	Full	5745	0.31	0.31	23.96	23.45	26.72	30.00		2.71	Pass	2300	
11a	6Mbps	2	157	Full	5785	0.31	0.31	23.94	23.34	26.66	30.00		2.71	Pass	2300	
11a	6Mbps	2	165	Full	5825	0.31	0.31	23.91	22.95	26.47	30.00		2.71	Pass	2300	
VHT20	MCS0	2	149	Full	5745	0.36	0.33	23.98	23.46	26.74	30.00		2.71	Pass	2300	
VHT20	MCS0	2	157	Full	5785	0.36	0.33	23.97	23.36	26.68	30.00		2.71	Pass	2300	
VHT20	MCS0	2	165	Full	5825	0.36	0.33	23.93	23.02	26.51	30.00		2.71	Pass	2300	
VHT40	MCS0	2	151	Full	5755	0.66	0.66	24.25	22.57	26.50	30.00		2.71	Pass	2300	
VHT40	MCS0	2	159	Full	5795	0.66	0.66	24.22	23.37	26.82	30.00		2.71	Pass	2300	
VHT80	MCS0	2	155	Full	5775	0.19	0.19	23.37	22.97	26.19	30.00		2.71	Pass	2100	
HE20	MCS0	2	149	Full	5745	0.44	0.41	24.10	23.58	26.85	30.00		2.71	Pass	2300	
HE20	MCS0	2	157	Full	5785	0.44	0.41	24.10	23.51	26.82	30.00		2.71	Pass	2300	
HE20	MCS0	2	165	Full	5825	0.44	0.41	24.07	23.16	26.65	30.00		2.71	Pass	2300	
HE40	MCS0	2	151	Full	5755	0.12	0.12	24.39	22.60	26.60	30.00		2.71	Pass	2300	
HE40	MCS0	2	159	Full	5795	0.12	0.12	24.35	23.54	26.97	30.00		2.71	Pass	2300	
HE80	MCS0	2	155	Full	5775	0.20	0.20	23.53	23.16	26.36	30.00		2.71	Pass	2100	

TEST RESULTS DATA
Power Spectral Density

U NII-3																	
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	149	Full	5745	0.31	0.31	2.22	10.41	9.75	13.42	30.00		5.62		Pass	
11a	6Mbps	2	157	Full	5785	0.31	0.31	2.22	10.68	10.04	13.69	30.00		5.62		Pass	
11a	6Mbps	2	165	Full	5825	0.31	0.31	2.22	10.59	9.76	13.60	30.00		5.62		Pass	
HE20	MCS0	2	149	Full	5745	0.44	0.41	2.22	10.26	9.75	13.27	30.00		5.62		Pass	
HE20	MCS0	2	157	Full	5785	0.44	0.41	2.22	10.37	9.64	13.38	30.00		5.62		Pass	
HE20	MCS0	2	165	Full	5825	0.44	0.41	2.22	10.34	9.57	13.35	30.00		5.62		Pass	
HE40	MCS0	2	151	Full	5755	0.12	0.12	2.22	7.16	6.37	10.17	30.00		5.62		Pass	
HE40	MCS0	2	159	Full	5795	0.12	0.12	2.22	7.17	6.64	10.18	30.00		5.62		Pass	
HE80	MCS0	2	155	Full	5775	0.20	0.00	2.22	4.65	3.77	7.66	30.00		5.62		Pass	

TEST RESULTS DATA
Average Power Table

U NII-1																
Mod.	Data Rate	Ntx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
VHT20	MCS0	2	36	Full	5180	0.36	0.33	20.59	20.37	23.49	30.00		5.67		Pass	1900
VHT20	MCS0	2	40	Full	5200	0.36	0.33	24.21	24.37	27.30	30.00		5.67		Pass	2300
VHT20	MCS0	2	44	Full	5220	0.36	0.33	24.34	24.52	27.44	30.00		5.67		Pass	2300
VHT20	MCS0	2	48	Full	5240	0.36	0.33	21.55	21.69	24.63	30.00		5.67		Pass	2050
VHT40	MCS0	2	38	Full	5190	0.66	0.66	19.82	19.60	22.72	30.00		5.67		Pass	1800
VHT40	MCS0	2	46	Full	5230	0.66	0.66	21.81	22.01	24.92	30.00		5.67		Pass	2050
VHT80	MCS0	2	42	Full	5210	0.19	0.19	18.73	18.46	21.61	30.00		5.67		Pass	1650
HE20	MCS0	2	36	Full	5180	0.44	0.41	20.74	20.52	23.64	30.00		5.67		Pass	1900
			40	Full	5200	0.44	0.41	24.31	24.51	27.42	30.00		5.67		Pass	2300
			44	Full	5220	0.44	0.41	24.47	24.65	27.57	30.00		5.67		Pass	2300
			48	Full	5240	0.44	0.41	21.67	21.80	24.74	30.00		5.67		Pass	2050
HE40	MCS0	2	38	Full	5190	0.12	0.12	19.90	19.69	22.81	30.00		5.67		Pass	1800
			46	Full	5230	0.12	0.12	21.95	22.14	25.06	30.00		5.67		Pass	2050
HE80	MCS0	2	42	Full	5210	0.20	0.20	18.86	18.60	21.74	30.00		5.67		Pass	1650

TEST RESULTS DATA
Average Power Table

U NII-2A																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
VHT20	MCS0	2	52	Full	5260	0.36	0.33	18.69	18.49	21.60	23.98	23.98	5.67	30	Pass	1700	
VHT20	MCS0	2	60	Full	5300	0.36	0.33	18.06	18.04	21.06	23.98	23.98	5.67	30	Pass	1700	
VHT20	MCS0	2	64	Full	5320	0.36	0.33	18.02	17.95	20.99	23.98	23.98	5.67	30	Pass	1700	
VHT40	MCS0	2	54	Full	5270	0.66	0.66	20.62	20.52	23.58	23.98	23.98	5.67	30	Pass	1850	
VHT40	MCS0	2	62	Full	5310	0.66	0.66	20.39	20.20	23.30	23.98	23.98	5.67	30	Pass	1850	
VHT80	MCS0	2	58	Full	5290	0.19	0.19	18.86	18.72	21.81	23.98	23.98	5.67	30	Pass	1700	
HE20	MCS0	2	52	Full	5260	0.44	0.41	18.81	18.64	21.73	23.73	23.73	5.67	30	Pass	1700	
			60	Full	5300	0.44	0.41	18.19	18.18	21.19	23.73	23.73	5.67	30	Pass	1700	
			64	Full	5320	0.44	0.41	18.16	18.09	21.13	23.73	23.73	5.67	30	Pass	1700	
HE40	MCS0	2	54	Full	5270	0.12	0.12	20.70	20.59	23.66	23.98	23.98	5.67	30	Pass	1850	
			62	Full	5310	0.12	0.12	20.45	20.25	23.36	23.98	23.98	5.67	30	Pass	1850	
HE80	MCS0	2	58	Full	5290	0.20	0.20	19.00	18.85	21.93	23.98	23.98	5.67	30	Pass	1700	

TEST RESULTS DATA
Average Power Table

U NII-2C																	
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2			
VHT20	MCS0	2	100	Full	5500	0.36	0.33	18.56	18.43	21.50	23.98	5.82	30	Pass	1700		
VHT20	MCS0	2	116	Full	5580	0.36	0.33	18.84	18.72	21.79	23.98	5.82	30	Pass	1700		
VHT20	MCS0	2	140	Full	5700	0.36	0.33	18.39	18.31	21.36	23.98	5.82	30	Pass	1700		
VHT20	MCS0	2	144	Full	5720	0.36	0.33	18.64	18.18	21.43	23.98	5.82	30	Pass	1700		
VHT40	MCS0	2	102	Full	5510	0.66	0.66	20.77	20.48	23.63	23.98	5.82	30	Pass	1850		
VHT40	MCS0	2	110	Full	5550	0.66	0.66	20.73	20.76	23.75	23.98	5.82	30	Pass	1850		
VHT40	MCS0	2	134	Full	5670	0.66	0.66	20.84	20.33	23.60	23.98	5.82	30	Pass	1850		
VHT40	MCS0	2	142	Full	5710	0.66	0.66	20.43	20.08	23.26	23.98	5.82	30	Pass	1850		
VHT80	MCS0	2	106	Full	5530	0.19	0.19	19.49	19.00	22.27	23.98	5.82	30	Pass	1700		
VHT80	MCS0	2	122	Full	5610	0.19	0.19	20.90	20.26	23.61	23.98	5.82	30	Pass	1800		
VHT80	MCS0	2	138	Full	5690	0.19	0.19	20.56	20.15	23.37	23.98	5.82	30	Pass	1800		
HE20	MCS0	2	100	Full	5500	0.44	0.41	18.70	18.57	21.64	23.98	5.82	30	Pass	1700		
			116	Full	5580	0.44	0.41	18.99	18.87	21.94	23.98	5.82	30	Pass	1700		
			140	Full	5700	0.44	0.41	18.55	18.46	21.51	23.98	5.82	30	Pass	1700		
			144	Full	5720	0.44	0.41	18.80	18.25	21.54	23.98	5.82	30	Pass	1700		
HE40	MCS0	2	102	Full	5510	0.12	0.12	20.84	20.52	23.69	23.98	5.82	30	Pass	1850		
			110	Full	5550	0.12	0.12	20.77	20.83	23.81	23.98	5.82	30	Pass	1850		
			134	Full	5670	0.12	0.12	20.94	20.38	23.68	23.98	5.82	30	Pass	1850		
			142	Full	5710	0.12	0.12	20.63	20.17	23.42	23.98	5.82	30	Pass	1850		
HE80	MCS0	2	106	Full	5530	0.20	0.20	19.62	19.15	22.40	23.98	5.82	30	Pass	1700		
			122	Full	5610	0.20	0.20	21.03	20.31	23.69	23.98	5.82	30	Pass	1800		
			138	Full	5690	0.20	0.20	20.64	20.25	23.46	23.98	5.82	30	Pass	1800		


TEST RESULTS DATA
Average Power Table

U NII-3																
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
VHT20	MCS0	2	149	Full	5745	0.36	0.33	23.98	23.46	26.74	30.00	30.00	5.62	5.62	Pass	2300
VHT20	MCS0	2	157	Full	5785	0.36	0.33	23.97	23.36	26.68	30.00	30.00	5.62	5.62	Pass	2300
VHT20	MCS0	2	165	Full	5825	0.36	0.33	23.93	23.02	26.51	30.00	30.00	5.62	5.62	Pass	2300
VHT40	MCS0	2	151	Full	5755	0.66	0.66	24.25	22.57	26.50	30.00	30.00	5.62	5.62	Pass	2300
VHT40	MCS0	2	159	Full	5795	0.66	0.66	24.22	23.37	26.82	30.00	30.00	5.62	5.62	Pass	2300
VHT80	MCS0	2	155	Full	5775	0.19	0.19	23.37	22.97	26.19	30.00	30.00	5.62	5.62	Pass	2100
HE20	MCS0	2	149	Full	5745	0.44	0.41	24.10	23.58	26.85	30.00	30.00	5.62	5.62	Pass	2300
HE20	MCS0	2	157	Full	5785	0.44	0.41	24.10	23.51	26.82	30.00	30.00	5.62	5.62	Pass	2300
HE20	MCS0	2	165	Full	5825	0.44	0.41	24.07	23.16	26.65	30.00	30.00	5.62	5.62	Pass	2300
HE40	MCS0	2	151	Full	5755	0.12	0.12	24.39	22.60	26.60	30.00	30.00	5.62	5.62	Pass	2300
HE40	MCS0	2	159	Full	5795	0.12	0.12	24.35	23.54	26.97	30.00	30.00	5.62	5.62	Pass	2300
HE80	MCS0	2	155	Full	5775	0.20	0.20	23.53	23.16	26.36	30.00	30.00	5.62	5.62	Pass	2100



Appendix B. AC Conducted Emission Test Results

Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

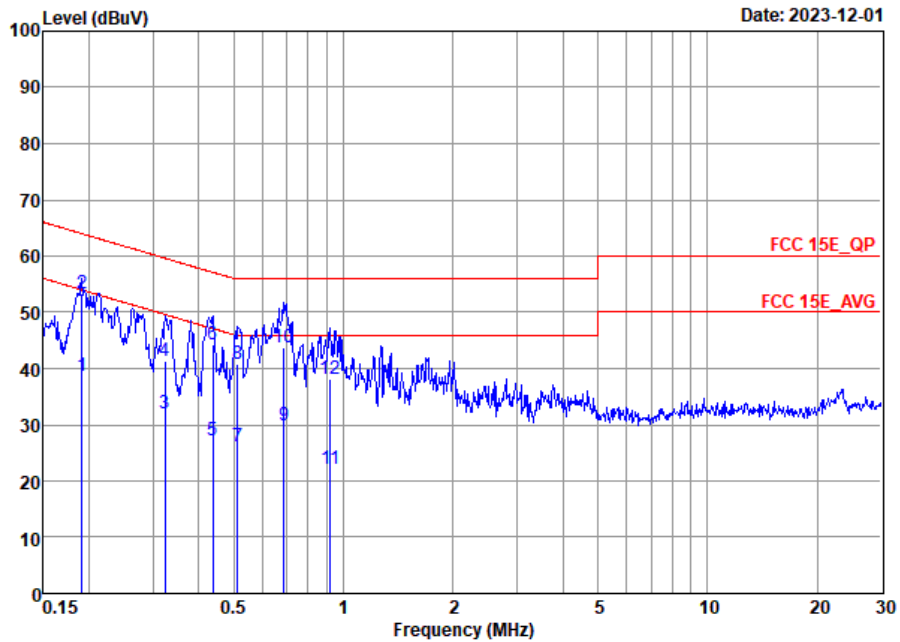


Site : C001-SZ
 Condition: FCC 15E_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	38.67	-15.31	53.98	18.10	10.42	10.15	Average
2 *	0.19	53.37	-10.61	63.98	32.80	10.42	10.15	QP
3	0.32	31.89	-17.73	49.62	11.60	10.13	10.16	Average
4	0.32	41.39	-18.23	59.62	21.10	10.13	10.16	QP
5	0.44	27.23	-19.88	47.11	6.70	10.37	10.16	Average
6	0.44	44.33	-12.78	57.11	23.80	10.37	10.16	QP
7	0.51	26.01	-19.99	46.00	5.60	10.25	10.16	Average
8	0.51	40.91	-15.09	56.00	20.50	10.25	10.16	QP
9	0.69	29.84	-16.16	46.00	9.80	9.88	10.16	Average
10	0.69	43.84	-12.16	56.00	23.80	9.88	10.16	QP
11	0.92	22.03	-23.97	46.00	1.50	10.37	10.16	Average
12	0.92	38.03	-17.97	56.00	17.50	10.37	10.16	QP



Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

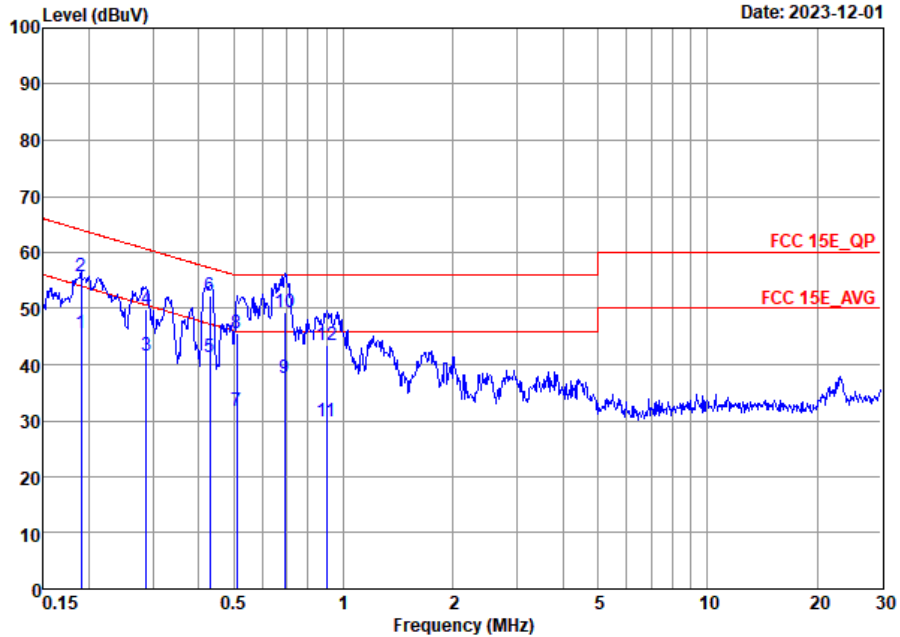

Site : CO01-SZ
 Condition: FCC 15E_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	45.59	-8.43	54.02	25.10	10.34	10.15	Average
2	0.19	55.69	-8.33	64.02	35.20	10.34	10.15	QP
3	0.29	41.56	-9.03	50.59	21.01	10.40	10.15	Average
4	0.29	49.76	-10.83	60.59	29.21	10.40	10.15	QP
5	0.43	41.45	-5.79	47.24	21.30	9.99	10.16	Average
6 *	0.43	52.15	-5.09	57.24	32.00	9.99	10.16	QP
7	0.51	31.79	-14.21	46.00	11.50	10.13	10.16	Average
8	0.51	45.49	-10.51	56.00	25.20	10.13	10.16	QP
9	0.69	37.50	-8.50	46.00	17.00	10.34	10.16	Average
10	0.69	49.30	-6.70	56.00	28.80	10.34	10.16	QP
11	0.90	29.85	-16.15	46.00	9.30	10.39	10.16	Average
12	0.90	43.35	-12.65	56.00	22.80	10.39	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Huang Weiwei	Relative Humidity :	50%
		Temperature :	20-24°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	UNII 1	5.15-5.25	CDD 1+2	802.11a	CH36	5180	6Mbps	-	-
Mode 2	UNII 1	5.15-5.25	CDD 1+2	802.11a	CH44	5220	6Mbps	-	-
Mode 3	UNII 1	5.15-5.25	CDD 1+2	802.11a	CH48	5240	6Mbps	-	-
Mode 4	UNII 2A	5.25-5.35	CDD 1+2	802.11a	CH52	5260	6Mbps	-	-
Mode 5	UNII 2A	5.25-5.35	CDD 1+2	802.11a	CH60	5300	6Mbps	-	-
Mode 6	UNII 2A	5.25-5.35	CDD 1+2	802.11a	CH64	5320	6Mbps	-	-
Mode 7	UNII 2C	5.47-5.725	CDD 1+2	802.11a	CH100	5500	6Mbps	-	-
Mode 8	UNII 2C	5.47-5.725	CDD 1+2	802.11a	CH116	5580	6Mbps	-	-
Mode 9	UNII 2C	5.47-5.725	CDD 1+2	802.11a	CH140	5700	6Mbps	-	-
Mode 10	UNII 1	5.15-5.25	CDD 1+2	802.11ax HE20	CH36	5180	MCS0	Full RU	-
Mode 11	UNII 1	5.15-5.25	CDD 1+2	802.11ax HE20	CH44	5220	MCS0	Full RU	-
Mode 12	UNII 1	5.15-5.25	CDD 1+2	802.11ax HE20	CH48	5240	MCS0	Full RU	-
Mode 13	UNII 2A	5.25-5.35	CDD 1+2	802.11ax HE20	CH52	5260	MCS0	Full RU	-
Mode 14	UNII 2A	5.25-5.35	CDD 1+2	802.11ax HE20	CH60	5300	MCS0	Full RU	-
Mode 15	UNII 2A	5.25-5.35	CDD 1+2	802.11ax HE20	CH64	5320	MCS0	Full RU	-
Mode 16	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE20	CH100	5500	MCS0	Full RU	-
Mode 17	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE20	CH116	5580	MCS0	Full RU	-
Mode 18	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE20	CH140	5700	MCS0	Full RU	-
Mode 19	UNII 1	5.15-5.25	CDD 1+2	802.11ax HE40	CH38	5190	MCS0	Full RU	-
Mode 20	UNII 1	5.15-5.25	CDD 1+2	802.11ax HE40	CH46	5230	MCS0	Full RU	-
Mode 21	UNII 2A	5.25-5.35	CDD 1+2	802.11ax HE40	CH54	5270	MCS0	Full RU	-
Mode 22	UNII 2A	5.25-5.35	CDD 1+2	802.11ax HE40	CH62	5310	MCS0	Full RU	-
Mode 23	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE40	CH102	5510	MCS0	Full RU	-
Mode 24	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE40	CH110	5550	MCS0	Full RU	-
Mode 25	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE40	CH134	5670	MCS0	Full RU	-
Mode 26	UNII 1	5.15-5.25	CDD 1+2	802.11ax HE80	CH42	5210	MCS0	Full RU	-
Mode 27	UNII 2A	5.25-5.35	CDD 1+2	802.11ax HE80	CH58	5290	MCS0	Full RU	-
Mode 28	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE80	CH106	5530	MCS0	Full RU	-
Mode 29	UNII 2C	5.47-5.725	CDD 1+2	802.11ax HE80	CH122	5610	MCS0	Full RU	-
Mode 30	UNII 3	5.725-5.85	CDD 1+2	802.11a	CH149	5745	6Mbps	-	-
Mode 31	UNII 3	5.725-5.85	CDD 1+2	802.11a	CH157	5785	6Mbps	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 32	UNII 3	5.725-5.85	CDD 1+2	802.11a	CH165	5825	6Mbps	-	-
Mode 33	UNII 3	5.725-5.85	CDD 1+2	802.11ax HE20	CH149	5745	MCS0	Full RU	-
Mode 34	UNII 3	5.725-5.85	CDD 1+2	802.11ax HE20	CH157	5785	MCS0	Full RU	-
Mode 35	UNII 3	5.725-5.85	CDD 1+2	802.11ax HE20	CH165	5825	MCS0	Full RU	-
Mode 36	UNII 3	5.725-5.85	CDD 1+2	802.11ax HE40	CH151	5755	MCS0	Full RU	-
Mode 37	UNII 3	5.725-5.85	CDD 1+2	802.11ax HE40	CH159	5795	MCS0	Full RU	-
Mode 38	UNII 3	5.725-5.85	CDD 1+2	802.11ax HE80	CH155	5775	MCS0	Full RU	-
Mode 39	UNII 2A	5.25-5.35	CDD 1+2	802.11ax HE80	CH58	5290	MCS0	LF	-
Mode 40	UNII 3	5.725-5.85	CDD 1+2	802.11ax HE80	CH155	5775	MCS0	LF	-
Mode 43	Straddle channels	5.47-5.85	CDD 1+2	802.11a	CH144	5720	6Mbps	-	-
Mode 44	Straddle channels	5.47-5.85	CDD 1+2	802.11ax HE40	CH144	5720	MCS0	Full	-
Mode 45	Straddle channels	5.47-5.85	CDD 1+2	802.11ax HE40	CH142	5710	MCS0	Full	-
Mode 46	Straddle channels	5.47-5.85	CDD 1+2	802.11ax HE80	CH138	5690	MCS0	Full	-
Mode 47	UNII 1	5.15-5.25	CDD 1+2	802.11a	CH40	5200	6Mbps		
Mode 48	UNII 1	5.15-5.25	CDD 1+2	802.11ax HE20	CH40	5200	MCS0	Full RU	



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	CH36	5150	51.95	54	-2.05	H	Average	Pass	Band Edge
1	802.11a	CH36	15540.00	48.61	54.00	-5.39	V	Average	Pass	Harmonic
2	802.11a	CH44	-	-	-	-	-	-	-	Band Edge
2	802.11a	CH44	15660.00	51.20	54.00	-2.80	V	Average	Pass	Harmonic
3	802.11a	CH48	-	-	-	-	-	-	-	Band Edge
3	802.11a	CH48	15720.00	52.23	54.00	-1.77	V	Average	Pass	Harmonic
4	802.11a	CH52	-	-	-	-	-	-	-	Band Edge
4	802.11a	CH52	10520.00	47.24	68.30	-21.06	V	Peak	Pass	Harmonic
5	802.11a	CH60	-	-	-	-	-	-	-	Band Edge
5	802.11a	CH60	10600.00	48.66	74.00	-25.34	V	Peak	Pass	Harmonic
6	802.11a	CH64	5350.40	38.45	54.00	-15.55	V	Average	Pass	Band Edge
6	802.11a	CH64	15960.00	47.06	74.00	-26.94	V	Peak	Pass	Harmonic
7	802.11a	CH100	5457.84	38.30	54.00	-15.70	V	Average	Pass	Band Edge
7	802.11a	CH100	16500.00	48.23	68.30	-20.07	H	Peak	Pass	Harmonic
8	802.11a	CH116	-	-	-	-	-	-	-	Band Edge
8	802.11a	CH116	16740.00	46.34	68.30	-21.96	V	Peak	Pass	Harmonic
9	802.11a	CH140	5727.64	57.42	68.30	-10.88	V	Peak	Pass	Band Edge
9	802.11a	CH140	17100.00	46.92	68.30	-21.38	V	Peak	Pass	Harmonic
10	802.11ax HE20	CH36	5150	53.55	54.00	-0.45	V	Average	Pass	Band Edge
10	802.11ax HE20	CH36	15540.00	49.61	54.00	-4.39	V	Average	Pass	Harmonic
11	802.11ax HE20	CH44	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE20	CH44	15660.00	52.17	54.00	-1.83	V	Average	Pass	Harmonic
12	802.11ax HE20	CH48	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE20	CH48	15720.00	53.54	54.00	-0.46	V	Average	Pass	Harmonic
13	802.11ax HE20	CH52	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	CH52	10520.00	49.07	68.30	-19.23	V	Peak	Pass	Harmonic
14	802.11ax HE20	CH60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	CH60	10600.00	46.72	74.00	-27.28	V	Peak	Pass	Harmonic
15	802.11ax HE20	CH64	5350.88	44.63	54.00	-9.37	V	Average	Pass	Band Edge
15	802.11ax HE20	CH64	10640.00	47.00	54.00	-7.00	V	Average	Pass	Harmonic
16	802.11ax HE20	CH100	5468.08	59.33	68.30	-8.97	V	Peak	Pass	Band Edge
16	802.11ax HE20	CH100	16500.00	46.13	68.30	-22.17	H	Peak	Pass	Harmonic
17	802.11ax HE20	CH116	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	CH116	16740.00	45.27	68.30	-23.03	V	Peak	Pass	Harmonic
18	802.11ax HE20	CH140	5726.28	66.41	68.30	-1.89	V	Peak	Pass	Band Edge
18	802.11ax HE20	CH140	17100.00	47.89	68.30	-20.41	V	Peak	Pass	Harmonic
19	802.11ax HE40	CH38	5147.42	52.57	54.00	-1.43	V	Average	Pass	Band Edge






Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
19	802.11ax HE40	CH38	10380.00	49.79	68.30	-18.51	V	Peak	Pass	Harmonic
20	802.11ax HE40	CH46	5148.72	53.46	54.00	-0.54	V	Average	Pass	Band Edge
20	802.11ax HE40	CH46	15690.00	49.18	54.00	-4.82	V	Average	Pass	Harmonic
21	802.11ax HE40	CH54	5356.08	41.20	54.00	-12.80	V	Average	Pass	Band Edge
21	802.11ax HE40	CH54	10540.00	48.83	68.30	-19.47	V	Peak	Pass	Harmonic
22	802.11ax HE40	CH62	5350.56	51.35	54.00	-2.65	V	Average	Pass	Band Edge
22	802.11ax HE40	CH62	15930.00	48.80	74.00	-25.20	V	Peak	Pass	Harmonic
23	802.11ax HE40	CH102	5469.04	66.82	68.30	-1.48	V	Peak	Pass	Band Edge
23	802.11ax HE40	CH102	16530.00	46.15	68.30	-22.15	V	Peak	Pass	Harmonic
24	802.11ax HE40	CH110	-	-	-	-	-	-	-	Band Edge
24	802.11ax HE40	CH110	16650.00	47.15	68.30	-21.15	H	Peak	Pass	Harmonic
25	802.11ax HE40	CH134	5726.33	65.59	68.30	-2.71	V	Peak	Pass	Band Edge
25	802.11ax HE40	CH134	17010.00	47.54	68.30	-20.76	V	Peak	Pass	Harmonic
26	802.11ax HE80	CH42	5147.42	53.15	54.00	-0.85	V	Average	Pass	Band Edge
26	802.11ax HE80	CH42	10420.00	47.93	68.30	-20.37	V	Peak	Pass	Harmonic
27	802.11ax HE80	CH58	5352.96	53.84	54.00	-0.16	V	Average	Pass	Band Edge
27	802.11ax HE80	CH58	10580.00	47.34	68.30	-20.96	V	Peak	Pass	Harmonic
28	802.11ax HE80	CH106	5457.76	52.42	54.00	-1.58	V	Average	Pass	Band Edge
28	802.11ax HE80	CH106	16590.00	48.27	68.30	-20.03	H	Peak	Pass	Harmonic
29	802.11ax HE80	CH122	5726.33	62.27	68.30	-6.03	V	Peak	Pass	Band Edge
29	802.11ax HE80	CH122	16830.00	46.79	68.30	-21.51	V	Peak	Pass	Harmonic
30	802.11a	CH149	5648.80	53.79	68.30	-14.51	V	Peak	Pass	Band Edge
30	802.11a	CH149	17235.00	53.37	68.30	-14.93	V	Peak	Pass	Harmonic
31	802.11a	CH157	-	-	-	-	-	-	-	Band Edge
31	802.11a	CH157	17355.00	53.97	68.30	-14.33	V	Peak	Pass	Harmonic
32	802.11a	CH165	5928	53.99	68.3	-14.31	H	Peak	Pass	Band Edge
32	802.11a	CH165	11650.00	48.95	54.00	-5.05	H	Average	Pass	Harmonic
33	802.11ax HE20	CH149	5649.20	51.43	68.30	-16.87	V	Peak	Pass	Band Edge
33	802.11ax HE20	CH149	17235.00	49.92	68.30	-18.38	V	Peak	Pass	Harmonic
34	802.11ax HE20	CH157	-	-	-	-	-	-	-	Band Edge
34	802.11ax HE20	CH157	17355.00	52.05	68.30	-16.25	V	Peak	Pass	Harmonic
35	802.11ax HE20	CH165	5927.40	54.42	68.30	-13.88	V	Peak	Pass	Band Edge
35	802.11ax HE20	CH165	11650.00	48.67	54.00	-5.33	V	Average	Pass	Harmonic
36	802.11ax HE40	CH151	5648.20	59.27	68.30	-9.03	V	Peak	Pass	Band Edge
36	802.11ax HE40	CH151	17265.00	52.92	68.30	-15.38	V	Peak	Pass	Harmonic
37	802.11ax HE40	CH159	5933.80	57.50	68.30	-10.80	V	Peak	Pass	Band Edge
37	802.11ax HE40	CH159	17385.00	53.62	68.30	-14.68	V	Peak	Pass	Harmonic
38	802.11ax HE80	CH155	5649.00	67.34	68.30	-0.96	V	Peak	Pass	Band Edge






Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
38	802.11ax HE80	CH155	17325.00	48.71	68.30	-19.59	V	Peak	Pass	Harmonic
39	802.11ax HE80	CH106	70.74	28.99	40	-11.01	V	Average	Pass	LF
40	802.11ax HE80	CH155	70.74-	31.99	40	-8.01	V	Average	Pass	LF
43	802.11a	CH144	5399.50	38.04	54.00	-15.96	H	Peak	Pass	Band Edge
43	802.11a	CH144	17160.00	46.29	68.30	-22.01	V	Peak	Pass	Harmonic
44	802.11ax HE40	CH144	5455.60	38.72	54.00	-15.28	V	Peak	Pass	Band Edge
44	802.11ax HE40	CH144	17160.00	47.71	68.30	-20.59	V	Peak	Pass	Harmonic
45	802.11ax HE40	CH142	5401.70	39.10	54.00	-14.90	H	Peak	Pass	Band Edge
45	802.11ax HE40	CH142	17130.00	48.10	68.30	-20.20	H	Peak	Pass	Harmonic
46	802.11ax HE80	CH138	5424.25	38.19	54.00	-15.81	V	Peak	Pass	Band Edge
46	802.11ax HE80	CH138	17070.00	46.77	68.30	-21.53	V	Peak	Pass	Harmonic
47	802.11a	CH40	5150.00	48.86	54.00	-5.14	V	Average	Pass	Band Edge
47	802.11a	CH40	-	-	-	-	-	-	-	Harmonic
48	802.11ax HE20	CH40	5150.00	51.35	54.00	-2.65	V	Average	Pass	Band Edge
48	802.11ax HE20	CH40	-	-	-	-	-	-	-	Harmonic

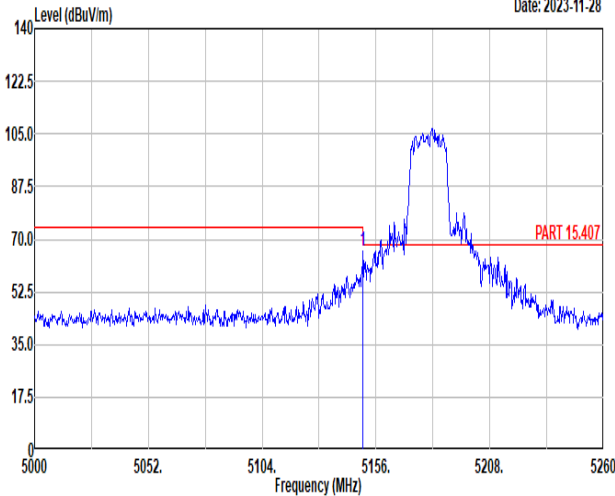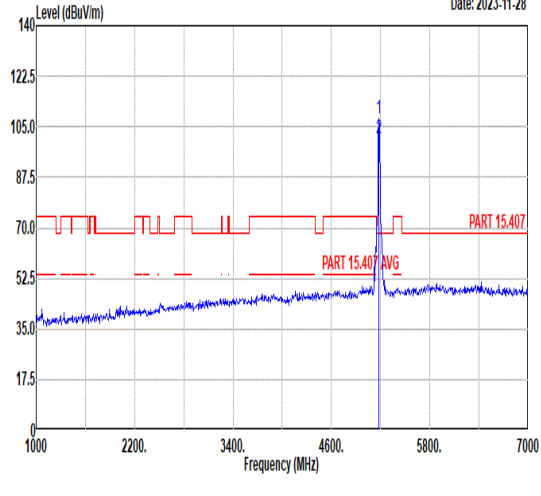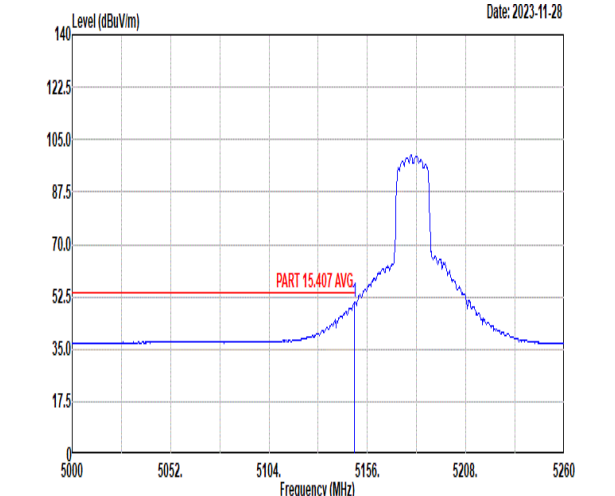

	1																																																																																			
Mode	Band Edge																																																																																			
	UNII 1_5.15-5.25_802.11a_CHCH36_5180MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.02</td> <td>65.77</td> <td>74.00</td> <td>-8.23</td> <td>56.28</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>100</td> <td>318</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5150.02	65.77	74.00	-8.23	56.28	34.42	7.92	32.85	100	318	Peak	 <p>Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.00</td> <td>-----</td> <td>98.50</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>100</td> <td>318</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>100.89</td> <td>-----</td> <td>91.39</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>100</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	108.00	-----	98.50	34.45	7.94	32.89	100	318	Peak	2	5180.00	100.89	-----	91.39	34.45	7.94	32.89	100	318	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																													
1	5150.02	65.77	74.00	-8.23	56.28	34.42	7.92	32.85	100	318	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																													
1	5180.00	108.00	-----	98.50	34.45	7.94	32.89	100	318	Peak																																																																										
2	5180.00	100.89	-----	91.39	34.45	7.94	32.89	100	318	Average																																																																										
Avg	 <p>Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.98</td> <td>50.62</td> <td>54.00</td> <td>-3.38</td> <td>41.12</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>100</td> <td>318</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5148.98	50.62	54.00	-3.38	41.12	34.42	7.92	32.84	100	318	Average	Blank																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																													
1	5148.98	50.62	54.00	-3.38	41.12	34.42	7.92	32.84	100	318	Average																																																																									

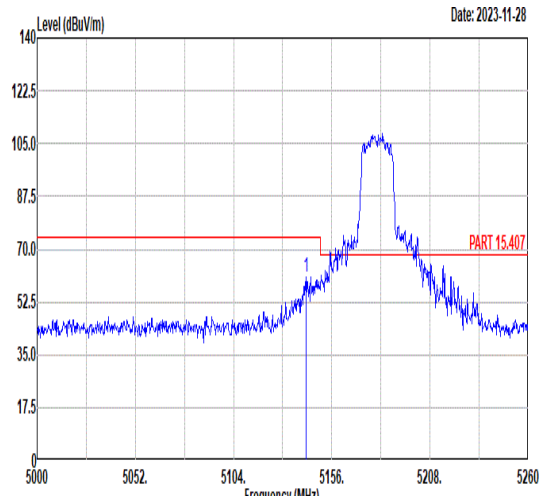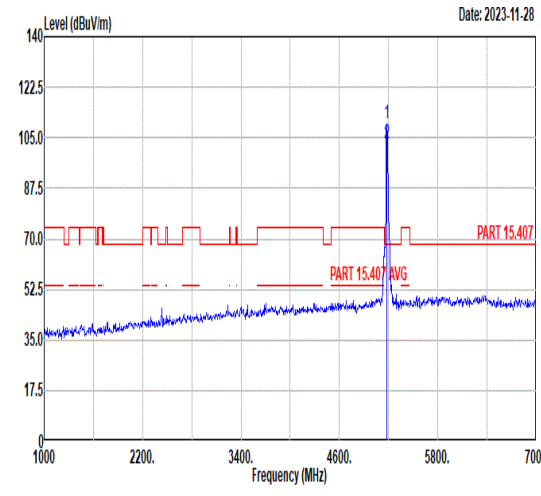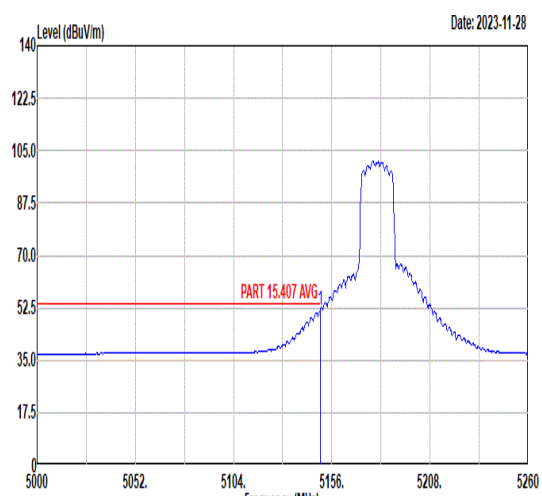

		1																																																																																				
Mode	Band Edge																																																																																					
	UNII 1 5.15-5.25 802.11a_CHCH36_5180MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.22</td> <td>60.97</td> <td>74.00</td> <td>-13.03</td> <td>51.47</td> <td>34.42</td> <td>7.91</td> <td>32.83</td> <td>307</td> <td>0 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5142.22	60.97	74.00	-13.03	51.47	34.42	7.91	32.83	307	0 Peak	 <p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.66</td> <td>-----</td> <td>-----</td> <td>100.16</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>307</td> <td>0 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>102.88</td> <td>-----</td> <td>-----</td> <td>93.38</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>307</td> <td>0 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	109.66	-----	-----	100.16	34.45	7.94	32.89	307	0 Peak	2	5180.00	102.88	-----	-----	93.38	34.45	7.94	32.89	307	0 Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5142.22	60.97	74.00	-13.03	51.47	34.42	7.91	32.83	307	0 Peak																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5180.00	109.66	-----	-----	100.16	34.45	7.94	32.89	307	0 Peak																																																																												
2	5180.00	102.88	-----	-----	93.38	34.45	7.94	32.89	307	0 Average																																																																												
Avg	 <p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>51.95</td> <td>54.00</td> <td>-2.05</td> <td>42.46</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>307</td> <td>0 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5150.00	51.95	54.00	-2.05	42.46	34.42	7.92	32.85	307	0 Average	Blank																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5150.00	51.95	54.00	-2.05	42.46	34.42	7.92	32.85	307	0 Average																																																																												



Mode	1																																																																																																										
	Harmonic																																																																																																										
	UNII 1_5.15-5.25_802.11a_CHCH36_5180MHz																																																																																																										
ANT	CDD 1+2																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>49.14</td> <td>68.30</td> <td>-19.16</td> <td>59.79</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>49.65</td> <td>74.00</td> <td>-24.35</td> <td>55.31</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	49.14	68.30	-19.16	59.79	37.62	10.73	59.00	-- -- Peak	2	15540.00	49.65	74.00	-24.35	55.31	40.56	12.72	58.94	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>54.89</td> <td>68.30</td> <td>-13.41</td> <td>65.54</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>55.55</td> <td>74.00</td> <td>-18.45</td> <td>61.21</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>14 Peak</td> </tr> <tr> <td>3</td> <td>15540.00</td> <td>48.61</td> <td>54.00</td> <td>-5.39</td> <td>54.27</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>272 14 Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	54.89	68.30	-13.41	65.54	37.62	10.73	59.00	-- -- Peak	2	15540.00	55.55	74.00	-18.45	61.21	40.56	12.72	58.94	14 Peak	3	15540.00	48.61	54.00	-5.39	54.27	40.56	12.72	58.94
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	10360.00	49.14	68.30	-19.16	59.79	37.62	10.73	59.00	-- -- Peak																																																																																																		
2	15540.00	49.65	74.00	-24.35	55.31	40.56	12.72	58.94	-- -- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																		
1	10360.00	54.89	68.30	-13.41	65.54	37.62	10.73	59.00	-- -- Peak																																																																																																		
2	15540.00	55.55	74.00	-18.45	61.21	40.56	12.72	58.94	14 Peak																																																																																																		
3	15540.00	48.61	54.00	-5.39	54.27	40.56	12.72	58.94	272 14 Average																																																																																																		



Mode	2																																																																																																				
	Harmonic																																																																																																				
	UNII 1_5.15-5.25_802.11a_CHCH44_5220MHz																																																																																																				
ANT	CDD 1+2																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>50.76</td> <td>68.30</td> <td>-17.54</td> <td>61.22</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.21</td> <td>74.00</td> <td>-26.79</td> <td>52.95</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	50.76	68.30	-17.54	61.22	37.66	10.79	58.91	--	-- Peak	2	15660.00	47.21	74.00	-26.79	52.95	40.60	12.72	59.06	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Limit Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>55.48</td> <td>68.30</td> <td>-12.82</td> <td>65.94</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>59.27</td> <td>74.00</td> <td>-14.73</td> <td>65.01</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>217</td> <td>38 Peak</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>51.20</td> <td>54.00</td> <td>-2.80</td> <td>56.94</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>217</td> <td>38 Average</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	55.48	68.30	-12.82	65.94	37.66	10.79	58.91	--	-- Peak	2	15660.00	59.27	74.00	-14.73	65.01	40.60	12.72	59.06	217	38 Peak	3	15660.00	51.20	54.00	-2.80	56.94	40.60	12.72	59.06	217	38 Average
		Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	10440.00	50.76	68.30	-17.54	61.22	37.66	10.79	58.91	--	-- Peak																																																																																											
2	15660.00	47.21	74.00	-26.79	52.95	40.60	12.72	59.06	--	-- Peak																																																																																											
	Limit Freq	Limit Level	Limit Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	10440.00	55.48	68.30	-12.82	65.94	37.66	10.79	58.91	--	-- Peak																																																																																											
2	15660.00	59.27	74.00	-14.73	65.01	40.60	12.72	59.06	217	38 Peak																																																																																											
3	15660.00	51.20	54.00	-2.80	56.94	40.60	12.72	59.06	217	38 Average																																																																																											



Mode	3																																																																																																																				
	Harmonic																																																																																																																				
	UNII 1_5.15-5.25_802.11a_CHCH48_5240MHz																																																																																																																				
ANT	CDD 1+2																																																																																																																				
Pol.	Horizontal	Vertical																																																																																																																			
Peak Avg	<p>Date: 2023-11-28</p>	<p>Date: 2023-11-28</p>																																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>49.67</td> <td>68.30</td> <td>-18.63</td> <td>60.03</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.97</td> <td>74.00</td> <td>-26.03</td> <td>53.76</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	49.67	68.30	-18.63	60.03	37.69	10.82	58.87	--	--	Peak	2	15720.00	47.97	74.00	-26.03	53.76	40.62	12.71	59.12	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>55.94</td> <td>68.30</td> <td>-12.36</td> <td>66.30</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>61.57</td> <td>74.00</td> <td>-12.43</td> <td>67.36</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>220</td> <td>35</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>52.23</td> <td>54.00</td> <td>-1.77</td> <td>58.02</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>220</td> <td>35</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	55.94	68.30	-12.36	66.30	37.69	10.82	58.87	--	--	Peak	2	15720.00	61.57	74.00	-12.43	67.36	40.62	12.71	59.12	220	35	Peak	3	15720.00	52.23	54.00	-1.77	58.02	40.62	12.71	59.12	220	35
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	10480.00	49.67	68.30	-18.63	60.03	37.69	10.82	58.87	--	--	Peak																																																																																																										
2	15720.00	47.97	74.00	-26.03	53.76	40.62	12.71	59.12	--	--	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																												
1	10480.00	55.94	68.30	-12.36	66.30	37.69	10.82	58.87	--	--	Peak																																																																																																										
2	15720.00	61.57	74.00	-12.43	67.36	40.62	12.71	59.12	220	35	Peak																																																																																																										
3	15720.00	52.23	54.00	-1.77	58.02	40.62	12.71	59.12	220	35	Average																																																																																																										



Mode	4																																																																																																										
	Harmonic																																																																																																										
	UNII 2A_5.25-5.35_802.11a_CHCH52_5260MHz																																																																																																										
ANT	CDD 1+2																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg	<p>Date: 2023-11-28</p>	<p>Date: 2023-11-28</p>																																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.57</td> <td>68.30</td> <td>-21.73</td> <td>56.83</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>45.72</td> <td>74.00</td> <td>-28.28</td> <td>51.56</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	46.57	68.30	-21.73	56.83	37.71	10.85	58.82	--	--	Peak	2	15780.00	45.72	74.00	-28.28	51.56	40.63	12.71	59.18	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>47.24</td> <td>68.30</td> <td>-21.06</td> <td>57.50</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.42</td> <td>74.00</td> <td>-27.58</td> <td>52.26</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	47.24	68.30	-21.06	57.50	37.71	10.85	58.82	--	--	Peak	2	15780.00	46.42	74.00	-27.58	52.26	40.63	12.71	59.18	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	10520.00	46.57	68.30	-21.73	56.83	37.71	10.85	58.82	--	--	Peak																																																																																																
2	15780.00	45.72	74.00	-28.28	51.56	40.63	12.71	59.18	--	--	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	10520.00	47.24	68.30	-21.06	57.50	37.71	10.85	58.82	--	--	Peak																																																																																																
2	15780.00	46.42	74.00	-27.58	52.26	40.63	12.71	59.18	--	--	Peak																																																																																																



Mode	5																																																																																																			
	Harmonic																																																																																																			
	UNII 2A_5.25-5.35_802.11a_CHCH60_5300MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>47.41</td> <td>74.00</td> <td>-26.59</td> <td>57.45</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.59</td> <td>74.00</td> <td>-25.41</td> <td>54.51</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	47.41	74.00	-26.59	57.45	37.78	10.91	58.73	--	--	Peak	2	15900.00	48.59	74.00	-25.41	54.51	40.67	12.71	59.30	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.66</td> <td>74.00</td> <td>-25.34</td> <td>58.70</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.85</td> <td>74.00</td> <td>-27.15</td> <td>52.77</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	48.66	74.00	-25.34	58.70	37.78	10.91	58.73	--	--	Peak	2	15900.00	46.85	74.00	-27.15	52.77	40.67	12.71	59.30	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10600.00	47.41	74.00	-26.59	57.45	37.78	10.91	58.73	--	--	Peak																																																																																									
2	15900.00	48.59	74.00	-25.41	54.51	40.67	12.71	59.30	--	--	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10600.00	48.66	74.00	-25.34	58.70	37.78	10.91	58.73	--	--	Peak																																																																																									
2	15900.00	46.85	74.00	-27.15	52.77	40.67	12.71	59.30	--	--	Peak																																																																																									



		6																																																																																				
Mode	Band Edge																																																																																					
	UNII 2A_5.25-5.35_802.11a_CHCH64_5320MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.32</td> <td>48.20</td> <td>74.00</td> <td>-25.80</td> <td>38.45</td> <td>34.66</td> <td>8.42</td> <td>33.33</td> <td>106</td> <td>350</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5448.32	48.20	74.00	-25.80	38.45	34.66	8.42	33.33	106	350	Peak	<p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.27</td> <td>-----</td> <td>-----</td> <td>96.59</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>106</td> <td>350</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>99.44</td> <td>-----</td> <td>-----</td> <td>89.76</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>106</td> <td>350</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	106.27	-----	-----	96.59	34.55	8.25	33.12	106	350	Peak	2	5320.00	99.44	-----	-----	89.76	34.55	8.25	33.12	106	350	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5448.32	48.20	74.00	-25.80	38.45	34.66	8.42	33.33	106	350	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5320.00	106.27	-----	-----	96.59	34.55	8.25	33.12	106	350	Peak																																																																											
2	5320.00	99.44	-----	-----	89.76	34.55	8.25	33.12	106	350	Average																																																																											
Avg	<p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.80</td> <td>37.81</td> <td>54.00</td> <td>-16.19</td> <td>28.06</td> <td>34.58</td> <td>8.34</td> <td>33.17</td> <td>106</td> <td>350</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5352.80	37.81	54.00	-16.19	28.06	34.58	8.34	33.17	106	350	Average	Blank																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5352.80	37.81	54.00	-16.19	28.06	34.58	8.34	33.17	106	350	Average																																																																											



		6																																																																																		
Mode	Band Edge																																																																																			
	UNII 2A_5.25-5.35_802.11a_CHCH64_5320MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<p style="text-align: right;">Date: 2023-11-28</p>	<p style="text-align: right;">Date: 2023-11-28</p>																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.48</td> <td>49.42</td> <td>74.00</td> <td>-24.58</td> <td>39.68</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>288</td> <td>359</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5352.48	49.42	74.00	-24.58	39.68	34.58	8.33	33.17	288	359	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>107.20</td> <td>-----</td> <td>97.52</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>288</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>100.56</td> <td>-----</td> <td>90.88</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>288</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	107.20	-----	97.52	34.55	8.25	33.12	288	359	Peak	2	5320.00	100.56	-----	90.88	34.55	8.25	33.12	288	359
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5352.48	49.42	74.00	-24.58	39.68	34.58	8.33	33.17	288	359	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5320.00	107.20	-----	97.52	34.55	8.25	33.12	288	359	Peak																																																																										
2	5320.00	100.56	-----	90.88	34.55	8.25	33.12	288	359	Average																																																																										
Avg	<p style="text-align: right;">Date: 2023-11-28</p>	Blank																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>38.45</td> <td>54.00</td> <td>-15.55</td> <td>28.71</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>288</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.40	38.45	54.00	-15.55	28.71	34.58	8.33	33.17	288	359	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5350.40	38.45	54.00	-15.55	28.71	34.58	8.33	33.17	288	359	Average																																																																									






Mode	6																																																																																																			
	Harmonic																																																																																																			
	UNII 2A_5.25-5.35_802.11a_CHCH64_5320MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.46</td> <td>74.00</td> <td>-27.54</td> <td>56.40</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.01</td> <td>74.00</td> <td>-26.99</td> <td>52.99</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.46	74.00	-27.54	56.40	37.81	10.94	58.69	--	--	Peak	2	15960.00	47.01	74.00	-26.99	52.99	40.69	12.70	59.37	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.52</td> <td>74.00</td> <td>-27.48</td> <td>56.46</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.06</td> <td>74.00</td> <td>-26.94</td> <td>53.04</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.52	74.00	-27.48	56.46	37.81	10.94	58.69	--	--	Peak	2	15960.00	47.06	74.00	-26.94	53.04	40.69	12.70	59.37	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10640.00	46.46	74.00	-27.54	56.40	37.81	10.94	58.69	--	--	Peak																																																																																									
2	15960.00	47.01	74.00	-26.99	52.99	40.69	12.70	59.37	--	--	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10640.00	46.52	74.00	-27.48	56.46	37.81	10.94	58.69	--	--	Peak																																																																																									
2	15960.00	47.06	74.00	-26.94	53.04	40.69	12.70	59.37	--	--	Peak																																																																																									



	7																																																																																																	
Mode	Band Edge																																																																																																	
	UNII 2C_5.47-5.725_802.11a_CHCH100_5500MHZ																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.00</td> <td>47.82</td> <td>74.00</td> <td>-26.18</td> <td>38.08</td> <td>34.66</td> <td>8.42</td> <td>33.34</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>48.70</td> <td>68.30</td> <td>-19.60</td> <td>38.99</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5454.00	47.82	74.00	-26.18	38.08	34.66	8.42	33.34	100	360	Peak	2	5470.00	48.70	68.30	-19.60	38.99	34.67	8.40	33.36	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>104.93</td> <td>-----</td> <td>-----</td> <td>95.27</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5500.00</td> <td>98.10</td> <td>-----</td> <td>-----</td> <td>88.44</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5500.00	104.93	-----	-----	95.27	34.70	8.36	33.40	100	360	Peak	2	5500.00	98.10	-----	-----	88.44	34.70	8.36	33.40	100	360	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5454.00	47.82	74.00	-26.18	38.08	34.66	8.42	33.34	100	360	Peak																																																																																							
2	5470.00	48.70	68.30	-19.60	38.99	34.67	8.40	33.36	100	360	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5500.00	104.93	-----	-----	95.27	34.70	8.36	33.40	100	360	Peak																																																																																							
2	5500.00	98.10	-----	-----	88.44	34.70	8.36	33.40	100	360	Average																																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.56</td> <td>37.82</td> <td>54.00</td> <td>-16.18</td> <td>28.09</td> <td>34.66</td> <td>8.41</td> <td>33.34</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5456.56	37.82	54.00	-16.18	28.09	34.66	8.41	33.34	100	360	Average	Blank																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5456.56	37.82	54.00	-16.18	28.09	34.66	8.41	33.34	100	360	Average																																																																																							

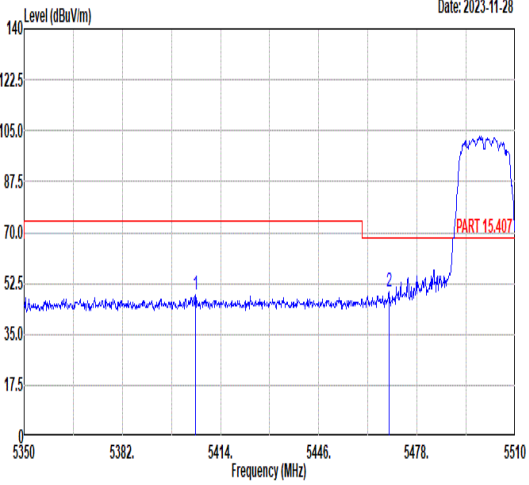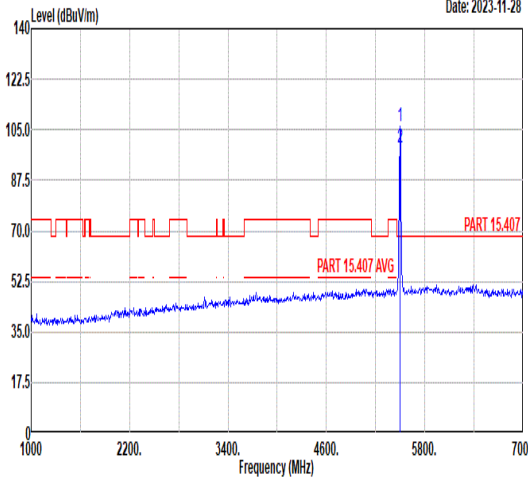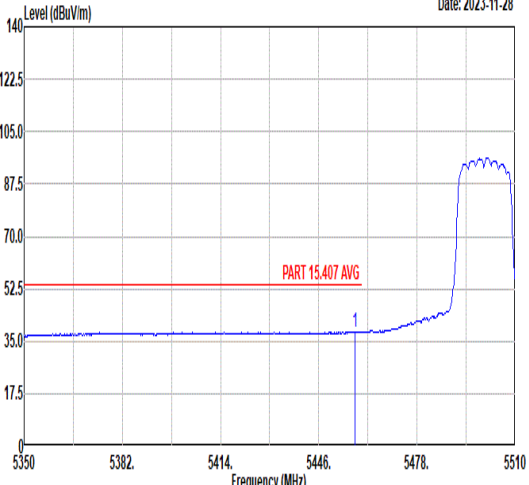

Mode	7																																																																	
	Band Edge																																																																	
	UNII 2C_5.47-5.725_802.11a_CHCH100_5500MHZ																																																																	
ANT	CDD 1+2																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	 <p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5405.84 48.65 74.00 -25.35</td> <td>38.81</td> <td>34.62</td> <td>8.48</td> <td>33.26</td> <td>303</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2 5468.88 49.69 68.30 -18.61</td> <td>39.98</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>303</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor			cm	deg		1 5405.84 48.65 74.00 -25.35	38.81	34.62	8.48	33.26	303	360	Peak	2 5468.88 49.69 68.30 -18.61	39.98	34.67	8.40	33.36	303	360	Peak	 <p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00 106.24 -----</td> <td>96.58</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>303</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2 5500.00 99.02 -----</td> <td>89.36</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>303</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor			cm	deg		1 5500.00 106.24 -----	96.58	34.70	8.36	33.40	303	360	Peak	2 5500.00 99.02 -----	89.36	34.70	8.36	33.40	303	360	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line Margin	Level Factor	Loss Factor			cm	deg																																																												
1 5405.84 48.65 74.00 -25.35	38.81	34.62	8.48	33.26	303	360	Peak																																																											
2 5468.88 49.69 68.30 -18.61	39.98	34.67	8.40	33.36	303	360	Peak																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line Margin	Level Factor	Loss Factor			cm	deg																																																												
1 5500.00 106.24 -----	96.58	34.70	8.36	33.40	303	360	Peak																																																											
2 5500.00 99.02 -----	89.36	34.70	8.36	33.40	303	360	Average																																																											
Avg	 <p style="text-align: right;">Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.84 38.30 54.00 -15.70</td> <td>28.57</td> <td>34.66</td> <td>8.41</td> <td>33.34</td> <td>303</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor			cm	deg		1 5457.84 38.30 54.00 -15.70	28.57	34.66	8.41	33.34	303	360	Average	Blank																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line Margin	Level Factor	Loss Factor			cm	deg																																																												
1 5457.84 38.30 54.00 -15.70	28.57	34.66	8.41	33.34	303	360	Average																																																											



Mode	7																																																																																																
	Harmonic																																																																																																
	UNII 2C_5.47-5.725_802.11a_CHCH100_5500MHz																																																																																																
ANT	CDD 1+2																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>48.30</td> <td>74.00</td> <td>-25.70</td> <td>57.29</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 16500.00</td> <td>48.23</td> <td>68.30</td> <td>-20.07</td> <td>53.22</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	48.30	74.00	-25.70	57.29	38.10	11.21	58.30	--	-- Peak	2 16500.00	48.23	68.30	-20.07	53.22	40.95	12.91	58.85	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>47.35</td> <td>74.00</td> <td>-26.65</td> <td>56.34</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 16500.00</td> <td>48.09</td> <td>68.30</td> <td>-20.21</td> <td>53.08</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	47.35	74.00	-26.65	56.34	38.10	11.21	58.30	--	-- Peak	2 16500.00	48.09	68.30	-20.21	53.08	40.95	12.91	58.85	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11000.00	48.30	74.00	-25.70	57.29	38.10	11.21	58.30	--	-- Peak																																																																																								
2 16500.00	48.23	68.30	-20.07	53.22	40.95	12.91	58.85	--	-- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11000.00	47.35	74.00	-26.65	56.34	38.10	11.21	58.30	--	-- Peak																																																																																								
2 16500.00	48.09	68.30	-20.21	53.08	40.95	12.91	58.85	--	-- Peak																																																																																								



Mode	8																																																																																																						
	Harmonic																																																																																																						
	UNII 2C_5.47-5.725_802.11a_CHCH116_5580MHz																																																																																																						
ANT	CDD 1+2																																																																																																						
Pol.	Horizontal	Vertical																																																																																																					
Peak Avg	<p style="text-align: right;">Date: 2023-11-28</p>	<p style="text-align: right;">Date: 2023-11-28</p>																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>46.98</td> <td>74.00</td> <td>-27.02</td> <td>55.55</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>46.02</td> <td>68.30</td> <td>-22.28</td> <td>50.52</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	46.98	74.00	-27.02	55.55	38.26	11.29	58.12	--	-- Peak	2	16740.00	46.02	68.30	-22.28	50.52	41.07	13.01	58.58	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.02</td> <td>74.00</td> <td>-25.98</td> <td>56.59</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>46.34</td> <td>68.30</td> <td>-21.96</td> <td>50.84</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	48.02	74.00	-25.98	56.59	38.26	11.29	58.12	--	-- Peak	2	16740.00	46.34	68.30	-21.96	50.84	41.07	13.01	58.58	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	11160.00	46.98	74.00	-27.02	55.55	38.26	11.29	58.12	--	-- Peak																																																																																													
2	16740.00	46.02	68.30	-22.28	50.52	41.07	13.01	58.58	--	-- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	11160.00	48.02	74.00	-25.98	56.59	38.26	11.29	58.12	--	-- Peak																																																																																													
2	16740.00	46.34	68.30	-21.96	50.84	41.07	13.01	58.58	--	-- Peak																																																																																													



Mode	9																																																																																				
	Band Edge																																																																																				
	UNII 2C_5.47-5.725_802.11a_CHCH140_5700MHz																																																																																				
ANT	CDD 1+2																																																																																				
Pol.	Horizontal	Fundamental																																																																																			
Peak	<p style="text-align: right;">Date: 2023-11-28</p>	<p style="text-align: right;">Date: 2023-11-28</p>																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.24</td> <td>51.48</td> <td>68.30</td> <td>-16.82</td> <td>41.10</td> <td>35.06</td> <td>8.68</td> <td>33.36</td> <td>107</td> <td>349</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Level	Loss	Loss	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5725.24	51.48	68.30	-16.82	41.10	35.06	8.68	33.36	107	349	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Level</th> <th>Loss</th> <th>Loss</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>105.84</td> <td>-----</td> <td>-----</td> <td>95.60</td> <td>35.02</td> <td>8.58</td> <td>33.36</td> <td>107</td> <td>349</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>98.23</td> <td>-----</td> <td>-----</td> <td>87.99</td> <td>35.02</td> <td>8.58</td> <td>33.36</td> <td>107</td> <td>349</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Level	Loss	Loss	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5700.00	105.84	-----	-----	95.60	35.02	8.58	33.36	107	349	Peak	2	5700.00	98.23	-----	-----	87.99	35.02	8.58	33.36	107	349
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Level	Level	Loss	Loss	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																														
1	5725.24	51.48	68.30	-16.82	41.10	35.06	8.68	33.36	107	349	Peak																																																																										
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Level	Level	Loss	Loss	Remark																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																														
1	5700.00	105.84	-----	-----	95.60	35.02	8.58	33.36	107	349	Peak																																																																										
2	5700.00	98.23	-----	-----	87.99	35.02	8.58	33.36	107	349	Average																																																																										



Mode	9																																																																																			
	Band Edge																																																																																			
	UNII 2C_5.47-5.725_802.11a_CHCH140_5700MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5727.64</td> <td>57.42</td> <td>68.30</td> <td>-10.88</td> <td>47.03</td> <td>35.06</td> <td>8.68</td> <td>33.35</td> <td>297</td> <td>252</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5727.64	57.42	68.30	-10.88	47.03	35.06	8.68	33.35	297	252	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>109.80</td> <td>-----</td> <td>99.56</td> <td>35.02</td> <td>8.58</td> <td>33.36</td> <td>297</td> <td>252</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>102.50</td> <td>-----</td> <td>92.26</td> <td>35.02</td> <td>8.58</td> <td>33.36</td> <td>297</td> <td>252</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5700.00	109.80	-----	99.56	35.02	8.58	33.36	297	252	Peak	2	5700.00	102.50	-----	92.26	35.02	8.58	33.36	297	252	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5727.64	57.42	68.30	-10.88	47.03	35.06	8.68	33.35	297	252	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5700.00	109.80	-----	99.56	35.02	8.58	33.36	297	252	Peak																																																																										
2	5700.00	102.50	-----	92.26	35.02	8.58	33.36	297	252	Average																																																																										






Mode	9																																																																																	
	Harmonic																																																																																	
	UNII 2C_5.47-5.725_802.11a_CHCH140_5700MHz																																																																																	
ANT	CDD 1+2																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11400.00 46.47 74.00 -27.53 54.42 38.50 11.41 57.86 -- -- Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 17100.00 45.76 68.30 -22.54 49.54 41.24 13.14 58.16 -- -- Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor								MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg								1 11400.00 46.47 74.00 -27.53 54.42 38.50 11.41 57.86 -- -- Peak								2 17100.00 45.76 68.30 -22.54 49.54 41.24 13.14 58.16 -- -- Peak								<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11400.00 47.78 74.00 -26.22 55.73 38.50 11.41 57.86 -- -- Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 17100.00 46.92 68.30 -21.38 50.70 41.24 13.14 58.16 -- -- Peak</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor								MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg								1 11400.00 47.78 74.00 -26.22 55.73 38.50 11.41 57.86 -- -- Peak								2 17100.00 46.92 68.30 -21.38 50.70 41.24 13.14 58.16 -- -- Peak							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq Level Line Margin Level Factor Loss Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg																																																																																		
1 11400.00 46.47 74.00 -27.53 54.42 38.50 11.41 57.86 -- -- Peak																																																																																		
2 17100.00 45.76 68.30 -22.54 49.54 41.24 13.14 58.16 -- -- Peak																																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq Level Line Margin Level Factor Loss Factor																																																																																		
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg																																																																																		
1 11400.00 47.78 74.00 -26.22 55.73 38.50 11.41 57.86 -- -- Peak																																																																																		
2 17100.00 46.92 68.30 -21.38 50.70 41.24 13.14 58.16 -- -- Peak																																																																																		



		10																																																																																		
Mode	Band Edge																																																																																			
	UNII 1_5.15-5.25_802.11ax HE20_CHCH36_Full RU_5180MHZ																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.20</td> <td>62.10</td> <td>74.00</td> <td>-11.90</td> <td>52.60</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>106</td> <td>357</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.20	62.10	74.00	-11.90	52.60	34.42	7.92	32.84	106	357	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>111.30</td> <td>-----</td> <td>101.80</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>106</td> <td>357</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>102.59</td> <td>-----</td> <td>93.09</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>106</td> <td>357</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	111.30	-----	101.80	34.45	7.94	32.89	106	357	Peak	2	5180.00	102.59	-----	93.09	34.45	7.94	32.89	106	357
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5148.20	62.10	74.00	-11.90	52.60	34.42	7.92	32.84	106	357	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5180.00	111.30	-----	101.80	34.45	7.94	32.89	106	357	Peak																																																																										
2	5180.00	102.59	-----	93.09	34.45	7.94	32.89	106	357	Average																																																																										
Avg		Blank																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>52.46</td> <td>54.00</td> <td>-1.54</td> <td>42.97</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>106</td> <td>357</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	52.46	54.00	-1.54	42.97	34.42	7.92	32.85	106	357	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5150.00	52.46	54.00	-1.54	42.97	34.42	7.92	32.85	106	357	Average																																																																									

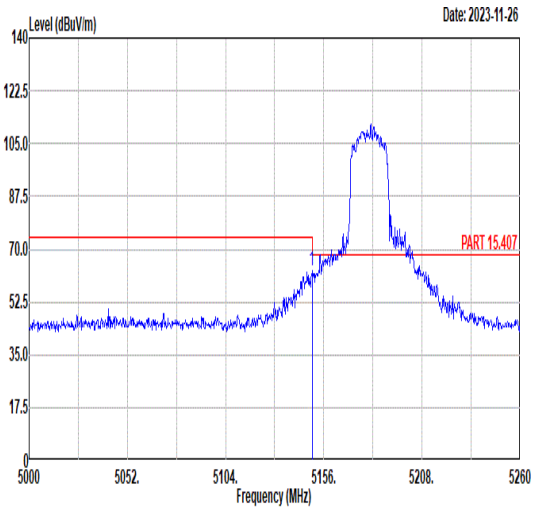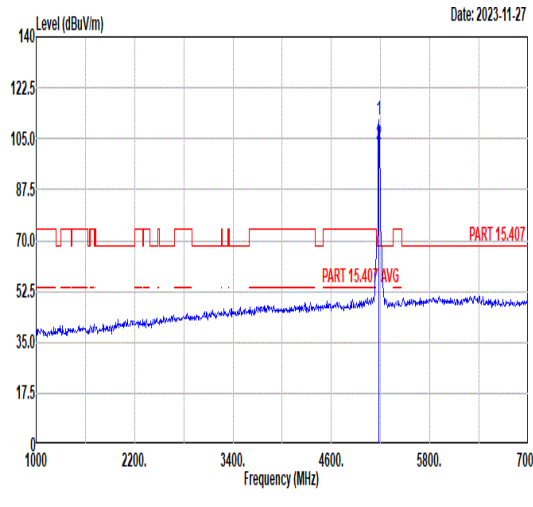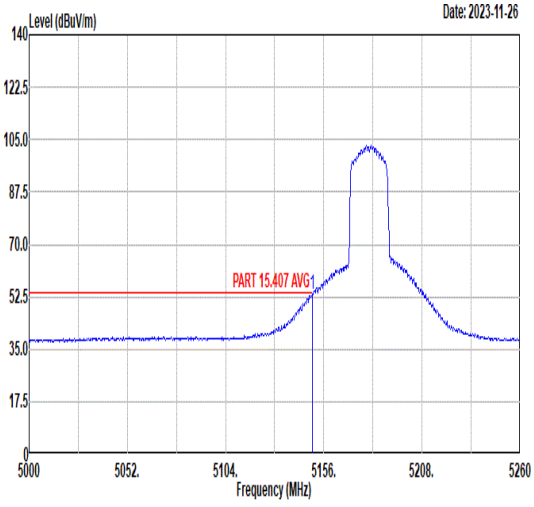

	10																																																																																		
Mode	Band Edge																																																																																		
	UNII 1_5.15-5.25_802.11ax HE20_CHCH36_Full RU_5180MHz																																																																																		
ANT	CDD 1+2																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	 <p style="text-align: right;">Date: 2023-11-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>62.78</td> <td>74.00</td> <td>-11.22</td> <td>53.29</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>238</td> <td>8 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.76	62.78	74.00	-11.22	53.29	34.42	7.92	32.85	238	8 Peak	 <p style="text-align: right;">Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>111.42</td> <td>-----</td> <td>-----</td> <td>101.92</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>238</td> <td>8 Peak</td> </tr> <tr> <td>2</td> <td>5180.00</td> <td>102.83</td> <td>-----</td> <td>-----</td> <td>93.33</td> <td>34.45</td> <td>7.94</td> <td>32.89</td> <td>238</td> <td>8 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	111.42	-----	-----	101.92	34.45	7.94	32.89	238	8 Peak	2	5180.00	102.83	-----	-----	93.33	34.45	7.94	32.89	238	8 Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5149.76	62.78	74.00	-11.22	53.29	34.42	7.92	32.85	238	8 Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5180.00	111.42	-----	-----	101.92	34.45	7.94	32.89	238	8 Peak																																																																									
2	5180.00	102.83	-----	-----	93.33	34.45	7.94	32.89	238	8 Peak																																																																									
Avg	 <p style="text-align: right;">Date: 2023-11-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>53.55</td> <td>54.00</td> <td>-0.45</td> <td>44.06</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>238</td> <td>8 Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5150.00	53.55	54.00	-0.45	44.06	34.42	7.92	32.85	238	8 Average	Blank																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																												
1	5150.00	53.55	54.00	-0.45	44.06	34.42	7.92	32.85	238	8 Average																																																																									



Mode	10																																																																									
	Harmonic																																																																									
	UNII 1_5.15-5.25_802.11ax HE20_CHCH36_Full RU_5180MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10360.00 50.53 68.30 -17.77</td> <td>61.18</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 15540.00 48.25 74.00 -25.75</td> <td>53.91</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor		cm	deg		1 10360.00 50.53 68.30 -17.77	61.18	37.62	10.73	59.00	--	--	Peak	2 15540.00 48.25 74.00 -25.75	53.91	40.56	12.72	58.94	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10360.00 55.76 68.30 -12.54</td> <td>66.41</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 15540.00 59.61 74.00 -14.39</td> <td>65.27</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>207</td> <td>10</td> <td>Peak</td> </tr> <tr> <td>3 15540.00 49.61 54.00 -4.39</td> <td>55.27</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>207</td> <td>10</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor		cm	deg		1 10360.00 55.76 68.30 -12.54	66.41	37.62	10.73	59.00	--	--	Peak	2 15540.00 59.61 74.00 -14.39	65.27	40.56	12.72	58.94	207	10	Peak	3 15540.00 49.61 54.00 -4.39	55.27	40.56	12.72	58.94	207	10	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level	Factor	Loss Factor		cm	deg																																																																				
1 10360.00 50.53 68.30 -17.77	61.18	37.62	10.73	59.00	--	--	Peak																																																																			
2 15540.00 48.25 74.00 -25.75	53.91	40.56	12.72	58.94	--	--	Peak																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq Level Line Margin	Level	Factor	Loss Factor		cm	deg																																																																				
1 10360.00 55.76 68.30 -12.54	66.41	37.62	10.73	59.00	--	--	Peak																																																																			
2 15540.00 59.61 74.00 -14.39	65.27	40.56	12.72	58.94	207	10	Peak																																																																			
3 15540.00 49.61 54.00 -4.39	55.27	40.56	12.72	58.94	207	10	Average																																																																			



Mode	11																																																																																																												
	Harmonic																																																																																																												
	UNII 1_5.15-5.25_802.11ax HE20_CHCH44_Full RU_5220MHz																																																																																																												
ANT	CDD 1+2																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.29</td> <td>68.30</td> <td>-19.01</td> <td>59.75</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.27</td> <td>74.00</td> <td>-26.73</td> <td>53.01</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10440.00	49.29	68.30	-19.01	59.75	37.66	10.79	58.91	--	--	Peak	2	15660.00	47.27	74.00	-26.73	53.01	40.60	12.72	59.06	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>58.63</td> <td>68.30</td> <td>-9.67</td> <td>69.09</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>60.51</td> <td>74.00</td> <td>-13.49</td> <td>66.25</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>213</td> <td>308</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15660.00</td> <td>52.17</td> <td>54.00</td> <td>-1.83</td> <td>57.91</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>213</td> <td>308</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10440.00	58.63	68.30	-9.67	69.09	37.66	10.79	58.91	--	--	Peak	2	15660.00	60.51	74.00	-13.49	66.25	40.60	12.72	59.06	213	308	Peak	3	15660.00	52.17	54.00	-1.83	57.91	40.60	12.72	59.06	213	308
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																						
1	10440.00	49.29	68.30	-19.01	59.75	37.66	10.79	58.91	--	--	Peak																																																																																																		
2	15660.00	47.27	74.00	-26.73	53.01	40.60	12.72	59.06	--	--	Peak																																																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																						
1	10440.00	58.63	68.30	-9.67	69.09	37.66	10.79	58.91	--	--	Peak																																																																																																		
2	15660.00	60.51	74.00	-13.49	66.25	40.60	12.72	59.06	213	308	Peak																																																																																																		
3	15660.00	52.17	54.00	-1.83	57.91	40.60	12.72	59.06	213	308	Average																																																																																																		



Mode	12																																																																																																													
	Harmonic																																																																																																													
	UNII 1_5.15-5.25_802.11ax HE20_CHCH48_Full RU_5240MHz																																																																																																													
ANT	CDD 1+2																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>10480.00</td> <td>48.91</td> <td>Peak</td> </tr> <tr> <td>15720.00</td> <td>45.44</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Remark	10480.00	48.91	Peak	15720.00	45.44	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>10480.00</td> <td>54.58</td> <td>Peak</td> </tr> <tr> <td>15720.00</td> <td>62.11</td> <td>Peak</td> </tr> <tr> <td>15720.00</td> <td>53.54</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Remark	10480.00	54.58	Peak	15720.00	62.11	Peak	15720.00	53.54	Average																																																																																							
	Freq	Level	Remark																																																																																																											
10480.00	48.91	Peak																																																																																																												
15720.00	45.44	Peak																																																																																																												
Freq	Level	Remark																																																																																																												
10480.00	54.58	Peak																																																																																																												
15720.00	62.11	Peak																																																																																																												
15720.00	53.54	Average																																																																																																												
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.91</td> <td>68.30</td> <td>-19.39</td> <td>59.27</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>45.44</td> <td>74.00</td> <td>-28.56</td> <td>51.23</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10480.00	48.91	68.30	-19.39	59.27	37.69	10.82	58.87	--	--	Peak	2	15720.00	45.44	74.00	-28.56	51.23	40.62	12.71	59.12	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>54.58</td> <td>68.30</td> <td>-13.72</td> <td>64.94</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>62.11</td> <td>74.00</td> <td>-11.89</td> <td>67.90</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>217</td> <td>251</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15720.00</td> <td>53.54</td> <td>54.00</td> <td>-0.46</td> <td>59.33</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>217</td> <td>251</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10480.00	54.58	68.30	-13.72	64.94	37.69	10.82	58.87	--	--	Peak	2	15720.00	62.11	74.00	-11.89	67.90	40.62	12.71	59.12	217	251	Peak	3	15720.00	53.54	54.00	-0.46	59.33	40.62	12.71	59.12	217	251	Average
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	10480.00	48.91	68.30	-19.39	59.27	37.69	10.82	58.87	--	--	Peak																																																																																																			
2	15720.00	45.44	74.00	-28.56	51.23	40.62	12.71	59.12	--	--	Peak																																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																							
1	10480.00	54.58	68.30	-13.72	64.94	37.69	10.82	58.87	--	--	Peak																																																																																																			
2	15720.00	62.11	74.00	-11.89	67.90	40.62	12.71	59.12	217	251	Peak																																																																																																			
3	15720.00	53.54	54.00	-0.46	59.33	40.62	12.71	59.12	217	251	Average																																																																																																			



Mode	13																																																																																																				
	Harmonic																																																																																																				
	UNII 2A_5.25-5.35_802.11ax HE20_CHCH52_Full RU_5260MHz																																																																																																				
ANT	CDD 1+2																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.24</td> <td>68.30</td> <td>-22.06</td> <td>56.50</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>45.95</td> <td>74.00</td> <td>-28.05</td> <td>51.79</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	46.24	68.30	-22.06	56.50	37.71	10.85	58.82	--	Peak	2	15780.00	45.95	74.00	-28.05	51.79	40.63	12.71	59.18	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>49.07</td> <td>68.30</td> <td>-19.23</td> <td>59.33</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>49.19</td> <td>74.00</td> <td>-24.81</td> <td>55.03</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10520.00	49.07	68.30	-19.23	59.33	37.71	10.85	58.82	--	Peak	2	15780.00	49.19	74.00	-24.81	55.03	40.63	12.71	59.18	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10520.00	46.24	68.30	-22.06	56.50	37.71	10.85	58.82	--	Peak																																																																																											
2	15780.00	45.95	74.00	-28.05	51.79	40.63	12.71	59.18	--	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10520.00	49.07	68.30	-19.23	59.33	37.71	10.85	58.82	--	Peak																																																																																											
2	15780.00	49.19	74.00	-24.81	55.03	40.63	12.71	59.18	--	Peak																																																																																											



Mode	14																																																																																														
	Harmonic																																																																																														
	UNII 2A_5.25-5.35_802.11ax HE20_CHCH60_Full RU_5300MHz																																																																																														
ANT	CDD 1+2																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.13</td> <td>74.00</td> <td>-27.87</td> <td>56.17</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.50</td> <td>74.00</td> <td>-27.50</td> <td>52.42</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.13	74.00	-27.87	56.17	37.78	10.91	58.73	-- -- Peak	2	15900.00	46.50	74.00	-27.50	52.42	40.67	12.71	59.30	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.72</td> <td>74.00</td> <td>-27.28</td> <td>56.76</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>45.99</td> <td>74.00</td> <td>-28.01</td> <td>51.91</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.72	74.00	-27.28	56.76	37.78	10.91	58.73	-- -- Peak	2	15900.00	45.99	74.00	-28.01	51.91	40.67	12.71	59.30
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10600.00	46.13	74.00	-27.87	56.17	37.78	10.91	58.73	-- -- Peak																																																																																						
2	15900.00	46.50	74.00	-27.50	52.42	40.67	12.71	59.30	-- -- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10600.00	46.72	74.00	-27.28	56.76	37.78	10.91	58.73	-- -- Peak																																																																																						
2	15900.00	45.99	74.00	-28.01	51.91	40.67	12.71	59.30	-- -- Peak																																																																																						



		15																																																																																					
Mode	Band Edge																																																																																						
	UNII 2A_5.25-5.35_802.11ax HE20_CHCH64_Full RU_5320MHz																																																																																						
ANT	CDD 1+2																																																																																						
Pol.	Horizontal	Fundamental																																																																																					
Peak																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.36</td> <td>52.91</td> <td>74.00</td> <td>-21.09</td> <td>43.17</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>100</td> <td>64</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5351.36	52.91	74.00	-21.09	43.17	34.58	8.33	33.17	100	64	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>108.06</td> <td>-----</td> <td>-----</td> <td>98.38</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>100</td> <td>64</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>101.05</td> <td>-----</td> <td>-----</td> <td>91.37</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>100</td> <td>64</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	108.06	-----	-----	98.38	34.55	8.25	33.12	100	64	Peak	2	5320.00	101.05	-----	-----	91.37	34.55	8.25	33.12	100	64
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																
1	5351.36	52.91	74.00	-21.09	43.17	34.58	8.33	33.17	100	64	Peak																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																
1	5320.00	108.06	-----	-----	98.38	34.55	8.25	33.12	100	64	Peak																																																																												
2	5320.00	101.05	-----	-----	91.37	34.55	8.25	33.12	100	64	Average																																																																												
Avg			Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>43.54</td> <td>54.00</td> <td>-10.46</td> <td>33.80</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>100</td> <td>64</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.40	43.54	54.00	-10.46	33.80	34.58	8.33	33.17	100	64	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																
1	5350.40	43.54	54.00	-10.46	33.80	34.58	8.33	33.17	100	64	Average																																																																												






		15																																																																																					
Mode	Band Edge																																																																																						
	UNII 2A_5.25-5.35_802.11ax HE20_CHCH64_Full RU_5320MHz																																																																																						
ANT	CDD 1+2																																																																																						
Pol.	Vertical	Fundamental																																																																																					
Peak																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.72</td> <td>56.87</td> <td>74.00</td> <td>-17.13</td> <td>47.13</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>100</td> <td>303</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.72	56.87	74.00	-17.13	47.13	34.58	8.33	33.17	100	303	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>110.49</td> <td>-----</td> <td>-----</td> <td>100.81</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>100</td> <td>303</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>103.83</td> <td>-----</td> <td>-----</td> <td>94.15</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>100</td> <td>303</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	110.49	-----	-----	100.81	34.55	8.25	33.12	100	303	Peak	2	5320.00	103.83	-----	-----	94.15	34.55	8.25	33.12	100	303
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																
1	5350.72	56.87	74.00	-17.13	47.13	34.58	8.33	33.17	100	303	Peak																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																
1	5320.00	110.49	-----	-----	100.81	34.55	8.25	33.12	100	303	Peak																																																																												
2	5320.00	103.83	-----	-----	94.15	34.55	8.25	33.12	100	303	Average																																																																												
Avg			Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.88</td> <td>44.63</td> <td>54.00</td> <td>-9.37</td> <td>34.89</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>100</td> <td>303</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.88	44.63	54.00	-9.37	34.89	34.58	8.33	33.17	100	303	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																
1	5350.88	44.63	54.00	-9.37	34.89	34.58	8.33	33.17	100	303	Average																																																																												



Mode	15																																																																																																														
	Harmonic																																																																																																														
	UNII 2A_5.25-5.35_802.11ax HE20_CHCH64_Full RU_5320MHz																																																																																																														
ANT	CDD 1+2																																																																																																														
Pol.	Horizontal	Vertical																																																																																																													
Peak Avg																																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.92</td> <td>74.00</td> <td>-27.08</td> <td>56.86</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.24</td> <td>74.00</td> <td>-27.76</td> <td>52.22</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.92	74.00	-27.08	56.86	37.81	10.94	58.69	--	--	Peak	2	15960.00	46.24	74.00	-27.76	52.22	40.69	12.70	59.37	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>56.46</td> <td>74.00</td> <td>-17.54</td> <td>66.40</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>319</td> <td>13</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>47.00</td> <td>54.00</td> <td>-7.00</td> <td>56.94</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>319</td> <td>13</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>46.44</td> <td>74.00</td> <td>-27.56</td> <td>52.42</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	56.46	74.00	-17.54	66.40	37.81	10.94	58.69	319	13	Peak	2	10640.00	47.00	54.00	-7.00	56.94	37.81	10.94	58.69	319	13	Average	3	15960.00	46.44	74.00	-27.56	52.42	40.69	12.70	59.37	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10640.00	46.92	74.00	-27.08	56.86	37.81	10.94	58.69	--	--	Peak																																																																																																				
2	15960.00	46.24	74.00	-27.76	52.22	40.69	12.70	59.37	--	--	Peak																																																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10640.00	56.46	74.00	-17.54	66.40	37.81	10.94	58.69	319	13	Peak																																																																																																				
2	10640.00	47.00	54.00	-7.00	56.94	37.81	10.94	58.69	319	13	Average																																																																																																				
3	15960.00	46.44	74.00	-27.56	52.42	40.69	12.70	59.37	--	--	Peak																																																																																																				

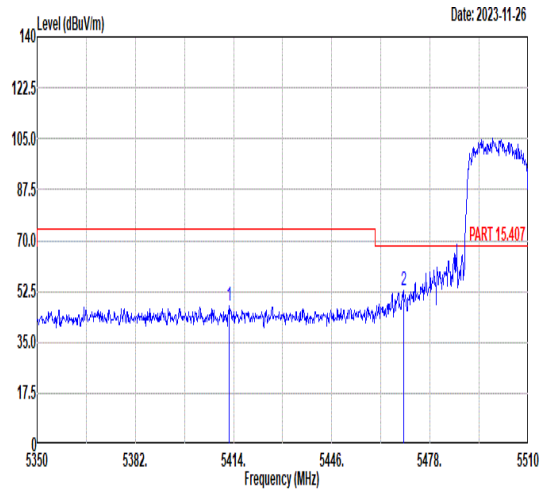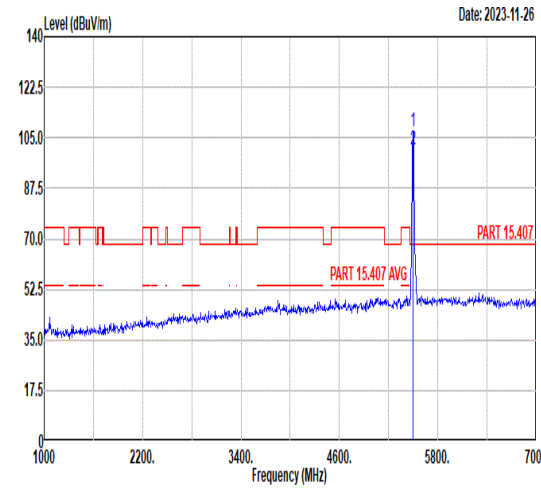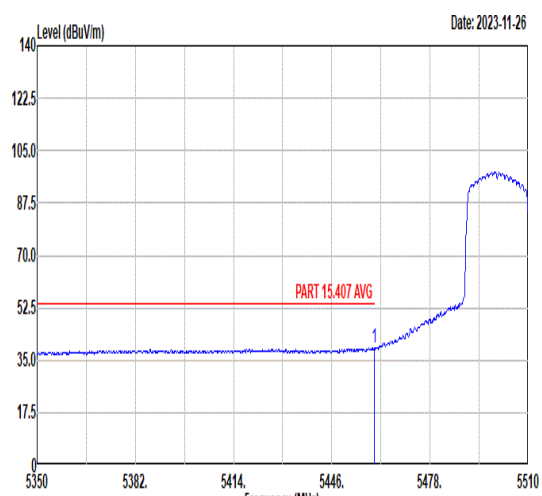

Mode	16																																																																																																	
	Band Edge																																																																																																	
	UNII 2C_5.47-5.725_802.11ax HE20_CHCH100_Full RU_5500MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	 <p>Date: 2023-11-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5412.56</td> <td>47.57</td> <td>74.00</td> <td>-26.43</td> <td>37.74</td> <td>34.63</td> <td>8.47</td> <td>33.27</td> <td>100</td> <td>62</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5469.36</td> <td>53.01</td> <td>68.30</td> <td>-15.29</td> <td>43.30</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>100</td> <td>62</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5412.56	47.57	74.00	-26.43	37.74	34.63	8.47	33.27	100	62	Peak	2	5469.36	53.01	68.30	-15.29	43.30	34.67	8.40	33.36	100	62	Peak	 <p>Date: 2023-11-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>107.22</td> <td>-----</td> <td>-----</td> <td>97.56</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>100</td> <td>62</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5500.00</td> <td>100.92</td> <td>-----</td> <td>-----</td> <td>91.26</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>100</td> <td>62</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5500.00	107.22	-----	-----	97.56	34.70	8.36	33.40	100	62	Peak	2	5500.00	100.92	-----	-----	91.26	34.70	8.36	33.40	100	62	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5412.56	47.57	74.00	-26.43	37.74	34.63	8.47	33.27	100	62	Peak																																																																																							
2	5469.36	53.01	68.30	-15.29	43.30	34.67	8.40	33.36	100	62	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5500.00	107.22	-----	-----	97.56	34.70	8.36	33.40	100	62	Peak																																																																																							
2	5500.00	100.92	-----	-----	91.26	34.70	8.36	33.40	100	62	Average																																																																																							
Avg	 <p>Date: 2023-11-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>39.26</td> <td>54.00</td> <td>-14.74</td> <td>29.54</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>100</td> <td>62</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5459.92	39.26	54.00	-14.74	29.54	34.66	8.41	33.35	100	62	Average	Blank																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																											
1	5459.92	39.26	54.00	-14.74	29.54	34.66	8.41	33.35	100	62	Average																																																																																							



Mode	16																																																																																																	
	Band Edge																																																																																																	
	UNII 2C_5.47-5.725_802.11ax HE20_CHCH100_Full RU_5500MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.16</td> <td>51.12</td> <td>74.00</td> <td>-22.88</td> <td>41.40</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>230</td> <td>229</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5468.08</td> <td>59.33</td> <td>68.30</td> <td>-8.97</td> <td>49.62</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>230</td> <td>229</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.16	51.12	74.00	-22.88	41.40	34.66	8.41	33.35	230	229	Peak	2	5468.08	59.33	68.30	-8.97	49.62	34.67	8.40	33.36	230	229	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>112.46</td> <td>-----</td> <td>-----</td> <td>102.80</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>230</td> <td>229</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5500.00</td> <td>105.19</td> <td>-----</td> <td>-----</td> <td>95.53</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>230</td> <td>229</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5500.00	112.46	-----	-----	102.80	34.70	8.36	33.40	230	229	Peak	2	5500.00	105.19	-----	-----	95.53	34.70	8.36	33.40	230	229	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5458.16	51.12	74.00	-22.88	41.40	34.66	8.41	33.35	230	229	Peak																																																																																							
2	5468.08	59.33	68.30	-8.97	49.62	34.67	8.40	33.36	230	229	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5500.00	112.46	-----	-----	102.80	34.70	8.36	33.40	230	229	Peak																																																																																							
2	5500.00	105.19	-----	-----	95.53	34.70	8.36	33.40	230	229	Average																																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>41.18</td> <td>54.00</td> <td>-12.82</td> <td>31.46</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>230</td> <td>229</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5459.92	41.18	54.00	-12.82	31.46	34.66	8.41	33.35	230	229	Average	Blank																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5459.92	41.18	54.00	-12.82	31.46	34.66	8.41	33.35	230	229	Average																																																																																							



Mode	16																																																																																																											
	Harmonic																																																																																																											
	UNII 2C_5.47-5.725_802.11ax HE20_CHCH100_Full RU_5500MHz																																																																																																											
ANT	CDD 1+2																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.92</td> <td>74.00</td> <td>-27.08</td> <td>55.91</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.13</td> <td>68.30</td> <td>-22.17</td> <td>51.12</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	46.92	74.00	-27.08	55.91	38.10	11.21	58.30	--	--	Peak	2	16500.00	46.13	68.30	-22.17	51.12	40.95	12.91	58.85	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.65</td> <td>74.00</td> <td>-27.35</td> <td>55.64</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.56</td> <td>68.30</td> <td>-22.74</td> <td>50.55</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	46.65	74.00	-27.35	55.64	38.10	11.21	58.30	--	--	Peak	2	16500.00	45.56	68.30	-22.74	50.55	40.95	12.91	58.85	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11000.00	46.92	74.00	-27.08	55.91	38.10	11.21	58.30	--	--	Peak																																																																																																	
2	16500.00	46.13	68.30	-22.17	51.12	40.95	12.91	58.85	--	--	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	11000.00	46.65	74.00	-27.35	55.64	38.10	11.21	58.30	--	--	Peak																																																																																																	
2	16500.00	45.56	68.30	-22.74	50.55	40.95	12.91	58.85	--	--	Peak																																																																																																	



Mode	17																																																																																											
	Harmonic																																																																																											
	UNII 2C_5.47-5.725_802.11ax HE20_CHCH116_Full RU_5580MHz																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<p>Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.01</td> <td>74.00</td> <td>-26.99</td> <td>55.58</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>44.75</td> <td>68.30</td> <td>-23.55</td> <td>49.25</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	47.01	74.00	-26.99	55.58	38.26	11.29	58.12	-- -- Peak	2	16740.00	44.75	68.30	-23.55	49.25	41.07	13.01	58.58	-- -- Peak	<p>Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>56.17</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>45.27</td> <td>68.30</td> <td>-23.03</td> <td>49.77</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	47.60	74.00	-26.40	56.17	38.26	11.29	58.12	-- -- Peak	2	16740.00	45.27	68.30	-23.03	49.77	41.07	13.01	58.58	-- -- Peak
	Limit		Read								Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq		Level	Line Margin	Level	Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	11160.00	47.01	74.00	-26.99	55.58	38.26	11.29	58.12	-- -- Peak																																																																																			
2	16740.00	44.75	68.30	-23.55	49.25	41.07	13.01	58.58	-- -- Peak																																																																																			
Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
	Freq	Level							Line Margin	Level	Factor	Loss Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	11160.00	47.60	74.00	-26.40	56.17	38.26	11.29	58.12	-- -- Peak																																																																																			
2	16740.00	45.27	68.30	-23.03	49.77	41.07	13.01	58.58	-- -- Peak																																																																																			



Mode	18																																																																																			
	Band Edge																																																																																			
	UNII 2C_5.47-5.725_802.11ax HE20_CHCH140_Full RU_5700MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.32</td> <td>60.00</td> <td>68.30</td> <td>-8.30</td> <td>49.62</td> <td>35.06</td> <td>8.68</td> <td>33.36</td> <td>137</td> <td>18</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.32	60.00	68.30	-8.30	49.62	35.06	8.68	33.36	137	18	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>106.95</td> <td>-----</td> <td>96.71</td> <td>35.02</td> <td>8.58</td> <td>33.36</td> <td>137</td> <td>18</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5700.00</td> <td>100.15</td> <td>-----</td> <td>89.91</td> <td>35.02</td> <td>8.58</td> <td>33.36</td> <td>137</td> <td>18</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	106.95	-----	96.71	35.02	8.58	33.36	137	18	Peak	2	5700.00	100.15	-----	89.91	35.02	8.58	33.36	137	18	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																													
1	5725.32	60.00	68.30	-8.30	49.62	35.06	8.68	33.36	137	18	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																													
1	5700.00	106.95	-----	96.71	35.02	8.58	33.36	137	18	Peak																																																																										
2	5700.00	100.15	-----	89.91	35.02	8.58	33.36	137	18	Average																																																																										



Mode	18																																																																														
	Band Edge																																																																														
	UNII 2C_5.47-5.725_802.11ax HE20_CHCH140_Full RU_5700MHz																																																																														
ANT	CDD 1+2																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5726.28</td> <td>66.41</td> <td>68.30</td> <td>-1.89</td> <td>56.02</td> <td>35.06</td> <td>8.68</td> <td>33.35</td> <td>207</td> <td>250</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5726.28	66.41	68.30	-1.89	56.02	35.06	8.68	33.35	207	250	Peak	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5698.00</td> <td>112.68</td> <td>-----</td> <td>-----</td> <td>102.46</td> <td>35.01</td> <td>8.57</td> <td>33.36</td> <td>207</td> <td>250</td> <td>Peak</td> </tr> <tr> <td>2 5700.00</td> <td>106.59</td> <td>-----</td> <td>-----</td> <td>96.35</td> <td>35.02</td> <td>8.58</td> <td>33.36</td> <td>207</td> <td>250</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5698.00	112.68	-----	-----	102.46	35.01	8.57	33.36	207	250	Peak	2 5700.00	106.59	-----	-----	96.35	35.02	8.58	33.36	207	250	Average
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5726.28	66.41	68.30	-1.89	56.02	35.06	8.68	33.35	207	250	Peak																																																																					
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1 5698.00	112.68	-----	-----	102.46	35.01	8.57	33.36	207	250	Peak																																																																					
2 5700.00	106.59	-----	-----	96.35	35.02	8.58	33.36	207	250	Average																																																																					



Mode	18																																																																																																	
	Harmonic																																																																																																	
	UNII 2C_5.47-5.725_802.11ax HE20_CHCH140_Full RU_5700MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.78</td> <td>74.00</td> <td>-27.22</td> <td>54.73</td> <td>38.50</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.65</td> <td>68.30</td> <td>-20.65</td> <td>51.43</td> <td>41.24</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	46.78	74.00	-27.22	54.73	38.50	11.41	57.86	--	--	Peak	2	17100.00	47.65	68.30	-20.65	51.43	41.24	13.14	58.16	--	--	Peak	<p>Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>55.78</td> <td>38.50</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.89</td> <td>68.30</td> <td>-20.41</td> <td>51.67</td> <td>41.24</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	47.83	74.00	-26.17	55.78	38.50	11.41	57.86	--	--	Peak	2	17100.00	47.89	68.30	-20.41	51.67	41.24	13.14	58.16	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	46.78	74.00	-27.22	54.73	38.50	11.41	57.86	--	--	Peak																																																																																							
2	17100.00	47.65	68.30	-20.65	51.43	41.24	13.14	58.16	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	47.83	74.00	-26.17	55.78	38.50	11.41	57.86	--	--	Peak																																																																																							
2	17100.00	47.89	68.30	-20.41	51.67	41.24	13.14	58.16	--	--	Peak																																																																																							






		19																																																																																				
Mode	Band Edge - L																																																																																					
	UNII 1_5.15-5.25_802.11ax HE40_CHCH38_Full RU_5190MHZ																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.56</td> <td>59.03</td> <td>74.00</td> <td>-14.97</td> <td>49.53</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>102</td> <td>58</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5144.56	59.03	74.00	-14.97	49.53	34.42	7.92	32.84	102	58	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>105.13</td> <td>-----</td> <td>-----</td> <td>95.64</td> <td>34.45</td> <td>7.95</td> <td>32.91</td> <td>102</td> <td>58</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5190.00</td> <td>98.40</td> <td>-----</td> <td>-----</td> <td>88.91</td> <td>34.45</td> <td>7.95</td> <td>32.91</td> <td>102</td> <td>58</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5190.00	105.13	-----	-----	95.64	34.45	7.95	32.91	102	58	Peak	2	5190.00	98.40	-----	-----	88.91	34.45	7.95	32.91	102	58
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5144.56	59.03	74.00	-14.97	49.53	34.42	7.92	32.84	102	58	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5190.00	105.13	-----	-----	95.64	34.45	7.95	32.91	102	58	Peak																																																																											
2	5190.00	98.40	-----	-----	88.91	34.45	7.95	32.91	102	58	Average																																																																											
Avg		Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>49.42</td> <td>54.00</td> <td>-4.58</td> <td>39.93</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>102</td> <td>58</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5150.00	49.42	54.00	-4.58	39.93	34.42	7.92	32.85	102	58	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																															
1	5150.00	49.42	54.00	-4.58	39.93	34.42	7.92	32.85	102	58	Average																																																																											



	19																																						
Mode	Band Edge - R																																						
	UNII 1_5.15-5.25_802.11ax HE40_CHCH38_Full RU_5190MHz																																						
ANT	CDD 1+2																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p style="text-align: right;">Date: 2023-11-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.16</td> <td>48.09</td> <td>74.00</td> <td>-25.91</td> <td>38.35</td> <td>34.58</td> <td>8.34</td> <td>33.18</td> <td>102</td> <td>58</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5354.16	48.09	74.00	-25.91	38.35	34.58	8.34	33.18	102	58	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5354.16	48.09	74.00	-25.91	38.35	34.58	8.34	33.18	102	58	Peak																												
Blank																																							
Avg	<p style="text-align: right;">Date: 2023-11-26</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5403.16</td> <td>38.36</td> <td>54.00</td> <td>-15.64</td> <td>28.53</td> <td>34.62</td> <td>8.47</td> <td>33.26</td> <td>102</td> <td>58</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5403.16	38.36	54.00	-15.64	28.53	34.62	8.47	33.26	102	58	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5403.16	38.36	54.00	-15.64	28.53	34.62	8.47	33.26	102	58	Average																												
Blank																																							

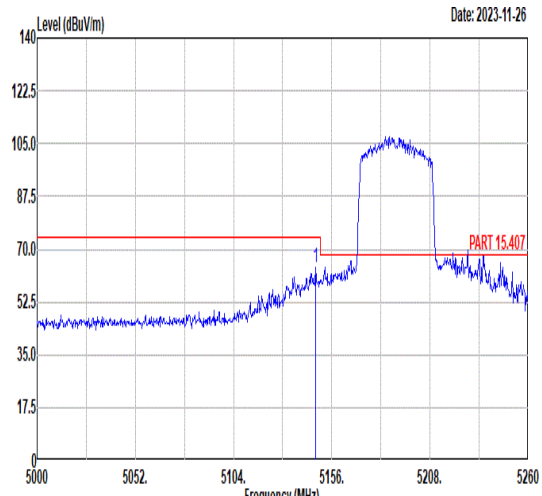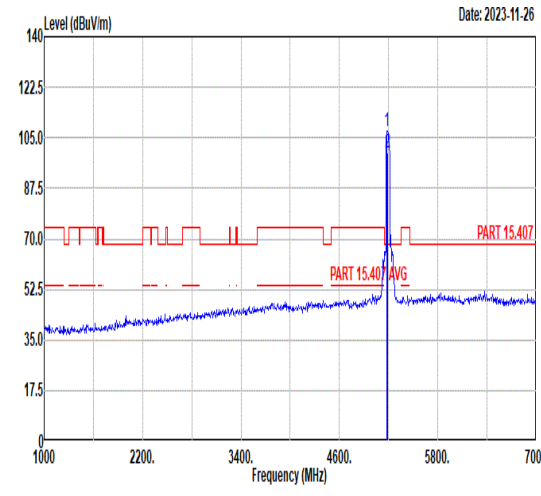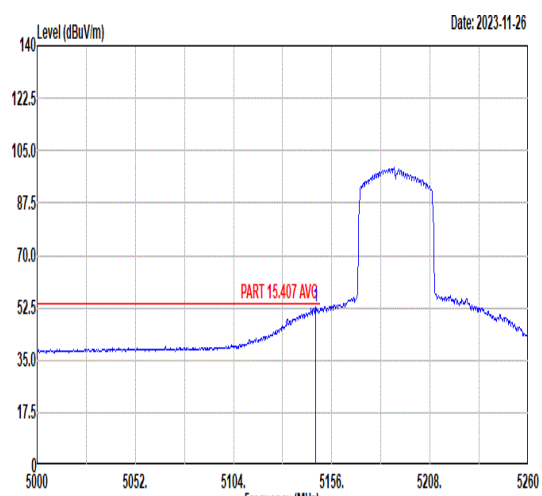

		19																																																																																						
Mode	Band Edge - L																																																																																							
	UNII 1_5.15-5.25_802.11ax HE40_CHCH38_Full RU_5190MHZ																																																																																							
ANT	CDD 1+2																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p style="text-align: right;">Date: 2023-11-26</p>	 <p style="text-align: right;">Date: 2023-11-26</p>																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>63.79</td> <td>74.00</td> <td>-10.21</td> <td>54.29</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>242</td> <td>359</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.42	63.79	74.00	-10.21	54.29	34.42	7.92	32.84	242	359	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5182.00</td> <td>107.06</td> <td>-----</td> <td>-----</td> <td>97.57</td> <td>34.45</td> <td>7.94</td> <td>32.90</td> <td>242</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5190.00</td> <td>99.91</td> <td>-----</td> <td>-----</td> <td>90.42</td> <td>34.45</td> <td>7.95</td> <td>32.91</td> <td>242</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5182.00	107.06	-----	-----	97.57	34.45	7.94	32.90	242	359	Peak	2	5190.00	99.91	-----	-----	90.42	34.45	7.95	32.91	242	359
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5147.42	63.79	74.00	-10.21	54.29	34.42	7.92	32.84	242	359	Peak																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5182.00	107.06	-----	-----	97.57	34.45	7.94	32.90	242	359	Peak																																																																													
2	5190.00	99.91	-----	-----	90.42	34.45	7.95	32.91	242	359	Average																																																																													
Avg	 <p style="text-align: right;">Date: 2023-11-26</p>	Blank																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>52.57</td> <td>54.00</td> <td>-1.43</td> <td>43.07</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>242</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.42	52.57	54.00	-1.43	43.07	34.42	7.92	32.84	242	359	Average																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5147.42	52.57	54.00	-1.43	43.07	34.42	7.92	32.84	242	359	Average																																																																													



	19																																				
Mode	Band Edge - R																																				
	UNII 1_5.15-5.25_802.11ax HE40_CHCH38_Full RU_5190MHz																																				
ANT	CDD 1+2																																				
Pol.	Vertical	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.92</td> <td>48.01</td> <td>74.00</td> <td>-25.99</td> <td>38.25</td> <td>34.59</td> <td>8.37</td> <td>33.20</td> <td>242</td> <td>359</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5365.92	48.01	74.00	-25.99	38.25	34.59	8.37	33.20	242	359
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5365.92	48.01	74.00	-25.99	38.25	34.59	8.37	33.20	242	359	Peak																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5410.72</td> <td>38.55</td> <td>54.00</td> <td>-15.45</td> <td>28.71</td> <td>34.63</td> <td>8.48</td> <td>33.27</td> <td>242</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5410.72	38.55	54.00	-15.45	28.71	34.63	8.48	33.27	242	359
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																														
1	5410.72	38.55	54.00	-15.45	28.71	34.63	8.48	33.27	242	359	Average																										



Mode	19																																																																																																												
	Harmonic																																																																																																												
	UNII 1_5.15-5.25_802.11ax HE40_CHCH38_Full RU_5190MHz																																																																																																												
ANT	CDD 1+2																																																																																																												
Pol.	Horizontal	Vertical																																																																																																											
Peak Avg																																																																																																													
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>48.02</td> <td>68.30</td> <td>-20.28</td> <td>58.63</td> <td>37.63</td> <td>10.74</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>46.39</td> <td>74.00</td> <td>-27.61</td> <td>52.07</td> <td>40.57</td> <td>12.72</td> <td>58.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10380.00	48.02	68.30	-20.28	58.63	37.63	10.74	58.98	--	--	Peak	2	15570.00	46.39	74.00	-27.61	52.07	40.57	12.72	58.97	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>49.79</td> <td>68.30</td> <td>-18.51</td> <td>60.40</td> <td>37.63</td> <td>10.74</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>48.59</td> <td>74.00</td> <td>-25.41</td> <td>54.27</td> <td>40.57</td> <td>12.72</td> <td>58.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10380.00	49.79	68.30	-18.51	60.40	37.63	10.74	58.98	--	--	Peak	2	15570.00	48.59	74.00	-25.41	54.27	40.57	12.72	58.97	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	10380.00	48.02	68.30	-20.28	58.63	37.63	10.74	58.98	--	--	Peak																																																																																																		
2	15570.00	46.39	74.00	-27.61	52.07	40.57	12.72	58.97	--	--	Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	10380.00	49.79	68.30	-18.51	60.40	37.63	10.74	58.98	--	--	Peak																																																																																																		
2	15570.00	48.59	74.00	-25.41	54.27	40.57	12.72	58.97	--	--	Peak																																																																																																		



		20																																																																																																					
Mode	Band Edge - L																																																																																																						
	UNII 1_5.15-5.25_802.11ax HE40_CHCH46_Full RU_5230MHz																																																																																																						
ANT	CDD 1+2																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.80</td> <td>57.54</td> <td>74.00</td> <td>-16.46</td> <td>48.05</td> <td>34.41</td> <td>7.91</td> <td>32.83</td> <td>100</td> <td>61</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5137.80	57.54	74.00	-16.46	48.05	34.41	7.91	32.83	100	61	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>107.79</td> <td>-----</td> <td>-----</td> <td>98.28</td> <td>34.48</td> <td>8.01</td> <td>32.98</td> <td>100</td> <td>61</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5230.00</td> <td>100.77</td> <td>-----</td> <td>-----</td> <td>91.26</td> <td>34.48</td> <td>8.01</td> <td>32.98</td> <td>100</td> <td>61</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5230.00	107.79	-----	-----	98.28	34.48	8.01	32.98	100	61	Peak	2	5230.00	100.77	-----	-----	91.26	34.48	8.01	32.98	100	61
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
cm	deg																																																																																																						
1	5137.80	57.54	74.00	-16.46	48.05	34.41	7.91	32.83	100	61	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
cm	deg																																																																																																						
1	5230.00	107.79	-----	-----	98.28	34.48	8.01	32.98	100	61	Peak																																																																																												
2	5230.00	100.77	-----	-----	91.26	34.48	8.01	32.98	100	61	Average																																																																																												
Avg			Blank																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.50</td> <td>48.71</td> <td>54.00</td> <td>-5.29</td> <td>39.22</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>100</td> <td>61</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5149.50	48.71	54.00	-5.29	39.22	34.42	7.92	32.85	100	61	Average																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
cm	deg																																																																																																						
1	5149.50	48.71	54.00	-5.29	39.22	34.42	7.92	32.85	100	61	Average																																																																																												



	20																																												
Mode	Band Edge - R																																												
	UNII 1_5.15-5.25_802.11ax HE40_CHCH46_Full RU_5230MHz																																												
ANT	CDD 1+2																																												
Pol.	Horizontal	Fundamental																																											
Peak																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.76</td> <td>54.91</td> <td>74.00</td> <td>-19.09</td> <td>45.17</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>100</td> <td>61</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5351.76	54.91	74.00	-19.09	45.17	34.58	8.33	33.17	100	61
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5351.76	54.91	74.00	-19.09	45.17	34.58	8.33	33.17	100	61	Peak																																		
Avg																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.80</td> <td>43.06</td> <td>54.00</td> <td>-10.94</td> <td>33.32</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>100</td> <td>61</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5350.80	43.06	54.00	-10.94	33.32	34.58	8.33	33.17	100	61
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5350.80	43.06	54.00	-10.94	33.32	34.58	8.33	33.17	100	61	Average																																		



		20																																																																																		
Mode	Band Edge - L																																																																																			
	UNII 1_5.15-5.25_802.11ax HE40_CHCH46_Full RU_5230MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.78</td> <td>62.15</td> <td>74.00</td> <td>-11.85</td> <td>52.66</td> <td>34.42</td> <td>7.91</td> <td>32.84</td> <td>300</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5143.78	62.15	74.00	-11.85	52.66	34.42	7.91	32.84	300	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>111.84</td> <td>-----</td> <td>102.33</td> <td>34.48</td> <td>8.01</td> <td>32.98</td> <td>300</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5230.00</td> <td>105.15</td> <td>-----</td> <td>95.64</td> <td>34.48</td> <td>8.01</td> <td>32.98</td> <td>300</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	111.84	-----	102.33	34.48	8.01	32.98	300	0	Peak	2	5230.00	105.15	-----	95.64	34.48	8.01	32.98	300	0
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5143.78	62.15	74.00	-11.85	52.66	34.42	7.91	32.84	300	0	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5230.00	111.84	-----	102.33	34.48	8.01	32.98	300	0	Peak																																																																										
2	5230.00	105.15	-----	95.64	34.48	8.01	32.98	300	0	Average																																																																										
Avg		Blank																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.72</td> <td>53.46</td> <td>54.00</td> <td>-0.54</td> <td>43.96</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>300</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.72	53.46	54.00	-0.54	43.96	34.42	7.92	32.84	300	0	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5148.72	53.46	54.00	-0.54	43.96	34.42	7.92	32.84	300	0	Average																																																																									



	20																																					
Mode	Band Edge - R																																					
	UNII 1_5.15-5.25_802.11ax HE40_CHCH46_Full RU_5230MHz																																					
ANT	CDD 1+2																																					
Pol.	Vertical	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.56</td> <td>59.95</td> <td>74.00</td> <td>-14.05</td> <td>50.21</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>300</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.56	59.95	74.00	-14.05	50.21	34.58	8.33	33.17	300	0	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5350.56	59.95	74.00	-14.05	50.21	34.58	8.33	33.17	300	0	Peak																											
Blank																																						
Avg	<p style="text-align: right;">Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.32</td> <td>45.40</td> <td>54.00</td> <td>-8.60</td> <td>35.66</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>300</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.32	45.40	54.00	-8.60	35.66	34.58	8.33	33.17	300	0	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5350.32	45.40	54.00	-8.60	35.66	34.58	8.33	33.17	300	0	Average																											
Blank																																						





Mode	20																																																																																													
	Harmonic																																																																																													
	UNII 1_5.15-5.25_802.11ax HE40_CHCH46_Full RU_5230MHz																																																																																													
ANT	CDD 1+2																																																																																													
Pol.	Horizontal	Vertical																																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>47.35</td> <td>68.30</td> <td>-20.95</td> <td>57.77</td> <td>37.67</td> <td>10.80</td> <td>58.89</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>49.07</td> <td>74.00</td> <td>-24.93</td> <td>54.83</td> <td>40.61</td> <td>12.72</td> <td>59.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	1	10460.00	47.35	68.30	-20.95	57.77	37.67	10.80	58.89	--	--	Peak	2	15690.00	49.07	74.00	-24.93	54.83	40.61	12.72	59.09	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>57.28</td> <td>68.30</td> <td>-11.02</td> <td>67.70</td> <td>37.67</td> <td>10.80</td> <td>58.89</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>57.85</td> <td>74.00</td> <td>-16.15</td> <td>63.61</td> <td>40.61</td> <td>12.72</td> <td>59.09</td> <td>211</td> <td>307</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>15690.00</td> <td>49.18</td> <td>54.00</td> <td>-4.82</td> <td>54.94</td> <td>40.61</td> <td>12.72</td> <td>59.09</td> <td>211</td> <td>307</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	1	10460.00	57.28	68.30	-11.02	67.70	37.67	10.80	58.89	--	--	Peak	2	15690.00	57.85	74.00	-16.15	63.61	40.61	12.72	59.09	211	307	Peak	3	15690.00	49.18	54.00	-4.82	54.94	40.61	12.72	59.09	211	307	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg																																																																																							
1	10460.00	47.35	68.30	-20.95	57.77	37.67	10.80	58.89	--	--	Peak																																																																																			
2	15690.00	49.07	74.00	-24.93	54.83	40.61	12.72	59.09	--	--	Peak																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg																																																																																							
1	10460.00	57.28	68.30	-11.02	67.70	37.67	10.80	58.89	--	--	Peak																																																																																			
2	15690.00	57.85	74.00	-16.15	63.61	40.61	12.72	59.09	211	307	Peak																																																																																			
3	15690.00	49.18	54.00	-4.82	54.94	40.61	12.72	59.09	211	307	Average																																																																																			






		21																																																																																				
Mode	Band Edge - L																																																																																					
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH54_Full RU_5270MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5078.75</td> <td>48.26</td> <td>74.00</td> <td>-25.74</td> <td>38.75</td> <td>34.37</td> <td>7.87</td> <td>32.73</td> <td>110</td> <td>65</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5078.75	48.26	74.00	-25.74	38.75	34.37	7.87	32.73	110	65	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>105.39</td> <td>-----</td> <td>-----</td> <td>95.80</td> <td>34.52</td> <td>8.11</td> <td>33.04</td> <td>110</td> <td>65</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5270.00</td> <td>98.34</td> <td>-----</td> <td>-----</td> <td>88.75</td> <td>34.52</td> <td>8.11</td> <td>33.04</td> <td>110</td> <td>65</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	105.39	-----	-----	95.80	34.52	8.11	33.04	110	65	Peak	2	5270.00	98.34	-----	-----	88.75	34.52	8.11	33.04	110	65
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5078.75	48.26	74.00	-25.74	38.75	34.37	7.87	32.73	110	65	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5270.00	105.39	-----	-----	95.80	34.52	8.11	33.04	110	65	Peak																																																																											
2	5270.00	98.34	-----	-----	88.75	34.52	8.11	33.04	110	65	Average																																																																											
Avg		Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5114.80</td> <td>39.11</td> <td>54.00</td> <td>-14.89</td> <td>29.61</td> <td>34.39</td> <td>7.90</td> <td>32.79</td> <td>110</td> <td>65</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5114.80	39.11	54.00	-14.89	29.61	34.39	7.90	32.79	110	65	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5114.80	39.11	54.00	-14.89	29.61	34.39	7.90	32.79	110	65	Average																																																																											

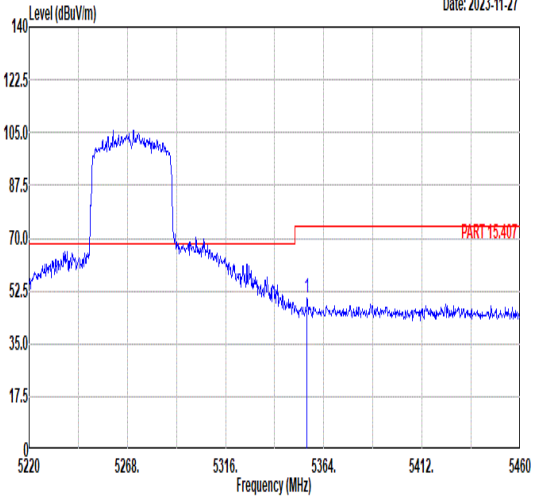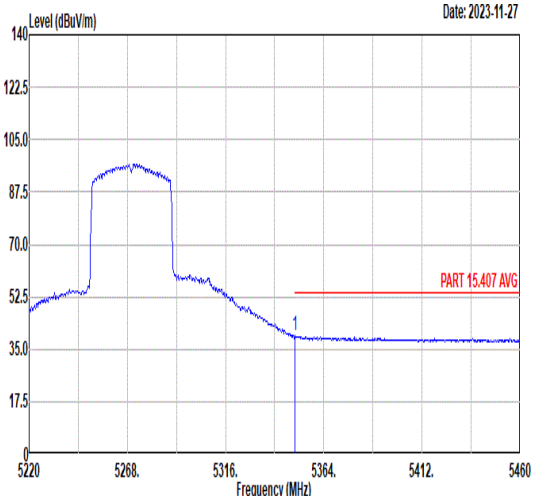

	21																																													
Mode	Band Edge - R																																													
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH54_Full RU_5270MHz																																													
ANT	CDD 1+2																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p style="text-align: right;">Date: 2023-11-27</p>  <table border="1" data-bbox="263 1108 734 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.84</td> <td>50.21</td> <td>74.00</td> <td>-23.79</td> <td>40.47</td> <td>34.58</td> <td>8.34</td> <td>33.18</td> <td>110</td> <td>65</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5355.84	50.21	74.00	-23.79	40.47	34.58	8.34	33.18	110	65	Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5355.84	50.21	74.00	-23.79	40.47	34.58	8.34	33.18	110	65	Peak																																			
Avg	<p style="text-align: right;">Date: 2023-11-27</p>  <table border="1" data-bbox="263 1780 734 1915"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.08</td> <td>39.64</td> <td>54.00</td> <td>-14.36</td> <td>29.90</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>110</td> <td>65</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5350.08	39.64	54.00	-14.36	29.90	34.58	8.33	33.17	110	65	Average	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5350.08	39.64	54.00	-14.36	29.90	34.58	8.33	33.17	110	65	Average																																			

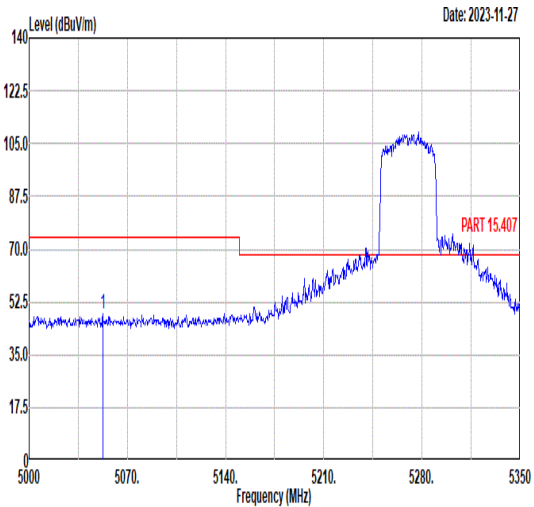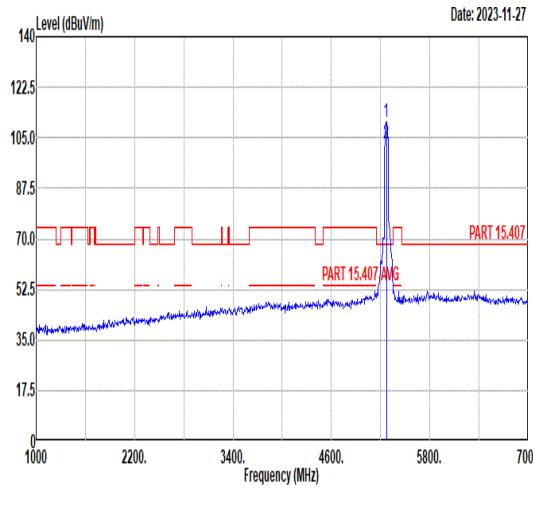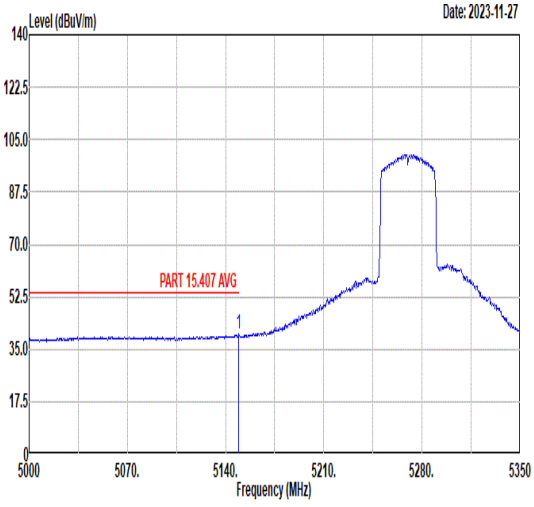

		21																																																																																																					
Mode	Band Edge - L																																																																																																						
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH54_Full RU_5270MHz																																																																																																						
ANT	CDD 1+2																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	 <p style="text-align: right;">Date: 2023-11-27</p>		 <p style="text-align: right;">Date: 2023-11-27</p>																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5052.50</td> <td>48.71</td> <td>74.00</td> <td>-25.29</td> <td>39.20</td> <td>34.35</td> <td>7.85</td> <td>32.69</td> <td>272</td> <td>0</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5052.50	48.71	74.00	-25.29	39.20	34.35	7.85	32.69	272	0	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>110.61</td> <td>-----</td> <td>-----</td> <td>101.02</td> <td>34.52</td> <td>8.11</td> <td>33.04</td> <td>272</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5270.00</td> <td>103.15</td> <td>-----</td> <td>-----</td> <td>93.56</td> <td>34.52</td> <td>8.11</td> <td>33.04</td> <td>272</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5270.00	110.61	-----	-----	101.02	34.52	8.11	33.04	272	0	Peak	2	5270.00	103.15	-----	-----	93.56	34.52	8.11	33.04	272	0
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
cm	deg																																																																																																						
1	5052.50	48.71	74.00	-25.29	39.20	34.35	7.85	32.69	272	0	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
cm	deg																																																																																																						
1	5270.00	110.61	-----	-----	101.02	34.52	8.11	33.04	272	0	Peak																																																																																												
2	5270.00	103.15	-----	-----	93.56	34.52	8.11	33.04	272	0	Average																																																																																												
Avg	 <p style="text-align: right;">Date: 2023-11-27</p>		Blank																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.45</td> <td>39.96</td> <td>54.00</td> <td>-14.04</td> <td>30.47</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>272</td> <td>0</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	5149.45	39.96	54.00	-14.04	30.47	34.42	7.92	32.85	272	0	Average																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																
cm	deg																																																																																																						
1	5149.45	39.96	54.00	-14.04	30.47	34.42	7.92	32.85	272	0	Average																																																																																												



	21	
Mode	Band Edge - R	
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH54_Full RU_5270MHz	
ANT	CDD 1+2	
Pol.	Vertical	Fundamental
Peak	<p style="text-align: right;">Date: 2023-11-27</p>	
	Blank	
Avg	<p style="text-align: right;">Date: 2023-11-27</p>	
	Blank	



Mode	21																																																																																																			
	Harmonic																																																																																																			
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH54_Full RU_5270MHz																																																																																																			
ANT	CDD 1+2																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p>Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>46.77</td> <td>68.30</td> <td>-21.53</td> <td>56.98</td> <td>37.73</td> <td>10.86</td> <td>58.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>47.69</td> <td>74.00</td> <td>-26.31</td> <td>53.55</td> <td>40.64</td> <td>12.71</td> <td>59.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10540.00	46.77	68.30	-21.53	56.98	37.73	10.86	58.80	--	--	Peak	2	15810.00	47.69	74.00	-26.31	53.55	40.64	12.71	59.21	--	--	Peak	<p>Date: 2023-11-28</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>48.83</td> <td>68.30</td> <td>-19.47</td> <td>59.04</td> <td>37.73</td> <td>10.86</td> <td>58.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>48.25</td> <td>74.00</td> <td>-25.75</td> <td>54.11</td> <td>40.64</td> <td>12.71</td> <td>59.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10540.00	48.83	68.30	-19.47	59.04	37.73	10.86	58.80	--	--	Peak	2	15810.00	48.25	74.00	-25.75	54.11	40.64	12.71	59.21	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10540.00	46.77	68.30	-21.53	56.98	37.73	10.86	58.80	--	--	Peak																																																																																									
2	15810.00	47.69	74.00	-26.31	53.55	40.64	12.71	59.21	--	--	Peak																																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	10540.00	48.83	68.30	-19.47	59.04	37.73	10.86	58.80	--	--	Peak																																																																																									
2	15810.00	48.25	74.00	-25.75	54.11	40.64	12.71	59.21	--	--	Peak																																																																																									






		22																																																																																		
Mode	Band Edge - L																																																																																			
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH62_Full RU_5310MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5100.45</td> <td>48.31</td> <td>74.00</td> <td>-25.69</td> <td>38.81</td> <td>34.38</td> <td>7.89</td> <td>32.77</td> <td>102</td> <td>63</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5100.45	48.31	74.00	-25.69	38.81	34.38	7.89	32.77	102	63	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>106.26</td> <td>-----</td> <td>96.60</td> <td>34.55</td> <td>8.22</td> <td>33.11</td> <td>102</td> <td>63</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5310.00</td> <td>99.68</td> <td>-----</td> <td>90.02</td> <td>34.55</td> <td>8.22</td> <td>33.11</td> <td>102</td> <td>63</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5310.00	106.26	-----	96.60	34.55	8.22	33.11	102	63	Peak	2	5310.00	99.68	-----	90.02	34.55	8.22	33.11	102	63
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5100.45	48.31	74.00	-25.69	38.81	34.38	7.89	32.77	102	63	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5310.00	106.26	-----	96.60	34.55	8.22	33.11	102	63	Peak																																																																										
2	5310.00	99.68	-----	90.02	34.55	8.22	33.11	102	63	Average																																																																										
Avg		Blank																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5080.15</td> <td>39.29</td> <td>54.00</td> <td>-14.71</td> <td>29.78</td> <td>34.37</td> <td>7.87</td> <td>32.73</td> <td>102</td> <td>63</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5080.15	39.29	54.00	-14.71	29.78	34.37	7.87	32.73	102	63	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5080.15	39.29	54.00	-14.71	29.78	34.37	7.87	32.73	102	63	Average																																																																									



	22																																												
Mode	Band Edge - R																																												
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH62_Full RU_5310MHz																																												
ANT	CDD 1+2																																												
Pol.	Horizontal	Fundamental																																											
Peak																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.32</td> <td>57.95</td> <td>74.00</td> <td>-16.05</td> <td>48.21</td> <td>34.58</td> <td>8.34</td> <td>33.18</td> <td>102</td> <td>63</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5356.32	57.95	74.00	-16.05	48.21	34.58	8.34	33.18	102	63
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5356.32	57.95	74.00	-16.05	48.21	34.58	8.34	33.18	102	63	Peak																																		
Avg																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.32</td> <td>48.32</td> <td>54.00</td> <td>-5.68</td> <td>38.58</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>102</td> <td>63</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5350.32	48.32	54.00	-5.68	38.58	34.58	8.33	33.17	102	63
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5350.32	48.32	54.00	-5.68	38.58	34.58	8.33	33.17	102	63	Average																																		

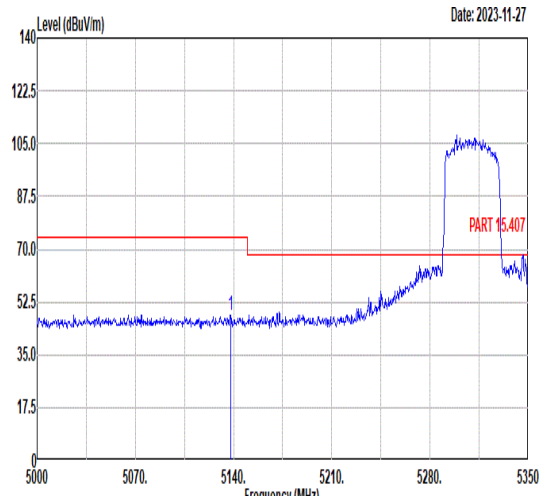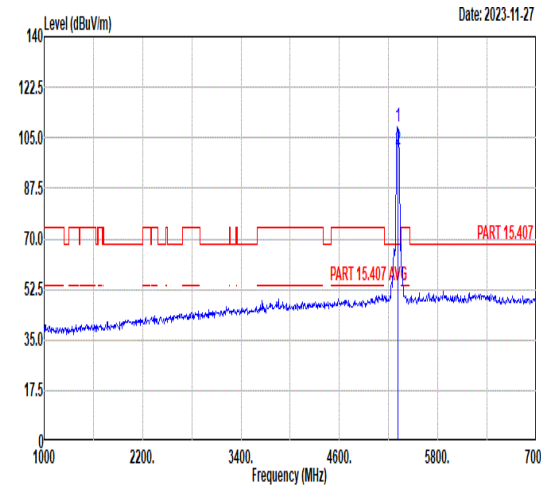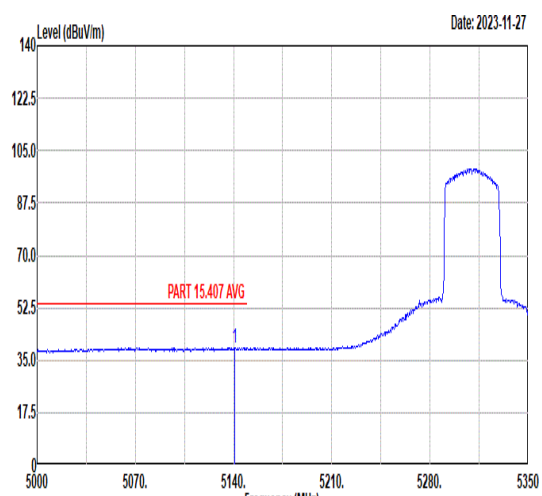

		22																																																																																																					
Mode	Band Edge - L																																																																																																						
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH62_Full RU_5310MHz																																																																																																						
ANT	CDD 1+2																																																																																																						
Pol.	Vertical	Fundamental																																																																																																					
Peak	 <p style="text-align: right;">Date: 2023-11-27</p>		 <p style="text-align: right;">Date: 2023-11-27</p>																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.90</td> <td>48.30</td> <td>74.00</td> <td>-25.70</td> <td>38.81</td> <td>34.41</td> <td>7.91</td> <td>32.83</td> <td>275</td> <td>358</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5137.90	48.30	74.00	-25.70	38.81	34.41	7.91	32.83	275	358	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>108.67</td> <td>-----</td> <td>-----</td> <td>99.01</td> <td>34.55</td> <td>8.22</td> <td>33.11</td> <td>275</td> <td>358</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5310.00</td> <td>101.05</td> <td>-----</td> <td>-----</td> <td>91.39</td> <td>34.55</td> <td>8.22</td> <td>33.11</td> <td>275</td> <td>358</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5310.00	108.67	-----	-----	99.01	34.55	8.22	33.11	275	358	Peak	2	5310.00	101.05	-----	-----	91.39	34.55	8.22	33.11	275	358
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																
							deg																																																																																																
1	5137.90	48.30	74.00	-25.70	38.81	34.41	7.91	32.83	275	358	Peak																																																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																
							deg																																																																																																
1	5310.00	108.67	-----	-----	99.01	34.55	8.22	33.11	275	358	Peak																																																																																												
2	5310.00	101.05	-----	-----	91.39	34.55	8.22	33.11	275	358	Average																																																																																												
Avg	 <p style="text-align: right;">Date: 2023-11-27</p>		Blank																																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.70</td> <td>39.20</td> <td>54.00</td> <td>-14.80</td> <td>29.71</td> <td>34.41</td> <td>7.91</td> <td>32.83</td> <td>275</td> <td>358</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm								deg	1	5140.70	39.20	54.00	-14.80	29.71	34.41	7.91	32.83	275	358	Average																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																
							deg																																																																																																
1	5140.70	39.20	54.00	-14.80	29.71	34.41	7.91	32.83	275	358	Average																																																																																												



	22																																												
Mode	Band Edge - R																																												
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH62_Full RU_5310MHz																																												
ANT	CDD 1+2																																												
Pol.	Vertical	Fundamental																																											
Peak																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.32</td> <td>61.97</td> <td>74.00</td> <td>-12.03</td> <td>52.23</td> <td>34.58</td> <td>8.34</td> <td>33.18</td> <td>275</td> <td>358</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5356.32	61.97	74.00	-12.03	52.23	34.58	8.34	33.18	275	358
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5356.32	61.97	74.00	-12.03	52.23	34.58	8.34	33.18	275	358	Peak																																		
Avg																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.56</td> <td>51.35</td> <td>54.00</td> <td>-2.65</td> <td>41.61</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>275</td> <td>358</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5350.56	51.35	54.00	-2.65	41.61	34.58	8.33	33.17	275	358
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5350.56	51.35	54.00	-2.65	41.61	34.58	8.33	33.17	275	358	Average																																		



Mode	22																																																																																																		
	Harmonic																																																																																																		
	UNII 2A_5.25-5.35_802.11ax HE40_CHCH62_Full RU_5310MHz																																																																																																		
ANT	CDD 1+2																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg																																																																																																			
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>46.50</td> <td>74.00</td> <td>-27.50</td> <td>56.50</td> <td>37.79</td> <td>10.92</td> <td>58.71</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>48.14</td> <td>74.00</td> <td>-25.86</td> <td>54.10</td> <td>40.68</td> <td>12.70</td> <td>59.34</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10620.00	46.50	74.00	-27.50	56.50	37.79	10.92	58.71	--	Peak	2	15930.00	48.14	74.00	-25.86	54.10	40.68	12.70	59.34	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>47.16</td> <td>74.00</td> <td>-26.84</td> <td>57.16</td> <td>37.79</td> <td>10.92</td> <td>58.71</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>48.80</td> <td>74.00</td> <td>-25.20</td> <td>54.76</td> <td>40.68</td> <td>12.70</td> <td>59.34</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10620.00	47.16	74.00	-26.84	57.16	37.79	10.92	58.71	--	Peak	2	15930.00	48.80	74.00	-25.20	54.76	40.68	12.70	59.34	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10620.00	46.50	74.00	-27.50	56.50	37.79	10.92	58.71	--	Peak																																																																																									
2	15930.00	48.14	74.00	-25.86	54.10	40.68	12.70	59.34	--	Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10620.00	47.16	74.00	-26.84	57.16	37.79	10.92	58.71	--	Peak																																																																																									
2	15930.00	48.80	74.00	-25.20	54.76	40.68	12.70	59.34	--	Peak																																																																																									



		23																																																																																																
Mode	Band Edge - L																																																																																																	
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH102_Full RU_5510MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.72</td> <td>57.01</td> <td>74.00</td> <td>-16.99</td> <td>47.29</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>100</td> <td>63</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5469.76</td> <td>60.98</td> <td>68.30</td> <td>-7.32</td> <td>51.27</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>100</td> <td>63</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.72	57.01	74.00	-16.99	47.29	34.66	8.41	33.35	100	63	Peak	2	5469.76	60.98	68.30	-7.32	51.27	34.67	8.40	33.36	100	63	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>104.48</td> <td>-----</td> <td>-----</td> <td>94.83</td> <td>34.71</td> <td>8.34</td> <td>33.40</td> <td>100</td> <td>63</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5510.00</td> <td>97.31</td> <td>-----</td> <td>-----</td> <td>87.66</td> <td>34.71</td> <td>8.34</td> <td>33.40</td> <td>100</td> <td>63</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5510.00	104.48	-----	-----	94.83	34.71	8.34	33.40	100	63	Peak	2	5510.00	97.31	-----	-----	87.66	34.71	8.34	33.40	100	63	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5458.72	57.01	74.00	-16.99	47.29	34.66	8.41	33.35	100	63	Peak																																																																																							
2	5469.76	60.98	68.30	-7.32	51.27	34.67	8.40	33.36	100	63	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5510.00	104.48	-----	-----	94.83	34.71	8.34	33.40	100	63	Peak																																																																																							
2	5510.00	97.31	-----	-----	87.66	34.71	8.34	33.40	100	63	Average																																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>46.28</td> <td>54.00</td> <td>-7.72</td> <td>36.56</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>100</td> <td>63</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5458.48	46.28	54.00	-7.72	36.56	34.66	8.41	33.35	100	63	Average	Blank																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	5458.48	46.28	54.00	-7.72	36.56	34.66	8.41	33.35	100	63	Average																																																																																							



Mode	23																																			
	Band Edge - R																																			
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH102_Full RU_5510MHz																																			
ANT	CDD 1+2																																			
Pol.	Horizontal	Fundamental																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5734.13</td> <td>48.28</td> <td>68.30</td> <td>-20.02</td> <td>37.85</td> <td>35.07</td> <td>8.71</td> <td>33.35</td> <td>100</td> <td>63 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5734.13	48.28	68.30	-20.02	37.85	35.07	8.71	33.35	100	63 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																													
1 5734.13	48.28	68.30	-20.02	37.85	35.07	8.71	33.35	100	63 Peak																											



	23																																																																																																									
Mode	Band Edge - L																																																																																																									
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH102_Full RU_5510MHz																																																																																																									
ANT	CDD 1+2																																																																																																									
Pol.	Vertical	Fundamental																																																																																																								
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.60</td> <td>62.75</td> <td>74.00</td> <td>-11.25</td> <td>53.01</td> <td>34.66</td> <td>8.42</td> <td>33.34</td> <td>237</td> <td>233</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5469.04</td> <td>66.82</td> <td>68.30</td> <td>-1.48</td> <td>57.11</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>237</td> <td>233</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5455.60	62.75	74.00	-11.25	53.01	34.66	8.42	33.34	237	233	Peak	2	5469.04	66.82	68.30	-1.48	57.11	34.67	8.40	33.36	237	233	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>110.04</td> <td>-----</td> <td>-----</td> <td>100.39</td> <td>34.71</td> <td>8.34</td> <td>33.40</td> <td>237</td> <td>233</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5510.00</td> <td>107.14</td> <td>-----</td> <td>-----</td> <td>97.49</td> <td>34.71</td> <td>8.34</td> <td>33.40</td> <td>237</td> <td>233</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	110.04	-----	-----	100.39	34.71	8.34	33.40	237	233	Peak	2	5510.00	107.14	-----	-----	97.49	34.71	8.34	33.40	237	233	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5455.60	62.75	74.00	-11.25	53.01	34.66	8.42	33.34	237	233	Peak																																																																																															
2	5469.04	66.82	68.30	-1.48	57.11	34.67	8.40	33.36	237	233	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5510.00	110.04	-----	-----	100.39	34.71	8.34	33.40	237	233	Peak																																																																																															
2	5510.00	107.14	-----	-----	97.49	34.71	8.34	33.40	237	233	Average																																																																																															
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>50.92</td> <td>54.00</td> <td>-3.08</td> <td>41.20</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>237</td> <td>233</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.48	50.92	54.00	-3.08	41.20	34.66	8.41	33.35	237	233	Average	Blank																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5458.48	50.92	54.00	-3.08	41.20	34.66	8.41	33.35	237	233	Average																																																																																															



Mode	23																																						
	Band Edge - R																																						
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH102_Full RU_5510MHz																																						
ANT	CDD 1+2																																						
Pol.	Vertical	Fundamental																																					
Peak	<p>Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5754.29</td> <td>48.77</td> <td>68.30</td> <td>-19.53</td> <td>38.24</td> <td>35.10</td> <td>8.78</td> <td>33.35</td> <td>237</td> <td>233</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5754.29	48.77	68.30	-19.53	38.24	35.10	8.78	33.35	237	233	Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1 5754.29	48.77	68.30	-19.53	38.24	35.10	8.78	33.35	237	233	Peak																													



Mode	23																																																																																																
	Harmonic																																																																																																
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH102_Full RU_5510MHz																																																																																																
ANT	CDD 1+2																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg																																																																																																	
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>46.82</td> <td>74.00</td> <td>-27.18</td> <td>55.75</td> <td>38.12</td> <td>11.22</td> <td>58.27</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 16530.00</td> <td>45.35</td> <td>68.30</td> <td>-22.95</td> <td>50.27</td> <td>40.97</td> <td>12.92</td> <td>58.81</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	46.82	74.00	-27.18	55.75	38.12	11.22	58.27	--	-- Peak	2 16530.00	45.35	68.30	-22.95	50.27	40.97	12.92	58.81	--	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11020.00</td> <td>47.60</td> <td>74.00</td> <td>-26.40</td> <td>56.53</td> <td>38.12</td> <td>11.22</td> <td>58.27</td> <td>--</td> <td>-- Peak</td> </tr> <tr> <td>2 16530.00</td> <td>46.15</td> <td>68.30</td> <td>-22.15</td> <td>51.07</td> <td>40.97</td> <td>12.92</td> <td>58.81</td> <td>--</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11020.00	47.60	74.00	-26.40	56.53	38.12	11.22	58.27	--	-- Peak	2 16530.00	46.15	68.30	-22.15	51.07	40.97	12.92	58.81	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11020.00	46.82	74.00	-27.18	55.75	38.12	11.22	58.27	--	-- Peak																																																																																								
2 16530.00	45.35	68.30	-22.95	50.27	40.97	12.92	58.81	--	-- Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1 11020.00	47.60	74.00	-26.40	56.53	38.12	11.22	58.27	--	-- Peak																																																																																								
2 16530.00	46.15	68.30	-22.15	51.07	40.97	12.92	58.81	--	-- Peak																																																																																								



Mode	24																																																																									
	Harmonic																																																																									
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH110_Full RU_5550MHz																																																																									
ANT	CDD 1+2																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>43.86</td> <td>74.00</td> <td>-30.14</td> <td>52.59</td> <td>38.20</td> <td>11.26</td> <td>58.19</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16650.00</td> <td>47.15</td> <td>68.30</td> <td>-21.15</td> <td>51.83</td> <td>41.03</td> <td>12.97</td> <td>58.68</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg		1 11100.00	43.86	74.00	-30.14	52.59	38.20	11.26	58.19	-- -- Peak	2 16650.00	47.15	68.30	-21.15	51.83	41.03	12.97	58.68	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>47.74</td> <td>74.00</td> <td>-26.26</td> <td>56.47</td> <td>38.20</td> <td>11.26</td> <td>58.19</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16650.00</td> <td>46.35</td> <td>68.30</td> <td>-21.95</td> <td>51.03</td> <td>41.03</td> <td>12.97</td> <td>58.68</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg		1 11100.00	47.74	74.00	-26.26	56.47	38.20	11.26	58.19	-- -- Peak	2 16650.00	46.35	68.30	-21.95	51.03	41.03	12.97	58.68	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg																																																																			
1 11100.00	43.86	74.00	-30.14	52.59	38.20	11.26	58.19	-- -- Peak																																																																		
2 16650.00	47.15	68.30	-21.15	51.83	41.03	12.97	58.68	-- -- Peak																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg																																																																			
1 11100.00	47.74	74.00	-26.26	56.47	38.20	11.26	58.19	-- -- Peak																																																																		
2 16650.00	46.35	68.30	-21.95	51.03	41.03	12.97	58.68	-- -- Peak																																																																		



		25																																																																																																					
Mode	Band Edge - L																																																																																																						
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH134_Full RU_5670MHz																																																																																																						
ANT	CDD 1+2																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																					
Peak																																																																																																							
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.85</td> <td>48.13</td> <td>74.00</td> <td>-25.87</td> <td>38.38</td> <td>34.66</td> <td>8.42</td> <td>33.33</td> <td>100</td> <td>53</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5465.15</td> <td>47.53</td> <td>68.30</td> <td>-20.77</td> <td>37.82</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>100</td> <td>53</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5451.85	48.13	74.00	-25.87	38.38	34.66	8.42	33.33	100	53	Peak	2	5465.15	47.53	68.30	-20.77	37.82	34.67	8.40	33.36	100	53	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>104.05</td> <td>-----</td> <td>-----</td> <td>93.98</td> <td>34.97</td> <td>8.47</td> <td>33.37</td> <td>100</td> <td>53</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5670.00</td> <td>96.89</td> <td>-----</td> <td>-----</td> <td>86.82</td> <td>34.97</td> <td>8.47</td> <td>33.37</td> <td>100</td> <td>53</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5670.00	104.05	-----	-----	93.98	34.97	8.47	33.37	100	53	Peak	2	5670.00	96.89	-----	-----	86.82	34.97	8.47	33.37	100	53
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																															
1	5451.85	48.13	74.00	-25.87	38.38	34.66	8.42	33.33	100	53	Peak																																																																																												
2	5465.15	47.53	68.30	-20.77	37.82	34.67	8.40	33.36	100	53	Peak																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																															
1	5670.00	104.05	-----	-----	93.98	34.97	8.47	33.37	100	53	Peak																																																																																												
2	5670.00	96.89	-----	-----	86.82	34.97	8.47	33.37	100	53	Average																																																																																												
Avg		Blank																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5430.50</td> <td>38.89</td> <td>54.00</td> <td>-15.11</td> <td>29.10</td> <td>34.64</td> <td>8.45</td> <td>33.30</td> <td>100</td> <td>53</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5430.50	38.89	54.00	-15.11	29.10	34.64	8.45	33.30	100	53	Average																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																															
1	5430.50	38.89	54.00	-15.11	29.10	34.64	8.45	33.30	100	53	Average																																																																																												



Mode	25																																		
	Band Edge - R																																		
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH134_Full RU_5670MHz																																		
ANT	CDD 1+2																																		
Pol.	Horizontal	Fundamental																																	
Peak	<p>Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5728.08</td> <td>58.38</td> <td>68.30</td> <td>-9.92</td> <td>47.98</td> <td>35.06</td> <td>8.69</td> <td>33.35</td> <td>100 53 Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5728.08	58.38	68.30	-9.92	47.98	35.06	8.69	33.35	100 53 Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																												
1 5728.08	58.38	68.30	-9.92	47.98	35.06	8.69	33.35	100 53 Peak																											



		25																																																																																																								
Mode	Band Edge - L																																																																																																									
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH134_Full RU_5670MHz																																																																																																									
ANT	CDD 1+2																																																																																																									
Pol.	Vertical	Fundamental																																																																																																								
Peak																																																																																																										
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5441.35</td> <td>48.23</td> <td>74.00</td> <td>-25.77</td> <td>38.47</td> <td>34.65</td> <td>8.43</td> <td>33.32</td> <td>264</td> <td>235</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5463.75</td> <td>47.39</td> <td>68.30</td> <td>-20.91</td> <td>37.67</td> <td>34.67</td> <td>8.40</td> <td>33.35</td> <td>264</td> <td>235</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5441.35	48.23	74.00	-25.77	38.47	34.65	8.43	33.32	264	235	Peak	2	5463.75	47.39	68.30	-20.91	37.67	34.67	8.40	33.35	264	235	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>109.03</td> <td>-----</td> <td>-----</td> <td>98.96</td> <td>34.97</td> <td>8.47</td> <td>33.37</td> <td>264</td> <td>235</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5670.00</td> <td>102.46</td> <td>-----</td> <td>-----</td> <td>92.39</td> <td>34.97</td> <td>8.47</td> <td>33.37</td> <td>264</td> <td>235</td> <td>Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	109.03	-----	-----	98.96	34.97	8.47	33.37	264	235	Peak	2	5670.00	102.46	-----	-----	92.39	34.97	8.47	33.37	264	235
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5441.35	48.23	74.00	-25.77	38.47	34.65	8.43	33.32	264	235	Peak																																																																																															
2	5463.75	47.39	68.30	-20.91	37.67	34.67	8.40	33.35	264	235	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5670.00	109.03	-----	-----	98.96	34.97	8.47	33.37	264	235	Peak																																																																																															
2	5670.00	102.46	-----	-----	92.39	34.97	8.47	33.37	264	235	Average																																																																																															
Avg		Blank																																																																																																								
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5429.45</td> <td>39.18</td> <td>54.00</td> <td>-14.82</td> <td>29.39</td> <td>34.64</td> <td>8.45</td> <td>33.30</td> <td>264</td> <td>235</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5429.45	39.18	54.00	-14.82	29.39	34.64	8.45	33.30	264	235	Average																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	5429.45	39.18	54.00	-14.82	29.39	34.64	8.45	33.30	264	235	Average																																																																																															



Mode	25																																																			
	Band Edge - R																																																			
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH134_Full RU_5670MHz																																																			
ANT	CDD 1+2																																																			
Pol.	Vertical	Fundamental																																																		
Peak	<p>Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.33</td> <td>65.59</td> <td>68.30</td> <td>-2.71</td> <td>55.20</td> <td>35.06</td> <td>8.68</td> <td>33.35</td> <td>264</td> <td>235</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5765.00</td> <td>47.83</td> <td>68.30</td> <td>-20.47</td> <td>37.24</td> <td>35.12</td> <td>8.82</td> <td>33.35</td> <td>264</td> <td>235</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.33	65.59	68.30	-2.71	55.20	35.06	8.68	33.35	264	235	Peak	2	5765.00	47.83	68.30	-20.47	37.24	35.12	8.82	33.35	264	235	Peak	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5726.33	65.59	68.30	-2.71	55.20	35.06	8.68	33.35	264	235	Peak																																									
2	5765.00	47.83	68.30	-20.47	37.24	35.12	8.82	33.35	264	235	Peak																																									



Mode	25																																																																																																										
	Harmonic																																																																																																										
	UNII 2C_5.47-5.725_802.11ax HE40_CHCH134_Full RU_5670MHz																																																																																																										
ANT	CDD 1+2																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>46.44</td> <td>74.00</td> <td>-27.56</td> <td>54.54</td> <td>38.44</td> <td>11.38</td> <td>57.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>46.20</td> <td>68.30</td> <td>-22.10</td> <td>50.15</td> <td>41.21</td> <td>13.12</td> <td>58.28</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	46.44	74.00	-27.56	54.54	38.44	11.38	57.92	--	--	Peak	2	17010.00	46.20	68.30	-22.10	50.15	41.21	13.12	58.28	--	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>46.31</td> <td>74.00</td> <td>-27.69</td> <td>54.41</td> <td>38.44</td> <td>11.38</td> <td>57.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>47.54</td> <td>68.30</td> <td>-20.76</td> <td>51.49</td> <td>41.21</td> <td>13.12</td> <td>58.28</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11340.00	46.31	74.00	-27.69	54.41	38.44	11.38	57.92	--	--	Peak	2	17010.00	47.54	68.30	-20.76	51.49	41.21	13.12	58.28	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11340.00	46.44	74.00	-27.56	54.54	38.44	11.38	57.92	--	--	Peak																																																																																																
2	17010.00	46.20	68.30	-22.10	50.15	41.21	13.12	58.28	--	--	Peak																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	11340.00	46.31	74.00	-27.69	54.41	38.44	11.38	57.92	--	--	Peak																																																																																																
2	17010.00	47.54	68.30	-20.76	51.49	41.21	13.12	58.28	--	--	Peak																																																																																																



		26																																																																																		
Mode	Band Edge - L																																																																																			
	UNII 1_5.15-5.25_802.11ax HE80_CHCH42_Full RU_5210MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<p style="text-align: right;">Date: 2023-11-27</p>	<p style="text-align: right;">Date: 2023-11-27</p>																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>59.74</td> <td>74.00</td> <td>-14.26</td> <td>50.24</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.42	59.74	74.00	-14.26	50.24	34.42	7.92	32.84	100	360	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>102.23</td> <td>-----</td> <td>92.74</td> <td>34.47</td> <td>7.96</td> <td>32.94</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5210.00</td> <td>95.15</td> <td>-----</td> <td>85.66</td> <td>34.47</td> <td>7.96</td> <td>32.94</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	102.23	-----	92.74	34.47	7.96	32.94	100	360	Peak	2	5210.00	95.15	-----	85.66	34.47	7.96	32.94	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5147.42	59.74	74.00	-14.26	50.24	34.42	7.92	32.84	100	360	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5210.00	102.23	-----	92.74	34.47	7.96	32.94	100	360	Peak																																																																										
2	5210.00	95.15	-----	85.66	34.47	7.96	32.94	100	360	Average																																																																										
Avg	<p style="text-align: right;">Date: 2023-11-27</p>	Blank																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>49.74</td> <td>54.00</td> <td>-4.26</td> <td>40.24</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.42	49.74	54.00	-4.26	40.24	34.42	7.92	32.84	100	360	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5147.42	49.74	54.00	-4.26	40.24	34.42	7.92	32.84	100	360	Average																																																																									



	26																																				
Mode	Band Edge - R																																				
	UNII 1_5.15-5.25_802.11ax HE80_CHCH42_Full RU_5210MHz																																				
ANT	CDD 1+2																																				
Pol.	Horizontal	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5366.40</td> <td>50.09</td> <td>74.00</td> <td>-23.91</td> <td>40.33</td> <td>34.59</td> <td>8.37</td> <td>33.20</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5366.40	50.09	74.00	-23.91	40.33	34.59	8.37	33.20	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5366.40	50.09	74.00	-23.91	40.33	34.59	8.37	33.20	100	360	Peak																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5397.12</td> <td>40.18</td> <td>54.00</td> <td>-13.82</td> <td>30.36</td> <td>34.62</td> <td>8.45</td> <td>33.25</td> <td>100</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5397.12	40.18	54.00	-13.82	30.36	34.62	8.45	33.25	100	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5397.12	40.18	54.00	-13.82	30.36	34.62	8.45	33.25	100	360	Average																										



		26																																																																																										
Mode	Band Edge - L																																																																																											
	UNII 1_5.15-5.25_802.11ax HE80_CHCH42_Full RU_5210MHz																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak																																																																																												
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.90</td> <td>62.07</td> <td>74.00</td> <td>-11.93</td> <td>52.57</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>270</td> <td>360 Peak</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.90	62.07	74.00	-11.93	52.57	34.42	7.92	32.84	270	360 Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>104.57</td> <td>-----</td> <td>-----</td> <td>95.08</td> <td>34.47</td> <td>7.96</td> <td>32.94</td> <td>270</td> <td>360 Peak</td> </tr> <tr> <td>2</td> <td>5210.00</td> <td>97.30</td> <td>-----</td> <td>-----</td> <td>87.81</td> <td>34.47</td> <td>7.96</td> <td>32.94</td> <td>270</td> <td>360 Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	104.57	-----	-----	95.08	34.47	7.96	32.94	270	360 Peak	2	5210.00	97.30	-----	-----	87.81	34.47	7.96	32.94	270
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5146.90	62.07	74.00	-11.93	52.57	34.42	7.92	32.84	270	360 Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5210.00	104.57	-----	-----	95.08	34.47	7.96	32.94	270	360 Peak																																																																																		
2	5210.00	97.30	-----	-----	87.81	34.47	7.96	32.94	270	360 Average																																																																																		
Avg			Blank																																																																																									
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>53.15</td> <td>54.00</td> <td>-0.85</td> <td>43.65</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>270</td> <td>360 Average</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.42	53.15	54.00	-0.85	43.65	34.42	7.92	32.84	270	360 Average																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5147.42	53.15	54.00	-0.85	43.65	34.42	7.92	32.84	270	360 Average																																																																																		



	26																																												
Mode	Band Edge - R																																												
	UNII 1_5.15-5.25_802.11ax HE80_CHCH42_Full RU_5210MHz																																												
ANT	CDD 1+2																																												
Pol.	Vertical	Fundamental																																											
Peak																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.24</td> <td>50.81</td> <td>74.00</td> <td>-23.19</td> <td>41.07</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>270</td> <td>360</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5352.24	50.81	74.00	-23.19	41.07	34.58	8.33	33.17	270	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5352.24	50.81	74.00	-23.19	41.07	34.58	8.33	33.17	270	360	Peak																																		
Avg																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.44</td> <td>41.61</td> <td>54.00</td> <td>-12.39</td> <td>31.87</td> <td>34.58</td> <td>8.34</td> <td>33.18</td> <td>270</td> <td>360</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB							cm	deg	1	5353.44	41.61	54.00	-12.39	31.87	34.58	8.34	33.18	270	360
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																						
						cm	deg																																						
1	5353.44	41.61	54.00	-12.39	31.87	34.58	8.34	33.18	270	360	Average																																		



Mode	26																																																																																										
	Harmonic																																																																																										
	UNII 1_5.15-5.25_802.11ax HE80_CHCH42_Full RU_5210MHz																																																																																										
ANT	CDD 1+2																																																																																										
Pol.	Horizontal	Vertical																																																																																									
Peak Avg																																																																																											
	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>Mhz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>47.37</td> <td>68.30</td> <td>-20.93</td> <td>57.88</td> <td>37.65</td> <td>10.77</td> <td>58.93</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>47.20</td> <td>74.00</td> <td>-26.80</td> <td>52.92</td> <td>40.59</td> <td>12.72</td> <td>59.03</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor		Mhz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10420.00	47.37	68.30	-20.93	57.88	37.65	10.77	58.93	-- -- Peak	2	15630.00	47.20	74.00	-26.80	52.92	40.59	12.72	59.03	-- -- Peak	<table border="1"> <thead> <tr> <th rowspan="2">Limit</th> <th colspan="2">Read</th> <th rowspan="2">Ant</th> <th rowspan="2">Cable</th> <th rowspan="2">Preamp</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th></th> <th>Mhz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>47.93</td> <td>68.30</td> <td>-20.37</td> <td>58.44</td> <td>37.65</td> <td>10.77</td> <td>58.93</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>47.83</td> <td>74.00</td> <td>-26.17</td> <td>53.55</td> <td>40.59</td> <td>12.72</td> <td>59.03</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor		Mhz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10420.00	47.93	68.30	-20.37	58.44	37.65	10.77	58.93	-- -- Peak	2	15630.00	47.83	74.00	-26.17	53.55	40.59	12.72	59.03
Limit	Read		Ant	Cable							Preamp	APos	TPos	Remark																																																																													
	Freq	Level			Line Margin	Level	Factor	Loss Factor																																																																																			
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	10420.00	47.37	68.30	-20.93	57.88	37.65	10.77	58.93	-- -- Peak																																																																																		
2	15630.00	47.20	74.00	-26.80	52.92	40.59	12.72	59.03	-- -- Peak																																																																																		
Limit	Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
	Freq	Level							Line Margin	Level	Factor	Loss Factor																																																																															
	Mhz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	10420.00	47.93	68.30	-20.37	58.44	37.65	10.77	58.93	-- -- Peak																																																																																		
2	15630.00	47.83	74.00	-26.17	53.55	40.59	12.72	59.03	-- -- Peak																																																																																		



		27																																																																																				
Mode	Band Edge - L																																																																																					
	UNII 2A_5.25-5.35_802.11ax HE80_CHCH58_Full RU_5290MHz																																																																																					
ANT	CDD 1+2																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak																																																																																						
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5113.05</td> <td>48.72</td> <td>74.00</td> <td>-25.28</td> <td>39.23</td> <td>34.39</td> <td>7.89</td> <td>32.79</td> <td>100</td> <td>347</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5113.05	48.72	74.00	-25.28	39.23	34.39	7.89	32.79	100	347	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>102.33</td> <td>-----</td> <td>-----</td> <td>92.70</td> <td>34.53</td> <td>8.17</td> <td>33.07</td> <td>100</td> <td>347</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>95.91</td> <td>-----</td> <td>-----</td> <td>86.28</td> <td>34.53</td> <td>8.17</td> <td>33.07</td> <td>100</td> <td>347</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	102.33	-----	-----	92.70	34.53	8.17	33.07	100	347	Peak	2	5290.00	95.91	-----	-----	86.28	34.53	8.17	33.07	100	347
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5113.05	48.72	74.00	-25.28	39.23	34.39	7.89	32.79	100	347	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5290.00	102.33	-----	-----	92.70	34.53	8.17	33.07	100	347	Peak																																																																											
2	5290.00	95.91	-----	-----	86.28	34.53	8.17	33.07	100	347	Average																																																																											
Avg		Blank																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.00</td> <td>40.83</td> <td>54.00</td> <td>-13.17</td> <td>31.33</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>100</td> <td>347</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.00	40.83	54.00	-13.17	31.33	34.42	7.92	32.84	100	347	Average																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																															
1	5147.00	40.83	54.00	-13.17	31.33	34.42	7.92	32.84	100	347	Average																																																																											



	27																																							
Mode	Band Edge - R																																							
	UNII 2A_5.25-5.35_802.11ax HE80_CHCH58_Full RU_5290MHz																																							
ANT	CDD 1+2																																							
Pol.	Horizontal	Fundamental																																						
Peak	<p style="text-align: right;">Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.44</td> <td>61.32</td> <td>74.00</td> <td>-12.68</td> <td>51.57</td> <td>34.59</td> <td>8.35</td> <td>33.19</td> <td>100</td> <td>347</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5359.44	61.32	74.00	-12.68	51.57	34.59	8.35	33.19	100	347	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1	5359.44	61.32	74.00	-12.68	51.57	34.59	8.35	33.19	100	347	Peak																													
Avg	<p style="text-align: right;">Date: 2023-11-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.40</td> <td>50.31</td> <td>54.00</td> <td>-3.69</td> <td>40.57</td> <td>34.58</td> <td>8.34</td> <td>33.18</td> <td>100</td> <td>347</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5354.40	50.31	54.00	-3.69	40.57	34.58	8.34	33.18	100	347	Average
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1	5354.40	50.31	54.00	-3.69	40.57	34.58	8.34	33.18	100	347	Average																													



		27																																																																																		
Mode	Band Edge - L																																																																																			
	UNII 2A_5.25-5.35_802.11ax HE80_CHCH58_Full RU_5290MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.35</td> <td>50.24</td> <td>74.00</td> <td>-23.76</td> <td>40.74</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>274</td> <td>359</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.35	50.24	74.00	-23.76	40.74	34.42	7.92	32.84	274	359	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>105.13</td> <td>-----</td> <td>95.50</td> <td>34.53</td> <td>8.17</td> <td>33.07</td> <td>274</td> <td>359</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>5290.00</td> <td>98.28</td> <td>-----</td> <td>88.65</td> <td>34.53</td> <td>8.17</td> <td>33.07</td> <td>274</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	105.13	-----	95.50	34.53	8.17	33.07	274	359	Peak	2	5290.00	98.28	-----	88.65	34.53	8.17	33.07	274	359
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5147.35	50.24	74.00	-23.76	40.74	34.42	7.92	32.84	274	359	Peak																																																																									
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5290.00	105.13	-----	95.50	34.53	8.17	33.07	274	359	Peak																																																																										
2	5290.00	98.28	-----	88.65	34.53	8.17	33.07	274	359	Average																																																																										
Avg		Blank																																																																																		
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.80</td> <td>42.31</td> <td>54.00</td> <td>-11.69</td> <td>32.82</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>274</td> <td>359</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.80	42.31	54.00	-11.69	32.82	34.42	7.92	32.85	274	359	Average																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																													
1	5149.80	42.31	54.00	-11.69	32.82	34.42	7.92	32.85	274	359	Average																																																																									