

Test Report

Report No.: MTi230901007-01E1

Date of issue: 2023-09-21

Applicant: Shenzhen Keshunda Technology Co., LTD

Product: Power Bank

Model(s): 973WP

FCC ID: 2BCH9-973WP

Shenzhen Microtest Co., Ltd.

http://www.mtitest.com



The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.

Instructions

- 1. This test report shall not be partially reproduced without the written consent of the laboratory.
- 2. The test results in this test report are only responsible for the samples submitted
- 3. This test report is invalid without the seal and signature of the laboratory.
- 4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
- 5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86-755)88850135 Fax: (86-755) 88850136 Web: www.mtitest.com E-mail: mti@51mti.com

Table of contents

1	Gen	eral Description	5
	1.1 1.2 1.3 1.4 1.5	Description of the EUT Description of test modes Environmental Conditions Description of support units Measurement uncertainty	5 6 6
2	Sum	nmary of Test Result	7
3	Test	Facilities and accreditations	8
	3.1	Test laboratory	8
4	List	of test equipment	9
5	Eval	luation Results (Evaluation)	10
	5.1	Antenna requirement	10
6	Radi	io Spectrum Matter Test Results (RF)	10
	6.1 6.2 6.3 6.4	Conducted Emission at AC power line 20dB Occupied Bandwidth Emissions in frequency bands (below 30MHz) Emissions in frequency bands (30MHz - 1GHz)	13 16
Ph	otogr	aphs of the test setup	22
Ph	otogr	aphs of the EUT	23



	Test Result Certification
Applicant:	Shenzhen Keshunda Technology Co., LTD
Address:	1101, Building 2, No. 2 Chongqing Road, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen
Manufacturer:	Shenzhen Keshunda Technology Co., LTD
Address:	1101, Building 2, No. 2 Chongqing Road, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen
Product description	
Product name:	Power Bank
Trade mark:	N/A
Model name:	973WP
Series Model:	N/A
Standards:	47 CFR Part 15C
Test Method:	ANSI C63.10-2013
Date of Test	
Date of test:	2023-09-12 to 2023-09-21
Test result:	Pass

Test Engineer	:	letter.lan.
		(Letter Lan)
Reviewed By		leon chen
		(Leon Chen)
Approved By		Tom Xue
		(Tom Xue)



1 General Description

1.1 Description of the EUT

Product name:	Power Bank
Model name:	973WP
Series Model:	N/A
Model difference:	N/A
Electrical rating:	lightning input :5V2A Type-C in put:5V3A \9v2A\12V1.5A wireless Output:5W\7.5W\10W\15W battery: 3.85V 10000mAh
Accessories:	N/A
Hardware version:	V0.0
Software version:	V0.0
Test sample(s) number:	MTi230901007-01S1001
RF specification	
Operating frequency range:	115-205Khz
Modulation type:	ASK
Antenna(s) type:	coil antenna

1.2 Description of test modes

	<u></u>
No.	Emission test modes
Mode1	lightning input+Wireless output(5W)
Mode2	Type-C input+Wireless output(5W)
Mode3	Wireless output(7.5W)
Mode4	Wireless output(10W)
Mode5	Wireless output(15W)
Mode6	stand by



1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list					
Description	Model	Serial No.	Manufacturer		
wireless charging load	YBZ1.1	1	YBZ		
MI CHARGE(18W)	MDY-08-EH	YJ2808215006999 MI			
Support cable list					
Description Length (m) From To		То			
/	/	1	1		

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Occupied channel bandwidth	±3 %
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15C	47 CFR Part 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15C	47 CFR Part 15.207(a)	Pass
3	20dB Occupied Bandwidth	47 CFR Part 15C	47 CFR Part 15.215(c)	Pass
4	Emissions in frequency bands (below 30MHz)	47 CFR Part 15C	47 CFR Part 15.209	Pass
5	Emissions in frequency bands (30MHz - 1GHz)	47 CFR Part 15C	47 CFR Part 15.209	Pass



3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.			
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China			
Telephone:	(86-755)88850135			
Fax:	(86-755)88850136			
CNAS Registration No.:	CNAS L5868			
FCC Registration No.:	448573			
IC Registration No.:	21760			
CABID:	CN0093			



4 List of test equipment

No. Equipment Manufacturer Model Serial No. Cal. date Cal. Due Conducted Emission at AC power line 1 EMI Test Receiver Rohde&schwarz ESCI3 101368 2023-04-26 2024-04-25 2 Artificial mains network Schwarz ESH2-Z5 183 2023-05-05 2024-06-02 **Condroit Michigan Serial Mains Network Rohde & Schwarz ESH2-Z5 100263 2023-06-03 2024-06-02 **Condroit Michigan Serial Mains Network Rohde & Schwarz ESH2-Z5 100263 2023-06-03 2024-06-02 **Condroit Michigan Serial Mains Network Rohde & Schwarz CMW500 149155 2023-04-26 2024-04-25 2 ESG Serias Analog Ssignal Generator Agilent E44218 GB40051240 2023-04-25 2024-04-24 3 PXA Signal Analyzer Agilent 83752A 3610A01957 2023-04-25 2024-04-25 4 Synthesized Sweeper Agilent N9020A MY50143483 2023-04-26 2024-04-25 5 <th></th> <th colspan="5"></th>							
EMI Test Receiver Rohde&schwarz ESCI3 101368 2023-04-26 2024-04-25	No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
2 Artificial mains network Schwarzbeck NSLK 8127 183 2023-05-05 2024-05-04 3 Artificial Mains Network Rohde & Schwarz ESH2-Z5 100263 2023-06-03 2024-06-02 20dB Occupied Bandwidth 1 Wideband Radio Communication Tester ESG Series Analog Seignal Generator Rohde&schwarz CMW500 149155 2023-04-26 2024-04-25 2 ESG Series Analog Seignal Generator Agilent E421B GB40051240 2023-04-25 2024-04-24 3 PXA Signal Analyzer Agilent N9030A MY51350296 2023-04-25 2024-04-24 4 Synthesized Sweeper Agilent N9020A MY50143483 2023-04-25 2024-04-24 5 MXA Signal Analyzer Agilent N9020A MY50143483 2023-04-26 2024-04-25 6 RF Control Unit Tonscend JS0806-1 19D8060152 2023-04-26 2024-04-25 7 Band Reject Filter Group Tonscend JS0806-F 19D8060160 2023-05-05 2024-04-25		Conducted Emission at AC power line					
Rohde & Schwarz ESH2-Z5 100263 2023-06-03 2024-06-02	1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2023-04-26	2024-04-25
Artificial Mains Network Schwarz ESH2-25 100263 2023-06-30 2024-06-02	2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2023-05-05	2024-05-04
Wideband Radio Communication Tester Rohde&schwarz CMW500 149155 2023-04-26 2024-04-25 2025-05-05 2025-05-0	3	Artificial Mains Network		ESH2-Z5	100263	2023-06-03	2024-06-02
Communication Tester Ronde&schwarz CMW900 149155 2023-04-25 2024-04-25 2025-04-25 2024-04-25 2024-04-24 2023-04-25 2024-04-24 3 PXA Signal Analyzer Agilent N9030A MY51350296 2023-04-25 2024-04-24 3 PXA Signal Analyzer Agilent N9030A MY51350296 2023-04-25 2024-04-24 3 2023-04-25 2024-04-24 3 2023-04-25 2024-04-24 3 3610A01957 2023-04-25 2024-04-24 2024-04-25 2024-04-25 2023-04-26 2023-04-26 2024-04-25 2023-04-26 2023-06-10 2023-06-26 2023-06-10 2023-06-26 2023-06-10			20dB Od	cupied Bandwid	th		
2 Ssignal Generator Agilent E4421B GB40051240 2023-04-25 2024-04-24 3 PXA Signal Analyzer Agilent N9030A MY51350296 2023-04-25 2024-04-24 4 Synthesized Sweeper Agilent N9020A MY50143483 2023-04-26 2024-04-25 5 MXA Signal Analyzer Agilent N9020A MY50143483 2023-04-26 2024-04-25 6 RF Control Unit Tonscend JS0806-1 19D8060152 2023-04-26 2024-04-25 7 Band Reject Filter Group Tonscend JS0806-F 19D8060160 2023-05-05 2024-05-04 8 ESG Vector Signal Generator Agilent N5182A MY50143762 2023-04-25 2024-05-04 9 DC Power Supply Agilent E3632A MY40027695 2023-05-05 2024-05-04 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 9163-1338 20	1	Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
4 Synthesized Sweeper Agilent 83752A 3610A01957 2023-04-25 2024-04-24 5 MXA Signal Analyzer Agilent N9020A MY50143483 2023-04-26 2024-04-25 6 RF Control Unit Tonscend JS0806-1 19D8060152 2023-04-26 2024-04-25 7 Band Reject Filter Group Tonscend JS0806-F 19D8060160 2023-05-05 2024-05-04 8 ESG Vector Signal Generator Agilent N5182A MY50143762 2023-04-25 2024-04-24 9 DC Power Supply Agilent E3632A MY40027695 2023-05-05 2024-05-04 Emissions in frequency bands (below 30MHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-26 2024-06-25 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna <td>2</td> <td></td> <td>Agilent</td> <td>E4421B</td> <td>GB40051240</td> <td>2023-04-25</td> <td>2024-04-24</td>	2		Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
5 MXA Signal Analyzer Agilent N9020A MY50143483 2023-04-26 2024-04-25 6 RF Control Unit Tonscend JS0806-1 19D8060152 2023-04-26 2024-04-25 7 Band Reject Filter Group Tonscend JS0806-F 19D8060160 2023-05-05 2024-05-04 8 ESG Vector Signal Generator Agilent N5182A MY50143762 2023-04-25 2024-04-24 9 DC Power Supply Agilent E3632A MY40027695 2023-05-05 2024-05-04 Emissions in frequency bands (below 30MHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-21 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna	3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
6 RF Control Unit Tonscend JS0806-1 19D8060152 2023-04-26 2024-04-25 7 Band Reject Filter Group Tonscend JS0806-F 19D8060160 2023-05-05 2024-05-04 8 ESG Vector Signal Generator Agilent N5182A MY50143762 2023-04-25 2024-05-04 Emissions in frequency bands (below 30MHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-21 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-21 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-21 2025-06-10	4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
7 Band Reject Filter Group Tonscend JS0806-F 19D8060160 2023-05-05 2024-05-04 8 ESG Vector Signal Generator Agilent N5182A MY50143762 2023-04-25 2024-04-24 9 DC Power Supply Agilent E3632A MY40027695 2023-05-05 2024-05-04 Emissions in frequency bands (below 30MHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-21 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
8 ESG Vector Signal Generator Agilent N5182A MY50143762 2023-04-25 2024-04-24 9 DC Power Supply Agilent E3632A MY40027695 2023-05-05 2024-05-04 Emissions in frequency bands (below 30MHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25 Emissions in frequency bands (30MHz - 1GHz) Emissions in frequency bands (30MHz - 1GHz) 2023-04-26 2024-04-25 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-21 2025-06-10 4 Amplifier Hewlett	6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
8 Generator Agilent NS182A MY30143762 2023-04-25 2024-04-24 9 DC Power Supply Agilent E3632A MY40027695 2023-05-05 2024-05-04 Emissions in frequency bands (below 30MHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25 Emissions in frequency bands (30MHz - 1GHz) ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-21 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
Emissions in frequency bands (below 30MHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25 Emissions in frequency bands (30MHz - 1GHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna Schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	8		Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25 Emissions in frequency bands (30MHz - 1GHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-21 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
2 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25 Emissions in frequency bands (30MHz - 1GHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25		Emissions in frequency bands (below 30MHz)					
3 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25 Emissions in frequency bands (30MHz - 1GHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
Emissions in frequency bands (30MHz - 1GHz) 1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	2	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2023-06-11	2025-06-10
1 EMI Test Receiver Rohde&schwarz ESCI7 101166 2023-04-26 2024-04-25 2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	3	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-06-26	2024-06-25
2 TRILOG Broadband Antenna schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25		Emissions in frequency bands (30MHz - 1GHz)					
2 Antenna Schwarabeck VULB 9163 9163-1338 2023-06-11 2025-06-10 3 Active Loop Antenna Schwarzbeck FMZB 1519 B 00066 2023-06-11 2025-06-10 4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
4 Amplifier Hewlett-Packard 8447F 3113A06184 2023-06-26 2024-06-25	2		schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
	3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2023-06-11	2025-06-10
5 Multi-device Controller TuoPu TPMDC / 2023-05-04 2024-05-03	4	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-06-26	2024-06-25
	5	Multi-device Controller	TuoPu	TPMDC	1	2023-05-04	2024-05-03



5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Description of the antenna of EUT:	The antenna of the EUT is permanently attached.
Conclusion:	The EUT complies with the requirement of FCC PART 15.203.

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN).					
Test Limit:	Frequency of emission (MHz) Conducted limit (dBµV)					
		Average				
	0.15-0.5 66 to 56* 56 to 46* 0.5-5 56 46 5-30 60 50					
	*Decreases with the logarithm of the frequency.					
Test Method:	ANSI C63.10-2013 section 6.2					
Procedure:	Refer to ANSI C63.10-2013 secti line conducted emissions from u					

6.1.1 E.U.T. Operation:

Operating Environment:							
Temperature:	Temperature: 25.9 °C Humidity: 60 % Atmospheric Pressure: 101 kPa						
Pre test mode: Mode1, Mode2							
Final test mode: All of the listed pre-test mode were tested, only the data of the worst m (Mode1) is recorded in the report					of the worst mode		


6.1.2 Test Setup Diagram:

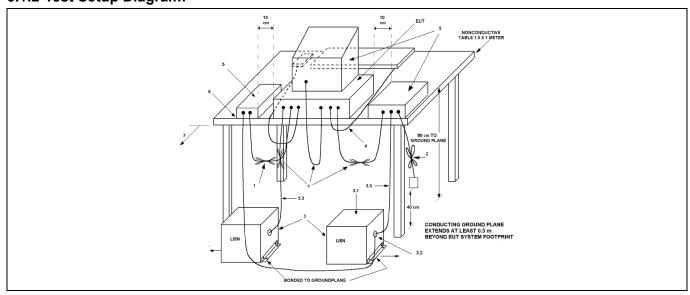

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China Tel: (86-755)88850135 Fax: (86-755) 88850136 Web: www.mtitest.com E-mail: mti@51mti.com



6.1.3 Test Data:

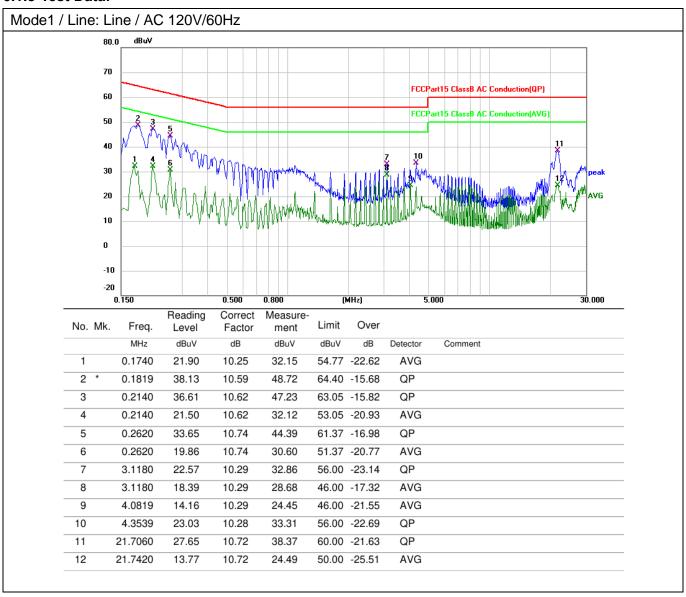

4.0819

4.0819

21.7780

21.7780

9

10

11

12

24.03

17.10

29.10

14.88

10.27

10.27

10.70

10.70

34.30

27.37

39.80

25.58

Page 12 of 23 Report No.: MTi230901007-01E1 Mode1 / Line: Neutral / AC 120V/60Hz dBu∀ 80.0 70 FCCPart15 ClassB AC Conduction(QP) 60 FCCPart15 ClassB AC Conduction(AVG) 50 40 30 20 10 0 -10 -20 0.150 0.500 n snn (MHz) 5.000 30 000 Reading Correct Measure-Limit Over No. Mk. Freq. Level Factor ment MHz dBuV dB dBuV dBuV dB Detector Comment 1 0.1700 38.50 10.28 48.78 64.96 -16.18 QP 2 0.1740 21.11 10.28 31.39 54.77 -23.38 AVG 63.05 -16.23 QP 3 0.2140 36.12 10.70 46.82 4 0.2620 19.45 10.79 30.24 51.37 -21.13 AVG 5 1.0900 21.41 12.56 33.97 56.00 -22.03 QP 6 1.0900 13.10 12.56 25.66 46.00 -20.34 AVG 7 3.1300 25.01 10.27 35.28 56.00 -20.72 QP 3.1300 22.78 10.27 46.00 -12.95 8 33.05 AVG

QP

QP

AVG

AVG

56.00 -21.70

46.00 -18.63

60.00 -20.20

50.00 -24.42



6.2 20dB Occupied Bandwidth


otherwise be specified in the specific rule section under which the equipmer operates, is contained within the frequency band designated in the rule section under which the equipment is operated. Test Method: ANSI C63.10-2013, section 6.9.2 a) The spectrum analyzer center frequency is set to the nominal EUT chann center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5. d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target "-xx dB down" requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. f) Set detection mode to peak and trace mode to max hold. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the "-xx dB down amplitude" using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta functic of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, t	Test Requirement:	47 CFR Part 15.215(c)
a) The spectrum analyzer center frequency is set to the nominal EUT chann center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW]) below the reference level. Specific guidence is given in 4.1.5. d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target "-xx dB down" requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. f) Set detection mode to peak and trace mode to max hold. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the "-xx dB down amplitude" using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the higher frequency of the envelope of the spectral display, such that each marker is a or slightly below the "-xx dB down amp	Test Limit:	alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5 d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target "-xx dB down" requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. f) Set detection mode to peak and trace mode to max hold. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the "-xx dB down amplitude" using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the higher frequency of the envelope of the spectral display, such that the ach marker is a or slightly below the "-xx dB down amplitude" determined in step h). If a marker is below this "-xx d		ANSI C63.10-2013, section 6.9.2
	Procedure:	b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target "-xx dB down" requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. f) Set detection mode to peak and trace mode to max hold. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the "-xx dB down amplitude" using [(reference value) - xx]. Alternatively, this calculation may be made by using the marker-delta function of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the "-xx dB down amplitude" determined in step h). If a marker is below this "-xx dB down amplitude" value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference betw



6.2.1 E.U.T. Operation:


Operating Environment:							
Temperature: 23.7 °C Humidity: 32.1 % Atmospheric Pressure: 98 kPa							
Pre test mode:	Pre test mode: Mode1, Mode2, Mode3, Mode4, Mode5, Mode6						
Final test mode: All of the listed pre-test mode were tested, only the data of the worst mode (Mode5) is recorded in the report						of the worst mode	

6.2.2 Test Setup Diagram:

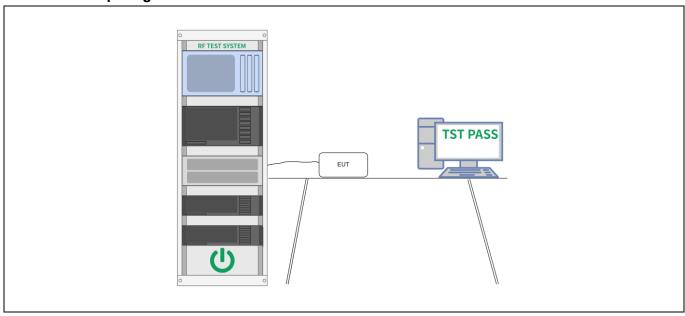

6.2.3 Test Data:

Frequency	20 dB occupied bandwidth	99% occupied bandwidth
kHz	Hz	Hz
127.395	806	690

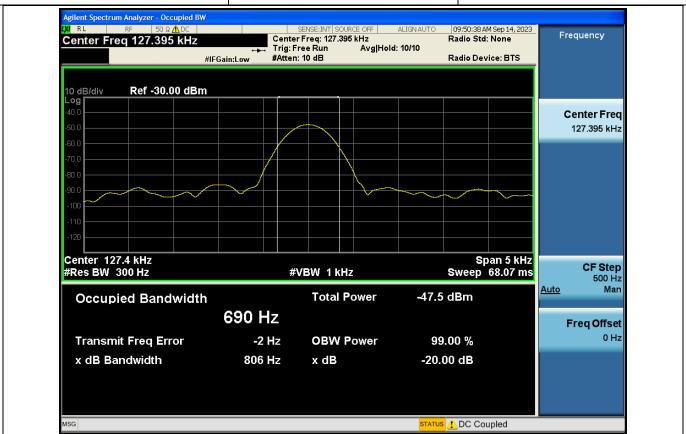




6.3 Emissions in frequency bands (below 30MHz)

Test Requirement:	47 CFR Part 15.209				
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measuremen t distance (meters)		
	0.009-0.490	2400/F(kHz)	300		
	0.490-1.705	24000/F(kHz)	30		
	1.705-30.0	30	30		
	30-88	100 **	3		
	88-216	150 **	3		
	216-960	200 **	3		
	Above 960	500	3		
	However, operation within these frequency bands is permitted under othe sections of this part, e.g., §§ 15.231 and 15.241. As shown in § 15.35(b), for frequencies above 1000 MHz, the field streng limits in paragraphs (a)and (b)of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB us any condition of modulation. For point-to-point operation under paragraph (b)of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.				
Test Method:	ANSI C63.10-2013 sec	ction 6.4			
Procedure:	ANSI C63.10-2013 sec	ction 6.4			

6.3.1 E.U.T. Operation:


Operating Environment:							
Temperature: 32.3 °C Humidity: 42.8 % Atmospheric Pressure: 99 kPa							
Pre test mode:	Pre test mode: Mode1, Mode2, Mode3, Mode4, Mode5, Mode6						
Final test mode: All of the listed pre-test mode were tested, only the data of the worst mode (Mode5) is recorded in the report					of the worst mode		


6.3.2 Test Setup Diagram:

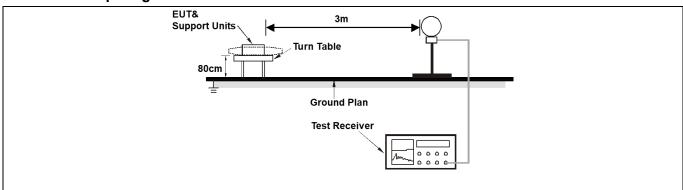




6.3.3 Test Data:

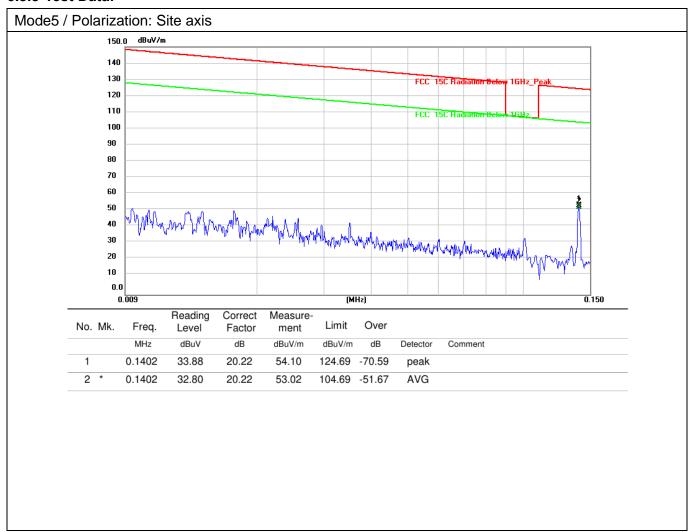



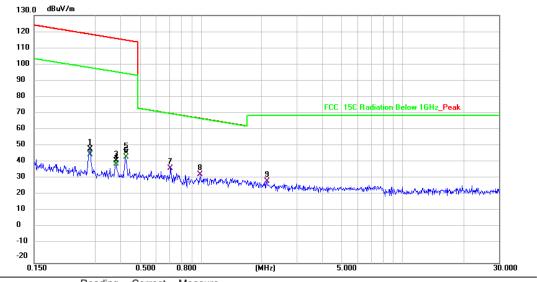

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	0.2847	28.99	20.31	49.30	118.52	-69.22	peak	
2	0.2847	25.49	20.31	45.80	98.52	-52.72	AVG	
3	0.3811	21.82	20.34	42.16	115.99	-73.83	peak	
4	0.3811	20.00	20.34	40.34	95.99	-55.65	AVG	
5	0.4260	26.60	20.35	46.95	115.02	-68.07	peak	
6	0.4260	24.00	20.35	44.35	95.02	-50.67	AVG	
7 *	0.7084	17.21	20.45	37.66	70.61	-32.95	QP	
8	0.9891	13.17	20.57	33.74	67.72	-33.98	QP	
9	2.1213	9.01	20.66	29.67	69.50	-39.83	QP	




6.4 Emissions in frequency bands (30MHz - 1GHz)

Test Requirement:	47 CFR Part 15.209					
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measuremen t distance			
		(microvoits/meter)	(meters)			
	0.009-0.490	2400/F(kHz)	300			
	0.490-1.705	24000/F(kHz)	30			
	1.705-30.0	30	30			
	30-88	100 **	3			
	88-216	150 **	3			
	216-960	200 **	3			
	Above 960	500	3			
	However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.					
As shown in § 15.35(b), for frequencies above 1000 MHz, the field limits in paragraphs (a)and (b)of this section are based on average However, the peak field strength of any emission shall not exceed to maximum permitted average limits specified above by more than 20 any condition of modulation. For point-to-point operation under para (b)of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.						
Test Method:	ANSI C63.10-2013 sec	tion 6.5				
Procedure:	ANSI C63.10-2013 sec	tion 6.5				

6.4.1 E.U.T. Operation:


Operating Environment:						
Temperature:	Temperature: 32.3 °C Humidity: 42.8 % Atmospheric Pressure: 99 kPa					
Pre test mode:	Pre test mode: Mode1, Mode2, Mode3, Mode4, Mode5, Mode6					
Final test mode: All of the listed pre-test mode were tested, only the data of the worst mode (Mode4) is recorded in the report						of the worst mode


6.4.2 Test Setup Diagram:

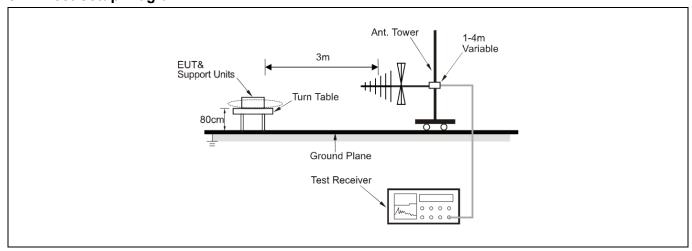



6.4.3 Test Data:

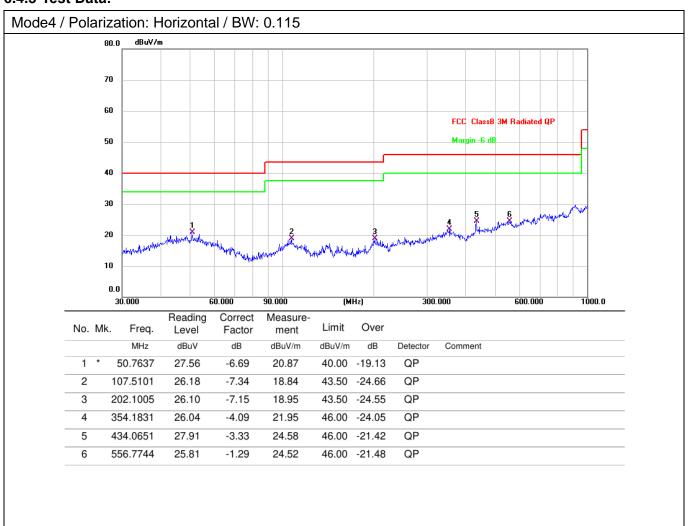

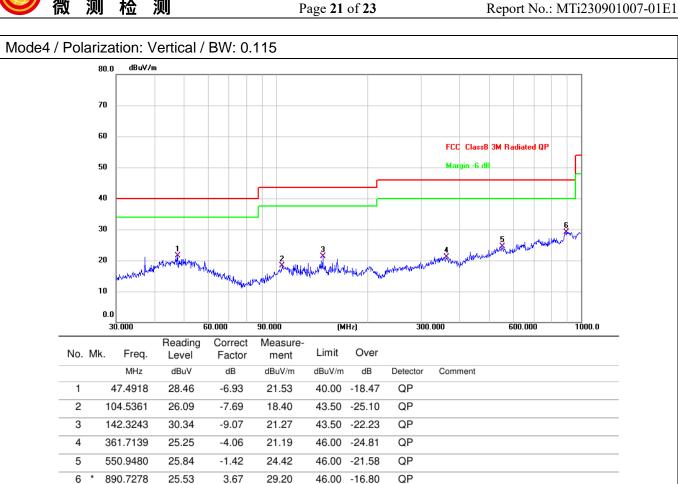



Photographs of the test setup

Refer to Appendix - Test Setup Photos



Photographs of the EUT

Refer to Appendix - EUT Photos

----End of Report----