

# TEST REPORT

Product Name: smart watch  
FCC ID: 2BCIE-HX05  
Trademark: N/A  
Model Number: HX05, HX02, HX03, HX04, GF03, GF07, GF09, HX8, HX09, HX10, HX12, HX04W, HX001, HX6, HX7, HX13, HX15, HX16, HX18, HX20  
Prepared For: Shenzhen Fire Core Intelligent Equipment Co.,Ltd.  
Address: 901, Building d, Zhishang Science and Technology Park, Mashantou Community, Matian Street, Guangming District, Shenzhen  
Manufacturer: Shenzhen Fire Core Intelligent Equipment Co.,Ltd.  
Address: 901, Building d, Zhishang Science and Technology Park, Mashantou Community, Matian Street, Guangming District, Shenzhen  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Aug. 14, 2023  
Sample tested Date: Aug. 14, 2023 to Aug. 29, 2023  
Issue Date: Aug. 29, 2023  
Report No.: CTB230829009RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.  
Compiled by: Reviewed by: Approved by:

Zhou kui

Zhou Kui

Arron Liu

Arron Liu



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	11
6.1 Block Diagram Of Test Setup .....	11
6.2 Limit .....	11
6.3 Test procedure .....	11
6.4 Test Result .....	13
<b>7. RADIATED SPURIOUS EMISSION</b> .....	15
7.1 Block Diagram Of Test Setup .....	15
7.2 Limit .....	15
7.3 Test procedure .....	16
7.4 Test Result .....	17
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	26
8.1 Block Diagram Of Test Setup .....	26
8.2 Limit .....	26
8.3 Test procedure .....	26
8.4 Test Result .....	27
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	34
9.1 Block Diagram Of Test Setup .....	34
9.2 Limit .....	34
9.3 Test procedure .....	34
9.4 Test Result .....	35
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	39
10.1 Block Diagram Of Test Setup .....	39
10.2 Limit .....	39
10.3 Test procedure .....	39
10.4 Test Result .....	39
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	43
11.1 Block Diagram Of Test Setup .....	43
11.2 Limit .....	43
11.3 Test procedure .....	43
11.4 Test Result .....	43
<b>12. HOPPING CHANNEL NUMBER</b> .....	47
12.1 Block Diagram Of Test Setup .....	47
12.2 Limit .....	47
12.3 Test procedure .....	47
12.4 Test Result .....	47

**13. DWELL TIME** ..... 49

13.1 Block Diagram Of Test Setup ..... 49

13.2 Limit ..... 49

13.3 Test procedure ..... 49

13.4 Test Result ..... 50

**14. PSEUDORANDOM FREQUENCY** ..... 54

14.1 Limit ..... 54

14.2 Test procedure ..... 54

14.3 Test Result ..... 55

**15. ANTENNA REQUIREMENT** ..... 56

**16. EUT TEST SETUP PHOTOGRAPHS** ..... 57

*(Note: N/A means not applicable)*



1. VERSION

Report No.	Issue Date	Description	Approved
CTB230829009RFX	Aug. 29, 2023	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	HX05, HX02, HX03, HX04, GF03, GF07, GF09, HX8, HX09, HX10, HX12, HX04W, HX001, HX6, HX7, HX13, HX15, HX16, HX18, HX20
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: HX05
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 2.822dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Internal antenna
Antenna Gain:	Bluetooth: 1.48dBi
Ratings:	DC 5V wireless charging from adapter DC 3.8V by battery

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.8V
Normal Temperature( $^{\circ}$ C)	23
Low Temperature( $^{\circ}$ C)	0
High Temperature( $^{\circ}$ C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2023.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2023.10.30

**Continuous disturbance**


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

**Radiated emission**

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

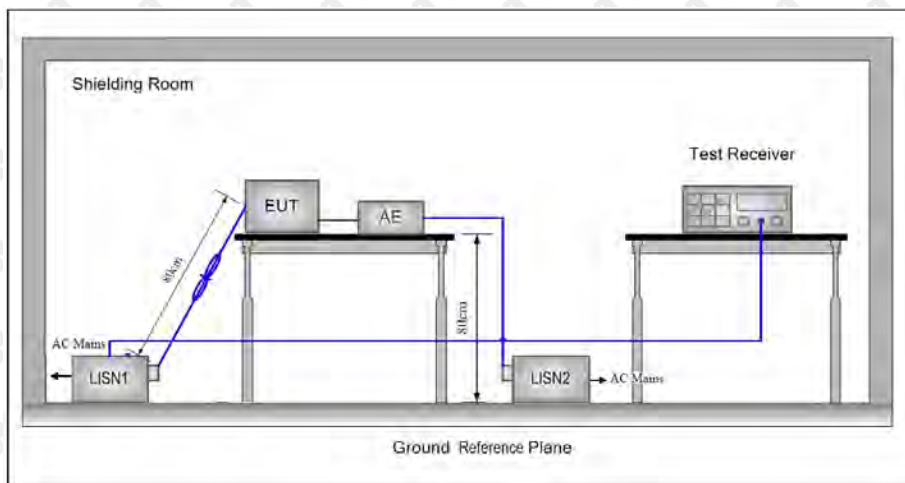

### 6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

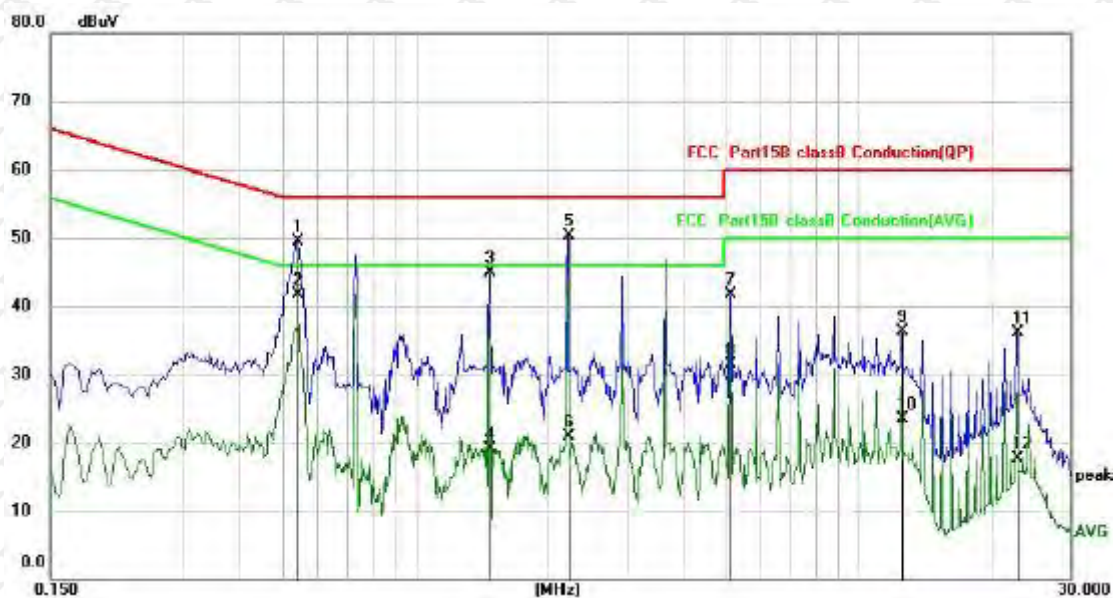


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1		0.5420	39.79	9.69	49.48	56.00	-6.52	QP
2	*	0.5420	32.03	9.69	41.72	46.00	-4.28	AVG
3		1.4700	35.07	9.79	44.86	56.00	-11.14	QP
4		1.4700	9.35	9.79	19.14	46.00	-26.86	AVG
5		2.2019	40.53	9.82	50.35	56.00	-5.65	QP
6		2.2019	11.03	9.82	20.85	46.00	-25.15	AVG
7		5.1379	31.76	9.95	41.71	60.00	-18.29	QP
8		5.1379	21.48	9.95	31.43	50.00	-18.57	AVG
9		12.4818	26.02	10.27	36.29	60.00	-23.71	QP
10		12.4818	13.14	10.27	23.41	50.00	-26.59	AVG
11		22.7658	25.32	10.69	36.01	60.00	-23.99	QP
12		22.7658	6.98	10.69	17.67	50.00	-32.33	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

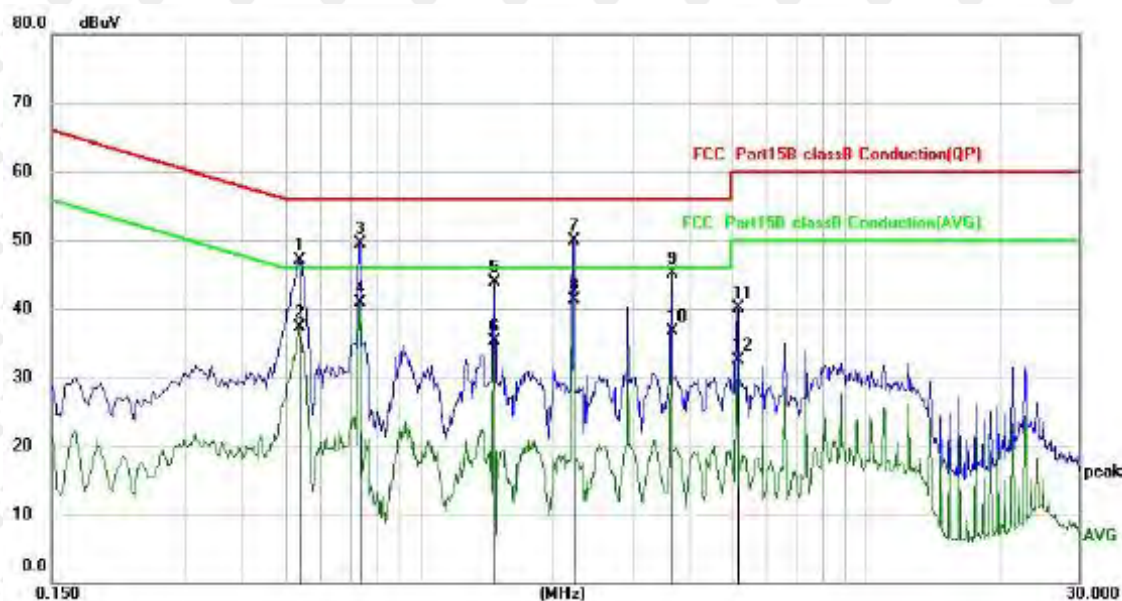

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1	0.5380	37.46	9.69	47.15	56.00	-8.85	QP
2	0.5380	27.70	9.69	37.39	46.00	-8.61	AVG
3	0.7339	39.88	9.72	49.60	56.00	-6.40	QP
4	0.7339	31.15	9.72	40.87	46.00	-5.13	AVG
5	1.4700	34.10	9.79	43.89	56.00	-12.11	QP
6	1.4700	25.59	9.79	35.38	46.00	-10.62	AVG
7	2.2058	40.10	9.82	49.92	56.00	-6.08	QP
8 *	2.2058	31.39	9.82	41.21	46.00	-4.79	AVG
9	3.6739	35.22	9.88	45.10	56.00	-10.90	QP
10	3.6739	26.86	9.88	36.74	46.00	-9.26	AVG
11	5.1418	30.19	9.95	40.14	60.00	-19.86	QP
12	5.1418	22.62	9.95	32.57	50.00	-17.43	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

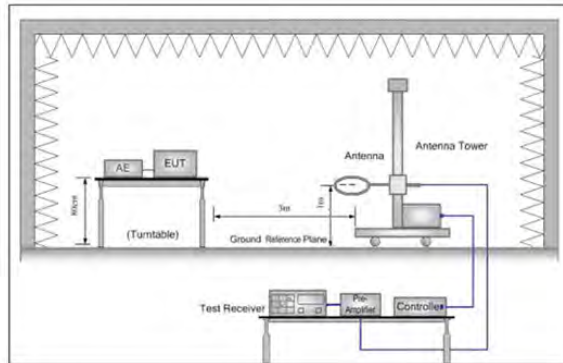


Figure 1. Below 30MHz

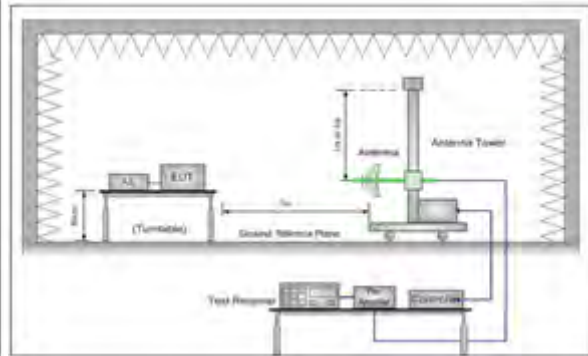


Figure 2. 30MHz to 1GHz

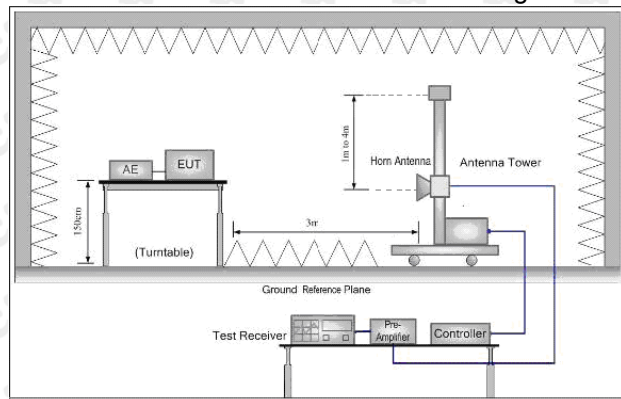


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average



### 7.4 Test Result


Below 1GHz Test Results:  
 Antenna polarity: H  
 Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.6000	33.32	-6.51	26.81	40.00	-13.19	QP
2		94.5941	37.71	-9.96	27.75	43.50	-15.75	QP
3		137.9028	26.94	-5.68	21.26	43.50	-22.24	QP
4		470.5232	26.73	-0.76	25.97	46.00	-20.03	QP
5		762.0385	29.67	5.05	34.72	46.00	-11.28	QP
6	*	957.1148	28.08	7.73	35.81	46.00	-10.19	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V  
Worst case-GFSK(low channel)

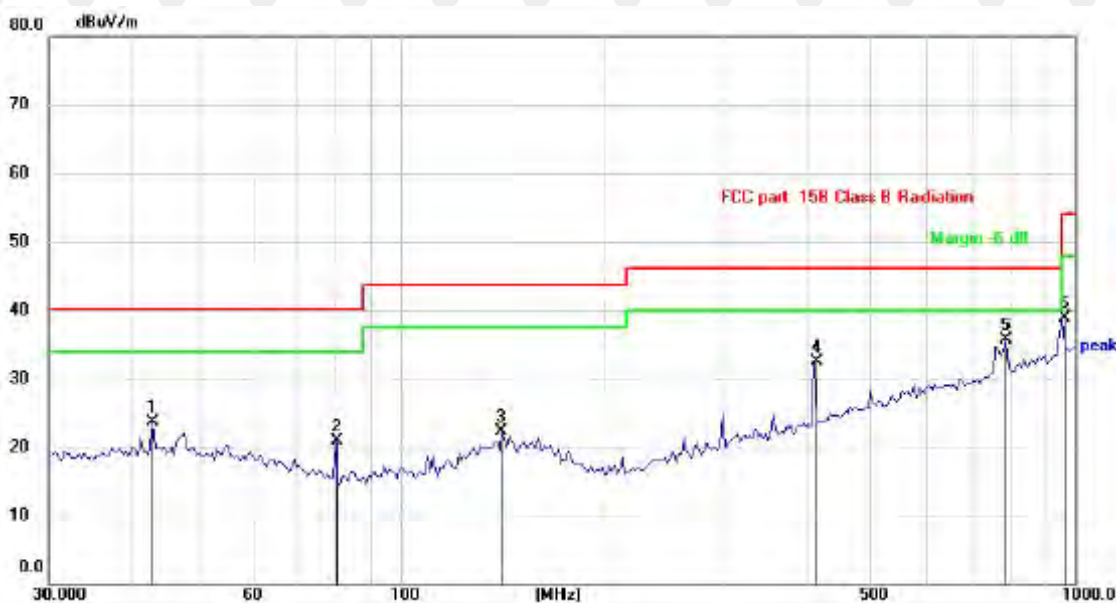

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		42.9750	30.17	-6.51	23.66	40.00	-16.34	QP
2		80.0806	31.32	-10.50	20.82	40.00	-19.18	QP
3		141.5777	27.77	-5.50	22.27	43.50	-21.23	QP
4		412.5467	34.90	-2.31	32.59	46.00	-13.41	QP
5		789.2338	30.16	5.57	35.73	46.00	-10.27	QP
6	*	957.1148	31.11	7.73	38.84	46.00	-7.16	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2402MHz)  
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	58.01	-3.65	54.36	74.00	-19.64	peak
4804	50.35	-3.65	46.70	54.00	-7.30	AVG
7206	59.13	-0.95	58.18	74.00	-15.82	peak
7206	41.88	-0.95	40.93	54.00	-13.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	58.60	-3.65	54.95	74.00	-19.05	peak
4804	49.53	-3.65	45.88	54.00	-8.12	AVG
7206	59.79	-0.95	58.84	74.00	-15.16	peak
7206	41.49	-0.95	40.54	54.00	-13.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	58.59	-3.54	55.05	74.00	-18.95	peak
4882.00	49.65	-3.54	46.11	54.00	-7.89	AVG
7323.00	57.68	-0.81	56.87	74.00	-17.13	peak
7323.00	42.92	-0.81	42.11	54.00	-11.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	57.48	-3.54	53.94	74.00	-20.06	peak
4882.00	50.04	-3.54	46.50	54.00	-7.50	AVG
7323.00	58.19	-0.81	57.38	74.00	-16.62	peak
7323.00	41.60	-0.81	40.79	54.00	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)  
Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4960	57.67	-3.43	54.24	74.00	-19.76	peak
4960	50.01	-3.44	46.57	54.00	-7.43	AVG
7440	60.32	-0.77	59.55	74.00	-14.45	peak
7440	42.32	-0.77	41.55	54.00	-12.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4960	58.88	-3.43	55.45	74.00	-18.55	peak
4960	48.54	-3.44	45.10	54.00	-8.90	AVG
7440	61.37	-0.77	60.60	74.00	-13.40	peak
7440	42.19	-0.77	41.42	54.00	-12.58	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

**Restricted bands around fundamental frequency (Radiated)**

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	57.29	-5.81	51.48	74.00	-22.52	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.36	-5.84	49.52	74.00	-24.48	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	57.09	-5.81	51.28	74.00	-22.72	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.84	-5.84	51.00	74.00	-23.00	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	54.18	-5.81	48.37	74.00	-25.63	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.68	-6.06	48.62	74.00	-25.38	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	57.16	-5.81	51.35	74.00	-22.65	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.14	-6.06	48.08	74.00	-25.92	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	56.85	-5.81	51.04	74.00	-22.96	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.59	-5.84	47.75	74.00	-26.25	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	55.33	-5.81	49.52	74.00	-24.48	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.29	-5.84	47.45	74.00	-26.55	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - I limits

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	57.27	-5.81	51.46	74.00	-22.54	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.46	-6.06	49.40	74.00	-24.60	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.05	-5.81	50.24	74.00	-23.76	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.49	-6.06	48.43	74.00	-25.57	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - I limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

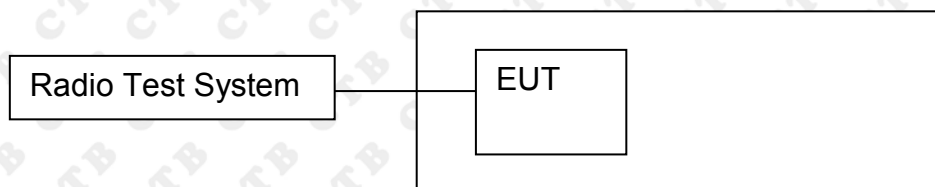


### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold

8.4 Test Result

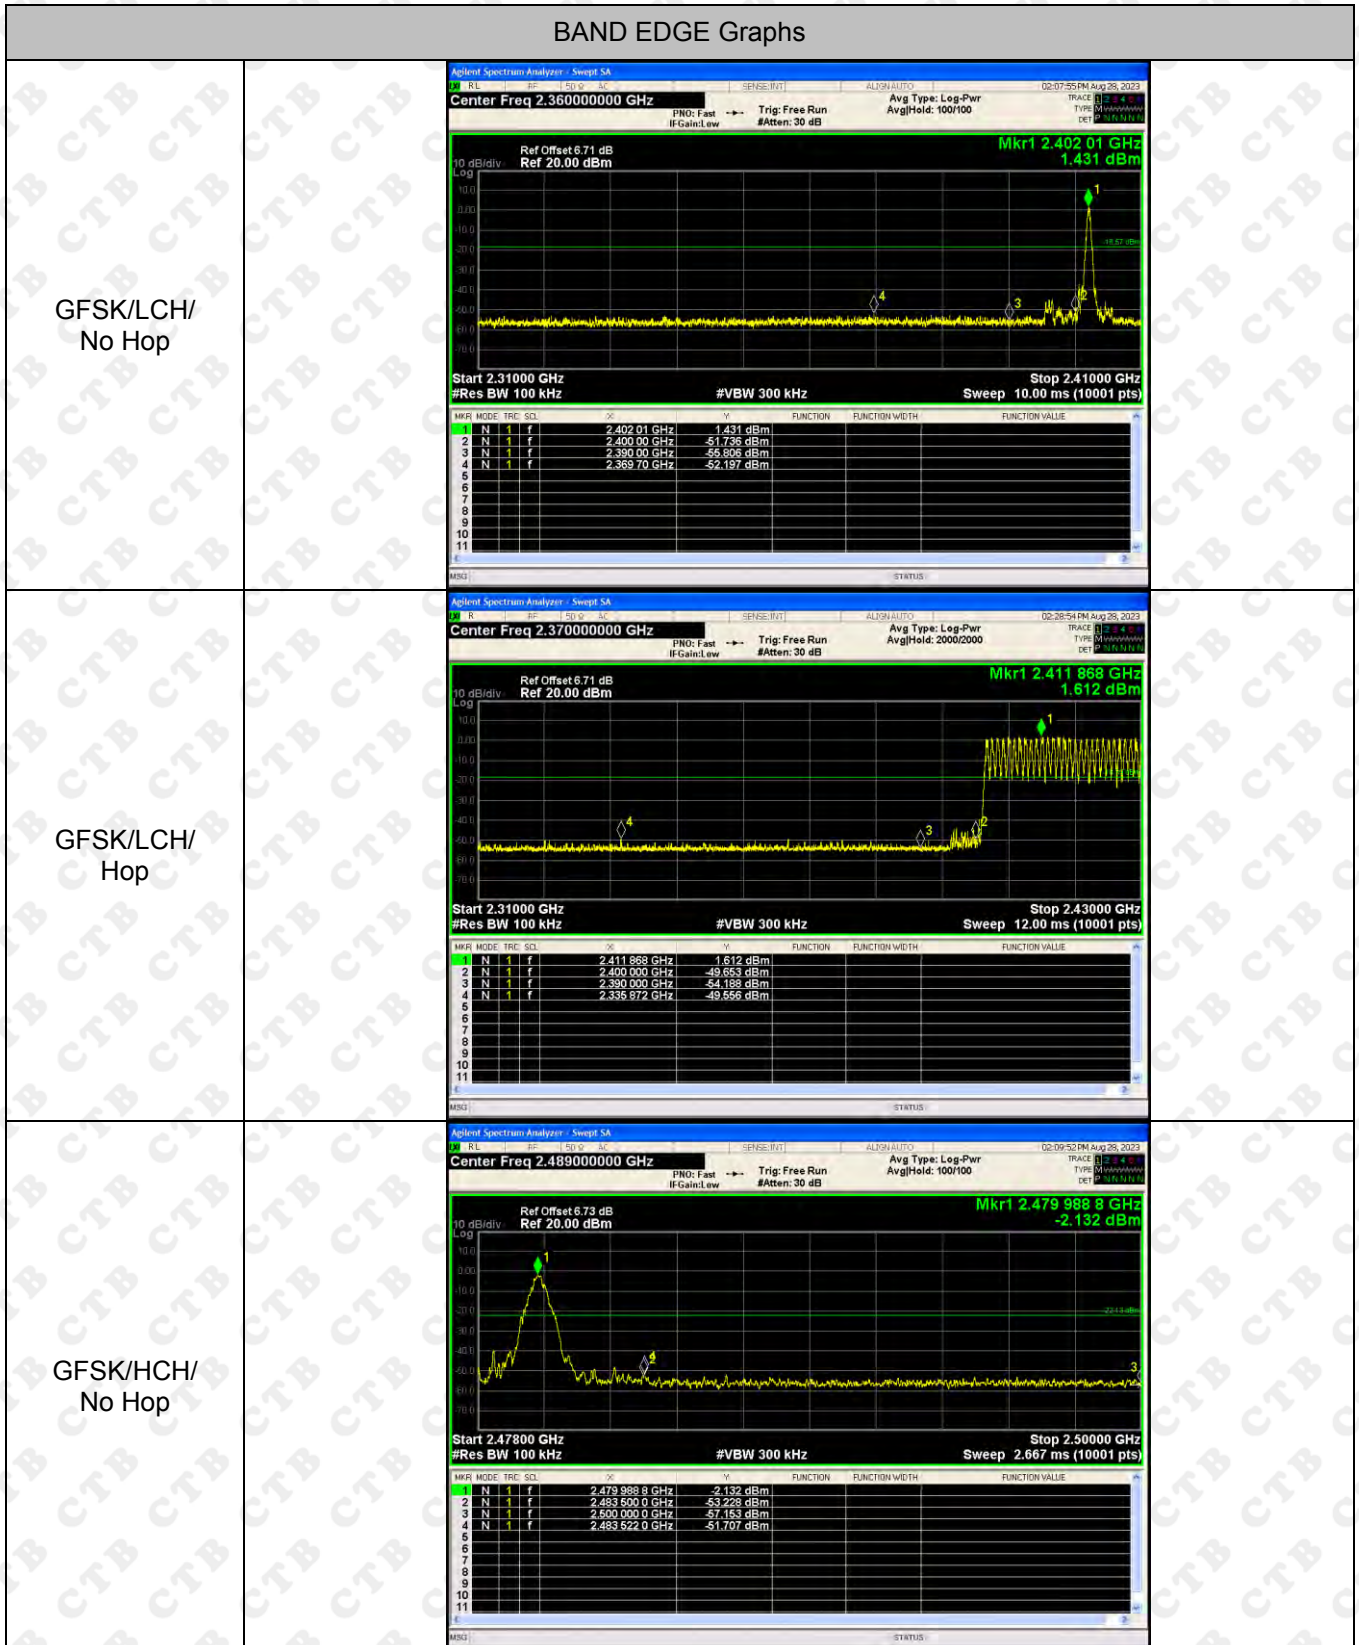


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 6.73 dB Ref 20.00 dBm</p> <p>Mkr1 2.438 012 50 GHz 1.226 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.438 012 50 GHz</td> <td>1.226 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-54.300 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 00 GHz</td> <td>-53.876 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 156 25 GHz</td> <td>-50.689 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.438 012 50 GHz	1.226 dBm				2	N	1	f	2.483 500 00 GHz	-54.300 dBm				3	N	1	f	2.490 000 00 GHz	-53.876 dBm				4	N	1	f	2.493 156 25 GHz	-50.689 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.438 012 50 GHz	1.226 dBm																																									
2	N	1	f	2.483 500 00 GHz	-54.300 dBm																																									
3	N	1	f	2.490 000 00 GHz	-53.876 dBm																																									
4	N	1	f	2.493 156 25 GHz	-50.689 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.402 03 GHz -0.657 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.41000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 03 GHz</td> <td>-0.657 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-50.600 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-57.093 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.375 24 GHz</td> <td>-51.521 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 03 GHz	-0.657 dBm				2	N	1	f	2.400 00 GHz	-50.600 dBm				3	N	1	f	2.390 00 GHz	-57.093 dBm				4	N	1	f	2.375 24 GHz	-51.521 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 03 GHz	-0.657 dBm																																									
2	N	1	f	2.400 00 GHz	-50.600 dBm																																									
3	N	1	f	2.390 00 GHz	-57.093 dBm																																									
4	N	1	f	2.375 24 GHz	-51.521 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 6.71 dB Ref 20.00 dBm</p> <p>Mkr1 2.406 012 GHz 1.349 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.406 012 GHz</td> <td>1.349 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-49.685 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-54.208 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.514 224 GHz</td> <td>-49.346 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.406 012 GHz	1.349 dBm				2	N	1	f	2.400 000 GHz	-49.685 dBm				3	N	1	f	2.390 000 GHz	-54.208 dBm				4	N	1	f	2.514 224 GHz	-49.346 dBm			
MKR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.406 012 GHz	1.349 dBm																																									
2	N	1	f	2.400 000 GHz	-49.685 dBm																																									
3	N	1	f	2.390 000 GHz	-54.208 dBm																																									
4	N	1	f	2.514 224 GHz	-49.346 dBm																																									

<p><math>\pi/4</math>DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.489000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.480 013 0 GHz -1.421 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 013 0 GHz</td><td>-1.421 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 0 GHz</td><td>-54.985 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.490 000 0 GHz</td><td>-55.989 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.498 743 8 GHz</td><td>-52.428 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 013 0 GHz	-1.421 dBm				2	N	1	f	2.483 500 0 GHz	-54.985 dBm				3	N	1	f	2.490 000 0 GHz	-55.989 dBm				4	N	1	f	2.498 743 8 GHz	-52.428 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 013 0 GHz	-1.421 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.985 dBm																																									
3	N	1	f	2.490 000 0 GHz	-55.989 dBm																																									
4	N	1	f	2.498 743 8 GHz	-52.428 dBm																																									
<p><math>\pi/4</math>DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.440 018 75 GHz 0.180 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 018 75 GHz</td><td>0.180 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 00 GHz</td><td>-53.632 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-53.245 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.496 006 25 GHz</td><td>-51.184 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 018 75 GHz	0.180 dBm				2	N	1	f	2.483 500 00 GHz	-53.632 dBm				3	N	1	f	2.500 000 00 GHz	-53.245 dBm				4	N	1	f	2.496 006 25 GHz	-51.184 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.440 018 75 GHz	0.180 dBm																																									
2	N	1	f	2.483 500 00 GHz	-53.632 dBm																																									
3	N	1	f	2.500 000 00 GHz	-53.245 dBm																																									
4	N	1	f	2.496 006 25 GHz	-51.184 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.402 06 GHz -0.034 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 06 GHz</td><td>-0.034 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-51.652 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-54.127 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.358 32 GHz</td><td>-52.007 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 06 GHz	-0.034 dBm				2	N	1	f	2.400 00 GHz	-51.652 dBm				3	N	1	f	2.390 00 GHz	-54.127 dBm				4	N	1	f	2.358 32 GHz	-52.007 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 06 GHz	-0.034 dBm																																									
2	N	1	f	2.400 00 GHz	-51.652 dBm																																									
3	N	1	f	2.390 00 GHz	-54.127 dBm																																									
4	N	1	f	2.358 32 GHz	-52.007 dBm																																									

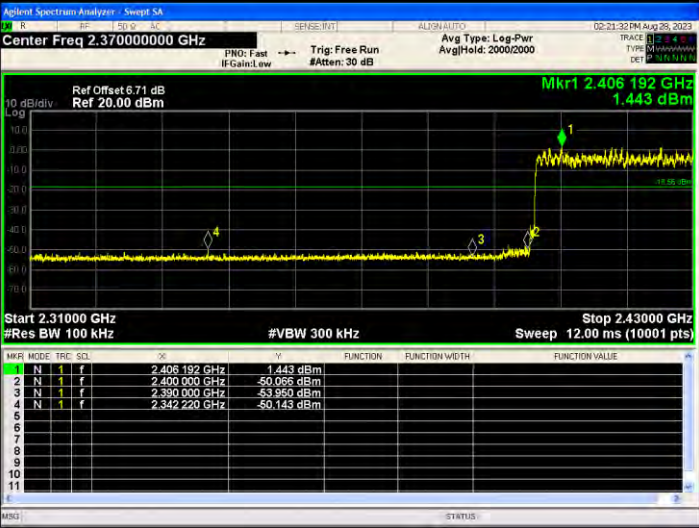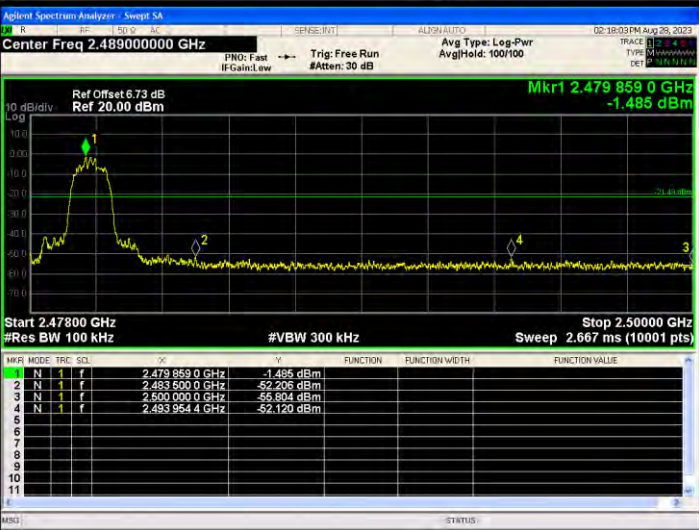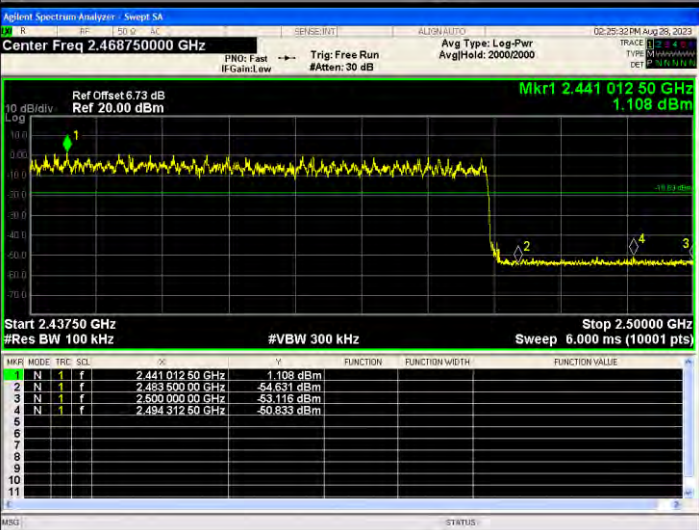
<p>8DPSK /LCH/Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.406192 GHz</td> <td></td> <td></td> <td>1.443 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.400000 GHz</td> <td></td> <td></td> <td>-50.066 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.390000 GHz</td> <td></td> <td></td> <td>-53.950 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.342220 GHz</td> <td></td> <td></td> <td>-50.143 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.406192 GHz			1.443 dBm	2	N	1	f		2.400000 GHz			-50.066 dBm	3	N	1	f		2.390000 GHz			-53.950 dBm	4	N	1	f		2.342220 GHz			-50.143 dBm	5									6									7									8									9									10									11								
MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f		2.406192 GHz			1.443 dBm																																																																																																					
2	N	1	f		2.400000 GHz			-50.066 dBm																																																																																																					
3	N	1	f		2.390000 GHz			-53.950 dBm																																																																																																					
4	N	1	f		2.342220 GHz			-50.143 dBm																																																																																																					
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>8DPSK /HCH/No Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.479859 GHz</td> <td></td> <td></td> <td>-1.485 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.483500 GHz</td> <td></td> <td></td> <td>-52.206 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.500000 GHz</td> <td></td> <td></td> <td>-55.904 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.493954 GHz</td> <td></td> <td></td> <td>-52.120 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.479859 GHz			-1.485 dBm	2	N	1	f		2.483500 GHz			-52.206 dBm	3	N	1	f		2.500000 GHz			-55.904 dBm	4	N	1	f		2.493954 GHz			-52.120 dBm	5									6									7									8									9									10									11								
MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f		2.479859 GHz			-1.485 dBm																																																																																																					
2	N	1	f		2.483500 GHz			-52.206 dBm																																																																																																					
3	N	1	f		2.500000 GHz			-55.904 dBm																																																																																																					
4	N	1	f		2.493954 GHz			-52.120 dBm																																																																																																					
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>8DPSK /HCH/Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.441012 GHz</td> <td></td> <td></td> <td>1.108 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.483500 GHz</td> <td></td> <td></td> <td>-54.631 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.600000 GHz</td> <td></td> <td></td> <td>-53.116 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.494312 GHz</td> <td></td> <td></td> <td>-50.033 dBm</td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.441012 GHz			1.108 dBm	2	N	1	f		2.483500 GHz			-54.631 dBm	3	N	1	f		2.600000 GHz			-53.116 dBm	4	N	1	f		2.494312 GHz			-50.033 dBm	5									6									7									8									9									10									11								
MKR	MODE	TRC	SQL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f		2.441012 GHz			1.108 dBm																																																																																																					
2	N	1	f		2.483500 GHz			-54.631 dBm																																																																																																					
3	N	1	f		2.600000 GHz			-53.116 dBm																																																																																																					
4	N	1	f		2.494312 GHz			-50.033 dBm																																																																																																					
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

## RF Conducted Spurious Emissions Graphs

GFSK/LCH

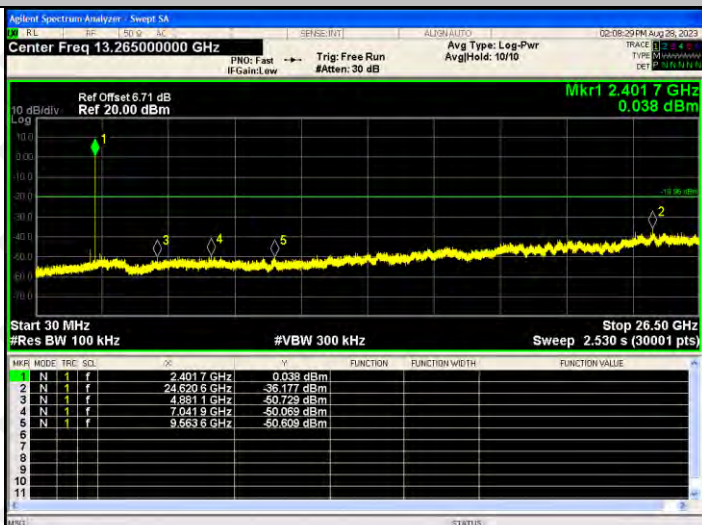

GFSK/MCH



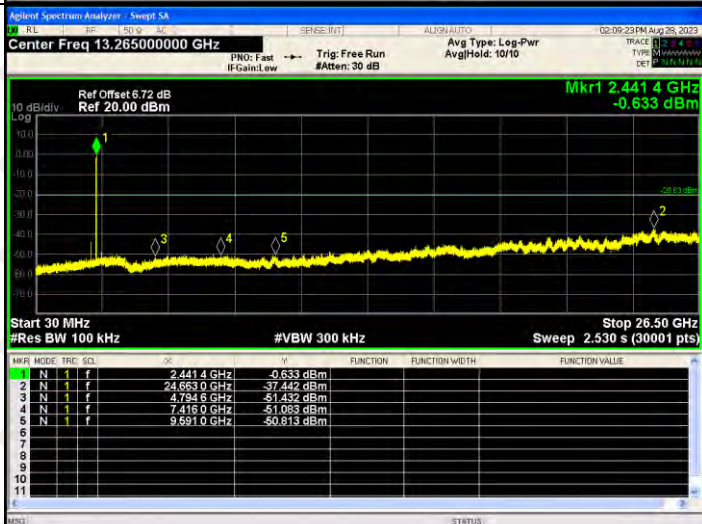


GFSK/HCH




<p><math>\pi/4</math>DQPSK /LCH</p>	<table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>Freq</th> <th>Power</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-2.402 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6374 GHz</td> <td>-37.930 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9321 GHz</td> <td>-50.737 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1778 GHz</td> <td>-50.489 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6592 GHz</td> <td>-50.697 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	Freq	Power	Function	Function Width	Function Value	1	N	1	f	2.4017 GHz	-2.402 dBm				2	N	1	f	24.6374 GHz	-37.930 dBm				3	N	1	f	4.9321 GHz	-50.737 dBm				4	N	1	f	7.1778 GHz	-50.489 dBm				5	N	1	f	9.6592 GHz	-50.697 dBm				
Mkr	Mode	Trig	SQL	Freq	Power	Function	Function Width	Function Value																																																
1	N	1	f	2.4017 GHz	-2.402 dBm																																																			
2	N	1	f	24.6374 GHz	-37.930 dBm																																																			
3	N	1	f	4.9321 GHz	-50.737 dBm																																																			
4	N	1	f	7.1778 GHz	-50.489 dBm																																																			
5	N	1	f	9.6592 GHz	-50.697 dBm																																																			
<p><math>\pi/4</math>DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>Freq</th> <th>Power</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-4.695 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6595 GHz</td> <td>-37.550 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7659 GHz</td> <td>-51.553 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1495 GHz</td> <td>-50.882 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9380 GHz</td> <td>-51.160 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	Freq	Power	Function	Function Width	Function Value	1	N	1	f	2.4405 GHz	-4.695 dBm				2	N	1	f	24.6595 GHz	-37.550 dBm				3	N	1	f	4.7659 GHz	-51.553 dBm				4	N	1	f	7.1495 GHz	-50.882 dBm				5	N	1	f	9.9380 GHz	-51.160 dBm				
Mkr	Mode	Trig	SQL	Freq	Power	Function	Function Width	Function Value																																																
1	N	1	f	2.4405 GHz	-4.695 dBm																																																			
2	N	1	f	24.6595 GHz	-37.550 dBm																																																			
3	N	1	f	4.7659 GHz	-51.553 dBm																																																			
4	N	1	f	7.1495 GHz	-50.882 dBm																																																			
5	N	1	f	9.9380 GHz	-51.160 dBm																																																			
<p><math>\pi/4</math>DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>Freq</th> <th>Power</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-5.816 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6383 GHz</td> <td>-36.250 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8693 GHz</td> <td>-50.736 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.6163 GHz</td> <td>-49.395 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8989 GHz</td> <td>-51.237 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	Freq	Power	Function	Function Width	Function Value	1	N	1	f	2.4802 GHz	-5.816 dBm				2	N	1	f	24.6383 GHz	-36.250 dBm				3	N	1	f	4.8693 GHz	-50.736 dBm				4	N	1	f	7.6163 GHz	-49.395 dBm				5	N	1	f	9.8989 GHz	-51.237 dBm				
Mkr	Mode	Trig	SQL	Freq	Power	Function	Function Width	Function Value																																																
1	N	1	f	2.4802 GHz	-5.816 dBm																																																			
2	N	1	f	24.6383 GHz	-36.250 dBm																																																			
3	N	1	f	4.8693 GHz	-50.736 dBm																																																			
4	N	1	f	7.6163 GHz	-49.395 dBm																																																			
5	N	1	f	9.8989 GHz	-51.237 dBm																																																			

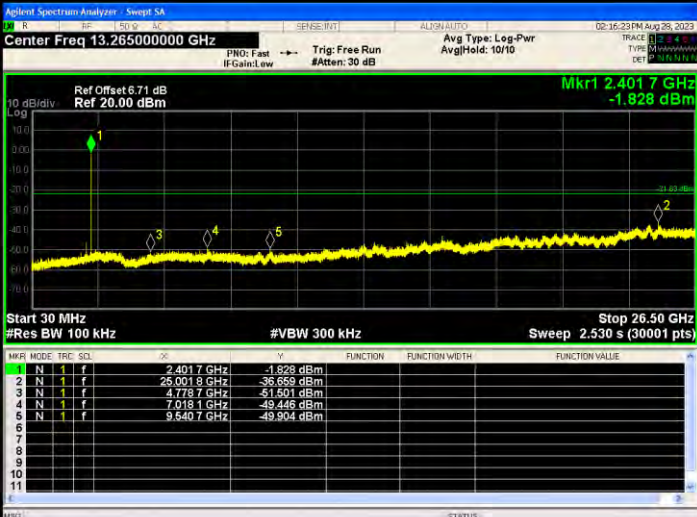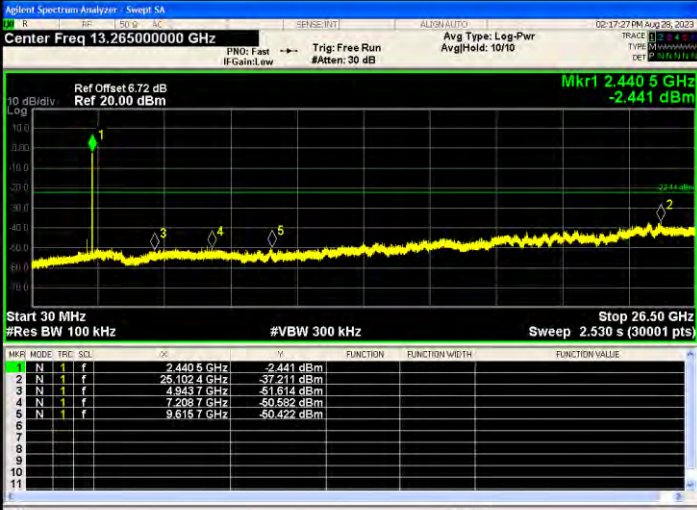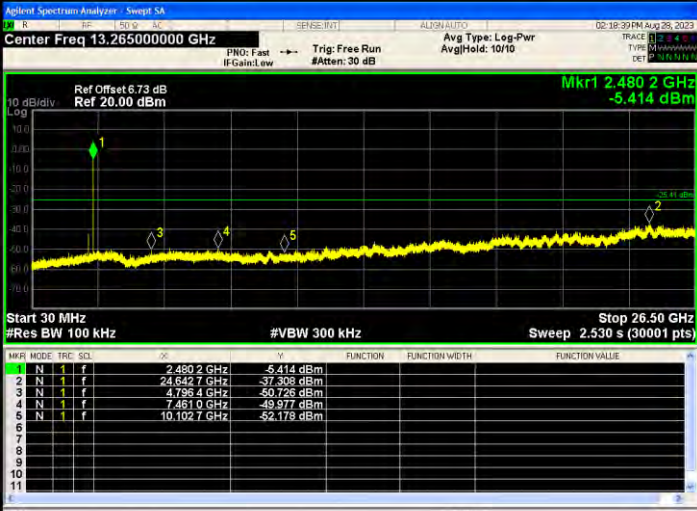

<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-1.828 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.0018 GHz</td> <td>-36.659 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7727 GHz</td> <td>-51.521 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.0181 GHz</td> <td>-49.446 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5407 GHz</td> <td>-49.904 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-1.828 dBm				2	N	1	f	25.0018 GHz	-36.659 dBm				3	N	1	f	4.7727 GHz	-51.521 dBm				4	N	1	f	7.0181 GHz	-49.446 dBm				5	N	1	f	9.5407 GHz	-49.904 dBm				
MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4017 GHz	-1.828 dBm																																																			
2	N	1	f	25.0018 GHz	-36.659 dBm																																																			
3	N	1	f	4.7727 GHz	-51.521 dBm																																																			
4	N	1	f	7.0181 GHz	-49.446 dBm																																																			
5	N	1	f	9.5407 GHz	-49.904 dBm																																																			
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>-2.441 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.1024 GHz</td> <td>-37.211 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9457 GHz</td> <td>-51.614 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2087 GHz</td> <td>-50.582 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6157 GHz</td> <td>-50.422 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-2.441 dBm				2	N	1	f	25.1024 GHz	-37.211 dBm				3	N	1	f	4.9457 GHz	-51.614 dBm				4	N	1	f	7.2087 GHz	-50.582 dBm				5	N	1	f	9.6157 GHz	-50.422 dBm				
MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4405 GHz	-2.441 dBm																																																			
2	N	1	f	25.1024 GHz	-37.211 dBm																																																			
3	N	1	f	4.9457 GHz	-51.614 dBm																																																			
4	N	1	f	7.2087 GHz	-50.582 dBm																																																			
5	N	1	f	9.6157 GHz	-50.422 dBm																																																			
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-5.414 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6427 GHz</td> <td>-37.308 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7954 GHz</td> <td>-50.726 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4610 GHz</td> <td>-49.917 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.1027 GHz</td> <td>-52.178 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-5.414 dBm				2	N	1	f	24.6427 GHz	-37.308 dBm				3	N	1	f	4.7954 GHz	-50.726 dBm				4	N	1	f	7.4610 GHz	-49.917 dBm				5	N	1	f	10.1027 GHz	-52.178 dBm				
MNR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4802 GHz	-5.414 dBm																																																			
2	N	1	f	24.6427 GHz	-37.308 dBm																																																			
3	N	1	f	4.7954 GHz	-50.726 dBm																																																			
4	N	1	f	7.4610 GHz	-49.917 dBm																																																			
5	N	1	f	10.1027 GHz	-52.178 dBm																																																			

## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

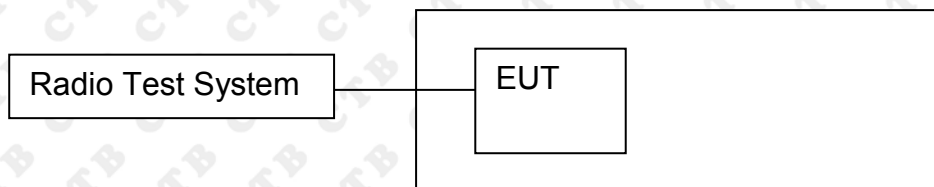

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	1.676	20.97	PASS
	MCH	1.213	20.97	PASS
	HCH	-1.179	20.97	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	-0.746	20.97	PASS
	MCH	1.965	20.97	PASS
	HCH	-0.379	20.97	PASS
EDR mode (8DPSK)	LCH	2.822	20.97	PASS
	MCH	2.328	20.97	PASS
	HCH	-0.028	20.97	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 6.71 dB          Ref 20.00 dBm          Mkr1 2.40182 GHz          1.676 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.441000000 GHz          Ref Offset 6.72 dB          Ref 20.00 dBm          Mkr1 2.44084 GHz          1.213 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.480000000 GHz          Ref Offset 6.73 dB          Ref 20.00 dBm          Mkr1 2.47985 GHz          -1.179 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>

<p><math>\pi/4</math>DQPSK/LCH</p>		
<p><math>\pi/4</math>DQPSK/MCH</p>		
<p><math>\pi/4</math>DQPSK/HCH</p>		

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.40200000 GHz          Ref Offset 6.71 dB          Ref 20.00 dBm          Mkr1 2.40193 GHz          2.822 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.44100000 GHz          Ref Offset 6.72 dB          Ref 20.00 dBm          Mkr1 2.44095 GHz          2.328 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.48000000 GHz          Ref Offset 6.73 dB          Ref 20.00 dBm          Mkr1 2.47995 GHz          -0.028 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>

## 10. 20DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

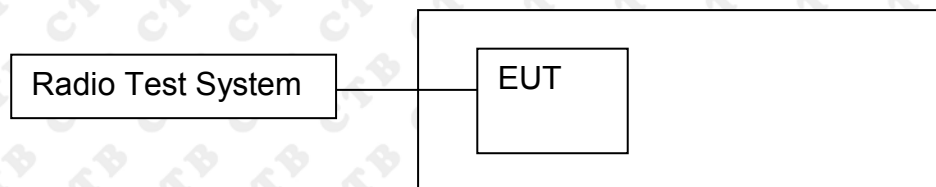

### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.857	<b>PASS</b>
	Mid channel	0.874	<b>PASS</b>
	High channel	0.879	<b>PASS</b>
π/4DQPSK	Low channel	1.289	<b>PASS</b>
	Mid channel	1.313	<b>PASS</b>
	High channel	1.269	<b>PASS</b>
8DPSK	Low channel	1.314	<b>PASS</b>
	Mid channel	1.305	<b>PASS</b>
	High channel	1.288	<b>PASS</b>

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.71 dB Ref 26.71 dBm</p> <p>Mkr3 2.402448 GHz -21.073 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 814.70 kHz Total Power 8.03 dBm</p> <p>Transmit Freq Error 17.311 kHz OBW Power 99.00 % x dB Bandwidth 857.4 kHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.441448 GHz -22.063 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 845.33 kHz Total Power 7.31 dBm</p> <p>Transmit Freq Error 12.425 kHz OBW Power 99.00 % x dB Bandwidth 873.8 kHz x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.73 dB Ref 26.73 dBm</p> <p>Mkr3 2.480448 GHz -23.168 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 824.04 kHz Total Power 5.18 dBm</p> <p>Transmit Freq Error 9.028 kHz OBW Power 99.00 % x dB Bandwidth 878.8 kHz x dB -20.00 dB</p>




<p><math>\pi/4</math>-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 6.71 dB Ref: 26.71 dBm</p> <p>Mkr3: 2.402663 GHz -20.160 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.59 dBm</td> </tr> <tr> <td>1.1879 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>17.864 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.289 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.59 dBm	1.1879 MHz			Transmit Freq Error	OBW Power	99.00 %	17.864 kHz	x dB	-20.00 dB	x dB Bandwidth			1.289 MHz			
Occupied Bandwidth	Total Power	7.59 dBm																		
1.1879 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
17.864 kHz	x dB	-20.00 dB																		
x dB Bandwidth																				
1.289 MHz																				
<p><math>\pi/4</math>-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3: 2.44167 GHz -21.490 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.42 dBm</td> </tr> <tr> <td>1.1818 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>13.159 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.313 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.42 dBm	1.1818 MHz			Transmit Freq Error	OBW Power	99.00 %	13.159 kHz	x dB	-20.00 dB	x dB Bandwidth			1.313 MHz			
Occupied Bandwidth	Total Power	7.42 dBm																		
1.1818 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
13.159 kHz	x dB	-20.00 dB																		
x dB Bandwidth																				
1.313 MHz																				
<p><math>\pi/4</math>-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 6.73 dB Ref: 26.73 dBm</p> <p>Mkr3: 2.480648 GHz -22.171 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.15 dBm</td> </tr> <tr> <td>1.1732 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>13.361 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.269 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	5.15 dBm	1.1732 MHz			Transmit Freq Error	OBW Power	99.00 %	13.361 kHz	x dB	-20.00 dB	x dB Bandwidth			1.269 MHz			
Occupied Bandwidth	Total Power	5.15 dBm																		
1.1732 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
13.361 kHz	x dB	-20.00 dB																		
x dB Bandwidth																				
1.269 MHz																				

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.71 dB</p> <p>Ref 26.71 dBm</p> <p>Mkr3 2.402668 GHz</p> <p>-20.975 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.2082 MHz</p> <p>Total Power 7.40 dBm</p> <p>Transmit Freq Error 10.849 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.314 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.72 dB</p> <p>Ref 26.72 dBm</p> <p>Mkr3 2.441664 GHz</p> <p>-20.936 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.2071 MHz</p> <p>Total Power 7.01 dBm</p> <p>Transmit Freq Error 11.081 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.305 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#IF Gain: Low</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.73 dB</p> <p>Ref 26.73 dBm</p> <p>Mkr3 2.48066 GHz</p> <p>-23.278 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1862 MHz</p> <p>Total Power 5.09 dBm</p> <p>Transmit Freq Error 16.379 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.288 MHz</p> <p>x dB -20.00 dB</p>

## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

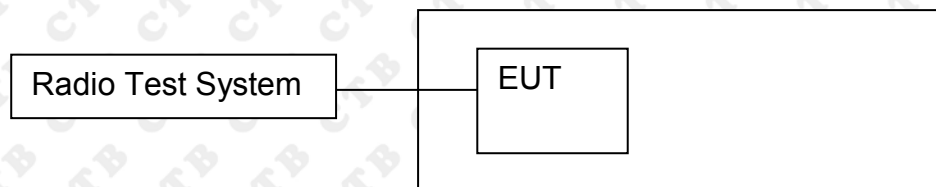

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.998	0.571	PASS
GFSK	MCH	0.996	0.583	PASS
GFSK	HCH	0.998	0.586	PASS
$\pi/4$ DQPSK	LCH	1.002	0.859	PASS
$\pi/4$ DQPSK	MCH	1.002	0.875	PASS
$\pi/4$ DQPSK	HCH	1.006	0.846	PASS
8DPSK	LCH	1.002	0.876	PASS
8DPSK	MCH	1.006	0.870	PASS
8DPSK	HCH	1.000	0.859	PASS

Test Graph

Graphs

GFSK/LCH





GFSK/MCH



GFSK/HCH

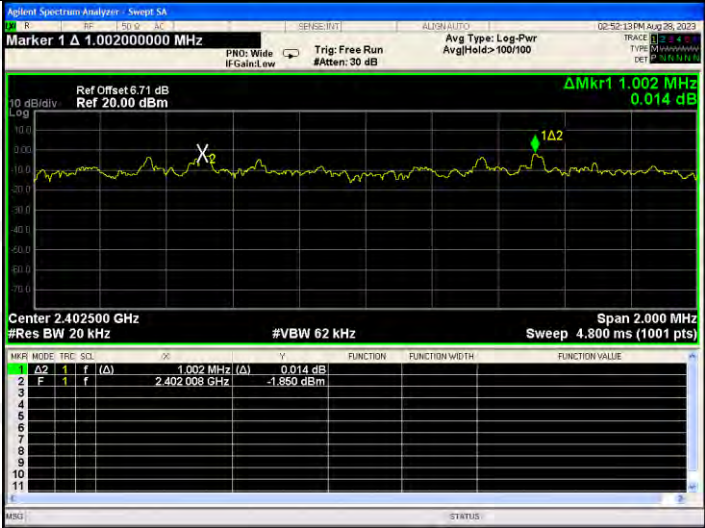


<p><math>\pi/4</math>DQPSK/LCH</p>	 <table border="1" data-bbox="592 607 1299 763"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td>0.014 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 008 GHz</td> <td></td> <td></td> <td>-1.850 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)		0.014 dB	2	F	1	f		2.402 008 GHz			-1.850 dBm	
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)		0.014 dB																					
2	F	1	f		2.402 008 GHz			-1.850 dBm																					
<p><math>\pi/4</math>DQPSK/MCH</p>	 <table border="1" data-bbox="592 1133 1299 1290"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td>-1.772 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 016 GHz</td> <td></td> <td></td> <td>-2.150 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)		-1.772 dB	2	F	1	f		2.441 016 GHz			-2.150 dBm	
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.002 MHz	(Δ)		-1.772 dB																					
2	F	1	f		2.441 016 GHz			-2.150 dBm																					
<p><math>\pi/4</math>DQPSK/HCH</p>	 <table border="1" data-bbox="592 1659 1299 1816"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.006 MHz</td> <td>(Δ)</td> <td></td> <td>-0.336 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478 848 GHz</td> <td></td> <td></td> <td>-6.316 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.006 MHz	(Δ)		-0.336 dB	2	F	1	f		2.478 848 GHz			-6.316 dBm	
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	1.006 MHz	(Δ)		-0.336 dB																					
2	F	1	f		2.478 848 GHz			-6.316 dBm																					
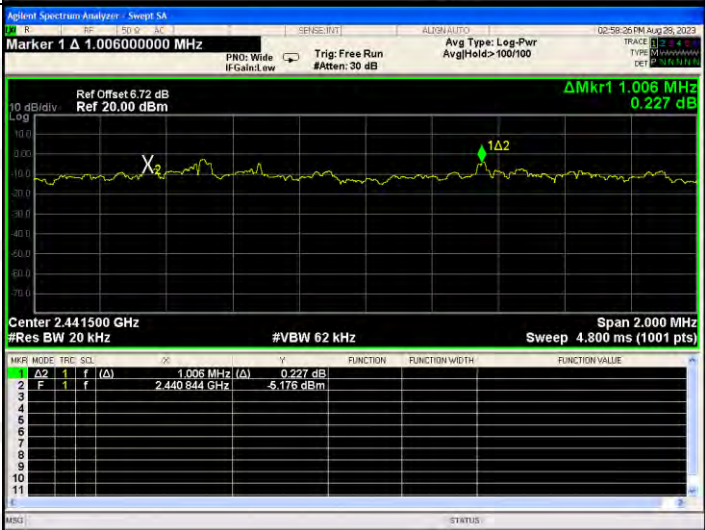
<p>8DPSK/LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>-0.376 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.402 010 GHz</td> <td></td> <td>-1.750 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.002 MHz	(Δ)	-0.376 dB			2	F	1	f	2.402 010 GHz		-1.750 dBm			
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)	1.002 MHz	(Δ)	-0.376 dB																							
2	F	1	f	2.402 010 GHz		-1.750 dBm																							
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td>1.006 MHz</td> <td>(Δ)</td> <td>0.227 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.440 844 GHz</td> <td></td> <td>-5.176 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.006 MHz	(Δ)	0.227 dB			2	F	1	f	2.440 844 GHz		-5.176 dBm			
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)	1.006 MHz	(Δ)	0.227 dB																							
2	F	1	f	2.440 844 GHz		-5.176 dBm																							
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>ΔX</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td>-0.058 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>2.479 176 GHz</td> <td></td> <td>-7.168 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)	1.000 MHz	(Δ)	-0.058 dB			2	F	1	f	2.479 176 GHz		-7.168 dBm			
MNR	MODE	TRC	SCN	ΔX	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)	1.000 MHz	(Δ)	-0.058 dB																							
2	F	1	f	2.479 176 GHz		-7.168 dBm																							

## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

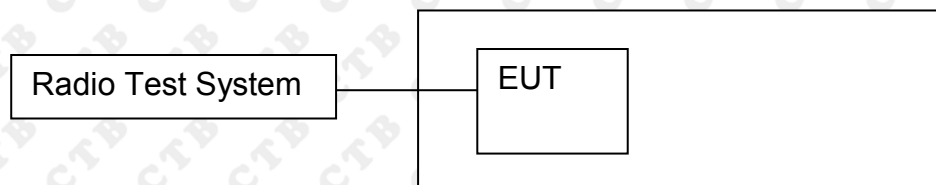

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	$\geq 15$	PASS
$\pi/4$ DQPSK	Hop	79	$\geq 15$	PASS
8DPSK	Hop	79	$\geq 15$	PASS


Test Graph





### 13. DWELL TIME

#### 13.1 Block Diagram Of Test Setup

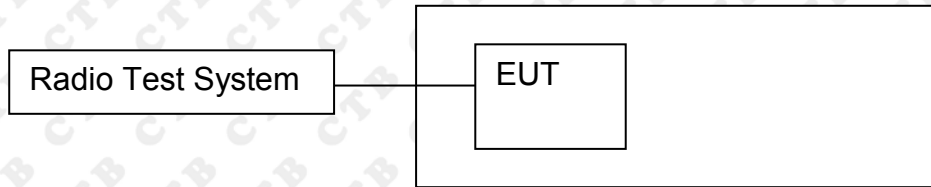

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.637	261.92	400	PASS
	DH3	MCH	1.643	262.88	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.895	308.8	400	PASS
	DH5	MCH	2.895	308.8	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5:  $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3:  $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1:  $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


## Test Graph

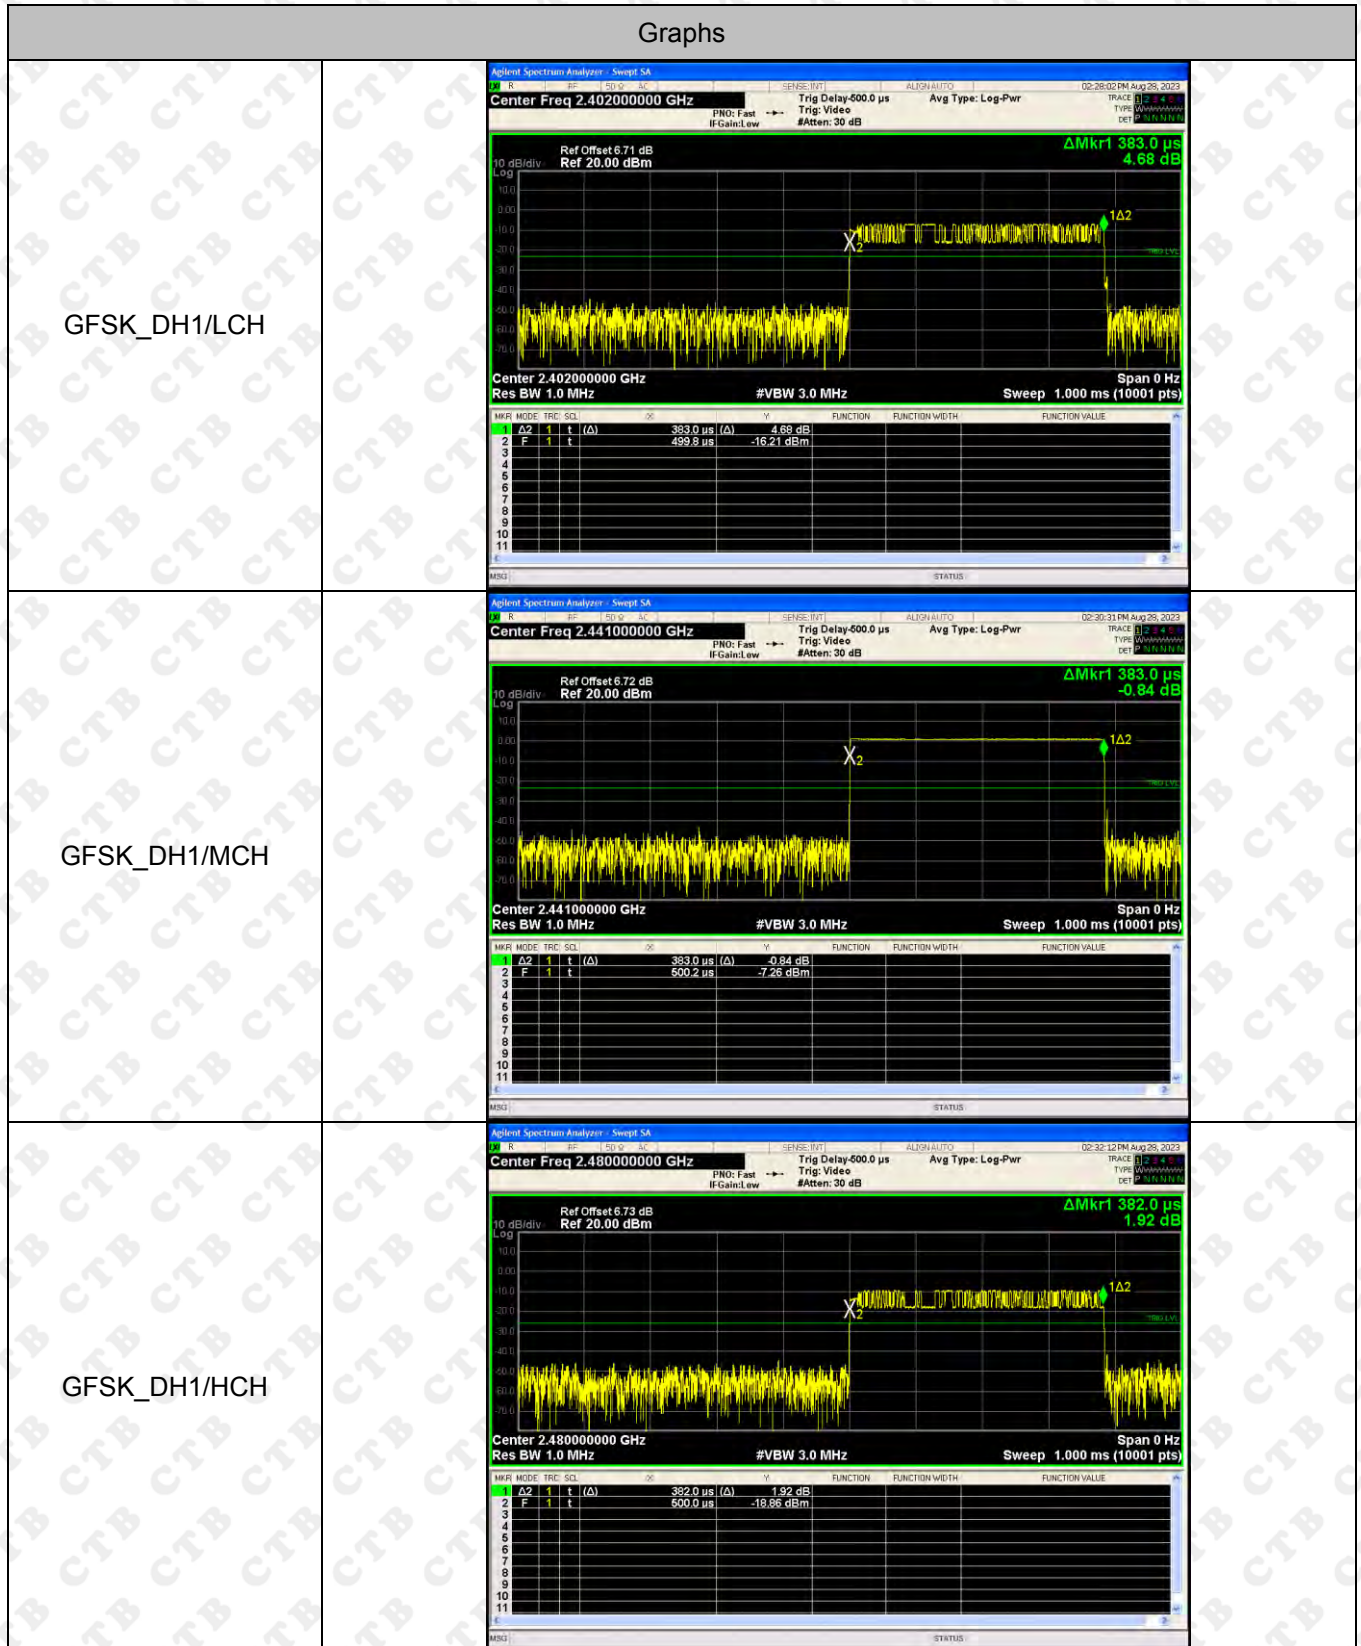


GFSK\_DH3/LCH

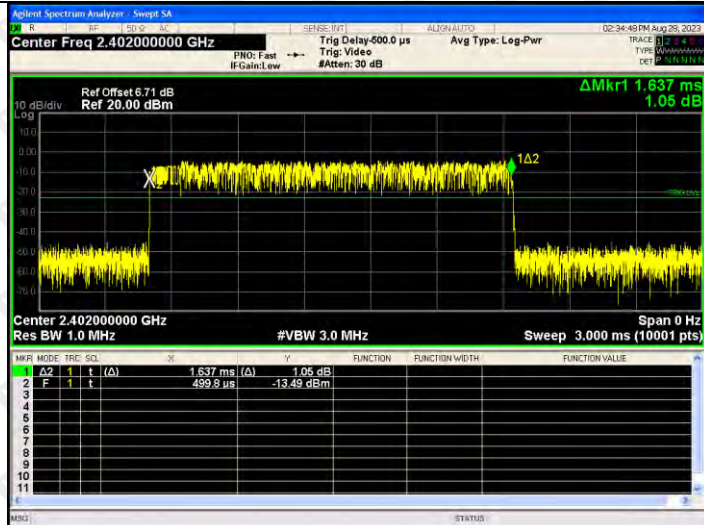


GFSK\_DH3/MCH

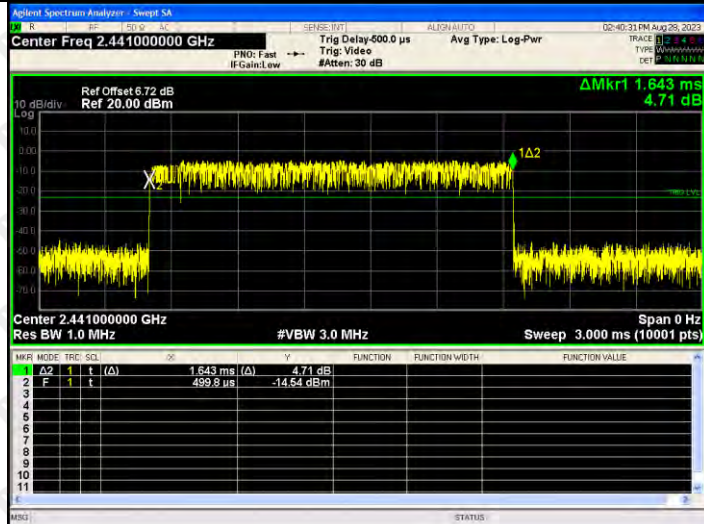


GFSK\_DH3/HCH

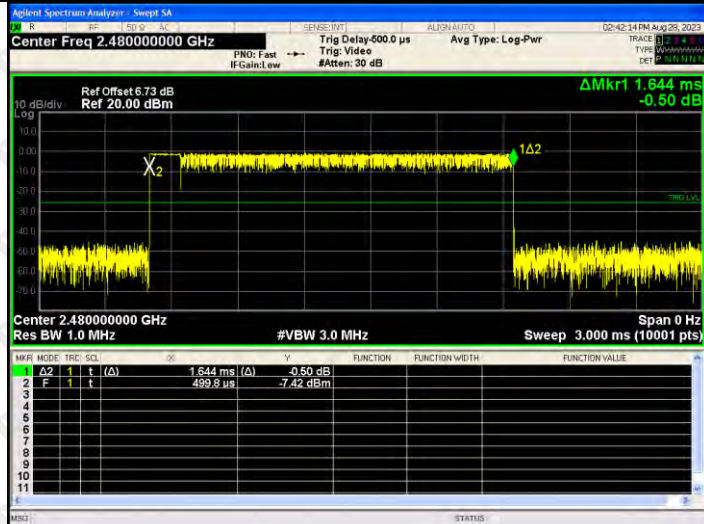


GFSK\_DH5/LCH

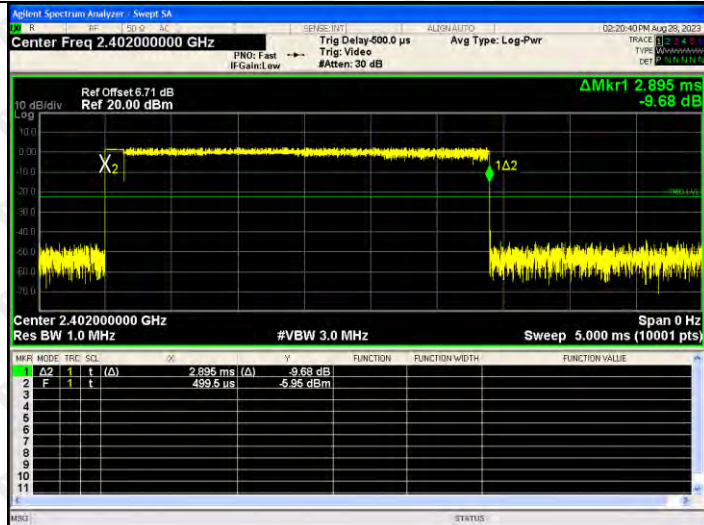

GFSK\_DH5/MCH

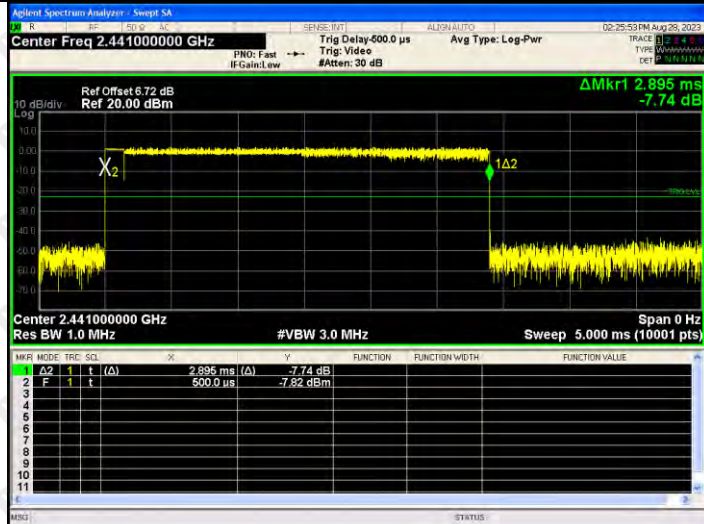

GFSK\_DH5/HCH

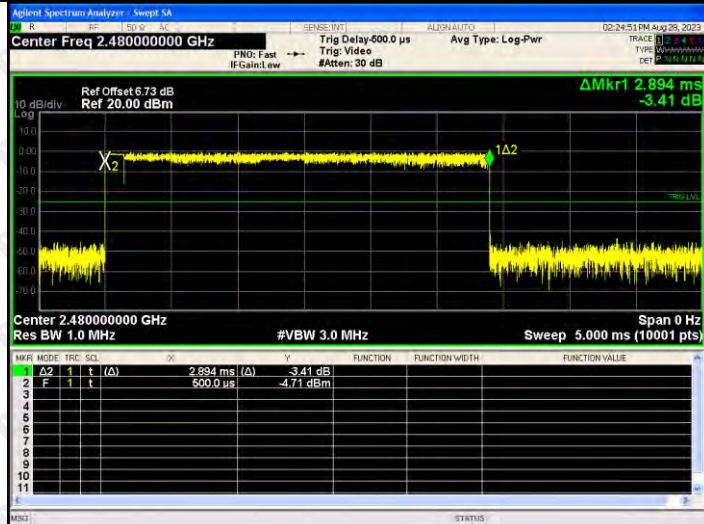

### 14. PSEUDORANDOM FREQUENCY

#### 14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


#### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

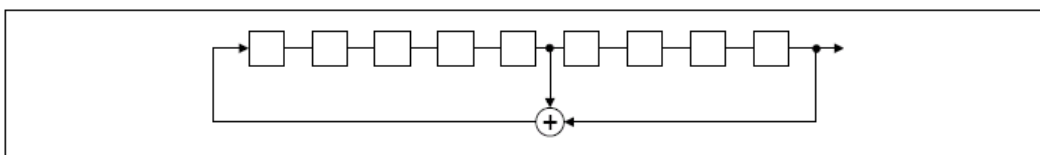

An example of Pseudorandom Frequency Hopping Sequence as follow:

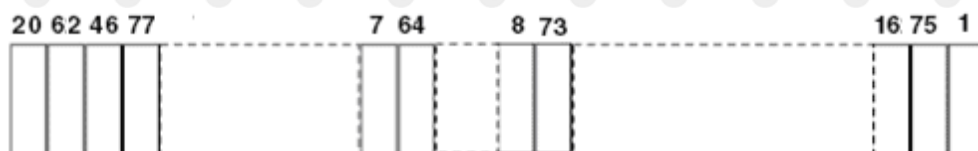

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

## 15. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is Internal antenna. The best case gain of the antenna is 1.48dBi.




**16. EUT TEST SETUP PHOTOGRAPHS**

Radiated Emission

Below 1G



Above 1G

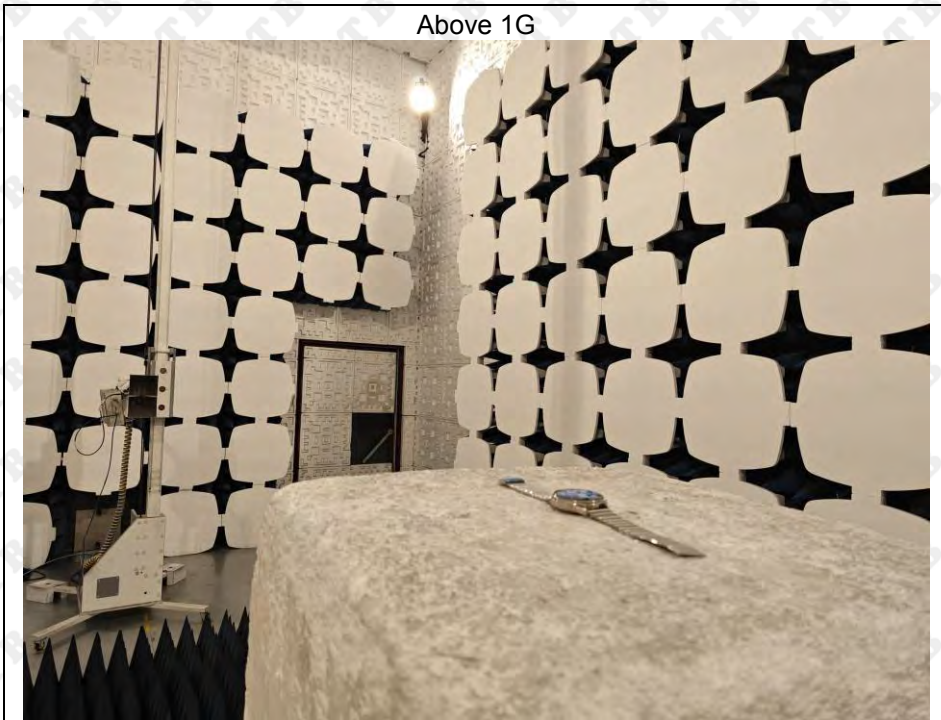

## Conducted emissions



※※※※ END OF REPORT ※※※※