

FCC ID: 2A48S-T1

| | |
|--------------------|---|
| Product Name: | Lighting Power Bank Magnetic wireless |
| Product Model No.: | T1 |
| Transmitting mode | Keep the EUT in continuously wireless charging mode |
| Power supply: | Battery Capacity: 3.85V, 10000mAh, 38.5Wh Type-C Input: 5V---3.0A, 9V---2.0A, 12V---1.5A Type-C Output: 5V---3.0A, 9V---2..22A, 12V---1.67A USB Output: 4.5V---5.0A, 5V---4.5A, 5V---3.0A, 9V---2..22A, 12V---1.67A USB+Type-C+Wireless charger: 5V---3.0A Wireless charger: 5W, 7.5W, 10W, 15W |
| Date of Receipt: | Jul. 31, 2023 |
| Test Date: | Jul. 31, 2023 - Aug. 11, 2023 |
| Date of Report: | Aug. 11, 2023 |

| Test Modes: | |
|--|---|
| Mode1. | Type-C Input+USB Output+Wireless charger Output Mode(Full Load) |
| Mode2. | Type-C Input+USB Output+Wireless charger Output Mode(Half Load) |
| Mode3. | Type-C Input+USB Output+Wireless charger Output Mode(No Load) |
| Mode4. | USB Output+Wireless charger Output Mode(Full Load) |
| Mode5. | USB Output+Wireless charger Output Mode(Half Load) |
| Mode6. | USB Output+Wireless charger Output Mode(No Load) |
| Note: 1. We have evaluated 1%, 50% and 99% battery charging mode, and the worst mode8 (99%) is showed in this report. 2. All modes have been tested, and the report only shows the results of the worst mode4). | |

RF Exposure Evaluation

1 Measuring Standard

KDB 680106 RF Exposure Wireless Charging Apps v03r01

2 Requirements

According to the item 5 of KDB 680106 v03r01:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

| | |
|--|--|
| (1) Power transfer frequency is less than 1MHz. | Yes; the device operate in the frequency range from 115 KHz to 205 KHz |
| (2) Output power from each primary coil is less than or equal to 15 watts. | Yes; the maximum output power of the primary coil is 15W. |
| (3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time. | Yes; the transfer system includes only one primary coils. |
| (4) Client device is placed directly in contact with the transmitter. | Yes; Client device is placed directly in contact with the transmitter. |
| (5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion). | No, portable exposure conditions only. |
| (6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away | No, Distance from 0 to 20cm, see test result in item 6. |

from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

Remark: Meet all the above requirements.

Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|--|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0-30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | / | / | f/300 | 6 |
| 1500-100,000 | / | / | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

F=frequency in MHz
 * =Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

3 Test Setup

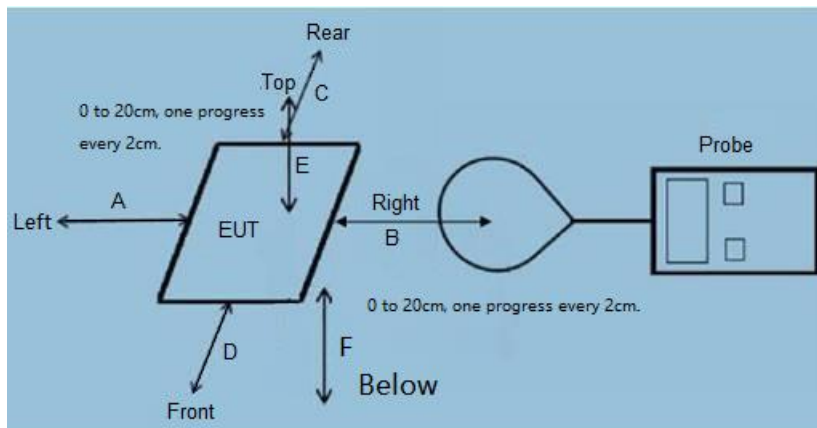

4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (0 cm to 20 cm from all sides) which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 v03r01.

Remark: The EUT's test position A, B, C, D, E, F is valid for the E and H field measurements.

5 Description of Support Units

| | |
|---|--|
| Adapter (Provide by test lab): Manufacturer: XIAOMI Model: AD65G I/P: AC 100-240V 50/60Hz O/P: DC 5V/3A, DC 9V/3A, DC 10V/5A, DC 12V/3A, DC 15V/3A, DC 20V/3.25A | Mobile phone (Provide by test lab): Manufacturer: SAMSUNG Model: Galaxy S21 5G |
|---|--|

6 Test Instruments list

| Test Equipment | Manufacturer | Model No. | SN. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
|--|--------------|------------------------------|--------|------------------------|----------------------------|
| Exposure Level Tester | Narda | ELT-400 | N-0231 | June. 24 2023 | June. 25 2024 |
| Magnetic field probe 100cm ² | Narda | ELT probe 100cm ² | M0675 | June. 24 2023 | June. 25 2024 |
| Field Probe | ETS | HI-6105 | / | June. 24 2023 | June. 25 2024 |
| Laser Data Interface | ETS | HI-6113 | / | June. 24 2023 | June. 25 2024 |

7 Test Uncertainty

E-Filed Strength : $\pm 0.08\text{V/m}$

H-Filed Strength : $\pm 0.02\text{A/m}$

8 Test Result

H-Filed Strength at the edges surrounding the EUT (A/m)

Frequency Range 0.115-0.205 (MHz)


| Test Position | Distance (cm) | | | | | | | | | | | Unit (ut) |
|---------------|---------------|------|------|------|------|------|------|------|------|------|------|-----------|
| | 0 | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | |
| Left A | 0.86 | 0.96 | 0.74 | 0.87 | 0.82 | 0.89 | 0.74 | 0.63 | 0.74 | 0.76 | 0.93 | |
| Right B | 0.75 | 0.85 | 0.63 | 0.68 | 0.74 | 0.74 | 0.63 | 0.75 | 0.63 | 0.64 | 0.75 | |
| Rear C | 0.66 | 0.67 | 0.84 | 0.75 | 0.86 | 0.96 | 0.98 | 0.84 | 0.78 | 0.73 | 0.66 | |
| Front D | 0.58 | 0.48 | 0.76 | 0.88 | 0.75 | 0.76 | 0.75 | 0.63 | 0.84 | 0.64 | 0.88 | |
| Top E | 0.69 | 0.61 | 0.69 | 0.96 | 0.88 | 0.68 | 0.66 | 0.78 | 0.76 | 0.66 | 0.65 | |
| Below F | 0.74 | 0.85 | 0.77 | 0.77 | 0.69 | 0.69 | 0.78 | 0.85 | 0.68 | 0.87 | 0.64 | |

| Test Position | Distance (cm) | | | | | | | | | | | Limits (A/m) | Result |
|---------------|---------------|------|------|------|------|------|------|------|------|------|------|--------------|--------|
| | 0 | 2 | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | | |
| Left A | 1.15 | 1.15 | 1.16 | 1.13 | 1.16 | 1.16 | 1.09 | 1.09 | 1.03 | 1.06 | 1.05 | 1.63 | Pass |
| Right B | 1.33 | 1.29 | 1.18 | 1.15 | 1.14 | 1.18 | 1.08 | 1.14 | 1.08 | 1.07 | 1.06 | | Pass |
| Rear C | 1.25 | 1.14 | 1.15 | 1.16 | 1.05 | 1.14 | 1.05 | 1.08 | 1.05 | 1.05 | 0.98 | | Pass |
| Front D | 1.14 | 1.13 | 1.16 | 1.17 | 1.13 | 1.19 | 1.06 | 1.06 | 1.14 | 1.06 | 0.96 | | Pass |
| Top E | 1.16 | 1.18 | 1.17 | 1.09 | 1.16 | 1.17 | 1.07 | 1.07 | 1.08 | 1.07 | 0.98 | | Pass |
| Below F | 1.17 | 1.17 | 1.09 | 1.08 | 1.08 | 1.05 | 1.04 | 1.03 | 0.95 | 0.93 | 0.94 | | Pass |


Note: 1A/m=1.26uT

9 Test Set-up Photo


**0cm
Front**

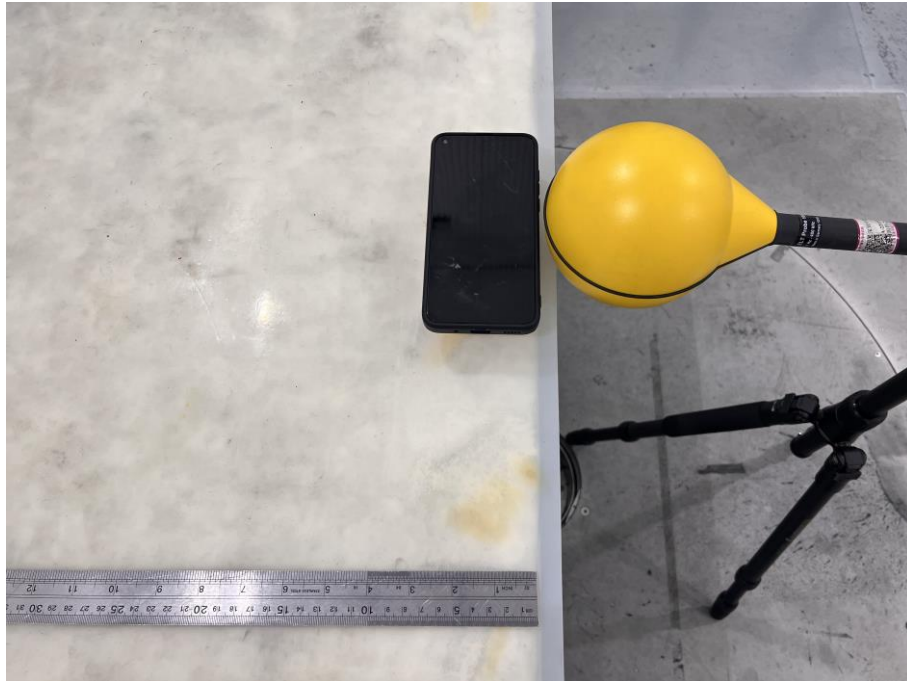

Left

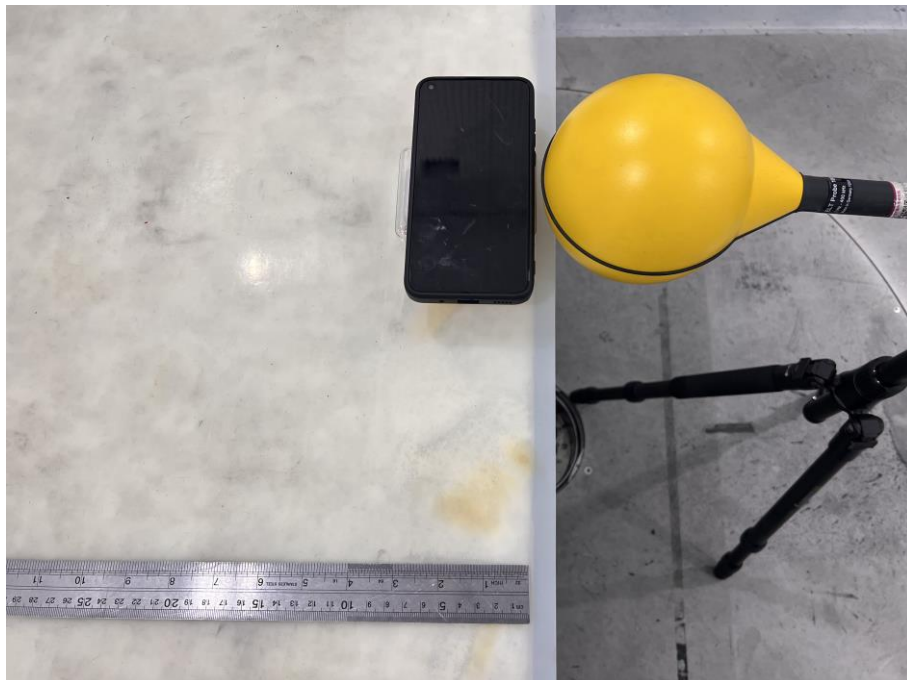

Right

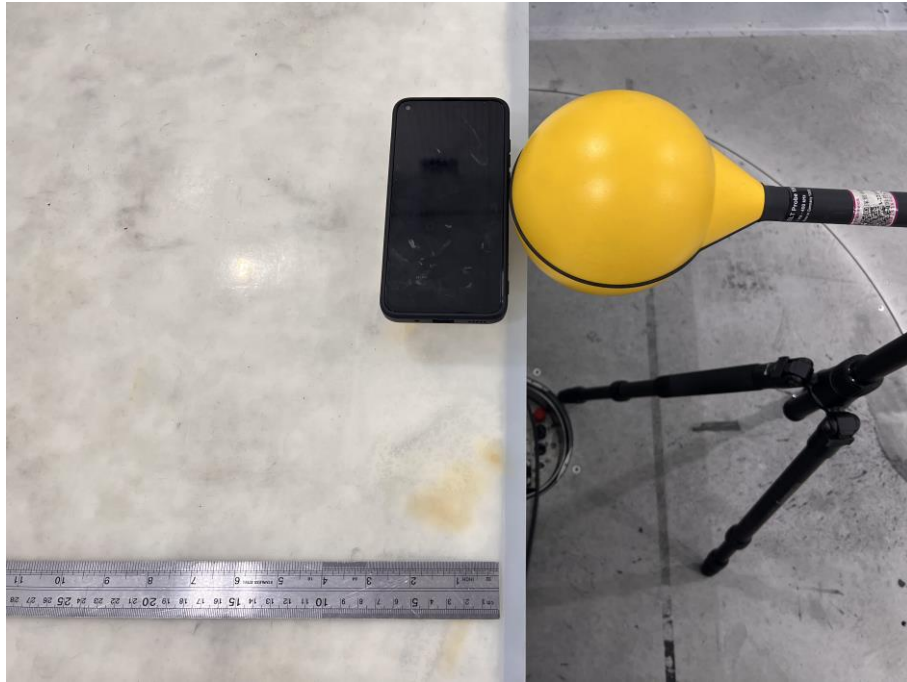


Rear




Top




Below

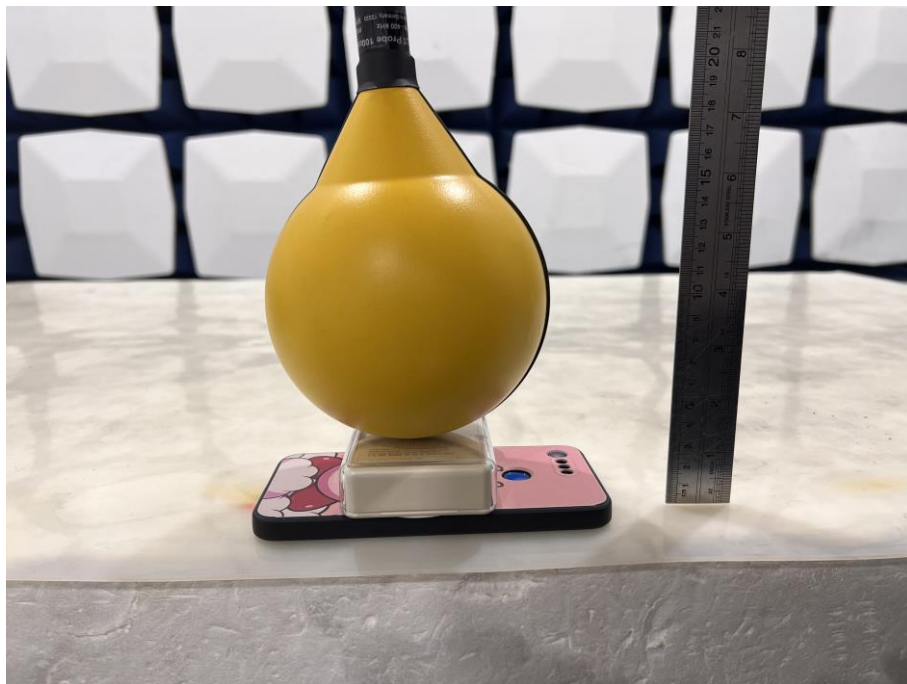

20cm
Left

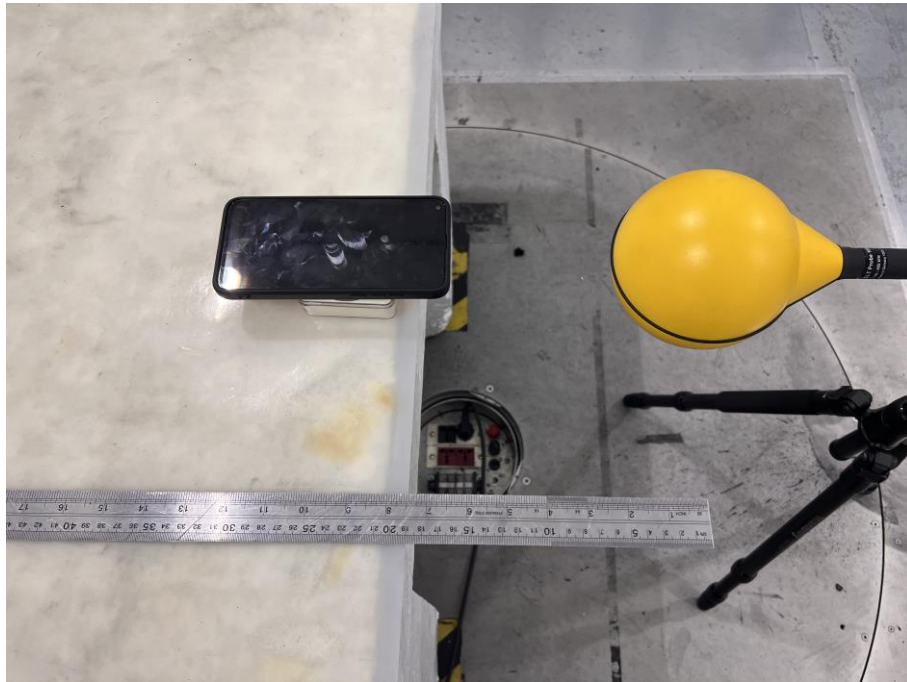


Front

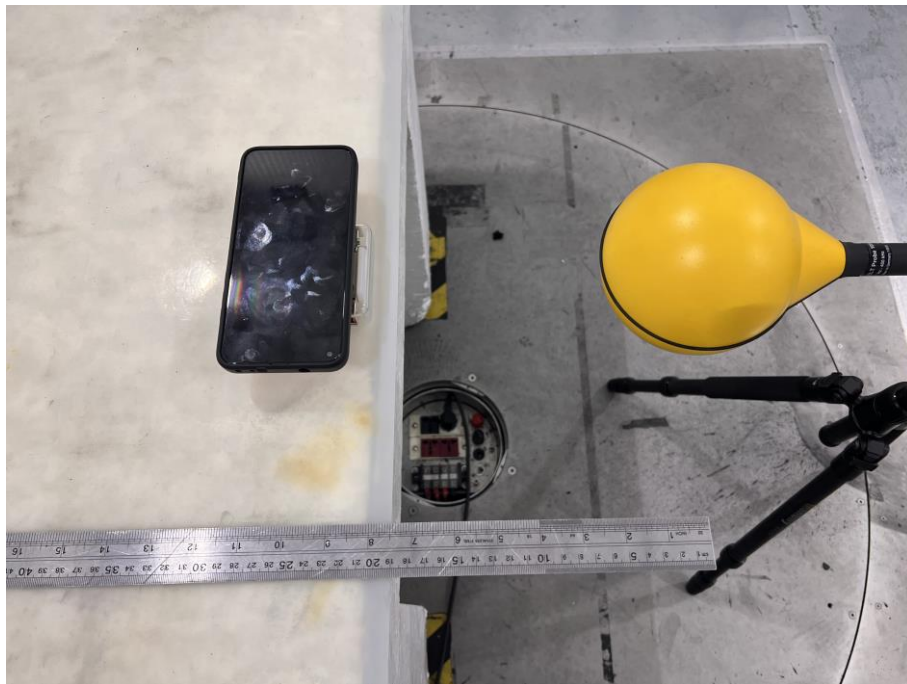

Rear



Right

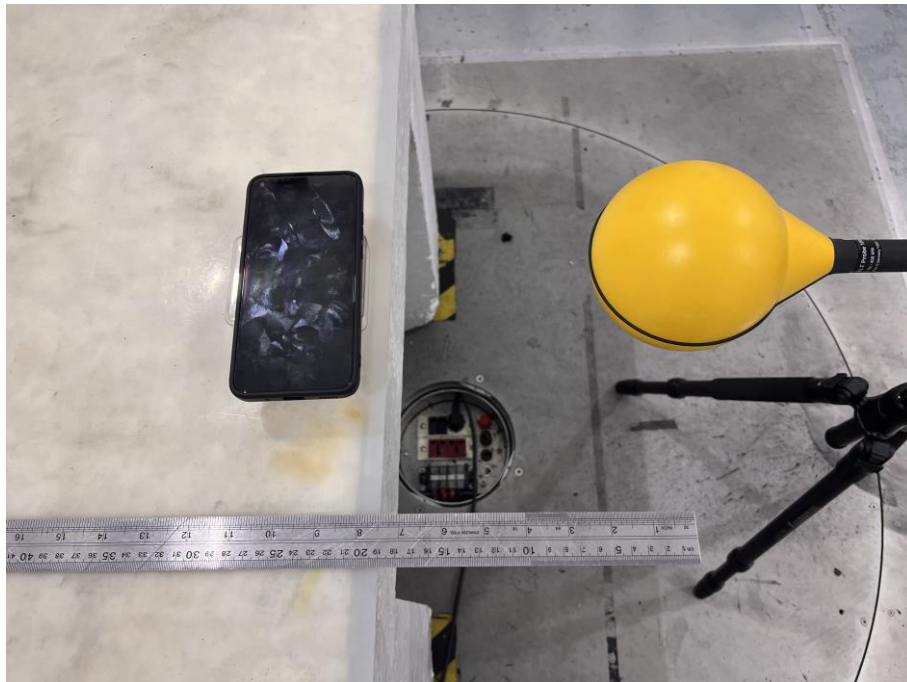

Top



Below

