

FranklinWH Energy Storage Inc

RF TEST REPORT

SCOPE OF WORK:

FCC Part 15.407 RF report

Model:
aGate X

REPORT NUMBER:
230201553SHA-005

ISSUE DATE:
June 15, 2023

DOCUMENT CONTROL NUMBER:
TTRFFCCDFS-01_V1 © 2018 Intertek





Total Quality. Assured.

TEST REPORT

Intertek Testing Services Shanghai
Building No.86, 1198 Qinzhou Road (North)
Caohejing Development Zone
Shanghai 200233, China

Telephone: 86 21 6127 8200

www.intertek.com

Report no.: 230201553SHA-005

Applicant: FranklinWH Energy Storage Inc
1731 Technology Dr., Suite 530, San Jose, CA 95110, USA

Manufacturer: FranklinWH Technologies Co., Ltd.
Room 301, Building 5A Skyworth Innovation Park, No.8 Tangtou 1st Road,
Tangtou community Shiyan sub-district , Baoan District, Shenzhen,
Guangdong, China

Product Name: aGate

Type/Model: aGate X

FCC ID: 2A34J-AGATEX01US

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15: Radio Frequency Devices

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02: Compliance Measurement
Procedures for Unlicensed-National Information Infrastructure Devices Operating In The 5250-5350
MHz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection

KDB 905462 D03 NII Clients Without Radar Detection New Rules v01r02: U-NII CLIENT DEVICES
WITHOUT RADAR DETECTION CAPABILITY

PREPARED BY:

Project Engineer
Sky Yang

REVIEWED BY:

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**Contents**

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 RF TECHNICAL INFORMATION	6
1.3 DESCRIPTION OF TEST FACILITY	7
2 TEST SPECIFICATIONS.....	8
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST.....	8
2.3 TEST PERIPHERALS USED	8
2.4 INSTRUMENT LIST	9
2.5 MEASUREMENT UNCERTAINTY	9
3 DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS.....	10
3.1 INTERFERENCE THRESHOLD VALUES	10
3.2 DFS RESPONSE REQUIREMENT VALUES	10
3.3 RADAR TEST WAVEFORMS MINIMUM STEP.....	11
3.4 TEST RESULT.....	11
3.5 LONG PULSE RADAR TEST WAVEFORM	13
3.6 FREQUENCY HOPPING RADAR TEST WAVEFORM	14
3.7 CALIBRATION SETUP.....	15
3.8 RADAR WAVEFORM CALIBRATION PROCEDURE	16
3.9 RADAR WAVEFORM CALIBRATION RESULT	17
4 IN-SERVICE MONITORING FOR CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME AND NON-OCCUPANCY PERIOD.....	18
4.1 CHANNEL MOVE TIME, CHANNEL CLOSING TRANSMISSION TIME	19
4.2 NON-OCCUPANCY PERIOD	20

TEST REPORT**Revision History**

Report No.	Version	Description	Issued Date
230201553SHA-005	Rev. 01	Initial issue of report	June 15, 2023

TEST REPORT**Measurement result summary**

TEST ITEM	FCC CLAUSE	TEST RESULT
Initial Channel Availability Check Time	15.407(h)(2)	NA
Radar Burst at the Beginning of the Channel Availability Check & End of the Channel Availability Check Time	15.407(h)(2)	NA
Channel Move Time, Channel Closing Time	15.407(h)(2)	Pass
Non-occupancy period	15.407(h)(2)	Pass
UNII Detection Bandwidth Measurement	15.407(h)(2)	NA
Statistical Performance Check	15.407(h)(2)	NA

Notes: 1: NA =Not Applicable

2: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT**1 GENERAL INFORMATION****1.1 Description of Equipment Under Test (EUT)**

Product name:	aGate
Type/Model:	aGate X
Description of EUT:	The EUT is an Energy storage control system which supports WiFi (802.11a/g mode), BLE and LTE function.
Rating:	120/208VAC; 120V/240VAC
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Product Marketing Name:	aGate
HVIN:	aGate X
Sample No:	S202302211111-ZJA01/2
Sample received date:	February 21, 2023
Date of test:	March 9, 2023

1.2 RF Technical Information

Specification Items	Description
Protocol	802.11a
Modulation	BPSK, QPSK, 16QAM, 64QAM, 256QAM
Channel Frequency	5250-5350MHz; 5470-5725MHz
Channel Bandwidth	20MHz
Max. EIRP Power	<input checked="" type="checkbox"/> < 200mW <input type="checkbox"/> ≥ 200mW
Operating Mode	<input type="checkbox"/> Master <input checked="" type="checkbox"/> Client without Radar Detection <input type="checkbox"/> Client with Radar Detection
Manufacturer Statement	Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms are not available to the end user.

TEST REPORT**1.3 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

Subcontractor

Name:	Shenzhen UnionTrust Quality and Technology Co., Ltd.
Address:	Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109
Telephone:	+86 (0) 755 2823 0888
Telefax:	+86 (0) 755 2823 0886

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L9069
	FCC Accredited Lab Designation Number: CN1194
	IC Registration Lab CAB identifier.: CN0032
	A2LA Accreditation Lab Certificate Number: 4312.01

TEST REPORT**2 TEST SPECIFICATIONS****2.1 Standards or specification**

47CFR Part 15 (2018): Radio Frequency Devices

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02: Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating In The 5250-5350 MHz and 5470-5725 MHz Bands Incorporating Dynamic Frequency Selection

KDB 905462 D03 NII Clients Without Radar Detection New Rules v01r02: U-NII CLIENT DEVICES WITHOUT RADAR DETECTION CAPABILITY

2.2 Mode of operation during the test

Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test if necessary.

2.3 Test peripherals used

Item No	Description	Manufacturer	Model No.	Note
1	Laptop computer	Lenovo	E450	SL10G10780
2	Wireless Home Router	SAGEMCOM	FAST5280	FCC ID: VW3FAST5280

TEST REPORT

2.4 Instrument list

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	15-Apr-2022	14-Apr-2023
<input type="checkbox"/>	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	3-Nov-2022	2-Nov-2023
<input type="checkbox"/>	EXG-B RF Analog Signal Generator	KEYSIGHT	N5171B	MY53051777	1-Nov-2022	31-Oct-2023
<input checked="" type="checkbox"/>	MXG Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	1-Nov-2022	31-Oct-2023

2.5 Measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	±4.7 dB
4	Radiated emission 30MHz-1GHz	±4.6 dB
5	Radiated emission 1GHz-18GHz	±4.4 dB
6	Radiated emission 18GHz-40GHz	±4.6 dB
8	Radio frequency	5.6 GHz: ±6.4x10 ⁻⁸
9	Occupied Channel Bandwidth	± 1.86 %
10	RF output power, conducted	± 0.68 dB
11	Power Spectral Density	± 0.6 dB
12	Spurious emissions, conducted	± 2.7 dB
13	Time	± 0.19 %

TEST REPORT

3 DFS Detection Thresholds and Radar Test Waveforms

Test result: Pass

3.1 Interference Threshold values

Maximum Transmit Power	Value (see note)
≥ 200 mW	-64 dBm
< 200 mW	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

3.2 DFS Response requirement values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

TEST REPORT
3.3 Radar Test Waveforms Minimum Step

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

3.4 Test Result

Radar Type	Pulse Width (μs)	PRI (μs)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1a		15 unique PRI values randomly selected from the list of 23 PRI values in Note 2			
1b	1	15 unique PRI values randomly selected within the range of 518-3066μsec, with a minimum increment of 1 μsec, excluding PRI values selected in radar type 1a	Roundup $\{(1/360)*(19*10^6/\text{PRI})\}$	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

TEST REPORT
Note 2: Pulse Repetition Intervals Values for Radar Type 1a

Pulse Repetition Frequency No	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (us)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

For example, if in Short Pulse Radar Type 1 Test B a PRI of 3066us is selected, the number of pulses would be

$$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{3066} \right) \right\} = \text{Roundup} \{17.2\} = 18.$$

TEST REPORT
3.5 Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μs)	PRI (μs)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst_Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst_Count*. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen randomly.

TEST REPORT

A representative example of a Long Pulse Radar Type waveform:

- 1) The total test waveform length is 12 seconds.
- 2) Eight (8) *Bursts* are randomly generated for the *Burst_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).



3.6 Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μs)	PRI (μs)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

Note: If a segment does not contain at least 1 frequency within the U-NII Detection Bandwidth of the UUT, then that segment is not used.

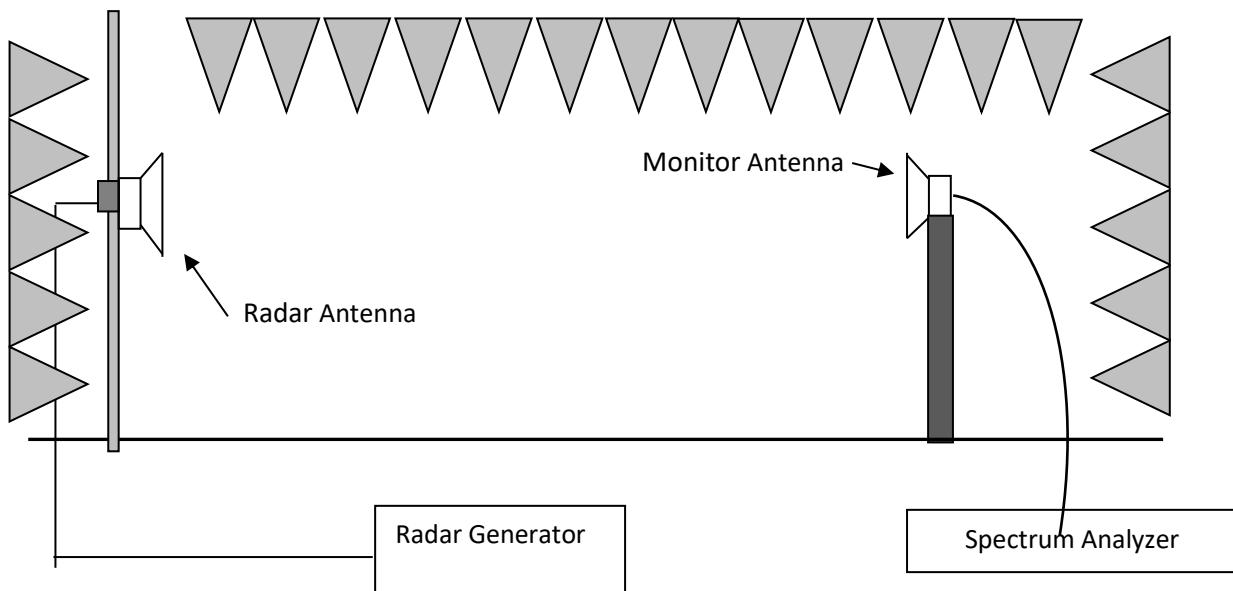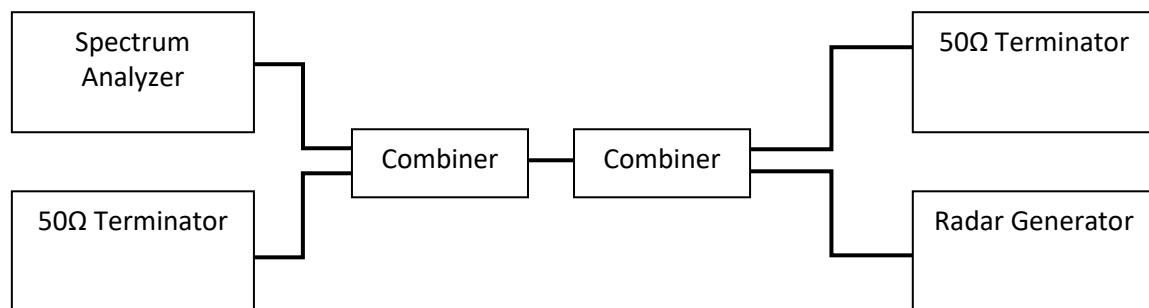TEST REPORT**3.7 Calibration Setup** Radiated Method Conducted Method

TEST REPORT**3.8 Radar Waveform Calibration Procedure**

The Interference Radar Detection Threshold Level is -64dBm or -62dBm + 0 [dBi] + 1 dB that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was -64dBm or -62dBm + 0 [dBi] + 1 dB. Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.


Central Frequency of Calibration:

Bandwidth 20MHz: 5300 MHz, 5500MHz


TEST REPORT

3.9 Radar Waveform Calibration Result

5300MHz, Radar 0

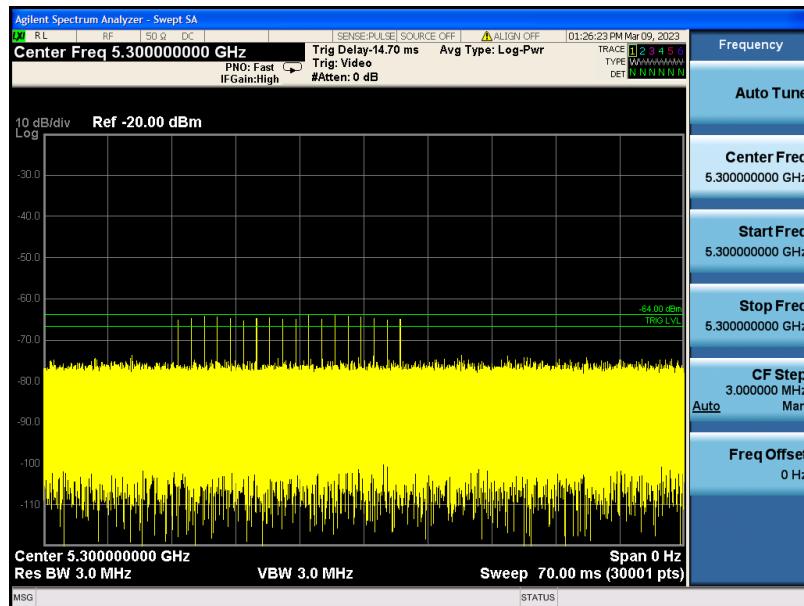

5500MHz, Radar 0

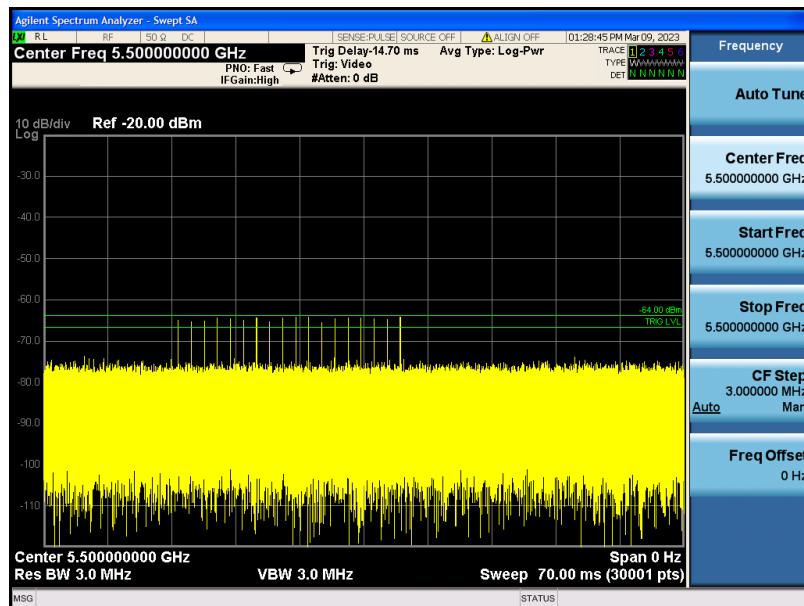

TEST REPORT

4 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period

These tests define how the following DFS parameters are verified during In-Service Monitoring; Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.

The steps below define the procedure to determine the above mention parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5530MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.


At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -63dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing Transmission Time results to the limits defined in the DFS Response requirement values table.

Type 0 radar was used for these tests.

TEST REPORT
4.1 Channel Move Time, Channel Closing Transmission Time

5300MHz

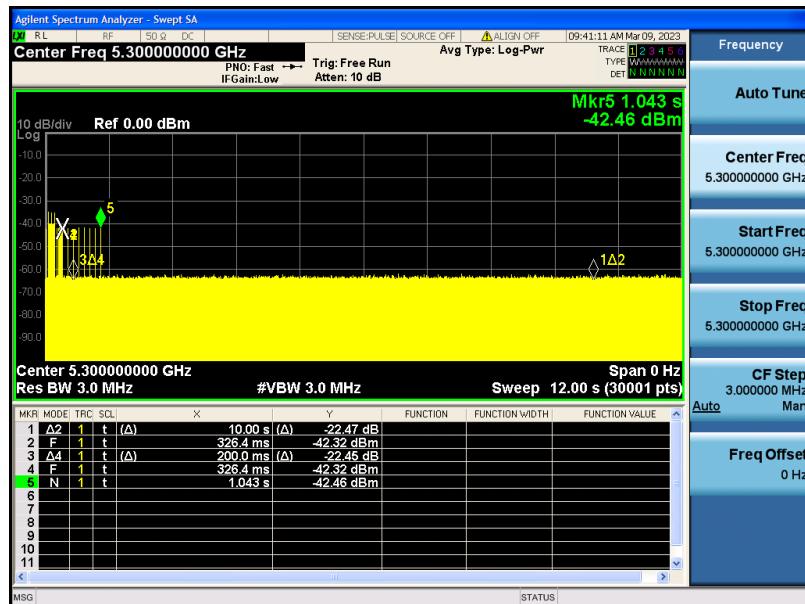

5500MHz



Test Item	Limit	Results
Channel Move Time	10 s	Pass
Channel Closing Transmission Time	200ms + an aggregate of 60ms over remaining 10 second period.	Pass

TEST REPORT
4.2 Non-Occupancy Period

5300MHz



5500MHz



Test Item	Limit	Results
Non-Occupancy Period	30 minutes	Pass

***** END *****