

TEST REPORT

Product Name: White Noise Sound Machine Alarm Clock
FCC ID: 2BCUW-YF01
Trademark: N/A
Model Number: YF-01
Prepared For: Shenzhen Tingrui Technology Co., Ltd
Address: A808, Jieshun Technology Center, No. 5, Guansheng Second Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen, China
Manufacturer: Shenzhen Tingrui Technology Co., Ltd
Address: A808, Jieshun Technology Center, No. 5, Guansheng Second Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 26, 2024
Sample tested Date: Mar. 26, 2024 to Apr. 01, 2024
Issue Date: Apr. 01, 2024
Report No.: CTB240401042RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

	Page
Test Report Declaration	
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup	26
8.2 Limit	26
8.3 Test procedure	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup	47
12.2 Limit	47
12.3 Test procedure	47
12.4 Test Result	47

13. DWELL TIME	49
13.1 Block Diagram Of Test Setup	49
13.2 Limit	49
13.3 Test procedure	49
13.4 Test Result	50
14. PSEUDORANDOM FREQUENCY	54
14.1 Limit	54
14.2 Test procedure	54
14.3 Test Result	55
15. ANTENNA REQUIREMENT	56
16. EUT TEST SETUP PHOTOGRAPHS	57

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240401042RFX	Apr. 01, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): YF-01
 Model Description: N/A
 Bluetooth Version: Bluetooth 5.0
 Hardware Version: V1.0
 Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz
 Max. RF output power: Bluetooth: 2.885dBm
 Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
 Antenna installation: Bluetooth: PCB antenna
 Antenna Gain: Bluetooth: -0.68dBi
 Ratings: DC 5V charging from adapter
 DC 3V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

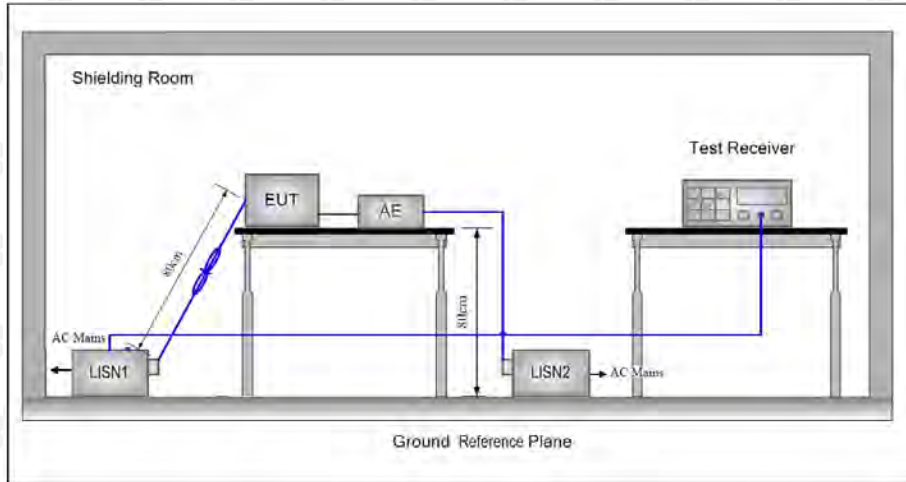

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

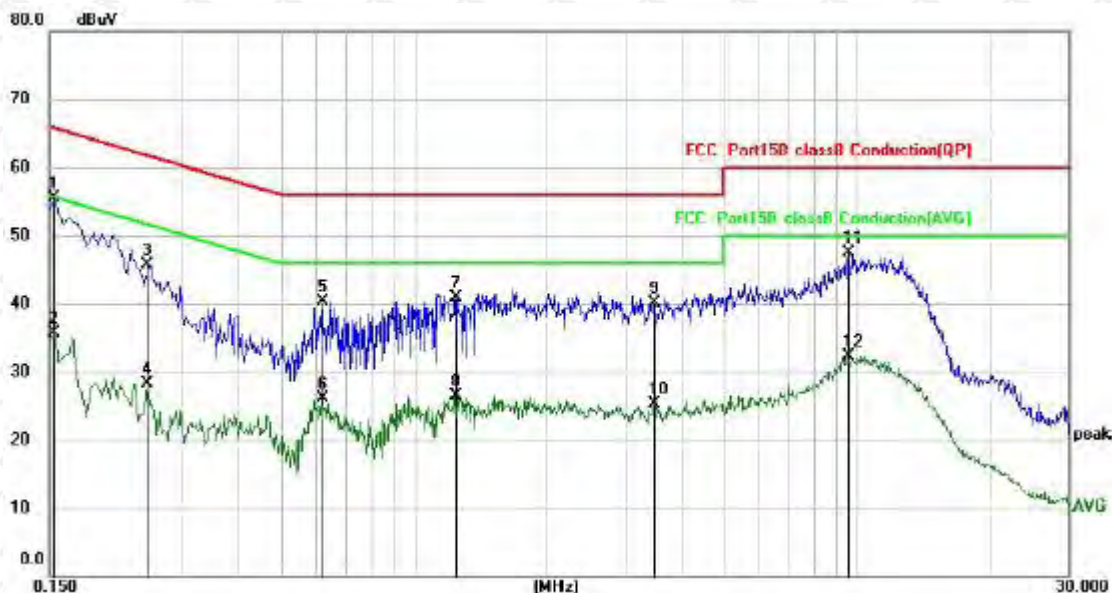


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	45.54	9.95	55.49	65.79	-10.30	QP
2		0.1539	25.75	9.95	35.70	55.79	-20.09	AVG
3		0.2500	35.77	9.96	45.73	61.76	-16.03	QP
4		0.2500	18.38	9.96	28.34	51.76	-23.42	AVG
5		0.6180	30.37	10.01	40.38	56.00	-15.62	QP
6		0.6180	16.02	10.01	26.03	46.00	-19.97	AVG
7		1.2380	30.95	10.03	40.98	56.00	-15.02	QP
8		1.2380	16.50	10.03	26.53	46.00	-19.47	AVG
9		3.4780	29.86	10.23	40.09	56.00	-15.91	QP
10		3.4780	15.15	10.23	25.38	46.00	-20.62	AVG
11		9.5620	36.96	10.57	47.53	60.00	-12.47	QP
12		9.5620	21.82	10.57	32.39	50.00	-17.61	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

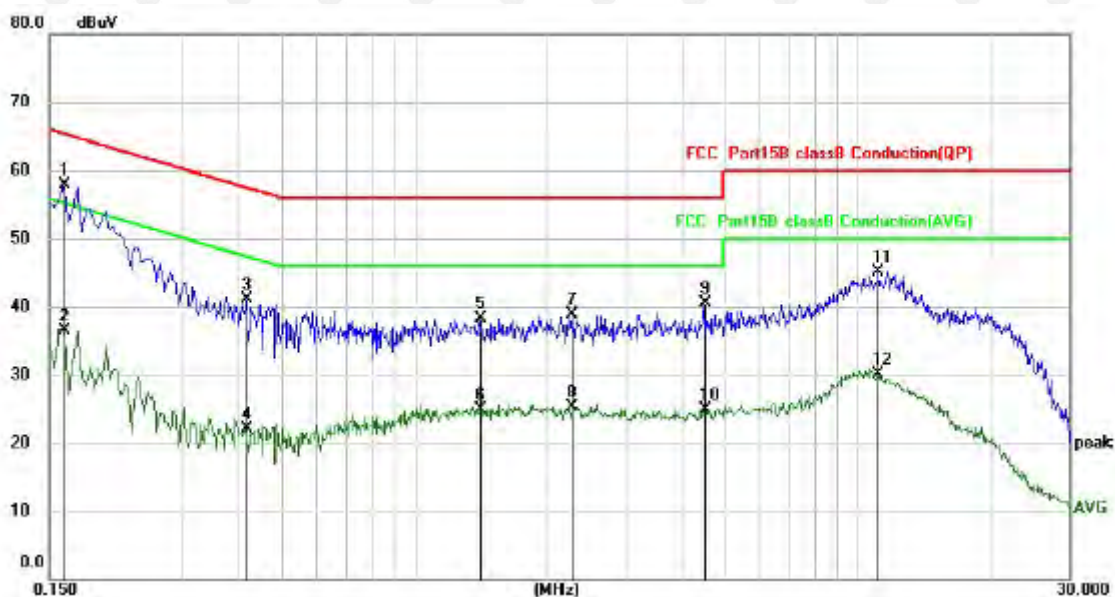

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1620	47.92	9.95	57.87	65.36	-7.49	QP
2		0.1620	26.52	9.95	36.47	55.36	-18.89	AVG
3		0.4180	31.15	9.98	41.13	57.49	-16.36	QP
4		0.4180	12.20	9.98	22.18	47.49	-25.31	AVG
5		1.4100	28.34	10.04	38.38	56.00	-17.62	QP
6		1.4100	14.96	10.04	25.00	46.00	-21.00	AVG
7		2.2659	28.71	10.12	38.83	56.00	-17.17	QP
8		2.2659	15.14	10.12	25.26	46.00	-20.74	AVG
9		4.5020	30.23	10.33	40.56	56.00	-15.44	QP
10		4.5020	14.52	10.33	24.85	46.00	-21.15	AVG
11		11.1220	34.43	10.61	45.04	60.00	-14.96	QP
12		11.1220	19.49	10.61	30.10	50.00	-19.90	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

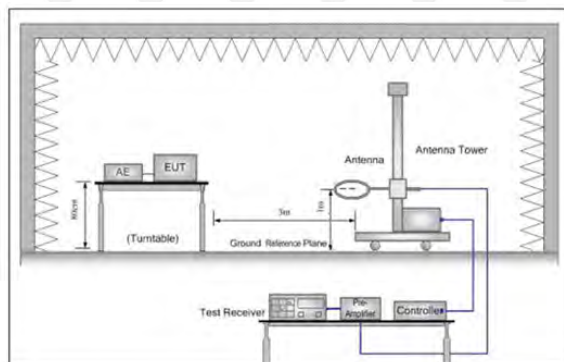


Figure 1. Below 30MHz

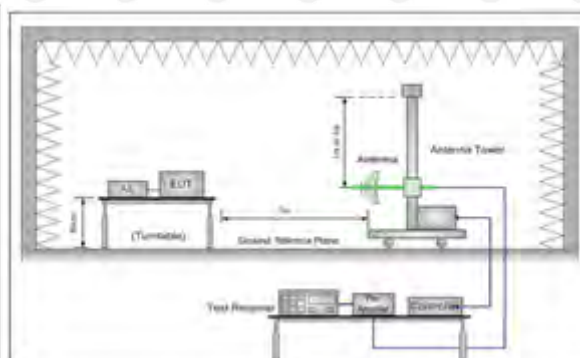


Figure 2. 30MHz to 1GHz

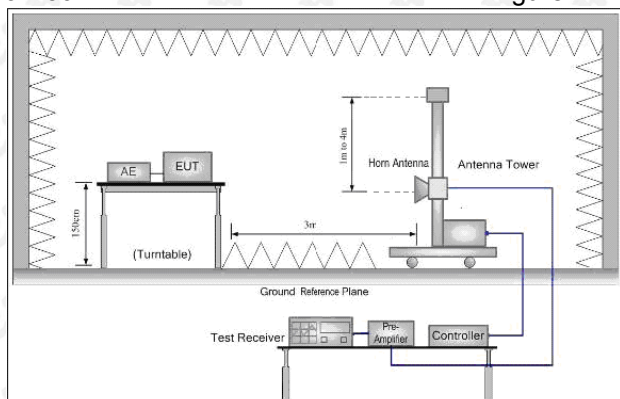


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)

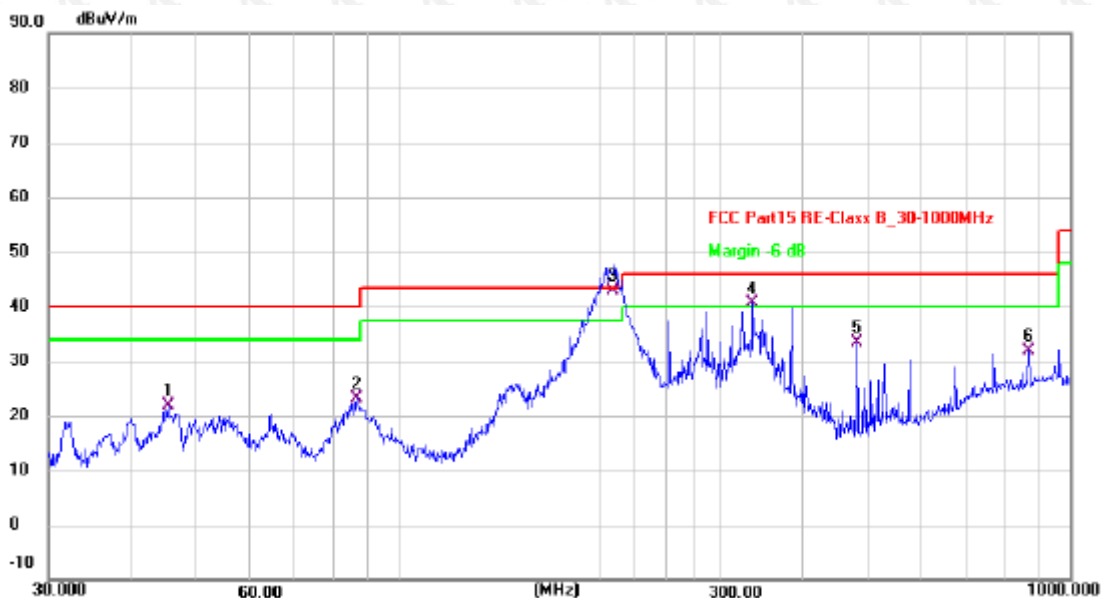

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	45.3754	36.39	-14.53	21.86	40.00	-18.14	QP
2	86.5027	41.53	-18.45	23.08	40.00	-16.92	QP
3 *	208.6079	59.06	-16.21	42.85	43.50	-0.65	QP
4 !	336.0351	53.20	-12.47	40.73	46.00	-5.27	QP
5	480.5276	42.22	-8.90	33.32	46.00	-12.68	QP
6	866.0880	31.32	0.50	31.82	46.00	-14.18	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

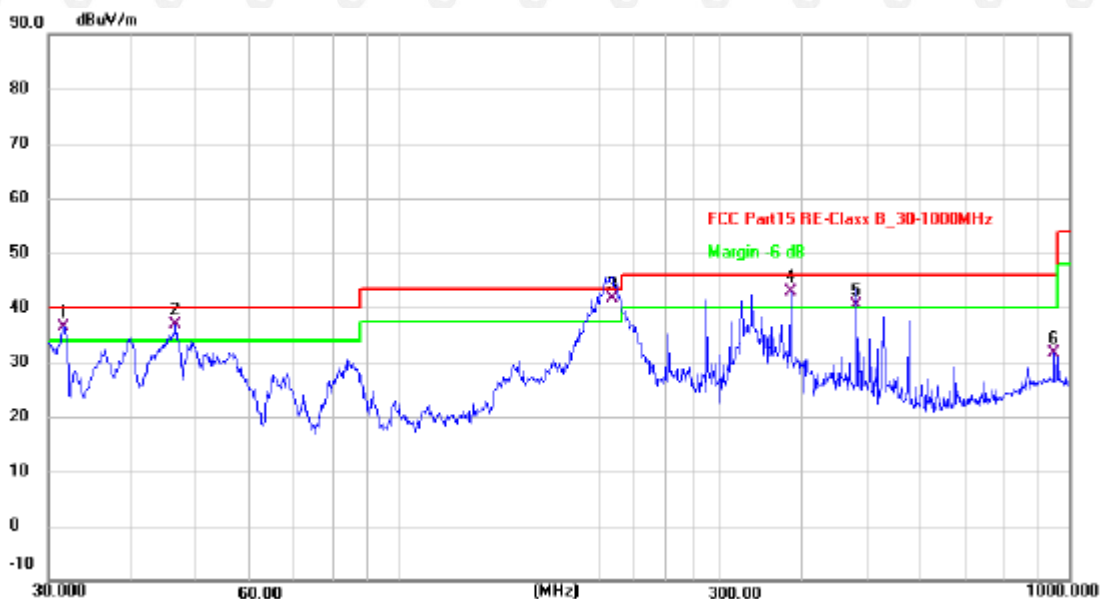

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	31.6202	50.47	-14.06	36.41	40.00	-3.59	QP
2 !	46.5030	51.72	-14.74	36.98	40.00	-3.02	QP
3 *	207.8501	57.81	-16.23	41.58	43.50	-1.92	QP
4 !	383.9318	54.60	-11.75	42.85	46.00	-3.15	QP
5 !	480.5276	49.39	-8.90	40.49	46.00	-5.51	QP
6	948.7610	30.56	1.05	31.61	46.00	-14.39	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804	57.94	-3.65	54.29	74.00	-19.71	peak
4804	49.21	-3.65	45.56	54.00	-8.44	AVG
7206	61.46	-0.95	60.51	74.00	-13.49	peak
7206	42.56	-0.95	41.61	54.00	-12.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804	57.96	-3.65	54.31	74.00	-19.69	peak
4804	50.02	-3.65	46.37	54.00	-7.63	AVG
7206	61.51	-0.95	60.56	74.00	-13.44	peak
7206	41.91	-0.95	40.96	54.00	-13.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.68	-3.54	54.14	74.00	-19.86	peak
4882.00	47.50	-3.54	43.96	54.00	-10.04	AVG
7323.00	55.67	-0.81	54.86	74.00	-19.14	peak
7323.00	43.06	-0.81	42.25	54.00	-11.75	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.57	-3.54	54.03	74.00	-19.97	peak
4882.00	50.62	-3.54	47.08	54.00	-6.92	AVG
7323.00	59.07	-0.81	58.26	74.00	-15.74	peak
7323.00	43.93	-0.81	43.12	54.00	-10.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.04	-3.43	54.61	74.00	-19.39	peak
4960	49.75	-3.44	46.31	54.00	-7.69	AVG
7440	59.69	-0.77	58.92	74.00	-15.08	peak
7440	40.37	-0.77	39.60	54.00	-14.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	57.87	-3.43	54.44	74.00	-19.56	peak
4960	47.96	-3.44	44.52	54.00	-9.48	AVG
7440	60.00	-0.77	59.23	74.00	-14.77	peak
7440	40.97	-0.77	40.20	54.00	-13.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping
 Operation Mode: TX CH Low (2402MHz)
 Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2310.00	58.15	-5.81	52.34	74.00	-21.66	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.33	-5.84	49.49	74.00	-24.51	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
2310.00	56.02	-5.81	50.21	74.00	-23.79	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.02	-5.84	50.18	74.00	-23.82	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.73	-5.81	48.92	74.00	-25.08	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.91	-6.06	48.85	74.00	-25.15	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.72	-5.81	51.91	74.00	-22.09	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.50	-6.06	47.44	74.00	-26.56	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.82	-5.81	49.01	74.00	-24.99	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.39	-5.84	47.55	74.00	-26.45	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.16	-5.81	50.35	74.00	-23.65	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.80	-5.84	47.96	74.00	-26.04	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.78	-5.81	50.97	74.00	-23.03	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.56	-6.06	48.50	74.00	-25.50	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.05	-5.81	49.24	74.00	-24.76	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.41	-6.06	49.35	74.00	-24.65	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

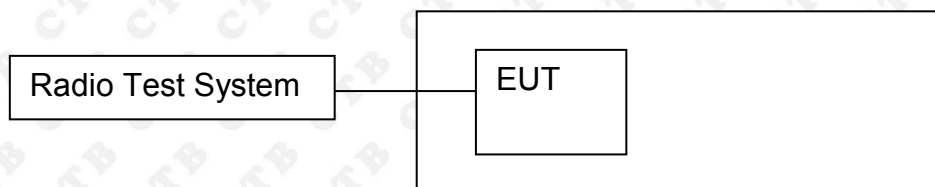

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold

8.4 Test Result

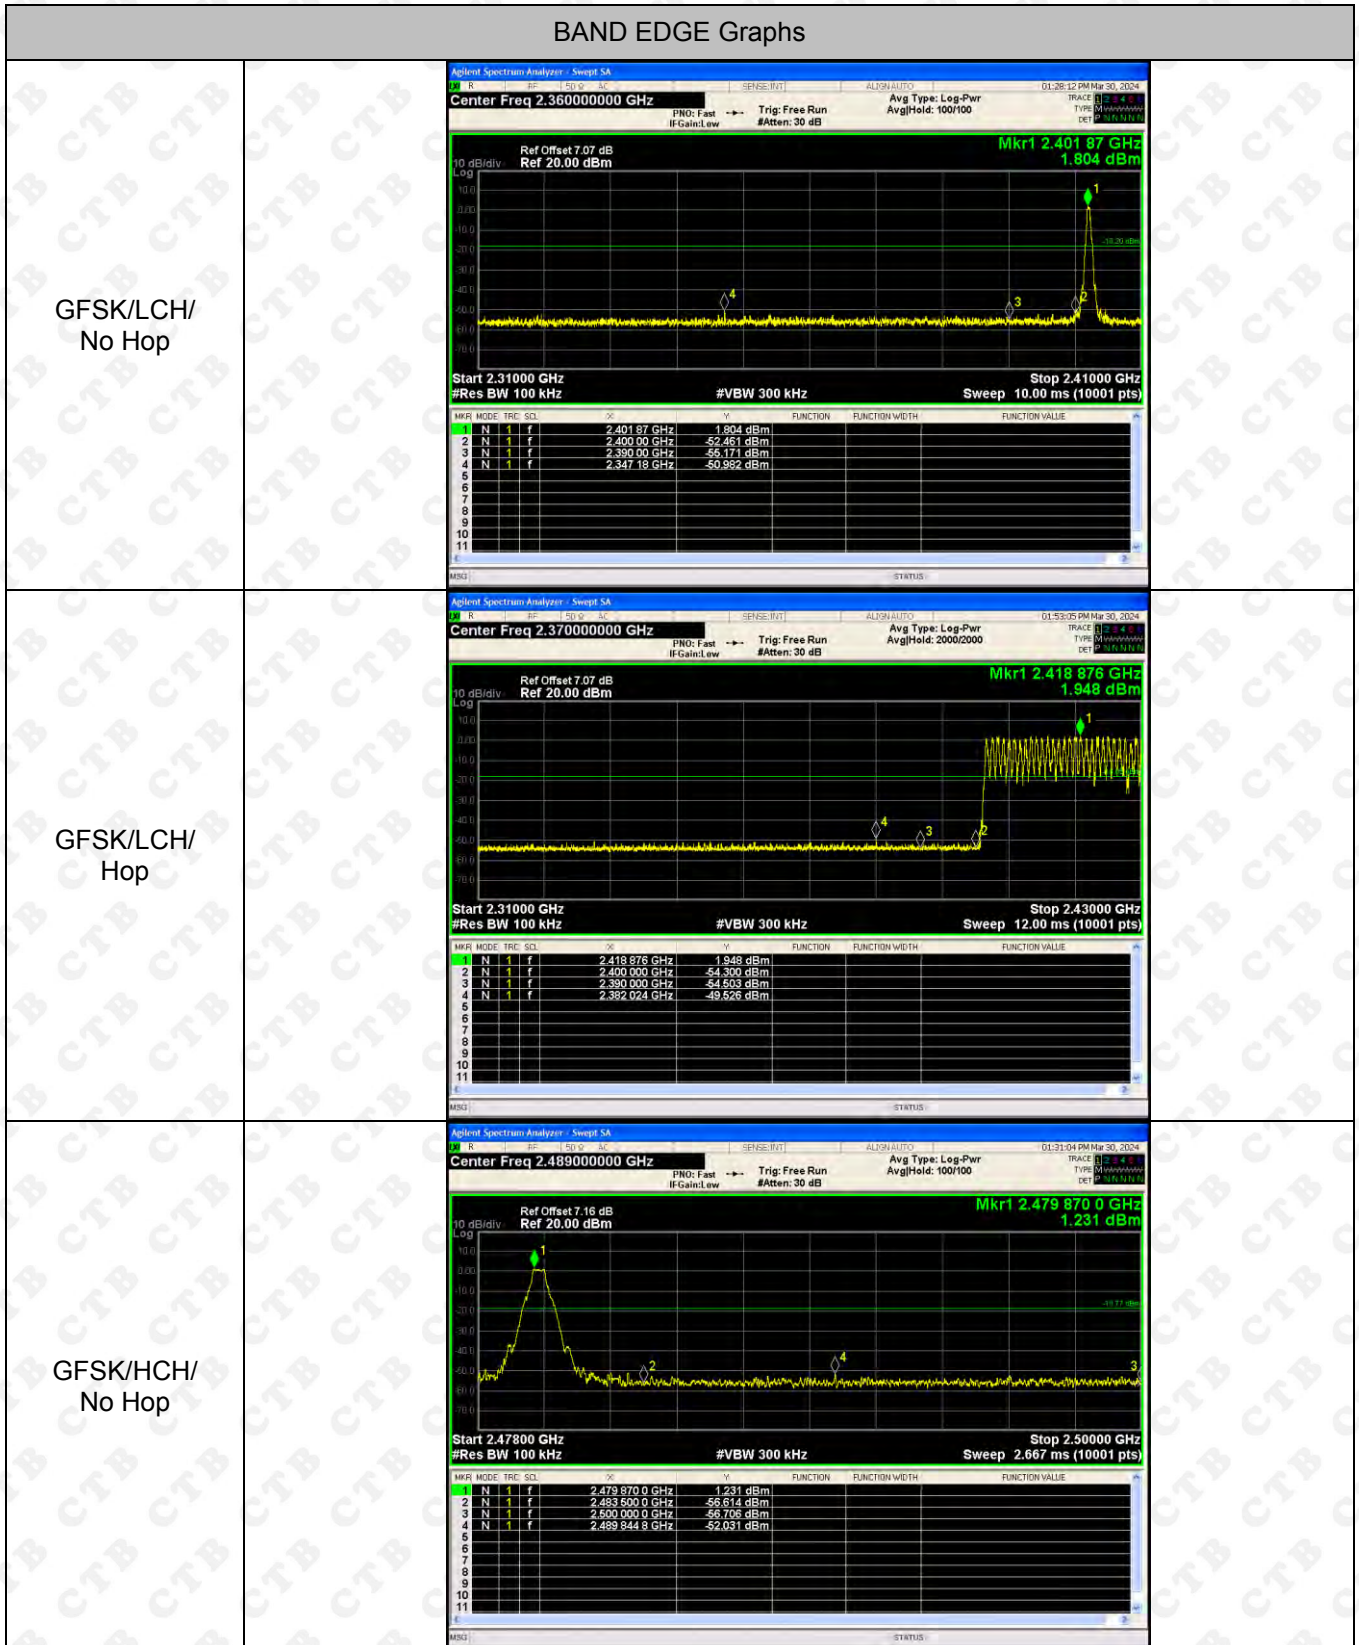


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.438 031 25 GHz 1.744 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.438 031 25 GHz</td> <td>1.744 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-54.165 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 00 GHz</td> <td>-52.688 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.498 075 00 GHz</td> <td>-49.333 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.438 031 25 GHz	1.744 dBm				2	N	1	f	2.483 500 00 GHz	-54.165 dBm				3	N	1	f	2.490 000 00 GHz	-52.688 dBm				4	N	1	f	2.498 075 00 GHz	-49.333 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.438 031 25 GHz	1.744 dBm																																									
2	N	1	f	2.483 500 00 GHz	-54.165 dBm																																									
3	N	1	f	2.490 000 00 GHz	-52.688 dBm																																									
4	N	1	f	2.498 075 00 GHz	-49.333 dBm																																									
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 91 GHz -0.427 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 91 GHz</td> <td>-0.427 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-51.848 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 00 GHz</td> <td>-55.197 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.386 12 GHz</td> <td>-52.421 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 91 GHz	-0.427 dBm				2	N	1	f	2.400 00 GHz	-51.848 dBm				3	N	1	f	2.399 00 GHz	-55.197 dBm				4	N	1	f	2.386 12 GHz	-52.421 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 91 GHz	-0.427 dBm																																									
2	N	1	f	2.400 00 GHz	-51.848 dBm																																									
3	N	1	f	2.399 00 GHz	-55.197 dBm																																									
4	N	1	f	2.386 12 GHz	-52.421 dBm																																									
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.420 016 GHz 1.775 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.420 016 GHz</td> <td>1.775 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-52.232 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-53.240 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.377 858 GHz</td> <td>-50.716 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.420 016 GHz	1.775 dBm				2	N	1	f	2.400 000 GHz	-52.232 dBm				3	N	1	f	2.390 000 GHz	-53.240 dBm				4	N	1	f	2.377 858 GHz	-50.716 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.420 016 GHz	1.775 dBm																																									
2	N	1	f	2.400 000 GHz	-52.232 dBm																																									
3	N	1	f	2.390 000 GHz	-53.240 dBm																																									
4	N	1	f	2.377 858 GHz	-50.716 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 021 8 GHz</td> <td>0.867 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-56.112 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 0 GHz</td> <td>-55.232 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 751 2 GHz</td> <td>-51.080 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 021 8 GHz	0.867 dBm				2	N	1	f	2.483 500 0 GHz	-56.112 dBm				3	N	1	f	2.490 000 0 GHz	-55.232 dBm				4	N	1	f	2.490 751 2 GHz	-51.080 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.480 021 8 GHz	0.867 dBm																																										
2	N	1	f	2.483 500 0 GHz	-56.112 dBm																																										
3	N	1	f	2.490 000 0 GHz	-55.232 dBm																																										
4	N	1	f	2.490 751 2 GHz	-51.080 dBm																																										
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.445 875 00 GHz</td> <td>1.397 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 500 00 GHz</td> <td>-53.688 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 000 00 GHz</td> <td>-52.215 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494 993 75 GHz</td> <td>-50.803 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.445 875 00 GHz	1.397 dBm				2	N	1	f	2.463 500 00 GHz	-53.688 dBm				3	N	1	f	2.480 000 00 GHz	-52.215 dBm				4	N	1	f	2.494 993 75 GHz	-50.803 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.445 875 00 GHz	1.397 dBm																																										
2	N	1	f	2.463 500 00 GHz	-53.688 dBm																																										
3	N	1	f	2.480 000 00 GHz	-52.215 dBm																																										
4	N	1	f	2.494 993 75 GHz	-50.803 dBm																																										
<p>8DPSK/LCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 19 GHz</td> <td>1.695 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-51.661 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-55.636 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.371 32 GHz</td> <td>-51.192 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 19 GHz	1.695 dBm				2	N	1	f	2.400 00 GHz	-51.661 dBm				3	N	1	f	2.390 00 GHz	-55.636 dBm				4	N	1	f	2.371 32 GHz	-51.192 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.402 19 GHz	1.695 dBm																																										
2	N	1	f	2.400 00 GHz	-51.661 dBm																																										
3	N	1	f	2.390 00 GHz	-55.636 dBm																																										
4	N	1	f	2.371 32 GHz	-51.192 dBm																																										


<p>8DPSK /LCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 7.67 dB Ref 20.00 dBm</p> <p>Mkr1 2.427 024 GHz 1.717 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.427 024 GHz</td> <td>1.717 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-54.018 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.350 000 GHz</td> <td>-53.926 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.355 060 GHz</td> <td>-50.820 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.427 024 GHz	1.717 dBm				2	N	1	f	2.400 000 GHz	-54.018 dBm				3	N	1	f	2.350 000 GHz	-53.926 dBm				4	N	1	f	2.355 060 GHz	-50.820 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.427 024 GHz	1.717 dBm																																									
2	N	1	f	2.400 000 GHz	-54.018 dBm																																									
3	N	1	f	2.350 000 GHz	-53.926 dBm																																									
4	N	1	f	2.355 060 GHz	-50.820 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Mkr1 2.479 861 2 GHz 0.456 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 861 2 GHz</td> <td>0.456 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-55.477 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-54.571 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.492 755 4 GHz</td> <td>-51.315 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 861 2 GHz	0.456 dBm				2	N	1	f	2.483 500 0 GHz	-55.477 dBm				3	N	1	f	2.500 000 0 GHz	-54.571 dBm				4	N	1	f	2.492 755 4 GHz	-51.315 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 861 2 GHz	0.456 dBm																																									
2	N	1	f	2.483 500 0 GHz	-55.477 dBm																																									
3	N	1	f	2.500 000 0 GHz	-54.571 dBm																																									
4	N	1	f	2.492 755 4 GHz	-51.315 dBm																																									
<p>8DPSK /HCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Mkr1 2.445 875 00 GHz 1.452 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.445 875 00 GHz</td> <td>1.452 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-53.798 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-53.693 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.487 297 50 GHz</td> <td>-50.464 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.445 875 00 GHz	1.452 dBm				2	N	1	f	2.483 500 00 GHz	-53.798 dBm				3	N	1	f	2.500 000 00 GHz	-53.693 dBm				4	N	1	f	2.487 297 50 GHz	-50.464 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.445 875 00 GHz	1.452 dBm																																									
2	N	1	f	2.483 500 00 GHz	-53.798 dBm																																									
3	N	1	f	2.500 000 00 GHz	-53.693 dBm																																									
4	N	1	f	2.487 297 50 GHz	-50.464 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH

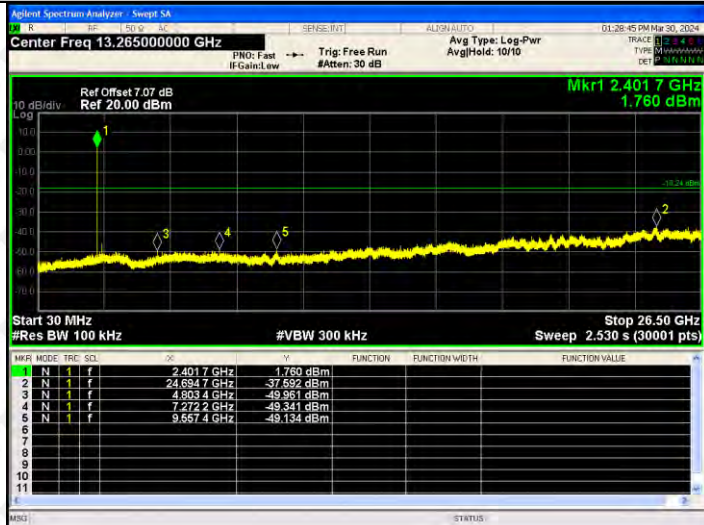

GFSK/MCH

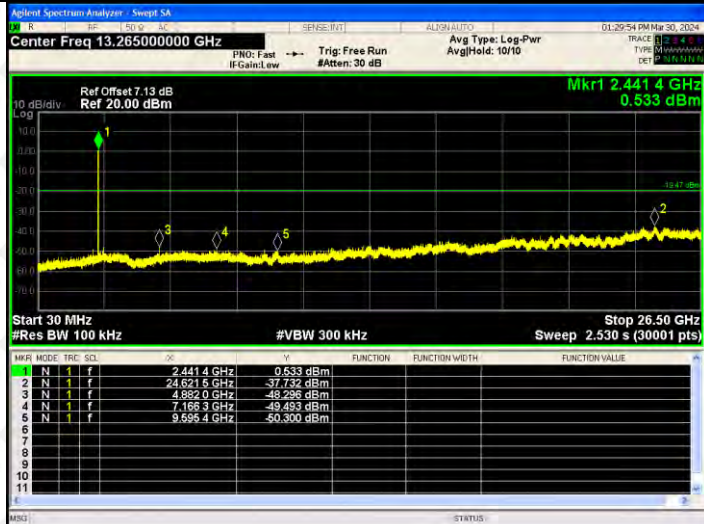

GFSK/HCH

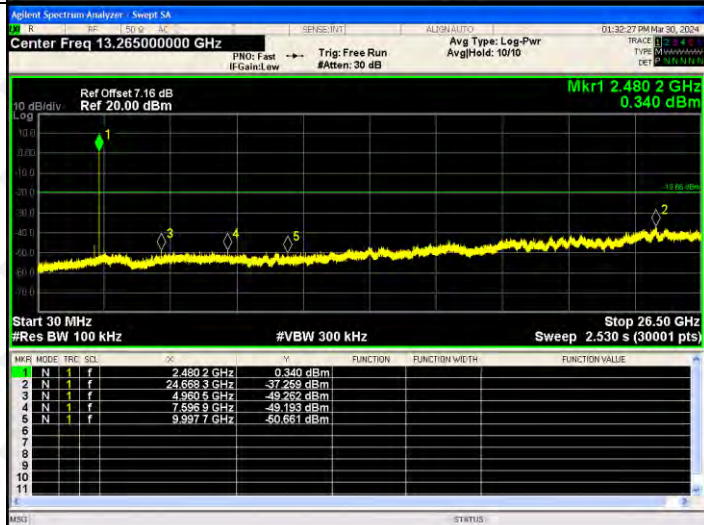


<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>0.603 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6524 GHz</td> <td>-37.434 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9243 GHz</td> <td>-50.299 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1734 GHz</td> <td>-49.815 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.4966 GHz</td> <td>-49.524 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	0.603 dBm				2	N	1	f	24.6524 GHz	-37.434 dBm				3	N	1	f	4.9243 GHz	-50.299 dBm				4	N	1	f	7.1734 GHz	-49.815 dBm				5	N	1	f	9.4966 GHz	-49.524 dBm			
MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	0.603 dBm																																																		
2	N	1	f	24.6524 GHz	-37.434 dBm																																																		
3	N	1	f	4.9243 GHz	-50.299 dBm																																																		
4	N	1	f	7.1734 GHz	-49.815 dBm																																																		
5	N	1	f	9.4966 GHz	-49.524 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>1.194 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.1237 GHz</td> <td>-37.136 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8920 GHz</td> <td>-50.735 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1693 GHz</td> <td>-50.284 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9388 GHz</td> <td>-51.302 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	1.194 dBm				2	N	1	f	25.1237 GHz	-37.136 dBm				3	N	1	f	4.8920 GHz	-50.735 dBm				4	N	1	f	7.1693 GHz	-50.284 dBm				5	N	1	f	9.9388 GHz	-51.302 dBm			
MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	1.194 dBm																																																		
2	N	1	f	25.1237 GHz	-37.136 dBm																																																		
3	N	1	f	4.8920 GHz	-50.735 dBm																																																		
4	N	1	f	7.1693 GHz	-50.284 dBm																																																		
5	N	1	f	9.9388 GHz	-51.302 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-0.891 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6595 GHz</td> <td>-36.734 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9805 GHz</td> <td>-49.929 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.6584 GHz</td> <td>-50.082 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9485 GHz</td> <td>-51.301 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-0.891 dBm				2	N	1	f	24.6595 GHz	-36.734 dBm				3	N	1	f	4.9805 GHz	-49.929 dBm				4	N	1	f	7.6584 GHz	-50.082 dBm				5	N	1	f	9.9485 GHz	-51.301 dBm			
MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-0.891 dBm																																																		
2	N	1	f	24.6595 GHz	-36.734 dBm																																																		
3	N	1	f	4.9805 GHz	-49.929 dBm																																																		
4	N	1	f	7.6584 GHz	-50.082 dBm																																																		
5	N	1	f	9.9485 GHz	-51.301 dBm																																																		

<p>8DPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 7 GHz</td> <td>-2.979 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.275 0 GHz</td> <td>-36.986 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.804 3 GHz</td> <td>-49.943 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.027 8 GHz</td> <td>-49.980 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.658 3 GHz</td> <td>-49.656 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 7 GHz	-2.979 dBm				2	N	1	f	26.275 0 GHz	-36.986 dBm				3	N	1	f	4.804 3 GHz	-49.943 dBm				4	N	1	f	7.027 8 GHz	-49.980 dBm				5	N	1	f	9.658 3 GHz	-49.656 dBm			
MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 7 GHz	-2.979 dBm																																																		
2	N	1	f	26.275 0 GHz	-36.986 dBm																																																		
3	N	1	f	4.804 3 GHz	-49.943 dBm																																																		
4	N	1	f	7.027 8 GHz	-49.980 dBm																																																		
5	N	1	f	9.658 3 GHz	-49.656 dBm																																																		
<p>8DPSK /MCH</p>	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 4 GHz</td> <td>0.525 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.134 1 GHz</td> <td>-37.807 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.889 0 GHz</td> <td>-50.198 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.431 0 GHz</td> <td>-50.001 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.676 1 GHz</td> <td>-51.037 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	0.525 dBm				2	N	1	f	26.134 1 GHz	-37.807 dBm				3	N	1	f	4.889 0 GHz	-50.198 dBm				4	N	1	f	7.431 0 GHz	-50.001 dBm				5	N	1	f	9.676 1 GHz	-51.037 dBm			
MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.441 4 GHz	0.525 dBm																																																		
2	N	1	f	26.134 1 GHz	-37.807 dBm																																																		
3	N	1	f	4.889 0 GHz	-50.198 dBm																																																		
4	N	1	f	7.431 0 GHz	-50.001 dBm																																																		
5	N	1	f	9.676 1 GHz	-51.037 dBm																																																		
<p>8DPSK /HCH</p>	<table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 4 GHz</td> <td>-2.430 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.029 2 GHz</td> <td>-36.630 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.960 5 GHz</td> <td>-48.733 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.403 3 GHz</td> <td>-50.052 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.053 5 GHz</td> <td>-50.887 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 4 GHz	-2.430 dBm				2	N	1	f	26.029 2 GHz	-36.630 dBm				3	N	1	f	4.960 5 GHz	-48.733 dBm				4	N	1	f	7.403 3 GHz	-50.052 dBm				5	N	1	f	10.053 5 GHz	-50.887 dBm			
MkR	MODE	TRIG	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.479 4 GHz	-2.430 dBm																																																		
2	N	1	f	26.029 2 GHz	-36.630 dBm																																																		
3	N	1	f	4.960 5 GHz	-48.733 dBm																																																		
4	N	1	f	7.403 3 GHz	-50.052 dBm																																																		
5	N	1	f	10.053 5 GHz	-50.887 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

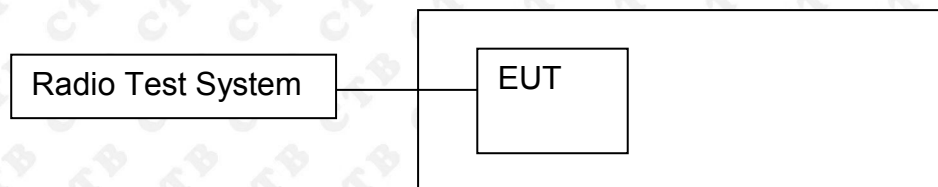

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	1.937	20.97	PASS
	MCH	1.873	20.97	PASS
	HCH	1.339	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	2.591	20.97	PASS
	MCH	2.527	20.97	PASS
	HCH	1.96	20.97	PASS
EDR mode (8DPSK)	LCH	2.885	20.97	PASS
	MCH	2.8	20.97	PASS
	HCH	2.272	20.97	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.40193 GHz 1.937 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.44089 GHz 1.873 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.47978 GHz 1.339 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>Mkr1 2.40188 GHz 2.591 dBm</p> <p>Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44100000 GHz</p> <p>Ref Offset 7.13 dB Ref 20.00 dBm</p> <p>Mkr1 2.44084 GHz 2.527 dBm</p> <p>Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Mkr1 2.48004 GHz 1.960 dBm</p> <p>Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.40200000 GHz Ref Offset: 7.07 dB, Ref: 20.00 dBm Mkr1 2.40192 GHz, 2.885 dBm #Res BW 2.0 MHz, #VBW 6.0 MHz, Span 10.00 MHz, Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.44100000 GHz Ref Offset: 7.13 dB, Ref: 20.00 dBm Mkr1 2.44096 GHz, 2.800 dBm #Res BW 2.0 MHz, #VBW 6.0 MHz, Span 10.00 MHz, Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.48000000 GHz Ref Offset: 7.18 dB, Ref: 20.00 dBm Mkr1 2.47995 GHz, 2.272 dBm #Res BW 2.0 MHz, #VBW 6.0 MHz, Span 10.00 MHz, Sweep 1.000 ms (1001 pts)</p>

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

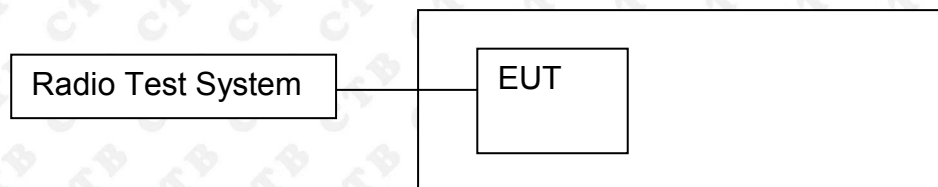

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.854	PASS
	Mid channel	0.877	PASS
	High channel	0.912	PASS
$\pi/4$ DQPSK	Low channel	1.274	PASS
	Mid channel	1.307	PASS
	High channel	1.287	PASS
8DPSK	Low channel	1.294	PASS
	Mid channel	1.295	PASS
	High channel	1.316	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.402444 GHz -20.462 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 815.61 kHz Total Power 8.51 dBm Transmit Freq Error 17.096 kHz OBW Power 99.00 % x dB Bandwidth 853.9 kHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.13 dB Ref 27.13 dBm Mkr3 2.441454 GHz -19.803 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 829.41 kHz Total Power 8.39 dBm Transmit Freq Error 15.612 kHz OBW Power 99.00 % x dB Bandwidth 876.7 kHz x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.16 dB Ref 27.16 dBm Mkr3 2.480469 GHz -22.376 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 845.15 kHz Total Power 7.64 dBm Transmit Freq Error 13.050 kHz OBW Power 99.00 % x dB Bandwidth 911.7 kHz x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Center Freq: 2.402000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.07 dB Ref: 27.07 dBm</p> <p>Mkr3: 2.402658 GHz -19.344 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.21 dBm</td> </tr> <tr> <td>1.1814 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>21.374 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.274 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.21 dBm	1.1814 MHz			Transmit Freq Error	OBW Power	99.00 %	21.374 kHz	x dB	-20.00 dB	x dB Bandwidth			1.274 MHz		
Occupied Bandwidth	Total Power	8.21 dBm																	
1.1814 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
21.374 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.274 MHz																			
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Center Freq: 2.441000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.13 dB Ref: 27.13 dBm</p> <p>Mkr3: 2.441677 GHz -20.685 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.02 dBm</td> </tr> <tr> <td>1.1872 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>23.417 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.307 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.02 dBm	1.1872 MHz			Transmit Freq Error	OBW Power	99.00 %	23.417 kHz	x dB	-20.00 dB	x dB Bandwidth			1.307 MHz		
Occupied Bandwidth	Total Power	8.02 dBm																	
1.1872 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
23.417 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.307 MHz																			
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Center Freq: 2.480000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.16 dB Ref: 27.16 dBm</p> <p>Mkr3: 2.48067 GHz -19.540 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.35 dBm</td> </tr> <tr> <td>1.1957 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>26.911 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.287 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.35 dBm	1.1957 MHz			Transmit Freq Error	OBW Power	99.00 %	26.911 kHz	x dB	-20.00 dB	x dB Bandwidth			1.287 MHz		
Occupied Bandwidth	Total Power	7.35 dBm																	
1.1957 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
26.911 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.287 MHz																			

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.07 dB</p> <p>Ref 27.07 dBm</p> <p>Mkr3 2.402667 GHz</p> <p>-20.109 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1863 MHz</p> <p>Total Power 8.04 dBm</p> <p>Transmit Freq Error 19.483 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.294 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.13 dB</p> <p>Ref 27.13 dBm</p> <p>Mkr3 2.441666 GHz</p> <p>-19.959 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1985 MHz</p> <p>Total Power 8.05 dBm</p> <p>Transmit Freq Error 18.695 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.295 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.16 dB</p> <p>Ref 27.16 dBm</p> <p>Mkr3 2.480678 GHz</p> <p>-21.179 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1984 MHz</p> <p>Total Power 7.62 dBm</p> <p>Transmit Freq Error 19.747 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.316 MHz</p> <p>x dB -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

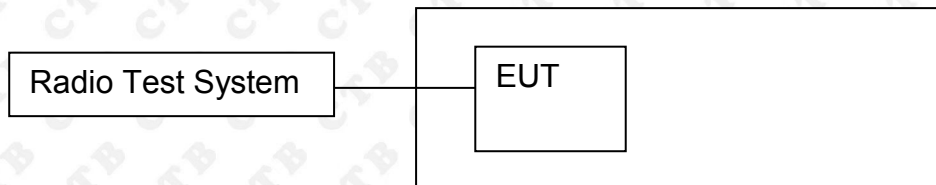

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.996	0.569	PASS
GFSK	MCH	1.002	0.585	PASS
GFSK	HCH	0.994	0.608	PASS
$\pi/4$ DQPSK	LCH	1.002	0.849	PASS
$\pi/4$ DQPSK	MCH	0.994	0.871	PASS
$\pi/4$ DQPSK	HCH	1.008	0.858	PASS
8DPSK	LCH	0.998	0.863	PASS
8DPSK	MCH	0.996	0.863	PASS
8DPSK	HCH	0.994	0.877	PASS

Test Graph

Graphs

GFSK/LCH







GFSK/MCH



GFSK/HCH




<p>$\pi/4$DQPSK/LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>1.002 MHz (Δ)</td> <td></td> <td></td> <td>0.121 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401844 GHz</td> <td></td> <td></td> <td>-6.053 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		1.002 MHz (Δ)			0.121 dB	2	F	1	f		2.401844 GHz			-6.053 dBm	
MNR	MODE	TRC	SCL	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)		1.002 MHz (Δ)			0.121 dB																					
2	F	1	f		2.401844 GHz			-6.053 dBm																					
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>994 kHz (Δ)</td> <td></td> <td></td> <td>0.700 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441012 GHz</td> <td></td> <td></td> <td>-6.178 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		994 kHz (Δ)			0.700 dB	2	F	1	f		2.441012 GHz			-6.178 dBm	
MNR	MODE	TRC	SCL	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)		994 kHz (Δ)			0.700 dB																					
2	F	1	f		2.441012 GHz			-6.178 dBm																					
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>∞</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f (Δ)</td> <td></td> <td>1.008 MHz (Δ)</td> <td></td> <td></td> <td>-0.663 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478840 GHz</td> <td></td> <td></td> <td>-6.400 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f (Δ)		1.008 MHz (Δ)			-0.663 dB	2	F	1	f		2.478840 GHz			-6.400 dBm	
MNR	MODE	TRC	SCL	∞	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f (Δ)		1.008 MHz (Δ)			-0.663 dB																					
2	F	1	f		2.478840 GHz			-6.400 dBm																					
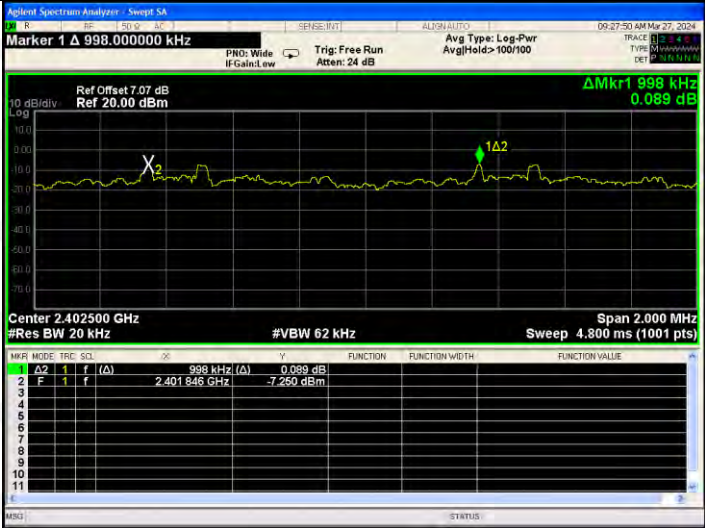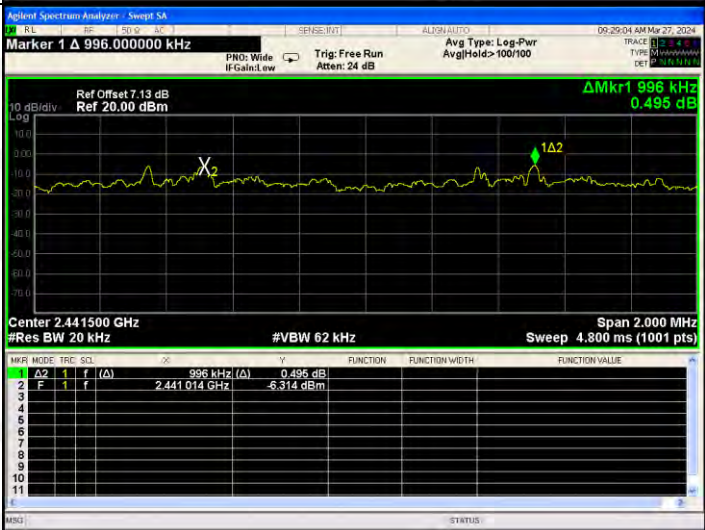
<p>8DPSK/LCH</p>	 <table border="1" data-bbox="592 611 1289 763"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>998 kHz</td> <td>(Δ)</td> <td></td> <td>0.089 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401846 GHz</td> <td></td> <td></td> <td>-7.250 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	998 kHz	(Δ)		0.089 dB	2	F	1	f		2.401846 GHz			-7.250 dBm	
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	998 kHz	(Δ)		0.089 dB																					
2	F	1	f		2.401846 GHz			-7.250 dBm																					
<p>8DPSK /MCH</p>	 <table border="1" data-bbox="592 1137 1289 1290"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>996 kHz</td> <td>(Δ)</td> <td></td> <td>0.495 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441014 GHz</td> <td></td> <td></td> <td>-6.314 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	996 kHz	(Δ)		0.495 dB	2	F	1	f		2.441014 GHz			-6.314 dBm	
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	996 kHz	(Δ)		0.495 dB																					
2	F	1	f		2.441014 GHz			-6.314 dBm																					
<p>8DPSK /HCH</p>	 <table border="1" data-bbox="592 1664 1289 1816"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>994 kHz</td> <td>(Δ)</td> <td></td> <td>-0.189 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479008 GHz</td> <td></td> <td></td> <td>-6.047 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	994 kHz	(Δ)		-0.189 dB	2	F	1	f		2.479008 GHz			-6.047 dBm	
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ2	1	f	(Δ)	994 kHz	(Δ)		-0.189 dB																					
2	F	1	f		2.479008 GHz			-6.047 dBm																					

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

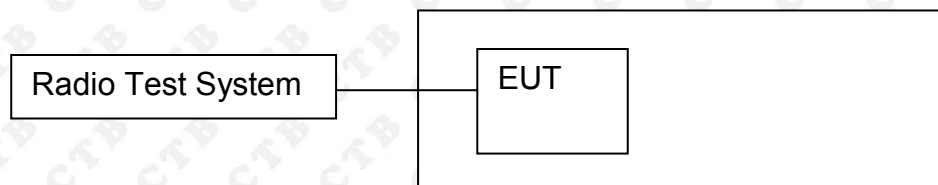

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Test Graph

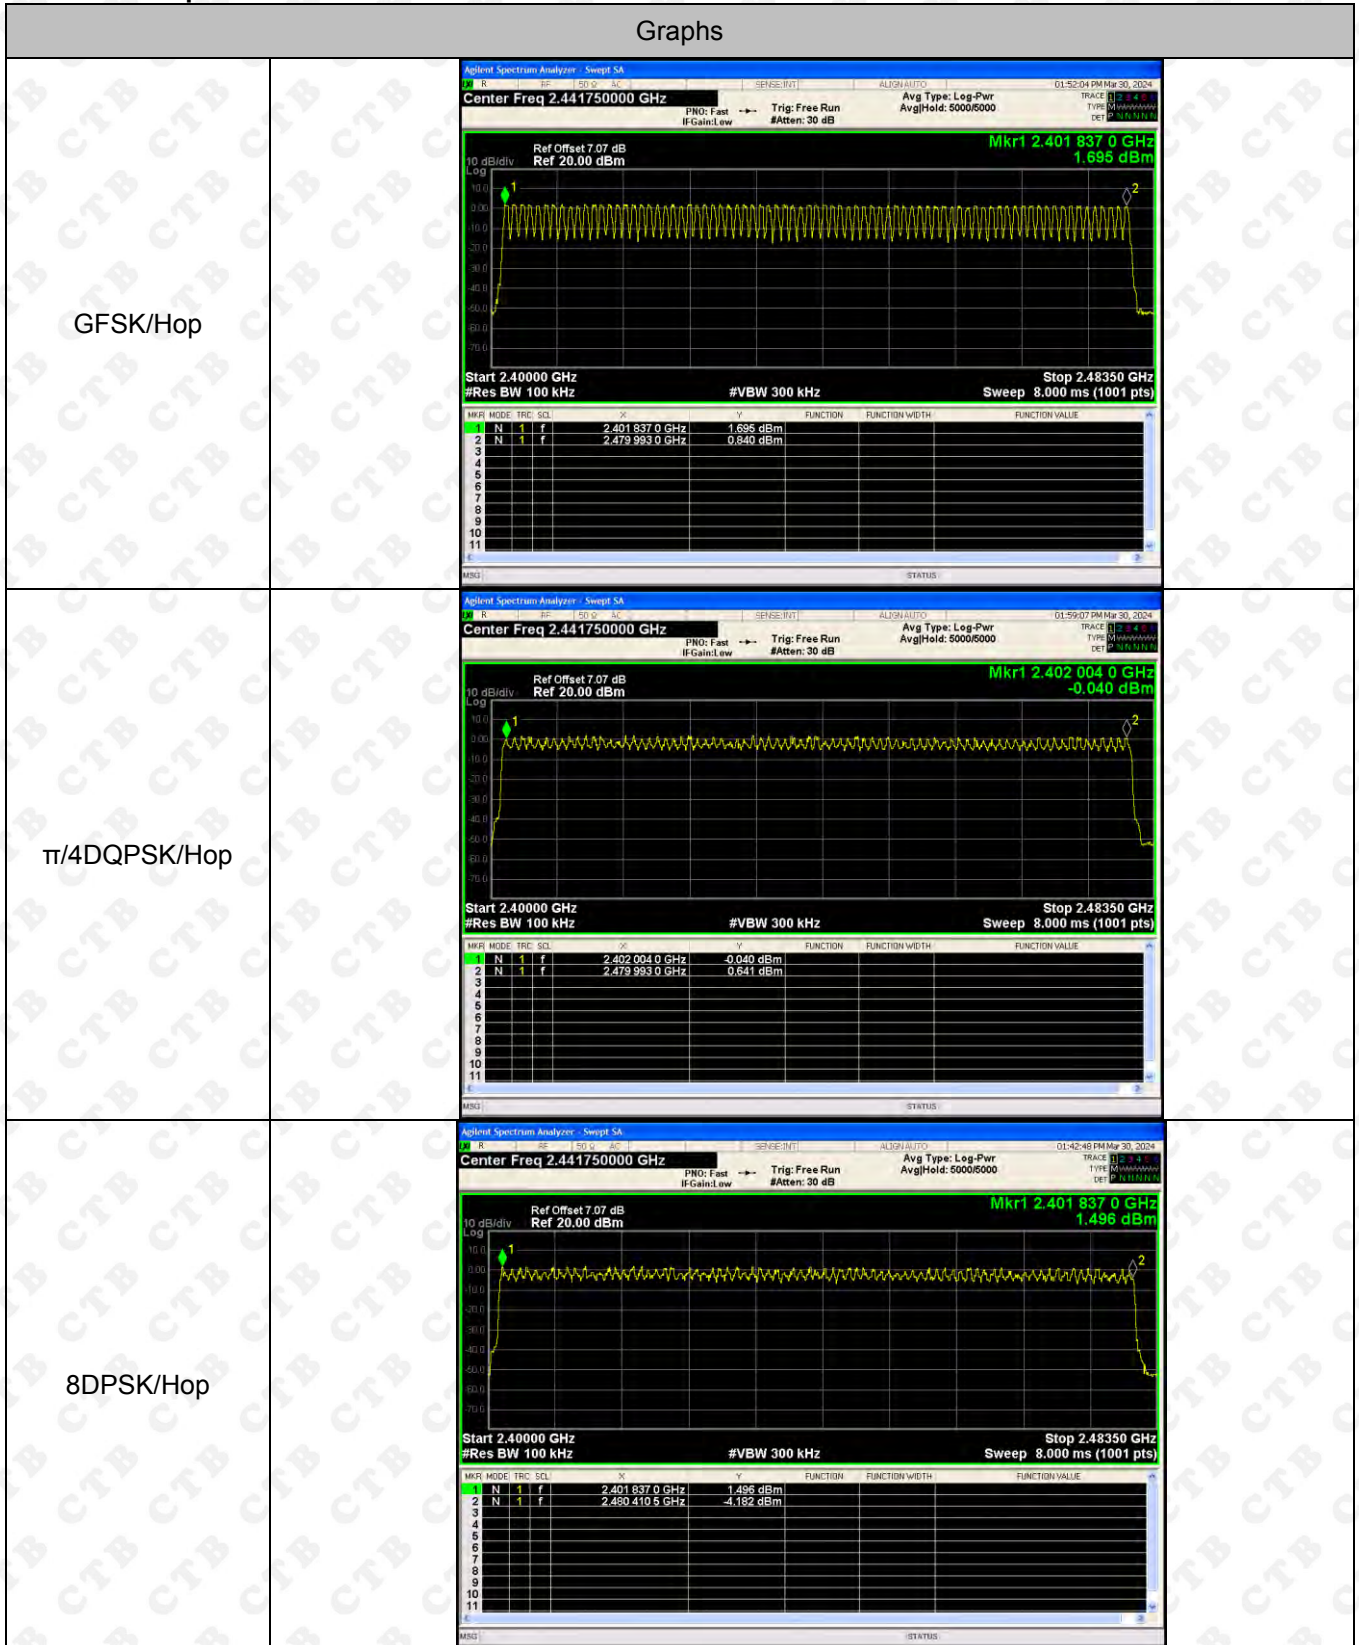

13. DWELL TIME

13.1 Block Diagram Of Test Setup

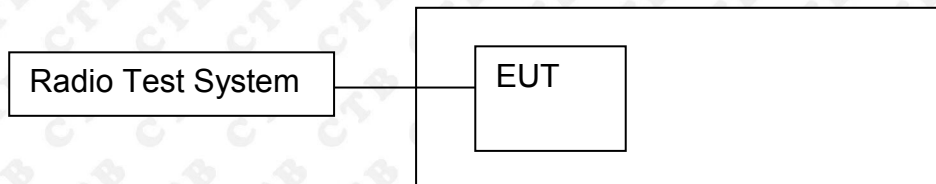

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6 * 0.4 * 79 * (\text{MkrDelta}) / 1000$

DH3: $1600/79/4 * 0.4 * 79 * (\text{MkrDelta}) / 1000$

DH1: $1600/79/2 * 0.4 * 79 * (\text{MkrDelta}) / 1000$

Remark: Mkr Delta is once pulse time.

Test Graph

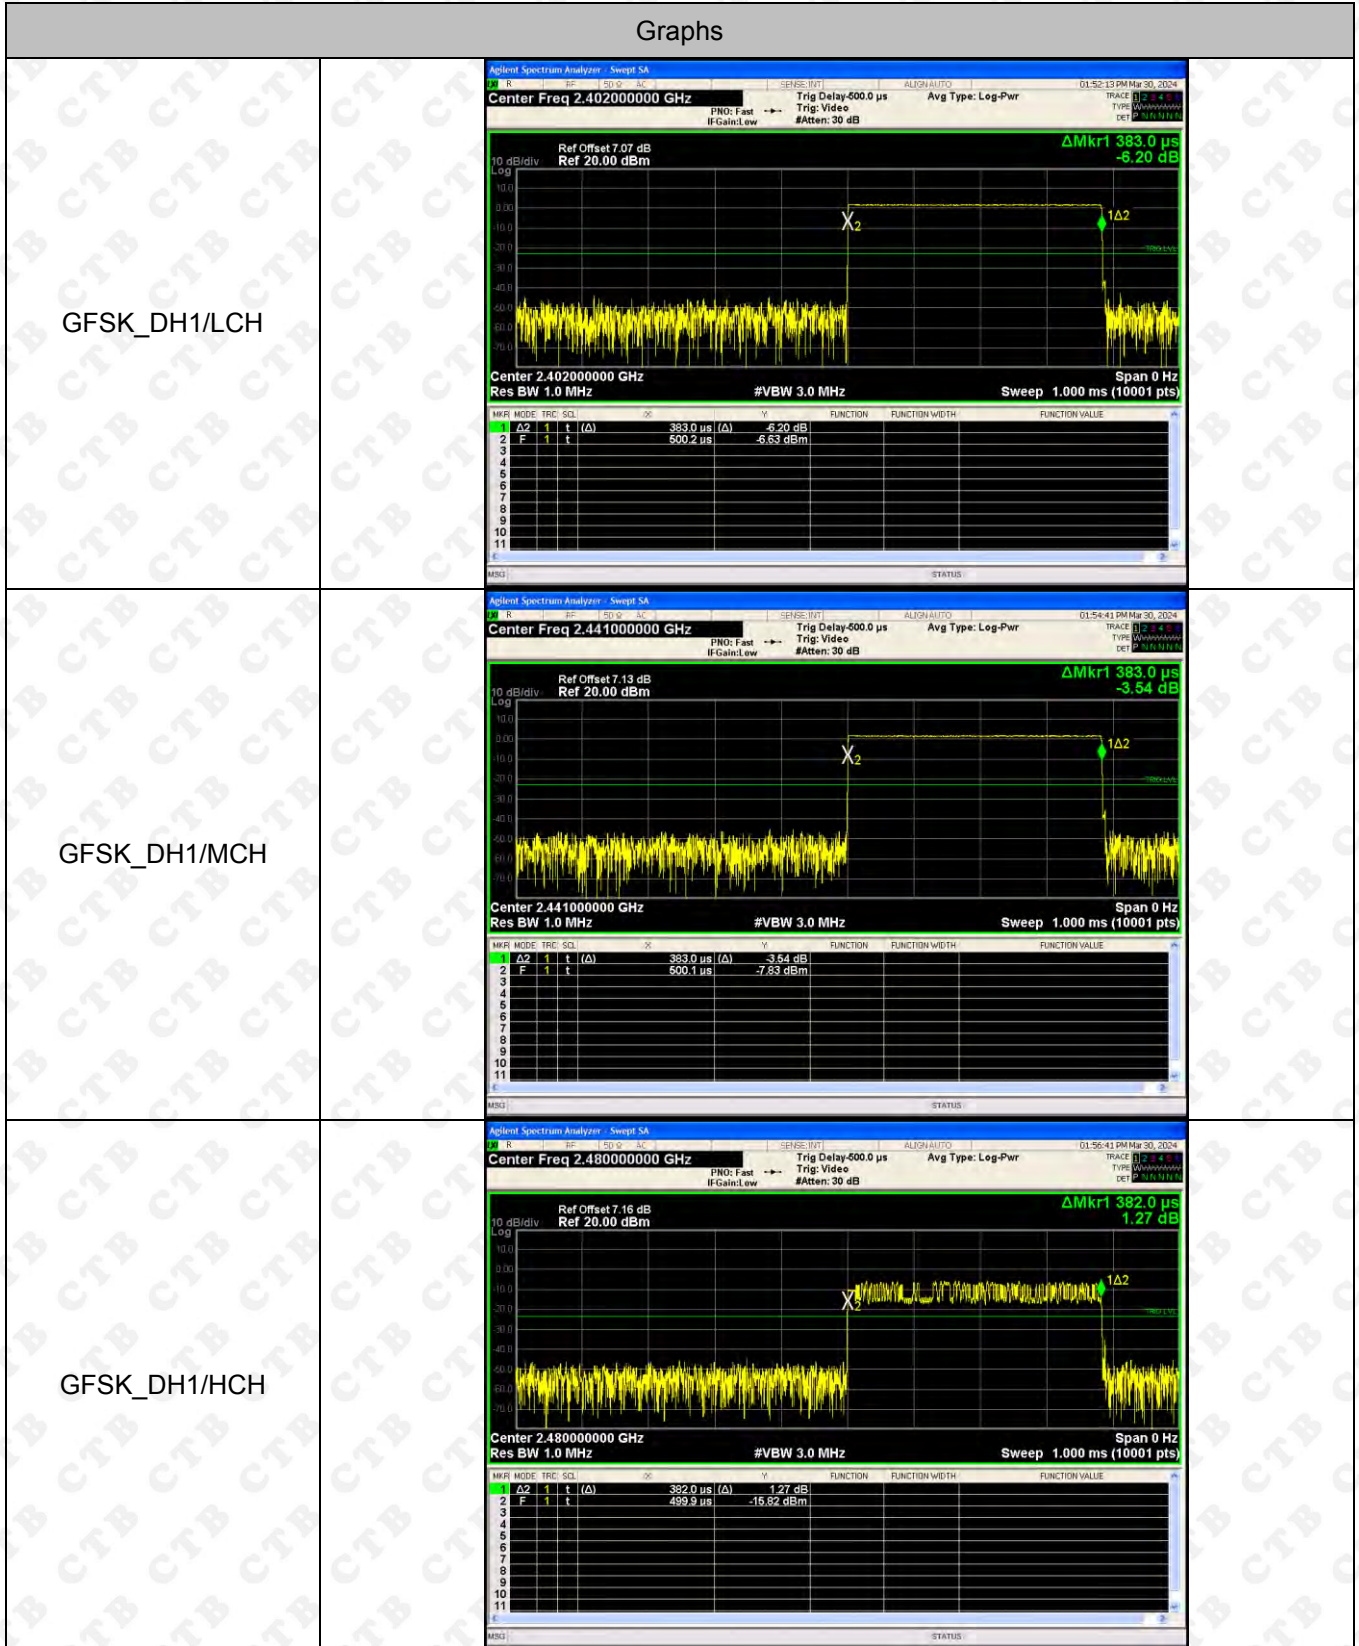

<p>GFSK_DH3/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 7.07 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 1.644 ms -1.48 dB</p> <p>Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms</td> <td>(A)</td> <td>-1.48 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td></td> <td>-6.42 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms	(A)	-1.48 dB		2	F	1	t		500.1 us		-6.42 dBm	
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms	(A)	-1.48 dB																					
2	F	1	t		500.1 us		-6.42 dBm																					
<p>GFSK_DH3/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 7.13 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 1.644 ms -3.33 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms</td> <td>(A)</td> <td>-3.33 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 us</td> <td></td> <td>-6.18 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms	(A)	-3.33 dB		2	F	1	t		499.8 us		-6.18 dBm	
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms	(A)	-3.33 dB																					
2	F	1	t		499.8 us		-6.18 dBm																					
<p>GFSK_DH3/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 7.16 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 1.644 ms -6.13 dB</p> <p>Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms</td> <td>(A)</td> <td>-6.13 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td></td> <td>-4.45 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms	(A)	-6.13 dB		2	F	1	t		500.1 us		-4.45 dBm	
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(A)	1.644 ms	(A)	-6.13 dB																					
2	F	1	t		500.1 us		-4.45 dBm																					

<p>GFSK_DH5/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 7.07 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 2.894 ms -4.38 dB</p> <p>Center: 2.402000000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.894 ms</td> <td>(Δ)</td> <td>-4.38 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td></td> <td>-3.10 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.894 ms	(Δ)	-4.38 dB		2	F	1	t		500.0 μs		-3.10 dBm	
MKR	MODE	TRC	SCL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.894 ms	(Δ)	-4.38 dB																					
2	F	1	t		500.0 μs		-3.10 dBm																					
<p>GFSK_DH5/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 7.13 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 2.894 ms -5.88 dB</p> <p>Center: 2.441000000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.894 ms</td> <td>(Δ)</td> <td>-5.88 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-12.79 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.894 ms	(Δ)	-5.88 dB		2	F	1	t		499.6 μs		-12.79 dBm	
MKR	MODE	TRC	SCL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.894 ms	(Δ)	-5.88 dB																					
2	F	1	t		499.6 μs		-12.79 dBm																					
<p>GFSK_DH5/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 7.16 dB Ref: 20.00 dBm</p> <p>Delta Mkr1: 2.894 ms 2.40 dB</p> <p>Center: 2.480000000 GHz Res BW: 1.0 MHz #VBW: 3.0 MHz Sweep: 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.894 ms</td> <td>(Δ)</td> <td>2.40 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-6.76 dBm</td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.894 ms	(Δ)	2.40 dB		2	F	1	t		499.6 μs		-6.76 dBm	
MKR	MODE	TRC	SCL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.894 ms	(Δ)	2.40 dB																					
2	F	1	t		499.6 μs		-6.76 dBm																					

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

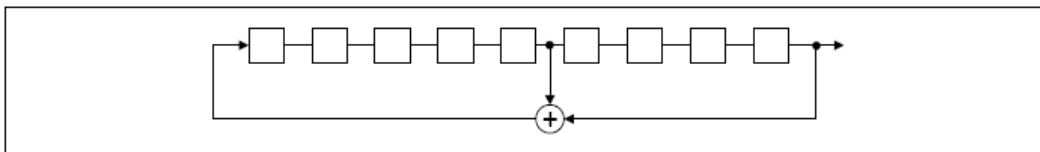

An example of Pseudorandom Frequency Hopping Sequence as follow:

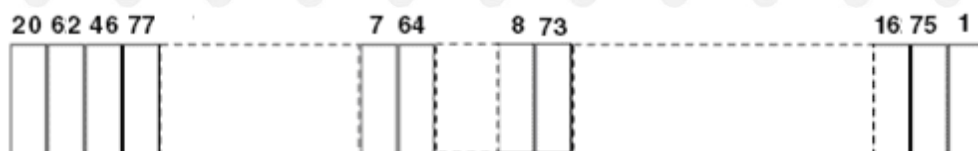

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is -0.68dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted emissions



***** END OF REPORT *****