


ANNEX D TEST DATA

For

Project No.:	8132EU012104W
Client:	Shenzhen Mofhie Wireless Charging Technology Co., LTD
Product Description:	FindTag FT1
Model No.:	FT1
FCC ID:	2BCZZ-FT1
Technology:	Bluetooth BLE
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2023-11-03

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Maximum Power Spectral Density	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass
Unwanted Emissions In Restricted Frequency Bands	Pass

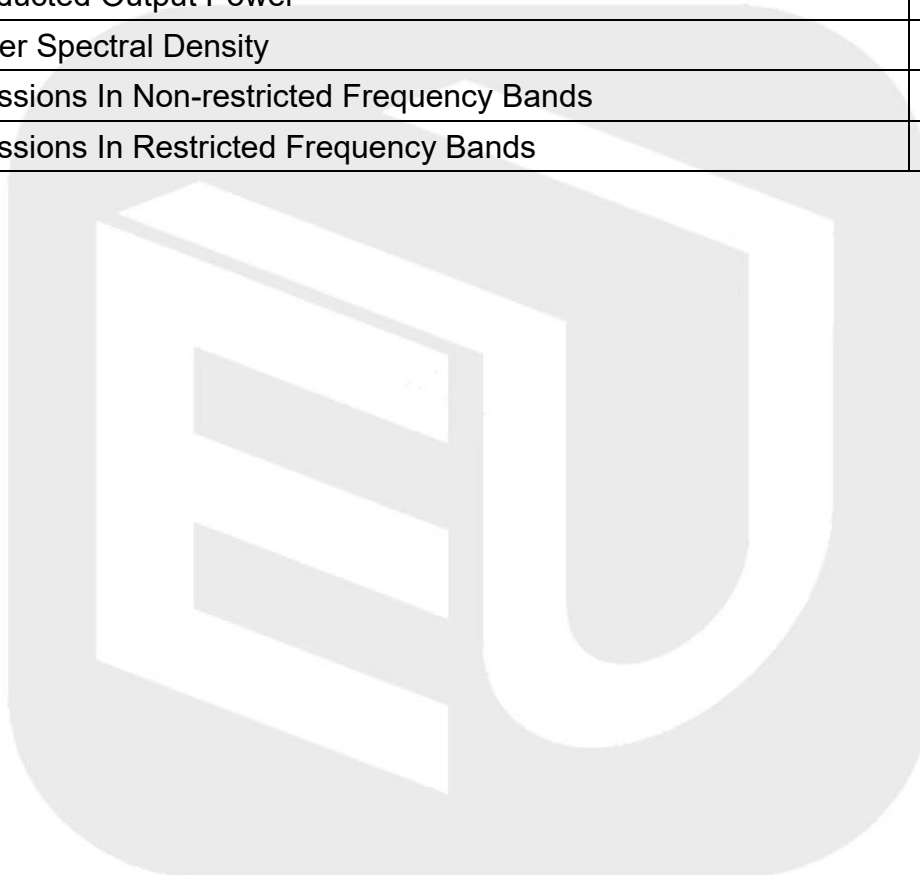


1. Duty Cycle



1.1 Ant1



1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.108	0.625	17.28	7.62	0.03
2M	SISO	2402	0.066	0.625	10.56	9.76	0.03
1M	SISO	2440	0.108	0.625	17.28	7.62	0.03
		2480	0.108	0.625	17.28	7.62	0.03
2M	SISO	2440	0.065	0.625	10.40	9.83	0.03
		2480	0.065	0.625	10.40	9.83	0.00

1.1.2 Test Graph

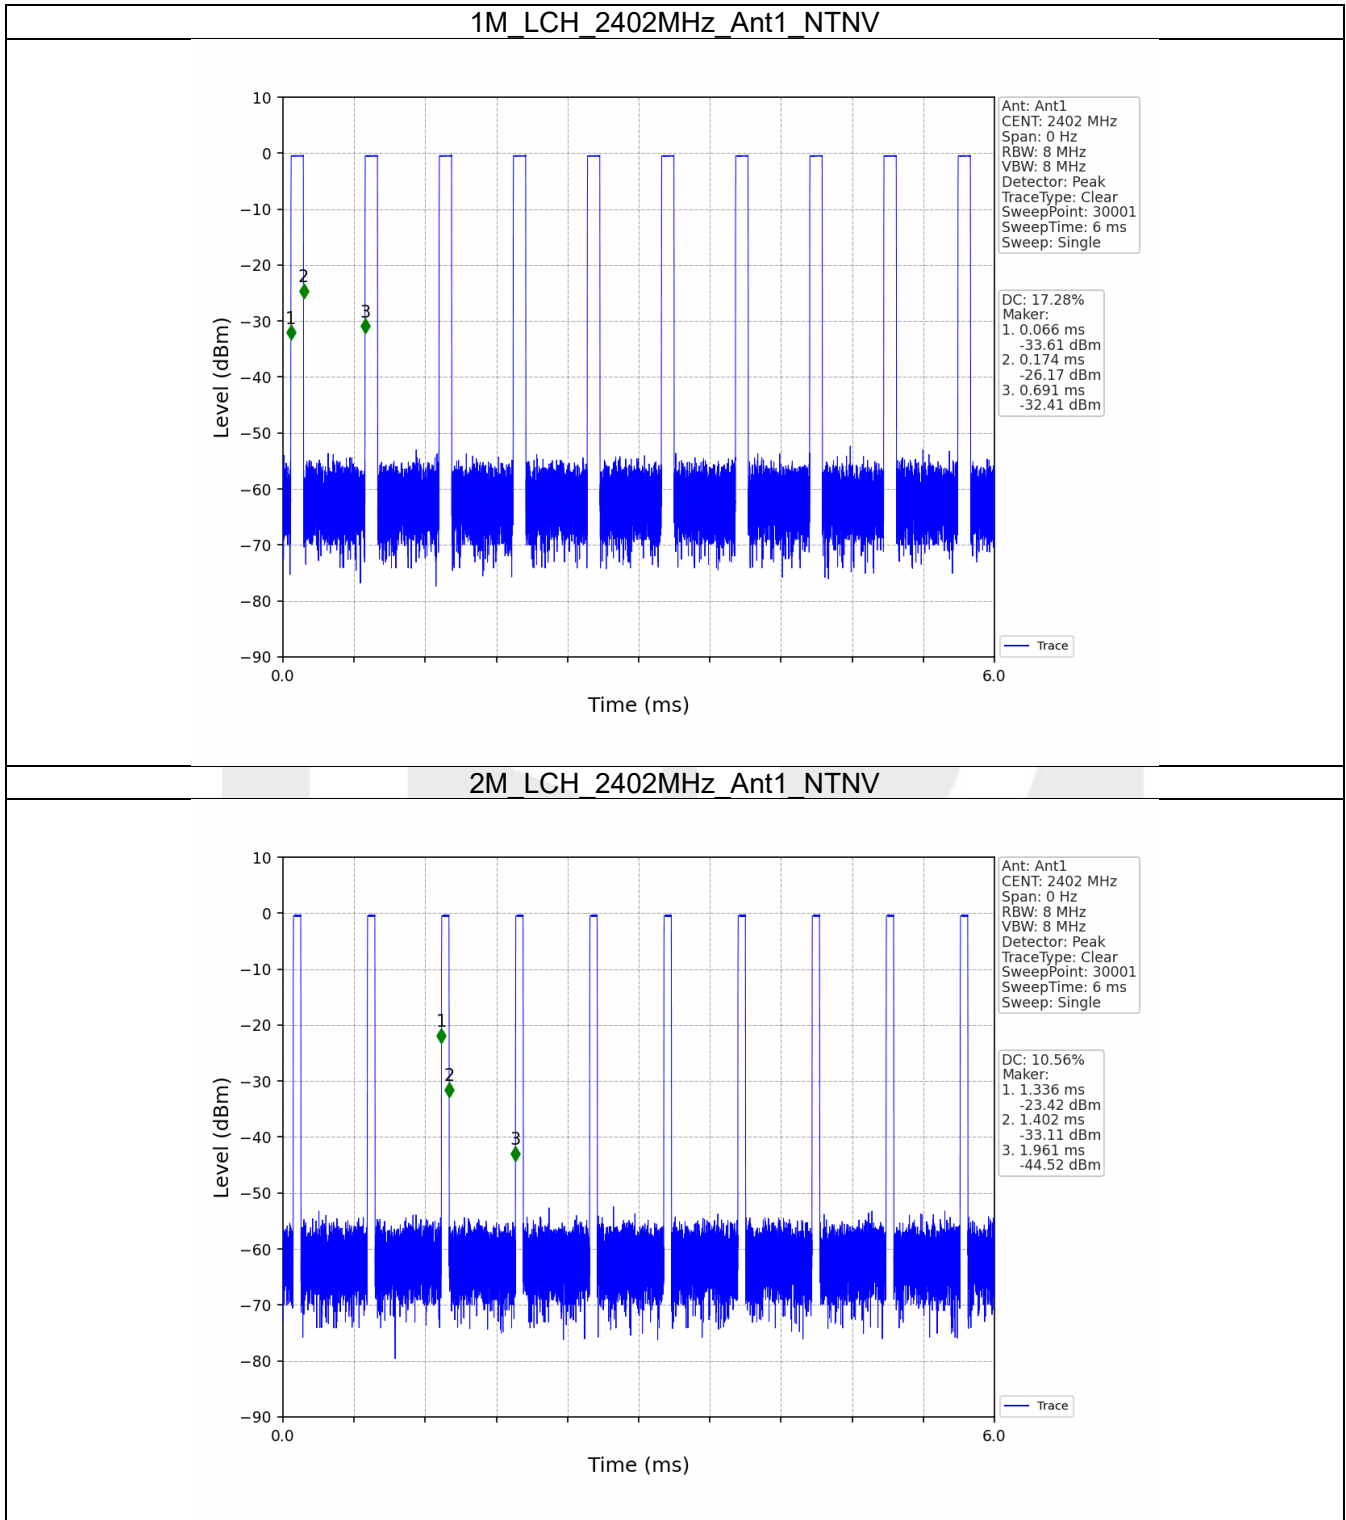

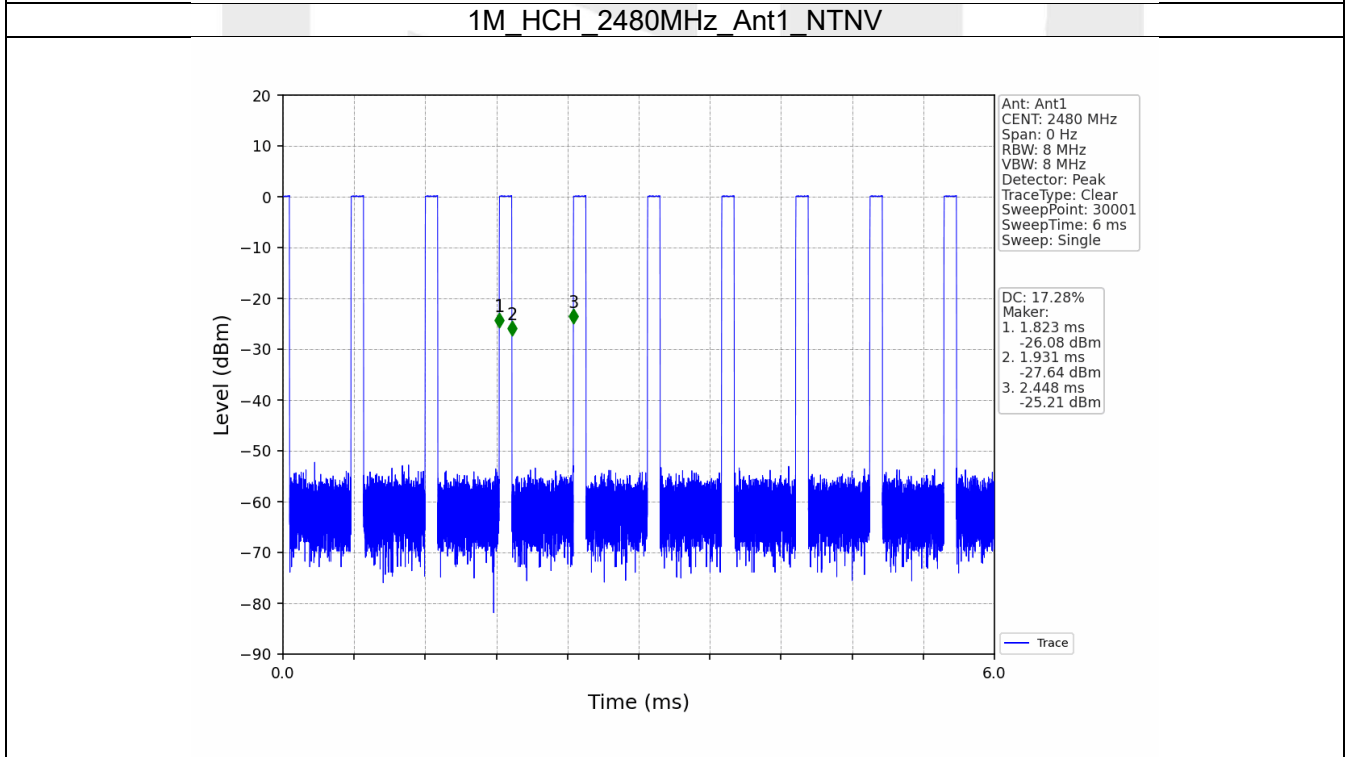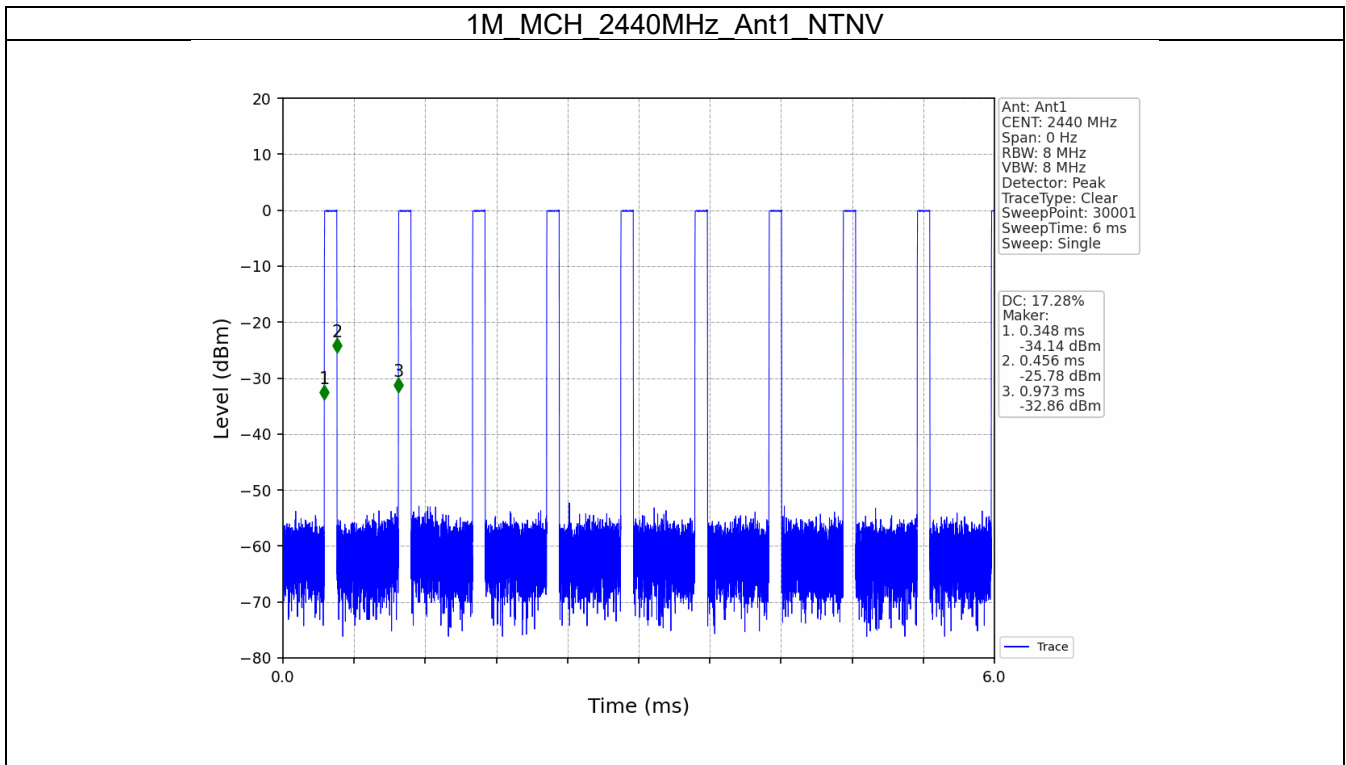

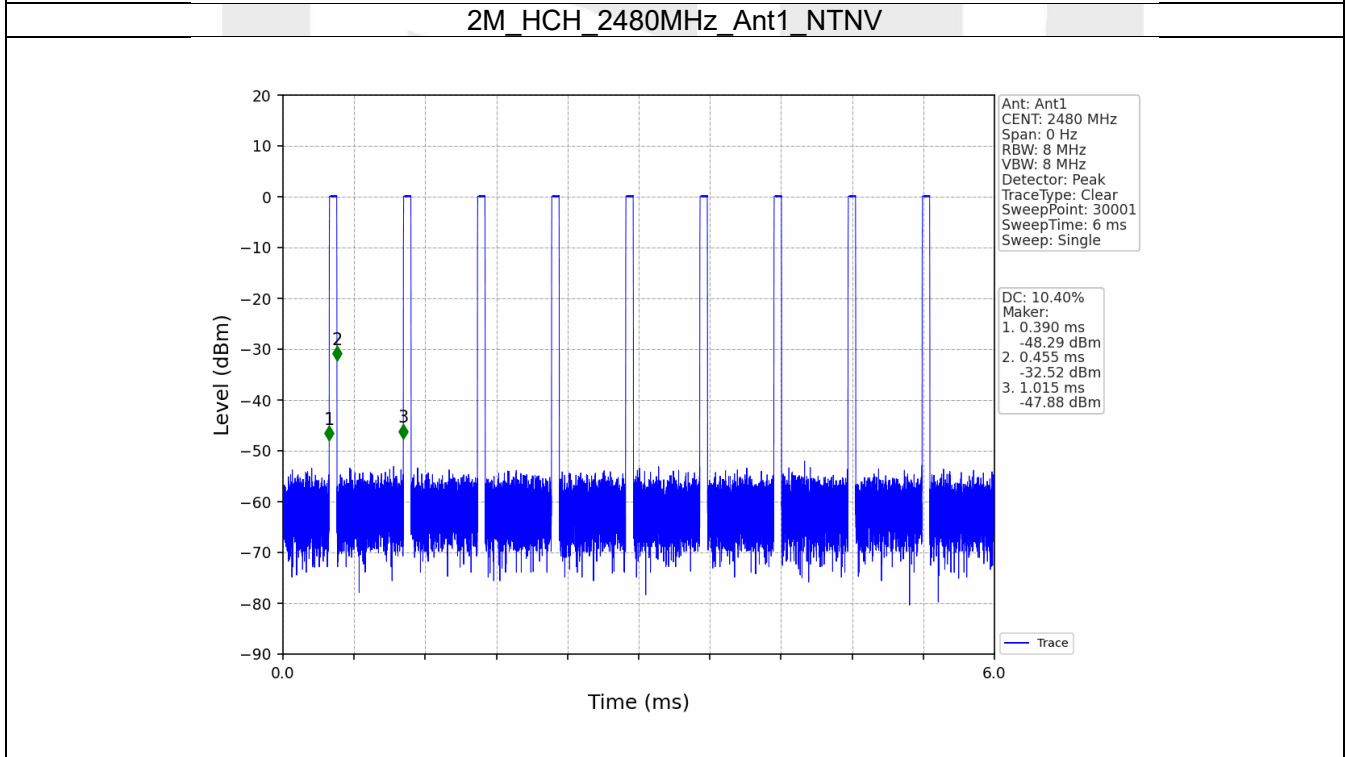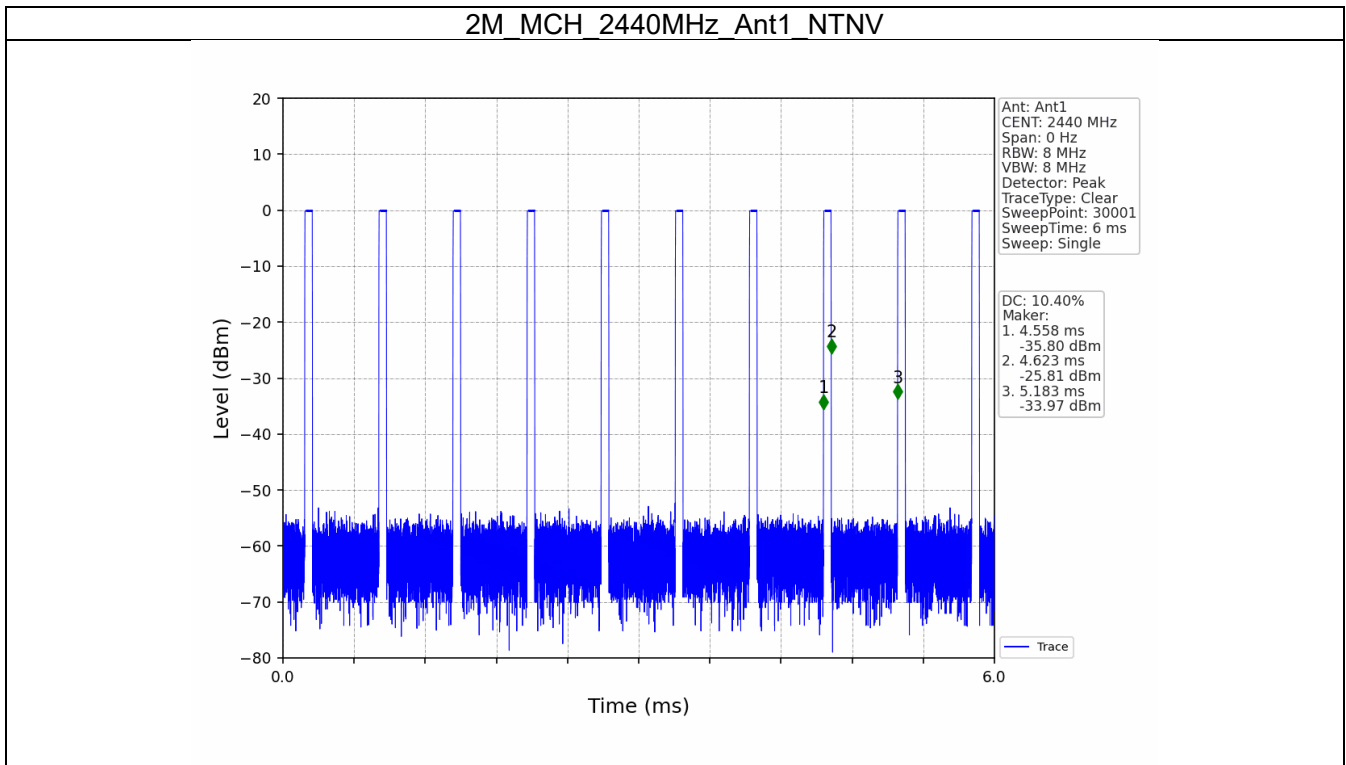

2. Bandwidth


2.1 OBW



2.1.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.036	Pass
2M	SISO	2402	1	2.072	Pass
1M	SISO	2440	1	1.040	Pass
		2480	1	1.042	Pass
2M	SISO	2440	1	2.072	Pass
		2480	1	2.075	Pass



2.1.2 Test Graph

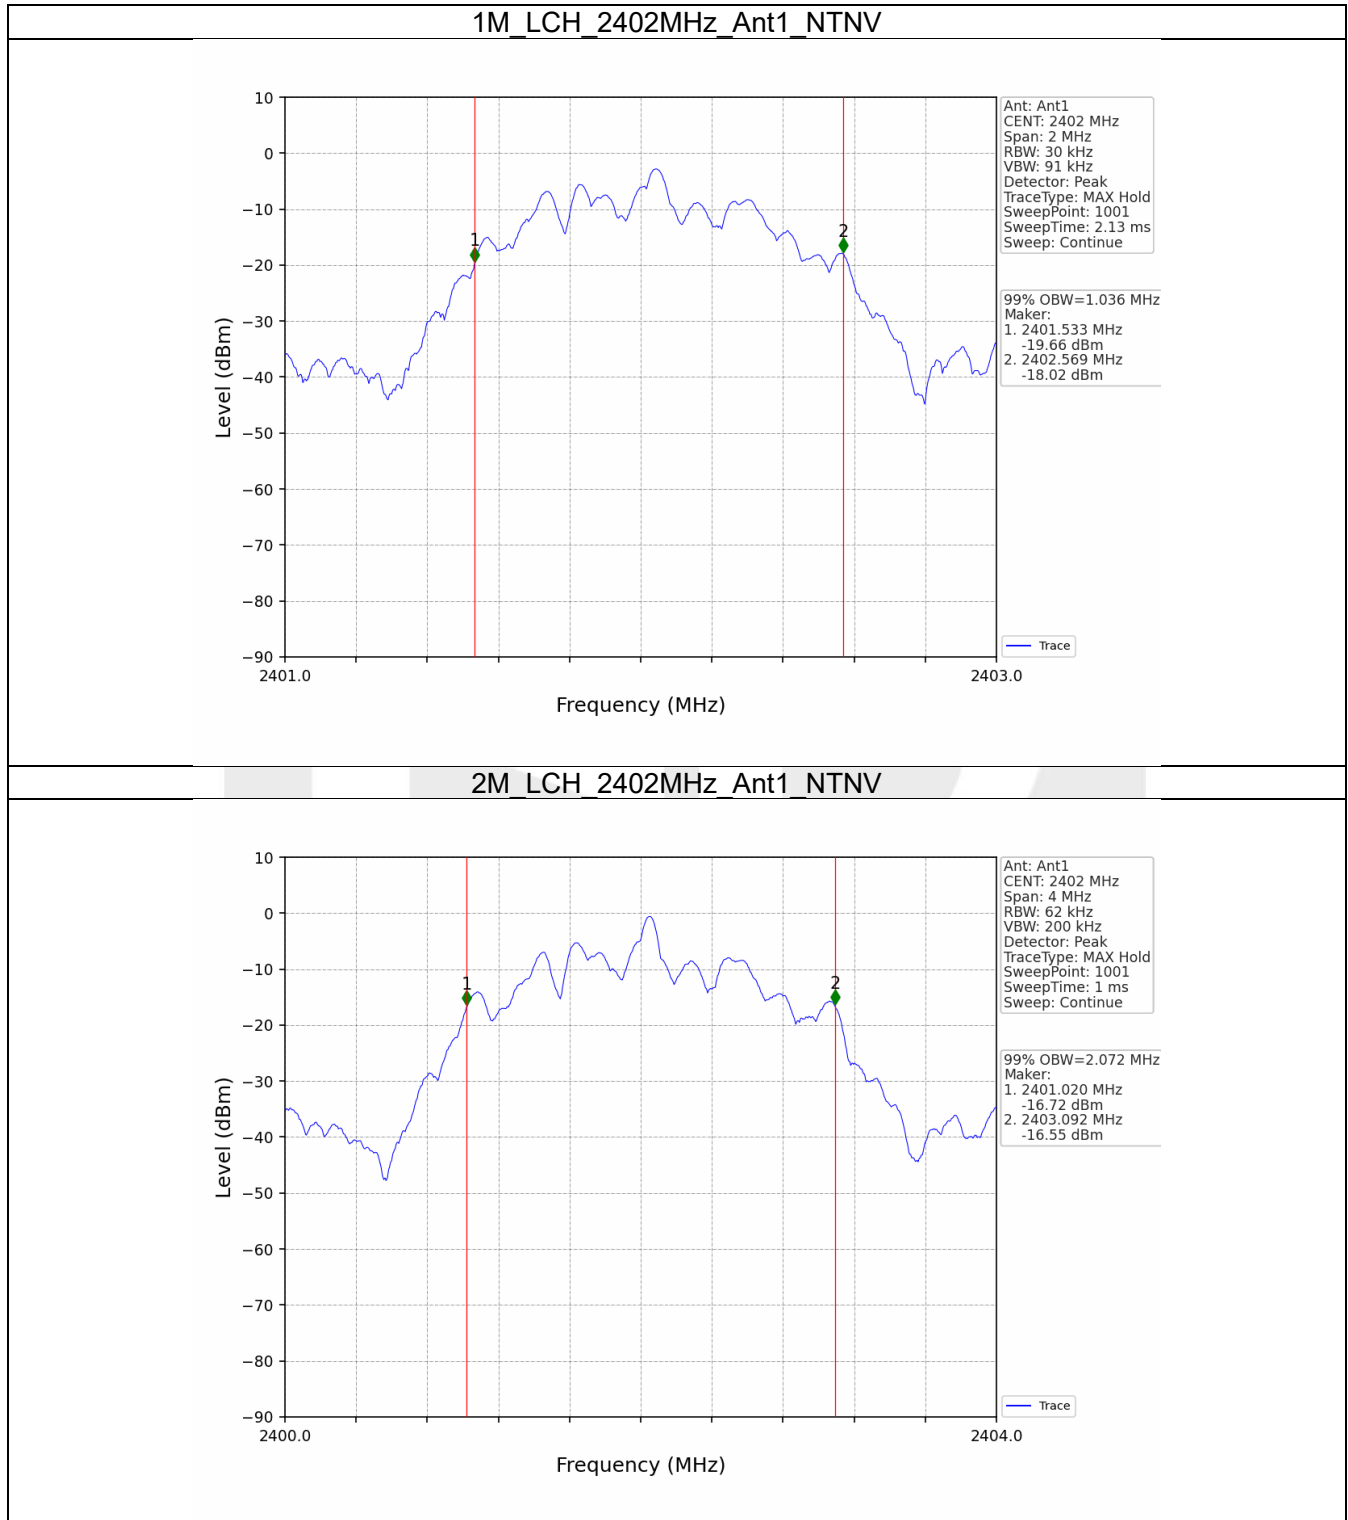

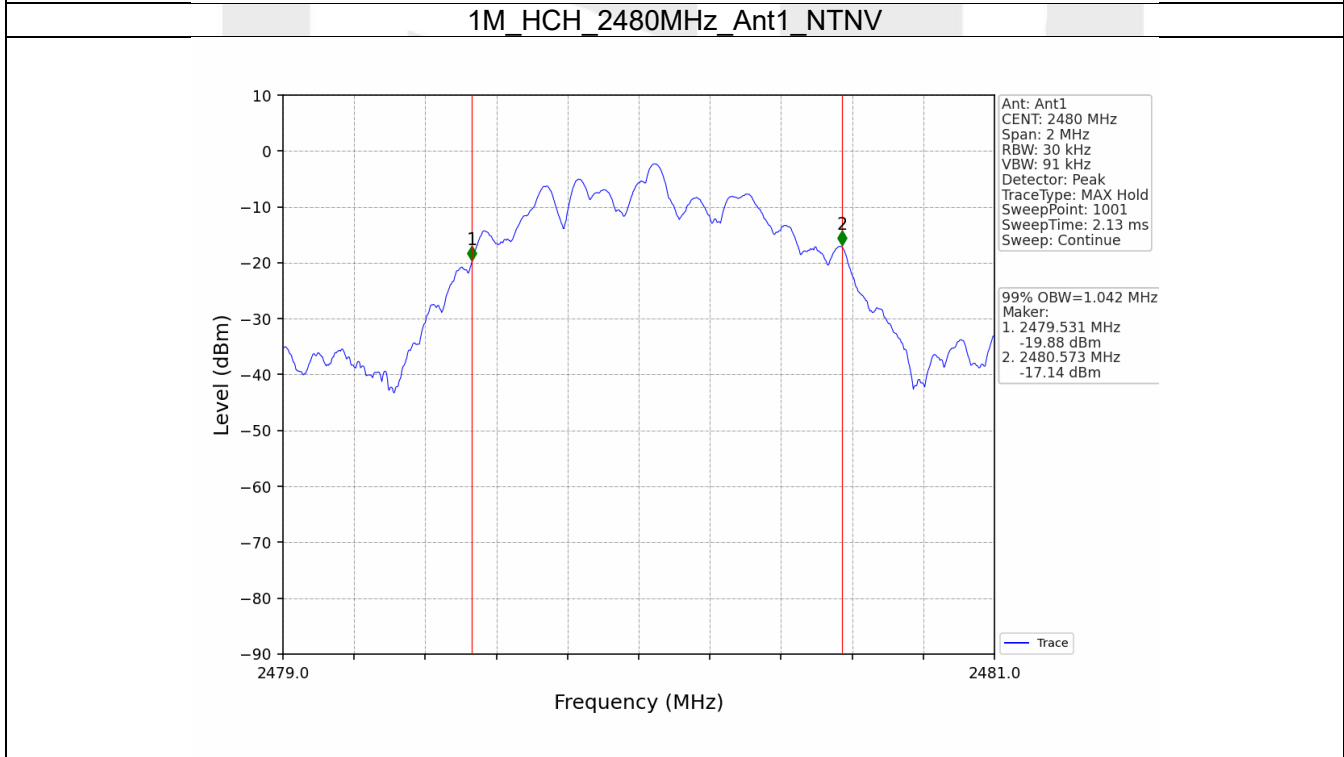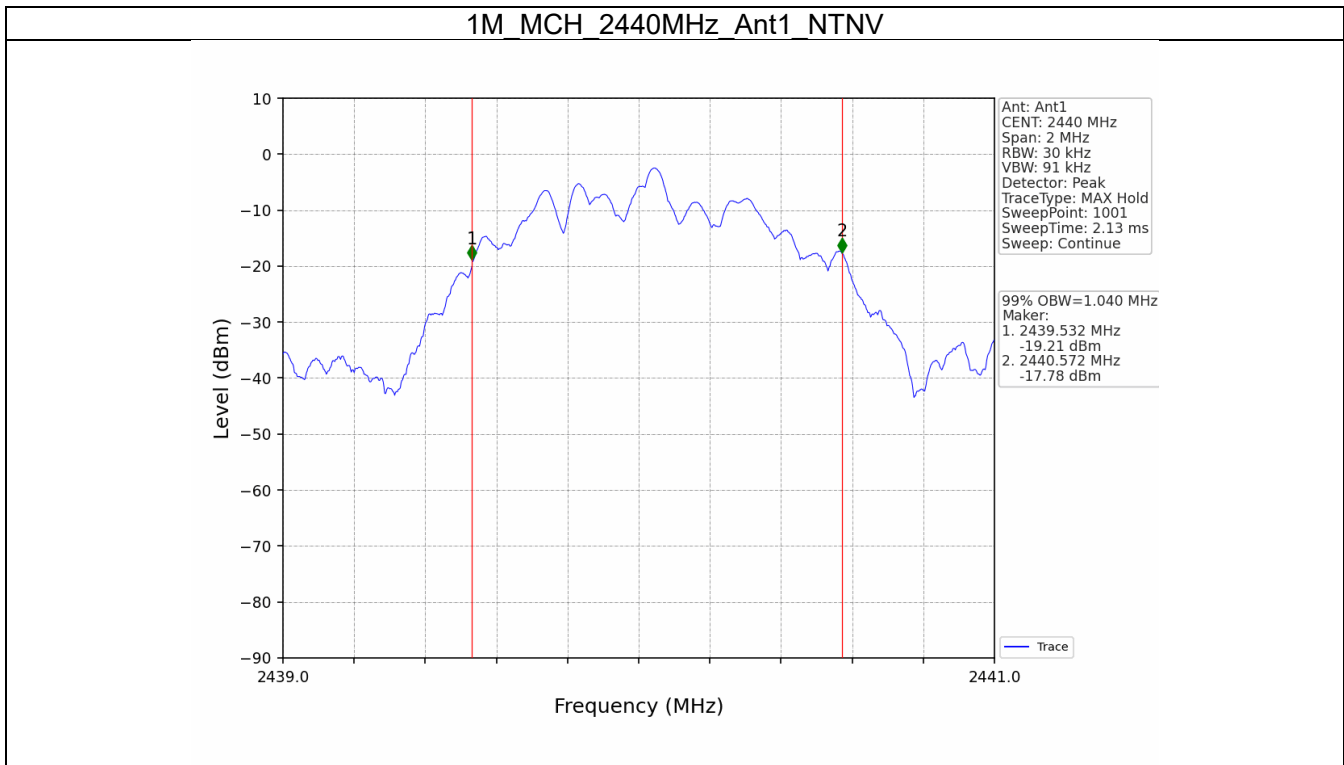

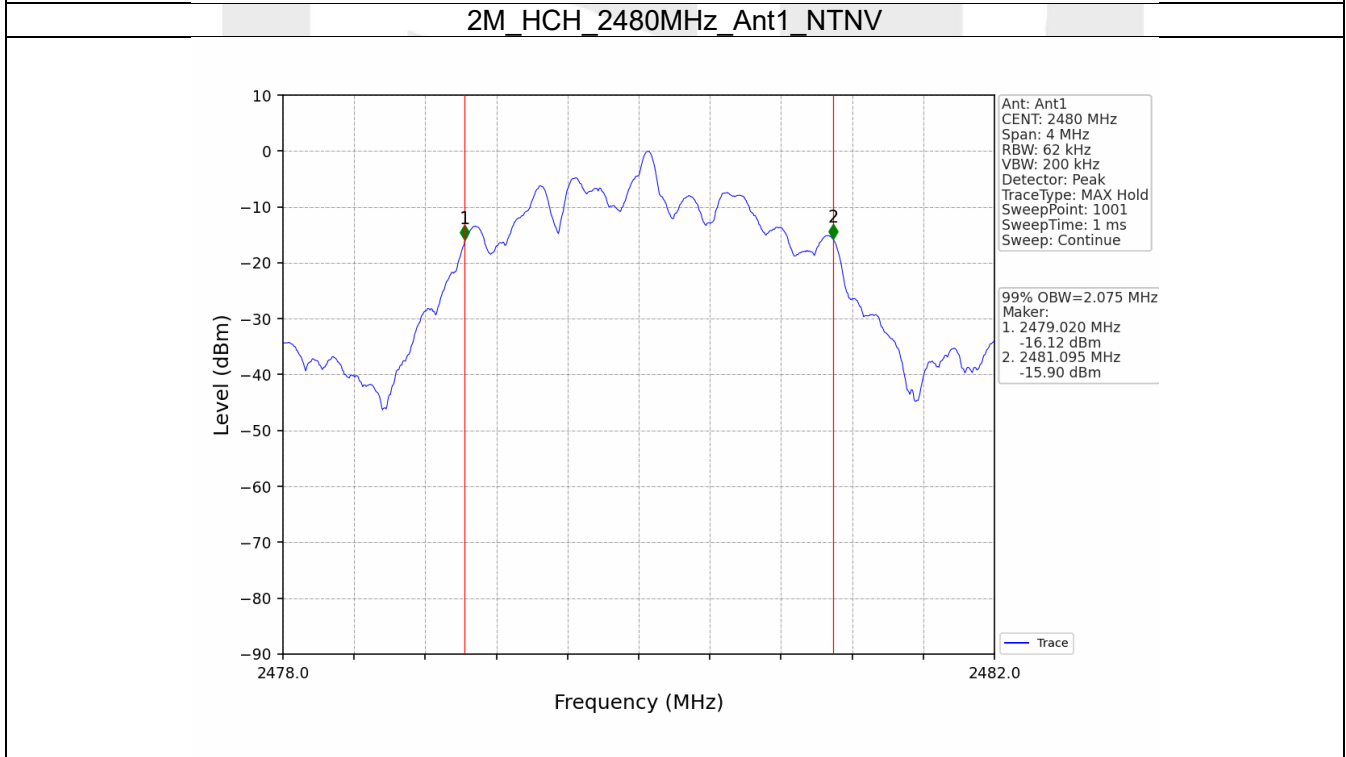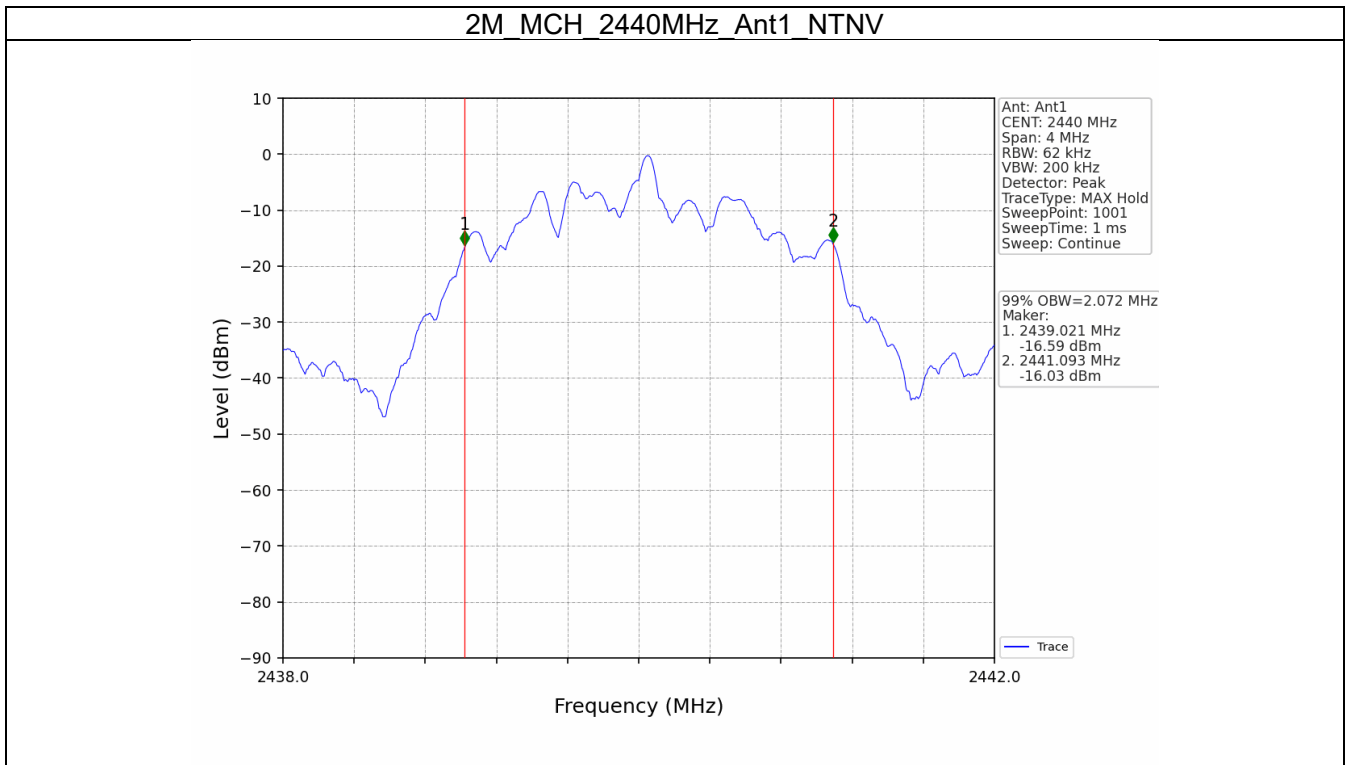


2.2 6dB BW



2.2.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.688	≥ 0.5	Pass
2M	SISO	2402	1	1.187	≥ 0.5	Pass
1M	SISO	2440	1	0.695	≥ 0.5	Pass
		2480	1	0.694	≥ 0.5	Pass
2M	SISO	2440	1	1.192	≥ 0.5	Pass
		2480	1	1.188	≥ 0.5	Pass



2.2.2 Test Graph

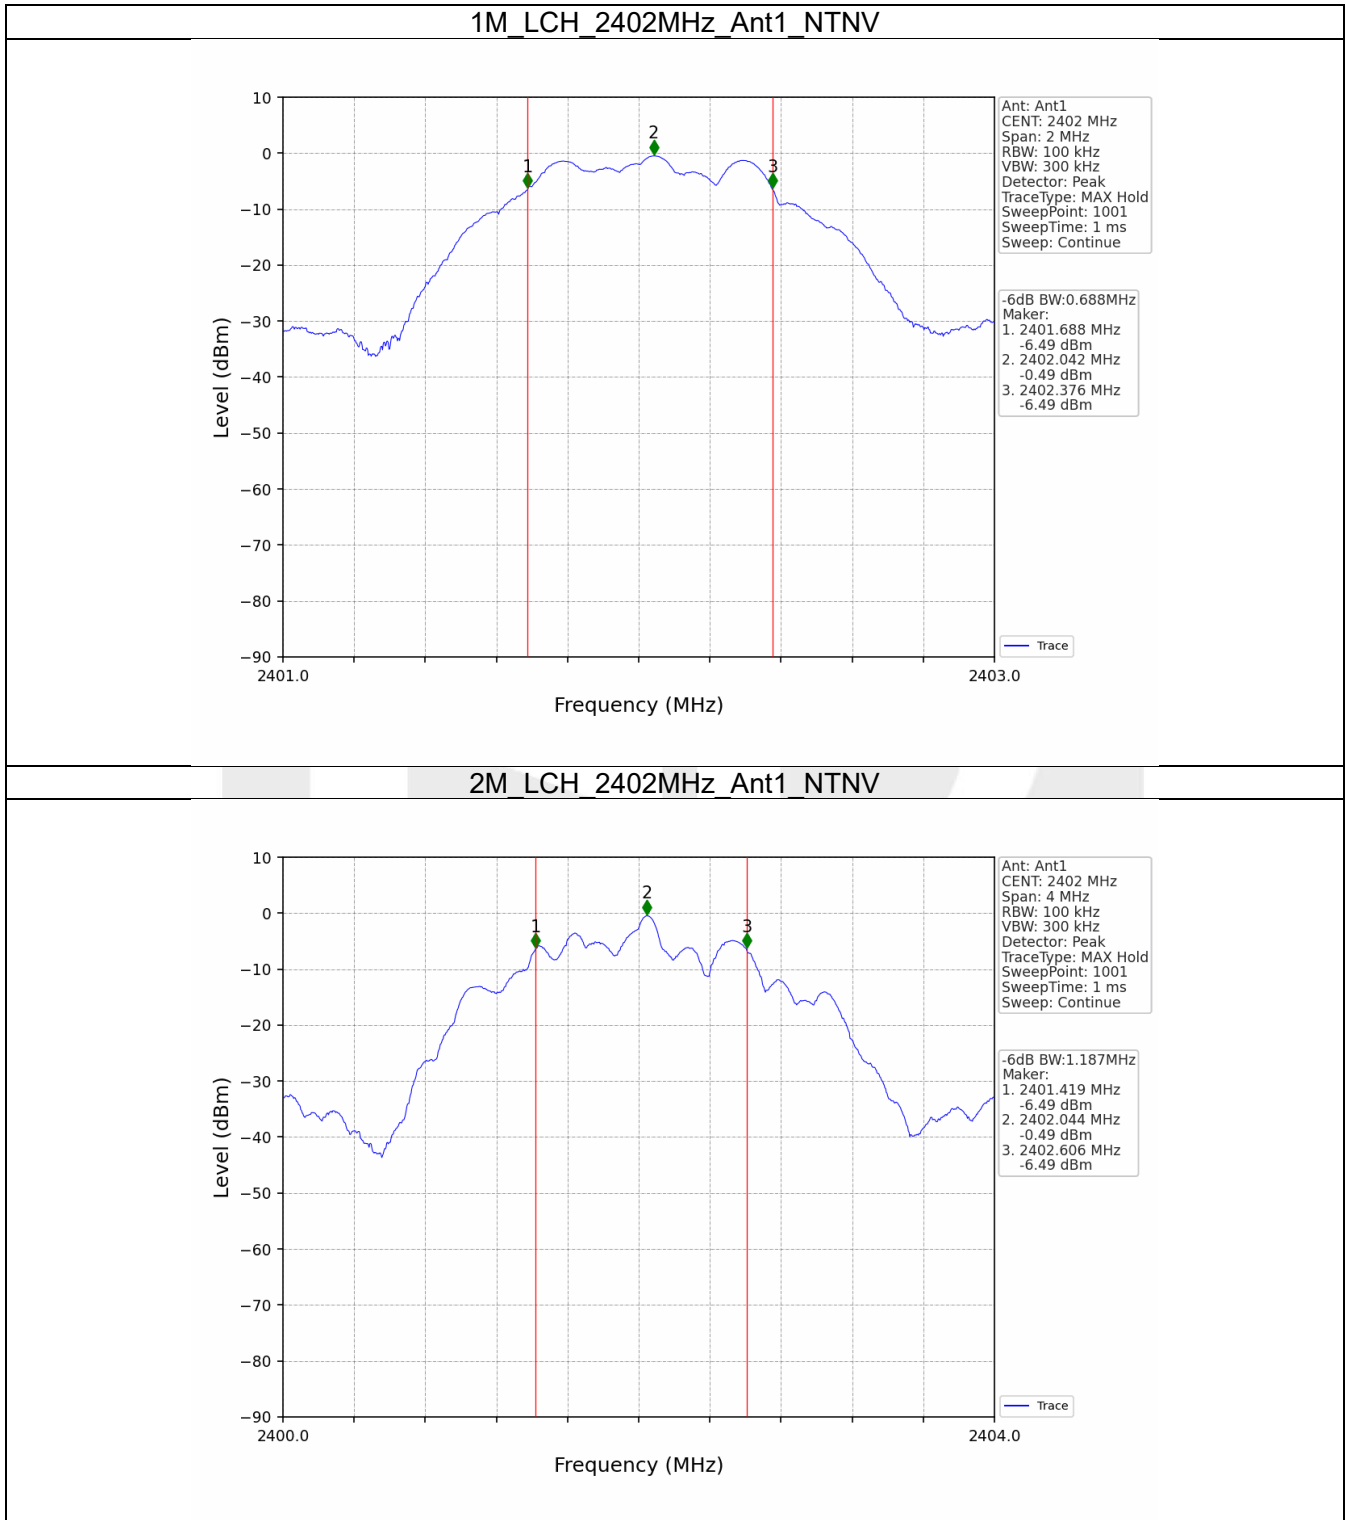

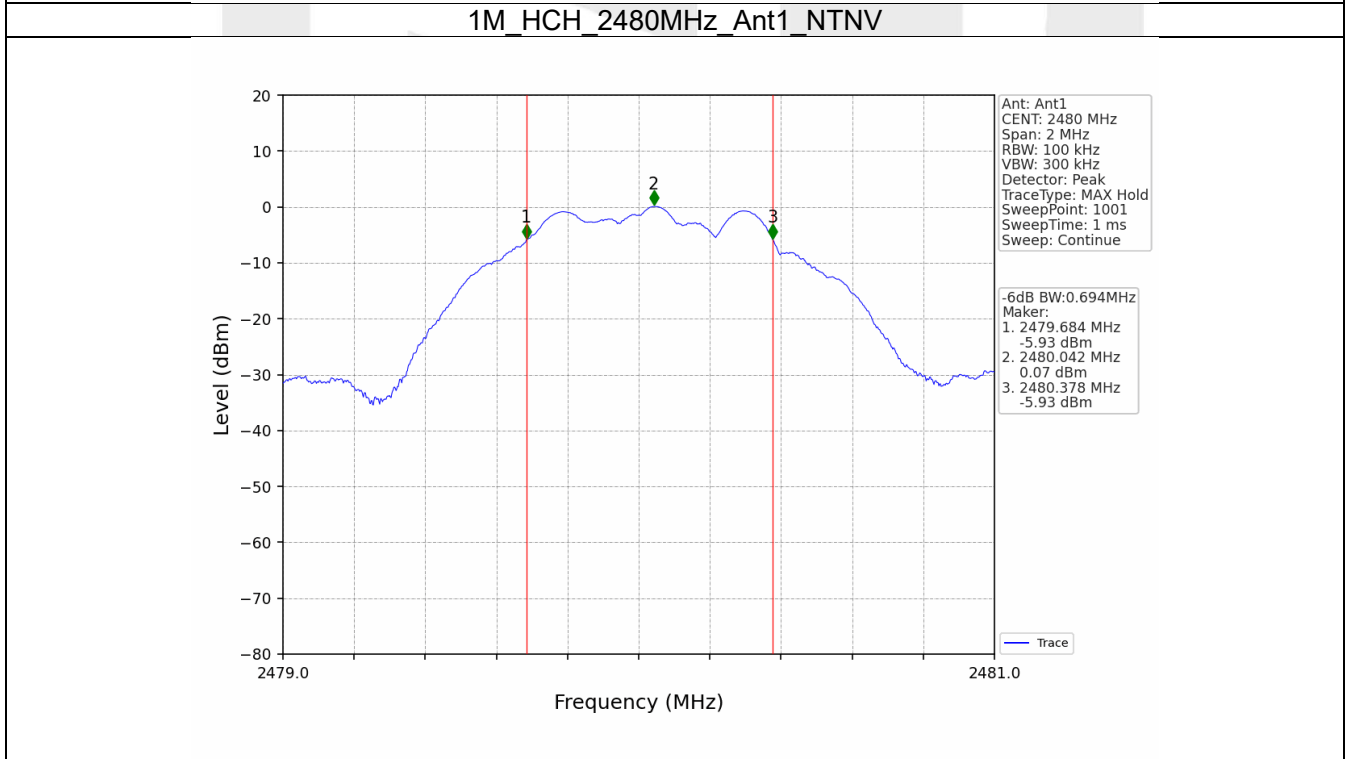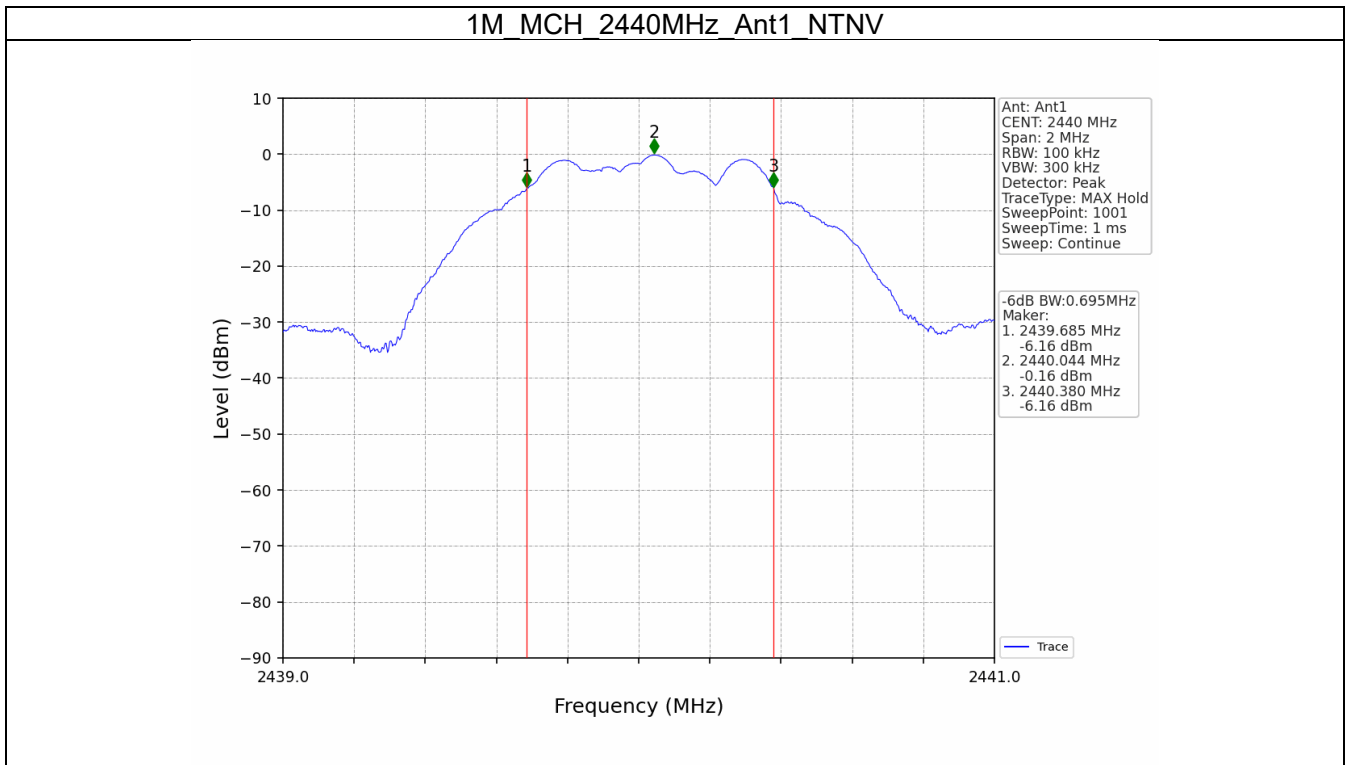

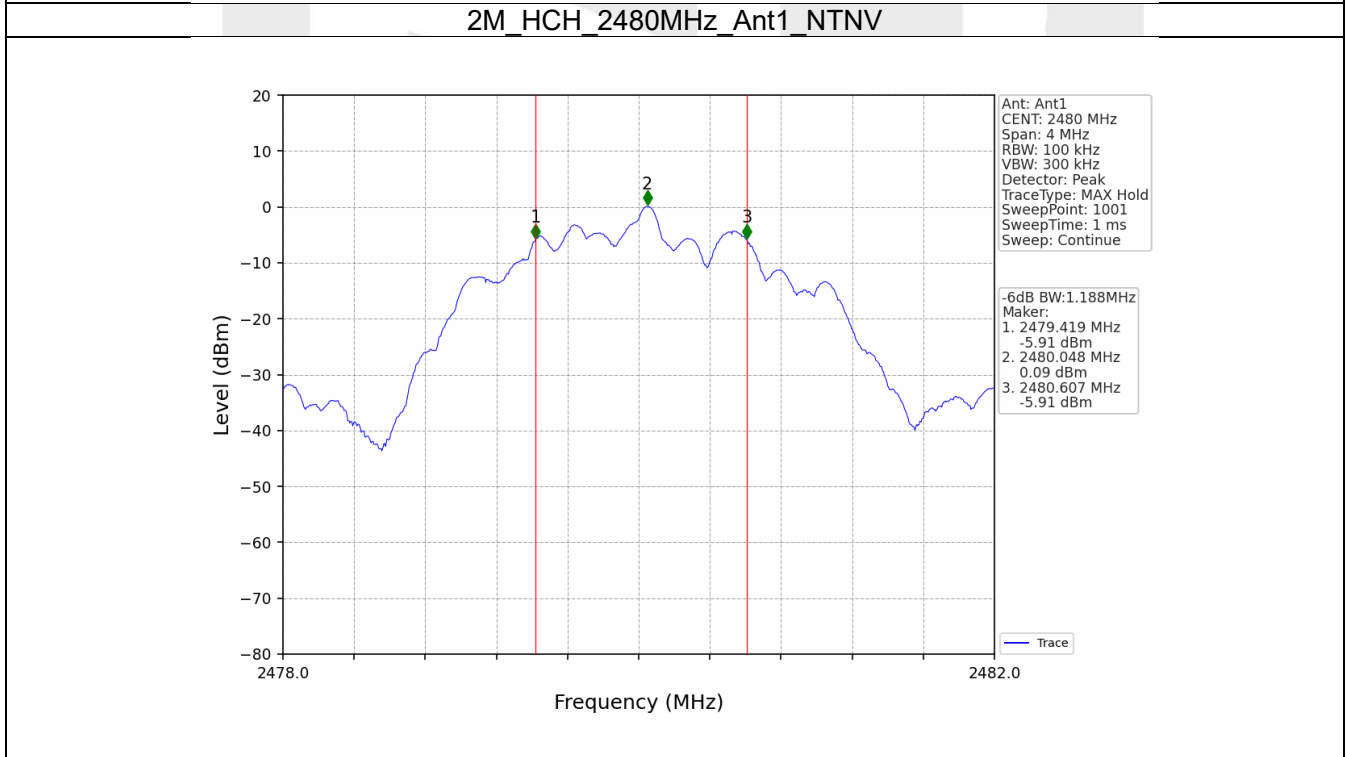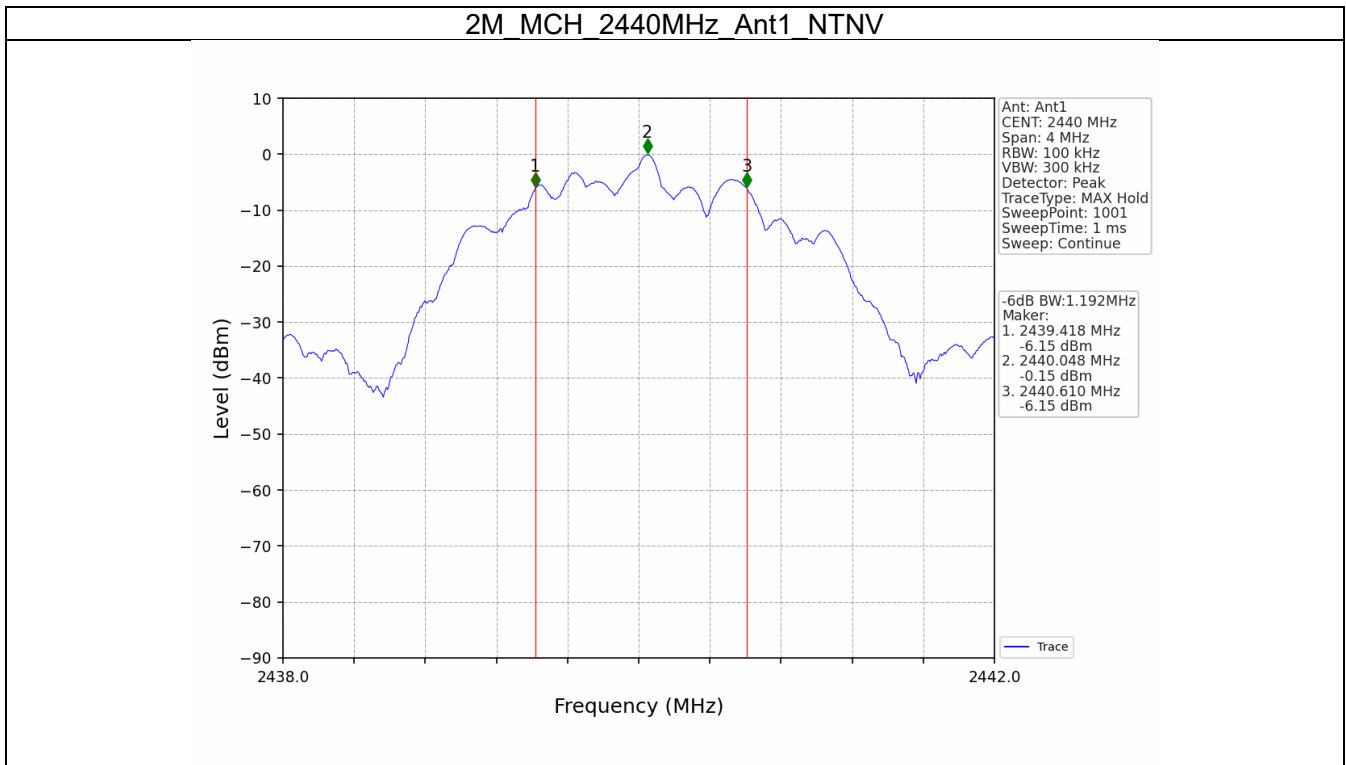

3. Maximum Conducted Output Power


3.1 Power



3.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-0.46	<=30	Pass
2M	SISO	2402	-0.43	<=30	Pass
1M	SISO	2440	-0.14	<=30	Pass
		2480	0.11	<=30	Pass
2M	SISO	2440	-0.11	<=30	Pass
		2480	0.13	<=30	Pass

Note1: Antenna Gain: Ant1: 4.30dBi;

3.1.2 Test Graph

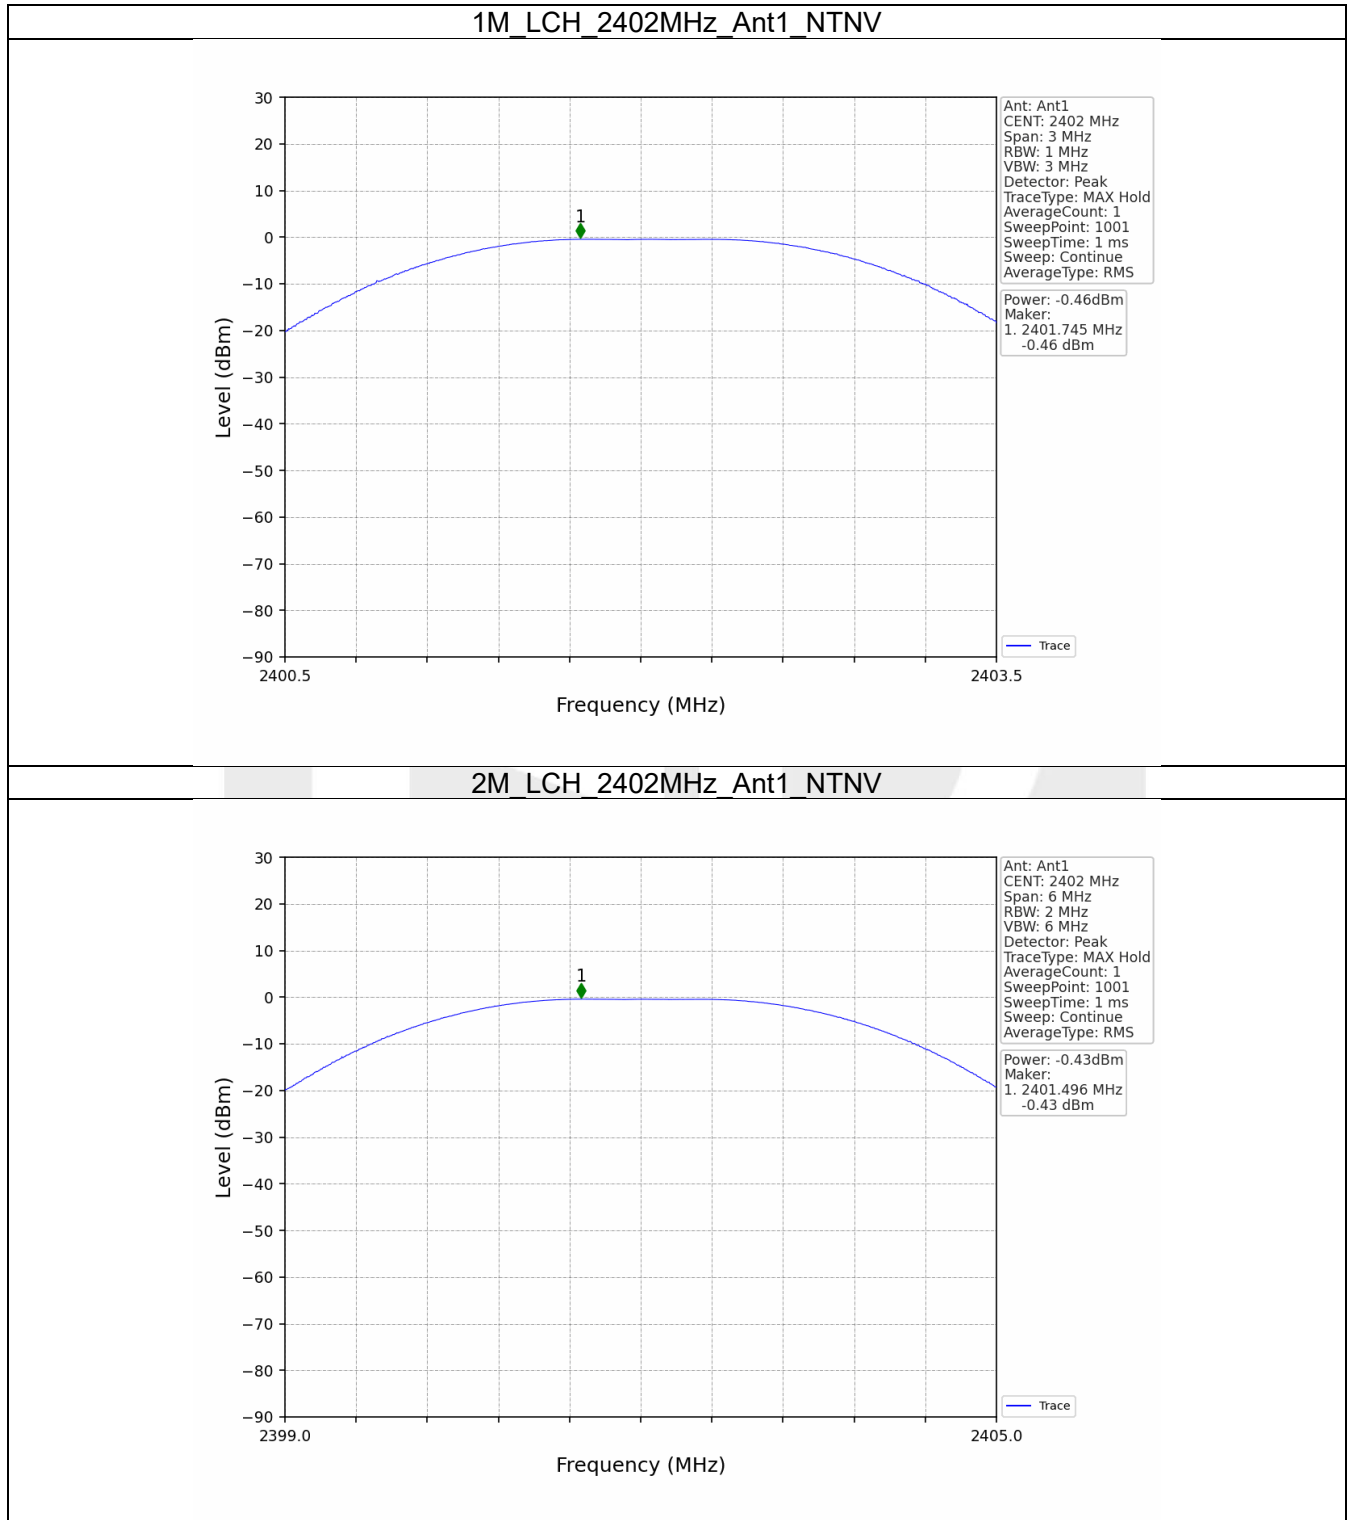

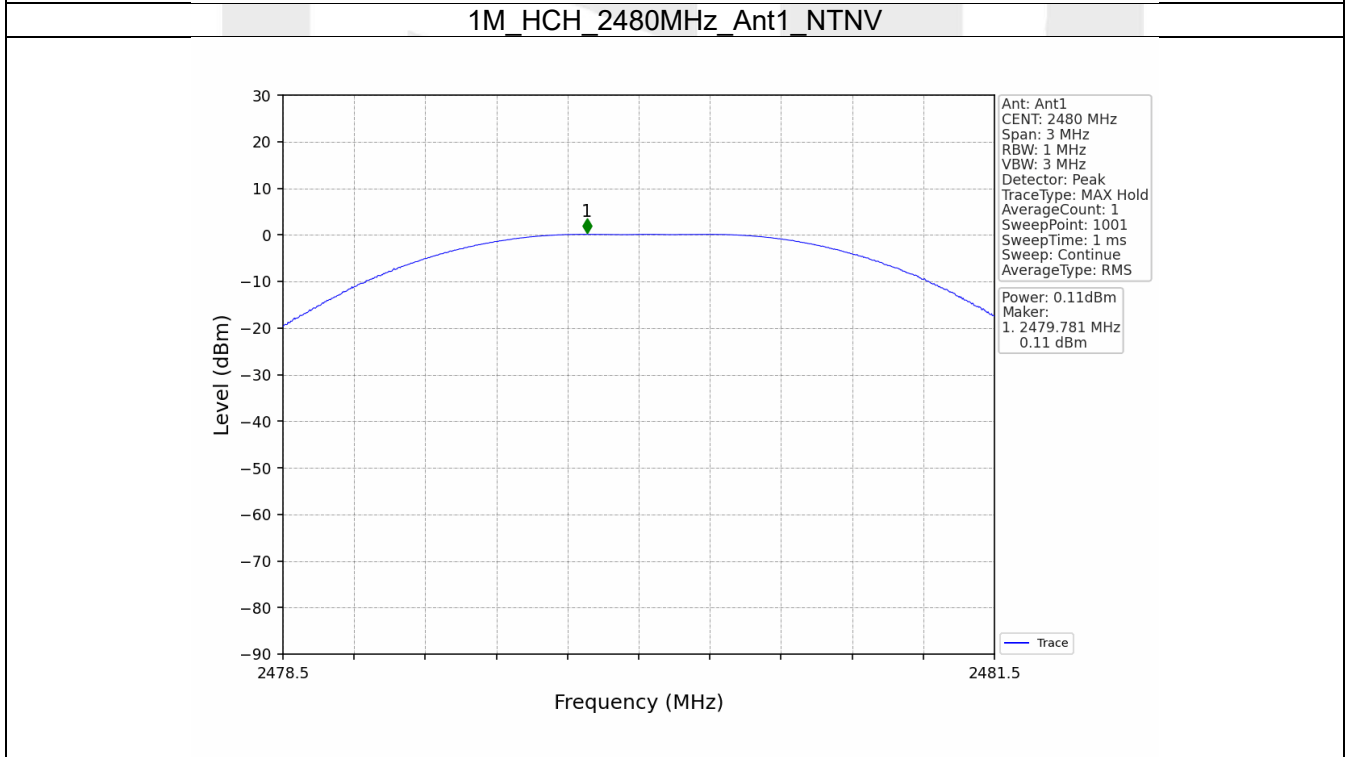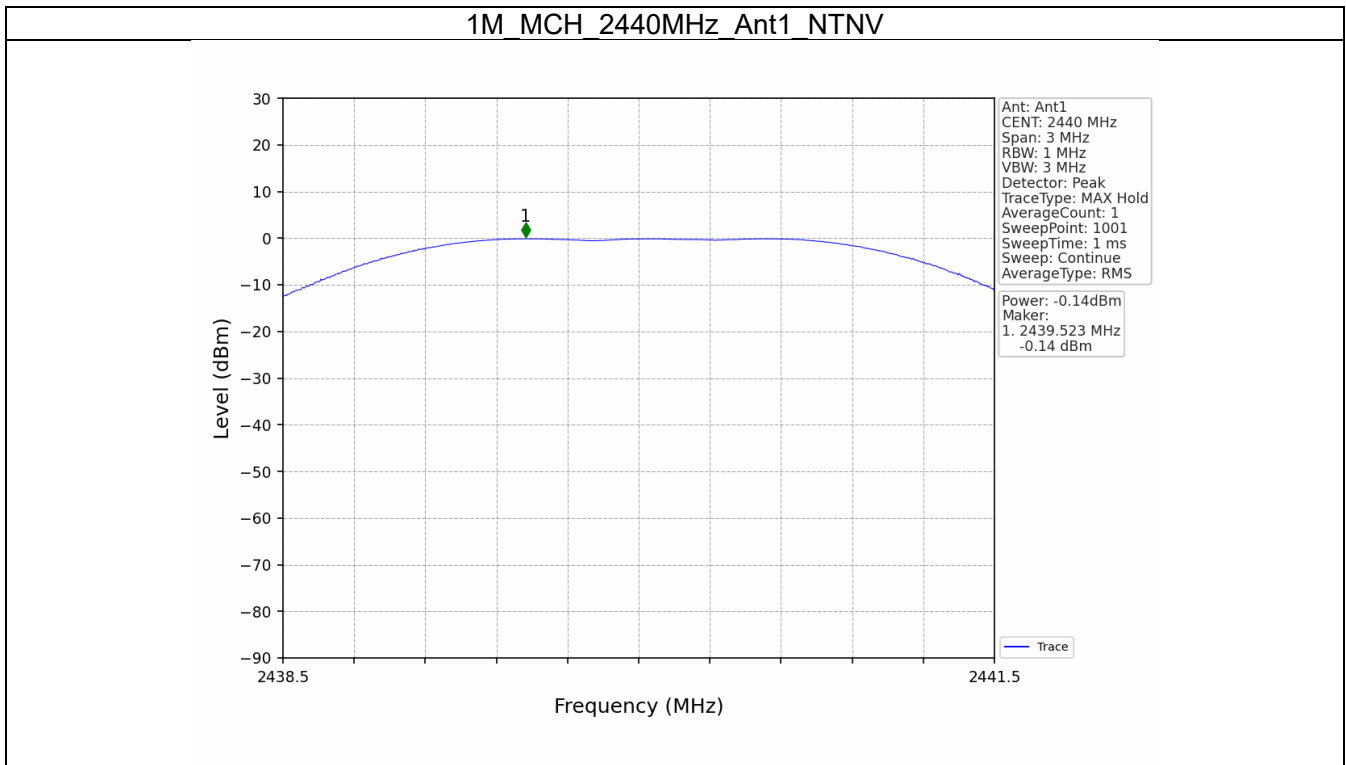

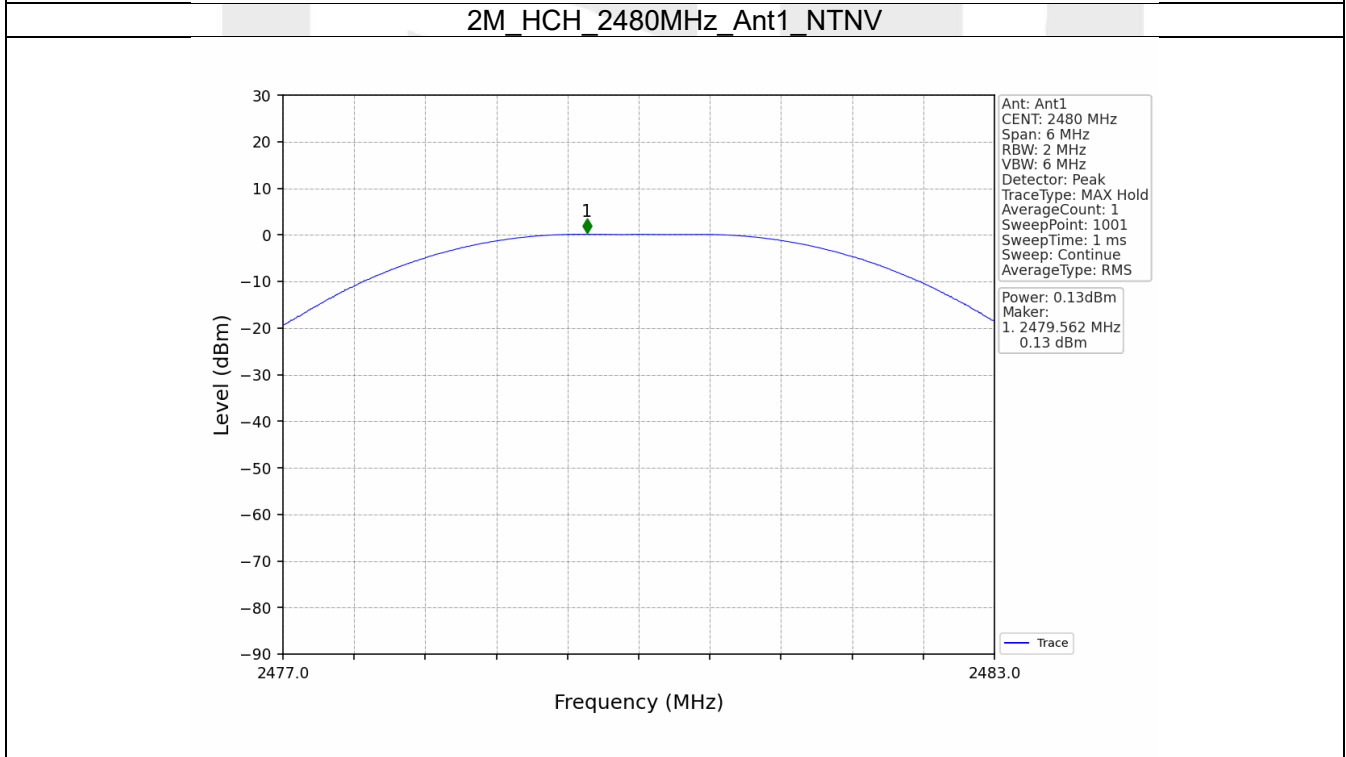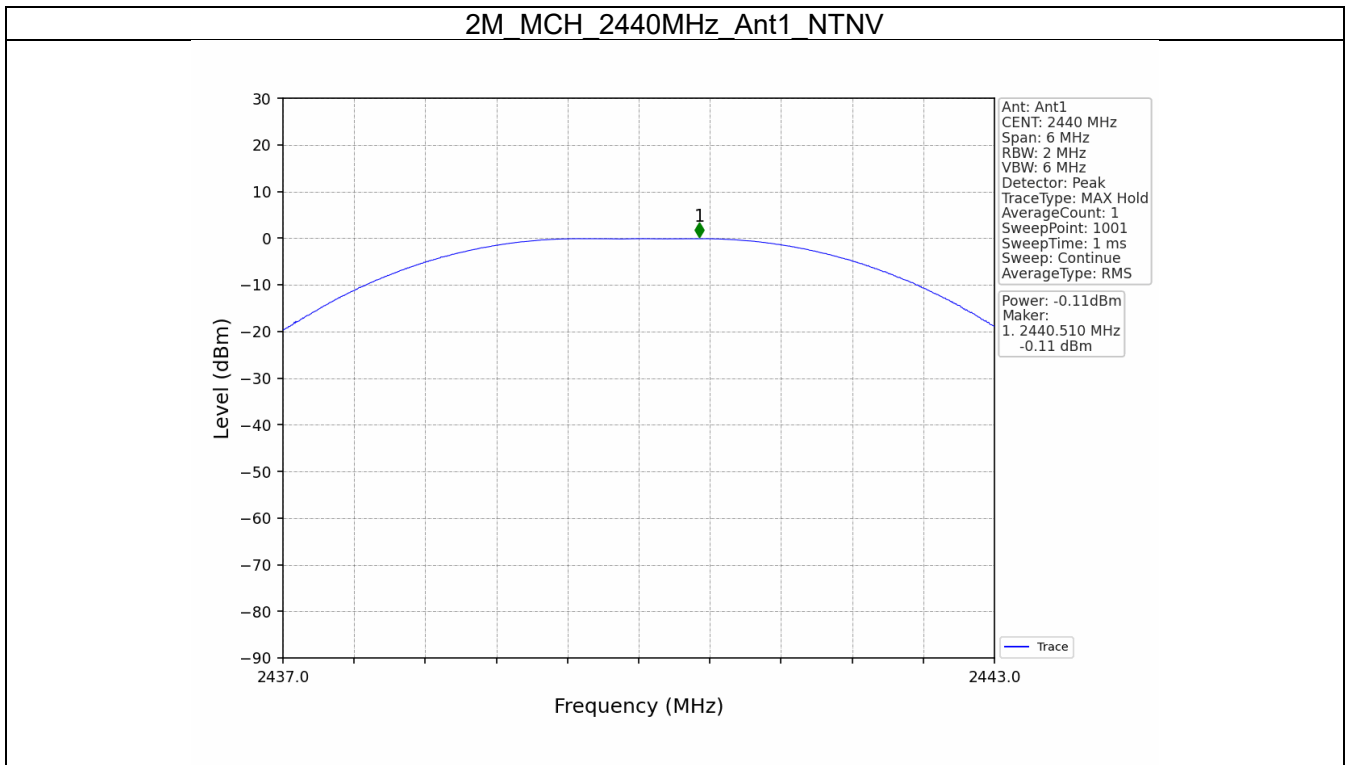

4. Maximum Power Spectral Density


4.1 PSD



4.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-17.80	<=8	Pass
2M	SISO	2402	-20.11	<=8	Pass
1M	SISO	2440	-17.56	<=8	Pass
		2480	-17.27	<=8	Pass
2M	SISO	2440	-19.75	<=8	Pass
		2480	-19.58	<=8	Pass

Note1: Antenna Gain: Ant1: 4.30dBi;

4.1.2 Test Graph

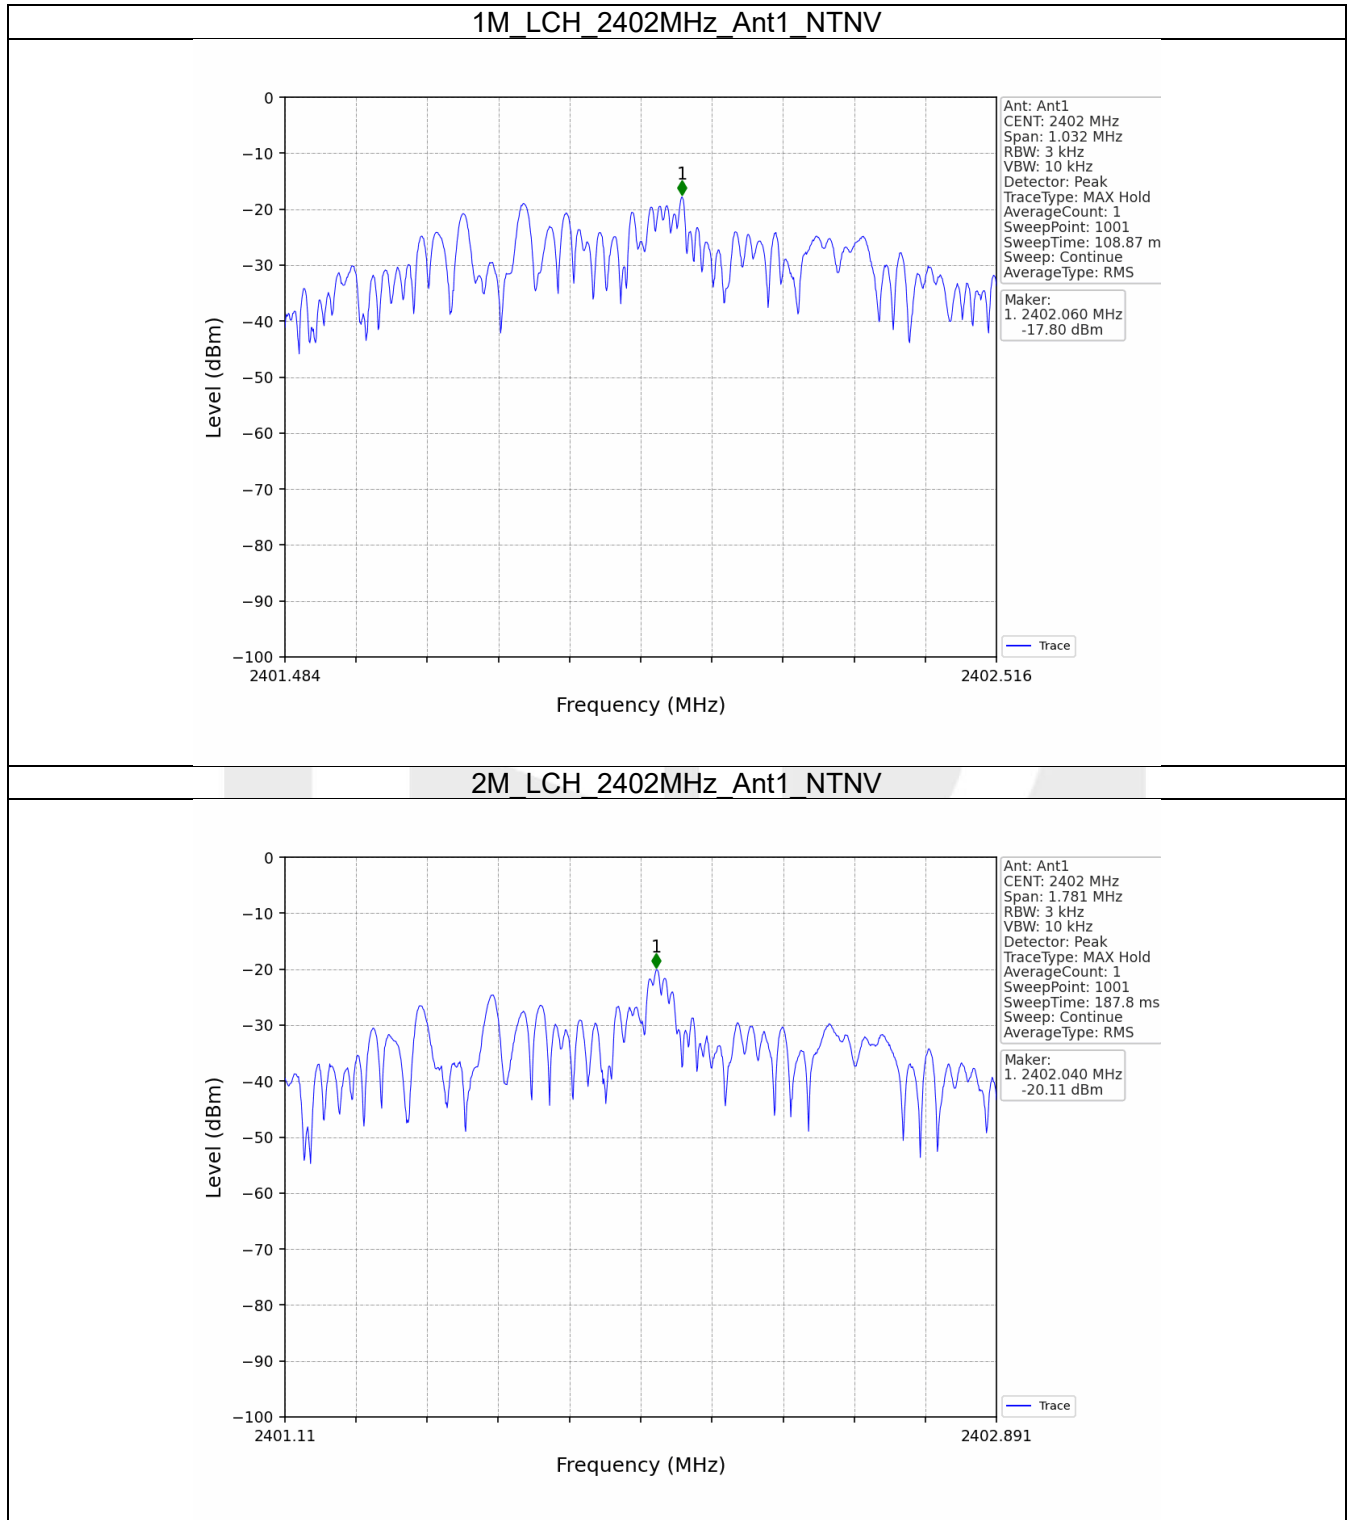

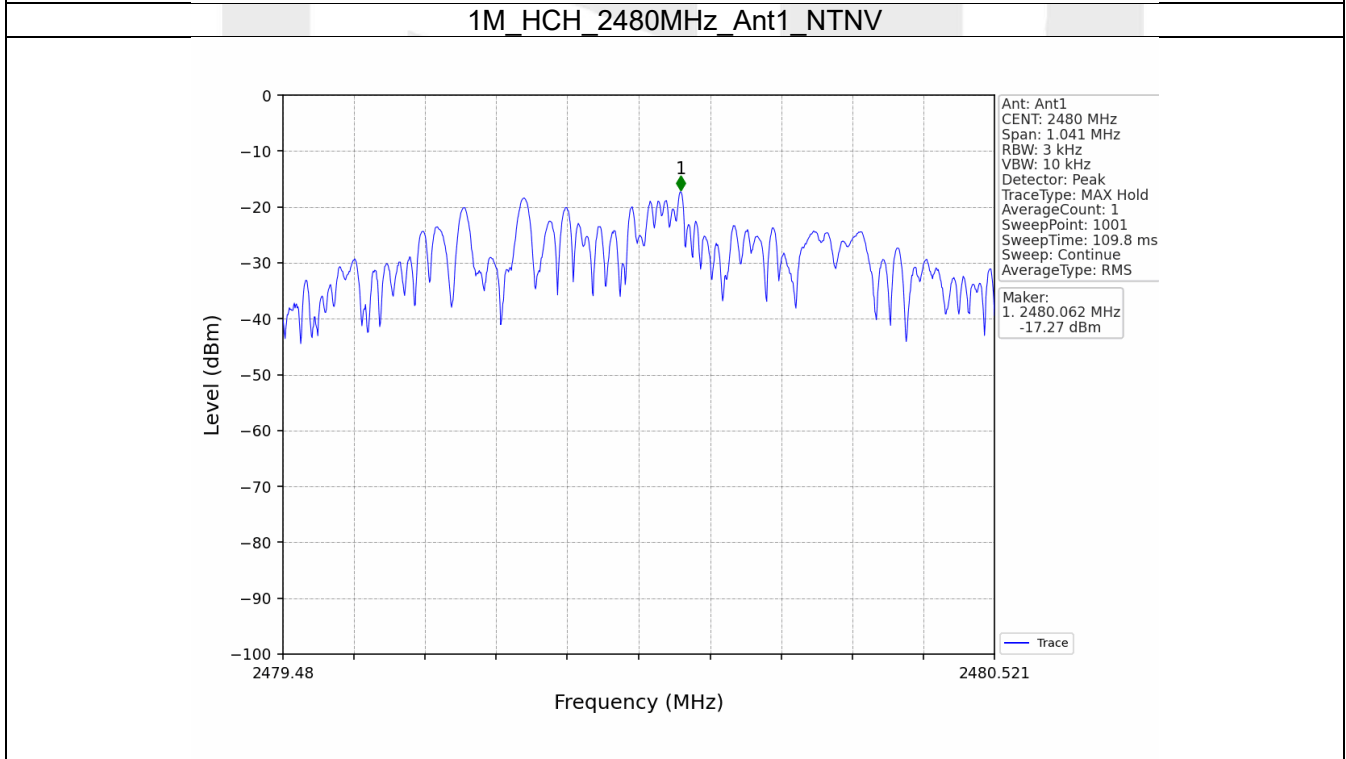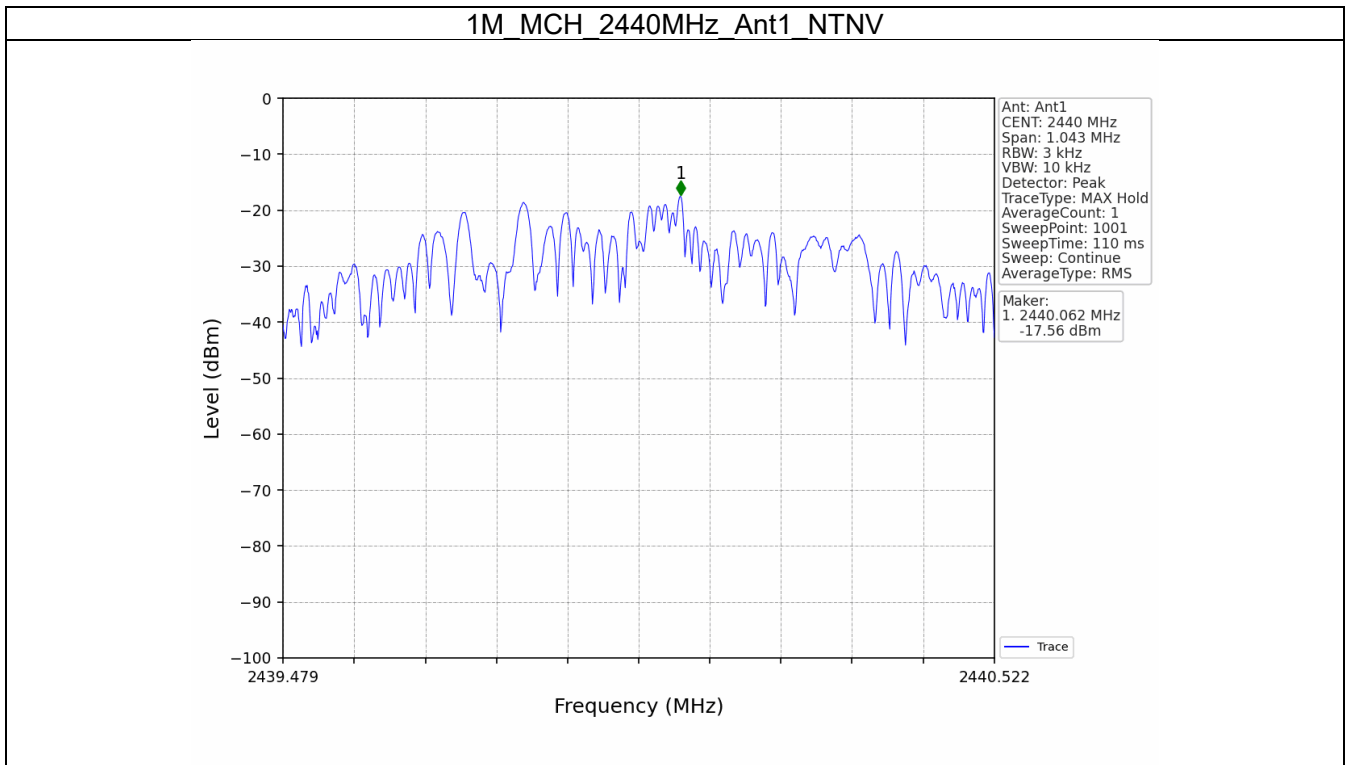

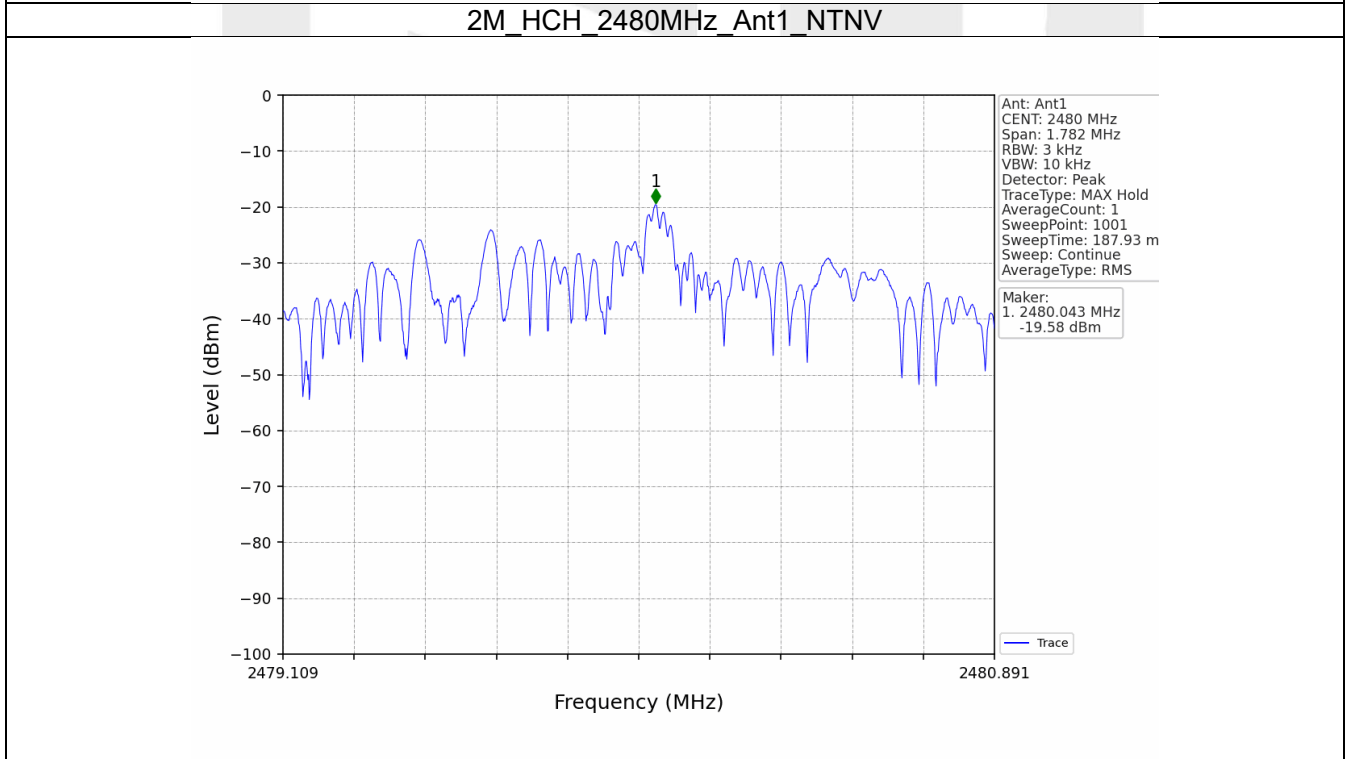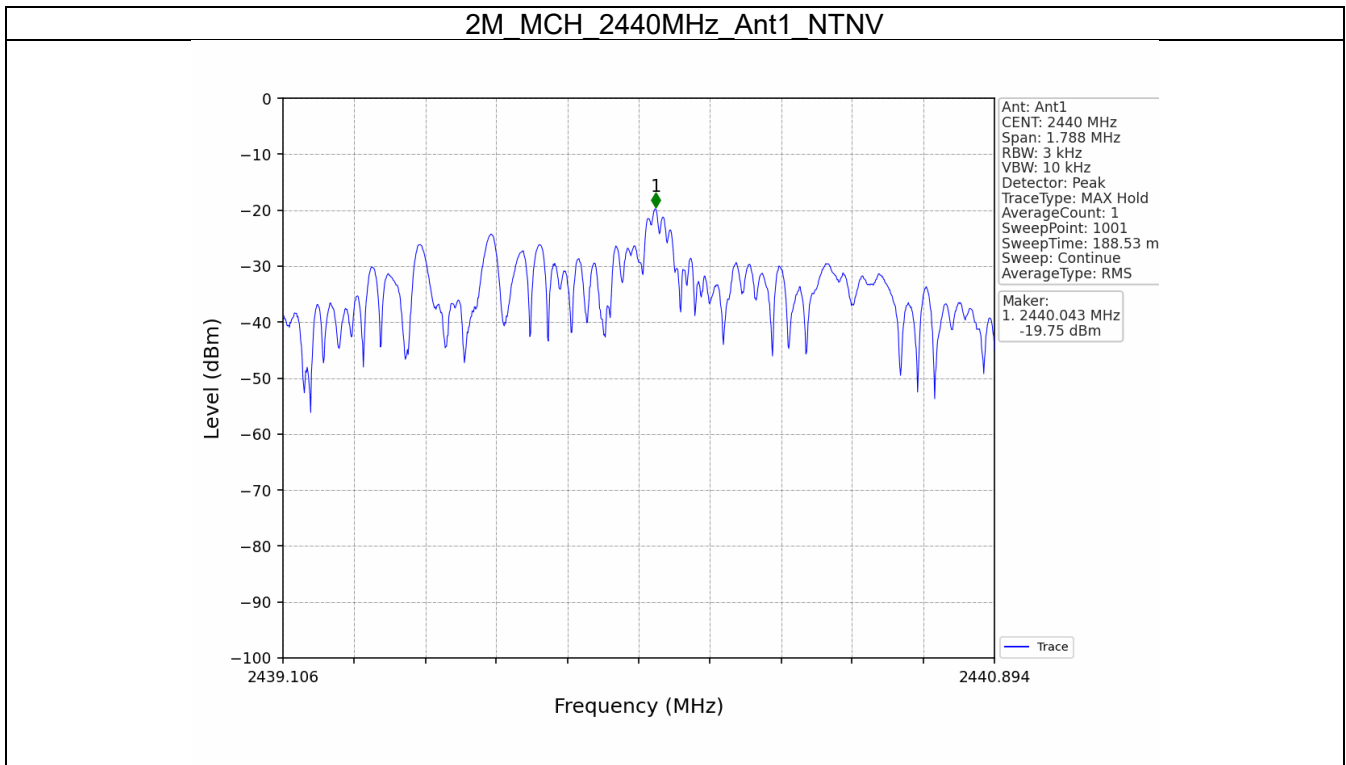

5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref



5.1.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-0.49
2M	SISO	2402	1	-0.50
1M	SISO	2440	1	-0.17
		2480	1	0.07
2M	SISO	2440	1	-0.17
		2480	1	0.06

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 Test Graph

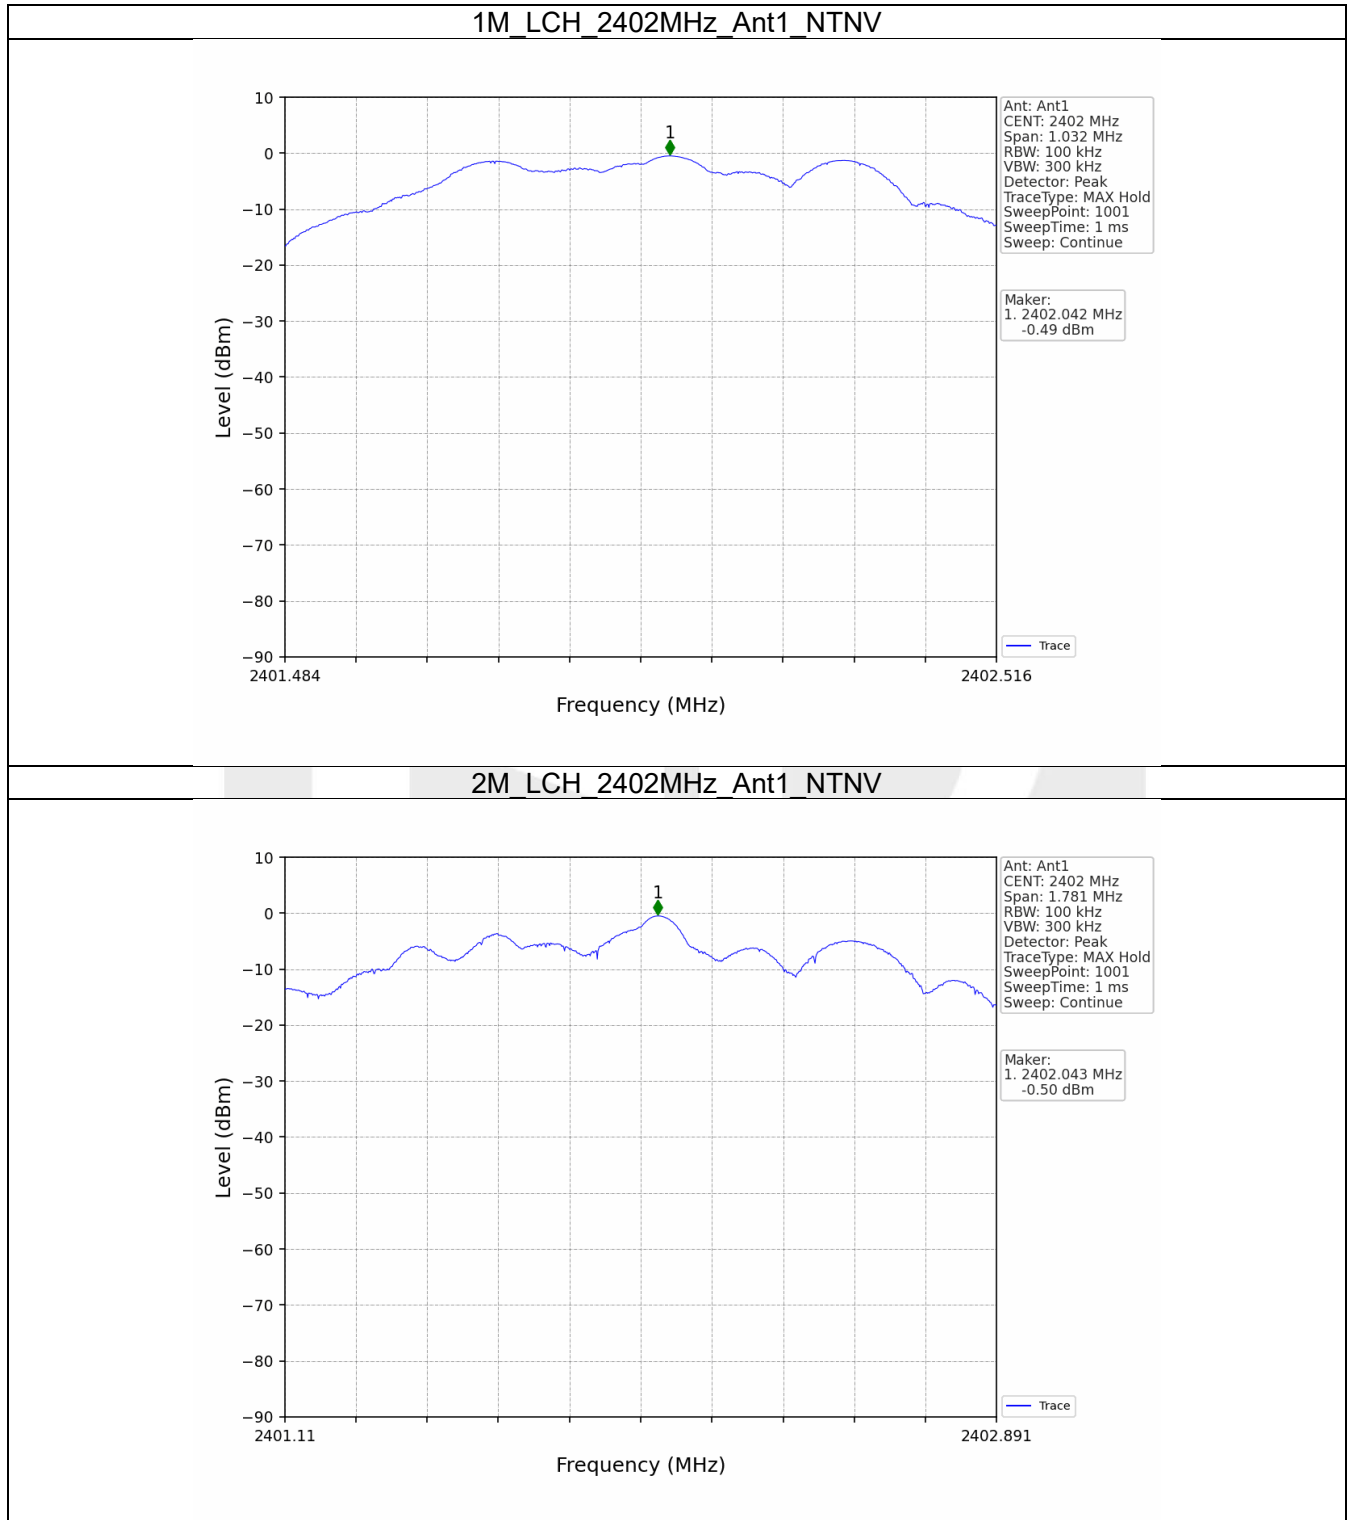

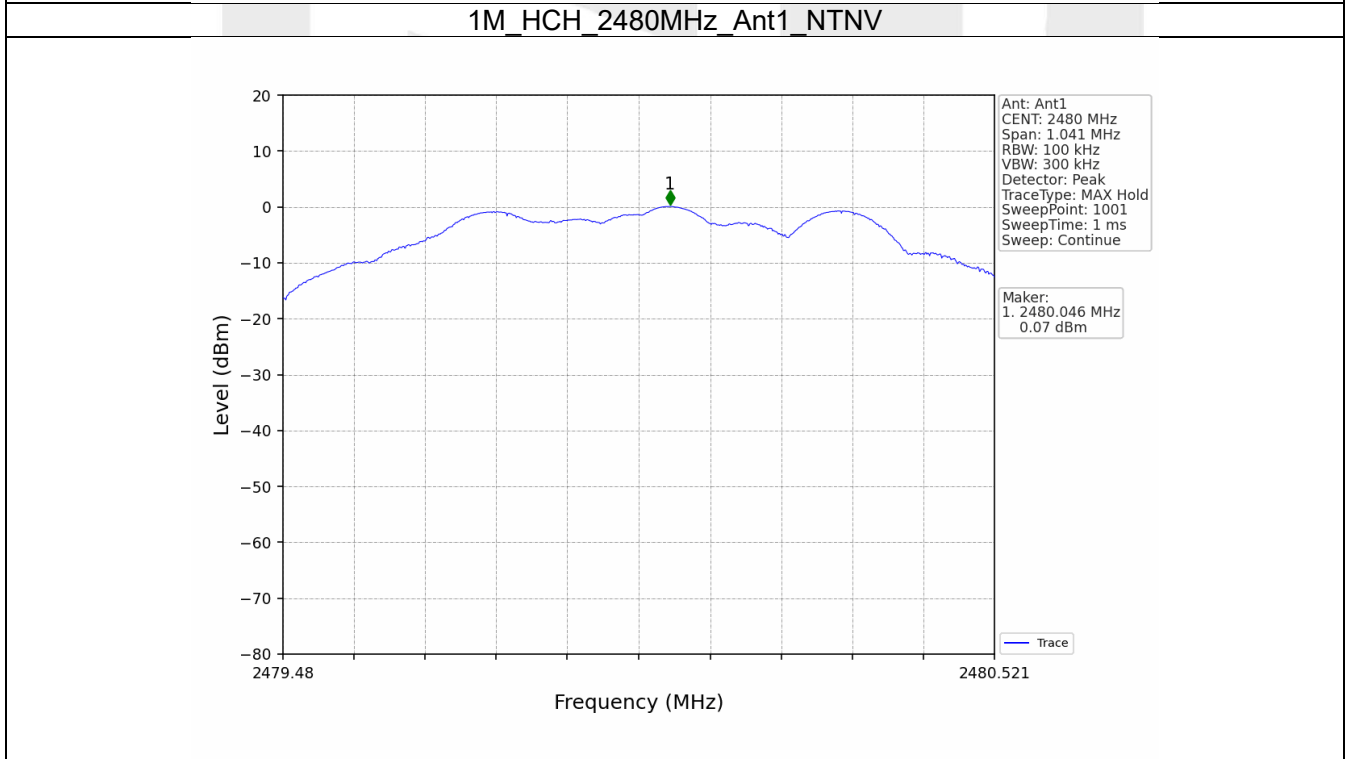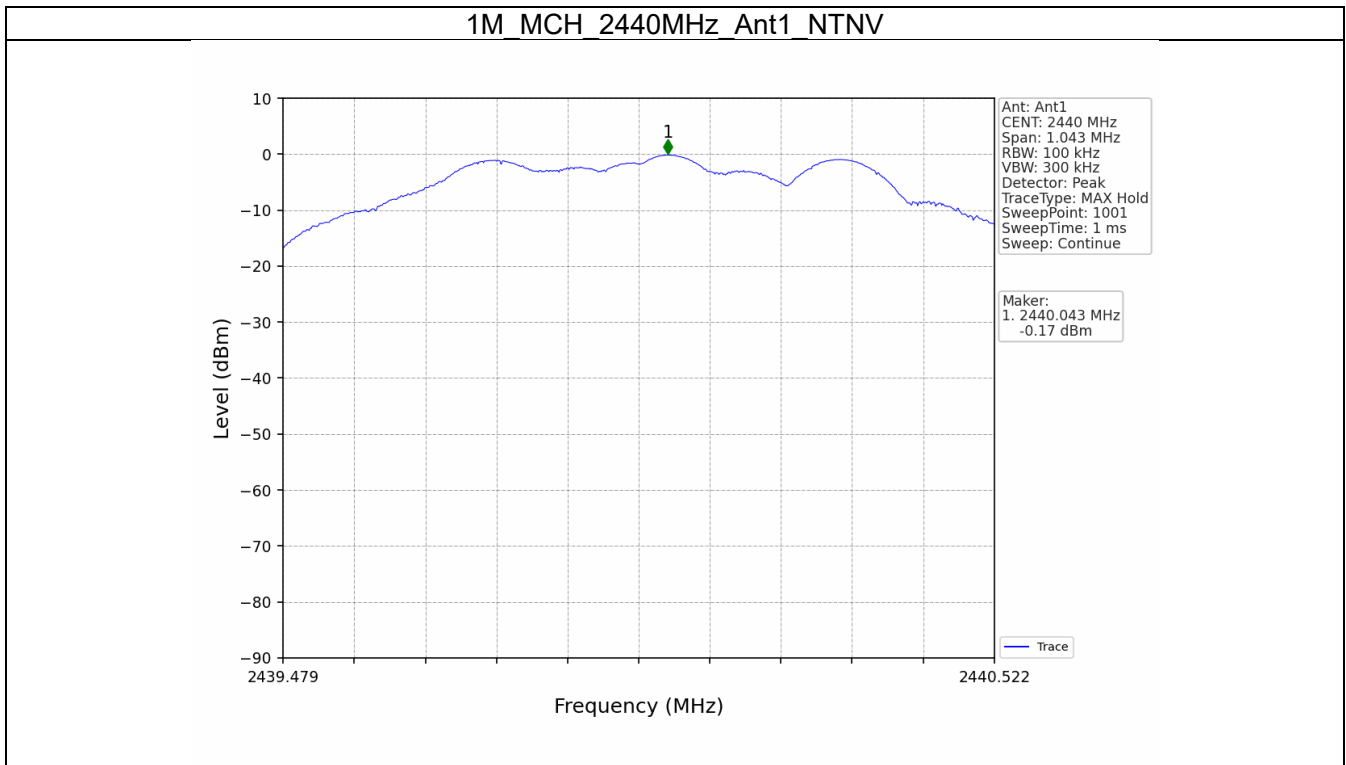

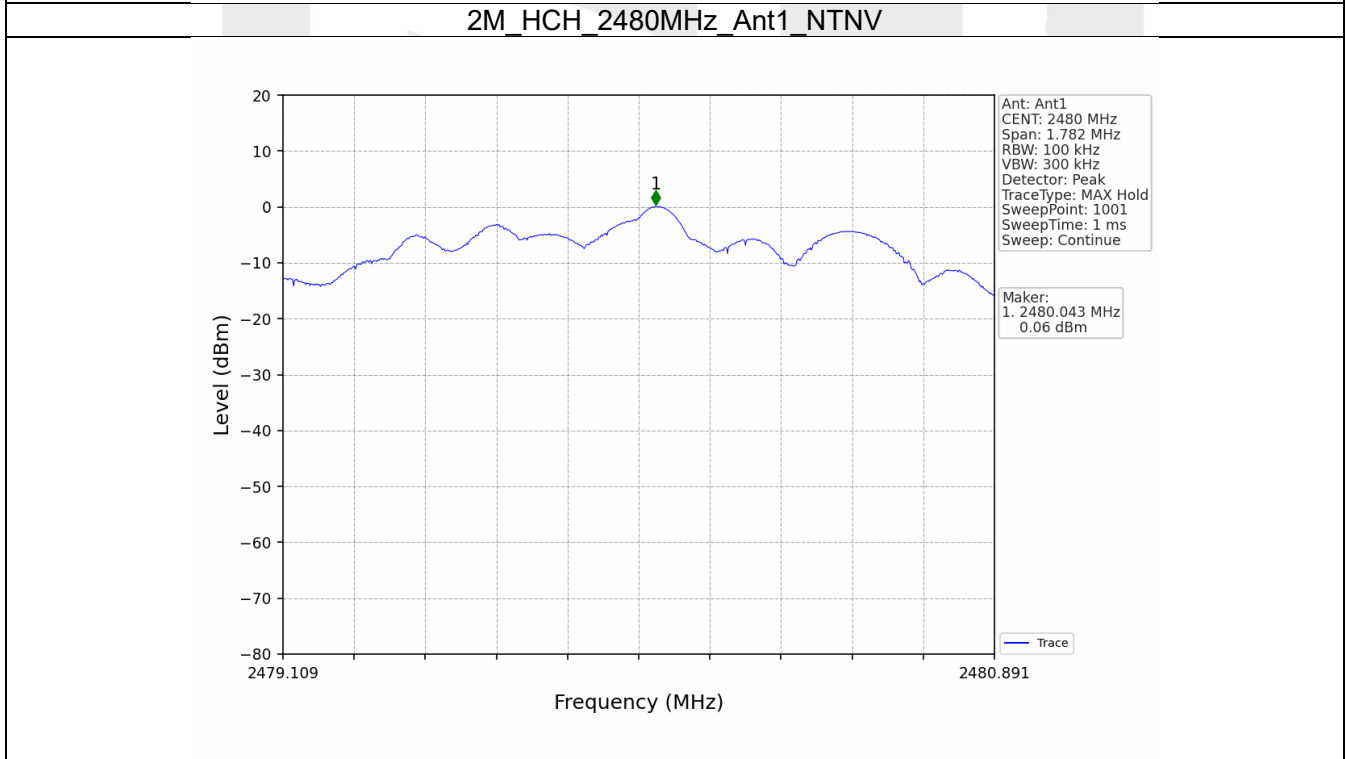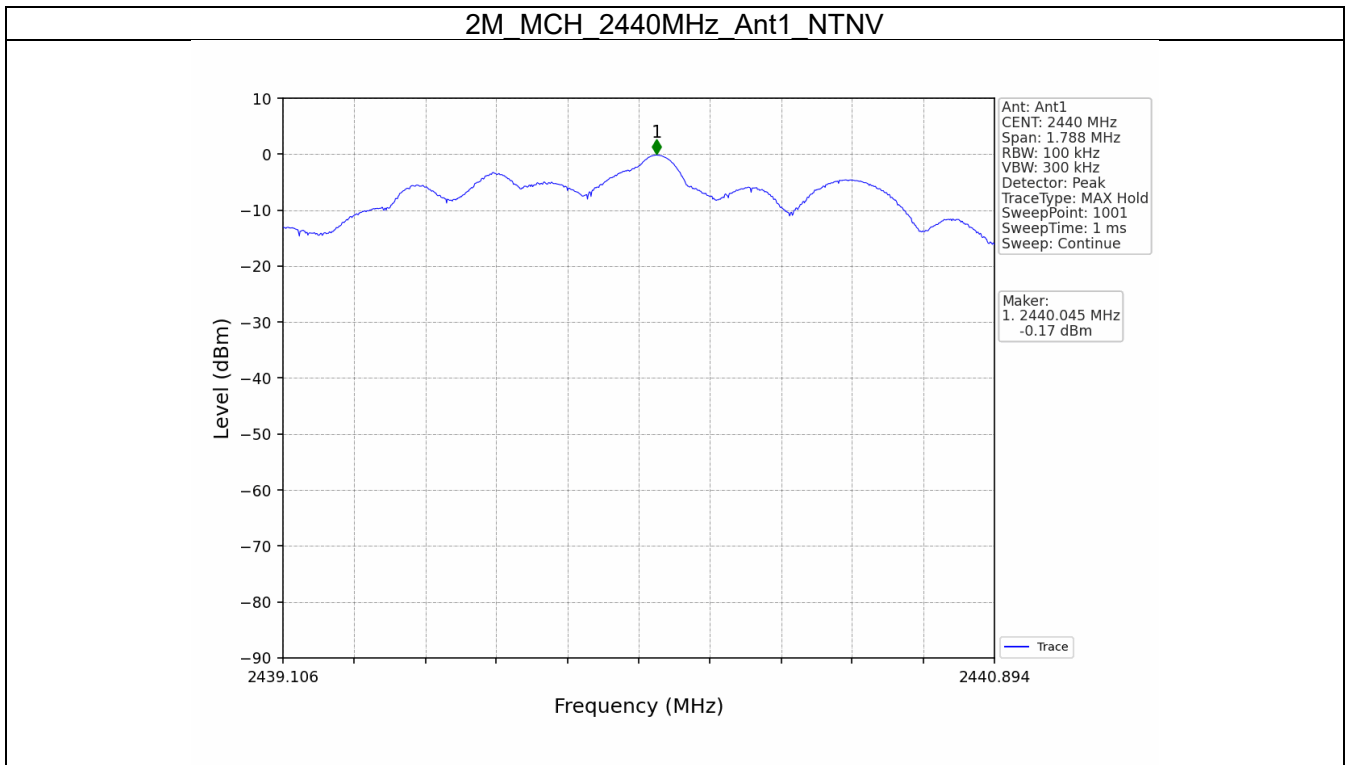

5.2 CSE


5.2.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	0.07	-19.93	Pass
2M	SISO	2402	1	0.06	-19.94	Pass
1M	SISO	2440	1	0.07	-19.93	Pass
		2480	1	0.07	-19.93	Pass
2M	SISO	2440	1	0.06	-19.94	Pass
		2480	1	0.06	-19.94	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.







5.2.2 Test Graph

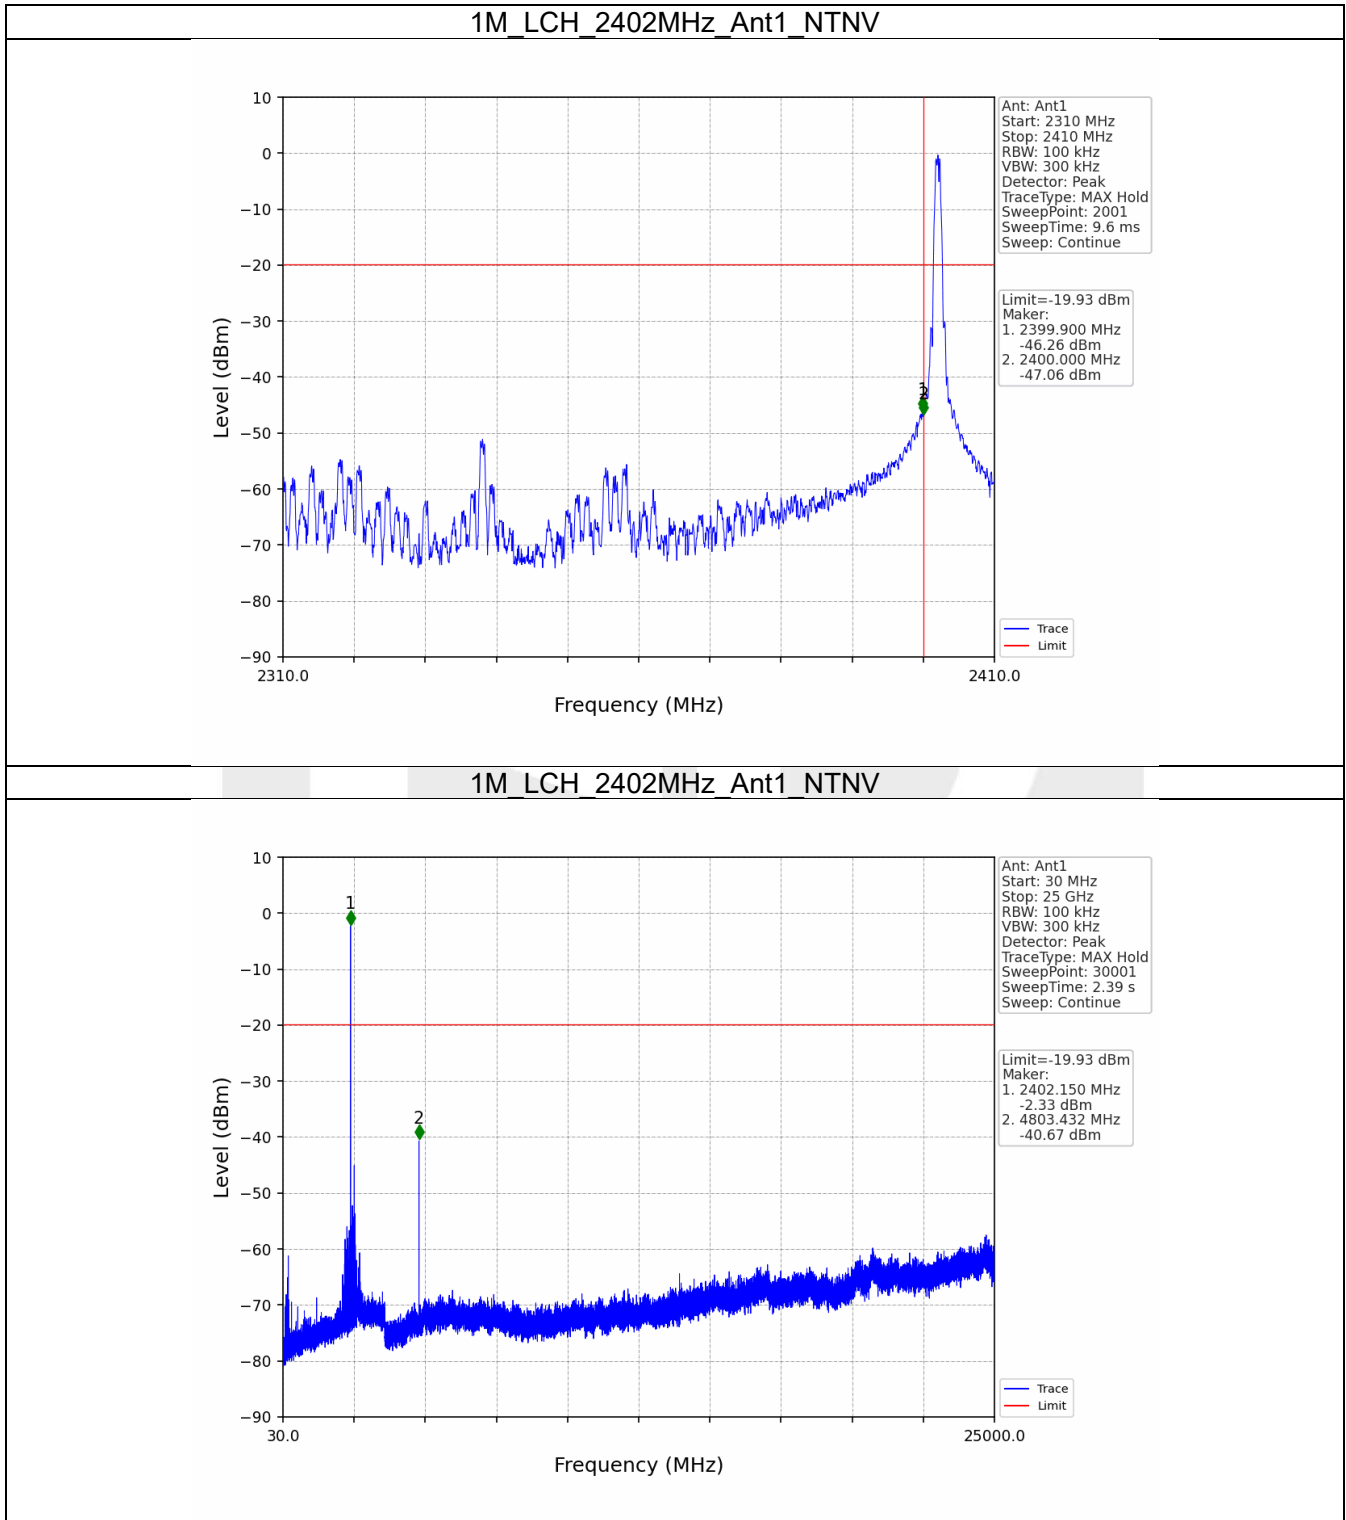

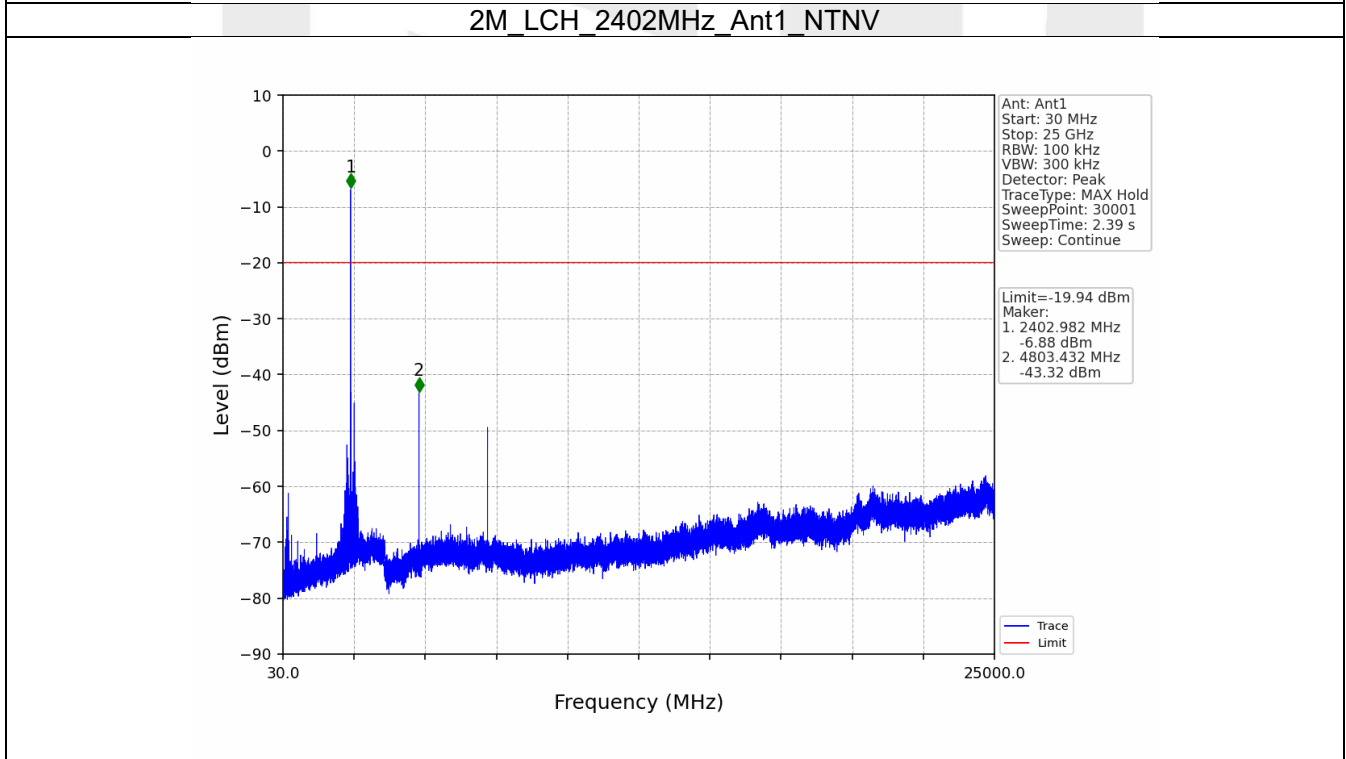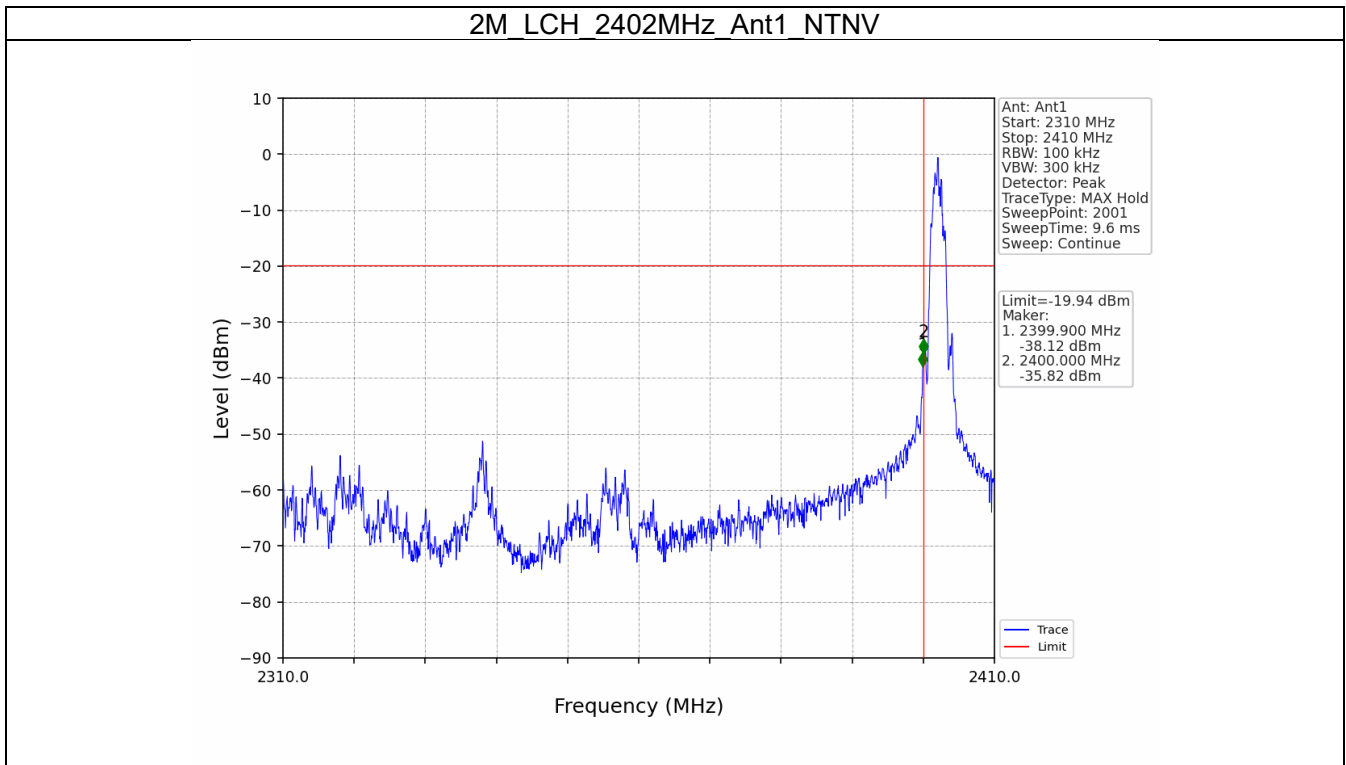

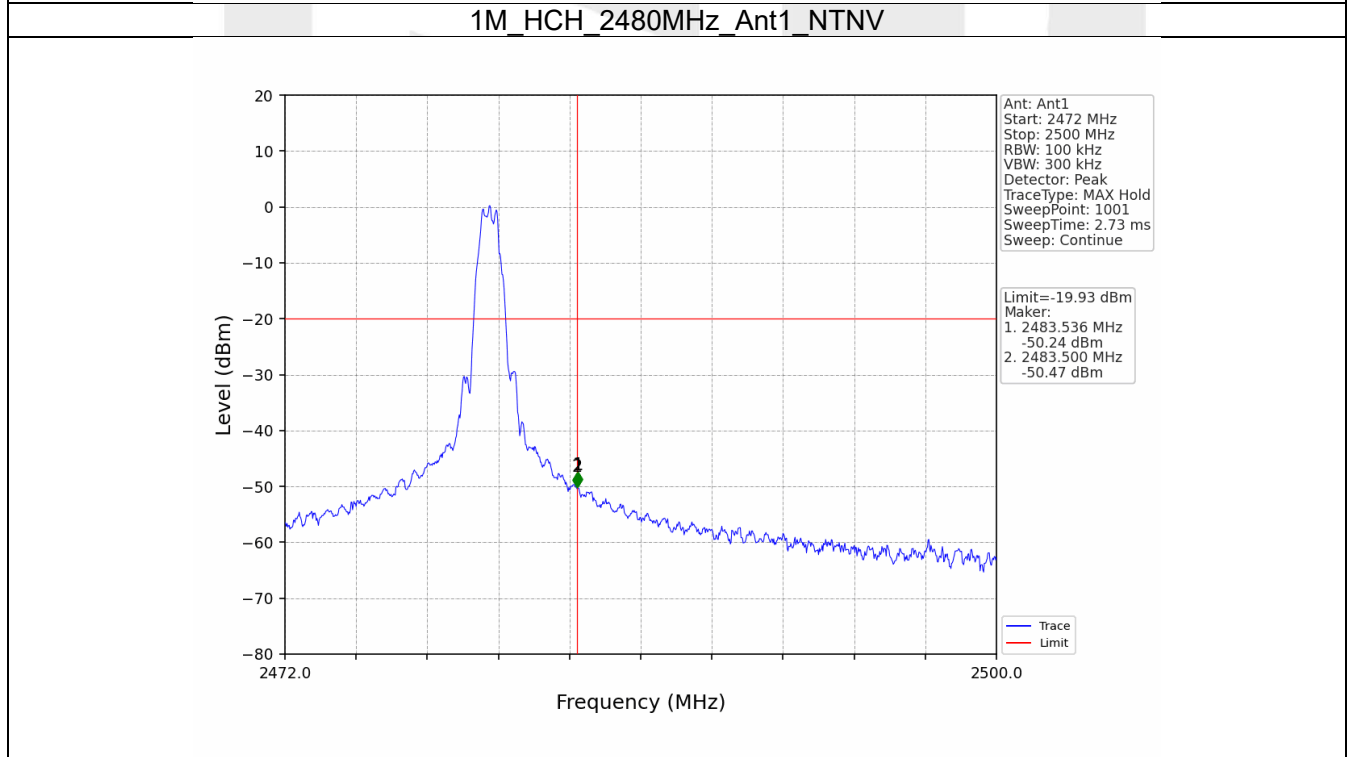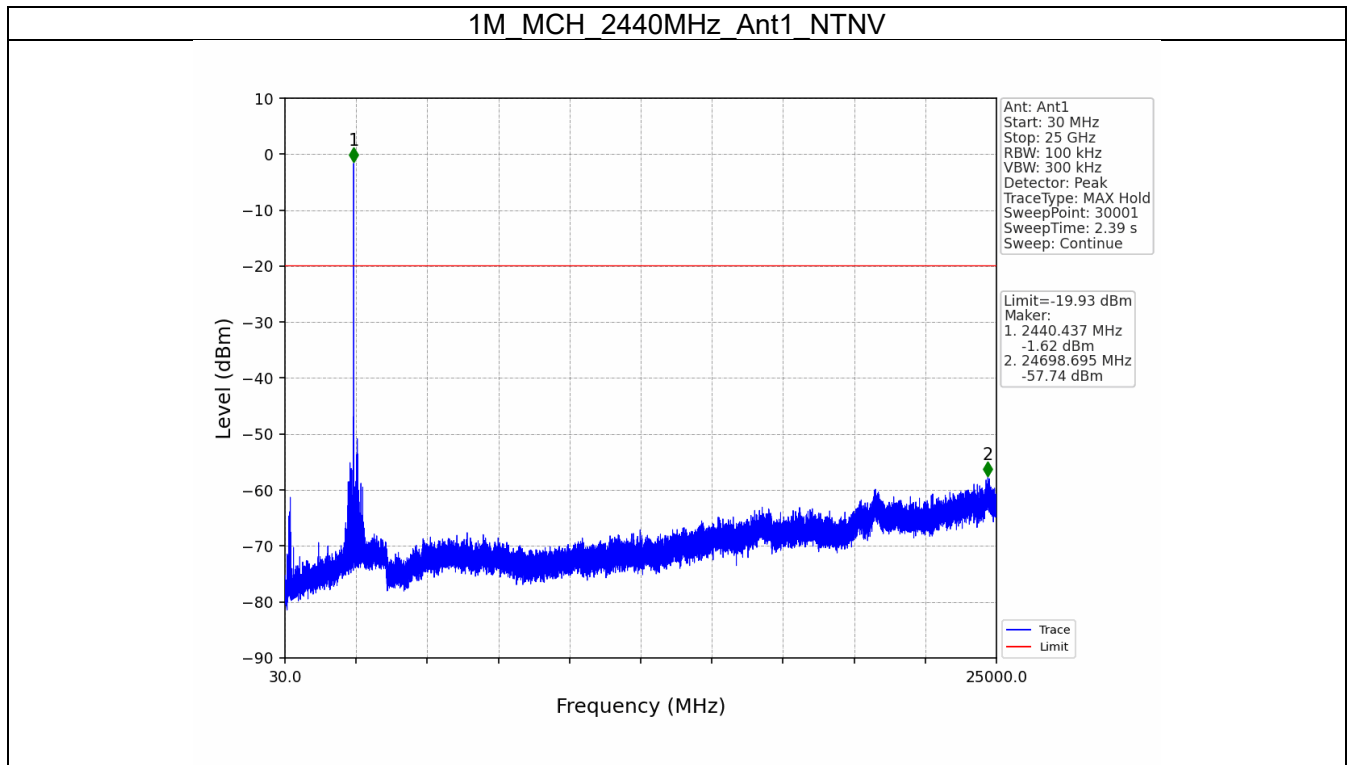

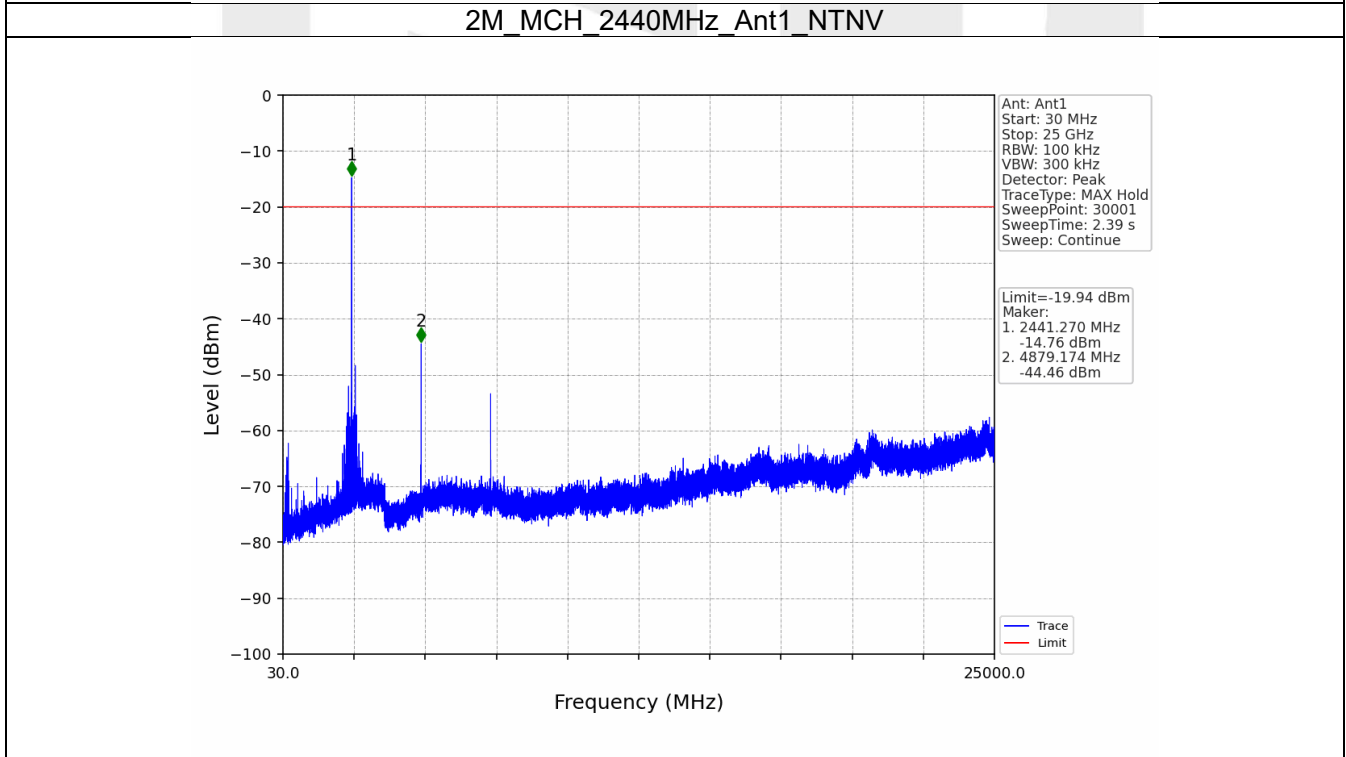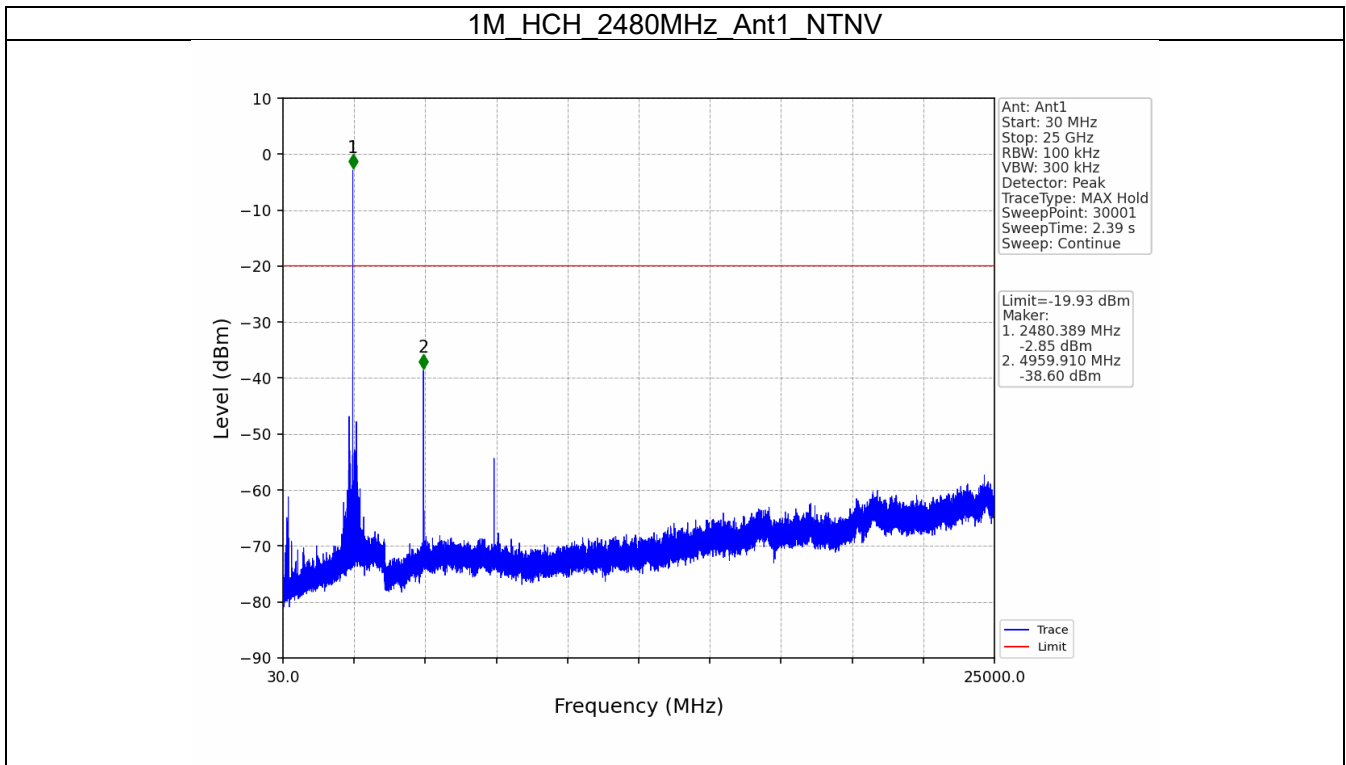

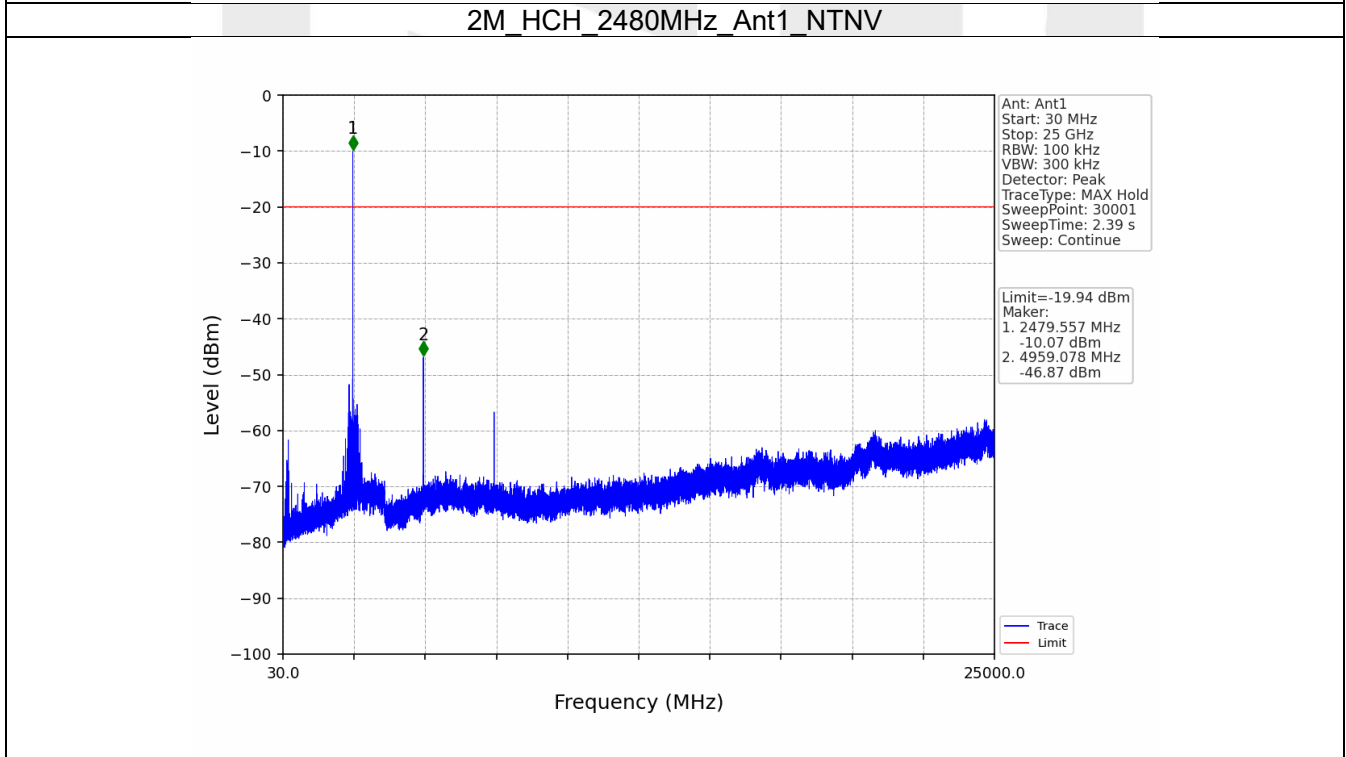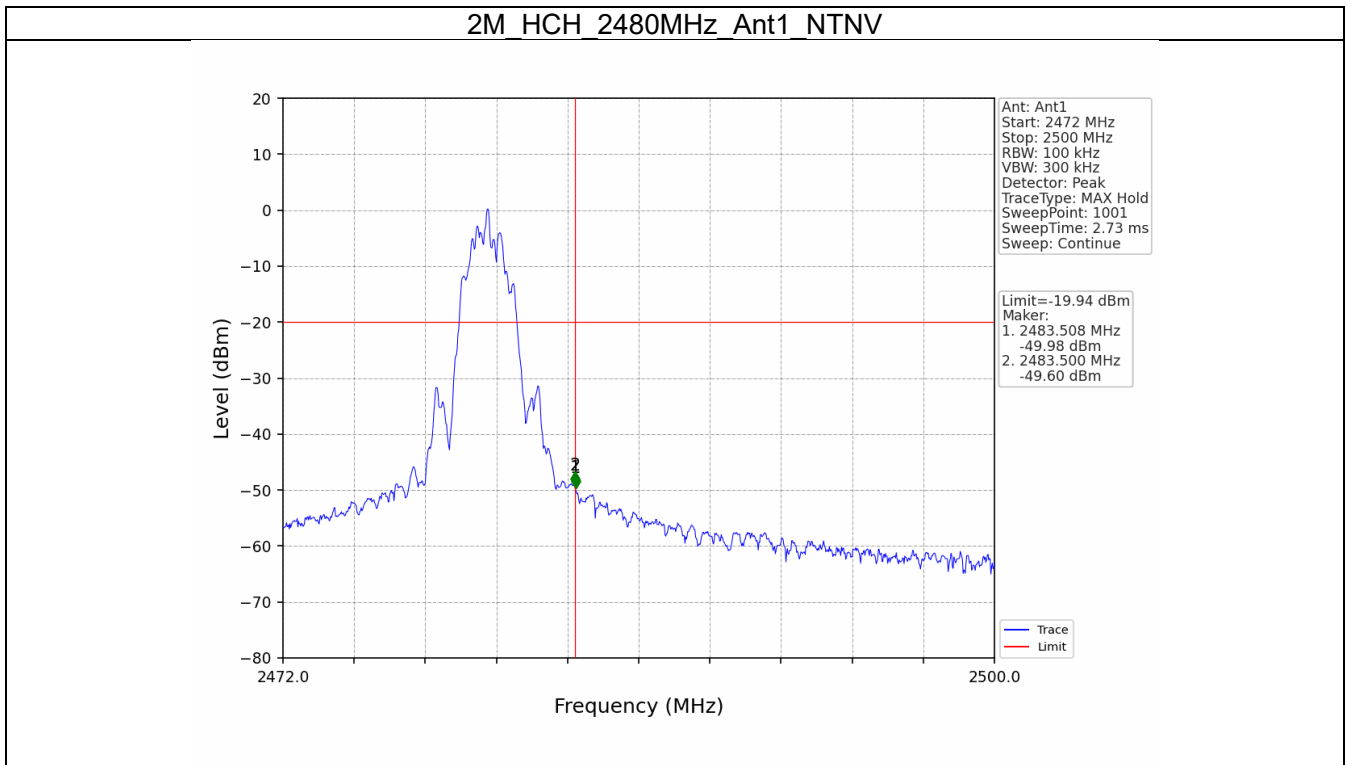

----- End of Report -----