


ANNEX D TEST DATA

For

Project No.:	8132EU012106W
Client:	Shenzhen Mofhie Wireless Charging Technology Co., LTD
Product Description:	Smart FindTag MT2
Model No.:	MT2
FCC ID:	2BCZZ-MT2
Technology:	Bluetooth BLE
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2023-11-03

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Maximum Power Spectral Density	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass

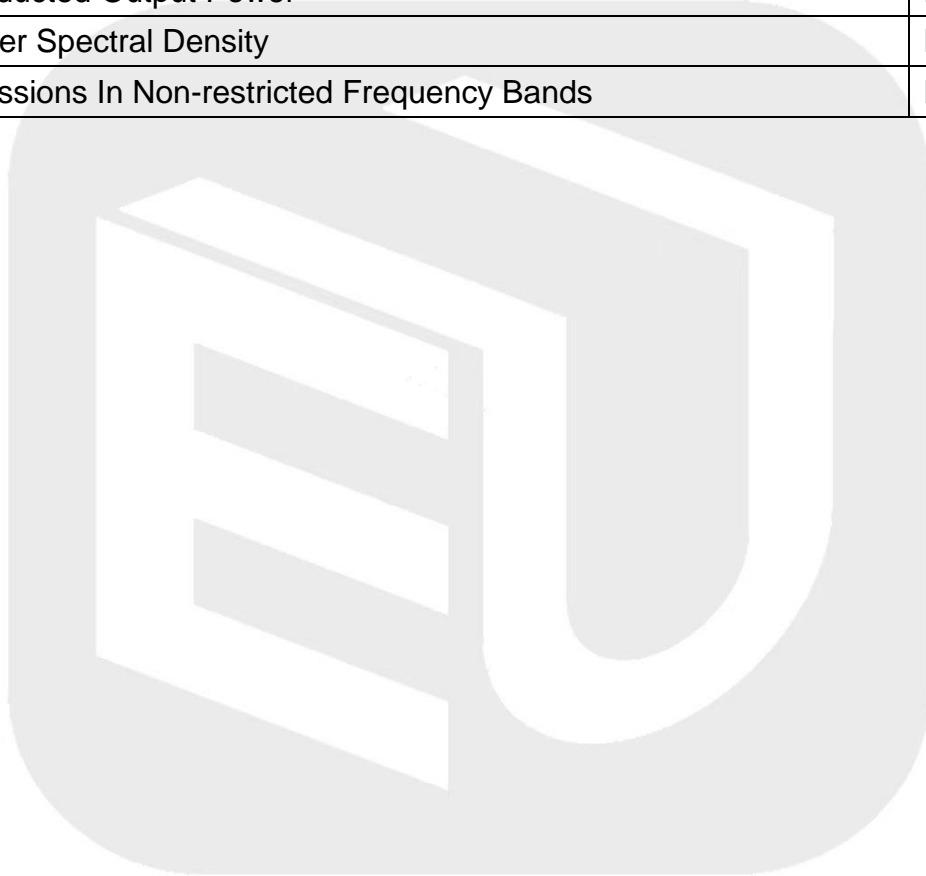


1. Duty Cycle



1.1 Ant1



1.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.396	0.625	63.36	1.98	0.00
		2440	0.396	0.625	63.36	1.98	0.00
		2480	0.395	0.625	63.20	1.99	0.02
2M	SISO	2402	0.209	0.624	33.49	4.75	0.02
		2440	0.210	0.625	33.60	4.74	0.02
		2480	0.210	0.625	33.60	4.74	0.00

1.1.2 Test Graph

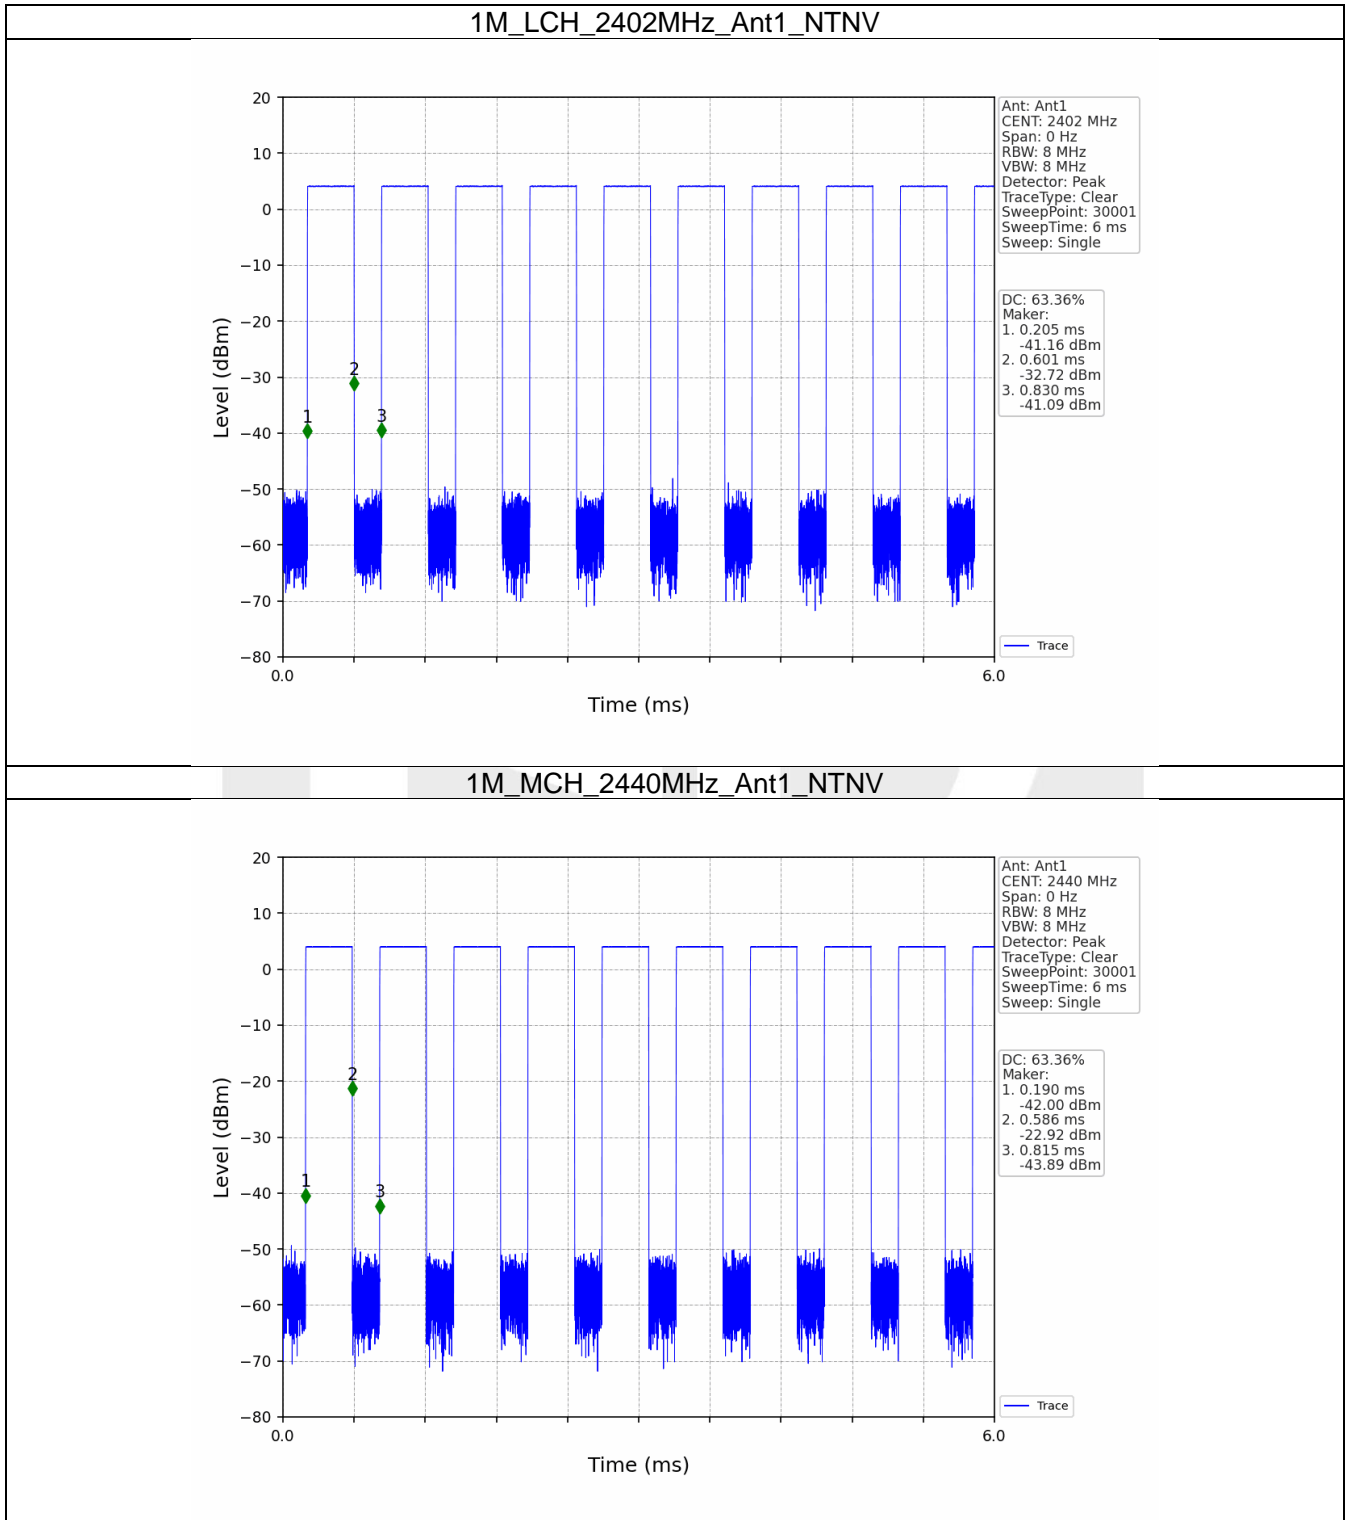

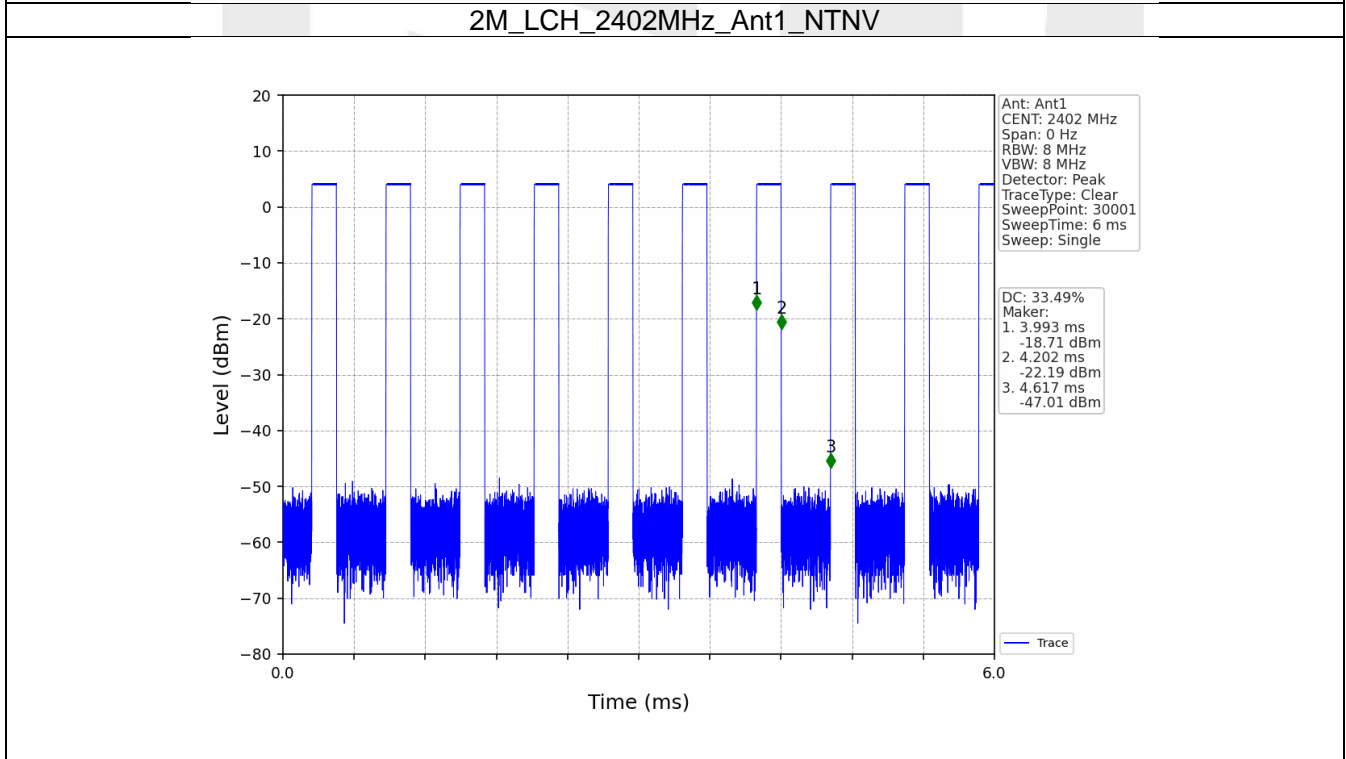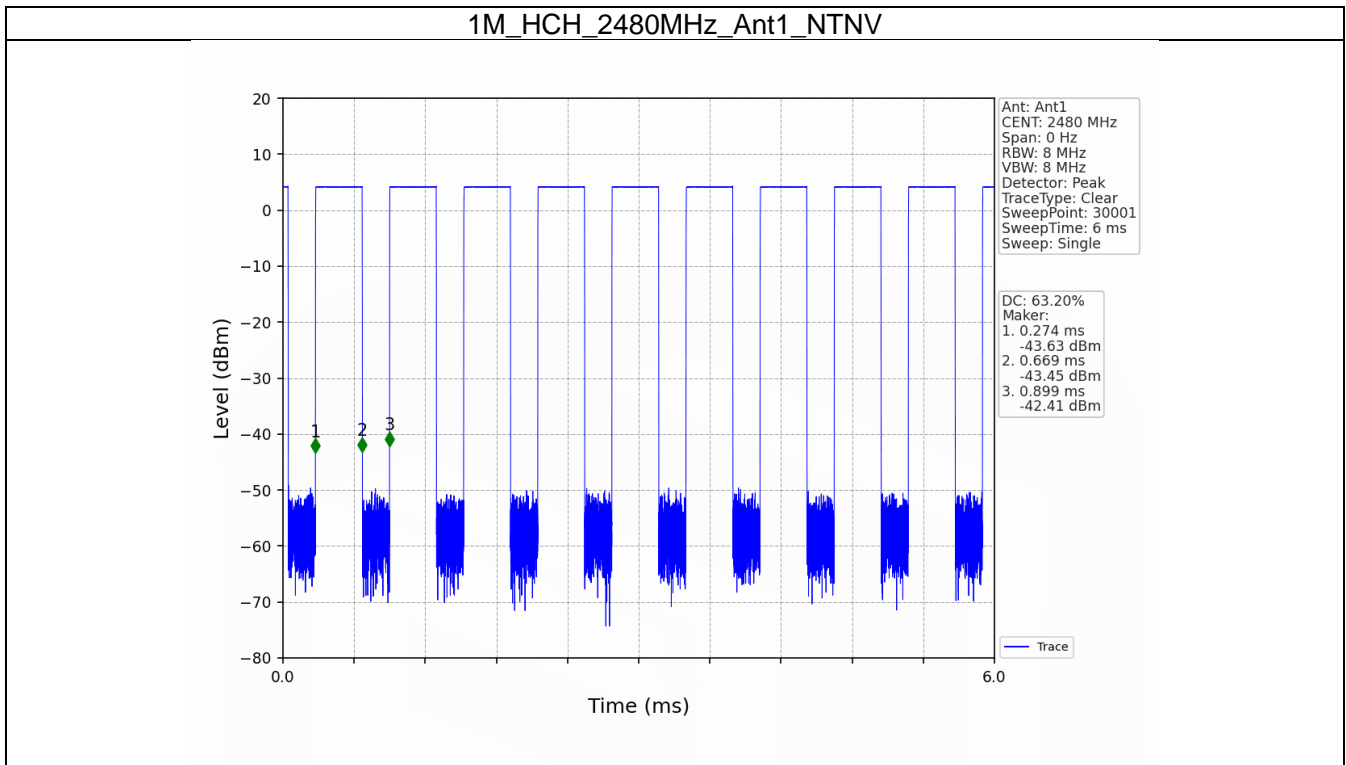

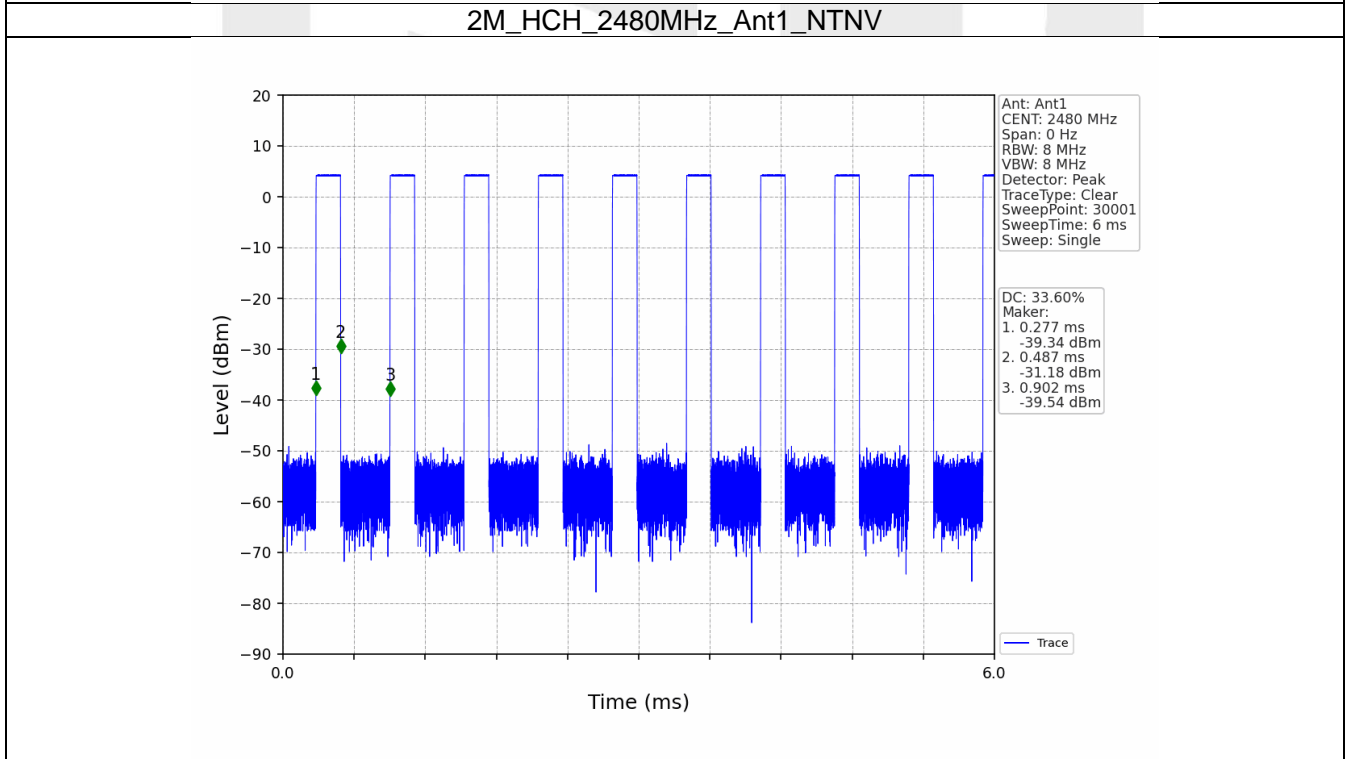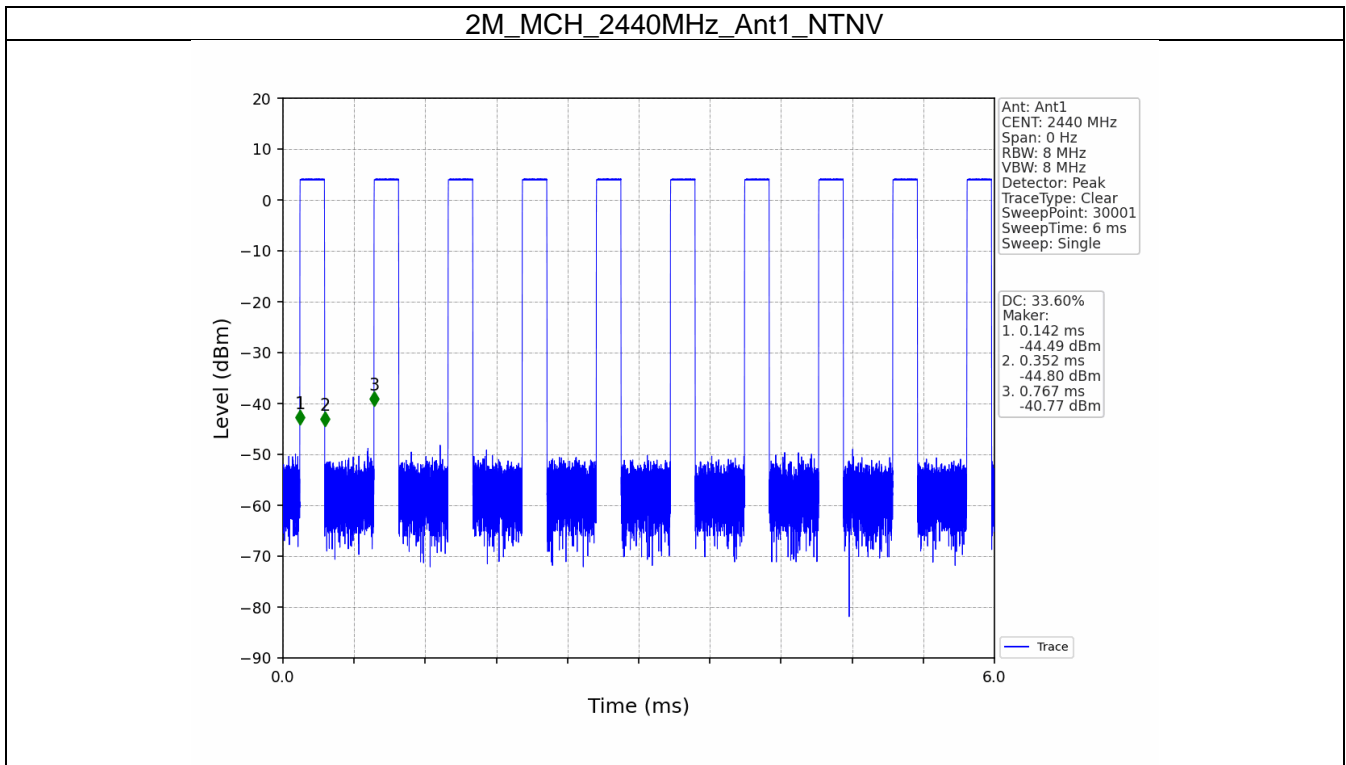


2. Bandwidth



2.1 OBW



2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)	Verdict
				Result	
1M	SISO	2402	1	1.051	Pass
		2440	1	1.052	Pass
		2480	1	1.056	Pass
2M	SISO	2402	1	2.075	Pass
		2440	1	2.073	Pass
		2480	1	2.077	Pass

2.1.2 Test Graph

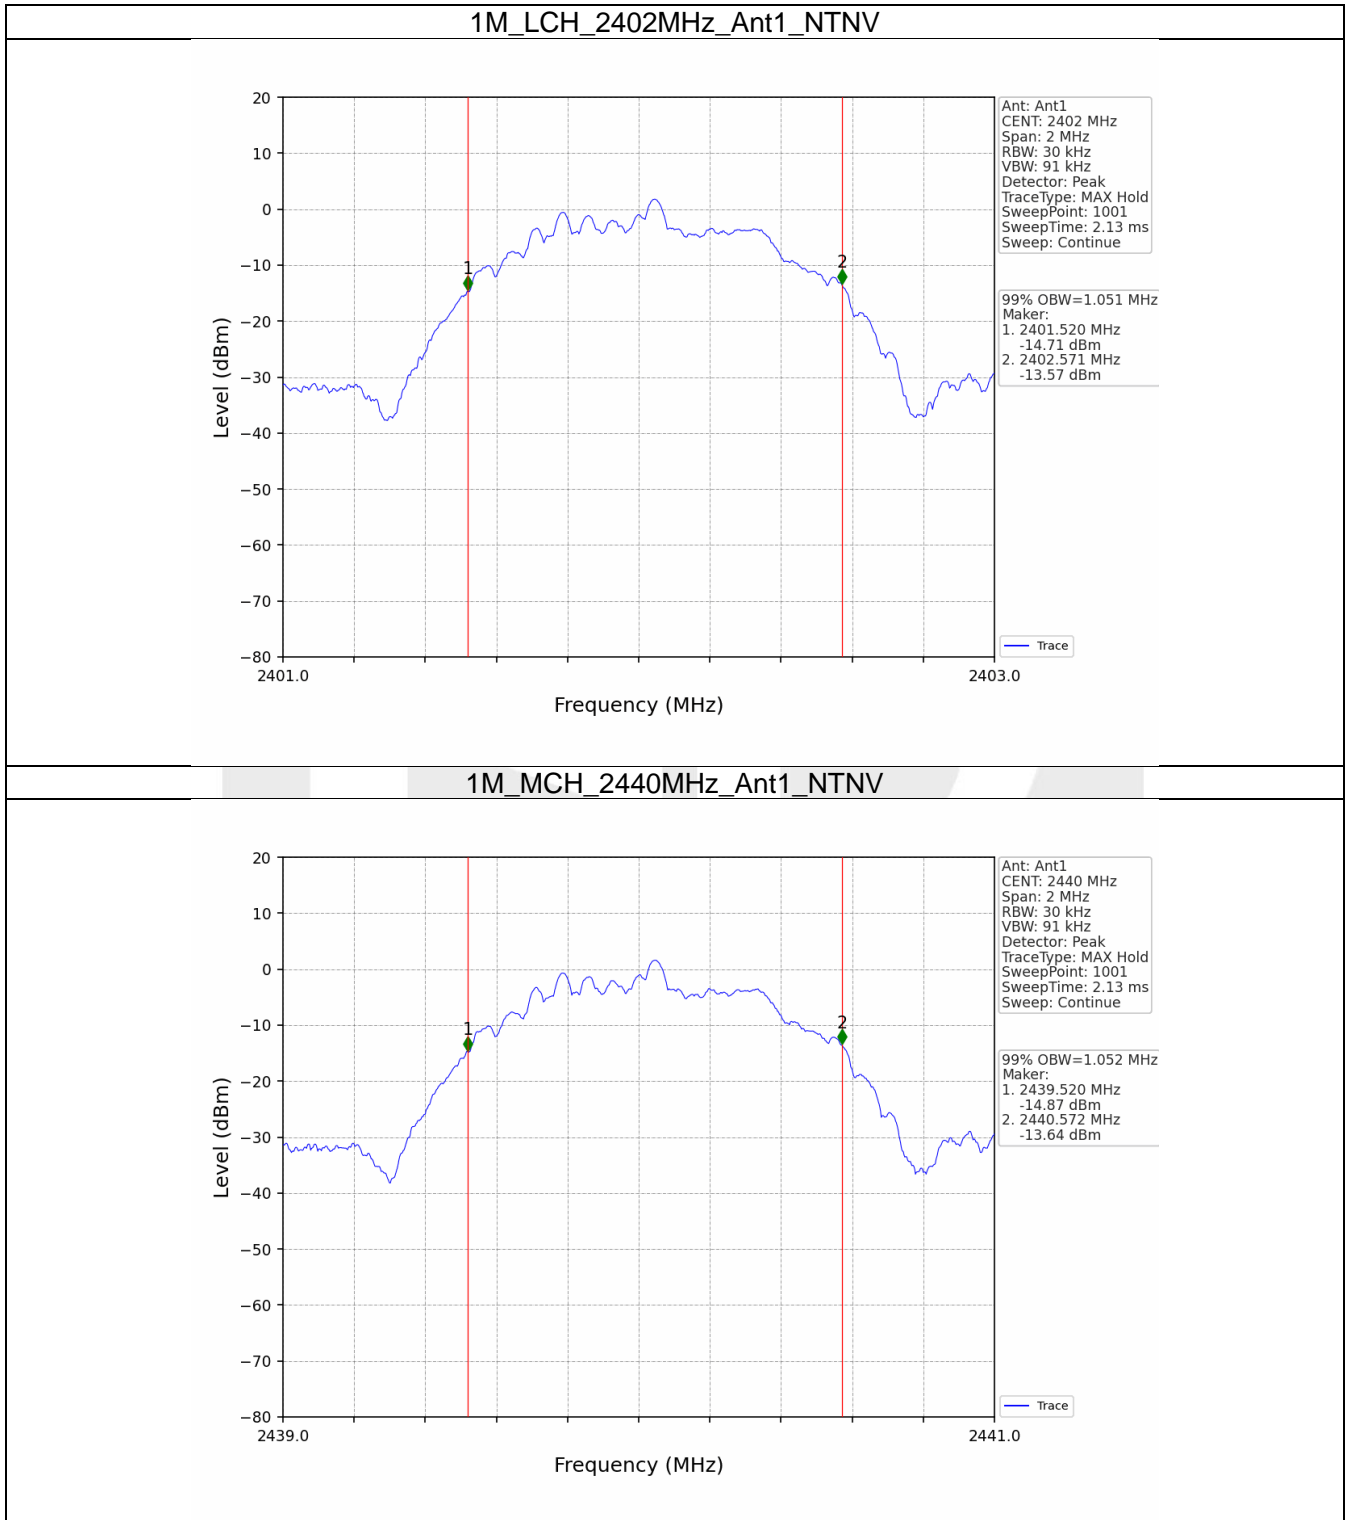

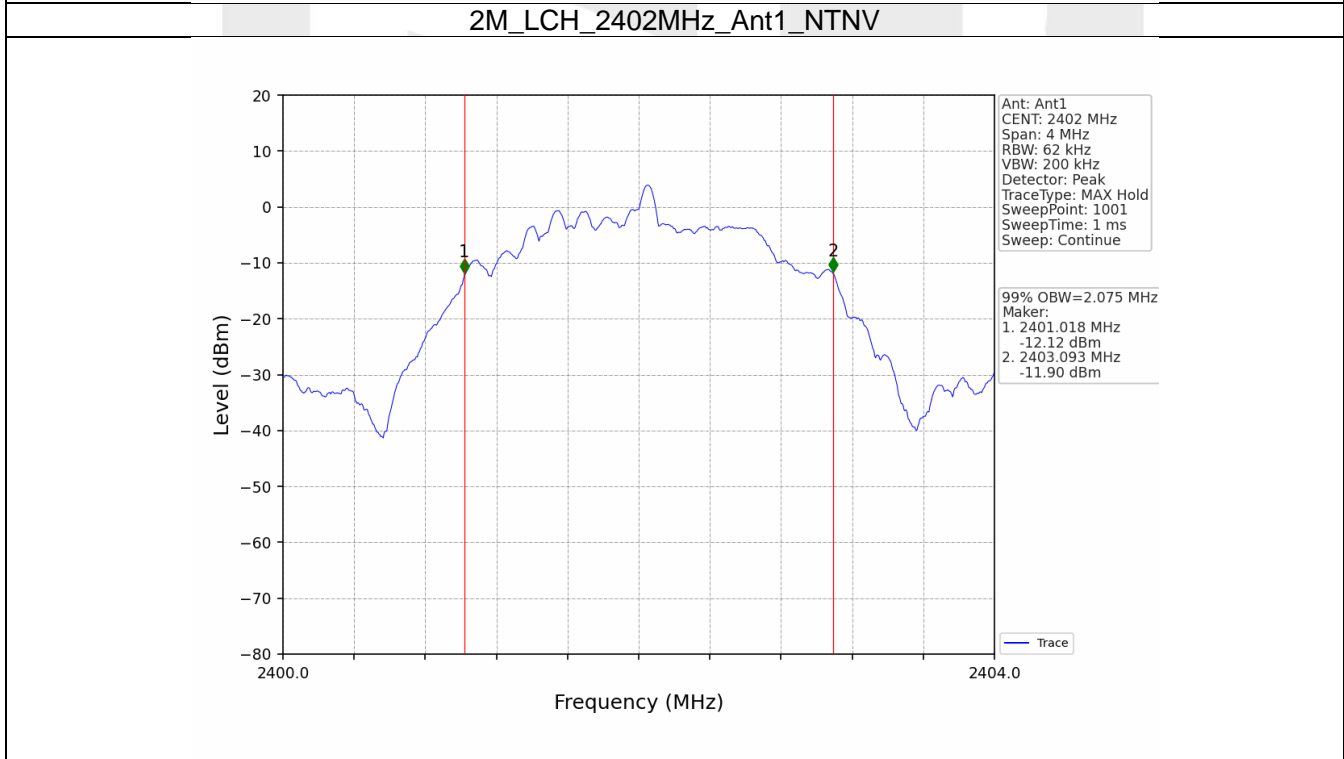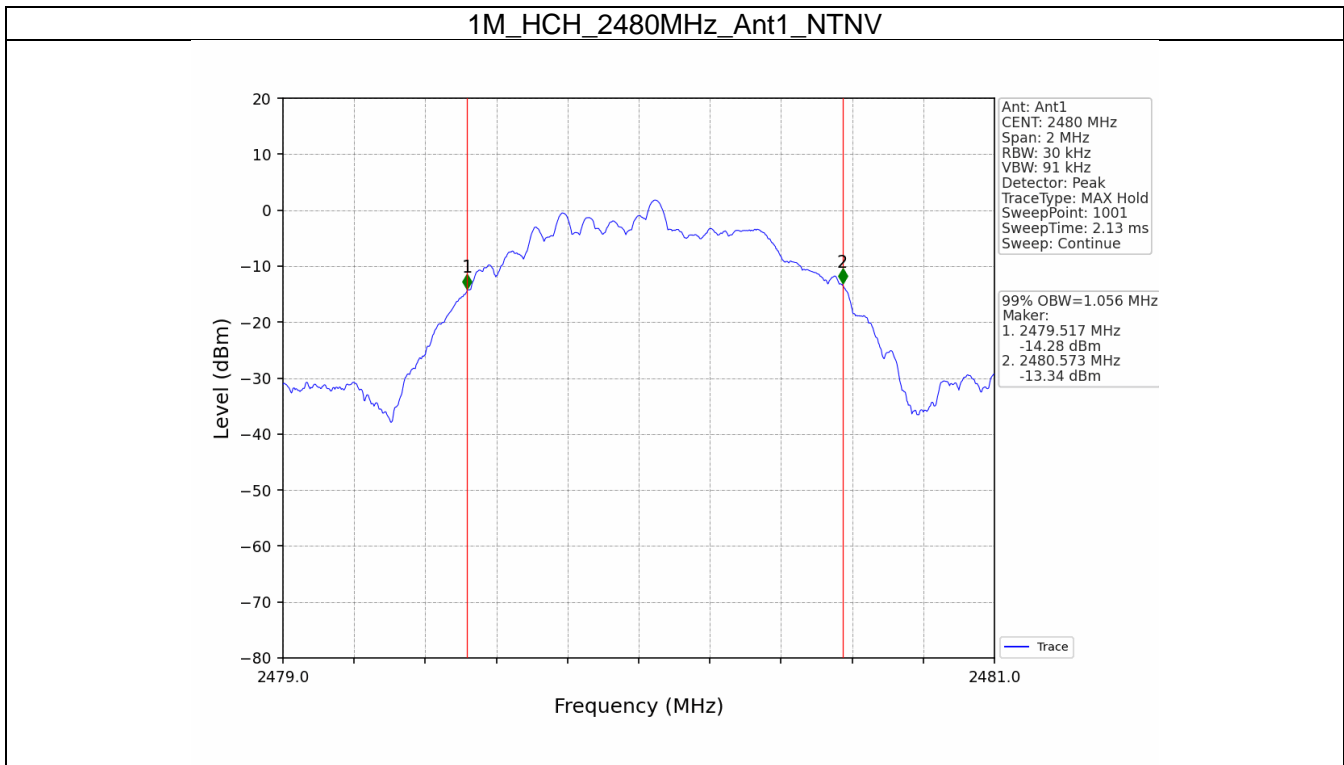

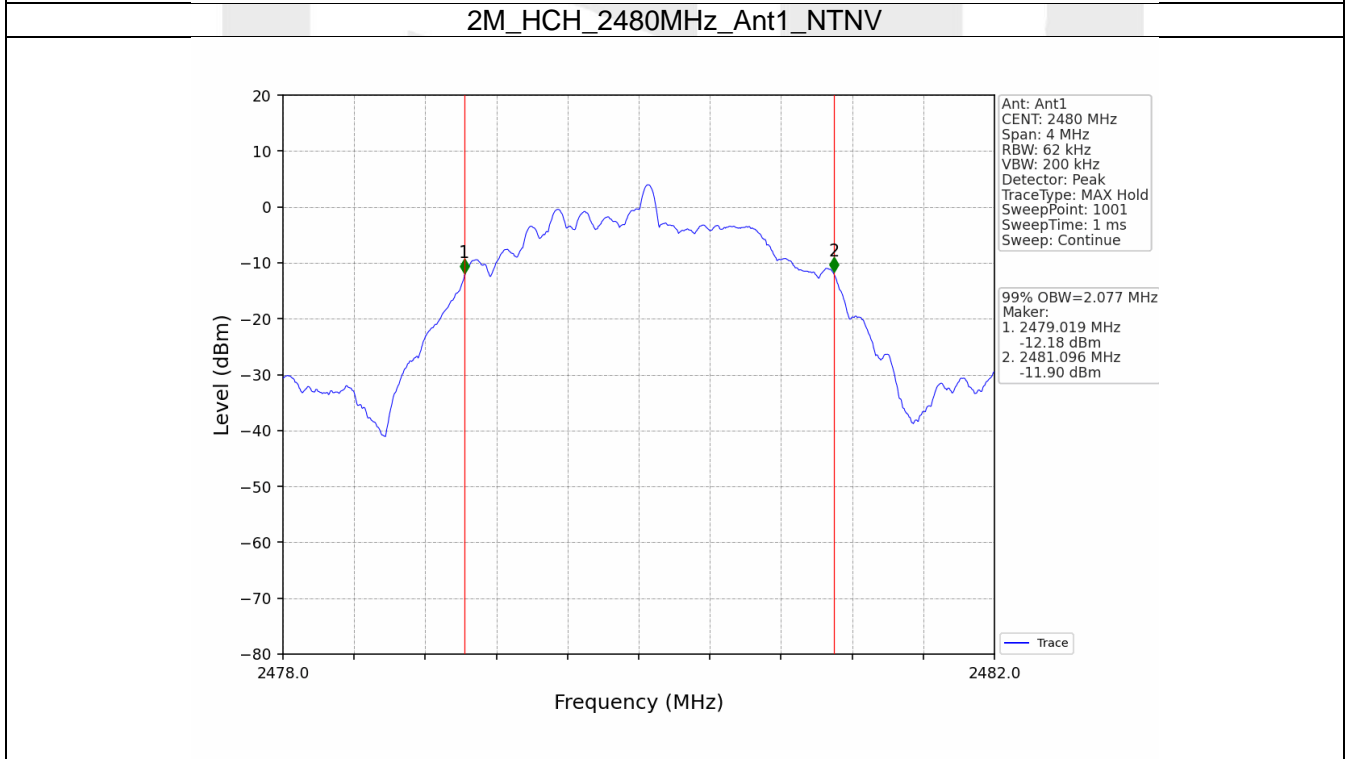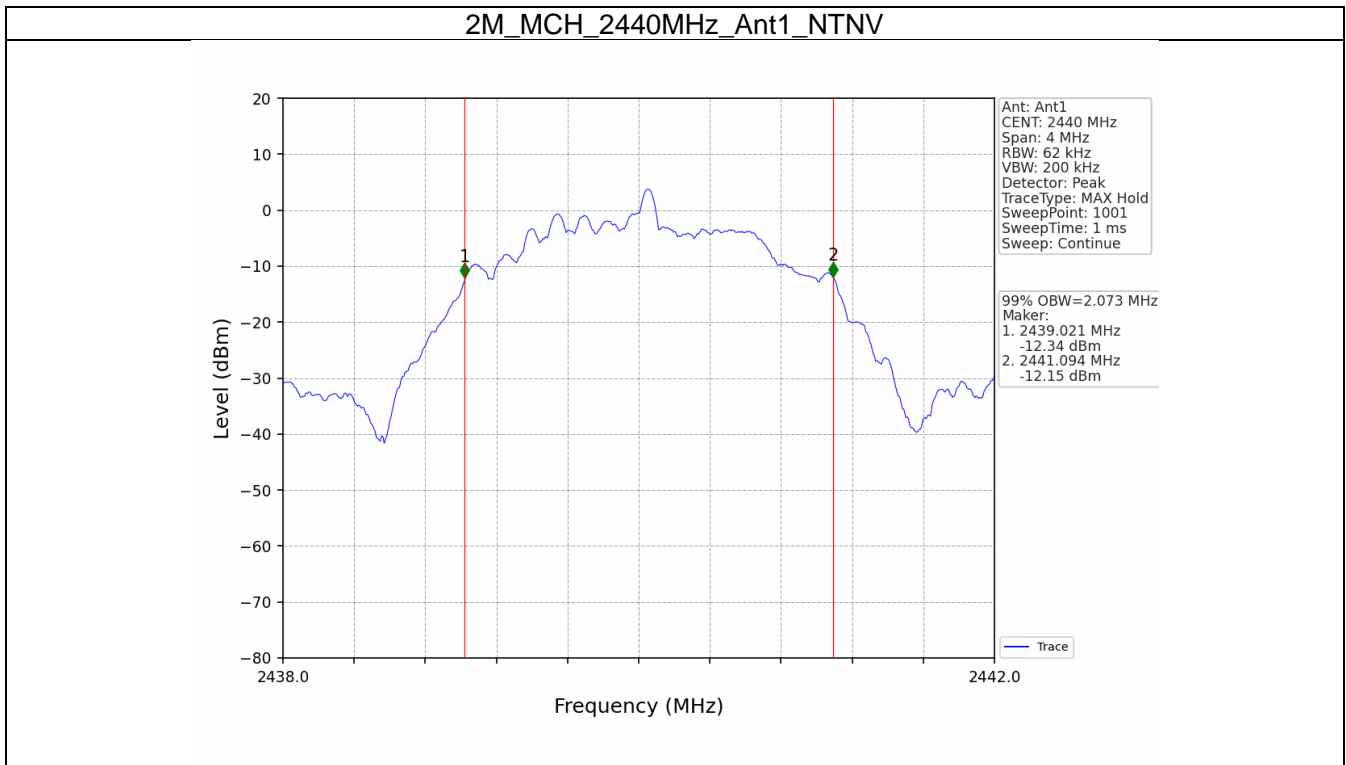


2.2 6dB BW



2.2.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.709	≥ 0.5	Pass
		2440	1	0.714	≥ 0.5	Pass
		2480	1	0.696	≥ 0.5	Pass
2M	SISO	2402	1	1.151	≥ 0.5	Pass
		2440	1	1.140	≥ 0.5	Pass
		2480	1	1.154	≥ 0.5	Pass



2.2.2 Test Graph

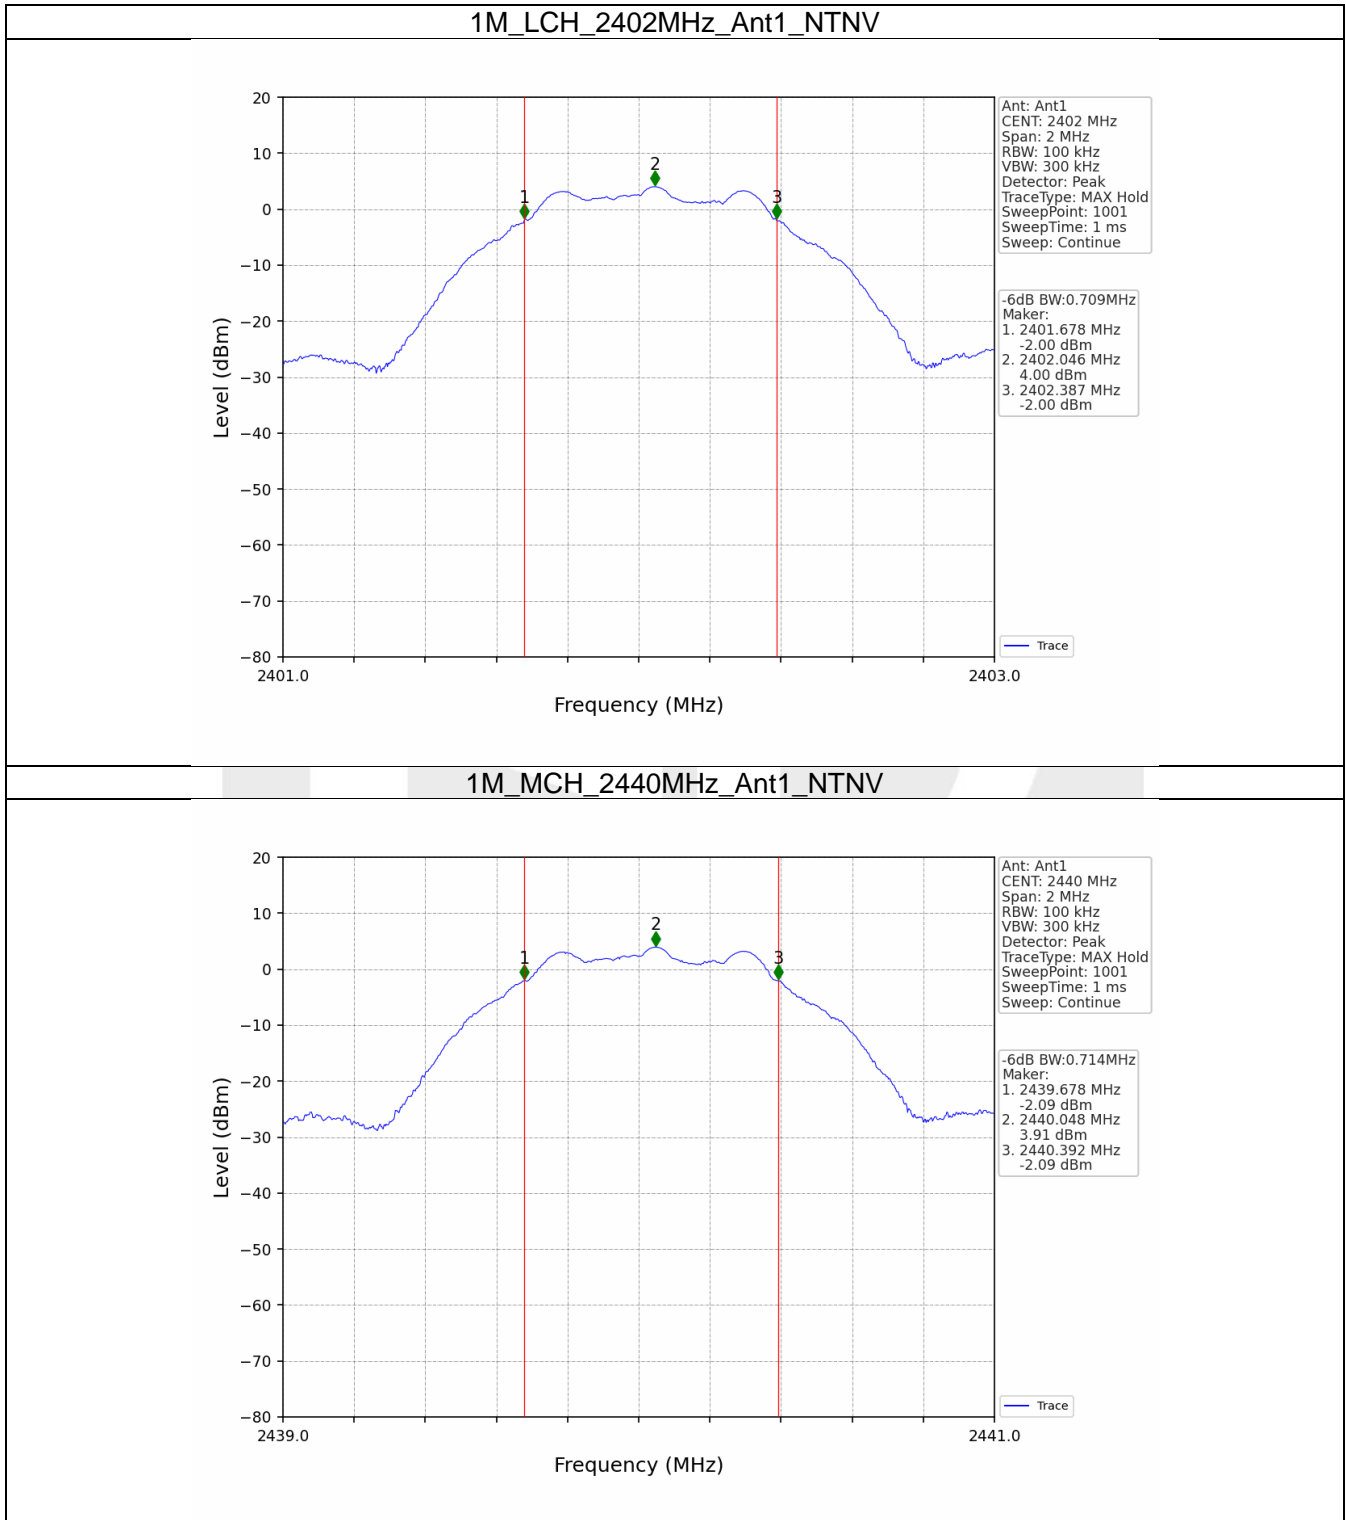

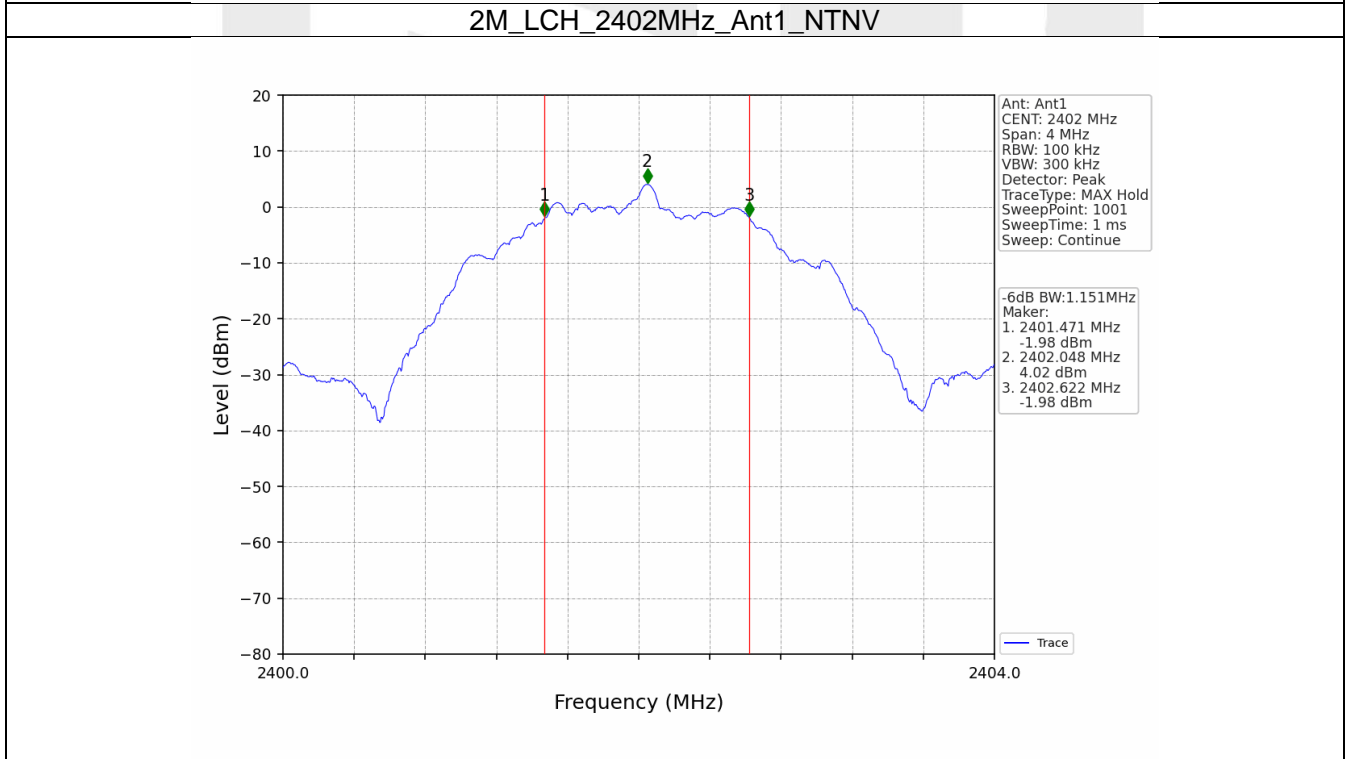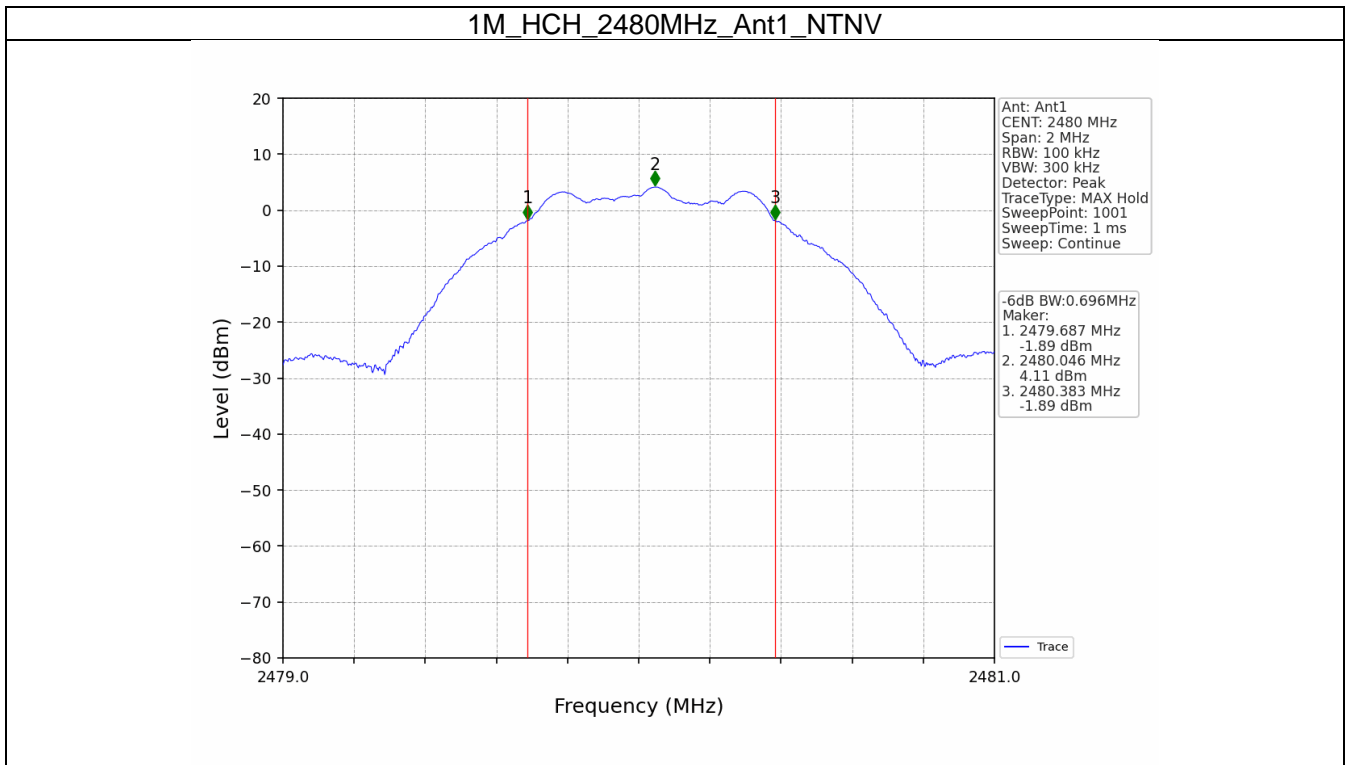

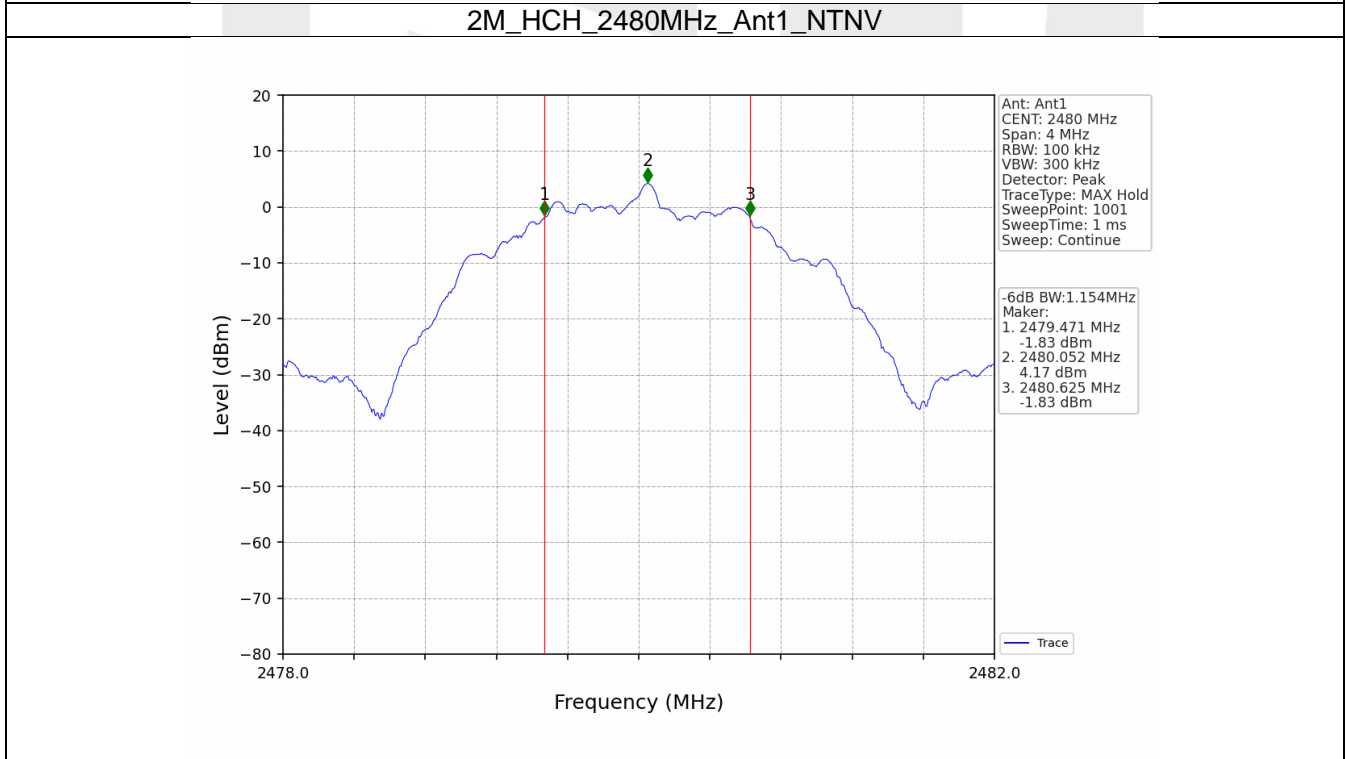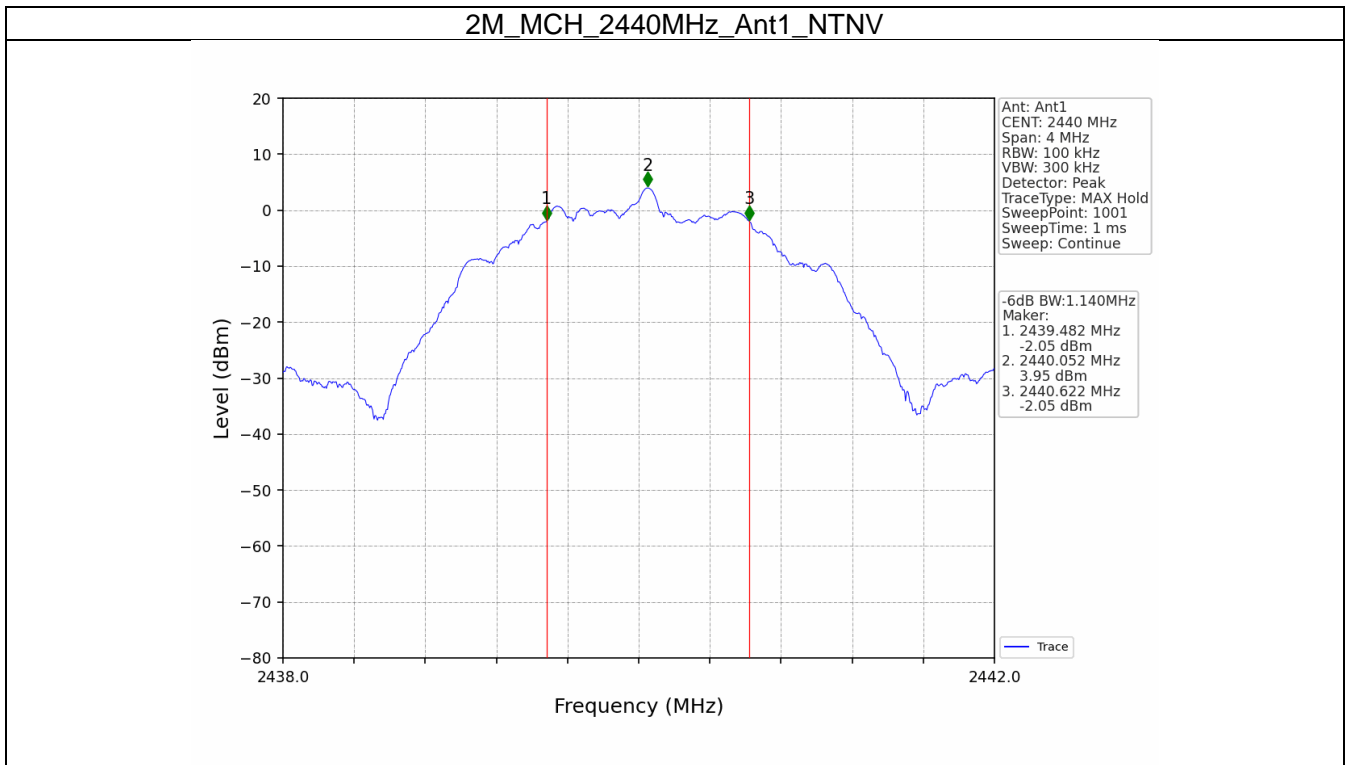

3. Maximum Conducted Output Power


3.1 Power



3.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	4.08	<=30	Pass
		2440	3.99	<=30	Pass
		2480	4.16	<=30	Pass
2M	SISO	2402	4.09	<=30	Pass
		2440	4.01	<=30	Pass
		2480	4.21	<=30	Pass

Note1: Antenna Gain: Ant1: -3dBi;

3.1.2 Test Graph

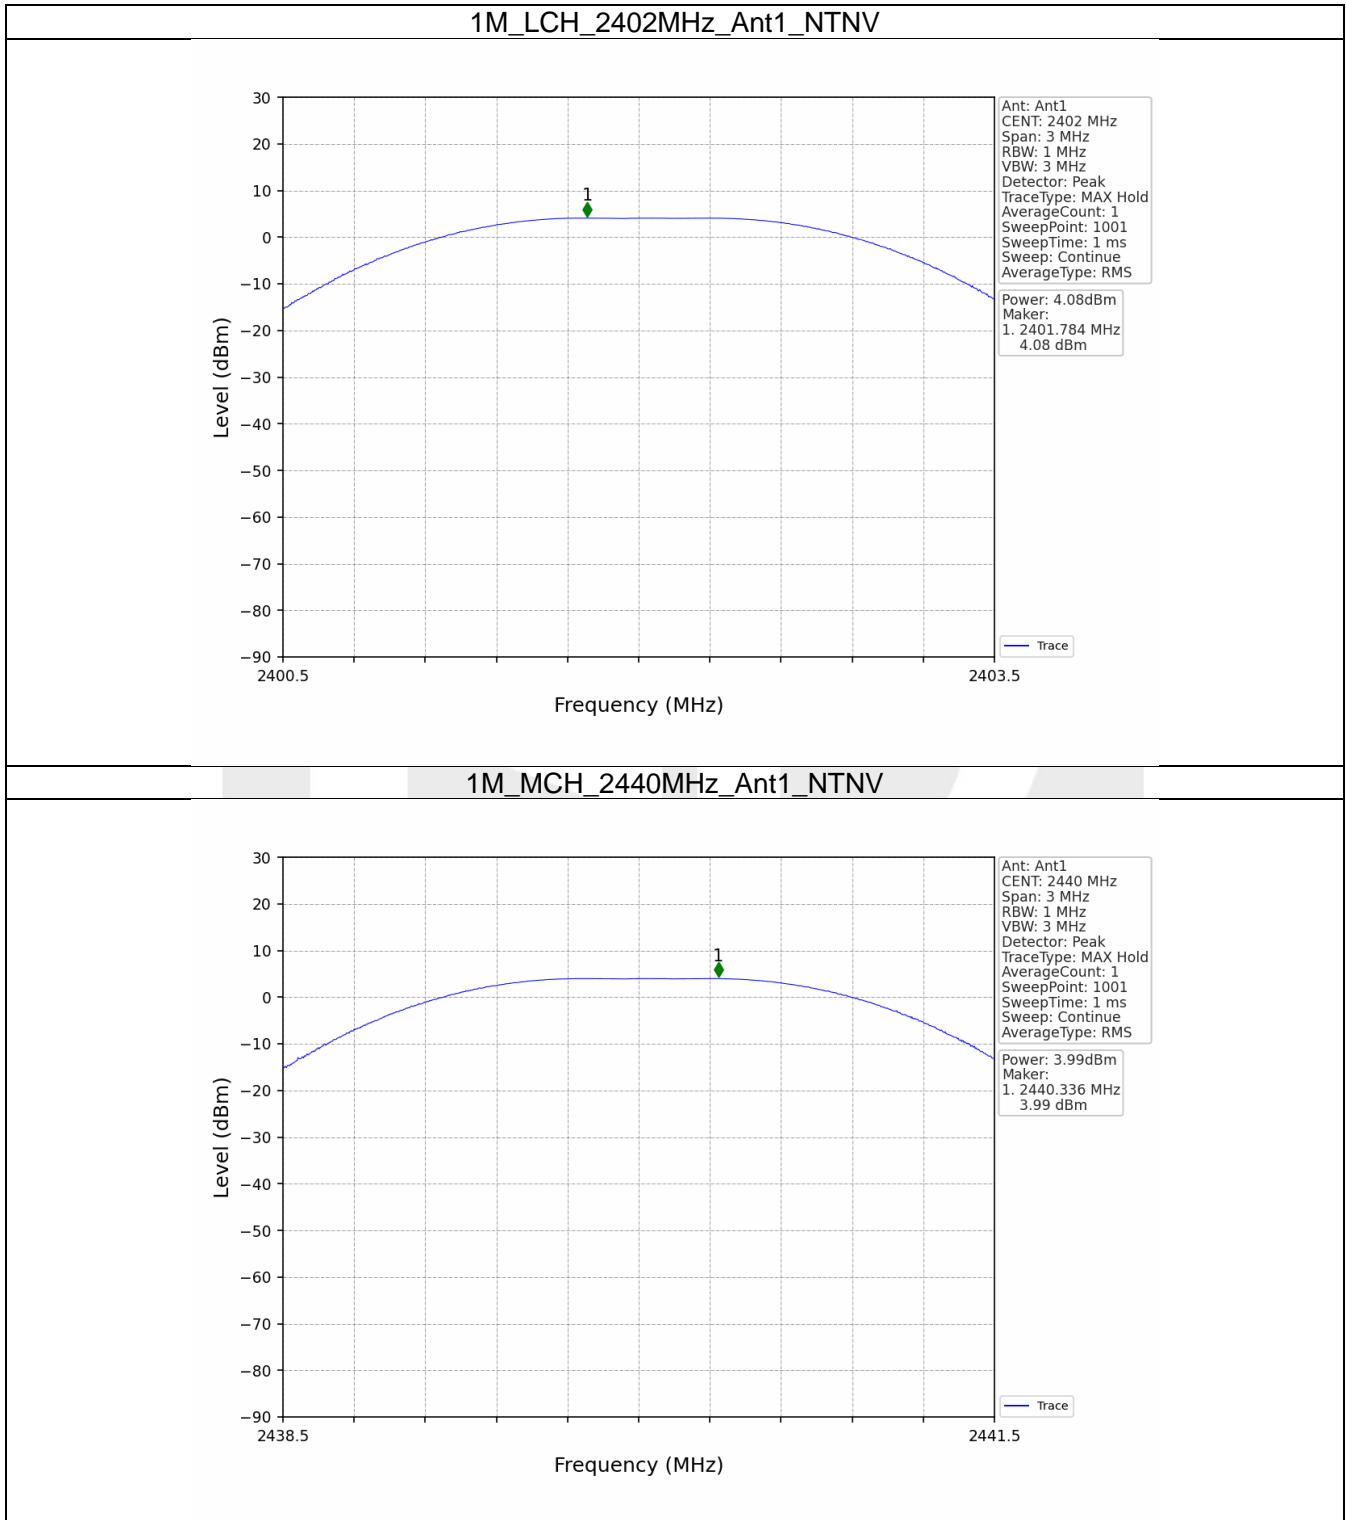

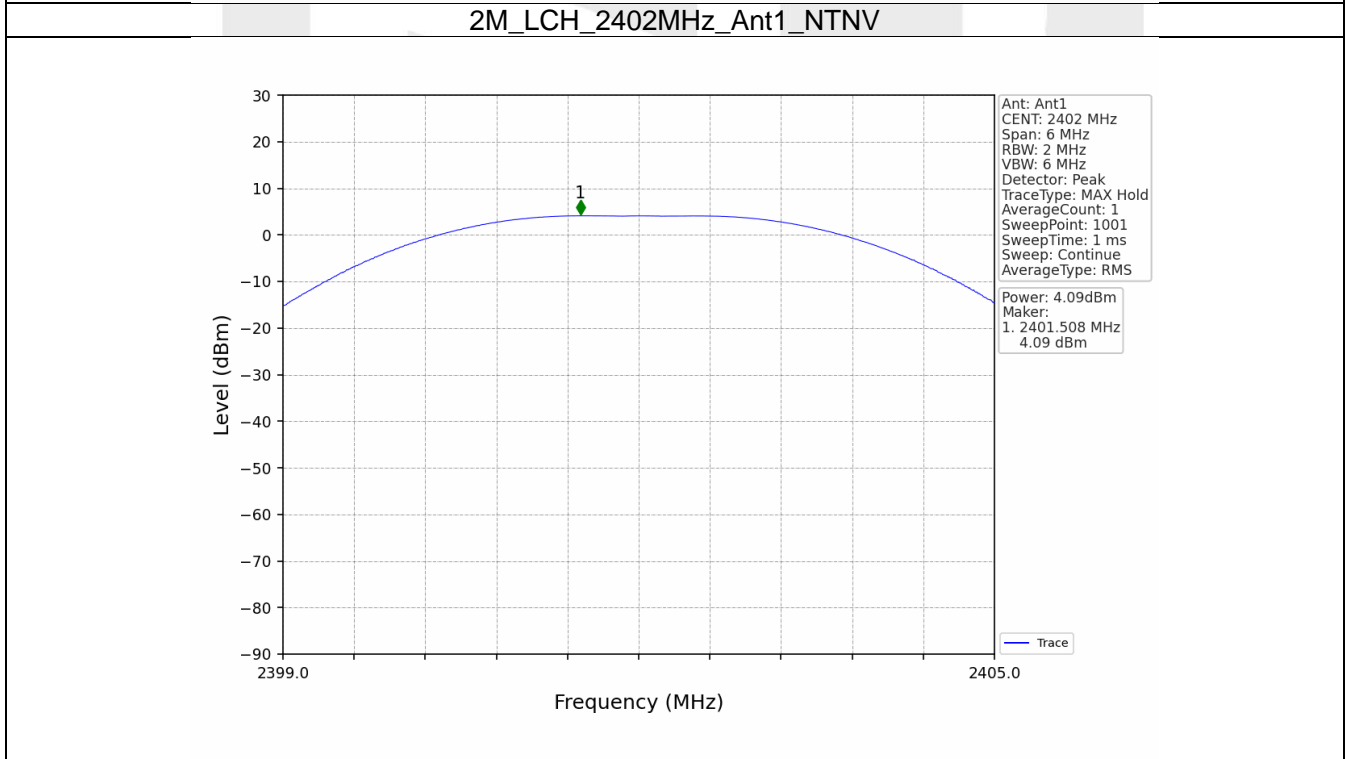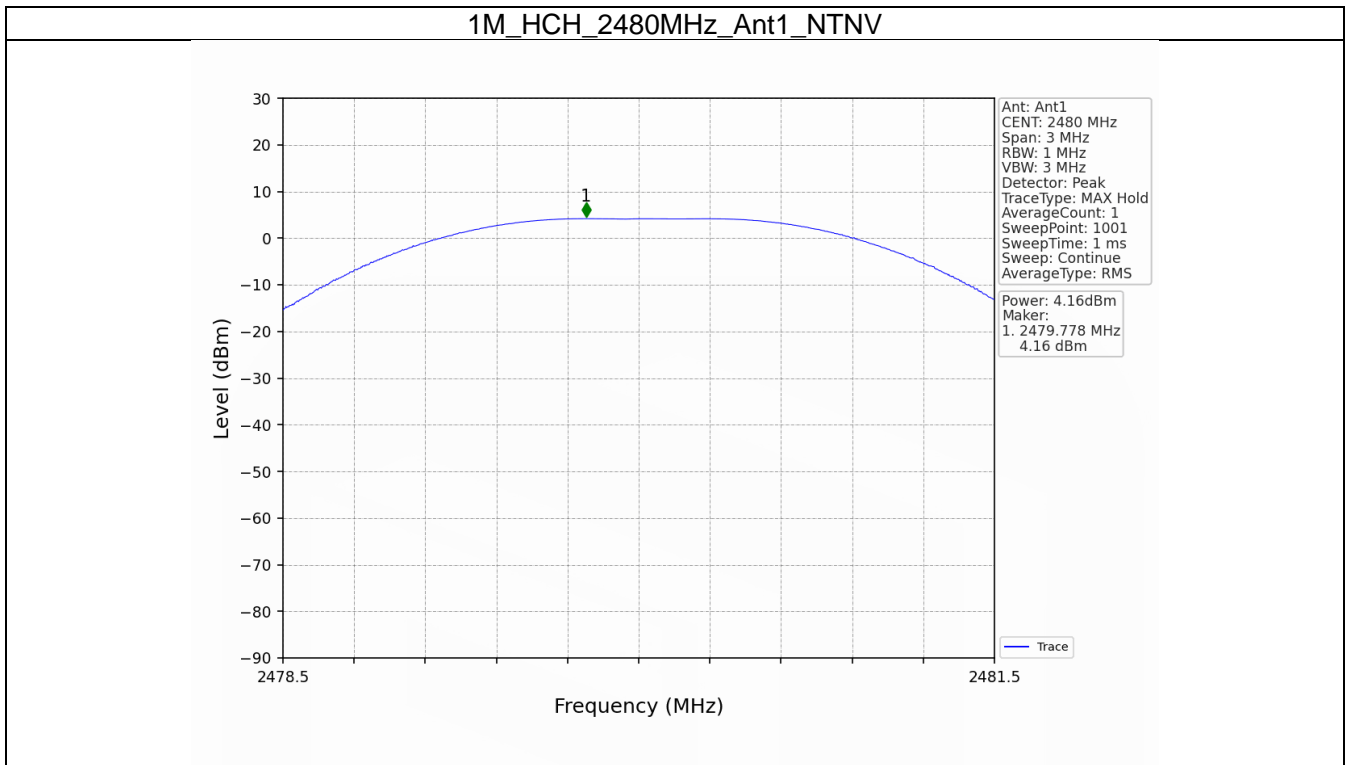

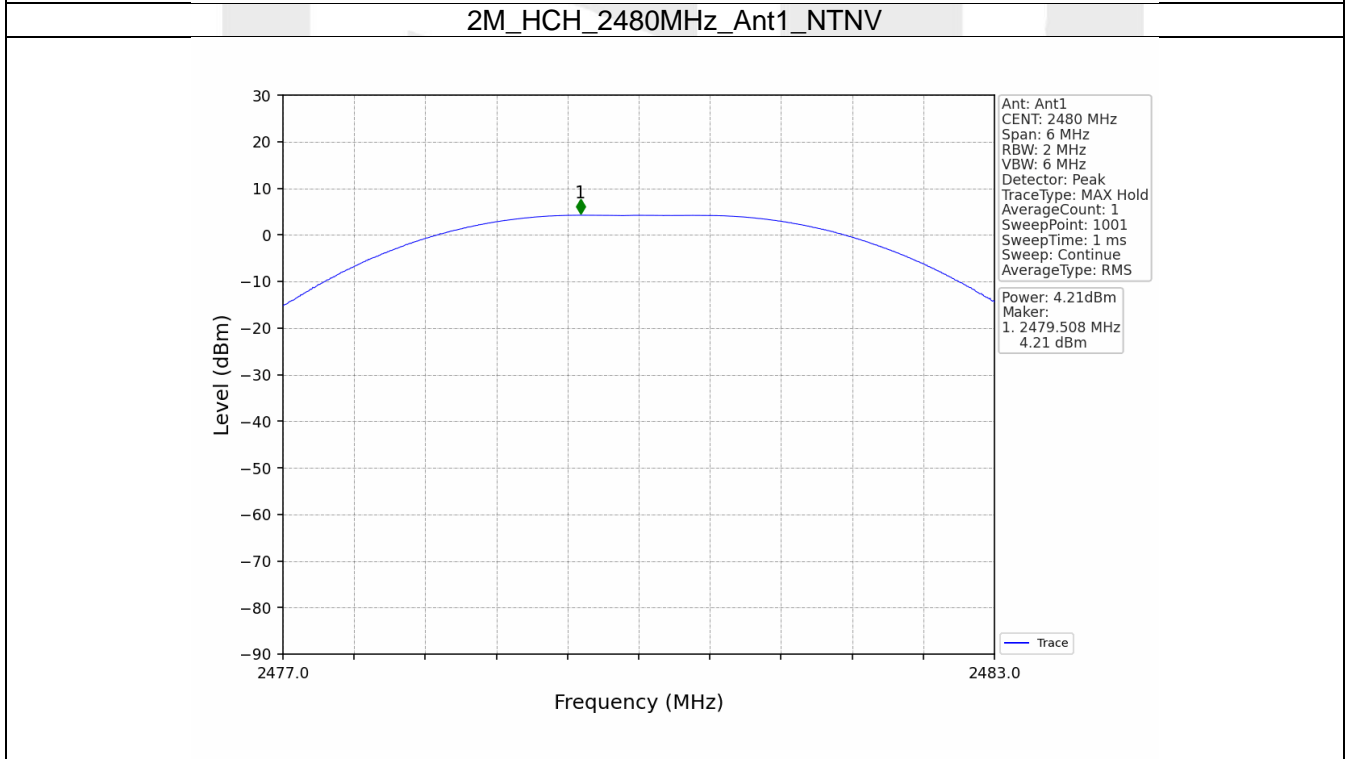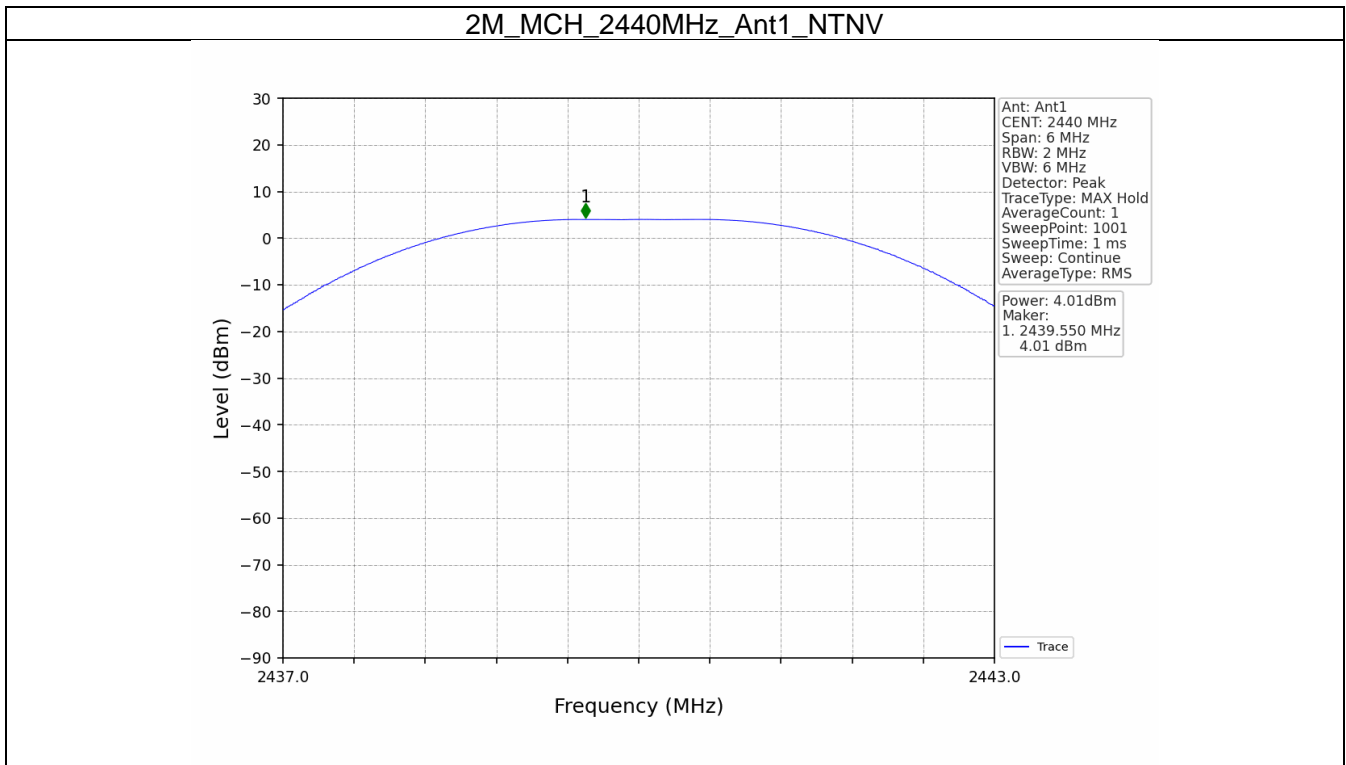

4. Maximum Power Spectral Density


4.1 PSD



4.1.1 Test Result



Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm/3kHz)		Verdict
			ANT1	Limit	
1M	SISO	2402	-11.25	<=8	Pass
		2440	-11.40	<=8	Pass
		2480	-11.36	<=8	Pass
2M	SISO	2402	-14.04	<=8	Pass
		2440	-14.10	<=8	Pass
		2480	-14.00	<=8	Pass

Note1: Antenna Gain: Ant1: -3dBi;

4.1.2 Test Graph

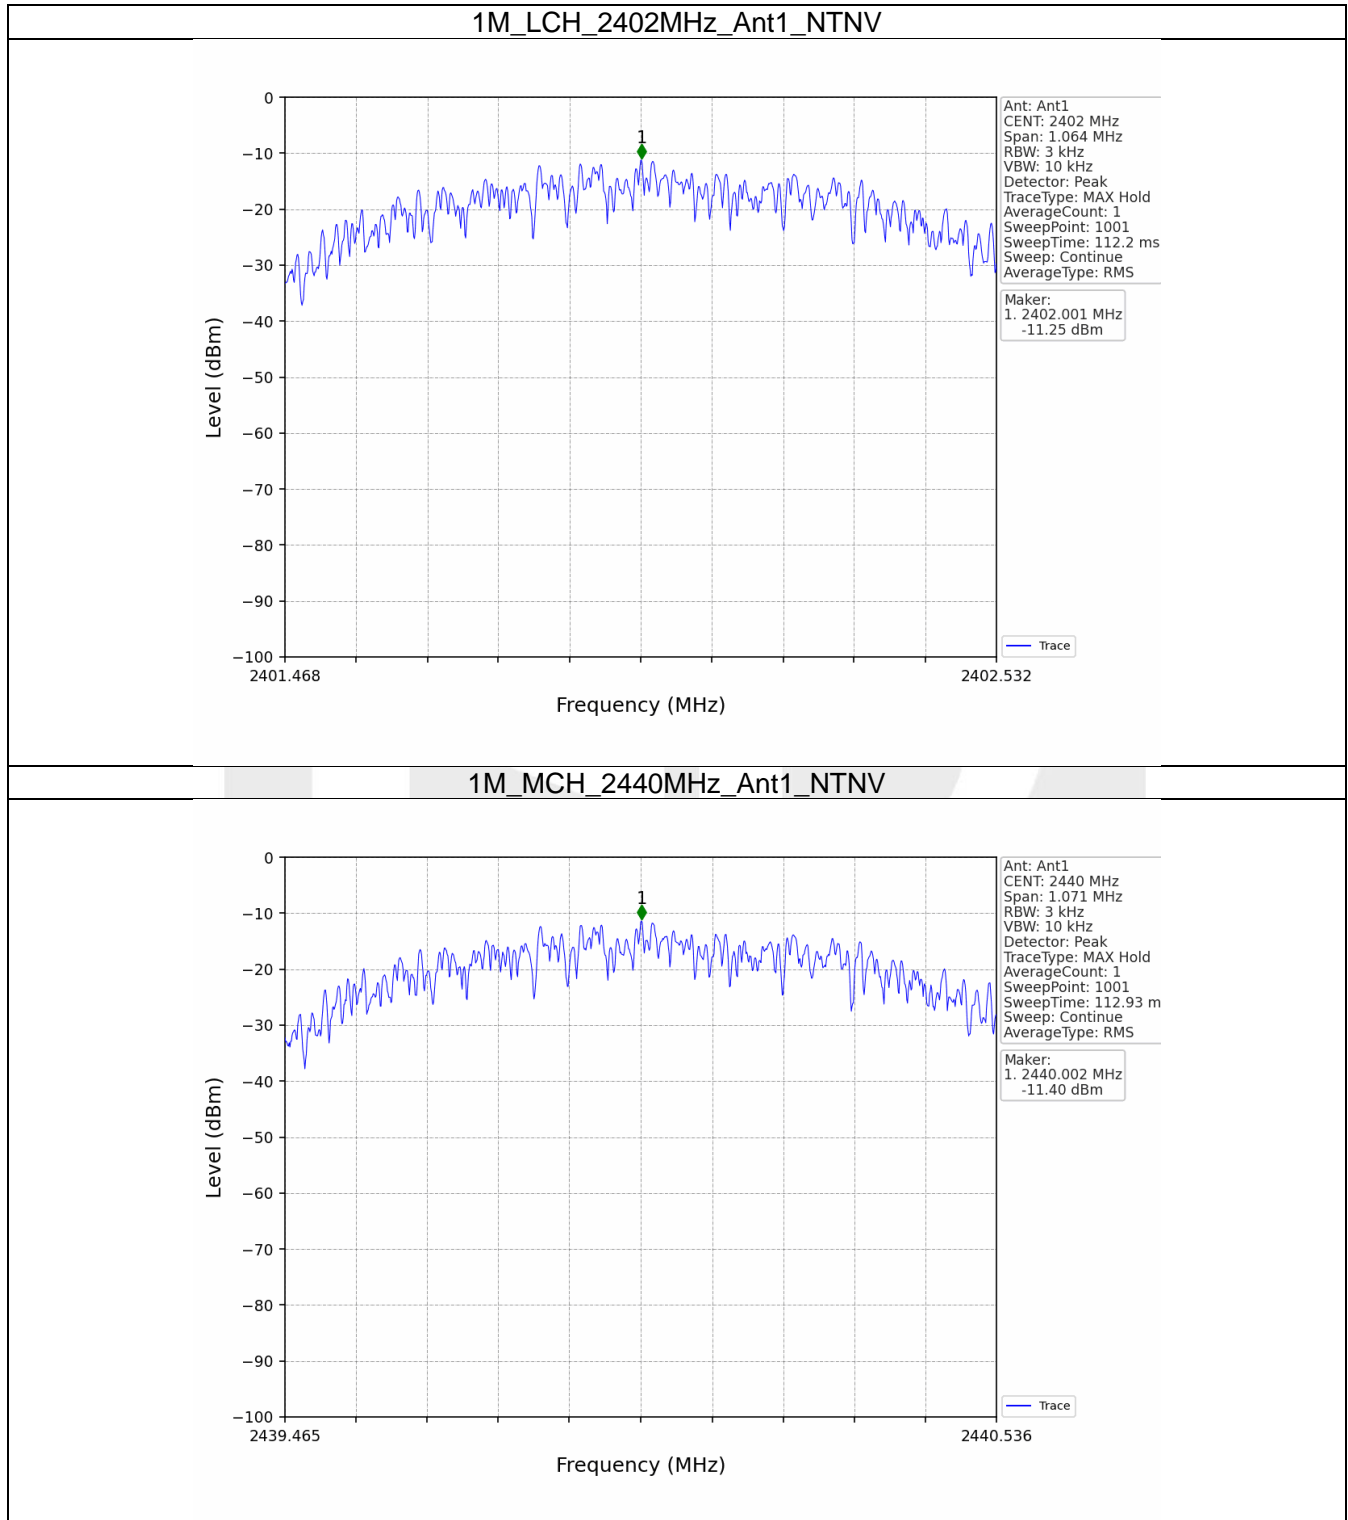

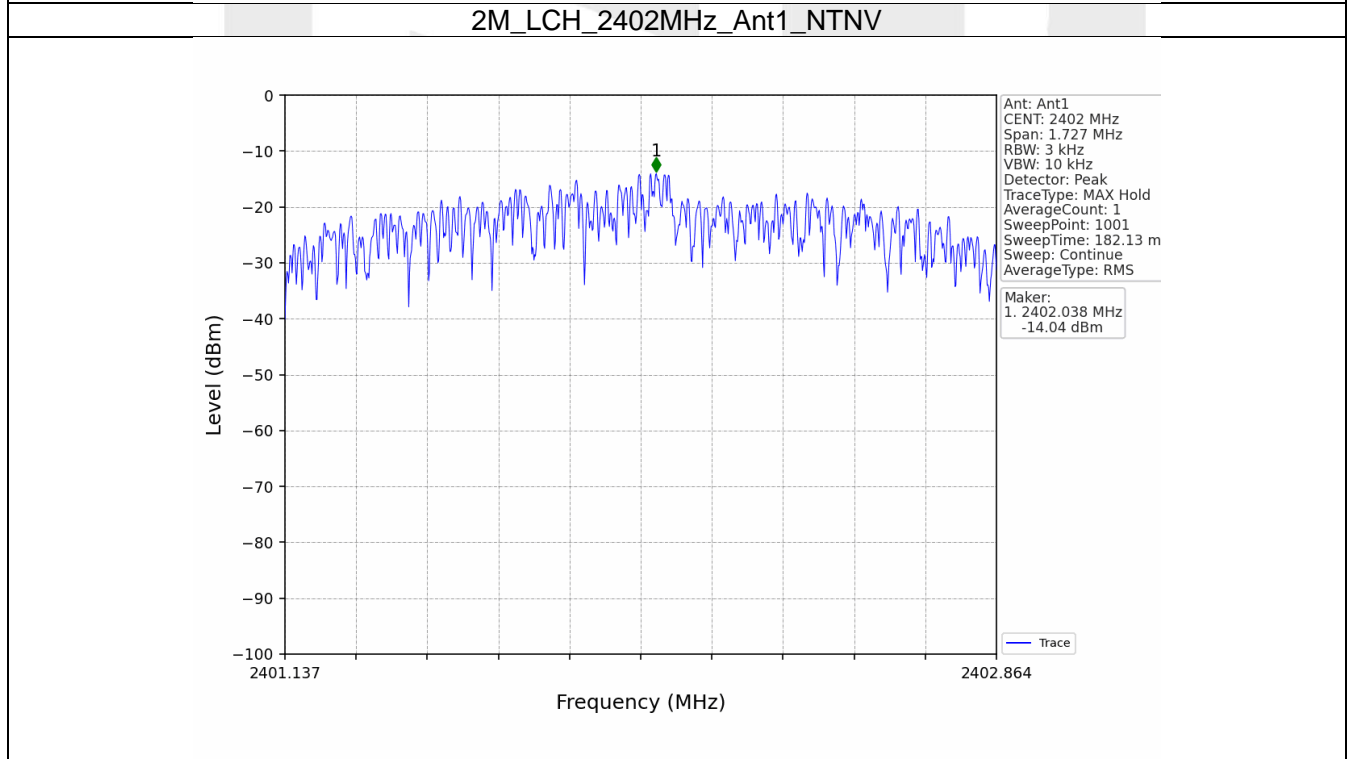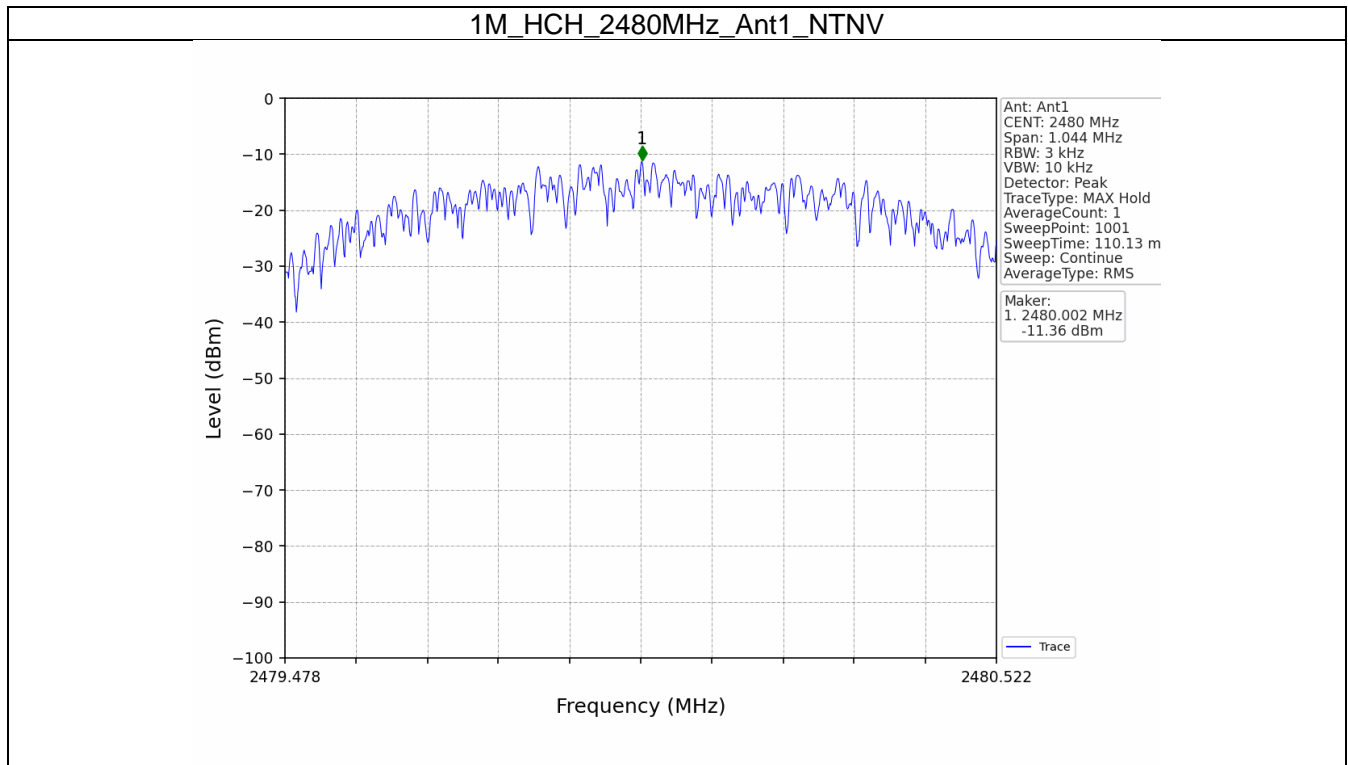

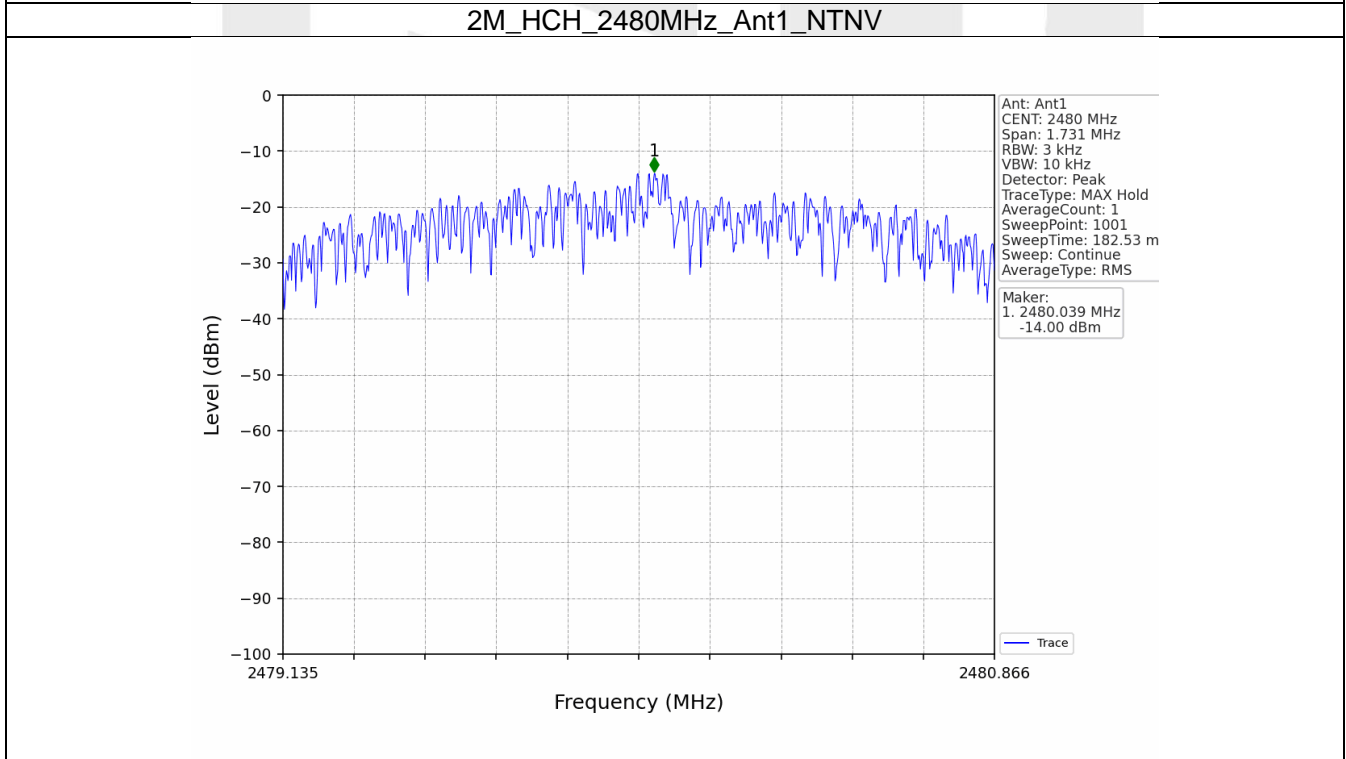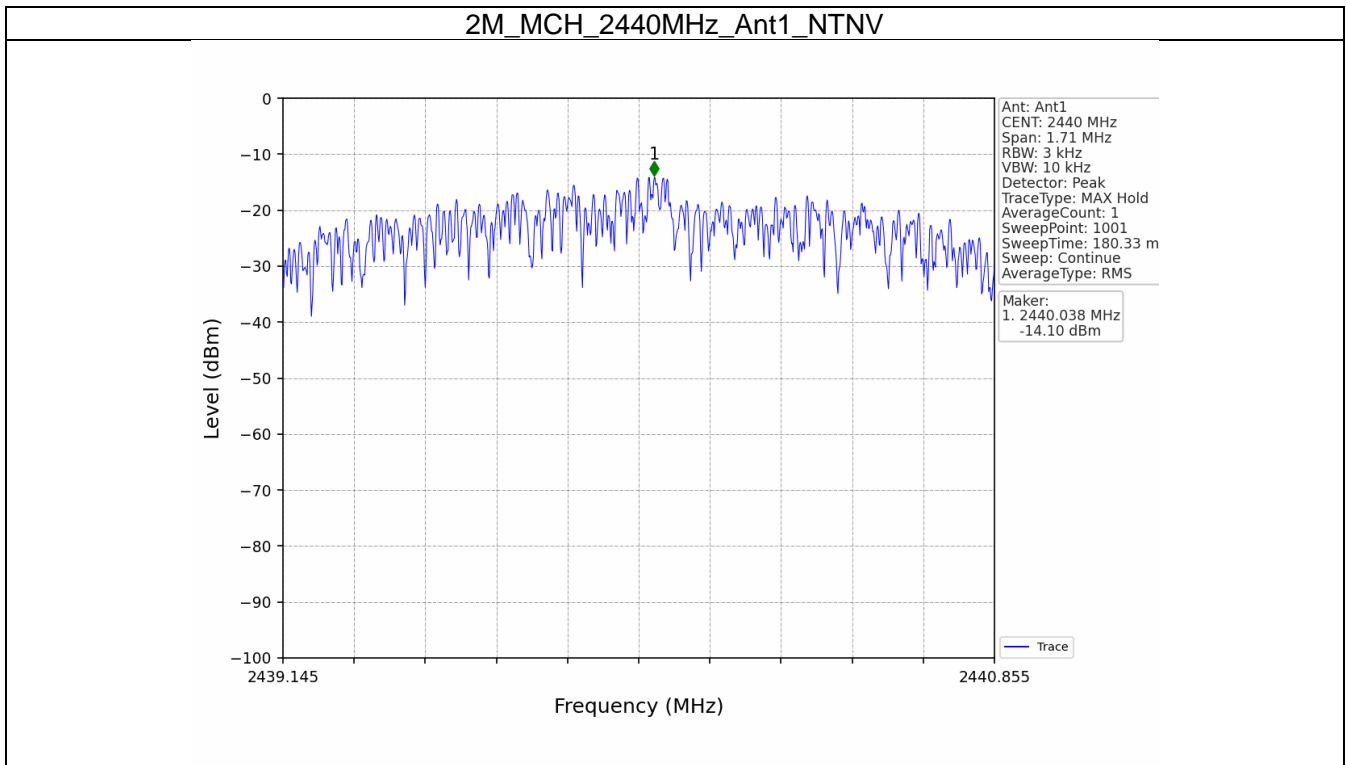

5. Unwanted Emissions In Non-restricted Frequency Bands


5.1 Ref



5.1.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	4.03
		2440	1	3.92
		2480	1	4.11
2M	SISO	2402	1	4.01
		2440	1	3.93
		2480	1	4.14

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.

5.1.2 Test Graph

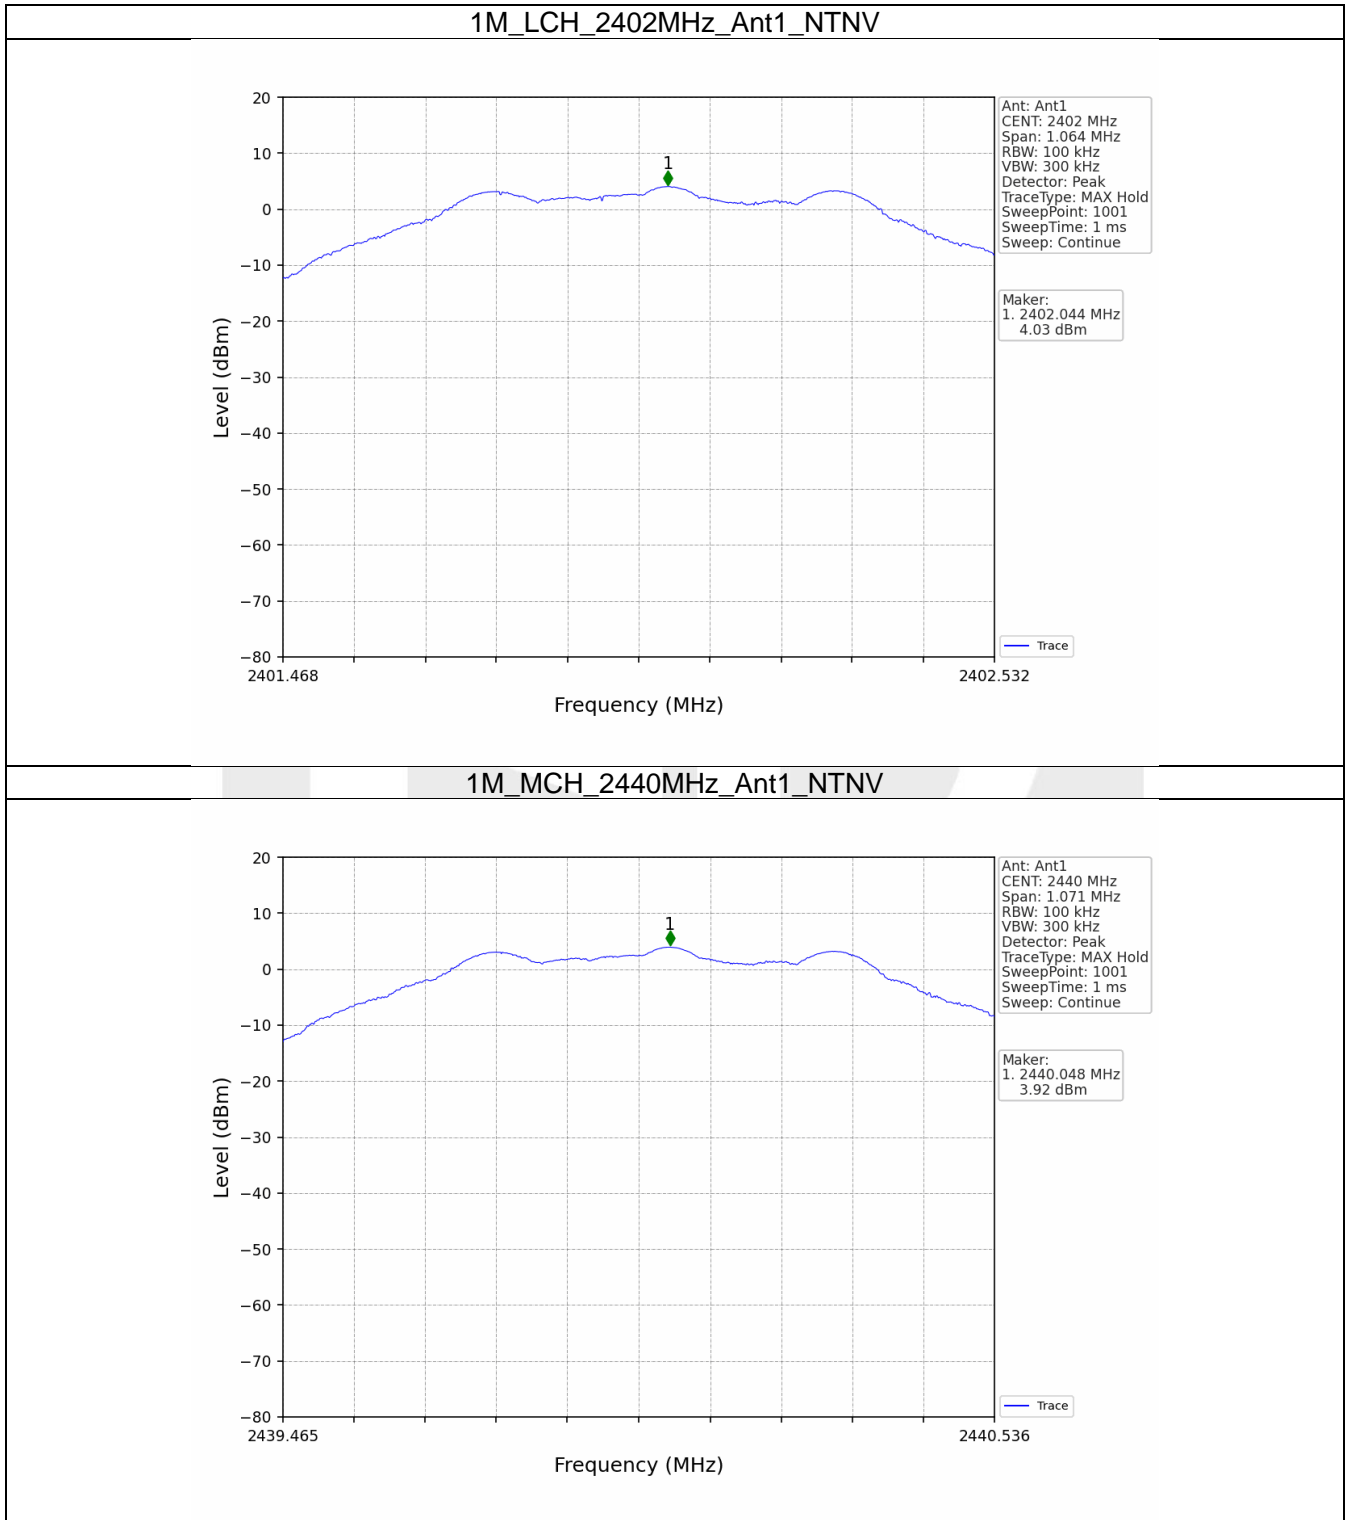

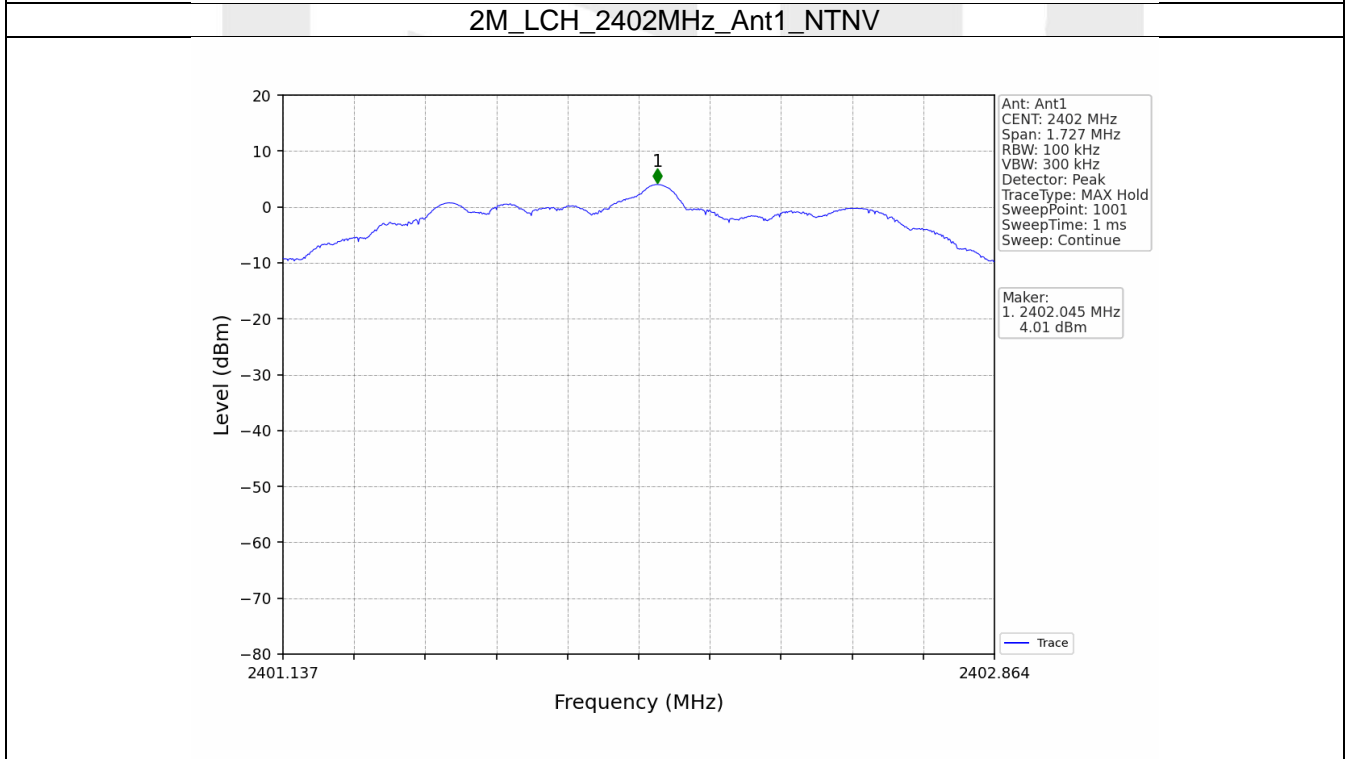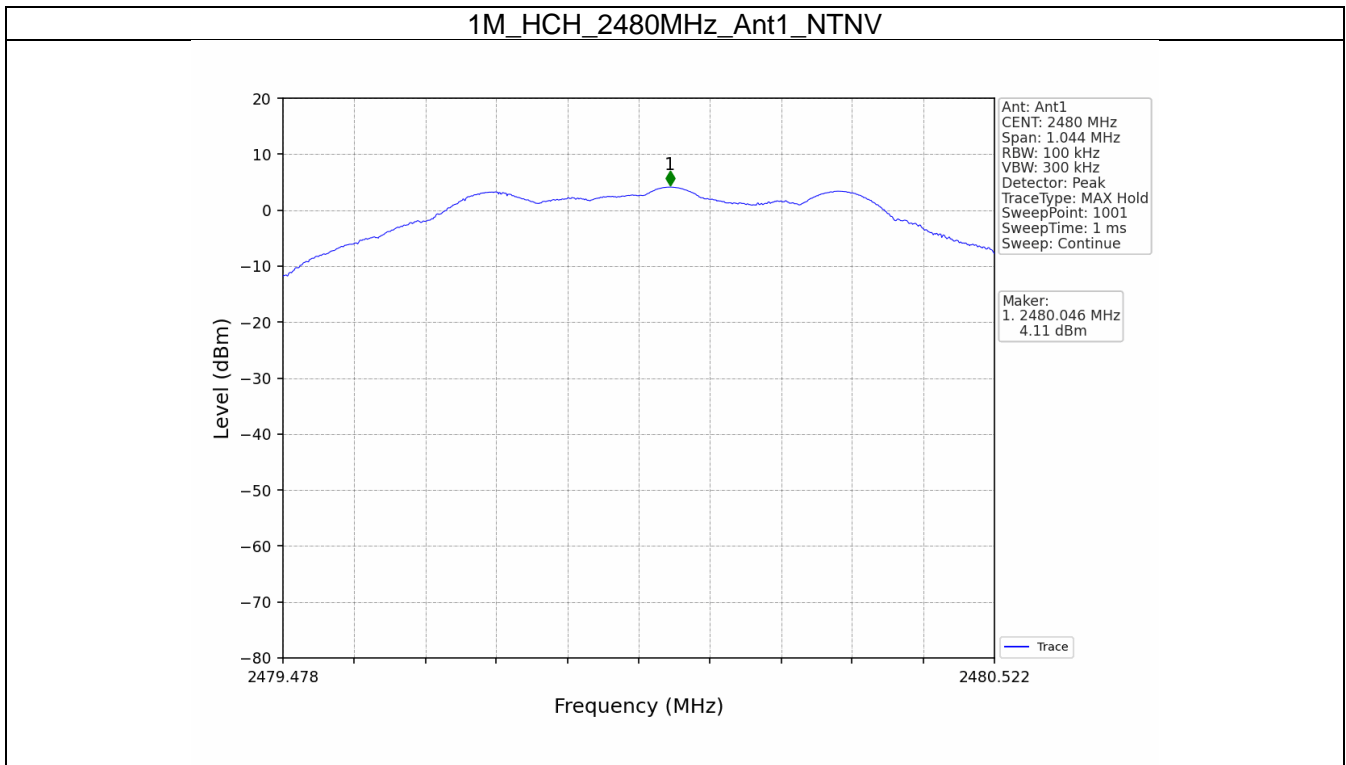

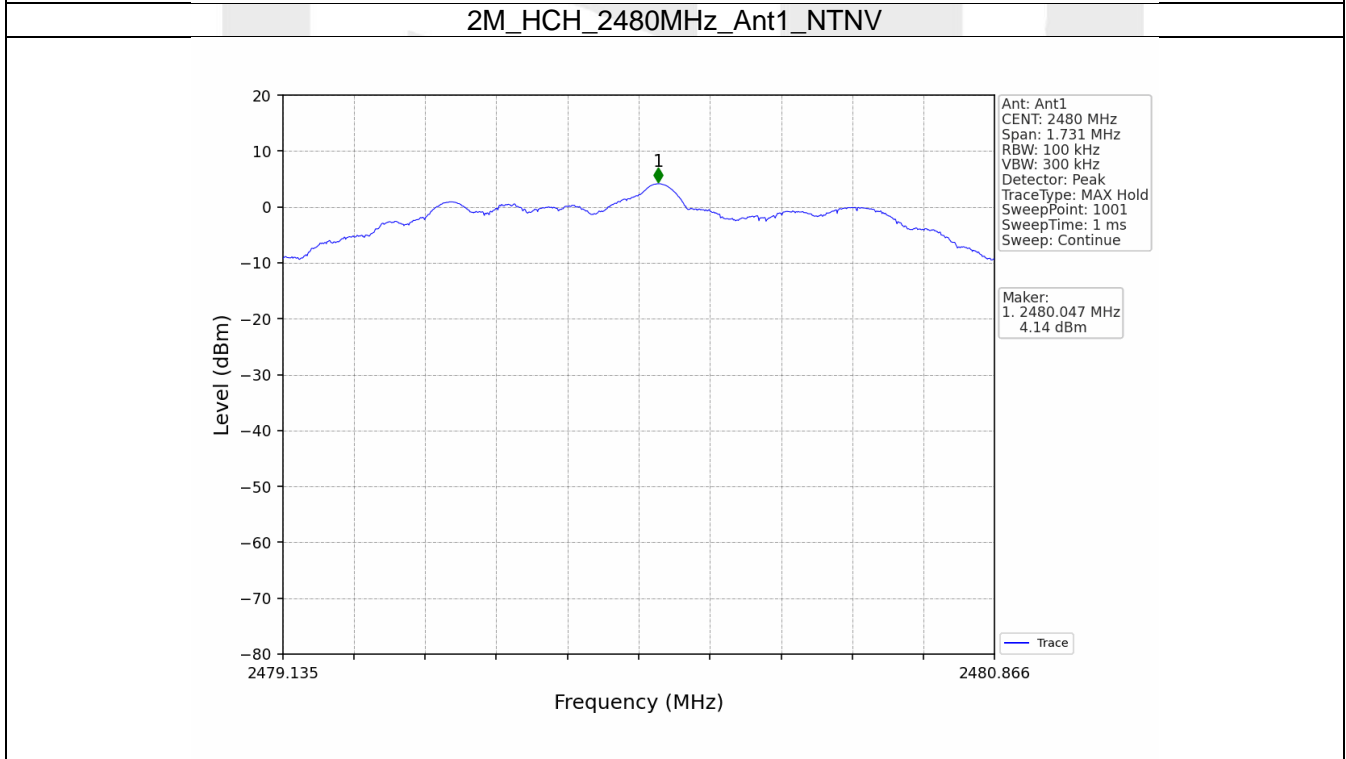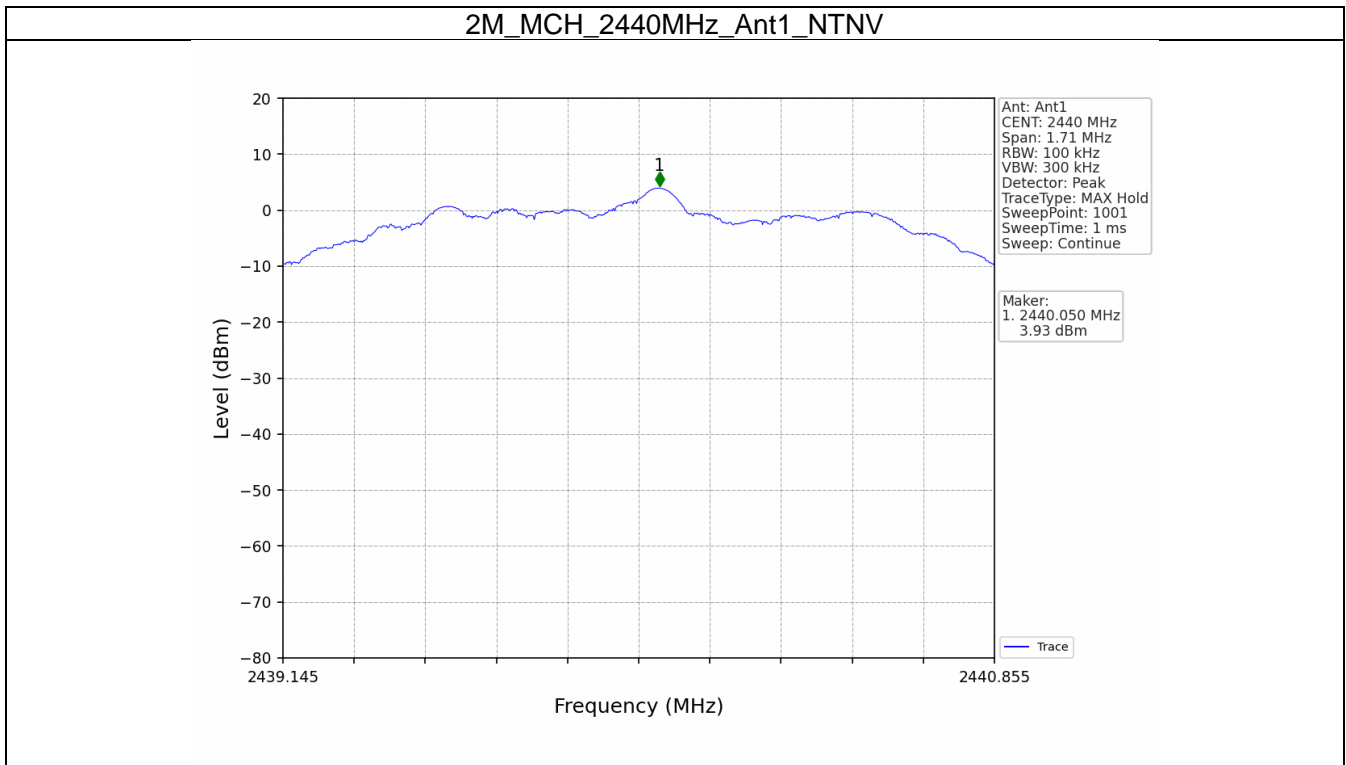


5.2 CSE



5.2.1 Test Result



Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	4.11	-15.89	Pass
		2440	1	4.11	-15.89	Pass
		2480	1	4.11	-15.89	Pass
2M	SISO	2402	1	4.14	-15.86	Pass
		2440	1	4.14	-15.86	Pass
		2480	1	4.14	-15.86	Pass



Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.



5.2.2 Test Graph

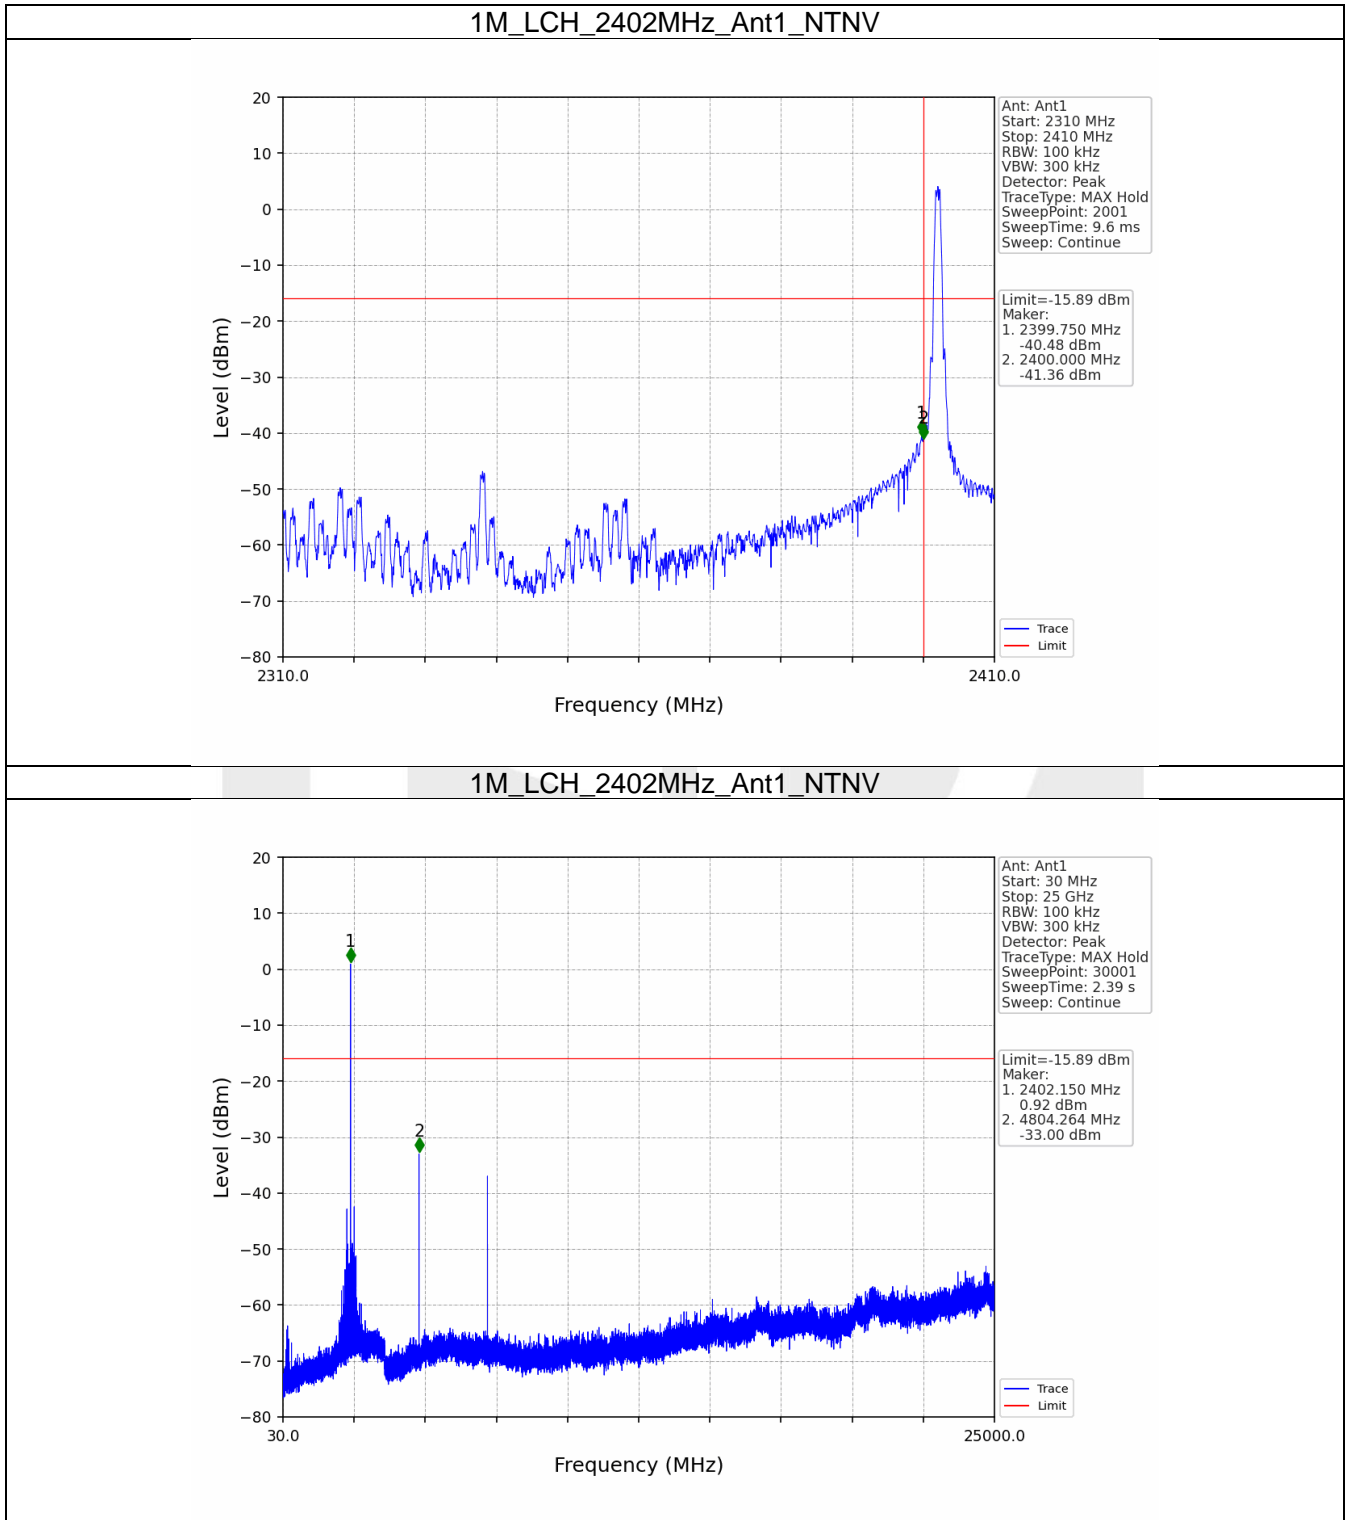

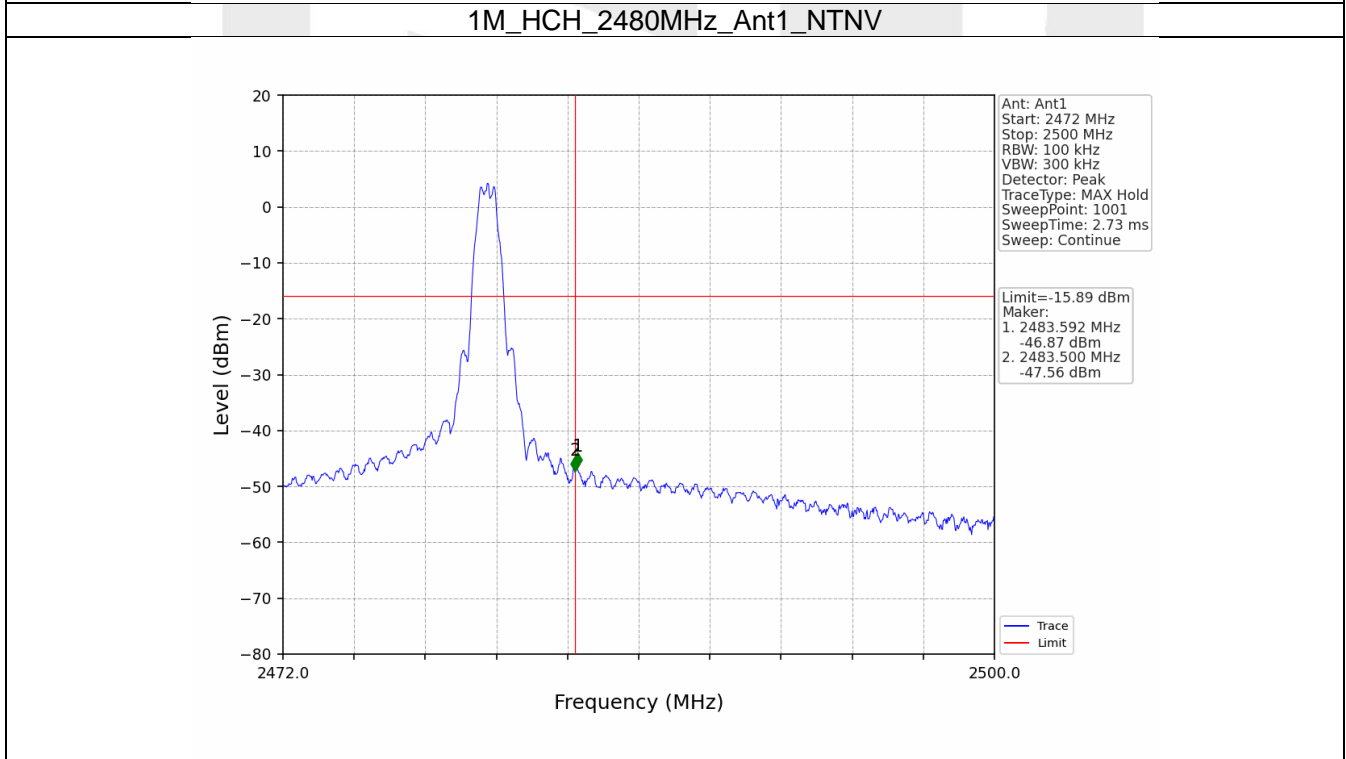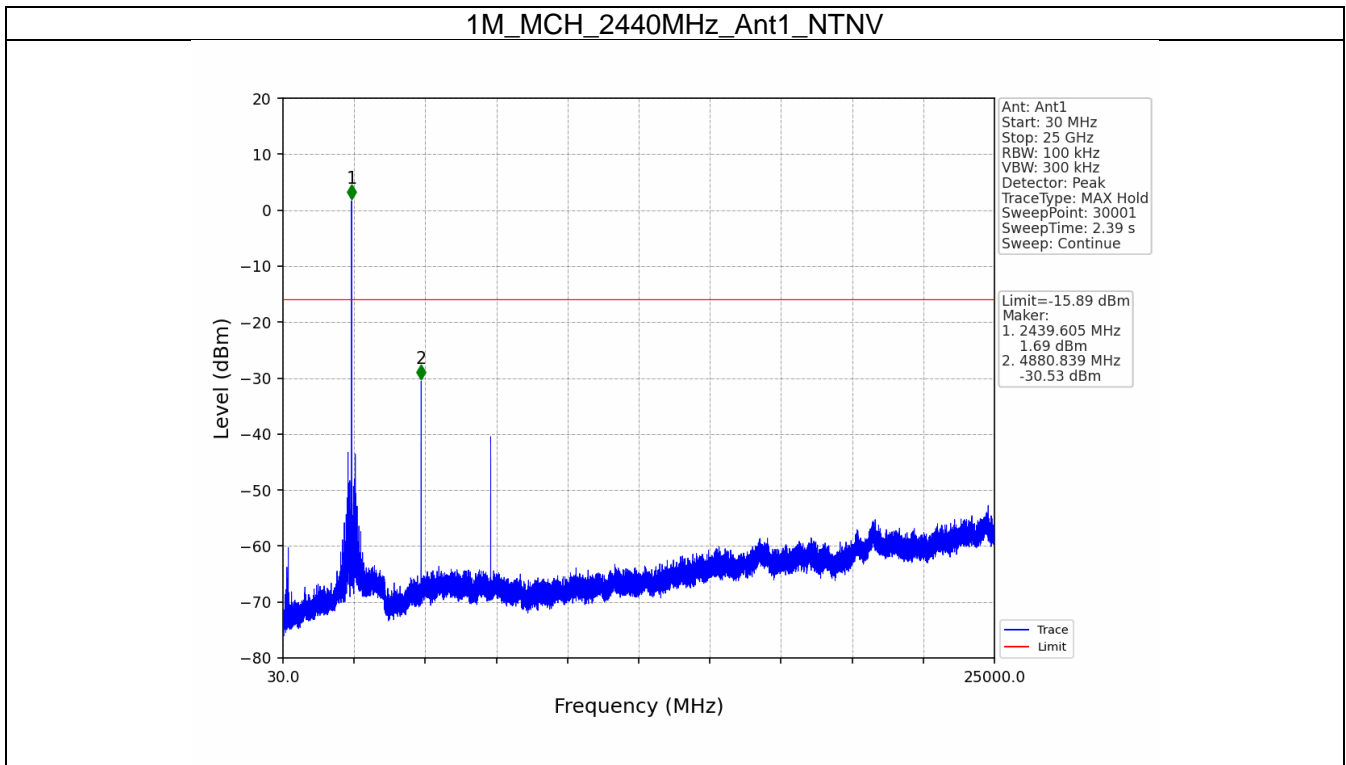

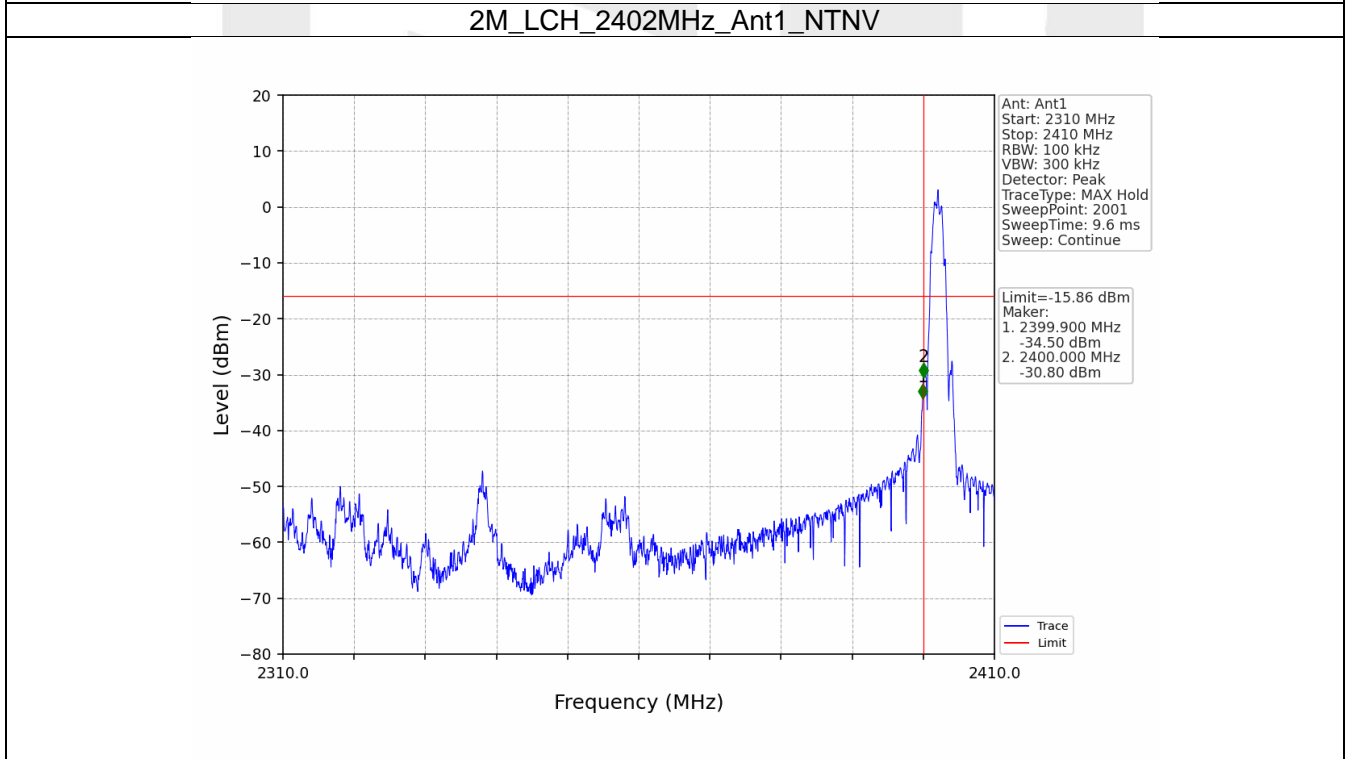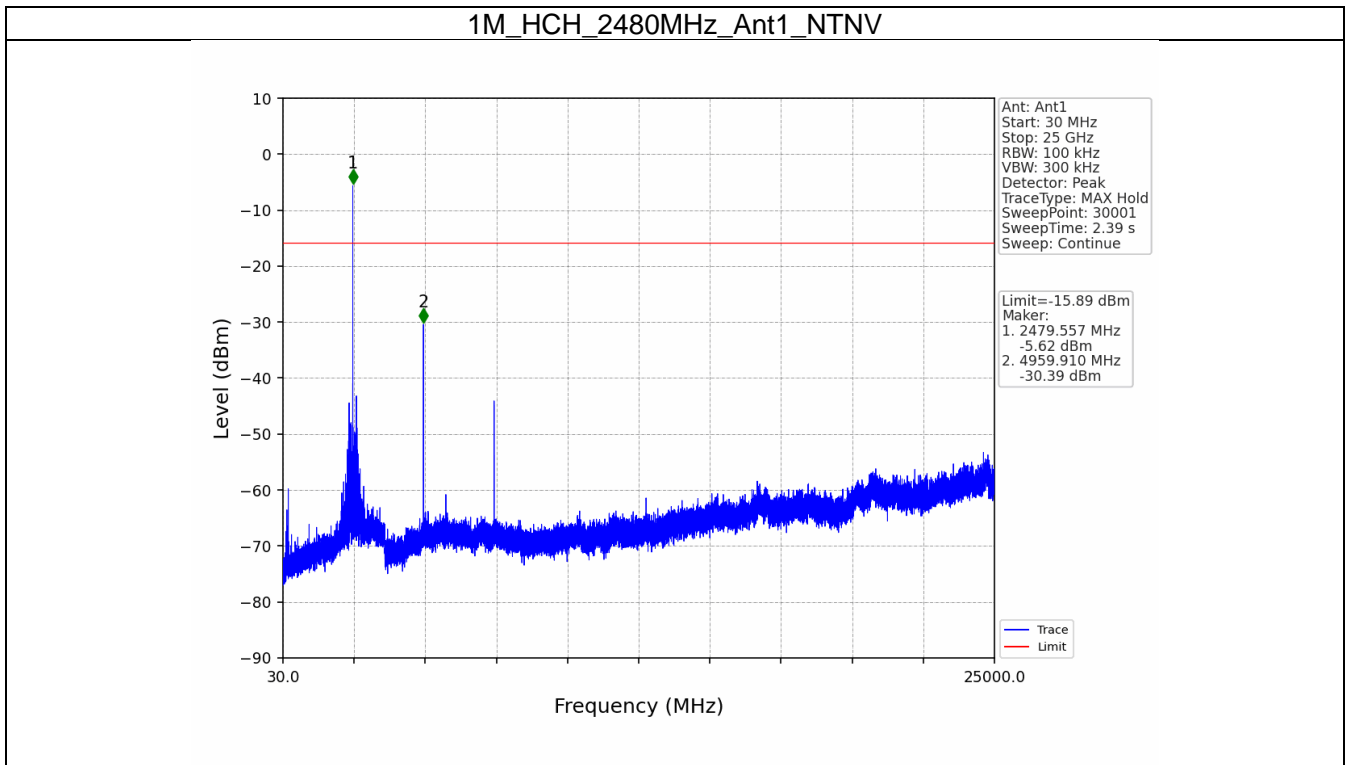

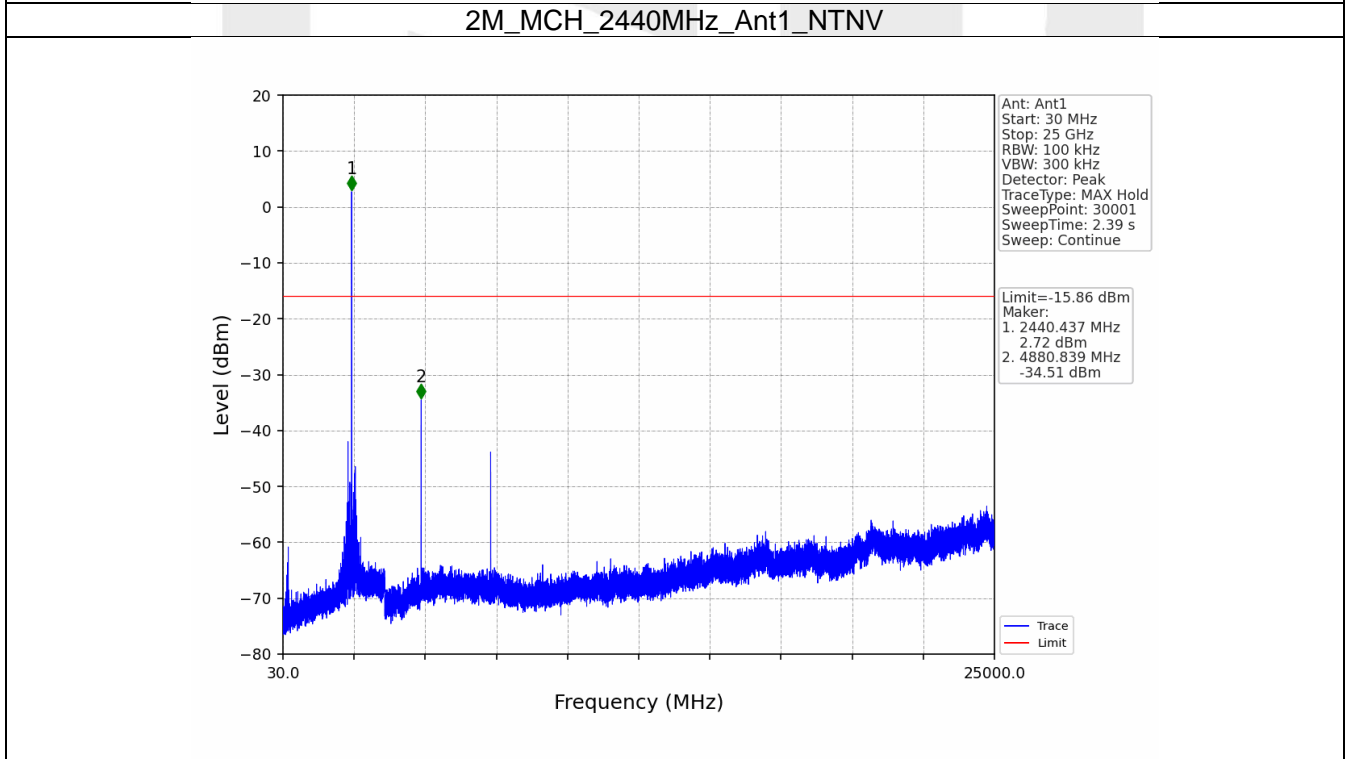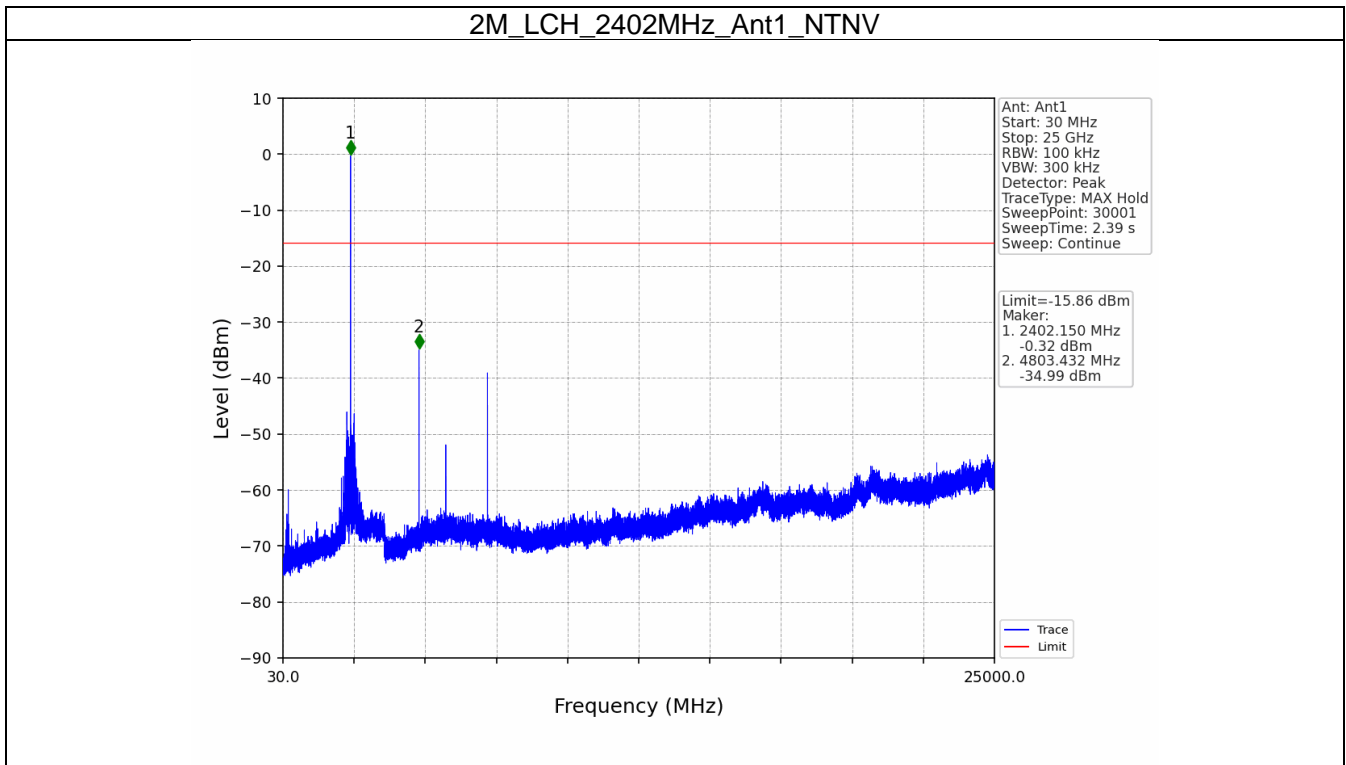

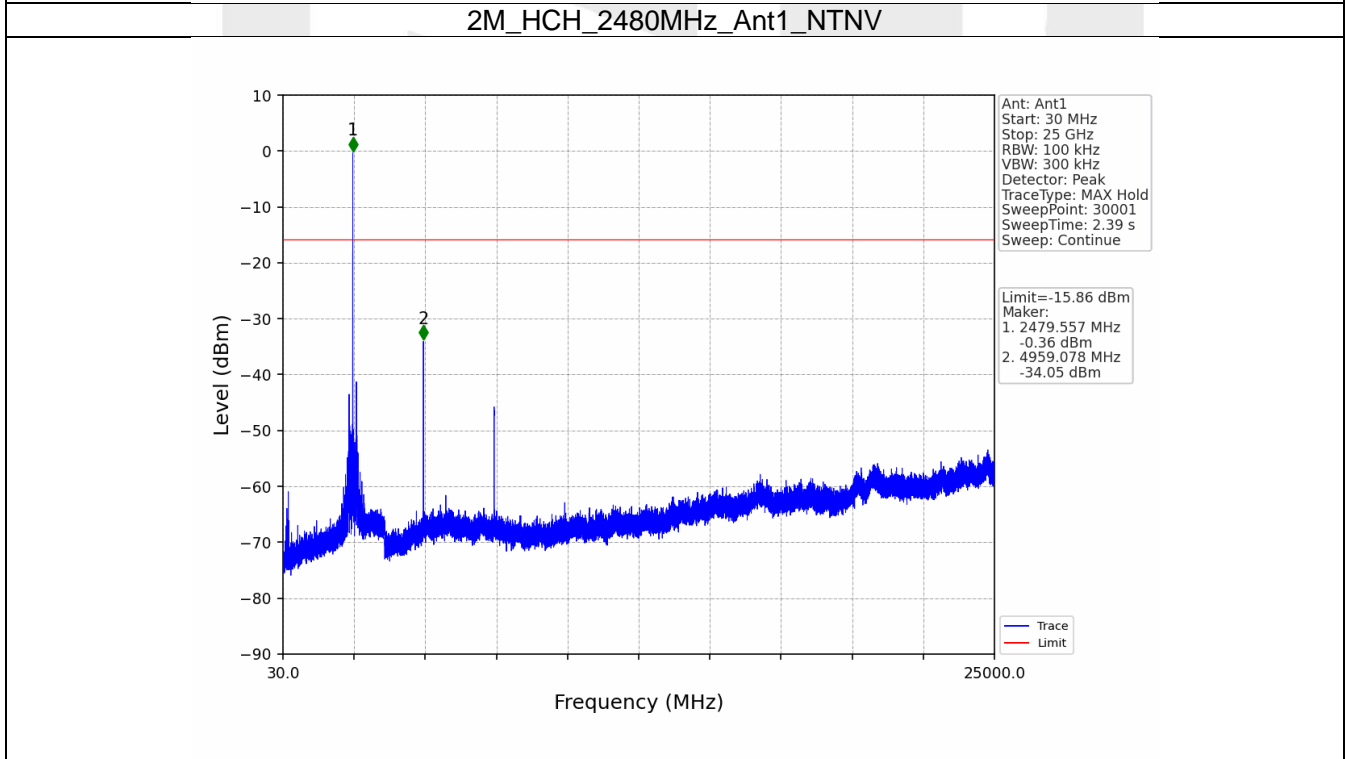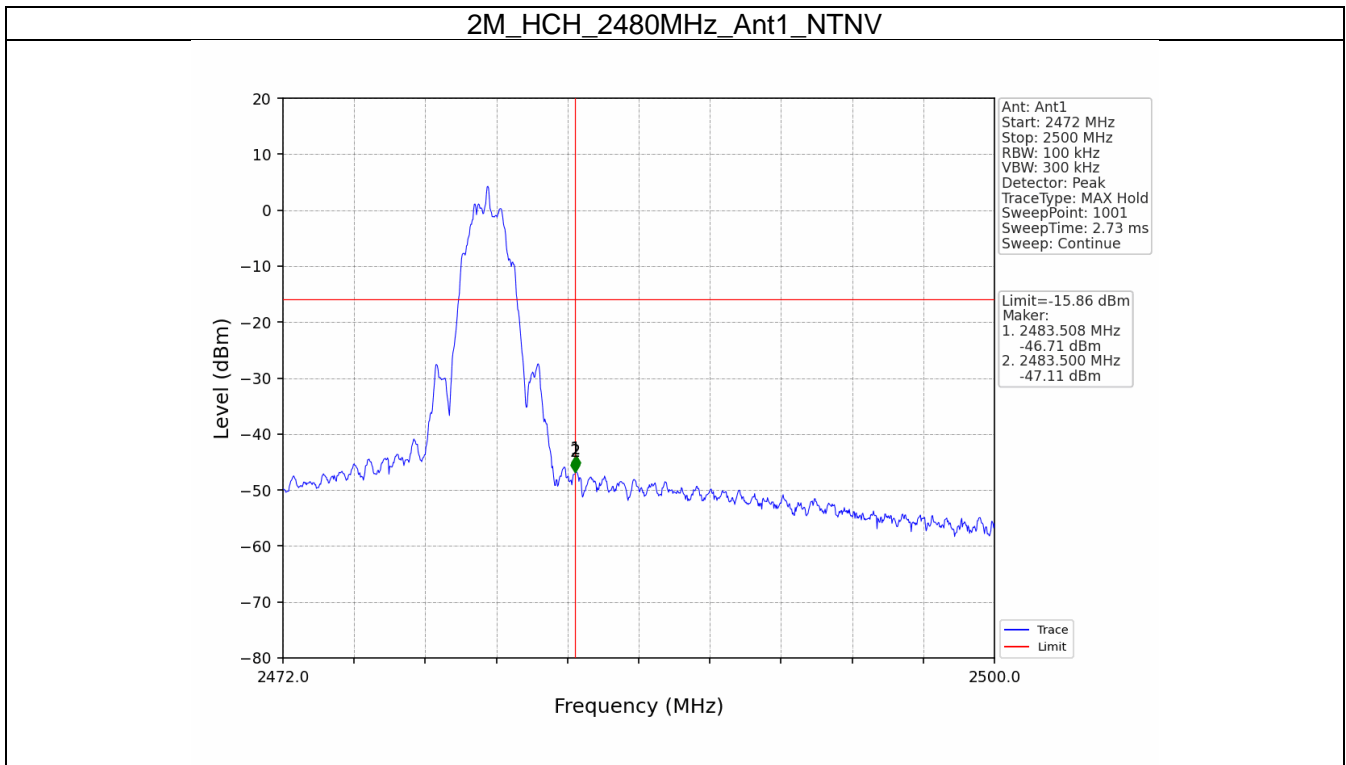

----- End of Report -----