


Guangli Hechuang Technology Co., Ltd.

No.213 Shajing Road Shatou Village Shajing Street Baoan District, Shenzhen, China

1.est philosophy

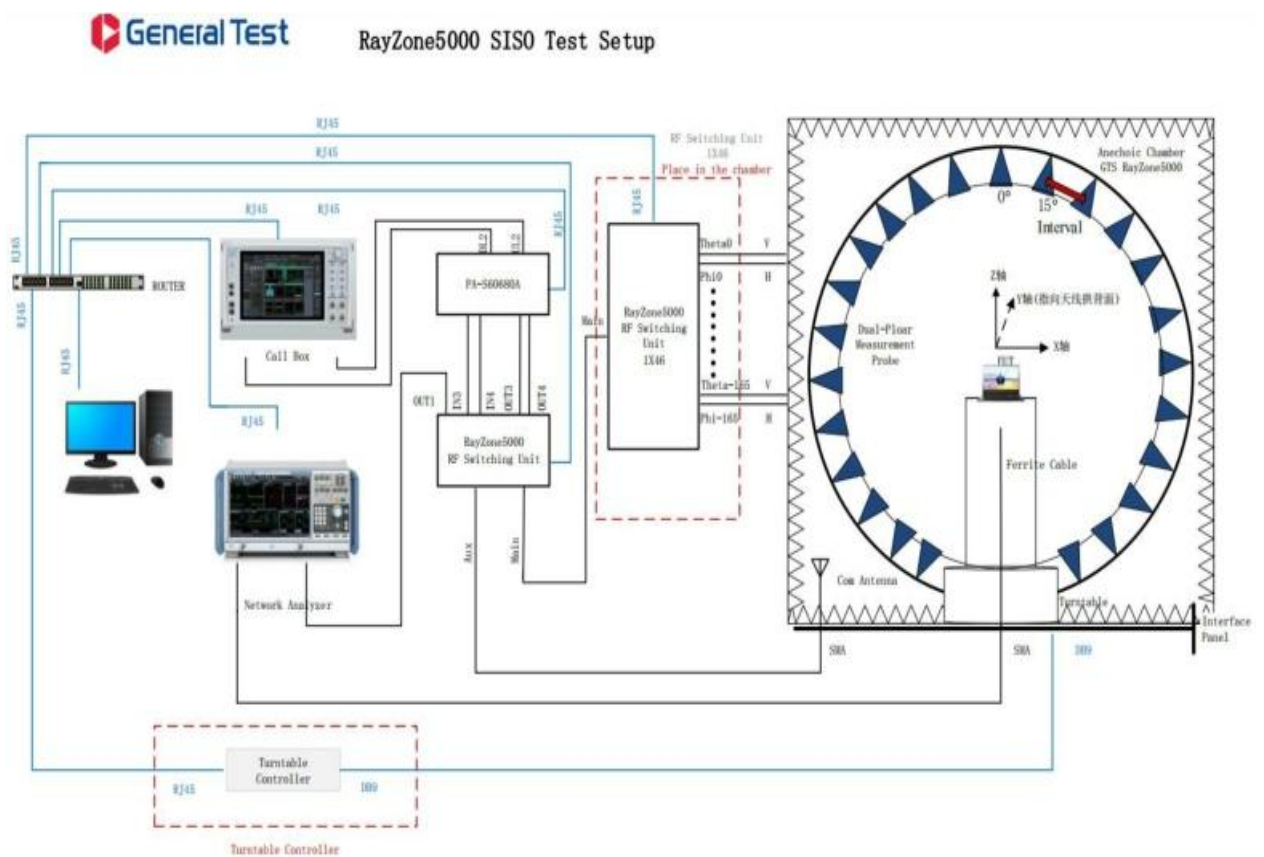

Guangli Hechuang Technology Co., Ltd.

No.213 Shajing Road Shatou Village Shajing Street Baoan District, Shenzhen, China


2. est equipment

name	Model	No.	manufacturer	calibration	expire
OTA T e t s	RayZone-5000	RFI-LAB-RF-D00	GTS	2021.3.22	2023.3.21
network analyzer	E5071C	RFI-LAB-RF-C02	KEYSIGHT	2022.5.13	2023.5.12
network analyzer	E5071C	RFI-LAB-RF-D01	KEYSIGHT	2022.5.13	2023.5.12


3. testing environment

temperature	23.6℃
humidity	58%RH
atmospheric pressure	100.14kPa

4. Size

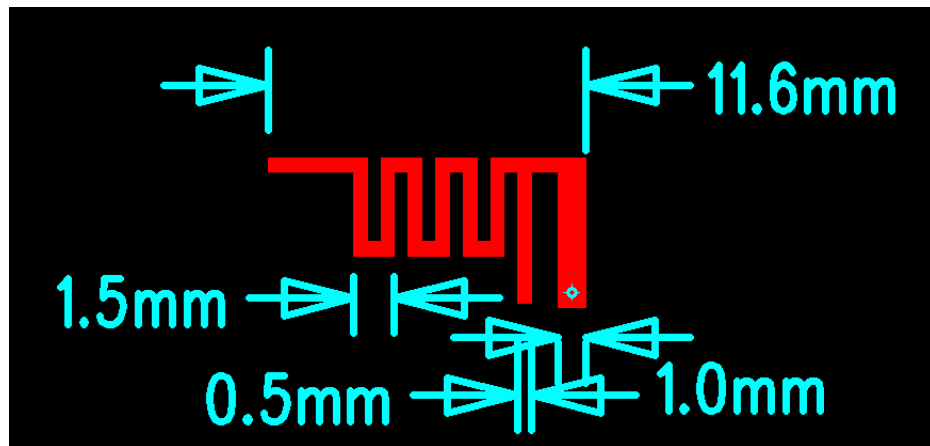


5. Test

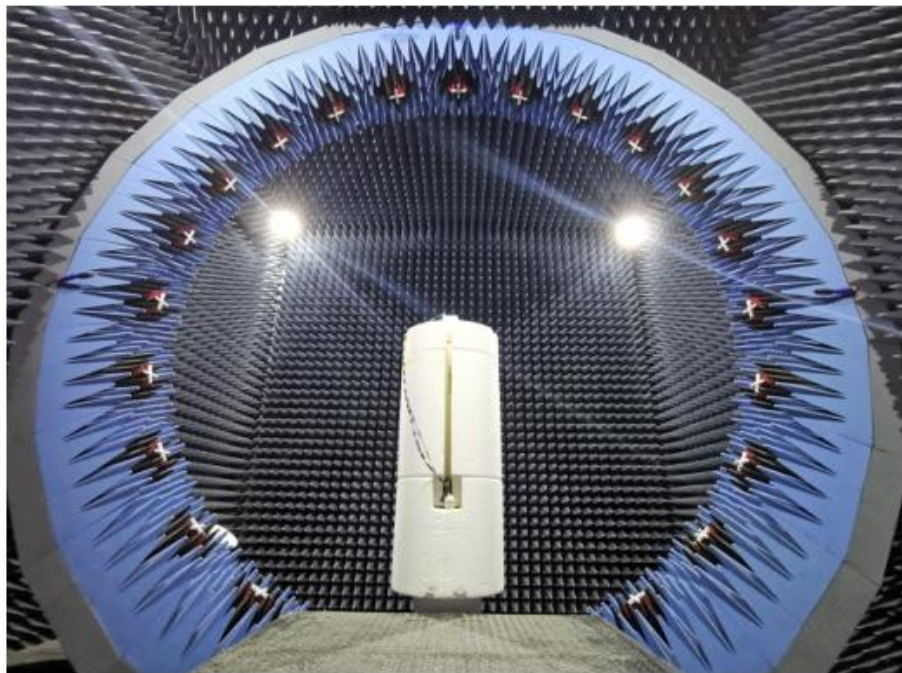

6. Test Data

6.1 Network analyzer test

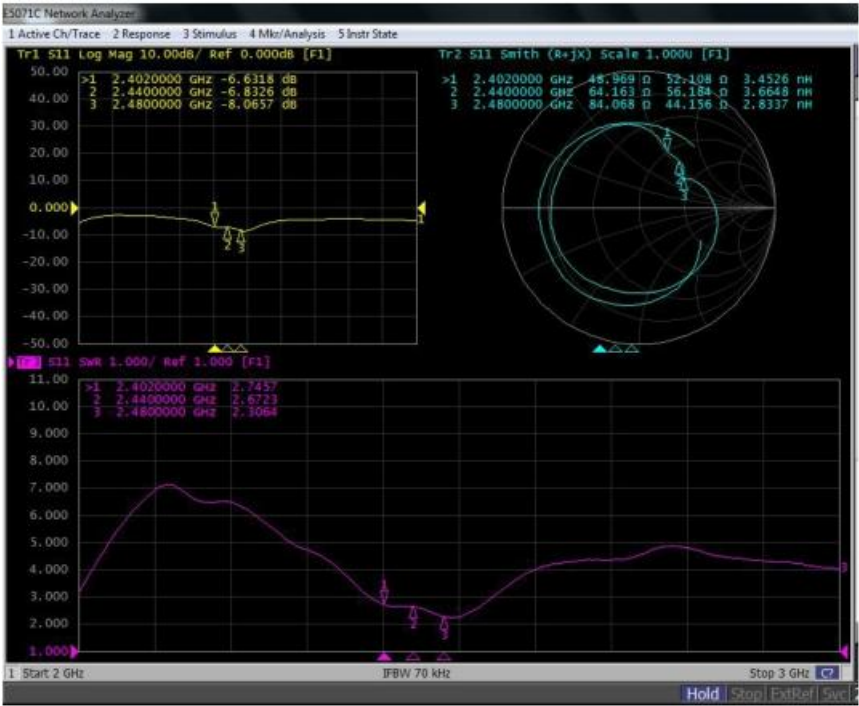

6.2 VSWR

Frequency/MHz	2402	2440	2480
VSWR	2.7457	2.6723	2.3064


6.3 Gain

Frequency/MHz	2402	2410	2420	2430	2440	2450	2460	2470	2480
Gain/dBi	-1.97	-1.95	-1.63	-1.49	-1.27	-1.06	-0.89	-0.71	-0.95
efficiency/%	17.88	18.34	19.20	19.89	20.58	20.86	21.78	22.18	21.03


6.4 directional diagram Data

Frequency/MHz	2402	2410	2420	2430	2440	2450	2460	2470	2480
H Theta=90/dB	20.55	20.57	20.15	19.12	18.93	20.11	20.49	19.26	16.51


6.5 directional diagram

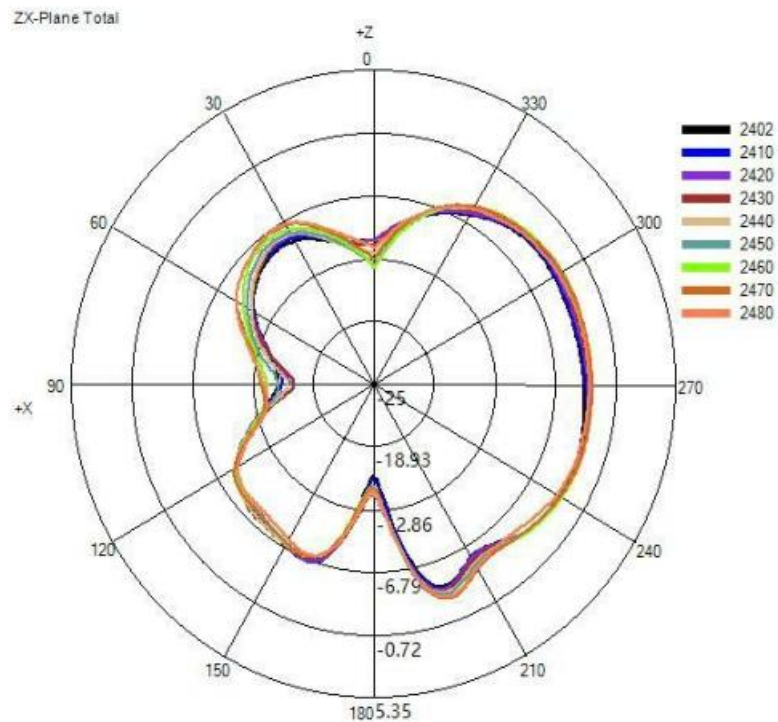

(2) Y-Z 面(单位: dBi):

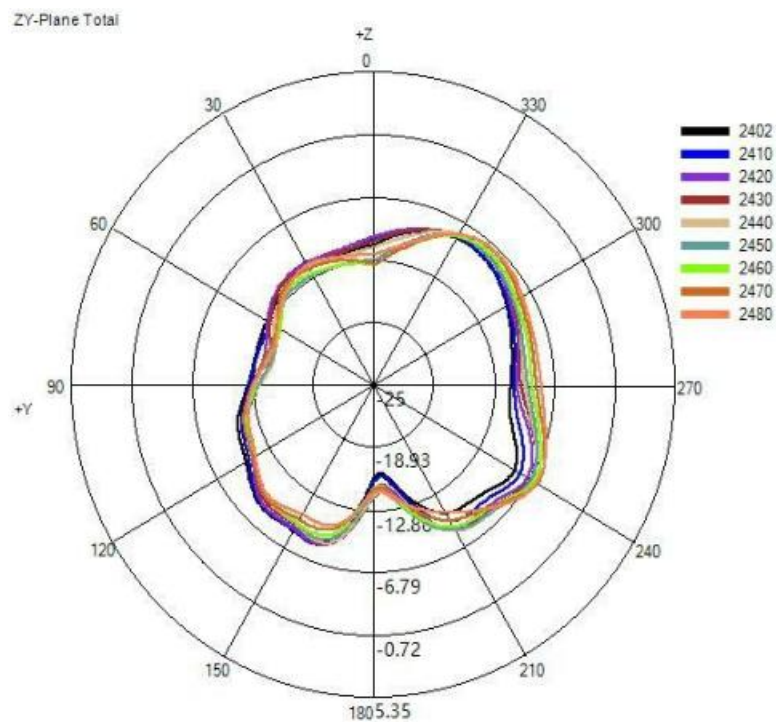

(3) X-Y 面(单位: dBi):

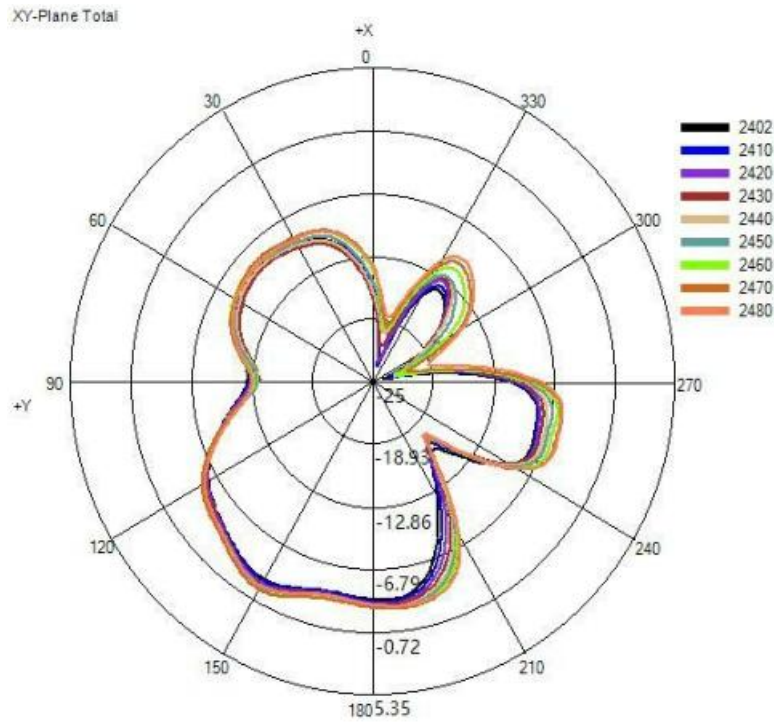

(4) 2450MHz 的 3D 方向图(单位: dBi):

