



# TEST REPORT

Product Name: Rearview mirror dual channel recorder  
FCC ID: 2BD5O-LS5  
Trademark: N/A  
Model Number: LS5  
Prepared For: Shenzhen Leku Zhichuang Electronic TechnologyCo., Ltd  
Address: Room 402, Building 3, Xingu Industrial Zone, Gushu CommunityXixiang Street, Baoan District, Shenzhen  
Manufacturer: Shenzhen Leku Zhichuang Electronic TechnologyCo., Ltd  
Address: Room 402, Building 3, Xingu Industrial Zone, Gushu CommunityXixiang Street, Baoan District, Shenzhen  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Sep. 29, 2024  
Sample tested Date: Sep. 29, 2024 to Oct. 14, 2024  
Issue Date: Oct. 14, 2024  
Report No.: CTB24092900401RF01  
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	3
<b>2. TEST SUMMARY</b> .....	4
<b>3. MEASUREMENT UNCERTAINTY</b> .....	5
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	6
4.1 Product Information .....	6
4.2 Test Setup Configuration .....	6
4.3 Support Equipment .....	6
4.4 Channel List .....	6
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	8
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	10
6.1 Block Diagram Of Test Setup .....	10
6.2 Limit .....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
<b>7. RADIATED SPURIOUS EMISSION</b> .....	13
7.1 Block Diagram Of Test Setup .....	13
7.2 Limit .....	13
7.3 Test procedure .....	14
7.4 Test Result .....	15
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	37
8.1 Block Diagram Of Test Setup .....	37
8.2 Limit .....	37
8.3 Test procedure .....	37
8.4 Test Result .....	38
<b>9. CONDUCTED OUTPUT POWER</b> .....	46
9.1 Block Diagram Of Test Setup .....	46
9.2 Limit .....	46
9.3 Test procedure .....	46
9.4 Test Result .....	46
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	47
10.1 Block Diagram Of Test Setup .....	47
10.2 Limit .....	47
10.3 Test procedure .....	47
10.4 Test Result .....	48
<b>11. POWER SPECTRAL DENSITY</b> .....	53
11.1 Block Diagram Of Test Setup .....	53
11.2 Limit .....	53
11.3 Test procedure .....	53
11.4 Test Result .....	54
<b>12. ANTENNA REQUIREMENT</b> .....	59
<b>13. EUT TEST SETUP PHOTOGRAPHS</b> .....	60
<b>(NOTE: N/A MEANS NOT APPLICABLE)</b>	

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB24092900401RF01	Oct. 14, 2024	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	LS5
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 14.03dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): PCB antenna
Antenna Gain:	WiFi (2.4G): 2.78dBi
Ratings:	DC 12V charging from adapter DC 3.7V by battery

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	DC power	LONGWEI	TPR-12002D	/	AE

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

##### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28




22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/6/28
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

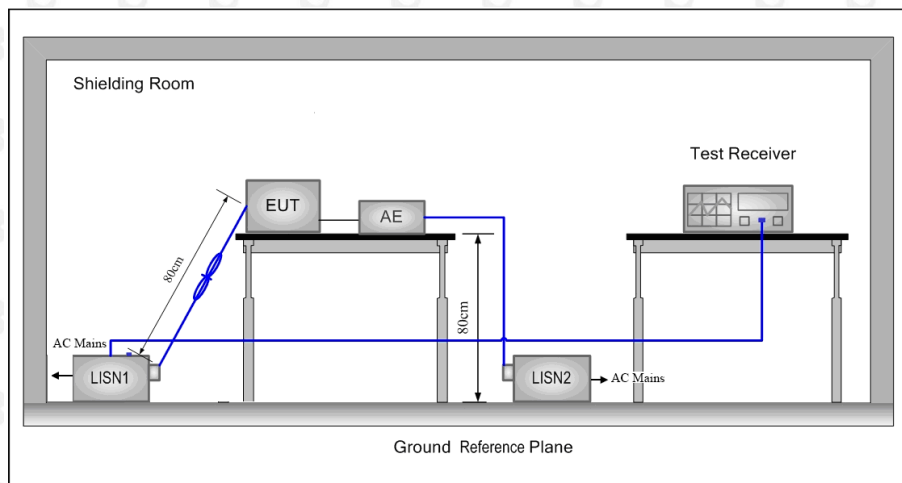

### 6.2 Limit

**Table 4 - AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

#### 6.4 Test Result

N/A

NOTE: This EUT is powered by DC power only, this test item is not applicable.

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

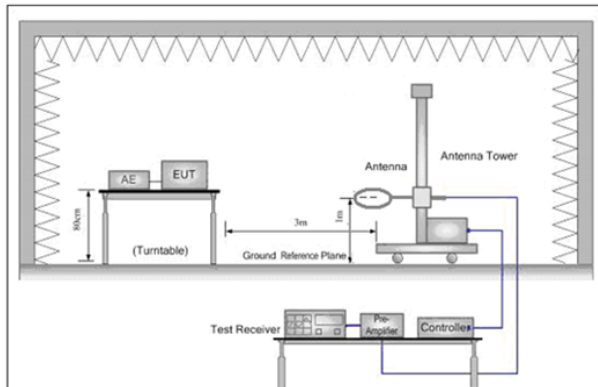


Figure 1. Below 30MHz

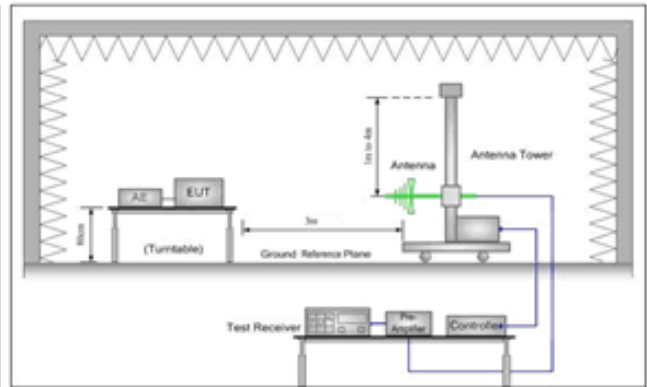


Figure 2. 30MHz to 1GHz

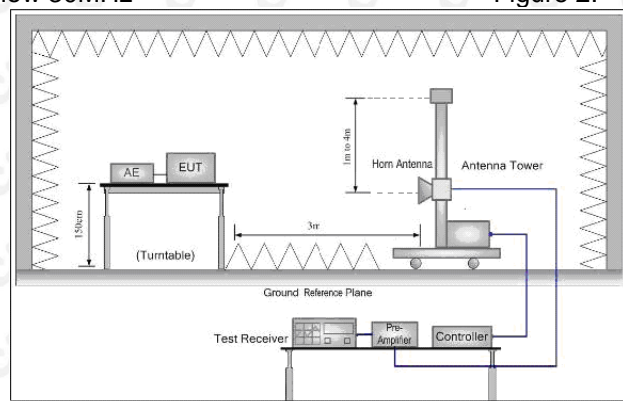


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

### 7.4 Test Result


Below 1GHz Test Results:  
Antenna polarity: H

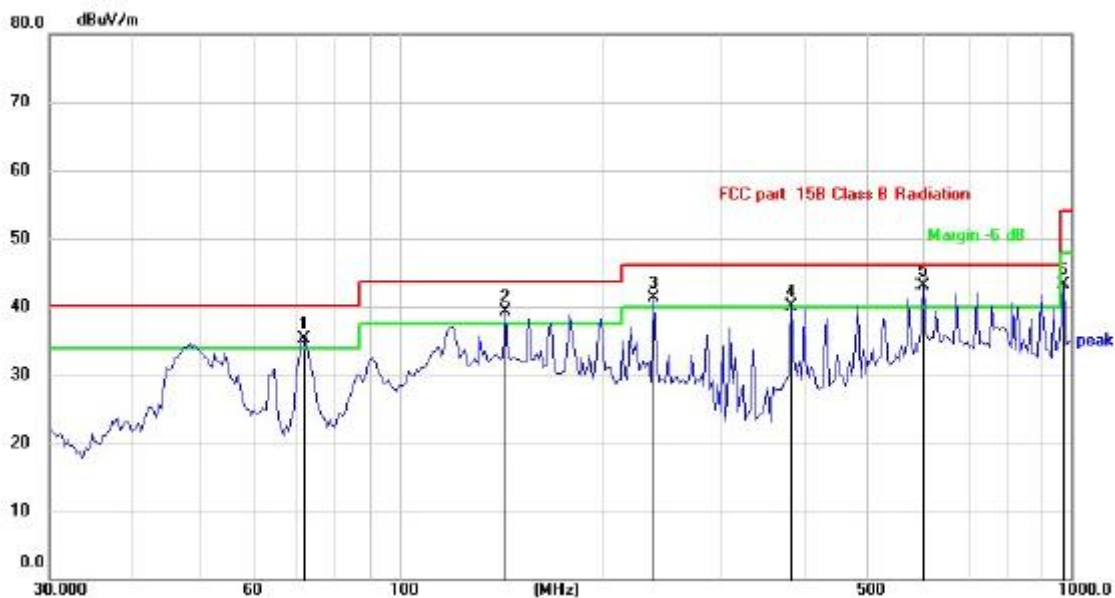

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	72.0841	43.97	-8.69	35.28	40.00	-4.72	QP
2	!	144.0818	43.02	-3.72	39.30	43.50	-4.20	QP
3	!	239.5669	45.39	-4.02	41.37	46.00	-4.63	QP
4	!	384.6055	41.26	-1.06	40.20	46.00	-5.80	QP
5	*	601.4265	39.42	3.59	43.01	46.00	-2.99	QP
6		974.0435	34.48	8.78	43.26	54.00	-10.74	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

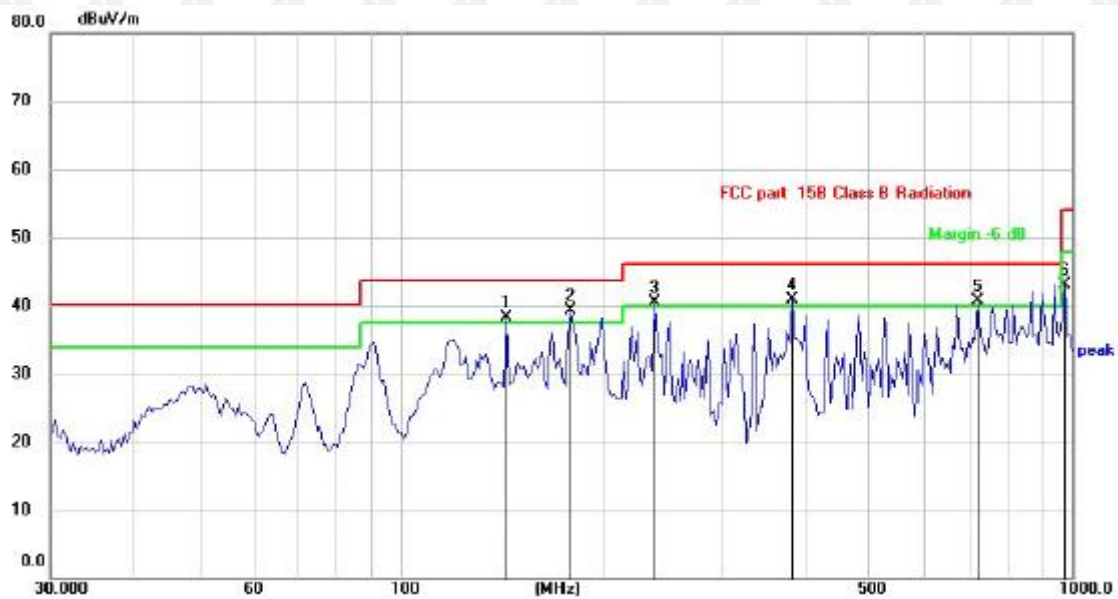

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1	!	144.0818	42.06	-3.72	38.34	43.50	-5.16	QP
2	*	179.3863	42.86	-3.52	39.34	43.50	-4.16	QP
3	!	239.5669	44.56	-4.02	40.54	46.00	-5.46	QP
4	!	384.6055	41.95	-1.06	40.89	46.00	-5.11	QP
5	!	722.9923	34.88	5.86	40.74	46.00	-5.26	QP
6		974.0435	34.30	8.78	43.08	54.00	-10.92	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)



Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.76	-3.64	62.12	74	-11.88	peak
4824	50.25	-3.64	46.61	54	-7.39	AVG
7236	58.80	-0.95	57.85	74	-16.15	peak
7236	43.87	-0.95	42.92	54	-11.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.84	-3.64	63.20	74	-10.80	peak
4824	48.44	-3.64	44.80	54	-9.20	AVG
7236	57.33	-0.95	56.38	74	-17.62	peak
7236	43.71	-0.95	42.76	54	-11.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.73	-3.51	62.22	74	-11.78	peak
4874	49.62	-3.51	46.11	54	-7.89	AVG
7311	58.89	-0.82	58.07	74	-15.93	peak
7311	43.85	-0.82	43.03	54	-10.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.45	-3.51	59.94	74	-14.06	peak
4874	47.79	-3.51	44.28	54	-9.72	AVG
7311	59.53	-0.82	58.71	74	-15.29	peak
7311	42.41	-0.82	41.59	54	-12.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	63.66	-3.43	60.23	74	-13.77	peak
4924	48.81	-3.43	45.38	54	-8.62	AVG
7386	58.64	-0.75	57.89	74	-16.11	peak
7386	44.11	-0.75	43.36	54	-10.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	64.31	-3.43	60.88	74	-13.12	peak
4924	47.72	-3.43	44.29	54	-9.71	AVG
7386	56.66	-0.75	55.91	74	-18.09	peak
7386	43.80	-0.75	43.05	54	-10.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.84	-3.64	62.20	74	-11.80	peak
4824	47.62	-3.64	43.98	54	-10.02	AVG
7236	58.06	-0.95	57.11	74	-16.89	peak
7236	45.49	-0.95	44.54	54	-9.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	61.92	-3.64	58.28	74	-15.72	peak
4824	46.75	-3.64	43.11	54	-10.89	AVG
7236	59.54	-0.95	58.59	74	-15.41	peak
7236	43.73	-0.95	42.78	54	-11.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.24	-3.51	61.73	74	-12.27	peak
4874	49.56	-3.51	46.05	54	-7.95	AVG
7311	59.88	-0.82	59.06	74	-14.94	peak
7311	43.74	-0.82	42.92	54	-11.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.08	-3.51	59.57	74	-14.43	peak
4874	46.86	-3.51	43.35	54	-10.65	AVG
7311	57.33	-0.82	56.51	74	-17.49	peak
7311	41.76	-0.82	40.94	54	-13.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.20	-3.43	60.77	74	-13.23	peak
4924	48.16	-3.43	44.73	54	-9.27	AVG
7386	57.87	-0.75	57.12	74	-16.88	peak
7386	41.33	-0.75	40.58	54	-13.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.20	-3.43	58.77	74	-15.23	peak
4924	48.47	-3.43	45.04	54	-8.96	AVG
7386	57.40	-0.75	56.65	74	-17.35	peak
7386	41.85	-0.75	41.10	54	-12.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.78	-3.64	59.14	74	-14.86	peak
4824	49.28	-3.64	45.64	54	-8.36	AVG
7236	57.66	-0.95	56.71	74	-17.29	peak
7236	44.64	-0.95	43.69	54	-10.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.78	-3.64	60.14	74	-13.86	peak
4824	48.52	-3.64	44.88	54	-9.12	AVG
7236	56.44	-0.95	55.49	74	-18.51	peak
7236	44.46	-0.95	43.51	54	-10.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.92	-3.51	60.41	74.00	-13.59	peak
4874.00	50.06	-3.51	46.55	54.00	-7.45	AVG
7311.00	59.21	-0.82	58.39	74.00	-15.61	peak
7311.00	46.09	-0.82	45.27	54.00	-8.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.78	-3.51	59.27	74.00	-14.73	peak
4874.00	48.43	-3.51	44.92	54.00	-9.08	AVG
7311.00	56.87	-0.82	56.05	74.00	-17.95	peak
7311.00	42.32	-0.82	41.50	54.00	-12.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.31	-3.43	58.88	74	-15.12	peak
4924	47.27	-3.43	43.84	54	-10.16	AVG
7386	57.25	-0.75	56.50	74	-17.50	peak
7386	41.55	-0.75	40.80	54	-13.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.14	-3.43	61.71	74	-12.29	peak
4924	46.44	-3.43	43.01	54	-10.99	AVG
7386	57.90	-0.75	57.15	74	-16.85	peak
7386	43.09	-0.75	42.34	54	-11.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	64.54	-3.63	60.91	74	-13.09	peak
4844	48.31	-3.63	44.68	54	-9.32	AVG
7266	59.60	-0.94	58.66	74	-15.34	peak
7266	46.92	-0.94	45.98	54	-8.02	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.35	-3.63	61.72	74	-12.28	peak
4844	48.06	-3.63	44.43	54	-9.57	AVG
7266	59.20	-0.94	58.26	74	-15.74	peak
7266	44.40	-0.94	43.46	54	-10.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.27	-3.51	61.76	74	-12.24	peak
4874	47.39	-3.51	43.88	54	-10.12	AVG
7311	58.94	-0.82	58.12	74	-15.88	peak
7311	45.34	-0.82	44.52	54	-9.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.26	-3.51	58.75	74	-15.25	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	62.26	-3.43	58.83	74	-15.17	peak
4904	46.75	-3.43	43.32	54	-10.68	AVG
7356	55.94	-0.75	55.19	74	-18.81	peak
7356	42.22	-0.75	41.47	54	-12.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	62.22	-3.43	58.79	74	-15.21	peak
4904	46.26	-3.43	42.83	54	-11.17	AVG
7356	59.20	-0.75	58.45	74	-15.55	peak
7356	43.20	-0.75	42.45	54	-11.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

### Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.16	-5.81	51.35	74	-22.65	peak
2390	/	-5.81	/	54	/	AVG
2399	64.46	-5.84	58.62	74	-15.38	peak
2399	48.38	-5.84	42.54	54	-11.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.82	-5.81	52.01	74	-21.99	peak
2390	/	-5.81	/	54	/	AVG
2399	62.38	-5.84	56.54	74	-17.46	peak
2399	47.40	-5.84	41.56	54	-12.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.65	-5.65	52.00	74	-22.00	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.22	-5.65	51.57	74	-22.43	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	58.85	-5.81	53.04	74	-20.96	peak
2390	/	-5.81	/	54	/	AVG
2399	62.35	-5.84	56.51	74	-17.49	peak
2399	47.19	-5.84	41.35	54	-12.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	56.36	-5.81	50.55	74	-23.45	peak
2390	/	-5.81	/	54	/	AVG
2399	62.85	-5.84	57.01	74	-16.99	peak
2399	45.21	-5.84	39.37	54	-14.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.12	-5.65	50.47	74	-23.53	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.34	-5.65	50.69	74	-23.31	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.32	-5.81	51.51	74	-22.49	peak
2390	/	-5.81	/	54	/	AVG
2399	62.48	-5.84	56.64	74	-17.36	peak
2399	47.36	-5.84	41.52	54	-12.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.50	-5.81	51.69	74	-22.31	peak
2390	/	-5.81	/	54	/	AVG
2399	61.66	-5.84	55.82	74	-18.18	peak
2399	46.59	-5.84	40.75	54	-13.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.05	-5.65	50.40	74	-23.60	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.51	-5.65	49.86	74	-24.14	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.20	-5.81	53.39	74	-20.61	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.75	-5.81	51.94	74	-22.06	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.43	-5.65	50.78	74	-23.22	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.53	-5.65	49.88	74	-24.12	peak
2483.5	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

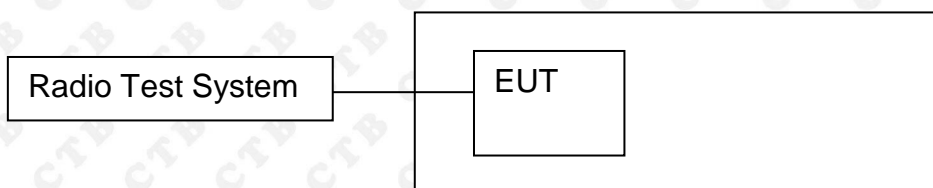


### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold

8.4 Test Result

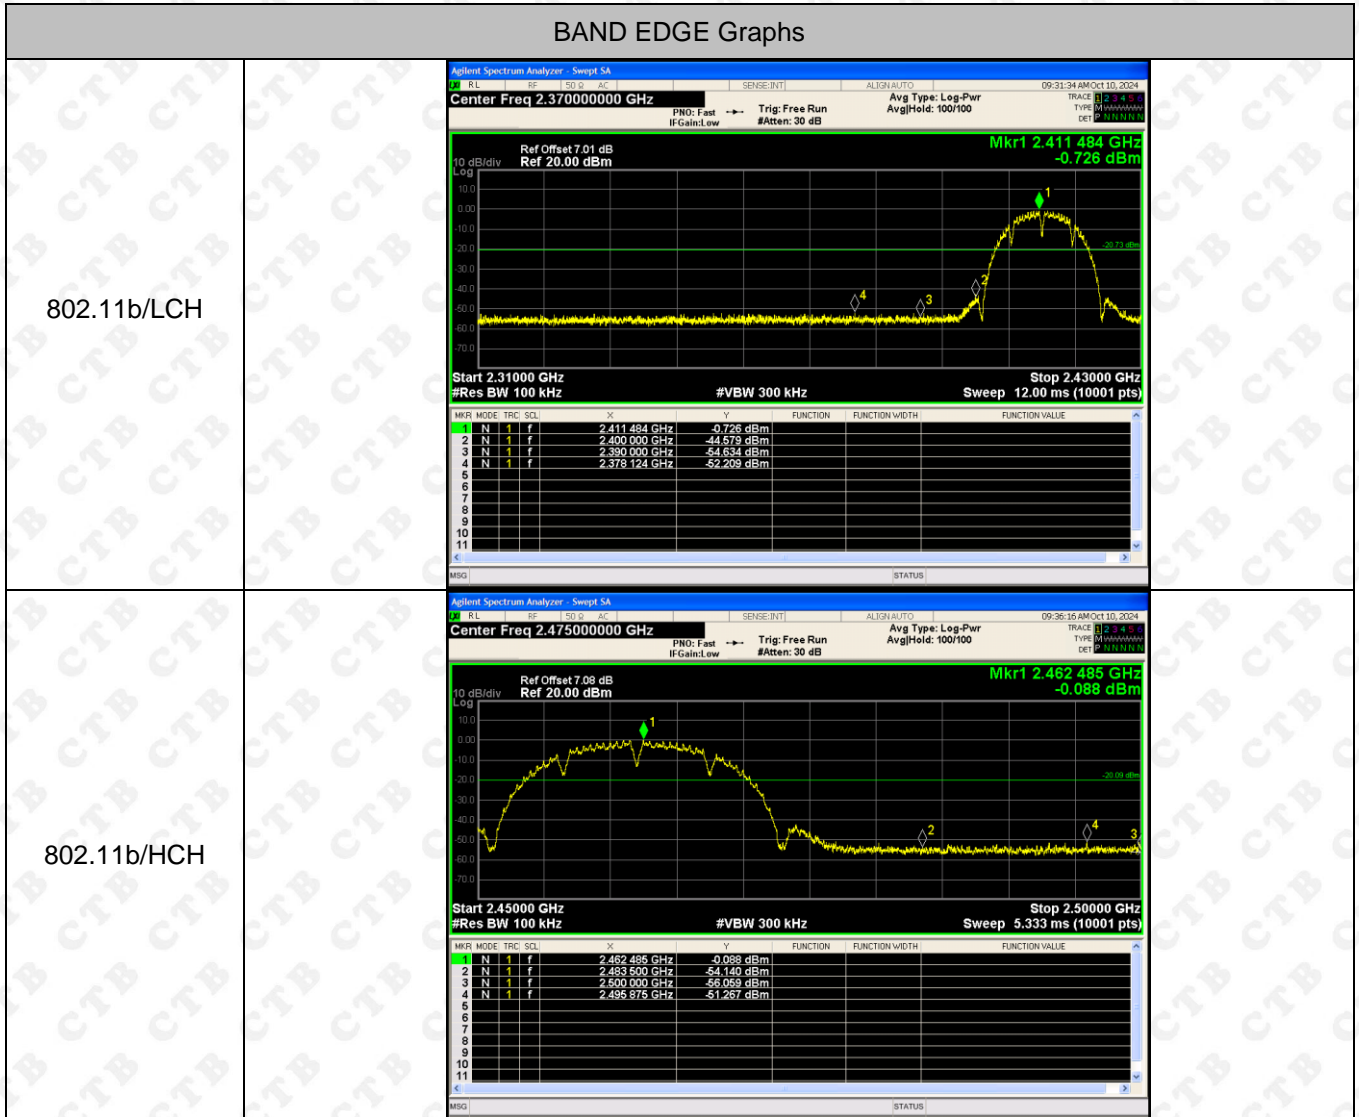



## BAND EDGE Graphs

802.11g/LCH

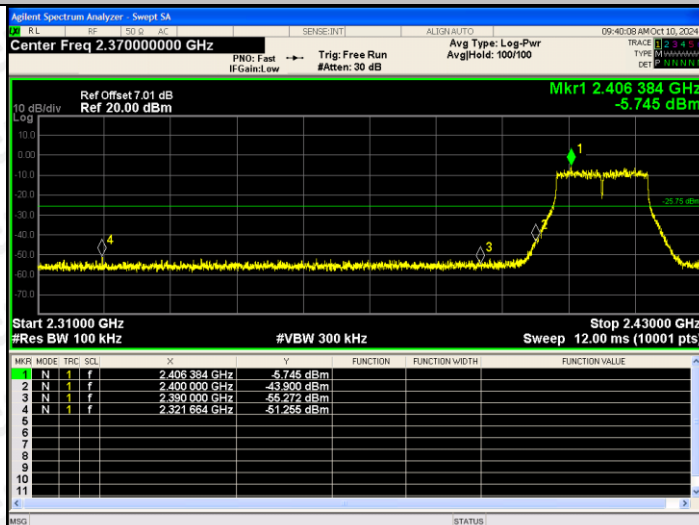


802.11g/HCH

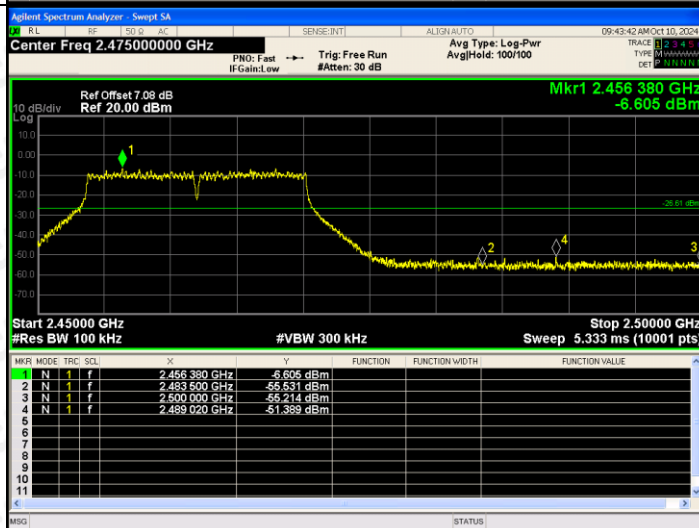

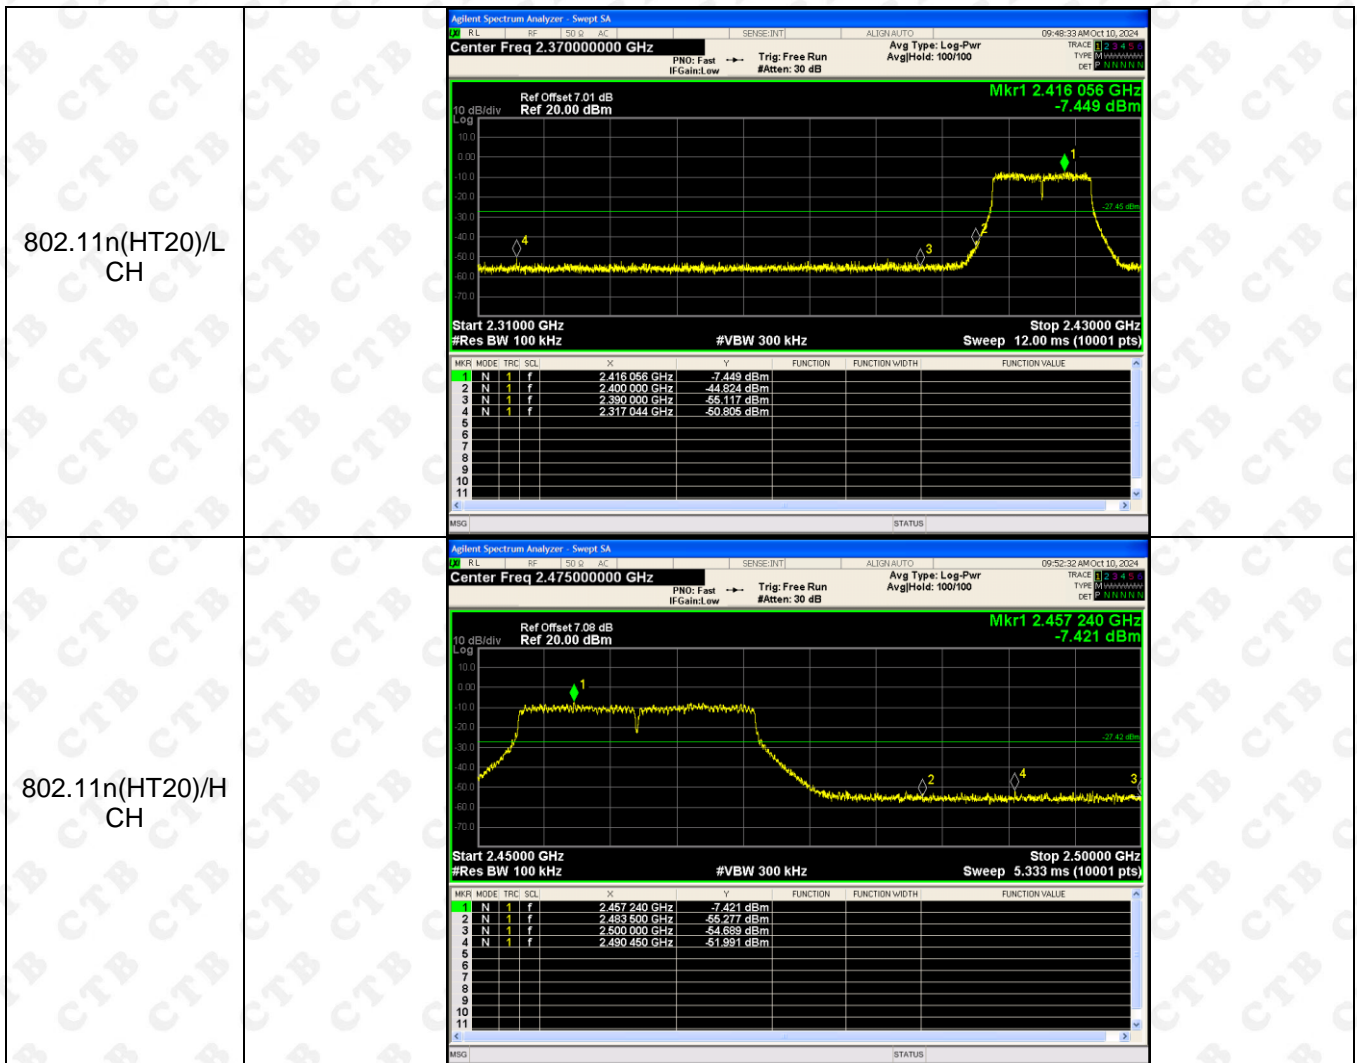




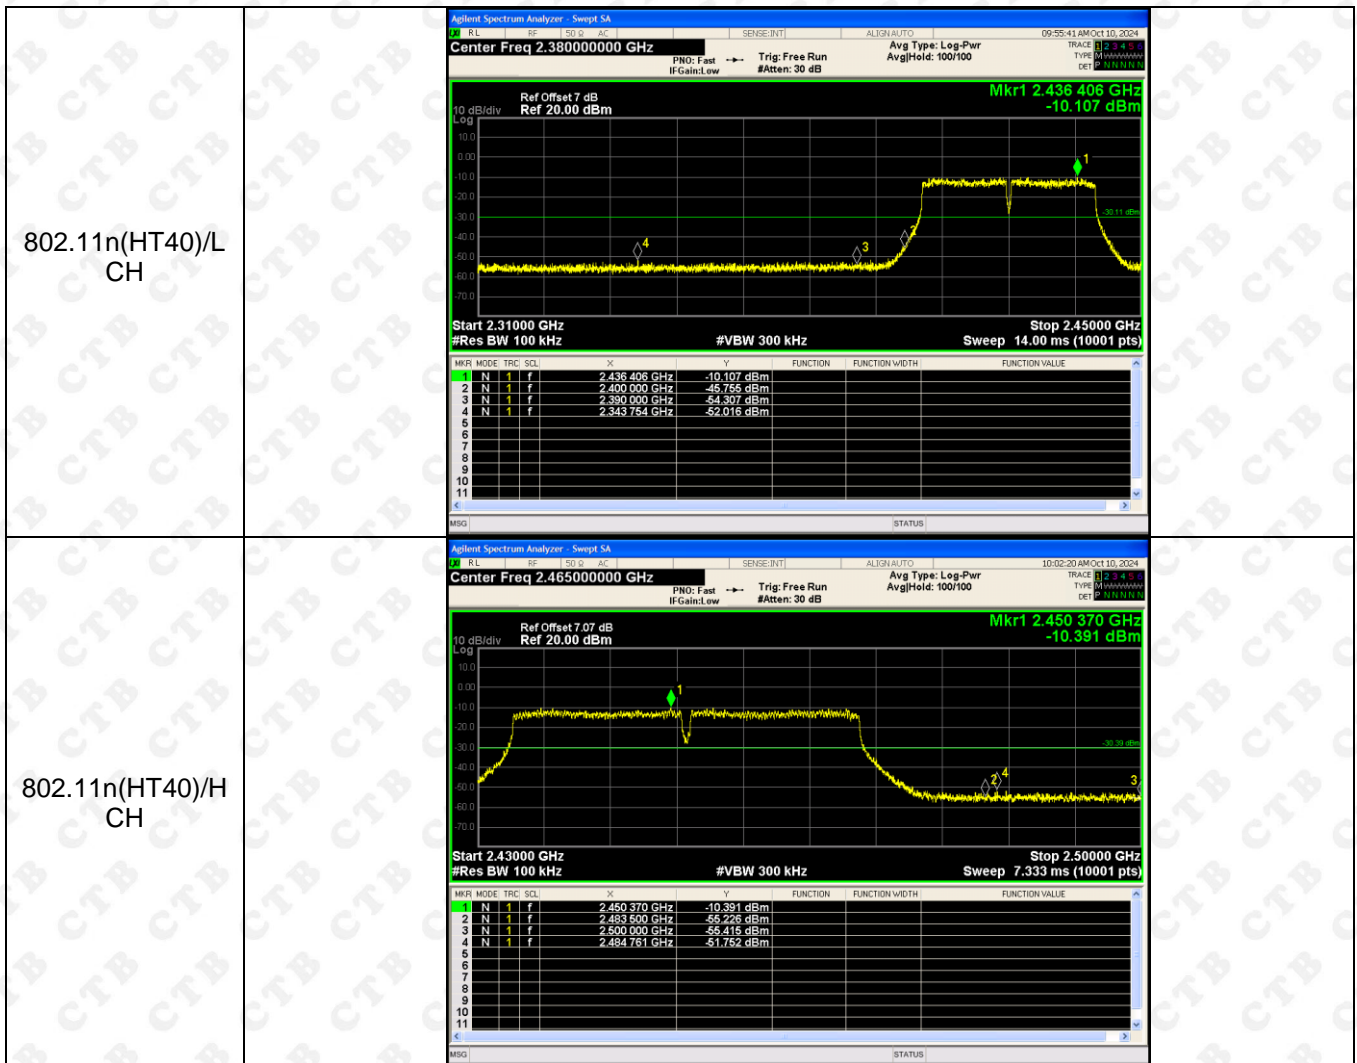


RF Conducted Spurious Emissions Graphs

<p>802.11b/LCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4114 GHz</td> <td></td> <td></td> <td>-1.596 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6506 GHz</td> <td></td> <td></td> <td>-41.005 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8961 GHz</td> <td></td> <td></td> <td>-55.429 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1337 GHz</td> <td></td> <td></td> <td>-53.783 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5199 GHz</td> <td></td> <td></td> <td>-53.757 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4114 GHz			-1.596 dBm	2	N	1	f	24.6506 GHz			-41.005 dBm	3	N	1	f	4.8961 GHz			-55.429 dBm	4	N	1	f	7.1337 GHz			-53.783 dBm	5	N	1	f	9.5199 GHz			-53.757 dBm
MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4114 GHz			-1.596 dBm																																										
2	N	1	f	24.6506 GHz			-41.005 dBm																																										
3	N	1	f	4.8961 GHz			-55.429 dBm																																										
4	N	1	f	7.1337 GHz			-53.783 dBm																																										
5	N	1	f	9.5199 GHz			-53.757 dBm																																										
<p>802.11b/MCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4379 GHz</td> <td></td> <td></td> <td>-0.638 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.0569 GHz</td> <td></td> <td></td> <td>-41.981 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7443 GHz</td> <td></td> <td></td> <td>-54.890 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4125 GHz</td> <td></td> <td></td> <td>-53.382 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5530 GHz</td> <td></td> <td></td> <td>-53.651 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4379 GHz			-0.638 dBm	2	N	1	f	25.0569 GHz			-41.981 dBm	3	N	1	f	4.7443 GHz			-54.890 dBm	4	N	1	f	7.4125 GHz			-53.382 dBm	5	N	1	f	9.5530 GHz			-53.651 dBm
MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4379 GHz			-0.638 dBm																																										
2	N	1	f	25.0569 GHz			-41.981 dBm																																										
3	N	1	f	4.7443 GHz			-54.890 dBm																																										
4	N	1	f	7.4125 GHz			-53.382 dBm																																										
5	N	1	f	9.5530 GHz			-53.651 dBm																																										
<p>802.11b/HCH</p>	<table border="1"> <thead> <tr> <th>MFR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4599 GHz</td> <td></td> <td></td> <td>-0.686 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6400 GHz</td> <td></td> <td></td> <td>-40.691 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8070 GHz</td> <td></td> <td></td> <td>-54.014 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2837 GHz</td> <td></td> <td></td> <td>-54.428 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9483 GHz</td> <td></td> <td></td> <td>-54.075 dBm</td> </tr> </tbody> </table>	MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4599 GHz			-0.686 dBm	2	N	1	f	24.6400 GHz			-40.691 dBm	3	N	1	f	4.8070 GHz			-54.014 dBm	4	N	1	f	7.2837 GHz			-54.428 dBm	5	N	1	f	9.9483 GHz			-54.075 dBm
MFR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4599 GHz			-0.686 dBm																																										
2	N	1	f	24.6400 GHz			-40.691 dBm																																										
3	N	1	f	4.8070 GHz			-54.014 dBm																																										
4	N	1	f	7.2837 GHz			-54.428 dBm																																										
5	N	1	f	9.9483 GHz			-54.075 dBm																																										

## RF Conducted Spurious Emissions Graphs

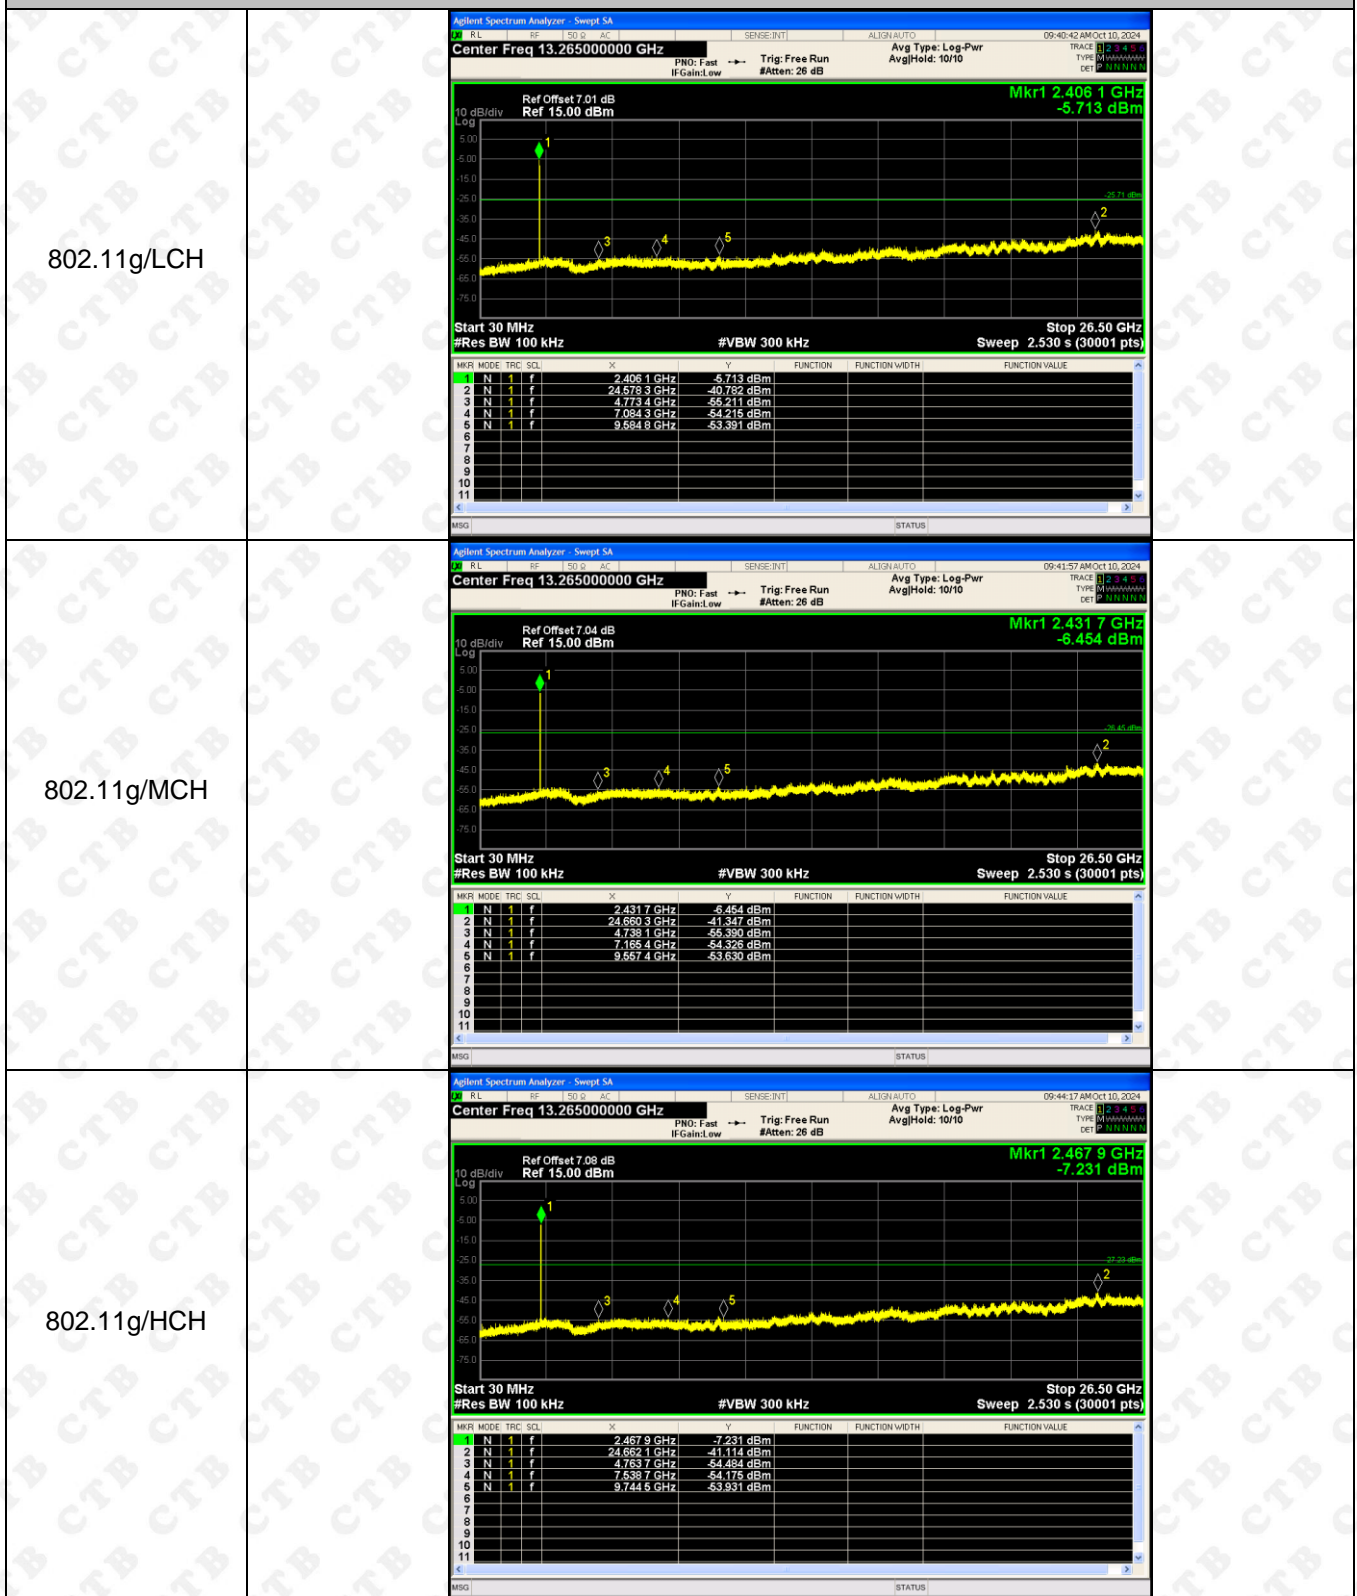

RF Conducted Spurious Emissions Graphs

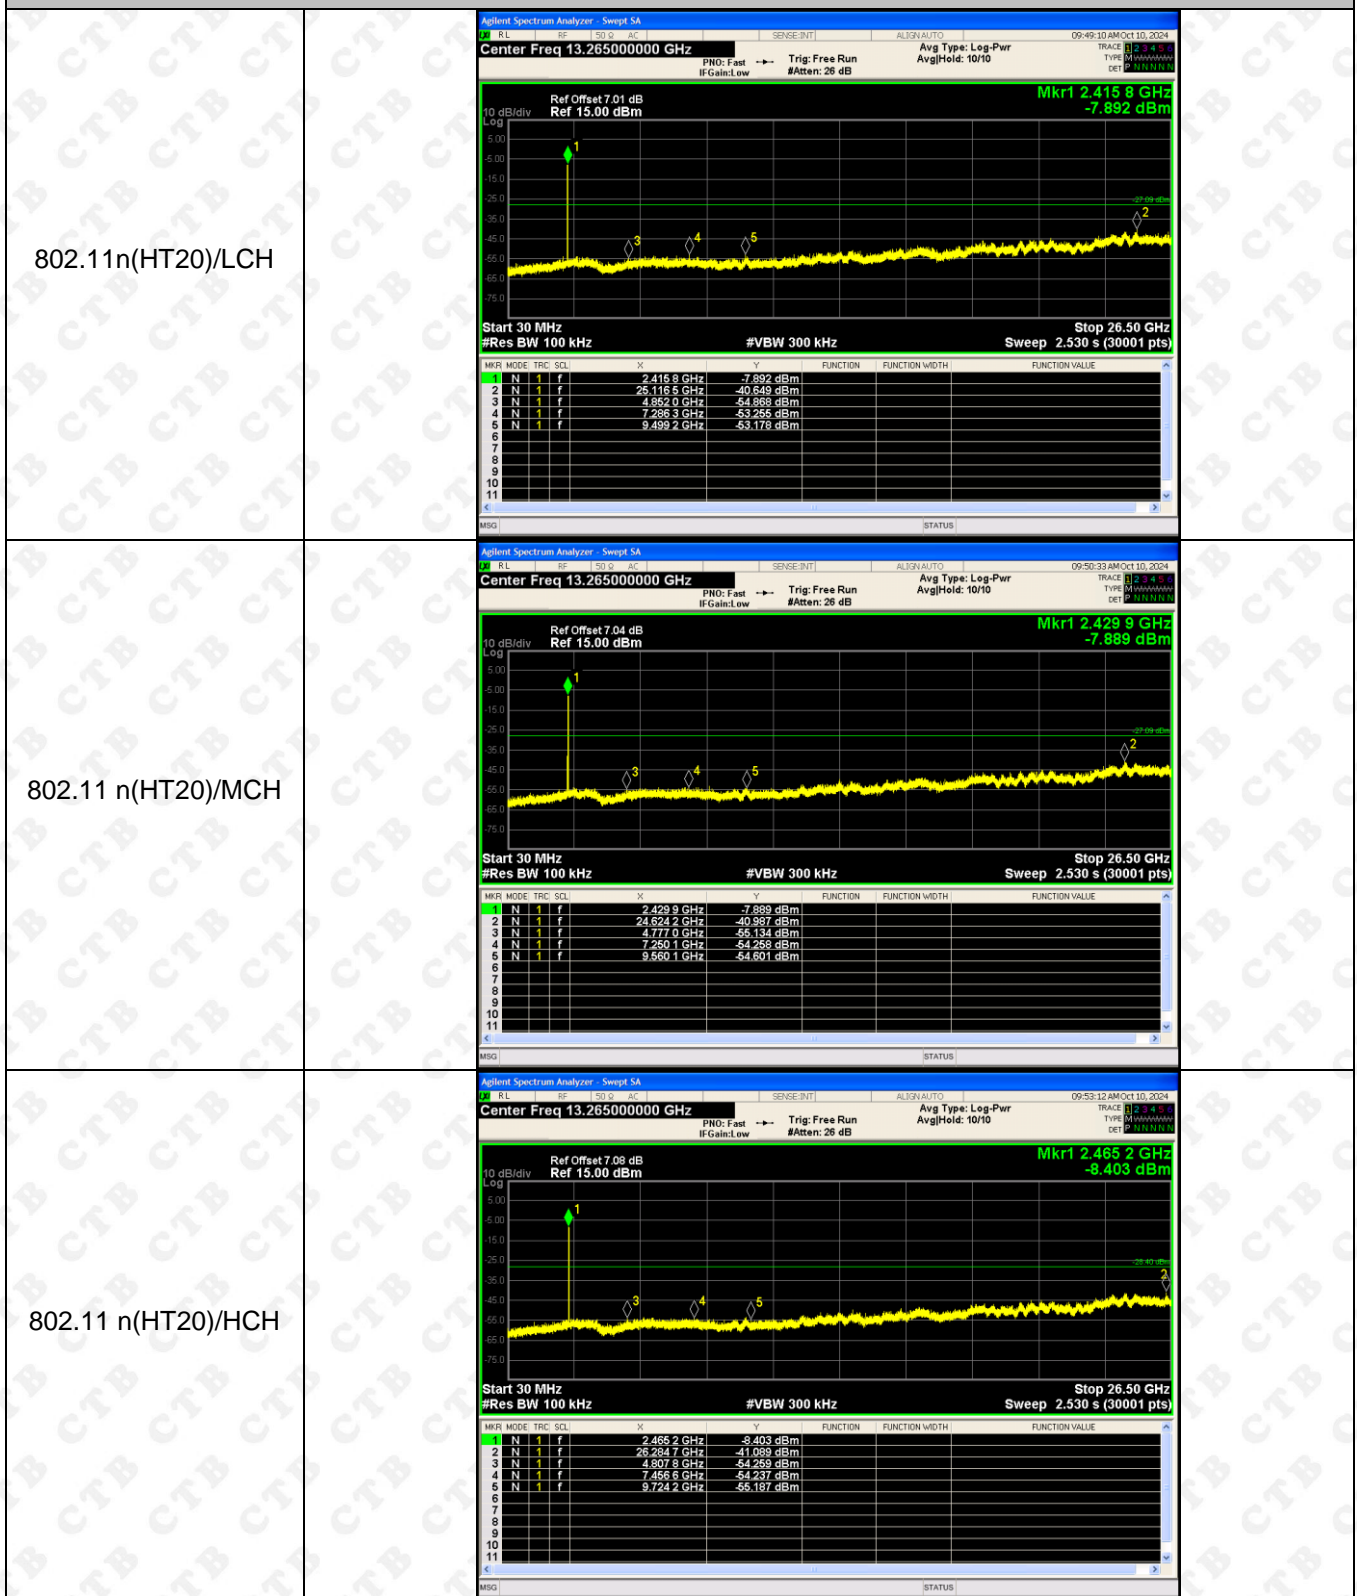

<p>802.11n(HT40)/LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.430 8 GHz</td> <td>-10.524 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.047 7 GHz</td> <td>-40.393 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.887 0 GHz</td> <td>-55.404 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.121 3 GHz</td> <td>-53.336 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.579 5 GHz</td> <td>-53.836 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.430 8 GHz	-10.524 dBm				2	N	1	f	26.047 7 GHz	-40.393 dBm				3	N	1	f	4.887 0 GHz	-55.404 dBm				4	N	1	f	7.121 3 GHz	-53.336 dBm				5	N	1	f	9.579 5 GHz	-53.836 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.430 8 GHz	-10.524 dBm																																																		
2	N	1	f	26.047 7 GHz	-40.393 dBm																																																		
3	N	1	f	4.887 0 GHz	-55.404 dBm																																																		
4	N	1	f	7.121 3 GHz	-53.336 dBm																																																		
5	N	1	f	9.579 5 GHz	-53.836 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.430 8 GHz</td> <td>-10.909 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.641 8 GHz</td> <td>-42.062 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.952 5 GHz</td> <td>-54.937 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.331 3 GHz</td> <td>-53.363 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.580 4 GHz</td> <td>-53.856 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.430 8 GHz	-10.909 dBm				2	N	1	f	24.641 8 GHz	-42.062 dBm				3	N	1	f	4.952 5 GHz	-54.937 dBm				4	N	1	f	7.331 3 GHz	-53.363 dBm				5	N	1	f	9.580 4 GHz	-53.856 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.430 8 GHz	-10.909 dBm																																																		
2	N	1	f	24.641 8 GHz	-42.062 dBm																																																		
3	N	1	f	4.952 5 GHz	-54.937 dBm																																																		
4	N	1	f	7.331 3 GHz	-53.363 dBm																																																		
5	N	1	f	9.580 4 GHz	-53.856 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.452 9 GHz</td> <td>-10.887 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.637 4 GHz</td> <td>-41.231 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.889 9 GHz</td> <td>-54.426 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.497 2 GHz</td> <td>-54.091 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.984 5 GHz</td> <td>-54.148 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.452 9 GHz	-10.887 dBm				2	N	1	f	24.637 4 GHz	-41.231 dBm				3	N	1	f	4.889 9 GHz	-54.426 dBm				4	N	1	f	7.497 2 GHz	-54.091 dBm				5	N	1	f	9.984 5 GHz	-54.148 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.452 9 GHz	-10.887 dBm																																																		
2	N	1	f	24.637 4 GHz	-41.231 dBm																																																		
3	N	1	f	4.889 9 GHz	-54.426 dBm																																																		
4	N	1	f	7.497 2 GHz	-54.091 dBm																																																		
5	N	1	f	9.984 5 GHz	-54.148 dBm																																																		

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure


1. The EUT was directly connected to the Power meter

### 9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	13.088	30	PASS
	MCH	13.309	30	PASS
	HCH	13.321	30	PASS
802.11g	LCH	13.753	30	PASS
	MCH	14.030	30	PASS
	HCH	13.340	30	PASS
802.11n(HT20)	LCH	13.630	30	PASS
	MCH	13.056	30	PASS
	HCH	12.847	30	PASS
802.11n(HT40)	LCH	13.582	30	PASS
	MCH	13.190	30	PASS
	HCH	13.136	30	PASS

### 10. 6DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

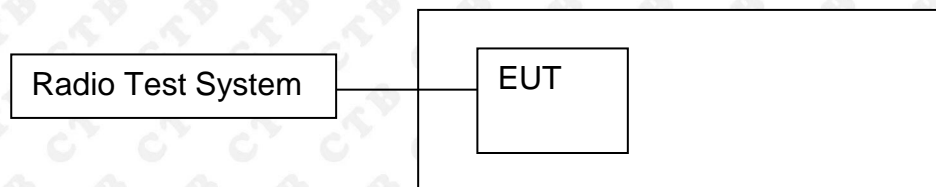

#### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 10.4 Test Result


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.114	500	PASS
	MCH	10.130	500	PASS
	HCH	10.097	500	PASS
802.11g	LCH	16.494	500	PASS
	MCH	16.538	500	PASS
	HCH	16.522	500	PASS
802.11n(HT20)	LCH	17.811	500	PASS
	MCH	17.781	500	PASS
	HCH	17.757	500	PASS
802.11n(HT40)	LCH	36.505	500	PASS
	MCH	36.501	500	PASS
	HCH	36.510	500	PASS



Test Graph:




<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.01 dB</p> <p>Ref: 27.01 dBm</p> <p>Mkr3 2.420229 GHz</p> <p>-10.496 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.429 MHz</p> <p>Total Power 12.7 dBm</p> <p>Transmit Freq Error -18.082 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.49 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.445234 GHz</p> <p>-10.351 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.461 MHz</p> <p>Total Power 12.9 dBm</p> <p>Transmit Freq Error -34.716 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.54 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.08 dB</p> <p>Ref: 27.08 dBm</p> <p>Mkr3 2.470238 GHz</p> <p>-13.061 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.462 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -23.429 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.52 MHz</p> <p>x dB -6.00 dB</p>
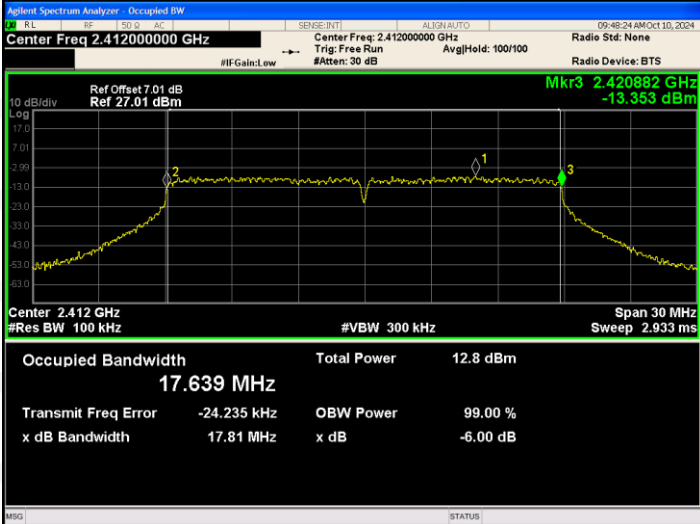
<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.01 dB</p> <p>Ref: 27.01 dBm</p> <p>Mkr3 2.420882 GHz</p> <p>-13.353 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td>17.639 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-24.235 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.81 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	17.639 MHz			Transmit Freq Error	OBW Power	99.00 %	-24.235 kHz	x dB	-6.00 dB	x dB Bandwidth			17.81 MHz		
Occupied Bandwidth	Total Power	12.8 dBm																	
17.639 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-24.235 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.81 MHz																			
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.445866 GHz</p> <p>-14.647 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td>17.626 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-24.007 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.78 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	17.626 MHz			Transmit Freq Error	OBW Power	99.00 %	-24.007 kHz	x dB	-6.00 dB	x dB Bandwidth			17.78 MHz		
Occupied Bandwidth	Total Power	12.3 dBm																	
17.626 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-24.007 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.78 MHz																			
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.08 dB</p> <p>Ref: 27.08 dBm</p> <p>Mkr3 2.470864 GHz</p> <p>-13.114 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td>17.635 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-14.980 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.76 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	17.635 MHz			Transmit Freq Error	OBW Power	99.00 %	-14.980 kHz	x dB	-6.00 dB	x dB Bandwidth			17.76 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
17.635 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-14.980 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.76 MHz																			

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Center Freq: 2.422000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7 dB</p> <p>Ref: 27.00 dBm</p> <p>Mkr3 2.440221 GHz</p> <p>-16.285 dBm</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td><b>36.167 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-31.802 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.51 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	<b>36.167 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	-31.802 kHz	x dB	-6.00 dB	x dB Bandwidth			36.51 MHz		
Occupied Bandwidth	Total Power	12.9 dBm																	
<b>36.167 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
-31.802 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.51 MHz																			
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.455234 GHz</p> <p>-16.430 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td><b>36.144 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-17.024 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.50 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	<b>36.144 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	-17.024 kHz	x dB	-6.00 dB	x dB Bandwidth			36.50 MHz		
Occupied Bandwidth	Total Power	12.7 dBm																	
<b>36.144 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
-17.024 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.50 MHz																			
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Center Freq: 2.452000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.07 dB</p> <p>Ref: 27.07 dBm</p> <p>Mkr3 2.470232 GHz</p> <p>-16.170 dBm</p> <p>Center 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td><b>36.162 MHz</b></td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-23.100 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.51 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	<b>36.162 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	-23.100 kHz	x dB	-6.00 dB	x dB Bandwidth			36.51 MHz		
Occupied Bandwidth	Total Power	12.6 dBm																	
<b>36.162 MHz</b>																			
Transmit Freq Error	OBW Power	99.00 %																	
-23.100 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.51 MHz																			

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

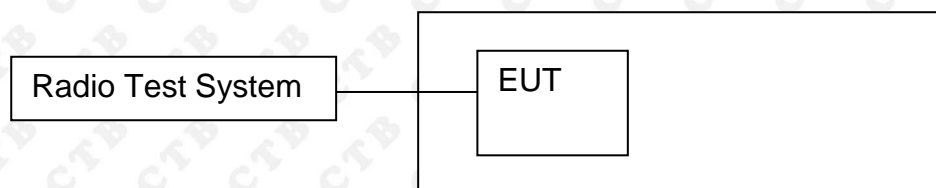

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

## 11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	10.114	8	PASS
	MCH	10.130	8	PASS
	HCH	10.097	8	PASS
802.11g	LCH	16.494	8	PASS
	MCH	16.538	8	PASS
	HCH	16.522	8	PASS
802.11n(H T20)	LCH	17.811	8	PASS
	MCH	17.781	8	PASS
	HCH	17.757	8	PASS
802.11n(H T40)	LCH	36.505	8	PASS
	MCH	36.501	8	PASS
	HCH	36.510	8	PASS

## Test Graph



<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Mkr3 2.420229 GHz -10.496 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td>16.429 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-18.082 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.49 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	16.429 MHz			Transmit Freq Error	OBW Power	99.00 %	-18.082 kHz	x dB	-6.00 dB	x dB Bandwidth			16.49 MHz		
Occupied Bandwidth	Total Power	12.7 dBm																	
16.429 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-18.082 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.49 MHz																			
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Mkr3 2.445234 GHz -10.351 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.9 dBm</td> </tr> <tr> <td>16.461 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-34.716 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.54 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.9 dBm	16.461 MHz			Transmit Freq Error	OBW Power	99.00 %	-34.716 kHz	x dB	-6.00 dB	x dB Bandwidth			16.54 MHz		
Occupied Bandwidth	Total Power	12.9 dBm																	
16.461 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-34.716 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.54 MHz																			
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Mkr3 2.470238 GHz -13.061 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td>16.462 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-23.429 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.52 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.2 dBm	16.462 MHz			Transmit Freq Error	OBW Power	99.00 %	-23.429 kHz	x dB	-6.00 dB	x dB Bandwidth			16.52 MHz		
Occupied Bandwidth	Total Power	12.2 dBm																	
16.462 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-23.429 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.52 MHz																			



<p>802.11n(HT20)/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset 7.01 dB Ref 27.01 dBm</p> <p>Mkr3 2.420882 GHz -13.353 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td colspan="3"><b>17.639 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-24.235 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.81 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	<b>17.639 MHz</b>			Transmit Freq Error	-24.235 kHz	OBW Power	x dB Bandwidth	17.81 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	12.8 dBm														
<b>17.639 MHz</b>																
Transmit Freq Error	-24.235 kHz	OBW Power														
x dB Bandwidth	17.81 MHz	x dB														
		-6.00 dB														
<p>802.11n(HT20)/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 7.04 dB Ref 27.04 dBm</p> <p>Mkr3 2.445866 GHz -14.647 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td colspan="3"><b>17.626 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-24.007 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.78 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	<b>17.626 MHz</b>			Transmit Freq Error	-24.007 kHz	OBW Power	x dB Bandwidth	17.78 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	12.3 dBm														
<b>17.626 MHz</b>																
Transmit Freq Error	-24.007 kHz	OBW Power														
x dB Bandwidth	17.78 MHz	x dB														
		-6.00 dB														
<p>802.11n(HT20)/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset 7.08 dB Ref 27.08 dBm</p> <p>Mkr3 2.470864 GHz -13.114 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td colspan="3"><b>17.635 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-14.980 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.76 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	<b>17.635 MHz</b>			Transmit Freq Error	-14.980 kHz	OBW Power	x dB Bandwidth	17.76 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	12.1 dBm														
<b>17.635 MHz</b>																
Transmit Freq Error	-14.980 kHz	OBW Power														
x dB Bandwidth	17.76 MHz	x dB														
		-6.00 dB														

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset 7 dB Ref 27.00 dBm</p> <p>Mkr3 2.440221 GHz -16.285 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <thead> <tr> <th>Occupied Bandwidth</th> <th>Total Power</th> <th>12.9 dBm</th> </tr> </thead> <tbody> <tr> <td>36.167 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-31.802 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>36.51 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </tbody> </table>	Occupied Bandwidth	Total Power	12.9 dBm	36.167 MHz			Transmit Freq Error	-31.802 kHz	OBW Power	x dB Bandwidth	36.51 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	12.9 dBm														
36.167 MHz																
Transmit Freq Error	-31.802 kHz	OBW Power														
x dB Bandwidth	36.51 MHz	x dB														
		-6.00 dB														
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset 7.04 dB Ref 27.04 dBm</p> <p>Mkr3 2.455234 GHz -16.430 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <thead> <tr> <th>Occupied Bandwidth</th> <th>Total Power</th> <th>12.7 dBm</th> </tr> </thead> <tbody> <tr> <td>36.144 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-17.024 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>36.50 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </tbody> </table>	Occupied Bandwidth	Total Power	12.7 dBm	36.144 MHz			Transmit Freq Error	-17.024 kHz	OBW Power	x dB Bandwidth	36.50 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	12.7 dBm														
36.144 MHz																
Transmit Freq Error	-17.024 kHz	OBW Power														
x dB Bandwidth	36.50 MHz	x dB														
		-6.00 dB														
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.452000000 GHz</p> <p>Ref Offset 7.07 dB Ref 27.07 dBm</p> <p>Mkr3 2.470232 GHz -16.170 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <thead> <tr> <th>Occupied Bandwidth</th> <th>Total Power</th> <th>12.6 dBm</th> </tr> </thead> <tbody> <tr> <td>36.162 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>-23.100 kHz</td> <td>OBW Power</td> </tr> <tr> <td>x dB Bandwidth</td> <td>36.51 MHz</td> <td>x dB</td> </tr> <tr> <td></td> <td></td> <td>-6.00 dB</td> </tr> </tbody> </table>	Occupied Bandwidth	Total Power	12.6 dBm	36.162 MHz			Transmit Freq Error	-23.100 kHz	OBW Power	x dB Bandwidth	36.51 MHz	x dB			-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm														
36.162 MHz																
Transmit Freq Error	-23.100 kHz	OBW Power														
x dB Bandwidth	36.51 MHz	x dB														
		-6.00 dB														

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### EUT Antenna:

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is 2.78dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

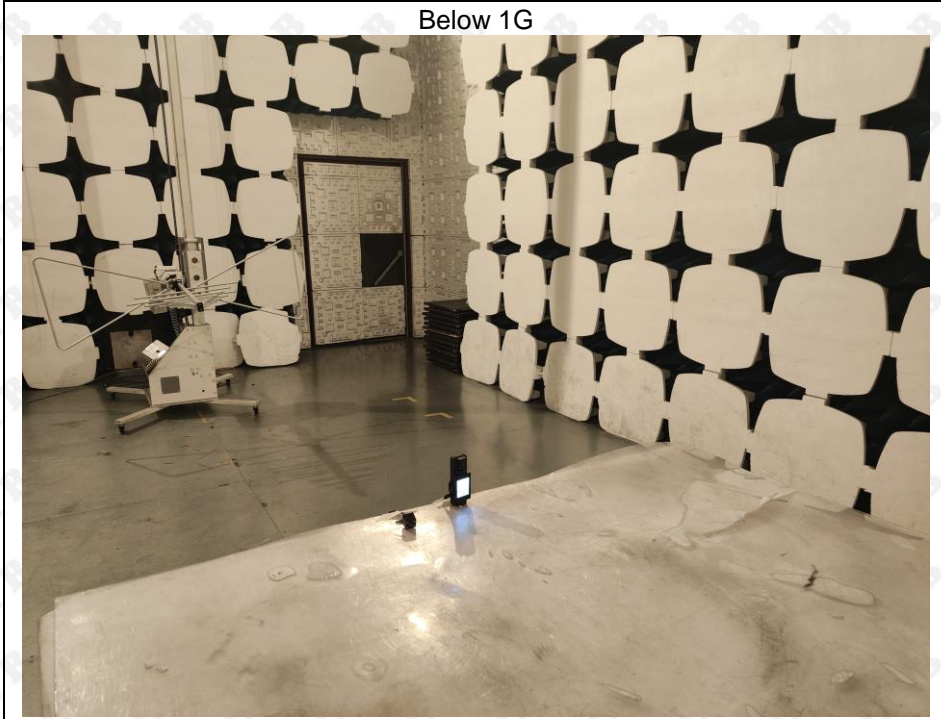

Above 1G



\*\*\*\*\* END OF REPORT \*\*\*\*\*