

RF Mode	TX 802.11ax (HE80)	Channel	CH 103 : 6465 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.4 PK			1.94 H	123	106.0	3.4
2	*6465.00	99.3 AV			1.94 H	123	95.9	3.4
3	#12930.00	53.5 PK	88.2	-34.7	2.13 H	134	42.8	10.7
4	#12930.00	42.5 AV	68.2	-25.7	2.13 H	134	31.8	10.7
5	19395.00	54.3 PK	74.0	-19.7	1.69 H	62	60.5	-6.2
6	19395.00	43.4 AV	54.0	-10.6	1.69 H	62	49.6	-6.2
7	#25860.00	46.3 PK	88.2	-41.9	2.05 H	188	47.6	-1.3
8	#25860.00	36.7 AV	68.2	-31.5	2.05 H	188	38.0	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	110.1 PK			2.38 V	104	106.7	3.4
2	*6465.00	101.2 AV			2.38 V	104	97.8	3.4
3	#12930.00	56.0 PK	88.2	-32.2	1.17 V	237	45.3	10.7
4	#12930.00	43.3 AV	68.2	-24.9	1.17 V	237	32.6	10.7
5	19395.00	58.3 PK	74.0	-15.7	2.34 V	292	64.5	-6.2
6	19395.00	46.6 AV	54.0	-7.4	2.34 V	292	52.8	-6.2
7	#25860.00	48.2 PK	88.2	-40.0	2.35 V	247	49.5	-1.3
8	#25860.00	38.5 AV	68.2	-29.7	2.35 V	247	39.8	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 119 : 6545 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	109.5 PK			1.89 H	99	105.6	3.9
2	*6545.00	99.8 AV			1.89 H	99	95.9	3.9
3	#13090.00	53.6 PK	88.2	-34.6	2.16 H	115	42.3	11.3
4	#13090.00	42.4 AV	68.2	-25.8	2.16 H	115	31.1	11.3
5	19635.00	54.9 PK	74.0	-19.1	1.65 H	57	61.2	-6.3
6	19635.00	43.9 AV	54.0	-10.1	1.65 H	57	50.2	-6.3
7	#26180.00	46.3 PK	88.2	-41.9	2.04 H	196	47.3	-1.0
8	#26180.00	36.4 AV	68.2	-31.8	2.04 H	196	37.4	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	111.1 PK			2.39 V	93	107.2	3.9
2	*6545.00	102.0 AV			2.39 V	93	98.1	3.9
3	#13090.00	55.1 PK	88.2	-33.1	1.17 V	241	43.8	11.3
4	#13090.00	42.9 AV	68.2	-25.3	1.17 V	241	31.6	11.3
5	19635.00	58.4 PK	74.0	-15.6	2.39 V	271	64.7	-6.3
6	19635.00	46.5 AV	54.0	-7.5	2.39 V	271	52.8	-6.3
7	#26180.00	48.7 PK	88.2	-39.5	2.32 V	231	49.7	-1.0
8	#26180.00	39.0 AV	68.2	-29.2	2.32 V	231	40.0	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 135 : 6625 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.7 PK			1.93 H	97	105.6	4.1
2	*6625.00	99.7 AV			1.93 H	97	95.6	4.1
3	13250.00	53.5 PK	74.0	-20.5	2.19 H	126	41.7	11.8
4	13250.00	42.7 AV	54.0	-11.3	2.19 H	126	30.9	11.8
5	19875.00	54.6 PK	74.0	-19.4	1.64 H	73	60.6	-6.0
6	19875.00	43.6 AV	54.0	-10.4	1.64 H	73	49.6	-6.0
7	#26500.00	46.0 PK	88.2	-42.2	2.04 H	174	46.4	-0.4
8	#26500.00	36.2 AV	68.2	-32.0	2.04 H	174	36.6	-0.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	110.2 PK			2.36 V	89	106.1	4.1
2	*6625.00	101.2 AV			2.36 V	89	97.1	4.1
3	13250.00	55.2 PK	74.0	-18.8	1.12 V	226	43.4	11.8
4	13250.00	43.0 AV	54.0	-11.0	1.12 V	226	31.2	11.8
5	19875.00	58.2 PK	74.0	-15.8	2.38 V	271	64.2	-6.0
6	19875.00	46.5 AV	54.0	-7.5	2.38 V	271	52.5	-6.0
7	#26500.00	48.0 PK	88.2	-40.2	2.33 V	255	48.4	-0.4
8	#26500.00	38.4 AV	68.2	-29.8	2.33 V	255	38.8	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 151 : 6705 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	109.4 PK			1.90 H	98	105.3	4.1
2	*6705.00	99.5 AV			1.90 H	98	95.4	4.1
3	#13410.00	54.0 PK	88.2	-34.2	2.16 H	134	41.7	12.3
4	#13410.00	43.2 AV	68.2	-25.0	2.16 H	134	30.9	12.3
5	20115.00	54.2 PK	74.0	-19.8	1.68 H	61	59.7	-5.5
6	20115.00	43.4 AV	54.0	-10.6	1.68 H	61	48.9	-5.5
7	#26820.00	46.3 PK	88.2	-41.9	2.10 H	173	47.1	-0.8
8	#26820.00	36.4 AV	68.2	-31.8	2.10 H	173	37.2	-0.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.5 PK			2.35 V	89	106.4	4.1
2	*6705.00	101.4 AV			2.35 V	89	97.3	4.1
3	#13410.00	55.6 PK	88.2	-32.6	1.19 V	219	43.3	12.3
4	#13410.00	43.0 AV	68.2	-25.2	1.19 V	219	30.7	12.3
5	20115.00	59.0 PK	74.0	-15.0	2.40 V	279	64.5	-5.5
6	20115.00	47.4 AV	54.0	-6.6	2.40 V	279	52.9	-5.5
7	#26820.00	48.0 PK	88.2	-40.2	2.26 V	255	48.8	-0.8
8	#26820.00	38.5 AV	68.2	-29.7	2.26 V	255	39.3	-0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 167 : 6785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.5 PK			2.00 H	121	105.3	4.2
2	*6785.00	99.6 AV			2.00 H	121	95.4	4.2
3	#13570.00	53.6 PK	88.2	-34.6	2.13 H	127	40.6	13.0
4	#13570.00	42.8 AV	68.2	-25.4	2.13 H	127	29.8	13.0
5	20355.00	55.3 PK	74.0	-18.7	1.64 H	62	60.8	-5.5
6	20355.00	44.3 AV	54.0	-9.7	1.64 H	62	49.8	-5.5
7	#27140.00	46.5 PK	88.2	-41.7	2.11 H	198	47.9	-1.4
8	#27140.00	36.6 AV	68.2	-31.6	2.11 H	198	38.0	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	110.6 PK			2.41 V	102	106.4	4.2
2	*6785.00	101.6 AV			2.41 V	102	97.4	4.2
3	#13570.00	55.6 PK	88.2	-32.6	1.16 V	241	42.6	13.0
4	#13570.00	42.9 AV	68.2	-25.3	1.16 V	241	29.9	13.0
5	20355.00	58.5 PK	74.0	-15.5	2.39 V	266	64.0	-5.5
6	20355.00	46.6 AV	54.0	-7.4	2.39 V	266	52.1	-5.5
7	#27140.00	47.8 PK	88.2	-40.4	2.35 V	231	49.2	-1.4
8	#27140.00	38.4 AV	68.2	-29.8	2.35 V	231	39.8	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 183 : 6865 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.0 PK			1.93 H	113	104.4	4.6
2	*6865.00	99.2 AV			1.93 H	113	94.6	4.6
3	#13730.00	53.4 PK	88.2	-34.8	2.20 H	131	40.2	13.2
4	#13730.00	42.3 AV	68.2	-25.9	2.20 H	131	29.1	13.2
5	20595.00	55.3 PK	74.0	-18.7	1.73 H	51	60.2	-4.9
6	20595.00	44.2 AV	54.0	-9.8	1.73 H	51	49.1	-4.9
7	#27460.00	46.8 PK	88.2	-41.4	2.05 H	200	48.3	-1.5
8	#27460.00	36.7 AV	68.2	-31.5	2.05 H	200	38.2	-1.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	110.3 PK			2.43 V	96	105.7	4.6
2	*6865.00	101.3 AV			2.43 V	96	96.7	4.6
3	#13730.00	56.0 PK	88.2	-32.2	1.19 V	230	42.8	13.2
4	#13730.00	43.4 AV	68.2	-24.8	1.19 V	230	30.2	13.2
5	20595.00	58.7 PK	74.0	-15.3	2.38 V	290	63.6	-4.9
6	20595.00	46.9 AV	54.0	-7.1	2.38 V	290	51.8	-4.9
7	#27460.00	47.9 PK	88.2	-40.3	2.35 V	239	49.4	-1.5
8	#27460.00	38.4 AV	68.2	-29.8	2.35 V	239	39.9	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 199 : 6945 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	109.1 PK			1.94 H	97	103.9	5.2
2	*6945.00	99.1 AV			1.94 H	97	93.9	5.2
3	#13890.00	54.1 PK	88.2	-34.1	2.13 H	107	40.8	13.3
4	#13890.00	43.1 AV	68.2	-25.1	2.13 H	107	29.8	13.3
5	20835.00	55.0 PK	74.0	-19.0	1.71 H	64	59.8	-4.8
6	20835.00	44.0 AV	54.0	-10.0	1.71 H	64	48.8	-4.8
7	#27780.00	46.7 PK	88.2	-41.5	2.12 H	186	48.4	-1.7
8	#27780.00	36.8 AV	68.2	-31.4	2.12 H	186	38.5	-1.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.7 PK			2.41 V	99	105.5	5.2
2	*6945.00	102.0 AV			2.41 V	99	96.8	5.2
3	#13890.00	56.0 PK	88.2	-32.2	1.09 V	222	42.7	13.3
4	#13890.00	43.5 AV	68.2	-24.7	1.09 V	222	30.2	13.3
5	20835.00	58.6 PK	74.0	-15.4	2.31 V	284	63.4	-4.8
6	20835.00	47.1 AV	54.0	-6.9	2.31 V	284	51.9	-4.8
7	#27780.00	48.3 PK	88.2	-39.9	2.29 V	232	50.0	-1.7
8	#27780.00	38.7 AV	68.2	-29.5	2.29 V	232	40.4	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 215 : 7025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	108.4 PK			1.93 H	114	102.6	5.8
2	*7025.00	98.4 AV			1.93 H	114	92.6	5.8
3	#7125.00	63.4 PK	88.2	-24.8	1.93 H	114	57.1	6.3
4	#7125.00	53.9 AV	68.2	-14.3	1.93 H	114	47.6	6.3
5	#14050.00	53.3 PK	88.2	-34.9	2.17 H	130	39.7	13.6
6	#14050.00	42.5 AV	68.2	-25.7	2.17 H	130	28.9	13.6
7	21075.00	54.7 PK	74.0	-19.3	1.66 H	53	59.1	-4.4
8	21075.00	43.7 AV	54.0	-10.3	1.66 H	53	48.1	-4.4
9	#28100.00	46.9 PK	88.2	-41.3	2.03 H	179	48.6	-1.7
10	#28100.00	37.0 AV	68.2	-31.2	2.03 H	179	38.7	-1.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	111.2 PK			2.22 V	100	105.4	5.8
2	*7025.00	102.5 AV			2.22 V	100	96.7	5.8
3	#7125.00	67.9 PK	88.2	-20.3	2.22 V	100	61.6	6.3
4	#7125.00	56.8 AV	68.2	-11.4	2.22 V	100	50.5	6.3
5	#14050.00	55.9 PK	88.2	-32.3	1.10 V	224	42.3	13.6
6	#14050.00	43.4 AV	68.2	-24.8	1.10 V	224	29.8	13.6
7	21075.00	58.1 PK	74.0	-15.9	2.30 V	273	62.5	-4.4
8	21075.00	46.5 AV	54.0	-7.5	2.30 V	273	50.9	-4.4
9	#28100.00	47.7 PK	88.2	-40.5	2.29 V	232	49.4	-1.7
10	#28100.00	38.4 AV	68.2	-29.8	2.29 V	232	40.1	-1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 15 : 6025 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5889.70	78.8 PK	88.2	-9.4	1.90 H	116	76.9	1.9
2	#5889.70	61.2 AV	68.2	-7.0	1.90 H	116	59.3	1.9
3	#5925.00	70.8 PK	88.2	-17.4	1.90 H	116	69.0	1.8
4	#5925.00	62.2 AV	68.2	-6.0	1.90 H	116	60.4	1.8
5	*6025.00	104.6 PK			1.90 H	116	102.7	1.9
6	*6025.00	94.9 AV			1.90 H	116	93.0	1.9
7	12050.00	50.8 PK	74.0	-23.2	2.19 H	132	39.6	11.2
8	12050.00	38.8 AV	54.0	-15.2	2.19 H	132	27.6	11.2
9	18075.00	53.1 PK	74.0	-20.9	1.78 H	72	52.0	1.1
10	18075.00	41.8 AV	54.0	-12.2	1.78 H	72	40.7	1.1
11	#24100.00	45.7 PK	88.2	-42.5	2.16 H	207	48.6	-2.9
12	#24100.00	35.8 AV	68.2	-32.4	2.16 H	207	38.7	-2.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5910.50	81.4 PK	88.2	-6.8	2.18 V	100	79.6	1.8
2	#5910.50	66.4 AV	68.2	-1.8	2.18 V	100	64.6	1.8
3	#5925.00	74.8 PK	88.2	-13.4	2.18 V	100	73.0	1.8
4	#5925.00	67.3 AV	68.2	-0.9	2.18 V	100	65.5	1.8
5	*6025.00	106.2 PK			2.18 V	100	104.3	1.9
6	*6025.00	96.3 AV			2.18 V	100	94.4	1.9
7	12050.00	52.4 PK	74.0	-21.6	1.15 V	225	41.2	11.2
8	12050.00	40.4 AV	54.0	-13.6	1.15 V	225	29.2	11.2
9	18075.00	54.8 PK	74.0	-19.2	2.26 V	286	53.7	1.1
10	18075.00	43.8 AV	54.0	-10.2	2.26 V	286	42.7	1.1
11	#24100.00	47.6 PK	88.2	-40.6	2.27 V	253	50.5	-2.9
12	#24100.00	38.3 AV	68.2	-29.9	2.27 V	253	41.2	-2.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 47 : 6185 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	105.6 PK			1.93 H	113	103.2	2.4
2	*6185.00	97.9 AV			1.93 H	113	95.5	2.4
3	12370.00	52.7 PK	74.0	-21.3	2.22 H	126	42.3	10.4
4	12370.00	41.1 AV	54.0	-12.9	2.22 H	126	30.7	10.4
5	18555.00	55.0 PK	74.0	-19.0	1.72 H	72	61.6	-6.6
6	18555.00	44.2 AV	54.0	-9.8	1.72 H	72	50.8	-6.6
7	#24740.00	46.2 PK	88.2	-42.0	2.12 H	195	48.3	-2.1
8	#24740.00	36.3 AV	68.2	-31.9	2.12 H	195	38.4	-2.1

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6185.00	110.5 PK			2.27 V	116	108.1	2.4
2	*6185.00	102.0 AV			2.27 V	116	99.6	2.4
3	12370.00	54.7 PK	74.0	-19.3	1.13 V	225	44.3	10.4
4	12370.00	42.1 AV	54.0	-11.9	1.13 V	225	31.7	10.4
5	18555.00	57.6 PK	74.0	-16.4	2.30 V	274	64.2	-6.6
6	18555.00	46.2 AV	54.0	-7.8	2.30 V	274	52.8	-6.6
7	#24740.00	47.5 PK	88.2	-40.7	2.26 V	249	49.6	-2.1
8	#24740.00	38.2 AV	68.2	-30.0	2.26 V	249	40.3	-2.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.3 PK			1.99 H	110	102.3	3.0
2	*6345.00	97.2 AV			1.99 H	110	94.2	3.0
3	12690.00	52.4 PK	74.0	-21.6	2.22 H	120	41.6	10.8
4	12690.00	41.0 AV	54.0	-13.0	2.22 H	120	30.2	10.8
5	19035.00	55.6 PK	74.0	-18.4	1.66 H	87	61.9	-6.3
6	19035.00	44.7 AV	54.0	-9.3	1.66 H	87	51.0	-6.3
7	#25380.00	45.6 PK	88.2	-42.6	2.13 H	191	47.2	-1.6
8	#25380.00	35.9 AV	68.2	-32.3	2.13 H	191	37.5	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	111.1 PK			2.29 V	126	108.1	3.0
2	*6345.00	102.4 AV			2.29 V	126	99.4	3.0
3	12690.00	54.3 PK	74.0	-19.7	1.14 V	238	43.5	10.8
4	12690.00	41.6 AV	54.0	-12.4	1.14 V	238	30.8	10.8
5	19035.00	57.2 PK	74.0	-16.8	2.29 V	272	63.5	-6.3
6	19035.00	45.9 AV	54.0	-8.1	2.29 V	272	52.2	-6.3
7	#25380.00	47.4 PK	88.2	-40.8	2.29 V	258	49.0	-1.6
8	#25380.00	37.8 AV	68.2	-30.4	2.29 V	258	39.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 111 : 6505 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.5 PK			1.95 H	120	101.8	3.7
2	*6505.00	97.4 AV			1.95 H	120	93.7	3.7
3	#13010.00	53.1 PK	88.2	-35.1	2.17 H	113	42.1	11.0
4	#13010.00	41.5 AV	68.2	-26.7	2.17 H	113	30.5	11.0
5	19515.00	54.9 PK	74.0	-19.1	1.72 H	63	61.2	-6.3
6	19515.00	44.2 AV	54.0	-9.8	1.72 H	63	50.5	-6.3
7	#26020.00	45.9 PK	88.2	-42.3	2.08 H	189	46.9	-1.0
8	#26020.00	36.2 AV	68.2	-32.0	2.08 H	189	37.2	-1.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	110.9 PK			2.30 V	113	107.2	3.7
2	*6505.00	102.1 AV			2.30 V	113	98.4	3.7
3	#13010.00	54.6 PK	88.2	-33.6	1.13 V	241	43.6	11.0
4	#13010.00	41.9 AV	68.2	-26.3	1.13 V	241	30.9	11.0
5	19515.00	57.4 PK	74.0	-16.6	2.28 V	288	63.7	-6.3
6	19515.00	46.0 AV	54.0	-8.0	2.28 V	288	52.3	-6.3
7	#26020.00	47.8 PK	88.2	-40.4	2.31 V	238	48.8	-1.0
8	#26020.00	38.7 AV	68.2	-29.5	2.31 V	238	39.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 143 : 6665 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.1 PK			1.96 H	109	101.1	4.0
2	*6665.00	97.1 AV			1.96 H	109	93.1	4.0
3	13330.00	52.6 PK	74.0	-21.4	2.19 H	139	40.6	12.0
4	13330.00	40.9 AV	54.0	-13.1	2.19 H	139	28.9	12.0
5	19995.00	55.3 PK	74.0	-18.7	1.77 H	81	61.2	-5.9
6	19995.00	44.5 AV	54.0	-9.5	1.77 H	81	50.4	-5.9
7	#26660.00	46.4 PK	88.2	-41.8	2.18 H	200	46.7	-0.3
8	#26660.00	36.4 AV	68.2	-31.8	2.18 H	200	36.7	-0.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	110.1 PK			2.34 V	112	106.1	4.0
2	*6665.00	101.8 AV			2.34 V	112	97.8	4.0
3	13330.00	54.4 PK	74.0	-19.6	1.14 V	221	42.4	12.0
4	13330.00	41.8 AV	54.0	-12.2	1.14 V	221	29.8	12.0
5	19995.00	57.2 PK	74.0	-16.8	2.30 V	282	63.1	-5.9
6	19995.00	46.0 AV	54.0	-8.0	2.30 V	282	51.9	-5.9
7	#26660.00	47.7 PK	88.2	-40.5	2.28 V	241	48.0	-0.3
8	#26660.00	38.4 AV	68.2	-29.8	2.28 V	241	38.7	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 175 : 6825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.6 PK			1.97 H	110	101.2	4.4
2	*6825.00	97.6 AV			1.97 H	110	93.2	4.4
3	#13650.00	52.4 PK	88.2	-35.8	2.22 H	136	39.2	13.2
4	#13650.00	41.0 AV	68.2	-27.2	2.22 H	136	27.8	13.2
5	20475.00	55.4 PK	74.0	-18.6	1.76 H	73	60.7	-5.3
6	20475.00	44.4 AV	54.0	-9.6	1.76 H	73	49.7	-5.3
7	#27300.00	46.0 PK	88.2	-42.2	2.11 H	207	47.4	-1.4
8	#27300.00	35.9 AV	68.2	-32.3	2.11 H	207	37.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	110.6 PK			2.31 V	125	106.2	4.4
2	*6825.00	102.1 AV			2.31 V	125	97.7	4.4
3	#13650.00	54.7 PK	88.2	-33.5	1.11 V	235	41.5	13.2
4	#13650.00	41.8 AV	68.2	-26.4	1.11 V	235	28.6	13.2
5	20475.00	57.7 PK	74.0	-16.3	2.27 V	279	63.0	-5.3
6	20475.00	46.3 AV	54.0	-7.7	2.27 V	279	51.6	-5.3
7	#27300.00	47.1 PK	88.2	-41.1	2.22 V	246	48.5	-1.4
8	#27300.00	37.8 AV	68.2	-30.4	2.22 V	246	39.2	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 207 : 6985 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	104.0 PK			2.00 H	109	98.5	5.5
2	*6985.00	96.1 AV			2.00 H	109	90.6	5.5
3	#7131.70	79.9 PK	88.2	-8.3	2.00 H	109	73.6	6.3
4	#7131.70	60.9 AV	68.2	-7.3	2.00 H	109	54.6	6.3
5	#13970.00	52.1 PK	88.2	-36.1	2.18 H	140	38.7	13.4
6	#13970.00	40.8 AV	68.2	-27.4	2.18 H	140	27.4	13.4
7	20955.00	54.8 PK	74.0	-19.2	1.76 H	63	59.3	-4.5
8	20955.00	44.2 AV	54.0	-9.8	1.76 H	63	48.7	-4.5
9	#27940.00	46.5 PK	88.2	-41.7	2.09 H	193	48.1	-1.6
10	#27940.00	36.7 AV	68.2	-31.5	2.09 H	193	38.3	-1.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	109.4 PK			2.34 V	111	103.9	5.5
2	*6985.00	101.1 AV			2.34 V	111	95.6	5.5
3	#7130.00	85.5 PK	88.2	-2.7	2.34 V	111	79.2	6.3
4	#7130.00	67.5 AV	68.2	-0.7	2.34 V	111	61.2	6.3
5	#13970.00	54.5 PK	88.2	-33.7	1.12 V	216	41.1	13.4
6	#13970.00	42.1 AV	68.2	-26.1	1.12 V	216	28.7	13.4
7	20955.00	57.6 PK	74.0	-16.4	2.29 V	272	62.1	-4.5
8	20955.00	46.2 AV	54.0	-7.8	2.29 V	272	50.7	-4.5
9	#27940.00	47.5 PK	88.2	-40.7	2.22 V	251	49.1	-1.6
10	#27940.00	38.1 AV	68.2	-30.1	2.22 V	251	39.7	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5911.94	88.0 PK	88.2	-0.2	2.02 H	78	84.3	3.7
2	#5911.94	67.0 AV	68.2	-1.2	2.02 H	78	63.3	3.7
3	*5955.00	124.1 PK			2.02 H	78	120.2	3.9
4	*5955.00	115.2 AV			2.02 H	78	111.3	3.9
5	11910.00	54.6 PK	74.0	-19.4	2.13 H	104	41.2	13.4
6	11910.00	45.0 AV	54.0	-9.0	2.13 H	104	31.6	13.4
7	17865.00	53.9 PK	74.0	-20.1	1.58 H	101	32.2	21.7
8	17865.00	43.6 AV	54.0	-10.4	1.58 H	101	21.9	21.7
9	23820.00	45.9 PK	74.0	-28.1	2.09 H	165	48.4	-2.5
10	23820.00	35.6 AV	54.0	-18.4	2.09 H	165	38.1	-2.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5913.34	88.0 PK	88.2	-0.2	2.39 V	103	84.3	3.7
2	#5913.34	67.1 AV	68.2	-1.1	2.39 V	103	63.4	3.7
3	*5955.00	124.6 PK			2.39 V	103	120.7	3.9
4	*5955.00	115.5 AV			2.39 V	103	111.6	3.9
5	11910.00	55.7 PK	74.0	-18.3	1.27 V	221	42.3	13.4
6	11910.00	44.8 AV	54.0	-9.2	1.27 V	221	31.4	13.4
7	17865.00	59.2 PK	74.0	-14.8	2.34 V	270	37.5	21.7
8	17865.00	47.2 AV	54.0	-6.8	2.34 V	270	25.5	21.7
9	23820.00	46.3 PK	74.0	-27.7	2.12 V	211	48.8	-2.5
10	23820.00	36.1 AV	54.0	-17.9	2.12 V	211	38.6	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	124.7 PK			2.06 H	76	119.4	5.3
2	*6415.00	115.8 AV			2.06 H	76	110.5	5.3
3	#12830.00	54.9 PK	88.2	-33.3	2.14 H	118	41.5	13.4
4	#12830.00	45.2 AV	68.2	-23.0	2.14 H	118	31.8	13.4
5	19245.00	53.6 PK	74.0	-20.4	1.62 H	104	60.3	-6.7
6	19245.00	43.6 AV	54.0	-10.4	1.62 H	104	50.3	-6.7
7	#25660.00	45.6 PK	88.2	-42.6	2.12 H	155	47.2	-1.6
8	#25660.00	35.4 AV	68.2	-32.8	2.12 H	155	37.0	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	126.1 PK			2.40 V	114	120.8	5.3
2	*6415.00	116.8 AV			2.40 V	114	111.5	5.3
3	#12830.00	56.2 PK	88.2	-32.0	1.31 V	218	42.8	13.4
4	#12830.00	45.0 AV	68.2	-23.2	1.31 V	218	31.6	13.4
5	19245.00	59.6 PK	74.0	-14.4	2.34 V	268	66.3	-6.7
6	19245.00	47.4 AV	54.0	-6.6	2.34 V	268	54.1	-6.7
7	#25660.00	47.0 PK	88.2	-41.2	2.11 V	217	48.6	-1.6
8	#25660.00	36.5 AV	68.2	-31.7	2.11 V	217	38.1	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	124.3 PK			2.03 H	80	118.9	5.4
2	*6435.00	115.4 AV			2.03 H	80	110.0	5.4
3	#12870.00	54.2 PK	88.2	-34.0	2.13 H	109	40.8	13.4
4	#12870.00	44.8 AV	68.2	-23.4	2.13 H	109	31.4	13.4
5	19305.00	54.0 PK	74.0	-20.0	1.54 H	107	60.7	-6.7
6	19305.00	43.5 AV	54.0	-10.5	1.54 H	107	50.2	-6.7
7	#25740.00	45.6 PK	88.2	-42.6	2.05 H	178	47.0	-1.4
8	#25740.00	35.2 AV	68.2	-33.0	2.05 H	178	36.6	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	126.3 PK			2.34 V	119	120.9	5.4
2	*6435.00	117.0 AV			2.34 V	119	111.6	5.4
3	#12870.00	56.2 PK	88.2	-32.0	1.32 V	208	42.8	13.4
4	#12870.00	45.2 AV	68.2	-23.0	1.32 V	208	31.8	13.4
5	19305.00	58.7 PK	74.0	-15.3	2.35 V	255	65.4	-6.7
6	19305.00	46.8 AV	54.0	-7.2	2.35 V	255	53.5	-6.7
7	#25740.00	46.3 PK	88.2	-41.9	2.15 V	212	47.7	-1.4
8	#25740.00	36.4 AV	68.2	-31.8	2.15 V	212	37.8	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	124.3 PK			2.06 H	77	118.3	6.0
2	*6535.00	115.5 AV			2.06 H	77	109.5	6.0
3	#13070.00	54.4 PK	88.2	-33.8	2.17 H	106	41.0	13.4
4	#13070.00	44.8 AV	68.2	-23.4	2.17 H	106	31.4	13.4
5	19605.00	54.2 PK	74.0	-19.8	1.56 H	103	60.3	-6.1
6	19605.00	44.0 AV	54.0	-10.0	1.56 H	103	50.1	-6.1
7	#26140.00	45.7 PK	88.2	-42.5	2.09 H	162	47.0	-1.3
8	#26140.00	35.3 AV	68.2	-32.9	2.09 H	162	36.6	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	126.6 PK			2.44 V	111	120.6	6.0
2	*6535.00	117.0 AV			2.44 V	111	111.0	6.0
3	#13070.00	55.6 PK	88.2	-32.6	1.31 V	226	42.2	13.4
4	#13070.00	44.6 AV	68.2	-23.6	1.31 V	226	31.2	13.4
5	19605.00	58.6 PK	74.0	-15.4	2.28 V	284	64.7	-6.1
6	19605.00	46.7 AV	54.0	-7.3	2.28 V	284	52.8	-6.1
7	#26140.00	46.7 PK	88.2	-41.5	2.14 V	203	48.0	-1.3
8	#26140.00	36.4 AV	68.2	-31.8	2.14 V	203	37.7	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	124.5 PK			2.07 H	85	117.7	6.8
2	*6855.00	115.7 AV			2.07 H	85	108.9	6.8
3	#13710.00	54.3 PK	88.2	-33.9	2.16 H	90	38.6	15.7
4	#13710.00	44.7 AV	68.2	-23.5	2.16 H	90	29.0	15.7
5	20565.00	54.4 PK	74.0	-19.6	1.62 H	100	59.3	-4.9
6	20565.00	44.0 AV	54.0	-10.0	1.62 H	100	48.9	-4.9
7	#27420.00	46.4 PK	88.2	-41.8	2.15 H	173	48.0	-1.6
8	#27420.00	35.8 AV	68.2	-32.4	2.15 H	173	37.4	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	126.7 PK			2.38 V	126	119.9	6.8
2	*6855.00	117.2 AV			2.38 V	126	110.4	6.8
3	#13710.00	55.5 PK	88.2	-32.7	1.23 V	208	39.8	15.7
4	#13710.00	44.5 AV	68.2	-23.7	1.23 V	208	28.8	15.7
5	20565.00	59.2 PK	74.0	-14.8	2.36 V	266	64.1	-4.9
6	20565.00	47.1 AV	54.0	-6.9	2.36 V	266	52.0	-4.9
7	#27420.00	45.9 PK	88.2	-42.3	2.14 V	209	47.5	-1.6
8	#27420.00	35.7 AV	68.2	-32.5	2.14 V	209	37.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	91.6 PK			1.93 H	118	83.5	8.1
2	*7115.00	84.2 AV			1.93 H	118	76.1	8.1
3	#7125.00	76.4 PK	88.2	-11.8	1.93 H	118	68.2	8.2
4	#7125.00	67.9 AV	68.2	-0.3	1.93 H	118	59.7	8.2
5	#14230.00	54.9 PK	88.2	-33.3	2.17 H	104	37.8	17.1
6	#14230.00	45.3 AV	68.2	-22.9	2.17 H	104	28.2	17.1
7	21345.00	53.4 PK	74.0	-20.6	1.52 H	107	57.6	-4.2
8	21345.00	43.3 AV	54.0	-10.7	1.52 H	107	47.5	-4.2
9	#28460.00	46.1 PK	88.2	-42.1	2.04 H	151	47.5	-1.4
10	#28460.00	35.6 AV	68.2	-32.6	2.04 H	151	37.0	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.5 PK			1.99 V	92	88.4	8.1
2	*7115.00	87.9 AV			1.99 V	92	79.8	8.1
3	#7125.00	79.4 PK	88.2	-8.8	1.99 V	92	71.2	8.2
4	#7125.00	67.9 AV	68.2	-0.3	1.99 V	92	59.7	8.2
5	#14230.00	55.9 PK	88.2	-32.3	1.24 V	209	38.8	17.1
6	#14230.00	44.9 AV	68.2	-23.3	1.24 V	209	27.8	17.1
7	21345.00	59.5 PK	74.0	-14.5	2.37 V	263	63.7	-4.2
8	21345.00	47.7 AV	54.0	-6.3	2.37 V	263	51.9	-4.2
9	#28460.00	45.7 PK	88.2	-42.5	2.14 V	208	47.1	-1.4
10	#28460.00	35.7 AV	68.2	-32.5	2.14 V	208	37.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.9 PK			1.92 H	119	84.8	8.1
2	*7115.00	84.7 AV			1.92 H	119	76.6	8.1
3	#7125.00	78.2 PK	88.2	-10.0	1.92 H	119	70.0	8.2
4	#7125.00	67.1 AV	68.2	-1.1	1.92 H	119	58.9	8.2
5	#14230.00	54.8 PK	88.2	-33.4	2.09 H	103	37.7	17.1
6	#14230.00	45.1 AV	68.2	-23.1	2.09 H	103	28.0	17.1
7	21345.00	53.8 PK	74.0	-20.2	1.54 H	98	58.0	-4.2
8	21345.00	43.7 AV	54.0	-10.3	1.54 H	98	47.9	-4.2
9	#28460.00	46.1 PK	88.2	-42.1	2.08 H	157	47.5	-1.4
10	#28460.00	36.0 AV	68.2	-32.2	2.08 H	157	37.4	-1.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	96.9 PK			2.00 V	96	88.8	8.1
2	*7115.00	88.0 AV			2.00 V	96	79.9	8.1
3	#7125.00	80.5 PK	88.2	-7.7	2.00 V	96	72.3	8.2
4	#7125.00	68.0 AV	68.2	-0.2	2.00 V	96	59.8	8.2
5	#14230.00	55.6 PK	88.2	-32.6	1.29 V	220	38.5	17.1
6	#14230.00	44.5 AV	68.2	-23.7	1.29 V	220	27.4	17.1
7	21345.00	59.7 PK	74.0	-14.3	2.35 V	283	63.9	-4.2
8	21345.00	47.5 AV	54.0	-6.5	2.35 V	283	51.7	-4.2
9	#28460.00	46.4 PK	88.2	-41.8	2.13 V	207	47.8	-1.4
10	#28460.00	36.3 AV	68.2	-31.9	2.13 V	207	37.7	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	79.5 PK	88.2	-8.7	1.96 H	105	75.8	3.7
2	#5925.00	65.7 AV	68.2	-2.5	1.96 H	105	62.0	3.7
3	*5955.00	120.8 PK			1.96 H	105	116.9	3.9
4	*5955.00	111.0 AV			1.96 H	105	107.1	3.9
5	11910.00	55.3 PK	74.0	-18.7	2.15 H	107	41.9	13.4
6	11910.00	45.5 AV	54.0	-8.5	2.15 H	107	32.1	13.4
7	17865.00	53.5 PK	74.0	-20.5	1.56 H	100	31.8	21.7
8	17865.00	43.3 AV	54.0	-10.7	1.56 H	100	21.6	21.7
9	23820.00	46.2 PK	74.0	-27.8	2.12 H	164	48.7	-2.5
10	23820.00	35.9 AV	54.0	-18.1	2.12 H	164	38.4	-2.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	82.1 PK	88.2	-6.1	2.37 V	91	78.4	3.7
2	#5925.00	67.2 AV	68.2	-1.0	2.37 V	91	63.5	3.7
3	*5955.00	119.1 PK			2.37 V	91	115.2	3.9
4	*5955.00	111.3 AV			2.37 V	91	107.4	3.9
5	11910.00	55.7 PK	74.0	-18.3	1.23 V	233	42.3	13.4
6	11910.00	44.7 AV	54.0	-9.3	1.23 V	233	31.3	13.4
7	17865.00	59.3 PK	74.0	-14.7	2.33 V	270	37.6	21.7
8	17865.00	47.1 AV	54.0	-6.9	2.33 V	270	25.4	21.7
9	23820.00	46.8 PK	74.0	-27.2	2.13 V	224	49.3	-2.5
10	23820.00	36.6 AV	54.0	-17.4	2.13 V	224	39.1	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	120.3 PK			1.96 H	98	115.0	5.3
2	*6415.00	110.6 AV			1.96 H	98	105.3	5.3
3	#12830.00	54.4 PK	88.2	-33.8	2.09 H	95	41.0	13.4
4	#12830.00	44.8 AV	68.2	-23.4	2.09 H	95	31.4	13.4
5	19245.00	53.5 PK	74.0	-20.5	1.61 H	89	60.2	-6.7
6	19245.00	43.3 AV	54.0	-10.7	1.61 H	89	50.0	-6.7
7	#25660.00	45.8 PK	88.2	-42.4	2.07 H	170	47.4	-1.6
8	#25660.00	35.5 AV	68.2	-32.7	2.07 H	170	37.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	119.7 PK			2.42 V	104	114.4	5.3
2	*6415.00	111.7 AV			2.42 V	104	106.4	5.3
3	#12830.00	55.5 PK	88.2	-32.7	1.24 V	209	42.1	13.4
4	#12830.00	44.6 AV	68.2	-23.6	1.24 V	209	31.2	13.4
5	19245.00	59.1 PK	74.0	-14.9	2.35 V	284	65.8	-6.7
6	19245.00	47.2 AV	54.0	-6.8	2.35 V	284	53.9	-6.7
7	#25660.00	45.7 PK	88.2	-42.5	2.09 V	208	47.3	-1.6
8	#25660.00	35.7 AV	68.2	-32.5	2.09 V	208	37.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	121.2 PK			1.90 H	112	115.8	5.4
2	*6435.00	111.1 AV			1.90 H	112	105.7	5.4
3	#12870.00	54.9 PK	88.2	-33.3	2.07 H	103	41.5	13.4
4	#12870.00	45.3 AV	68.2	-22.9	2.07 H	103	31.9	13.4
5	19305.00	54.1 PK	74.0	-19.9	1.56 H	96	60.8	-6.7
6	19305.00	43.9 AV	54.0	-10.1	1.56 H	96	50.6	-6.7
7	#25740.00	45.9 PK	88.2	-42.3	2.04 H	163	47.3	-1.4
8	#25740.00	35.9 AV	68.2	-32.3	2.04 H	163	37.3	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	119.0 PK			2.34 V	96	113.6	5.4
2	*6435.00	111.5 AV			2.34 V	96	106.1	5.4
3	#12870.00	55.9 PK	88.2	-32.3	1.27 V	217	42.5	13.4
4	#12870.00	44.9 AV	68.2	-23.3	1.27 V	217	31.5	13.4
5	19305.00	59.3 PK	74.0	-14.7	2.31 V	279	66.0	-6.7
6	19305.00	47.4 AV	54.0	-6.6	2.31 V	279	54.1	-6.7
7	#25740.00	46.9 PK	88.2	-41.3	2.16 V	213	48.3	-1.4
8	#25740.00	36.5 AV	68.2	-31.7	2.16 V	213	37.9	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 117 : 6535 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	120.4 PK			1.97 H	106	114.4	6.0
2	*6535.00	110.7 AV			1.97 H	106	104.7	6.0
3	#13070.00	55.0 PK	88.2	-33.2	2.16 H	94	41.6	13.4
4	#13070.00	45.5 AV	68.2	-22.7	2.16 H	94	32.1	13.4
5	19605.00	53.5 PK	74.0	-20.5	1.54 H	115	59.6	-6.1
6	19605.00	43.1 AV	54.0	-10.9	1.54 H	115	49.2	-6.1
7	#26140.00	46.1 PK	88.2	-42.1	2.07 H	174	47.4	-1.3
8	#26140.00	35.7 AV	68.2	-32.5	2.07 H	174	37.0	-1.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	118.8 PK			2.41 V	94	112.8	6.0
2	*6535.00	111.1 AV			2.41 V	94	105.1	6.0
3	#13070.00	56.0 PK	88.2	-32.2	1.23 V	224	42.6	13.4
4	#13070.00	45.1 AV	68.2	-23.1	1.23 V	224	31.7	13.4
5	19605.00	59.2 PK	74.0	-14.8	2.30 V	280	65.3	-6.1
6	19605.00	47.4 AV	54.0	-6.6	2.30 V	280	53.5	-6.1
7	#26140.00	45.7 PK	88.2	-42.5	2.15 V	221	47.0	-1.3
8	#26140.00	35.8 AV	68.2	-32.4	2.15 V	221	37.1	-1.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 181 : 6855 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	121.1 PK			1.97 H	110	114.3	6.8
2	*6855.00	111.0 AV			1.97 H	110	104.2	6.8
3	#13710.00	55.0 PK	88.2	-33.2	2.07 H	105	39.3	15.7
4	#13710.00	45.3 AV	68.2	-22.9	2.07 H	105	29.6	15.7
5	20565.00	54.0 PK	74.0	-20.0	1.53 H	115	58.9	-4.9
6	20565.00	43.8 AV	54.0	-10.2	1.53 H	115	48.7	-4.9
7	#27420.00	45.6 PK	88.2	-42.6	2.14 H	156	47.2	-1.6
8	#27420.00	35.5 AV	68.2	-32.7	2.14 H	156	37.1	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	119.0 PK			2.41 V	105	112.2	6.8
2	*6855.00	110.9 AV			2.41 V	105	104.1	6.8
3	#13710.00	55.6 PK	88.2	-32.6	1.22 V	222	39.9	15.7
4	#13710.00	44.9 AV	68.2	-23.3	1.22 V	222	29.2	15.7
5	20565.00	58.8 PK	74.0	-15.2	2.38 V	256	63.7	-4.9
6	20565.00	46.9 AV	54.0	-7.1	2.38 V	256	51.8	-4.9
7	#27420.00	46.6 PK	88.2	-41.6	2.18 V	216	48.2	-1.6
8	#27420.00	36.2 AV	68.2	-32.0	2.18 V	216	37.8	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 233 : 7115 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	92.4 PK			1.90 H	119	84.3	8.1
2	*7115.00	83.3 AV			1.90 H	119	75.2	8.1
3	#7125.00	77.8 PK	88.2	-10.4	1.90 H	119	69.6	8.2
4	#7125.00	66.8 AV	68.2	-1.4	1.90 H	119	58.6	8.2
5	#14230.00	54.6 PK	88.2	-33.6	2.12 H	113	37.5	17.1
6	#14230.00	45.1 AV	68.2	-23.1	2.12 H	113	28.0	17.1
7	21345.00	54.1 PK	74.0	-19.9	1.57 H	102	58.3	-4.2
8	21345.00	44.1 AV	54.0	-9.9	1.57 H	102	48.3	-4.2
9	#28460.00	45.9 PK	88.2	-42.3	2.07 H	150	47.3	-1.4
10	#28460.00	35.7 AV	68.2	-32.5	2.07 H	150	37.1	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7115.00	95.6 PK			2.03 V	93	87.5	8.1
2	*7115.00	86.4 AV			2.03 V	93	78.3	8.1
3	#7125.00	81.7 PK	88.2	-6.5	2.03 V	93	73.5	8.2
4	#7125.00	67.8 AV	68.2	-0.4	2.03 V	93	59.6	8.2
5	#14230.00	56.2 PK	88.2	-32.0	1.29 V	212	39.1	17.1
6	#14230.00	45.1 AV	68.2	-23.1	1.29 V	212	28.0	17.1
7	21345.00	58.8 PK	74.0	-15.2	2.39 V	275	63.0	-4.2
8	21345.00	47.0 AV	54.0	-7.0	2.39 V	275	51.2	-4.2
9	#28460.00	46.1 PK	88.2	-42.1	2.09 V	221	47.5	-1.4
10	#28460.00	35.7 AV	68.2	-32.5	2.09 V	221	37.1	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

RF Mode	TX 802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	168.31	38.9 QP	43.5	-4.6	2.00 H	200	51.3	-12.4
2	197.37	40.2 QP	43.5	-3.3	1.50 H	70	55.3	-15.1
3	238.37	42.6 QP	46.0	-3.4	1.50 H	288	55.8	-13.2
4	297.37	42.2 QP	46.0	-3.8	2.00 H	328	53.0	-10.8
5	698.97	42.3 QP	46.0	-3.7	1.00 H	268	42.7	-0.4
6	719.37	42.5 QP	46.0	-3.5	1.50 H	255	42.7	-0.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

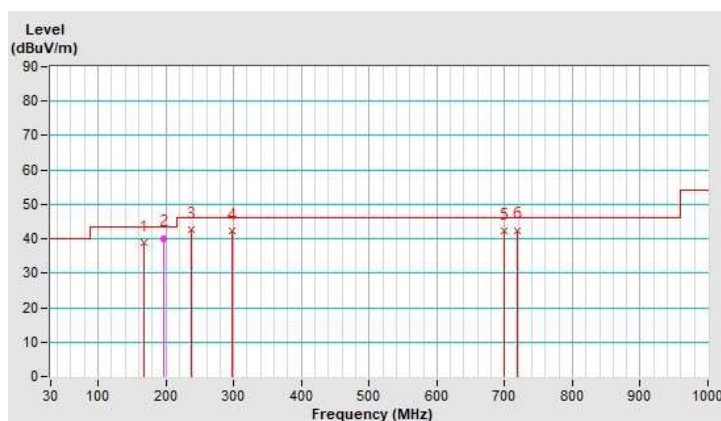


RF Mode	TX 802.11ax (HE160)	Channel	CH 79 : 6345 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.18	33.3 QP	40.0	-6.7	1.00 V	322	46.8	-13.5
2	165.37	38.8 QP	43.5	-4.7	1.50 V	340	51.1	-12.3
3	298.88	41.7 QP	46.0	-4.3	2.00 V	320	52.4	-10.7
4	699.37	40.1 QP	46.0	-5.9	1.50 V	217	40.5	-0.4
5	720.67	40.8 QP	46.0	-5.2	1.00 V	299	41.0	-0.2
6	899.34	41.5 QP	46.0	-4.5	1.50 V	277	38.0	3.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

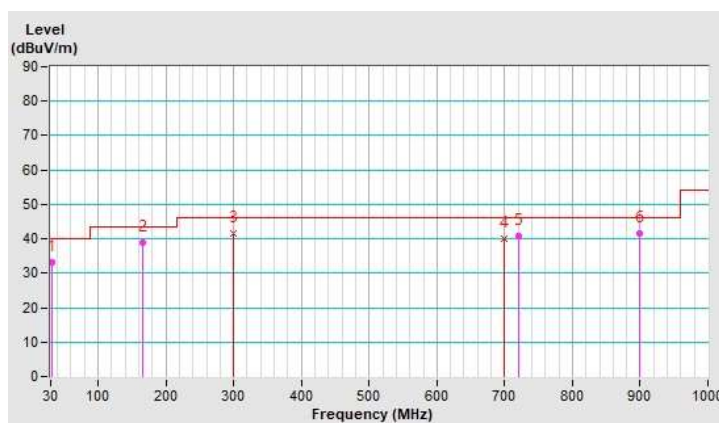

4.1.7 Test Results (Mode 2)

Above 1GHz Data:

ABOVE 1GHz DATA

RF Mode	TX 802.11a 6G	Channel	CH 1 : 5955 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.7 PK	88.2	-38.5	4.00 H	37	46.0	3.7
2	#5925.00	38.5 AV	68.2	-29.7	4.00 H	37	34.8	3.7
3	*5955.00	96.5 PK			4.00 H	37	92.6	3.9
4	*5955.00	89.5 AV			4.00 H	37	85.6	3.9
5	11910.00	45.8 PK	74.0	-28.2	2.69 H	171	32.4	13.4
6	11910.00	36.1 AV	54.0	-17.9	2.69 H	171	22.7	13.4
7	17865.00	52.1 PK	74.0	-21.9	1.62 H	259	30.4	21.7
8	17865.00	39.8 AV	54.0	-14.2	1.62 H	259	18.1	21.7
9	23820.00	54.5 PK	74.0	-19.5	1.73 H	268	57.0	-2.5
10	23820.00	42.0 AV	54.0	-12.0	1.73 H	268	44.5	-2.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	49.6 PK	88.2	-38.6	1.08 V	255	45.9	3.7
2	#5925.00	37.9 AV	68.2	-30.3	1.08 V	255	34.2	3.7
3	*5955.00	98.2 PK			1.08 V	255	94.3	3.9
4	*5955.00	90.1 AV			1.08 V	255	86.2	3.9
5	11910.00	44.5 PK	74.0	-29.5	2.83 V	302	31.1	13.4
6	11910.00	35.0 AV	54.0	-19.0	2.83 V	302	21.6	13.4
7	17865.00	52.5 PK	74.0	-21.5	2.14 V	180	30.8	21.7
8	17865.00	40.8 AV	54.0	-13.2	2.14 V	180	19.1	21.7
9	23820.00	55.5 PK	74.0	-18.5	1.82 V	114	58.0	-2.5
10	23820.00	44.0 AV	54.0	-10.0	1.82 V	114	46.5	-2.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 45 : 6175 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	93.4 PK			1.60 H	27	89.0	4.4
2	*6175.00	82.2 AV			1.60 H	27	77.8	4.4
3	12350.00	46.2 PK	74.0	-27.8	2.73 H	182	33.2	13.0
4	12350.00	36.9 AV	54.0	-17.1	2.73 H	182	23.9	13.0
5	18525.00	52.0 PK	74.0	-22.0	1.64 H	235	59.2	-7.2
6	18525.00	40.1 AV	54.0	-13.9	1.64 H	235	47.3	-7.2
7	#24700.00	54.6 PK	88.2	-33.6	1.73 H	288	56.2	-1.6
8	#24700.00	42.0 AV	68.2	-26.2	1.73 H	288	43.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6175.00	98.7 PK			1.04 V	250	94.3	4.4
2	*6175.00	90.3 AV			1.04 V	250	85.9	4.4
3	12350.00	44.6 PK	74.0	-29.4	2.86 V	320	31.6	13.0
4	12350.00	35.5 AV	54.0	-18.5	2.86 V	320	22.5	13.0
5	18525.00	52.9 PK	74.0	-21.1	2.11 V	172	60.1	-7.2
6	18525.00	41.2 AV	54.0	-12.8	2.11 V	172	48.4	-7.2
7	#24700.00	55.2 PK	88.2	-33.0	1.84 V	123	56.8	-1.6
8	#24700.00	43.7 AV	68.2	-24.5	1.84 V	123	45.3	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 93 : 6415 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	92.8 PK			1.61 H	24	87.5	5.3
2	*6415.00	82.0 AV			1.61 H	24	76.7	5.3
3	#12830.00	45.8 PK	88.2	-42.4	2.68 H	196	32.4	13.4
4	#12830.00	36.3 AV	68.2	-31.9	2.68 H	196	22.9	13.4
5	19245.00	52.4 PK	74.0	-21.6	1.70 H	237	59.1	-6.7
6	19245.00	40.3 AV	54.0	-13.7	1.70 H	237	47.0	-6.7
7	#25660.00	54.1 PK	88.2	-34.1	1.66 H	264	55.7	-1.6
8	#25660.00	42.0 AV	68.2	-26.2	1.66 H	264	43.6	-1.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	98.0 PK			1.10 V	258	92.7	5.3
2	*6415.00	90.0 AV			1.10 V	258	84.7	5.3
3	#12830.00	44.2 PK	88.2	-44.0	2.87 V	308	30.8	13.4
4	#12830.00	35.0 AV	68.2	-33.2	2.87 V	308	21.6	13.4
5	19245.00	53.0 PK	74.0	-21.0	2.14 V	187	59.7	-6.7
6	19245.00	41.3 AV	54.0	-12.7	2.14 V	187	48.0	-6.7
7	#25660.00	55.3 PK	88.2	-32.9	1.83 V	130	56.9	-1.6
8	#25660.00	43.8 AV	68.2	-24.4	1.83 V	130	45.4	-1.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 97 : 6435 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	93.0 PK			1.66 H	28	87.6	5.4
2	*6435.00	82.1 AV			1.66 H	28	76.7	5.4
3	#12870.00	46.6 PK	88.2	-41.6	2.64 H	197	33.2	13.4
4	#12870.00	36.9 AV	68.2	-31.3	2.64 H	197	23.5	13.4
5	19305.00	52.2 PK	74.0	-21.8	1.60 H	237	58.9	-6.7
6	19305.00	40.1 AV	54.0	-13.9	1.60 H	237	46.8	-6.7
7	#25740.00	54.4 PK	88.2	-33.8	1.69 H	278	55.8	-1.4
8	#25740.00	42.0 AV	68.2	-26.2	1.69 H	278	43.4	-1.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	98.1 PK			1.08 V	249	92.7	5.4
2	*6435.00	89.9 AV			1.08 V	249	84.5	5.4
3	#12870.00	44.3 PK	88.2	-43.9	2.88 V	308	30.9	13.4
4	#12870.00	34.7 AV	68.2	-33.5	2.88 V	308	21.3	13.4
5	19305.00	53.0 PK	74.0	-21.0	2.06 V	184	59.7	-6.7
6	19305.00	41.2 AV	54.0	-12.8	2.06 V	184	47.9	-6.7
7	#25740.00	56.1 PK	88.2	-32.1	1.87 V	122	57.5	-1.4
8	#25740.00	44.3 AV	68.2	-23.9	1.87 V	122	45.7	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a 6G	Channel	CH 105 : 6475 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	93.0 PK			1.58 H	23	87.3	5.7
2	*6475.00	81.9 AV			1.58 H	23	76.2	5.7
3	#12950.00	45.6 PK	88.2	-42.6	2.70 H	203	32.3	13.3
4	#12950.00	36.3 AV	68.2	-31.9	2.70 H	203	23.0	13.3
5	19425.00	51.5 PK	74.0	-22.5	1.64 H	251	58.3	-6.8
6	19425.00	39.7 AV	54.0	-14.3	1.64 H	251	46.5	-6.8
7	#25900.00	53.7 PK	88.2	-34.5	1.73 H	263	55.7	-2.0
8	#25900.00	41.4 AV	68.2	-26.8	1.73 H	263	43.4	-2.0
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	98.7 PK			1.09 V	243	93.0	5.7
2	*6475.00	90.5 AV			1.09 V	243	84.8	5.7
3	#12950.00	44.5 PK	88.2	-43.7	2.87 V	318	31.2	13.3
4	#12950.00	35.2 AV	68.2	-33.0	2.87 V	318	21.9	13.3
5	19425.00	52.1 PK	74.0	-21.9	2.14 V	186	58.9	-6.8
6	19425.00	40.8 AV	54.0	-13.2	2.14 V	186	47.6	-6.8
7	#25900.00	55.7 PK	88.2	-32.5	1.84 V	106	57.7	-2.0
8	#25900.00	43.9 AV	68.2	-24.3	1.84 V	106	45.9	-2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.