




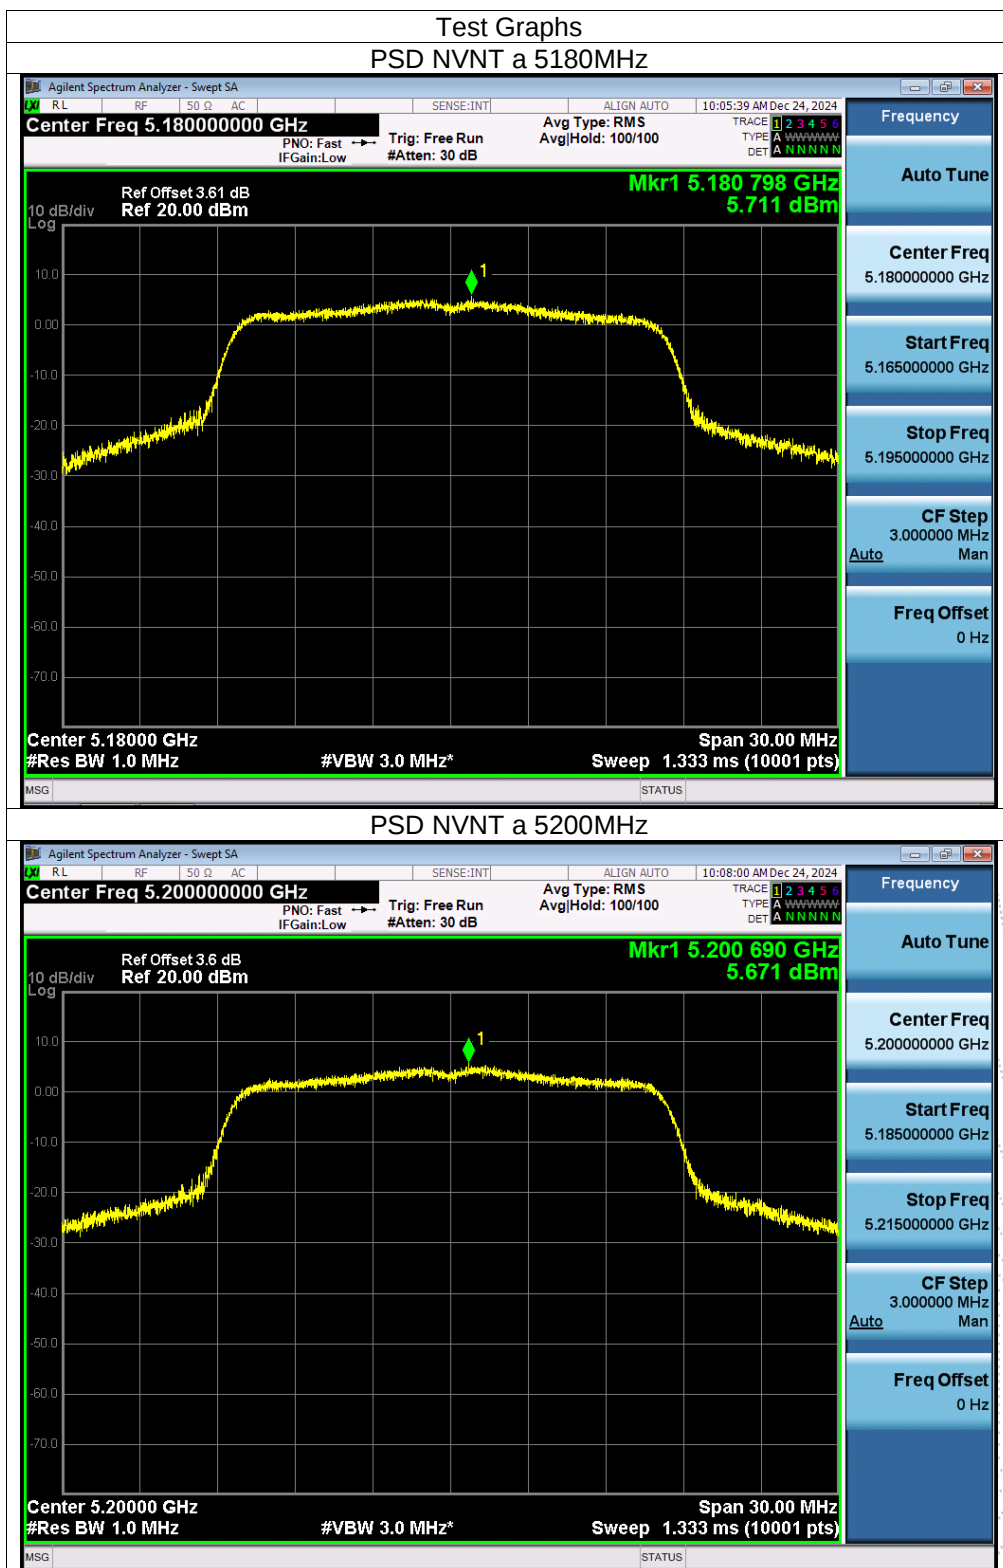
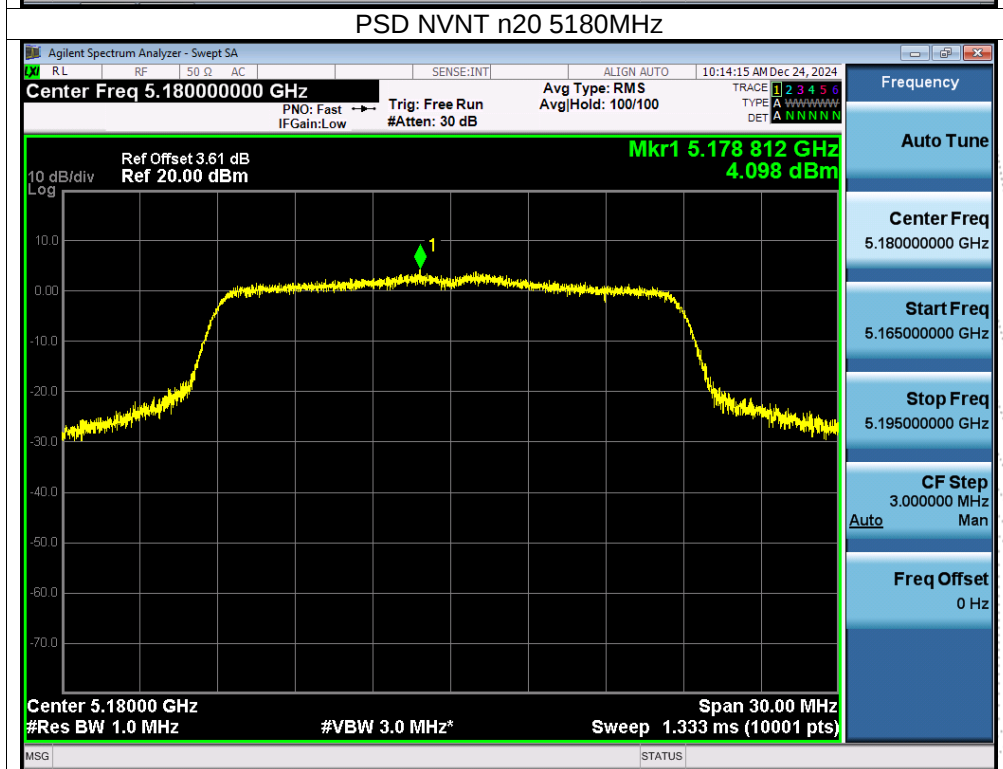
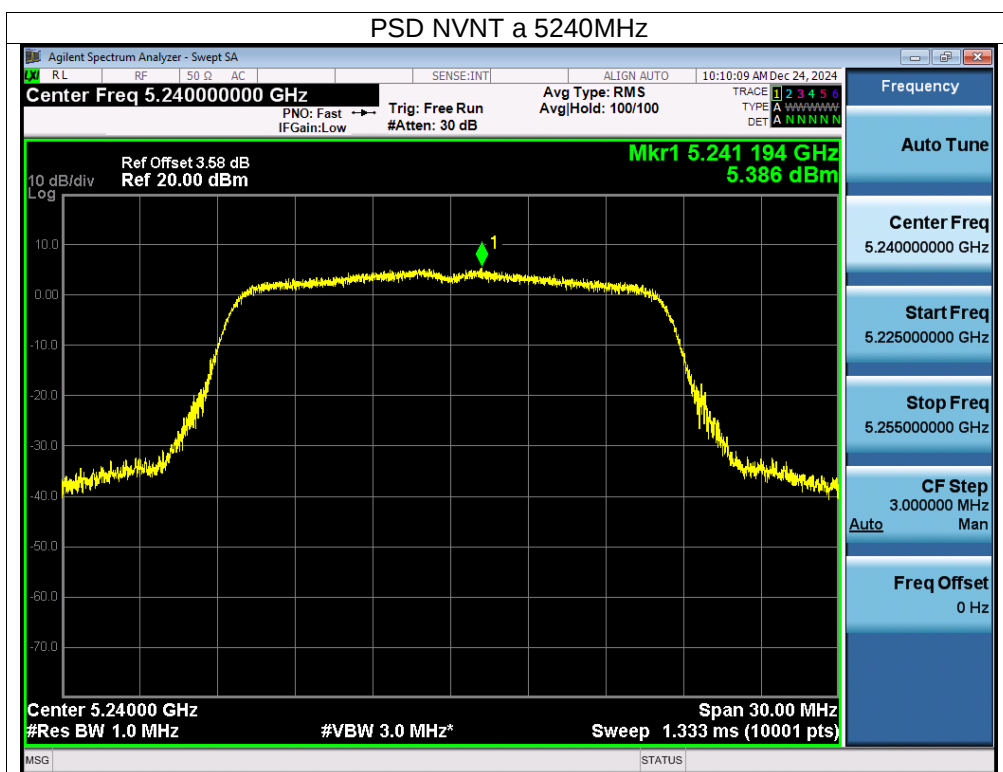
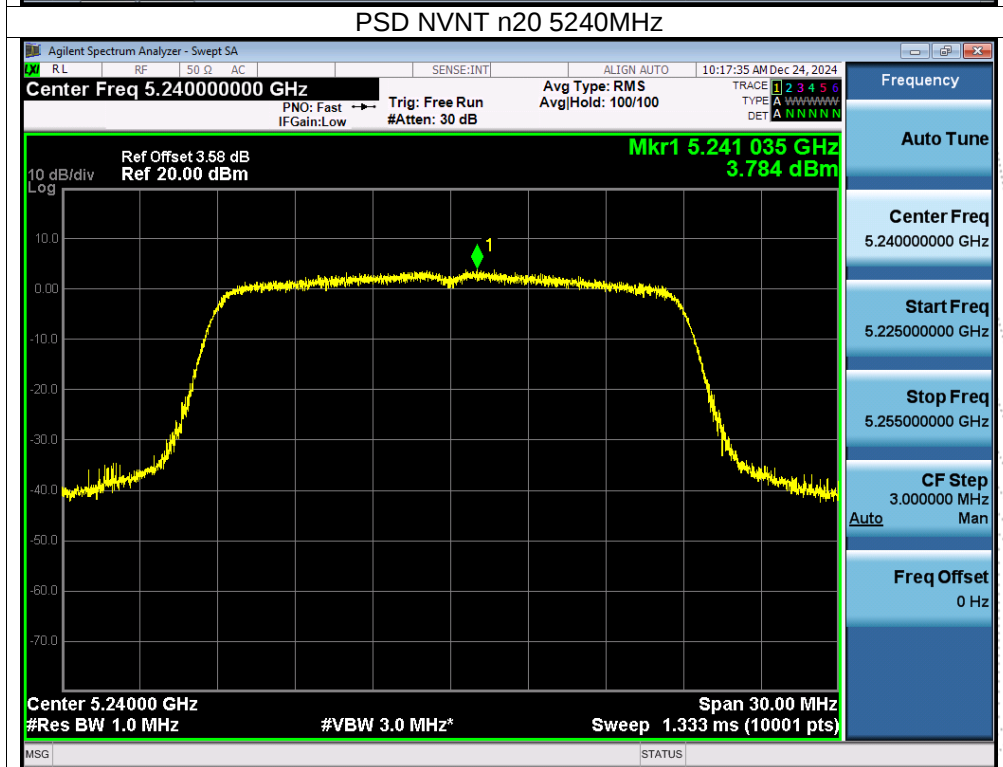



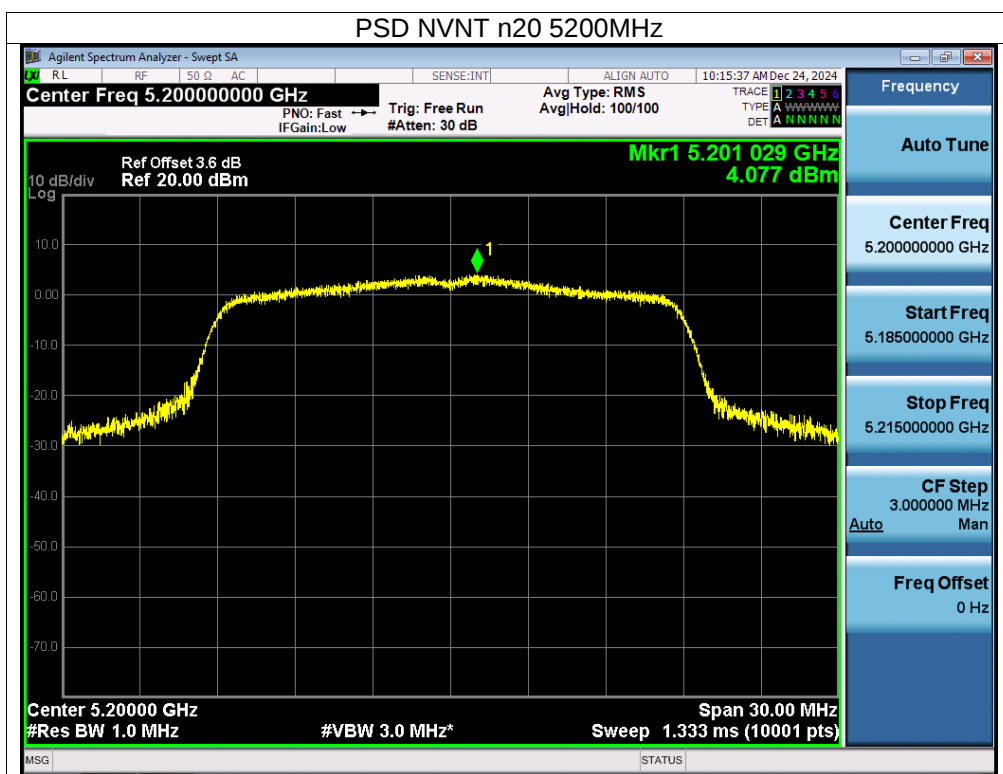



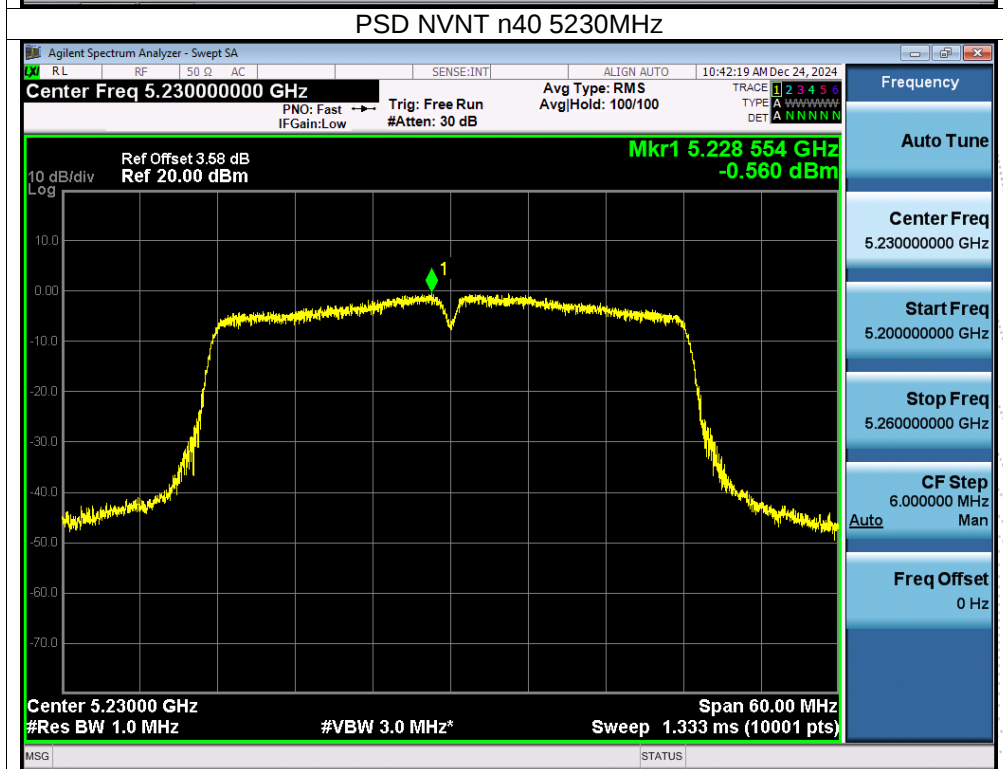



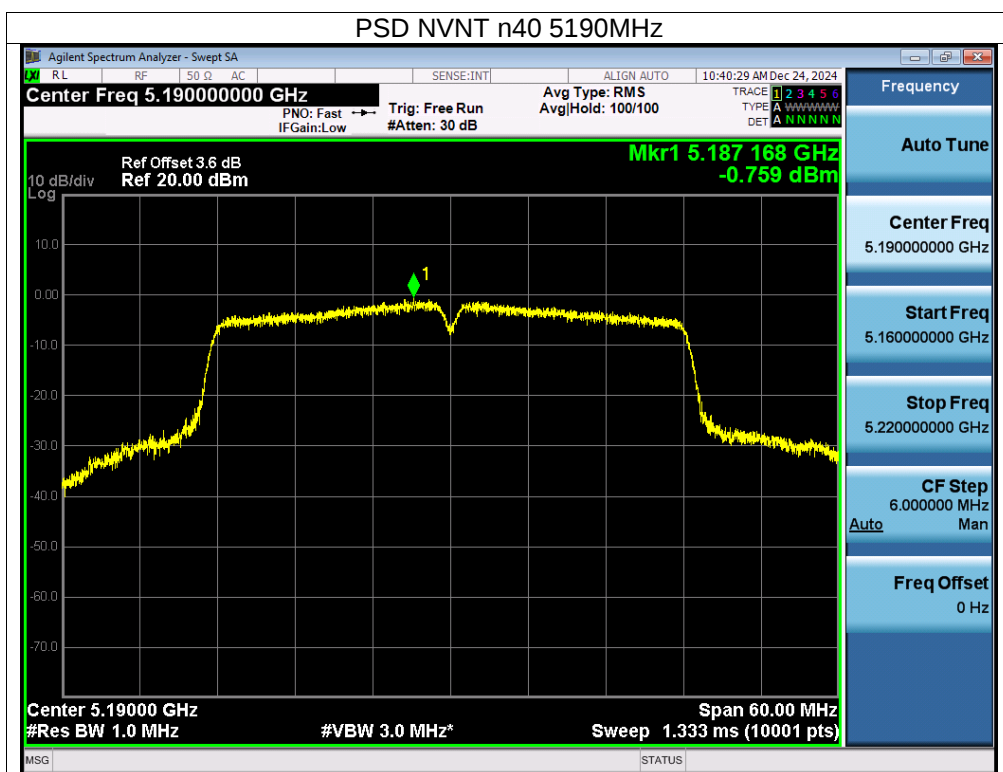



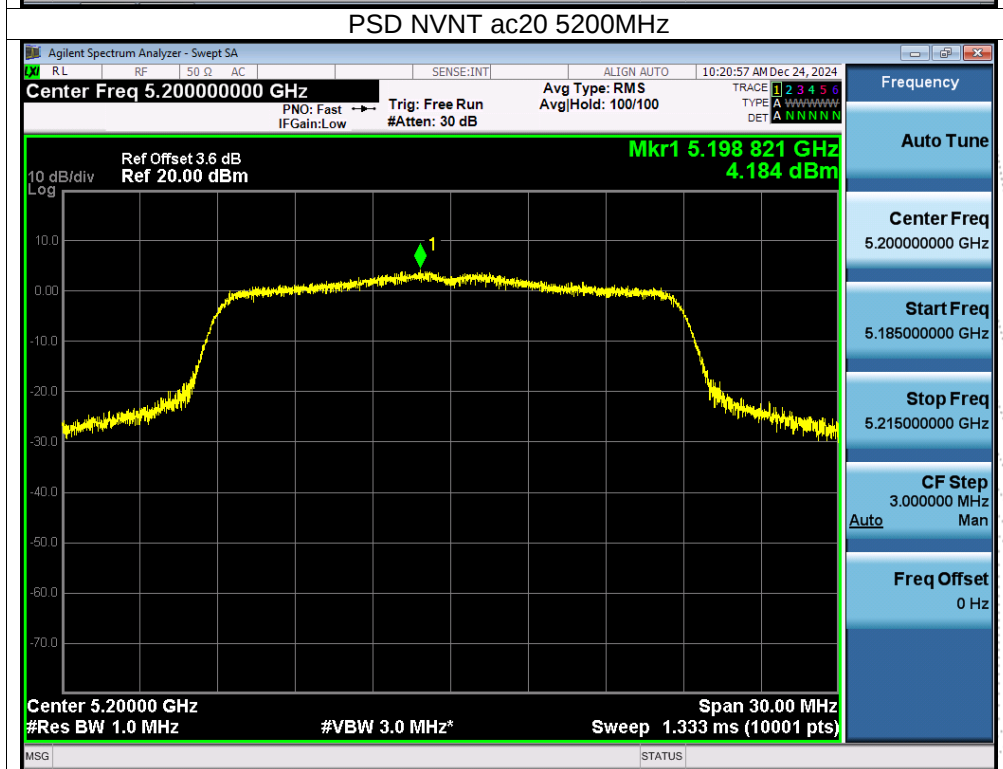



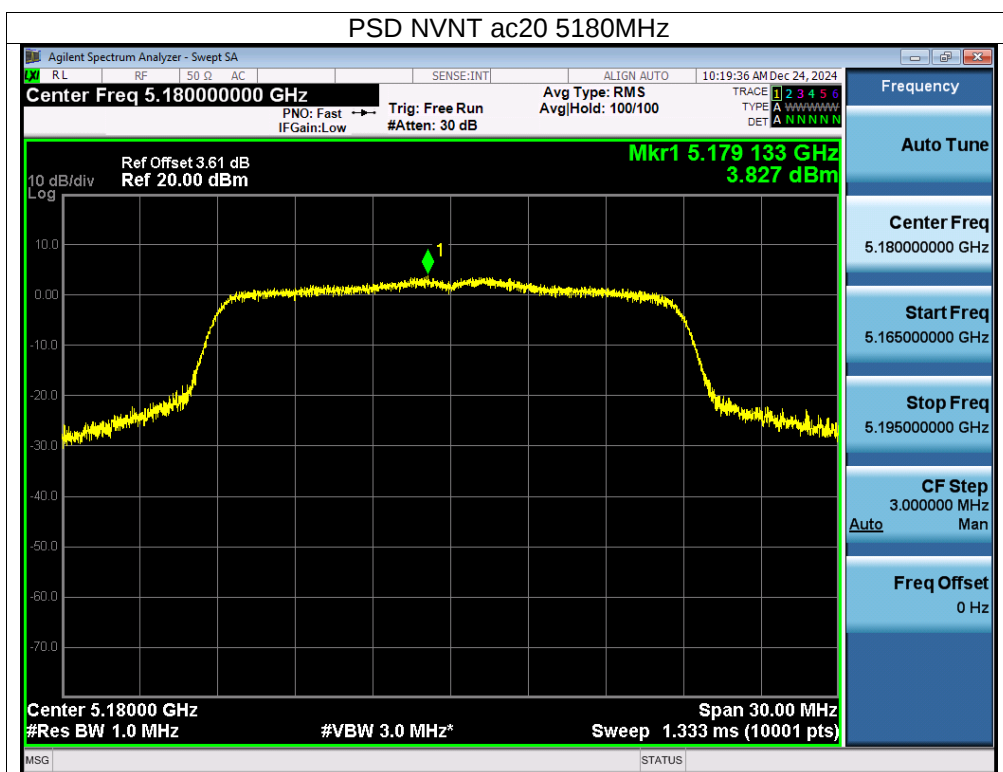


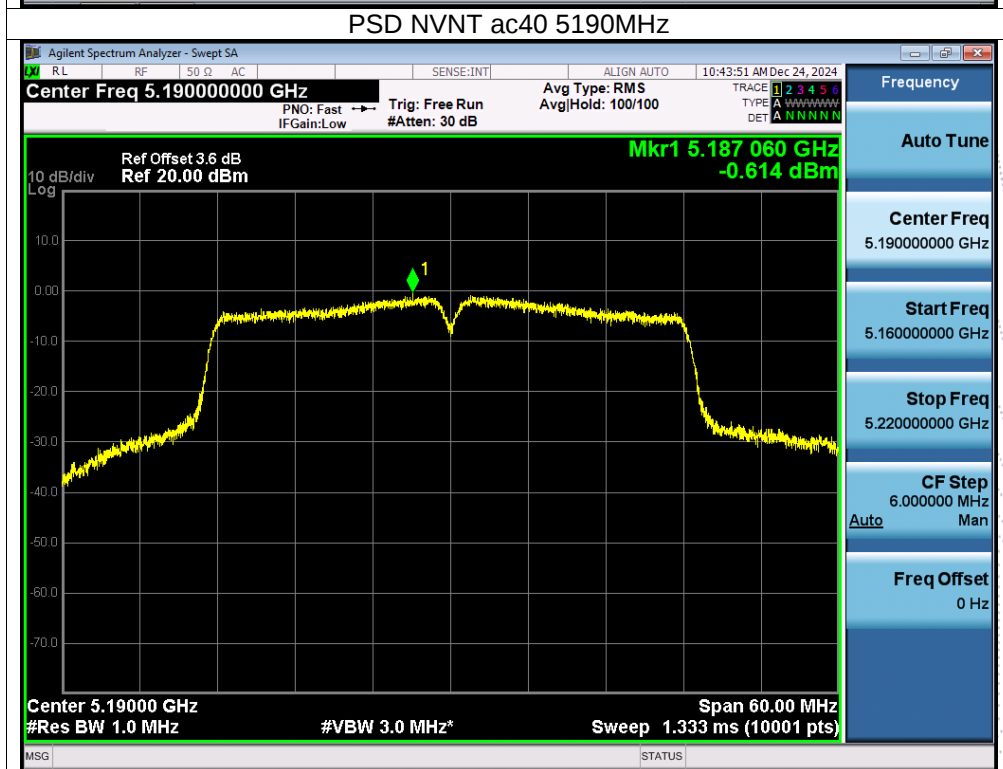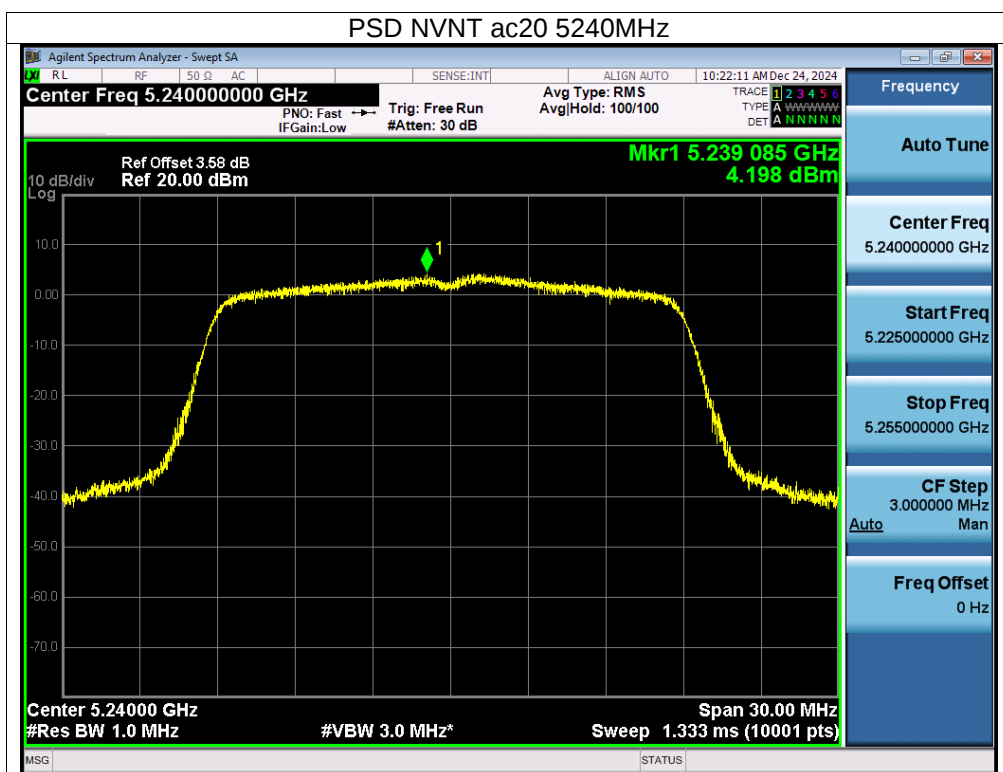

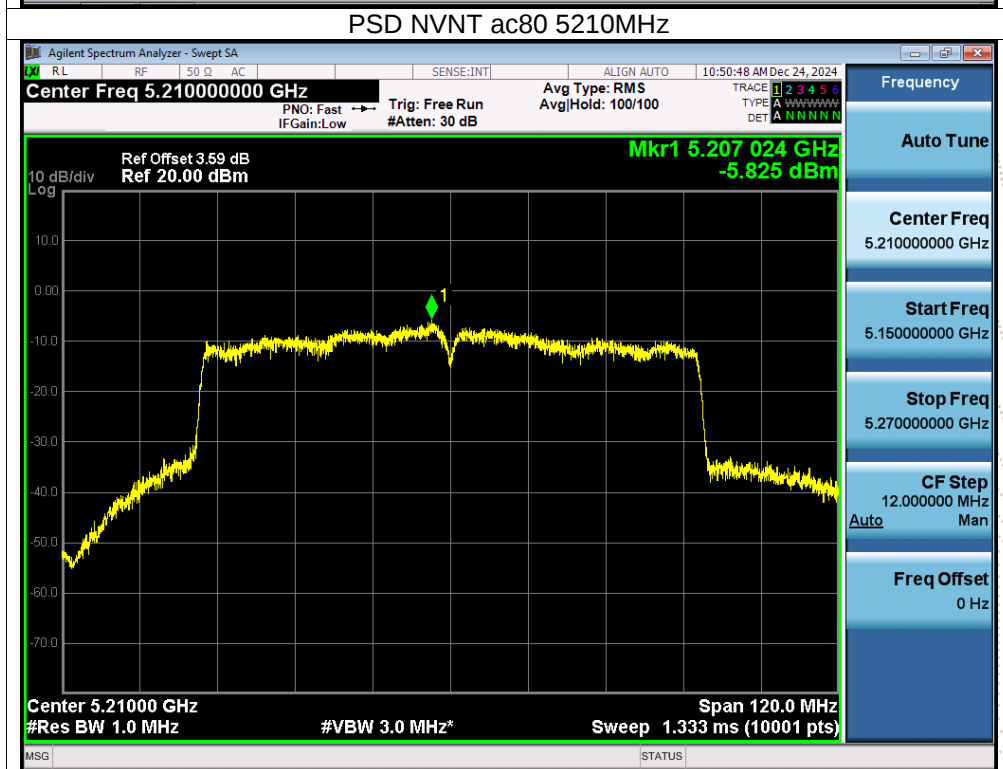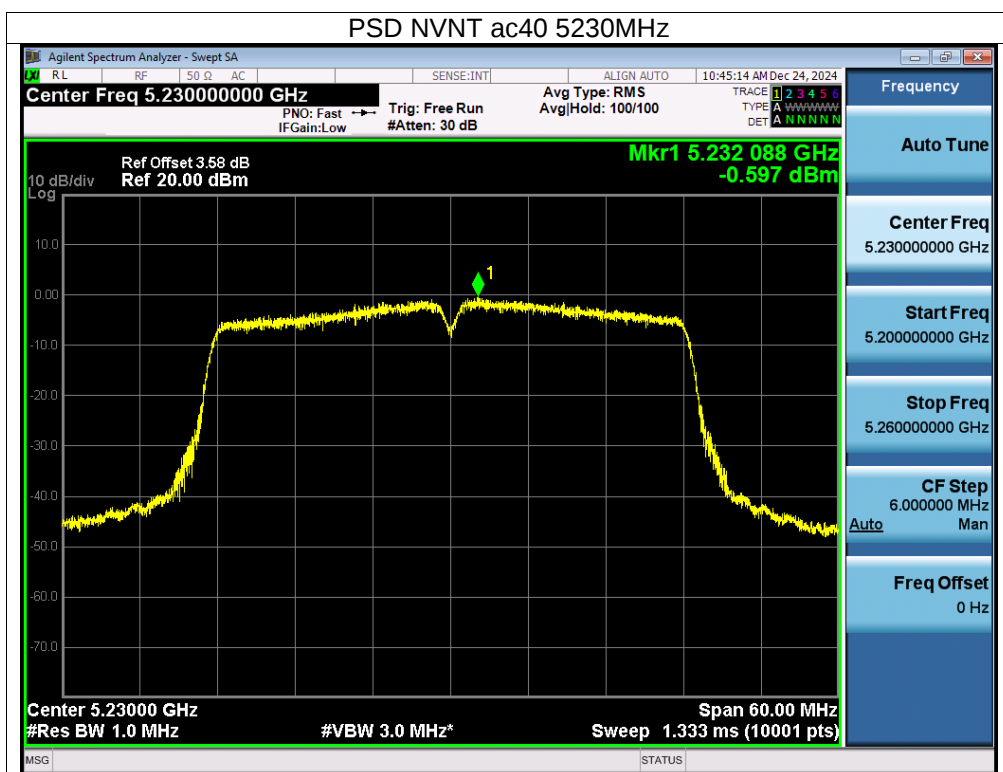

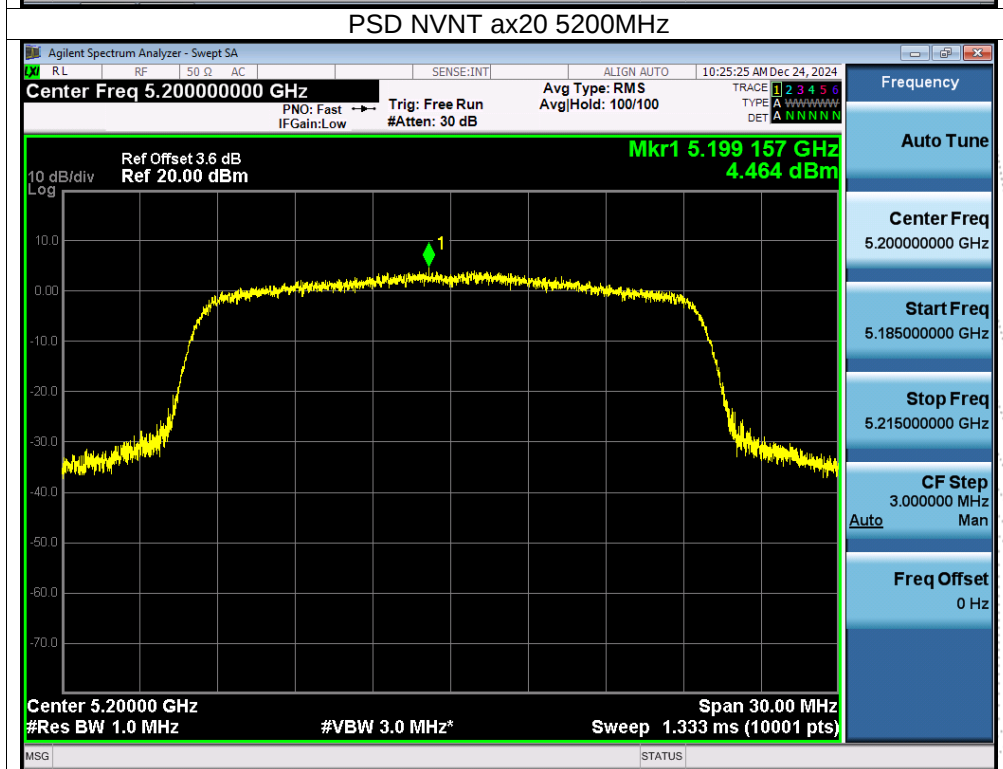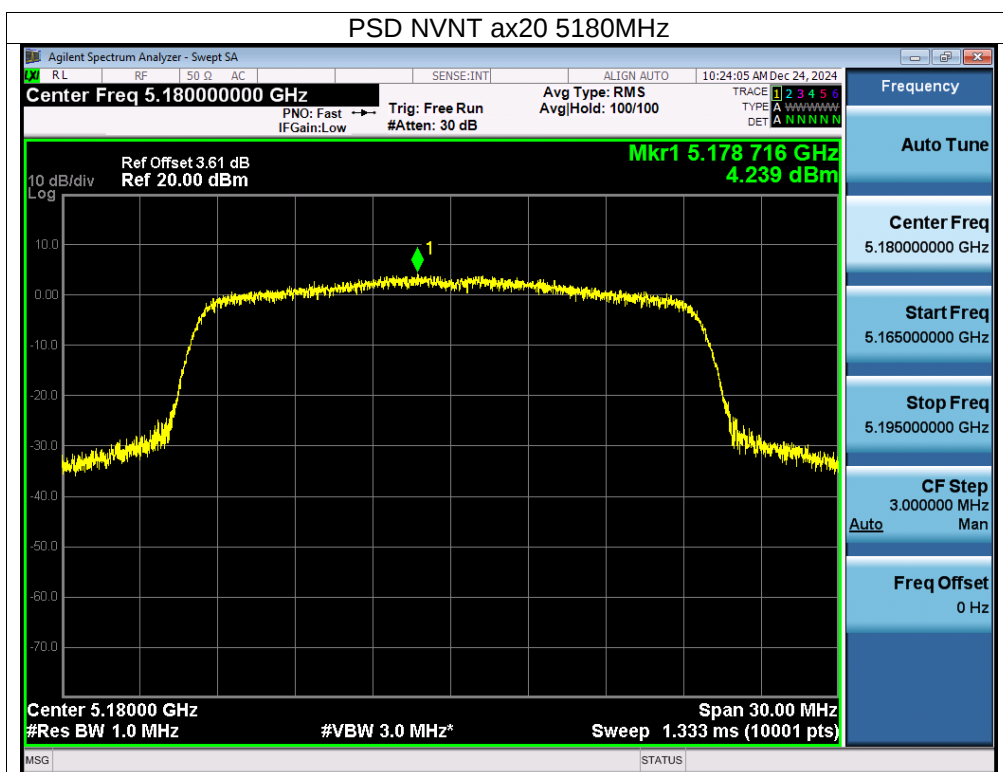


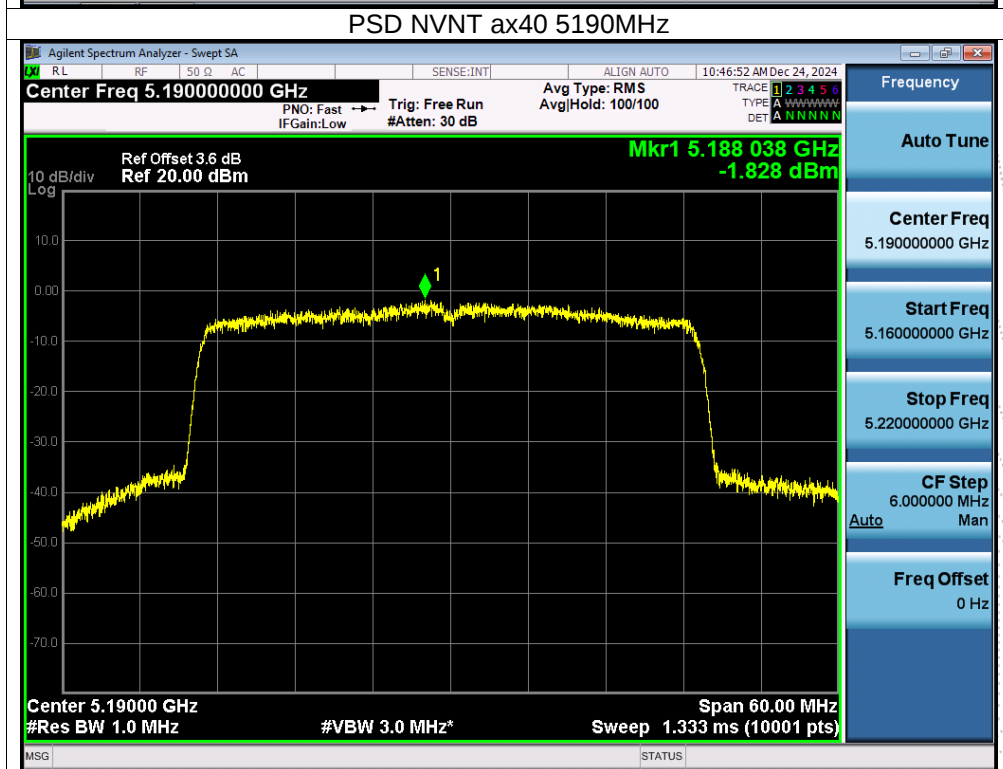
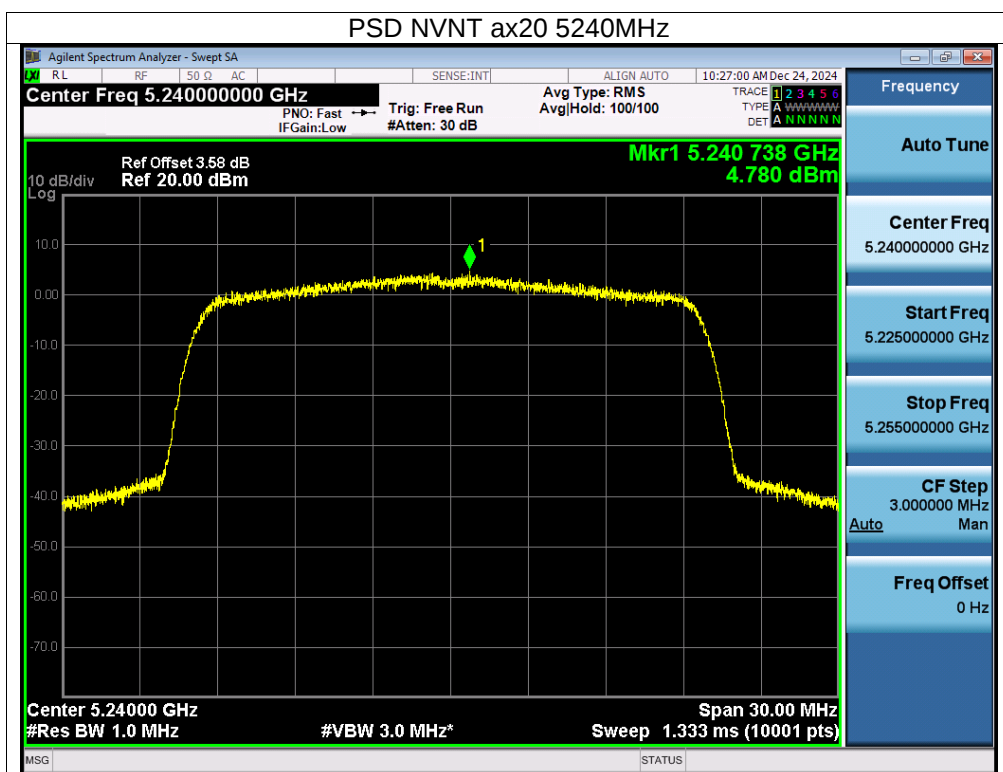


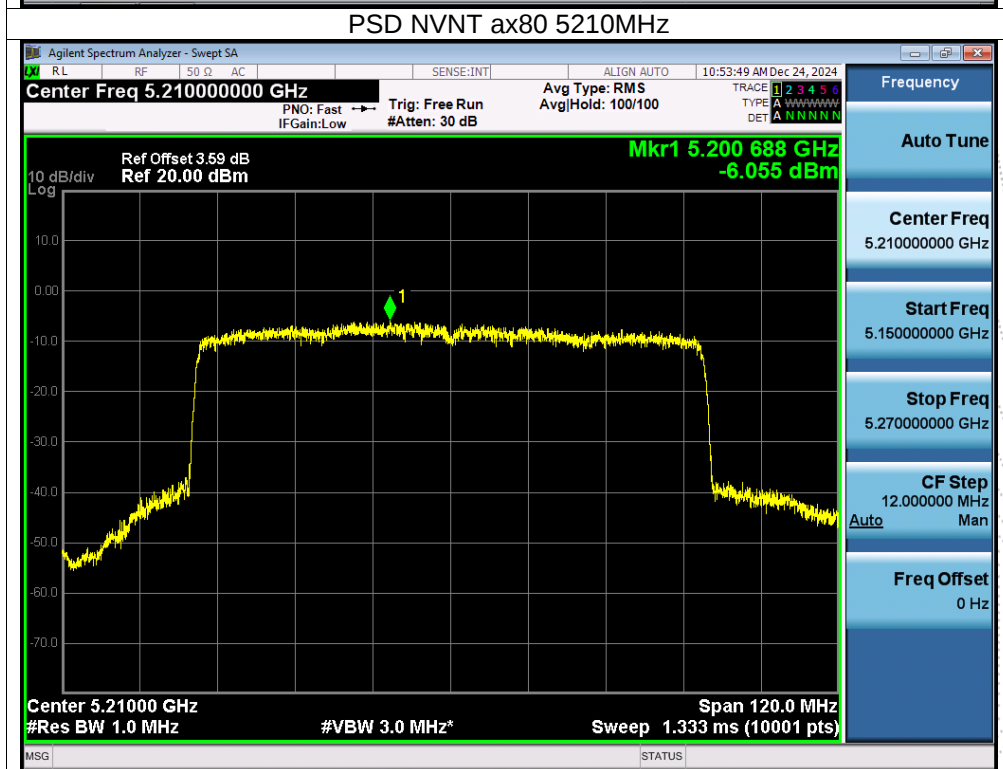
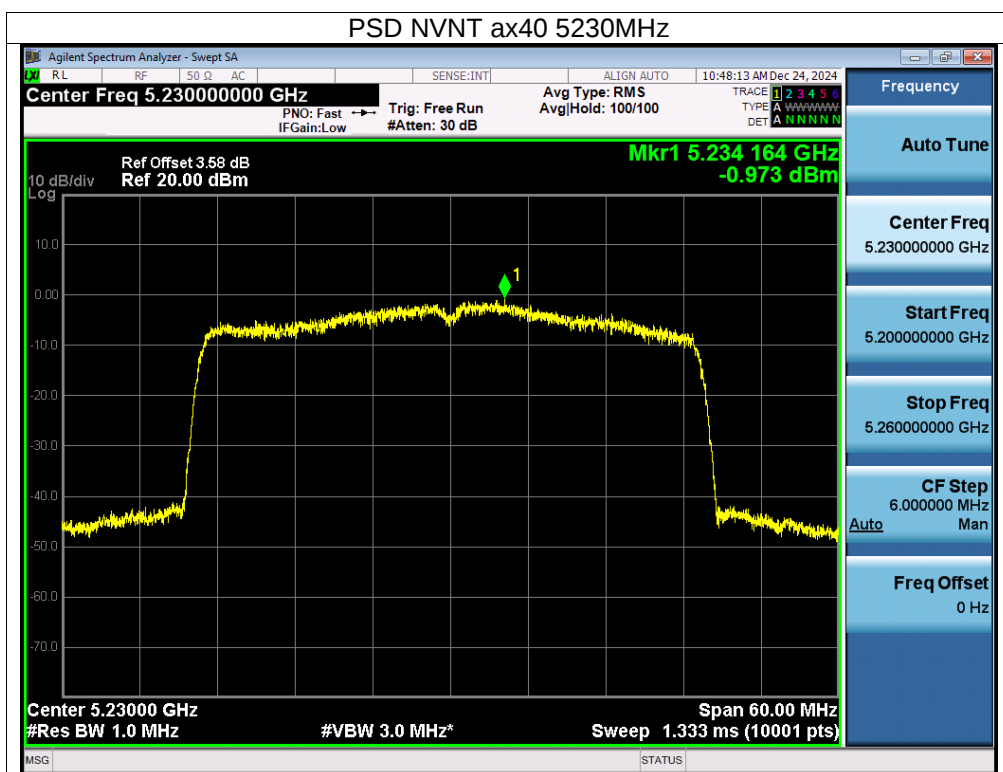




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V
Test Mode:	(5260-5320MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	4.69	11	Pass
NVNT	a	5280	4.14	11	Pass
NVNT	a	5320	3.98	11	Pass
NVNT	n20	5260	1.8	11	Pass
NVNT	n20	5280	1.45	11	Pass
NVNT	n20	5320	1.31	11	Pass
NVNT	n40	5270	-1.86	11	Pass
NVNT	n40	5310	-1.42	11	Pass
NVNT	ac20	5260	1.71	11	Pass
NVNT	ac20	5280	1.5	11	Pass
NVNT	ac20	5320	1.37	11	Pass
NVNT	ac40	5270	-2.92	11	Pass
NVNT	ac40	5310	-1.83	11	Pass
NVNT	ac80	5290	-6.98	11	Pass
NVNT	ax20	5260	-0.08	11	Pass
NVNT	ax20	5280	-0.95	11	Pass
NVNT	ax20	5320	-0.58	11	Pass
NVNT	ax40	5270	-3.37	11	Pass
NVNT	ax40	5310	-3.04	11	Pass
NVNT	ax80	5290	-6.9	11	Pass


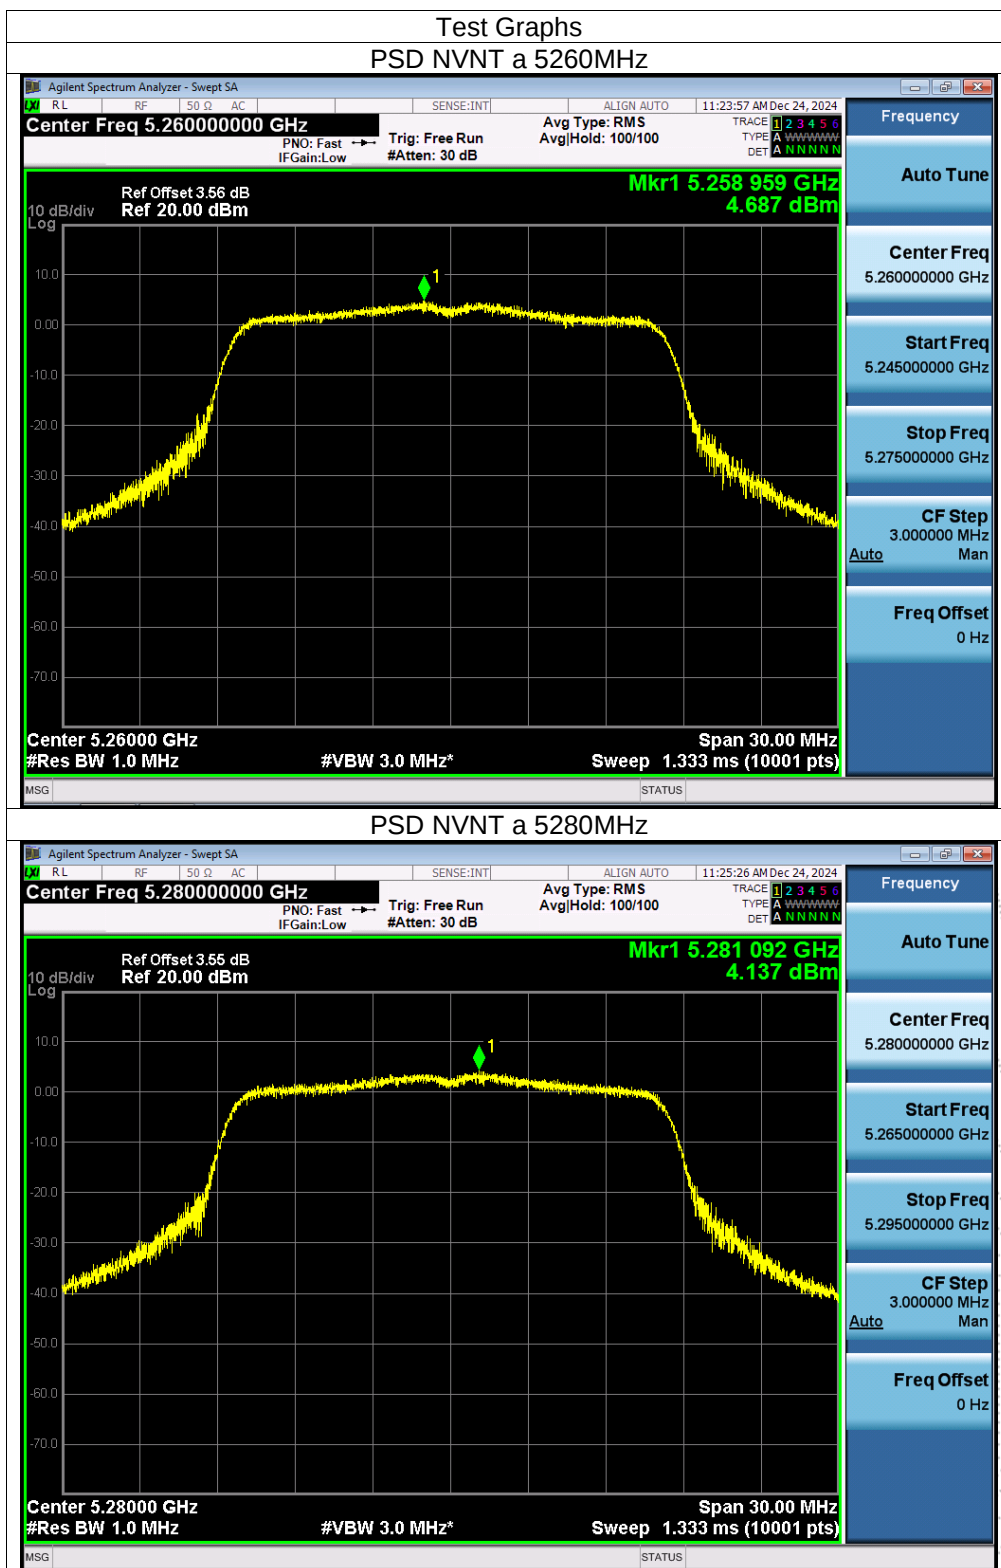


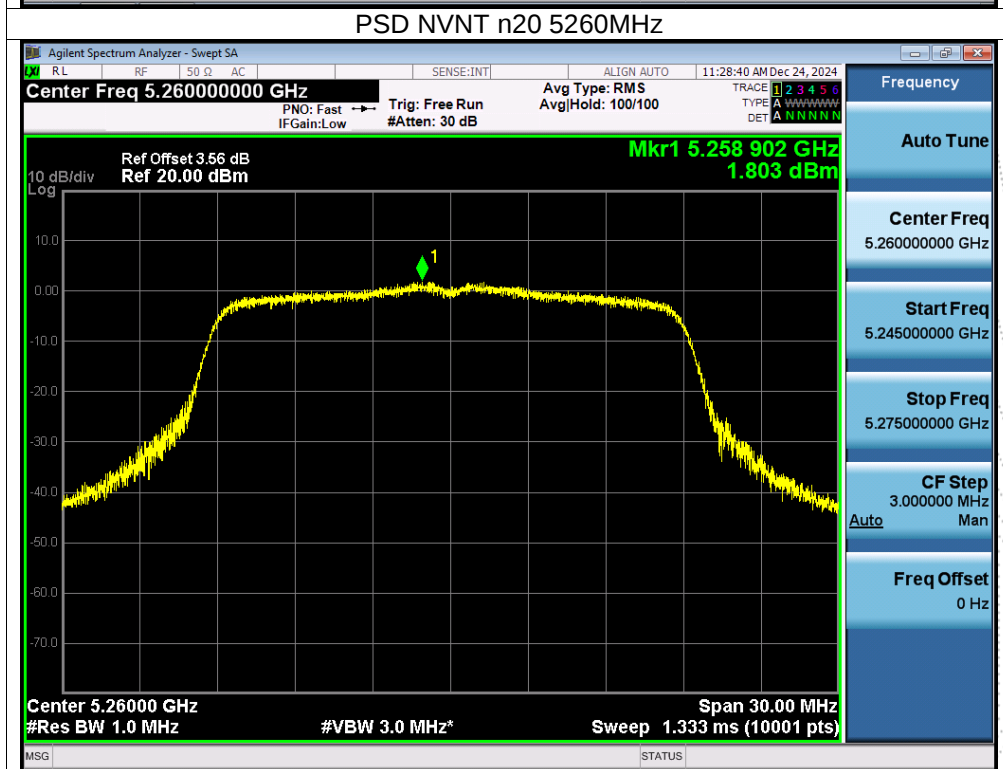
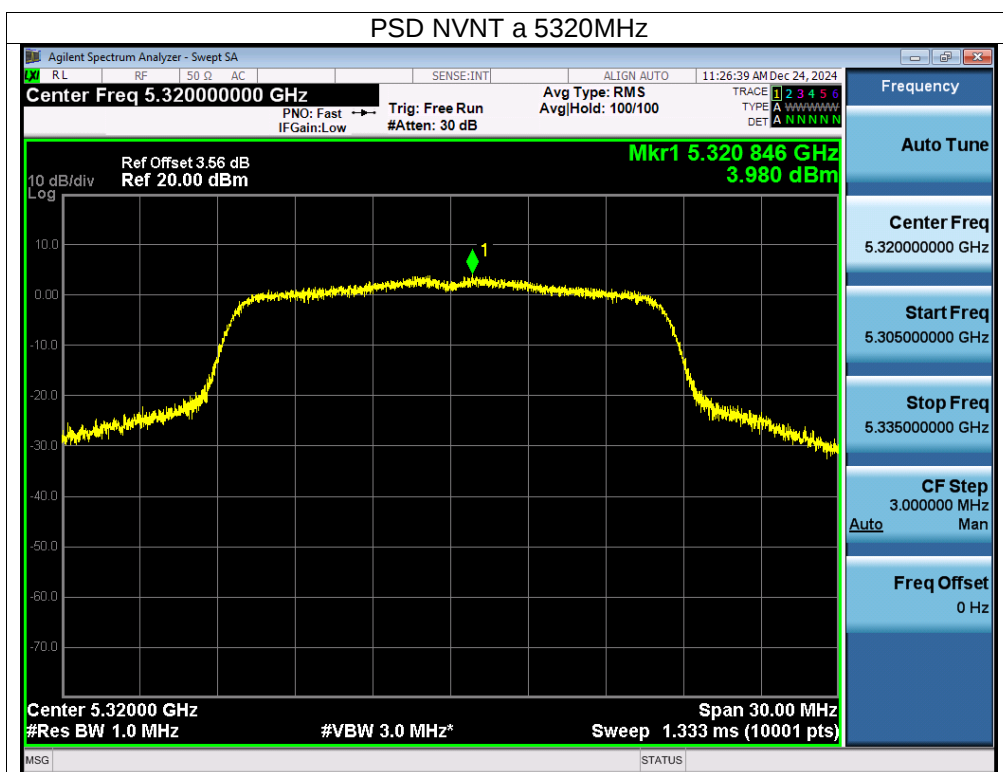


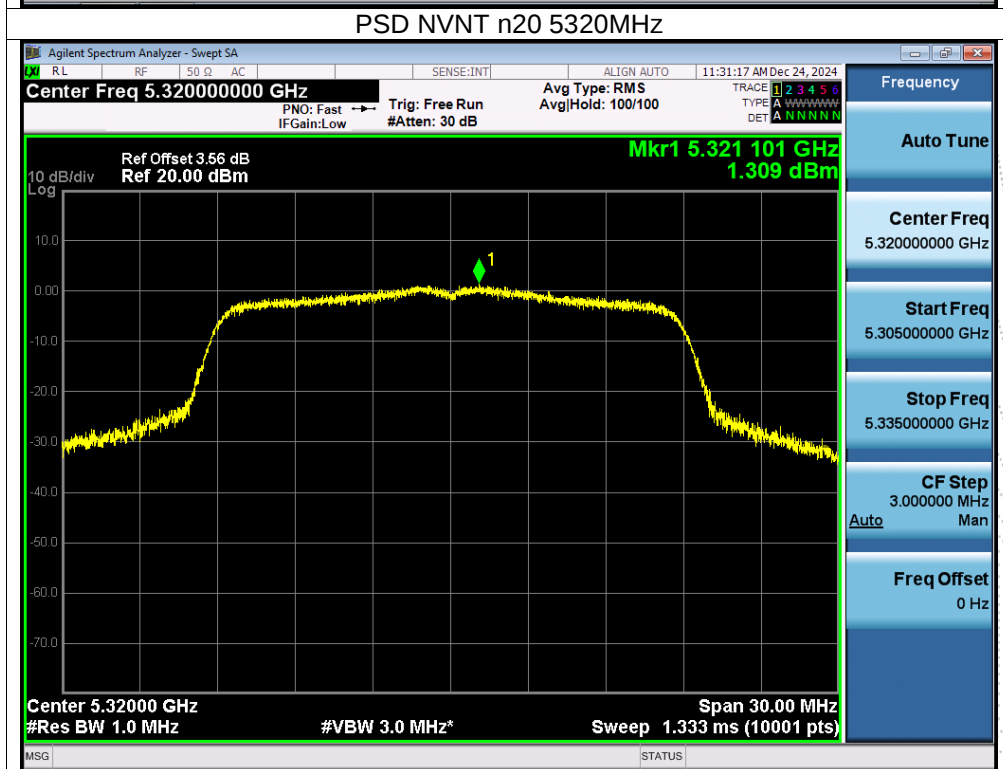
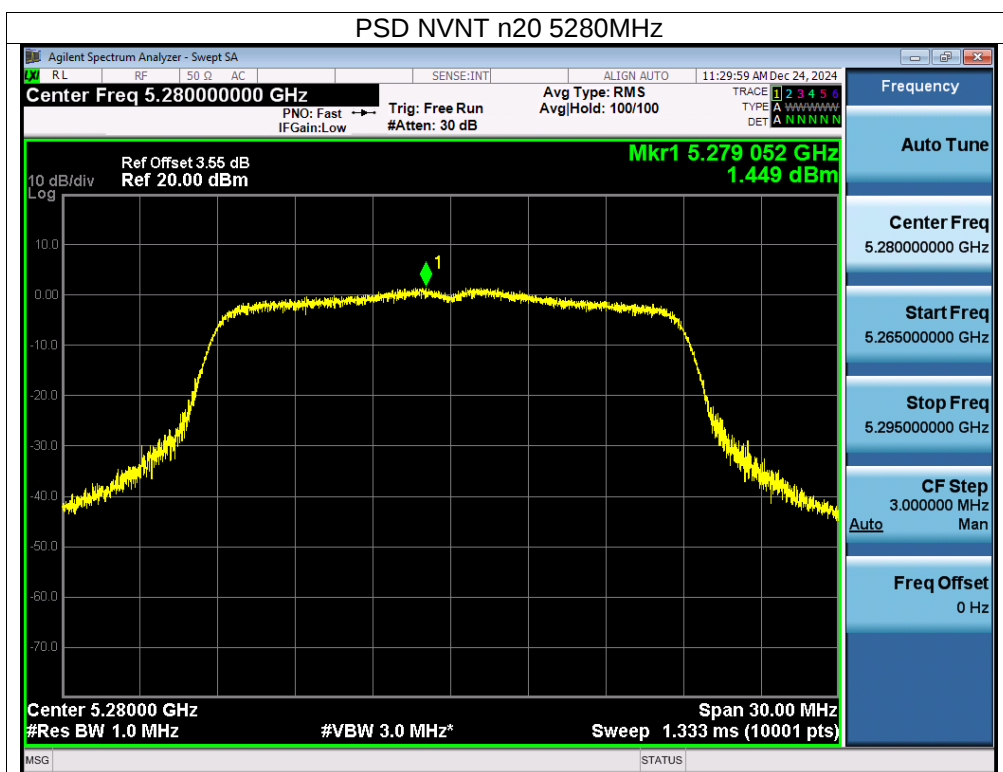


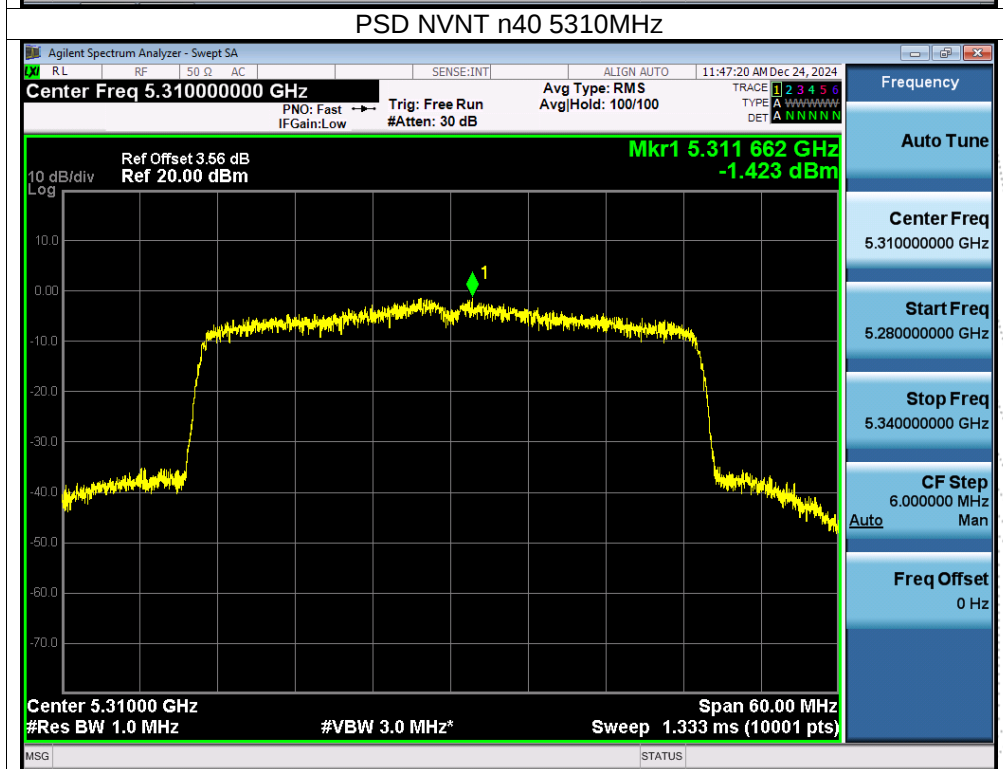
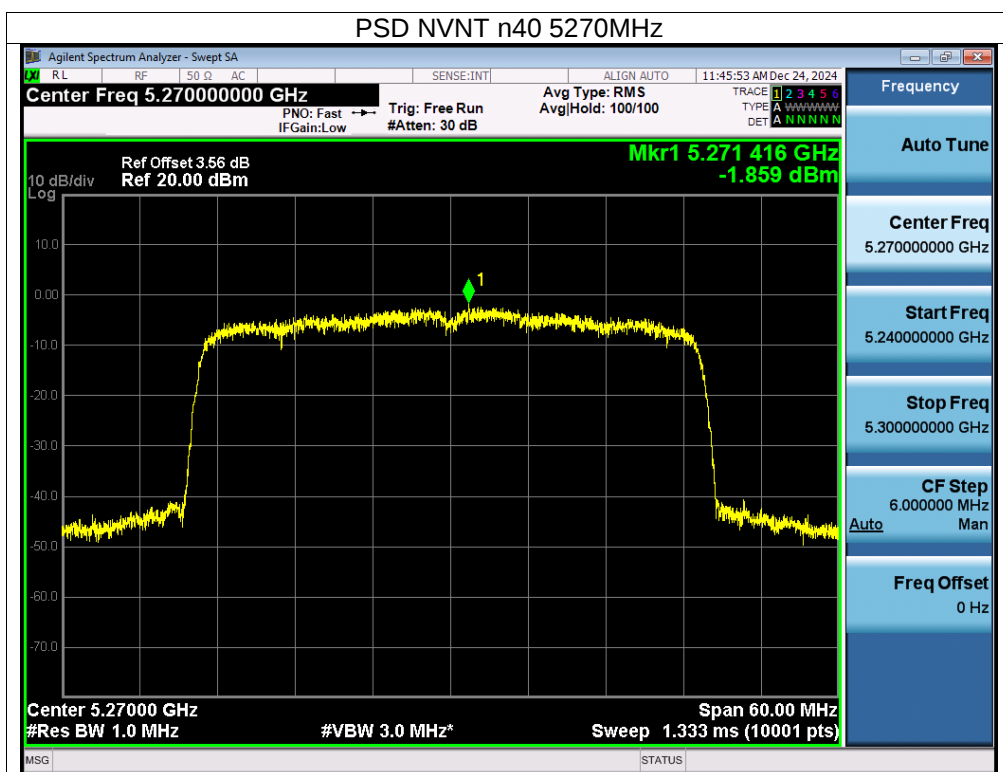


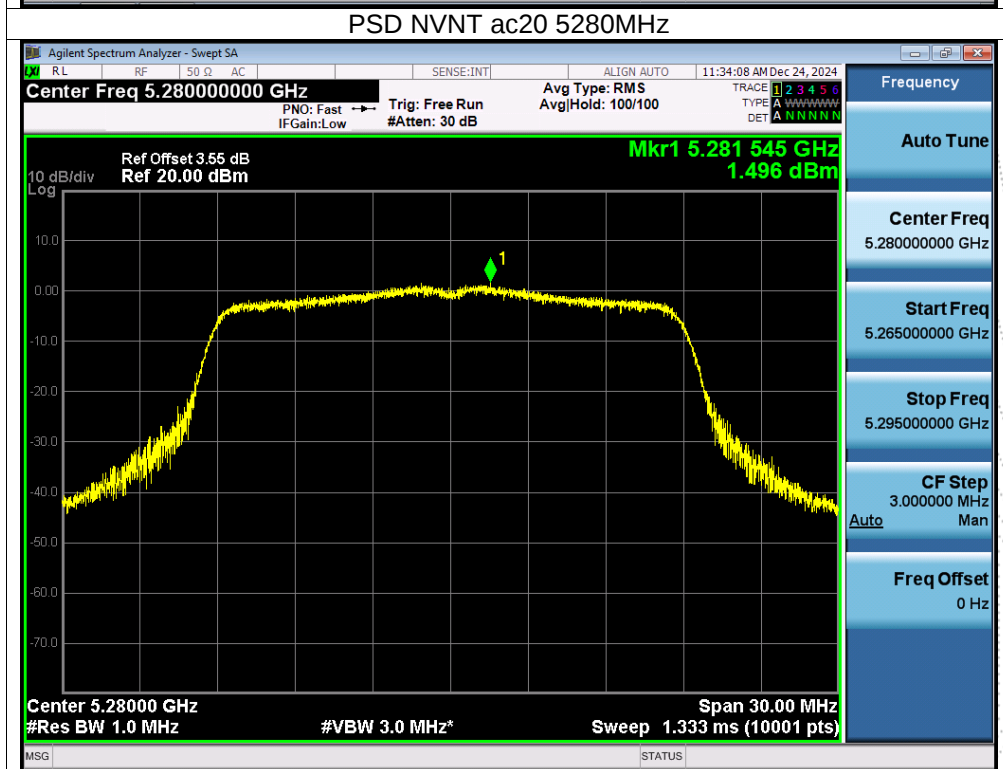
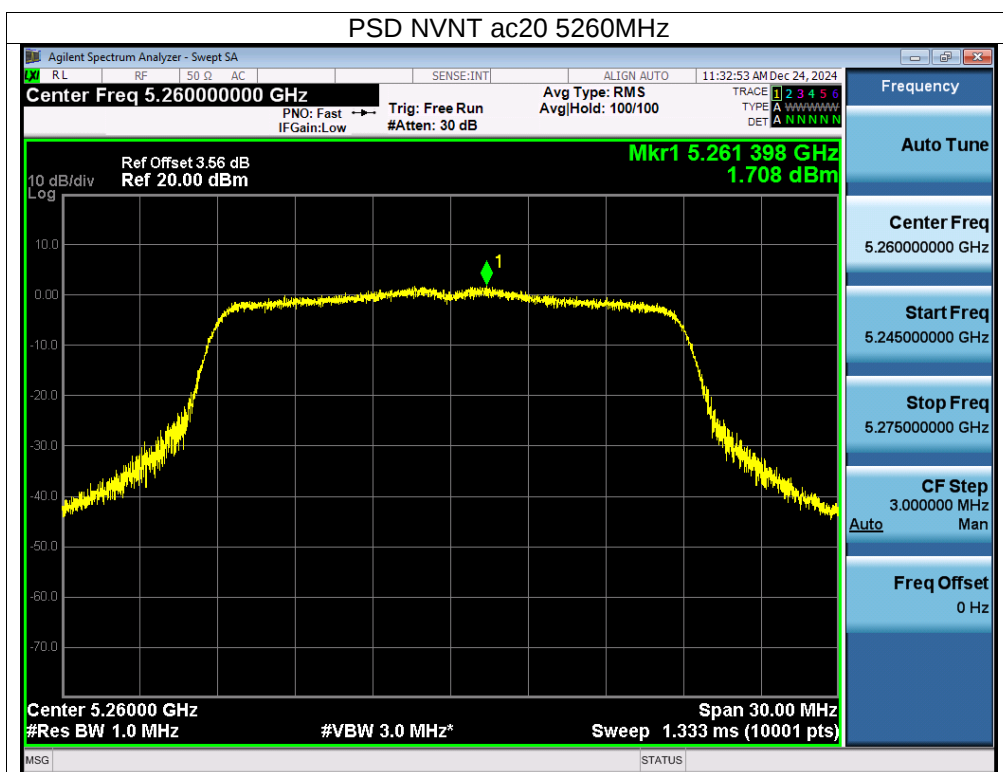


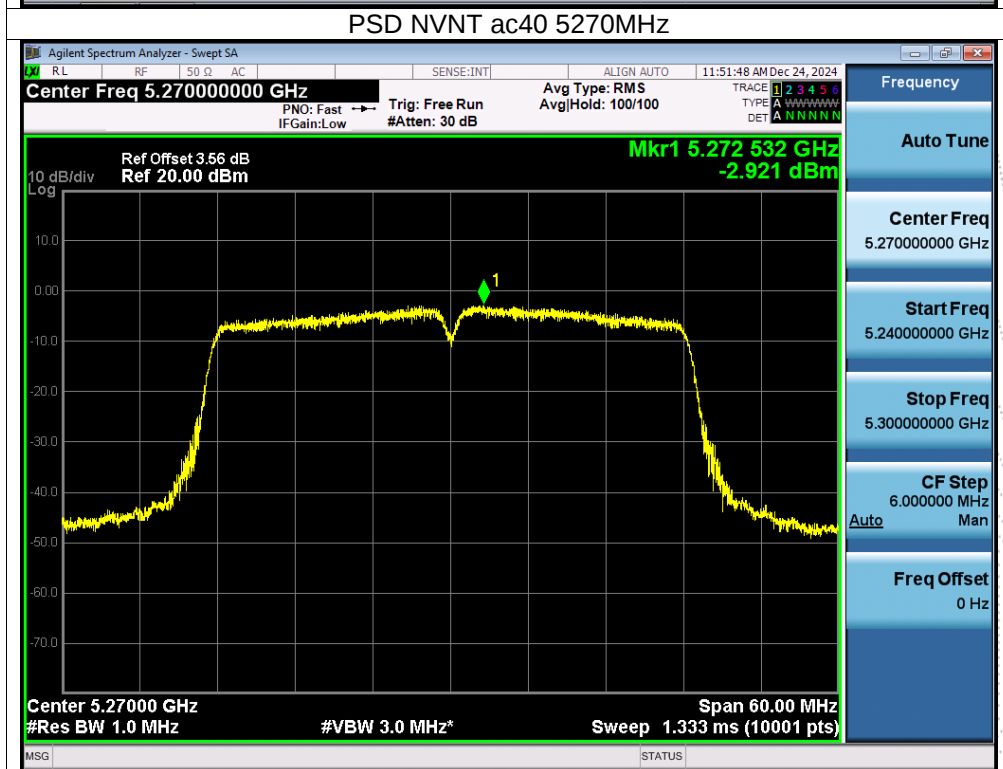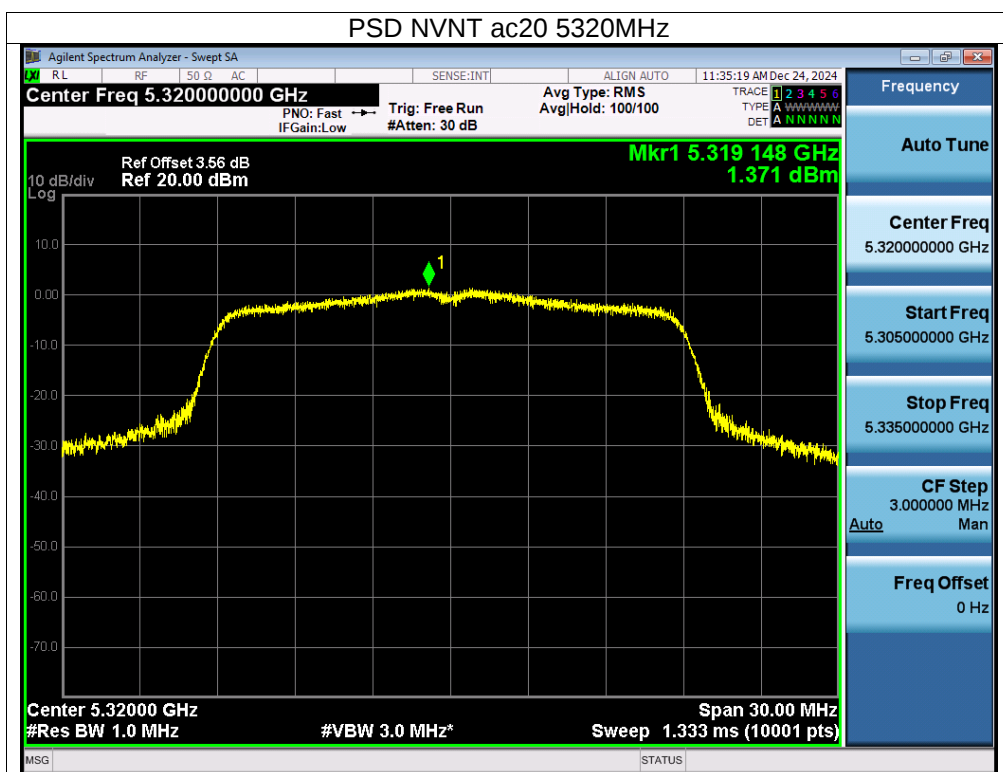

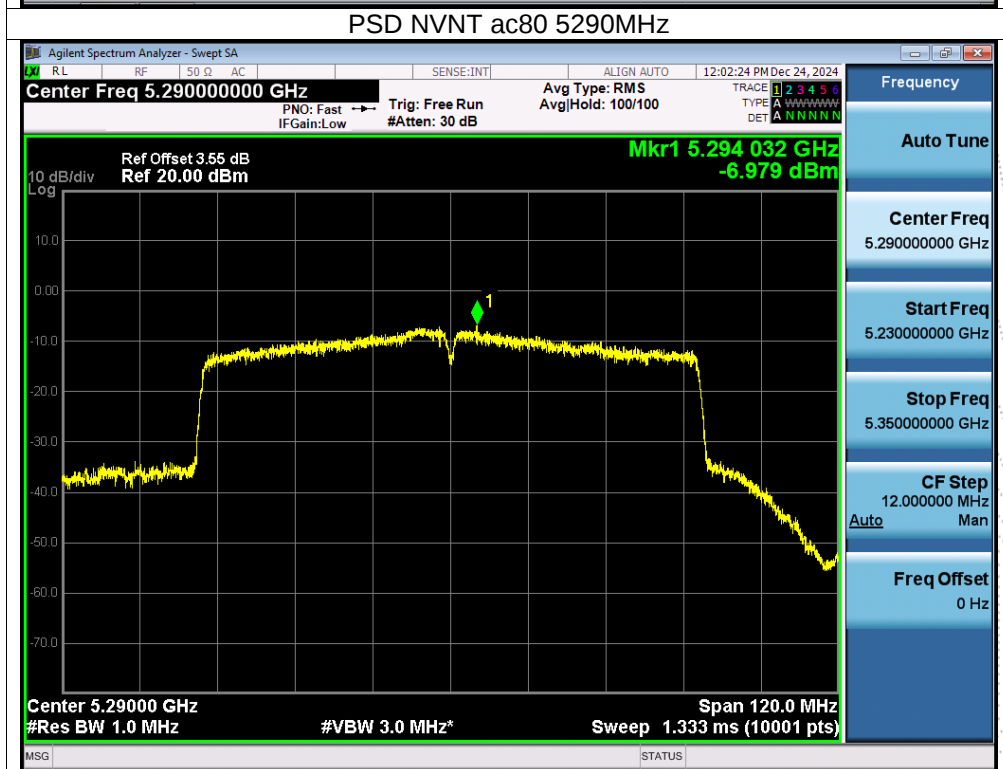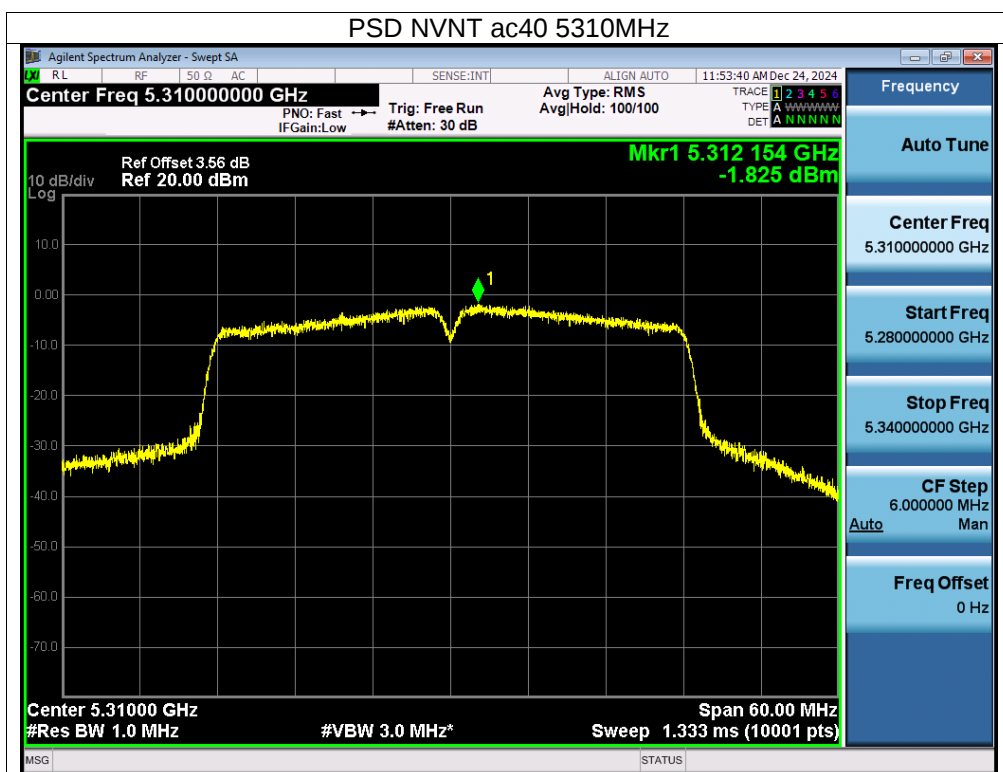

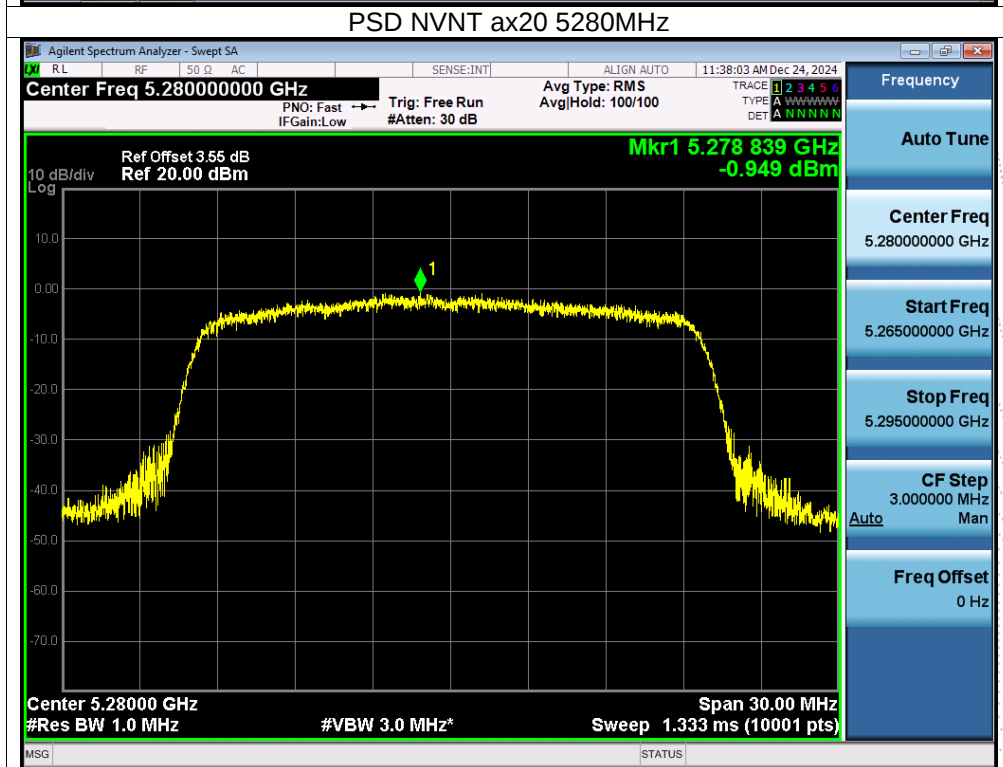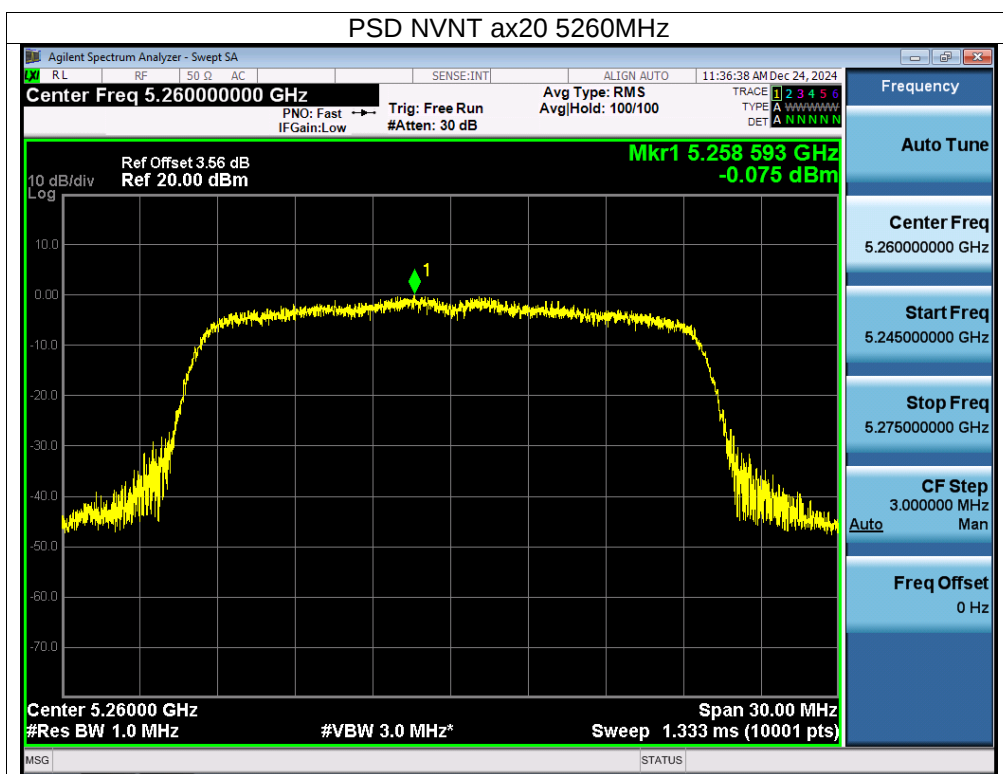


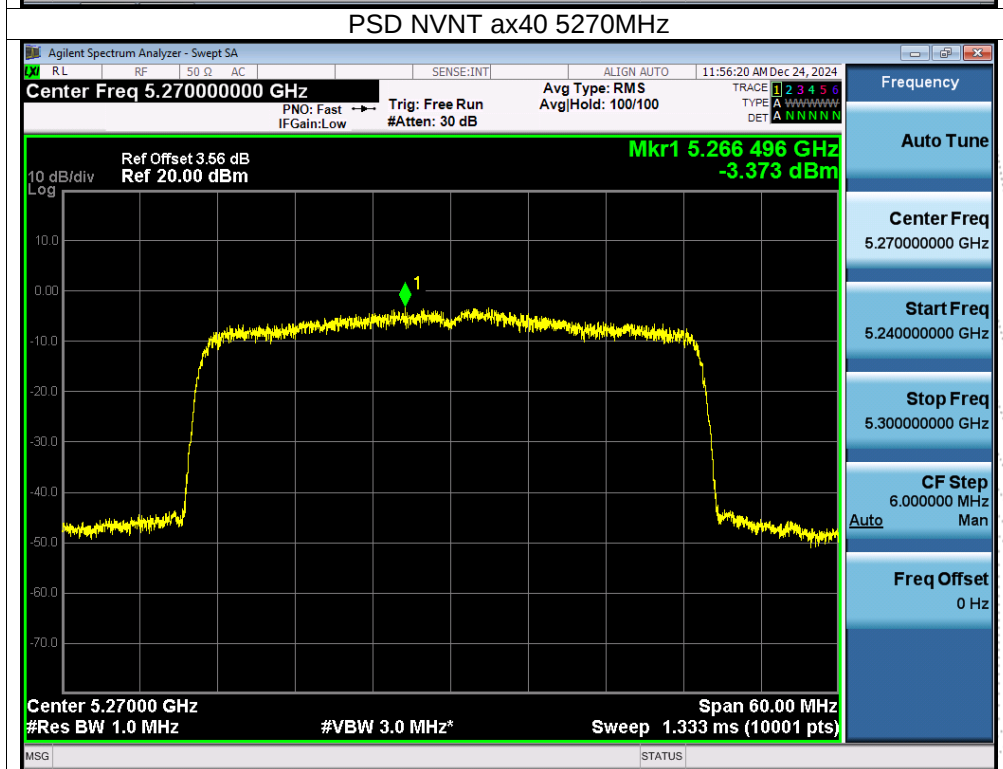
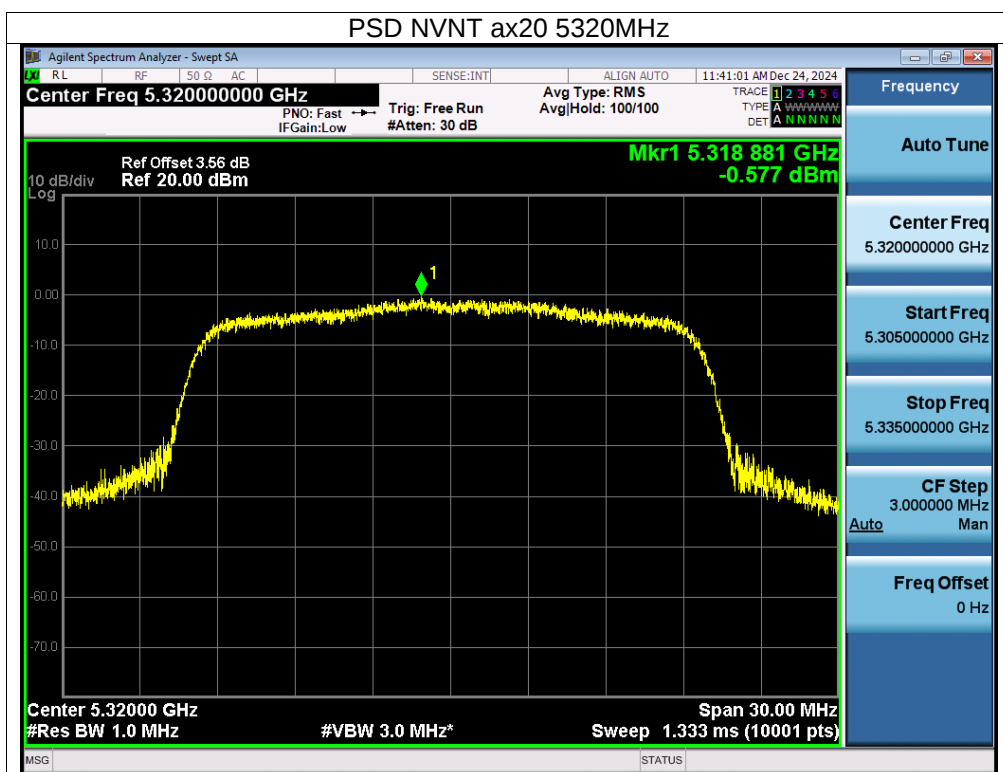


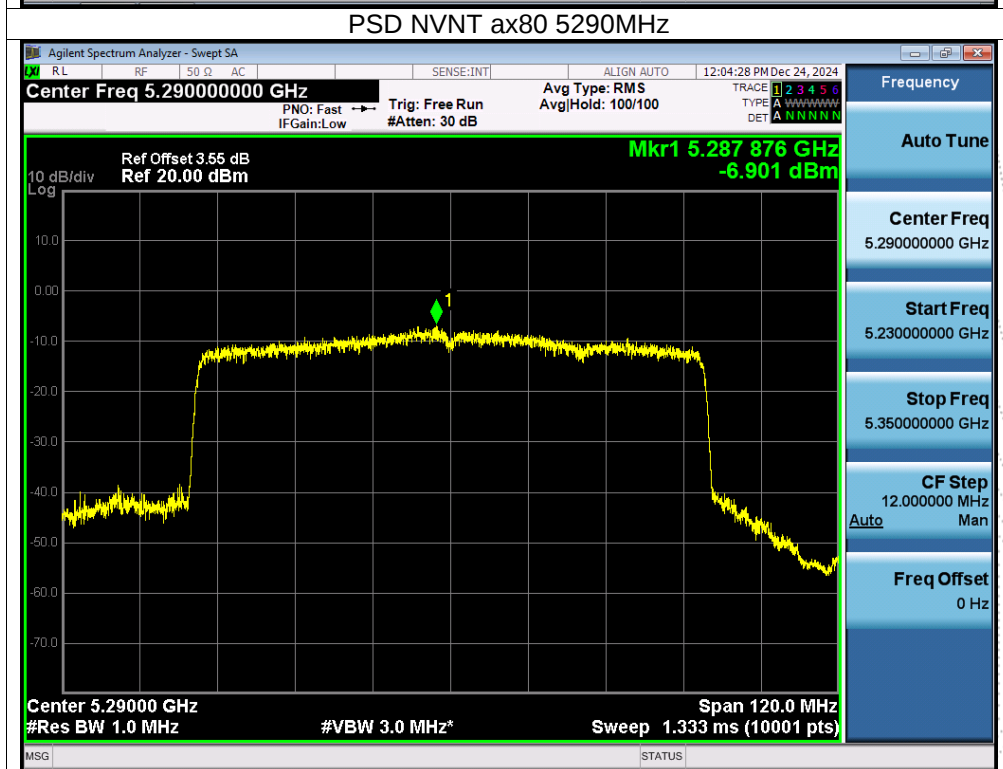
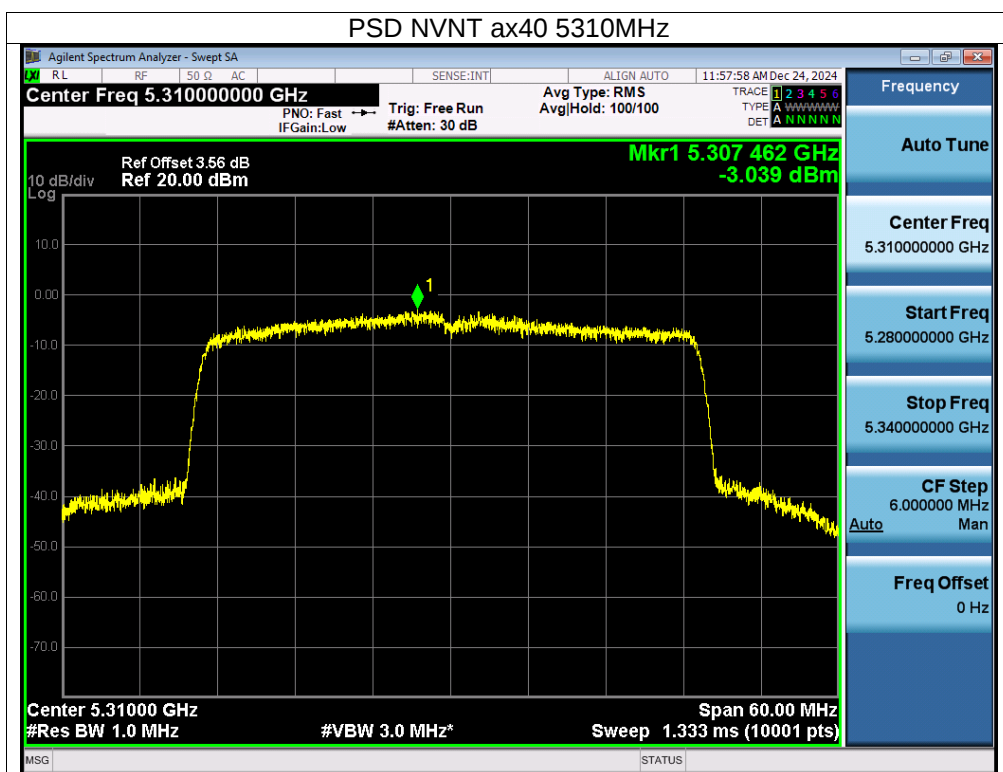




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V
Test Mode:	(5500-5700MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	4.28	11	Pass
NVNT	a	5580	4.81	11	Pass
NVNT	a	5700	4.97	11	Pass
NVNT	n20	5500	1.91	11	Pass
NVNT	n20	5580	2.5	11	Pass
NVNT	n20	5700	3.83	11	Pass
NVNT	n40	5510	-3.36	11	Pass
NVNT	n40	5550	-2.8	11	Pass
NVNT	n40	5670	-2.87	11	Pass
NVNT	ac20	5500	1.91	11	Pass
NVNT	ac20	5580	1.88	11	Pass
NVNT	ac20	5700	2.26	11	Pass
NVNT	ac40	5510	-3.35	11	Pass
NVNT	ac40	5550	-2.4	11	Pass
NVNT	ac40	5670	-3.48	11	Pass
NVNT	ac80	5530	-6.47	11	Pass
NVNT	ax20	5500	2.57	11	Pass
NVNT	ax20	5580	2.82	11	Pass
NVNT	ax20	5700	2.7	11	Pass
NVNT	ax40	5510	-2.65	11	Pass
NVNT	ax40	5550	-2.7	11	Pass
NVNT	ax40	5670	-2.96	11	Pass
NVNT	ax80	5530	-8.14	11	Pass


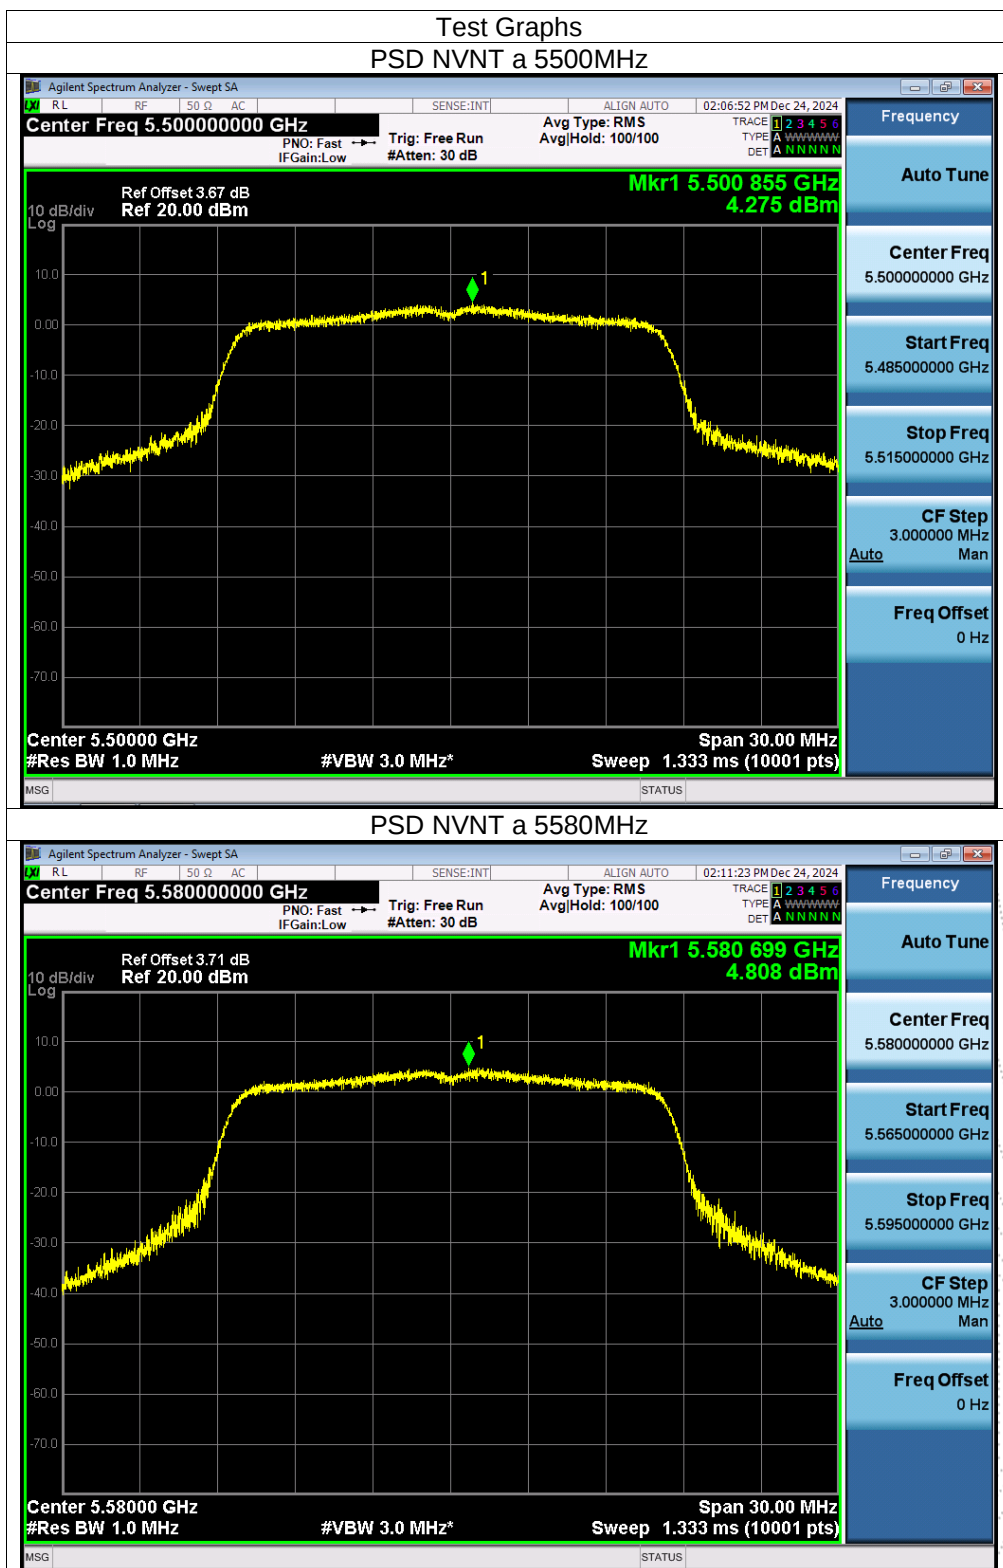


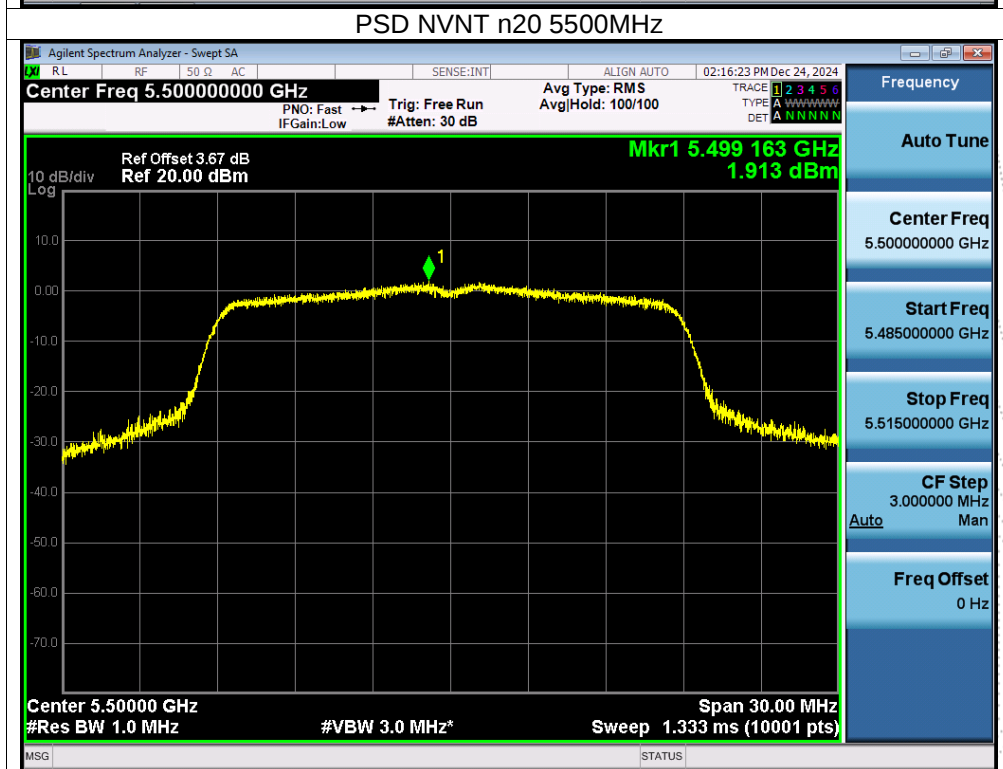
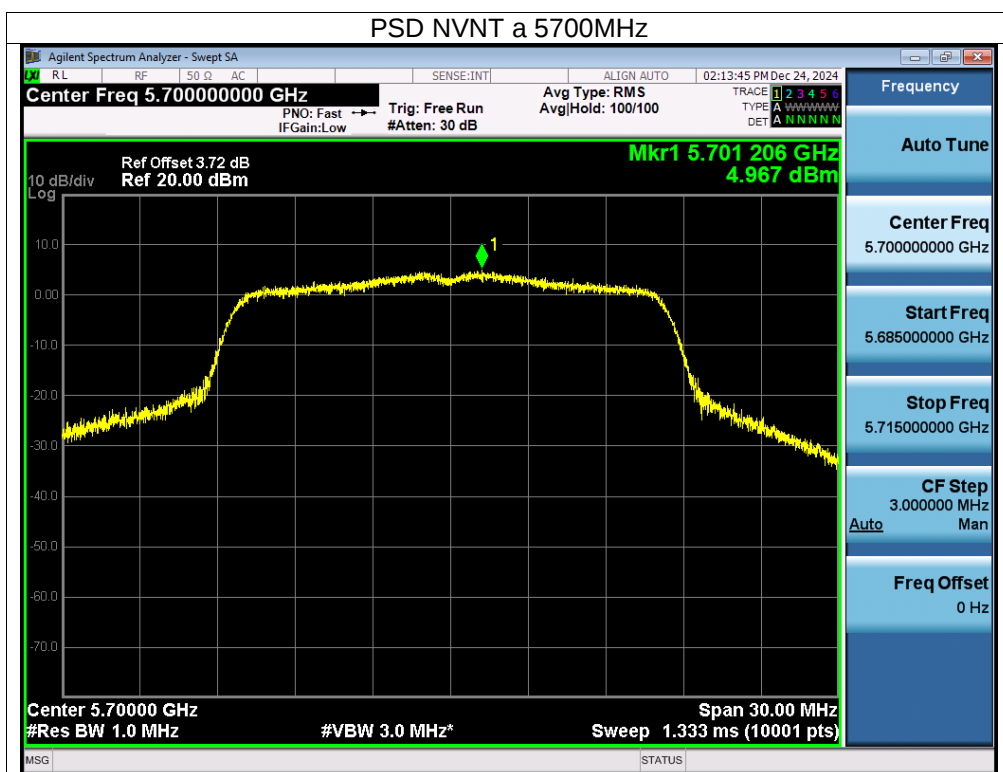


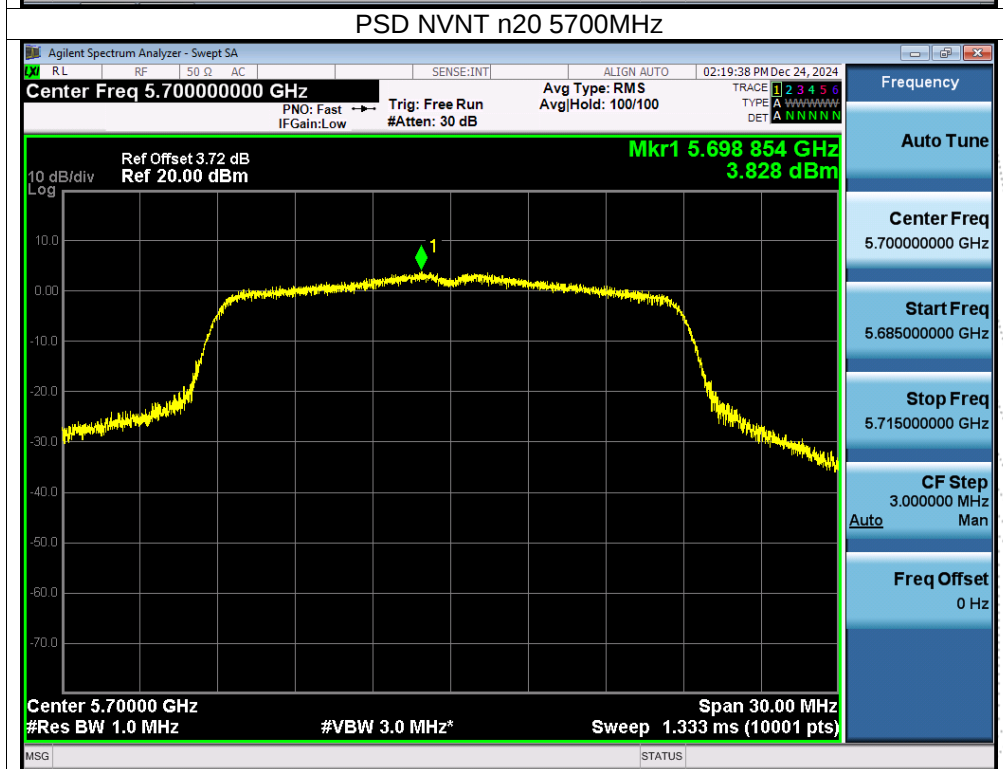
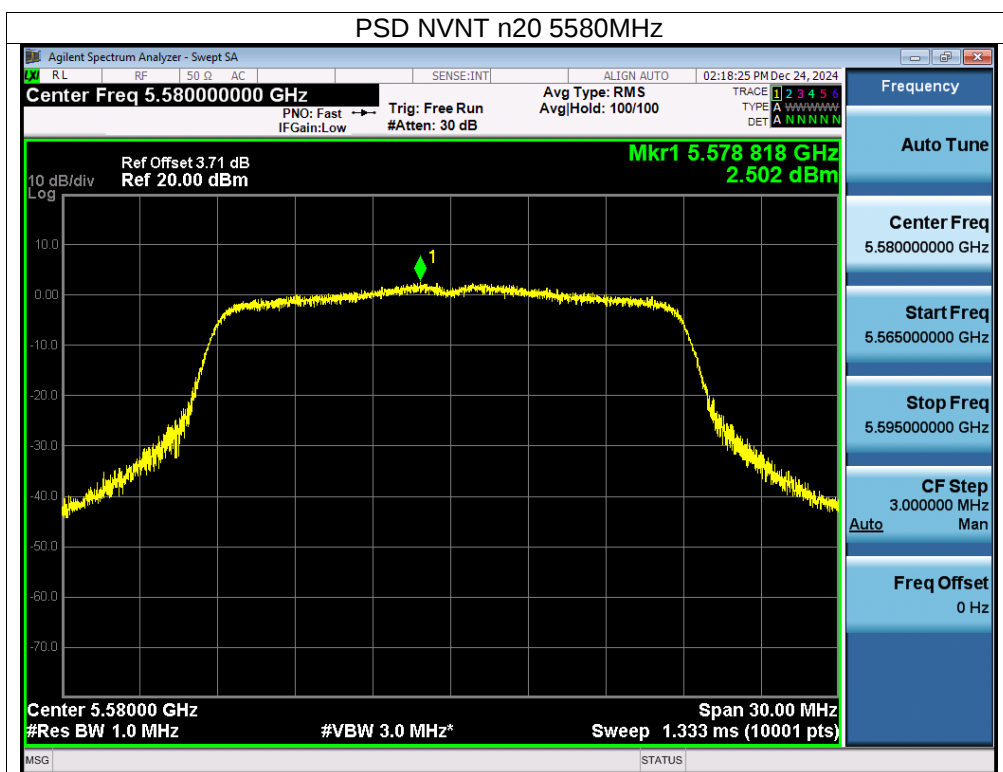


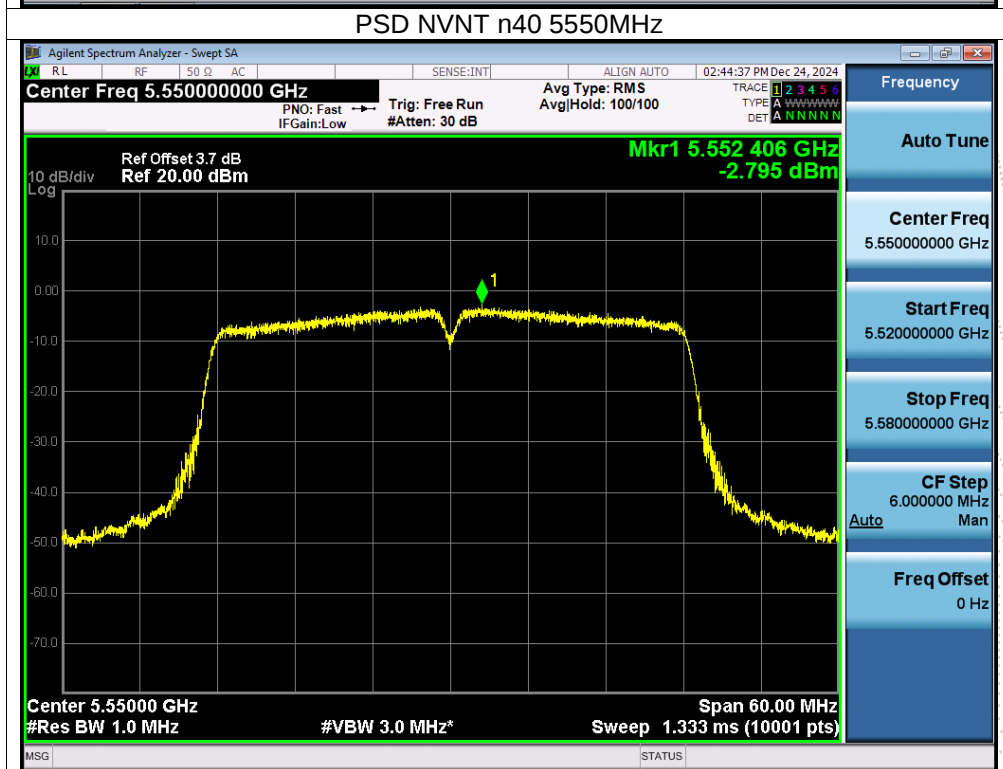
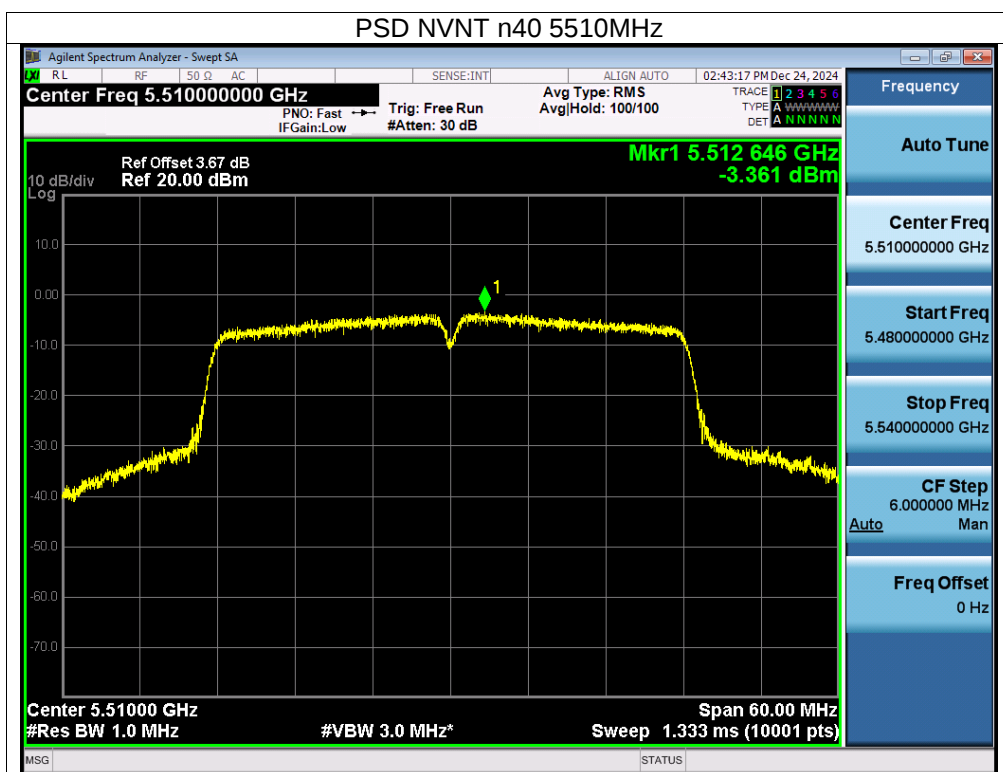


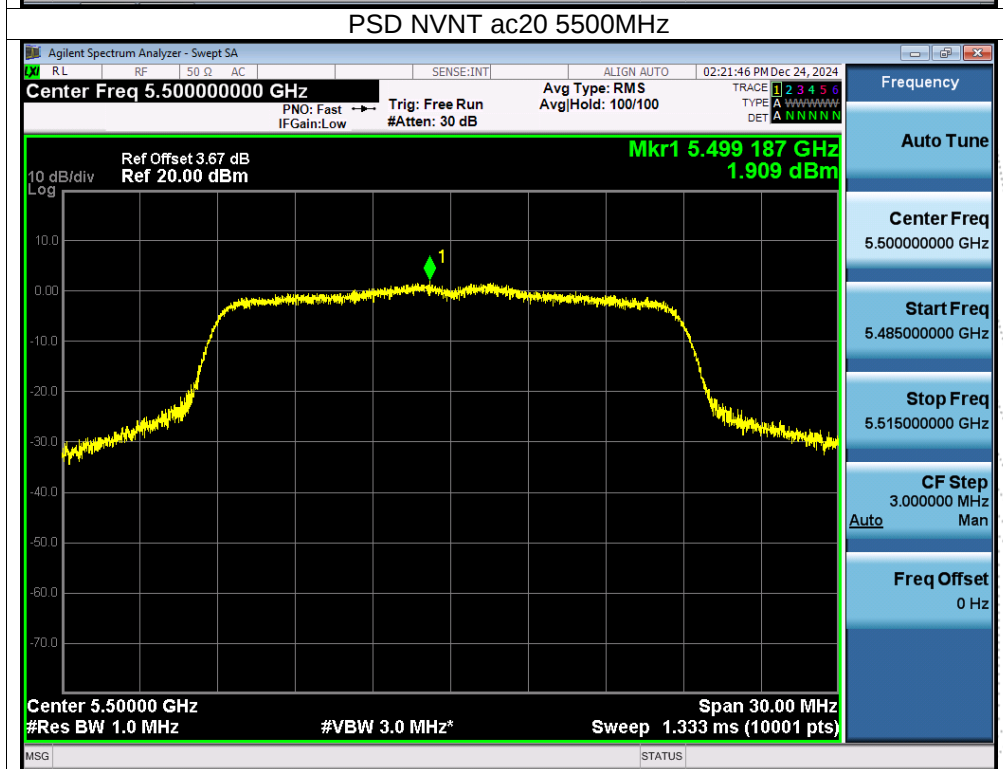
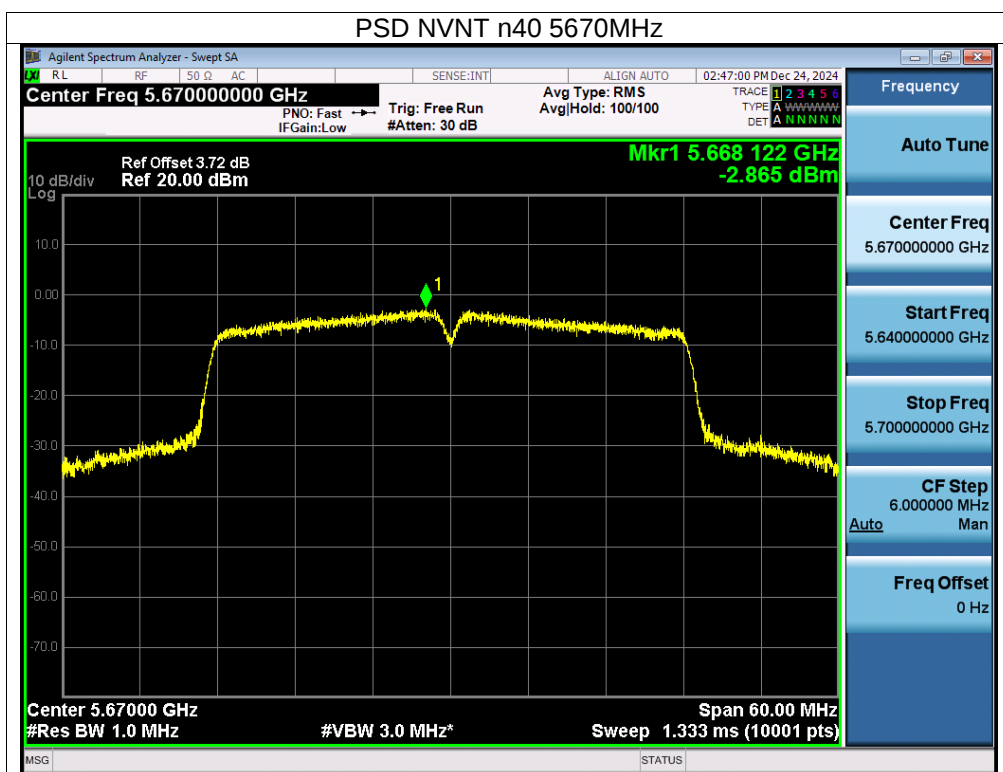


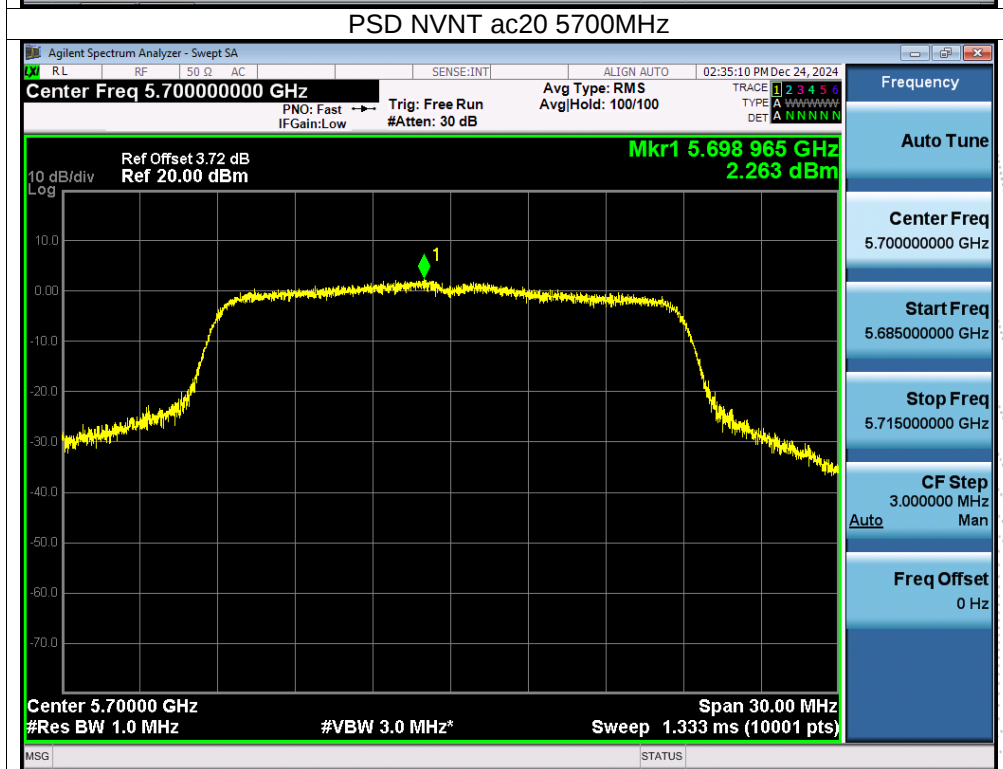
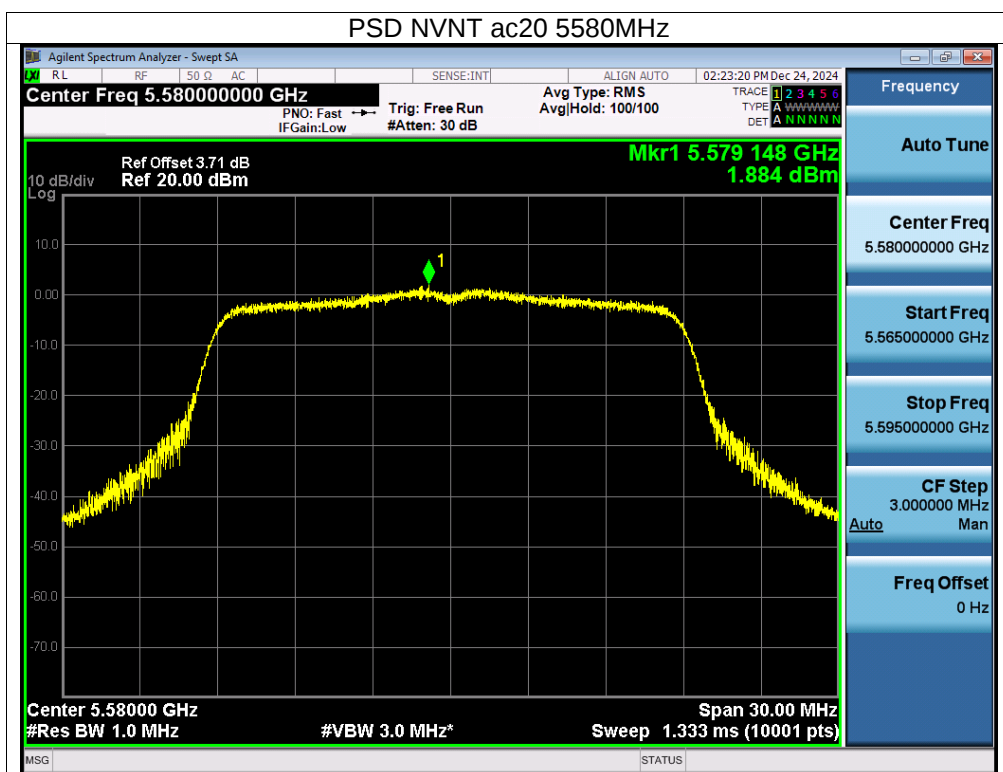


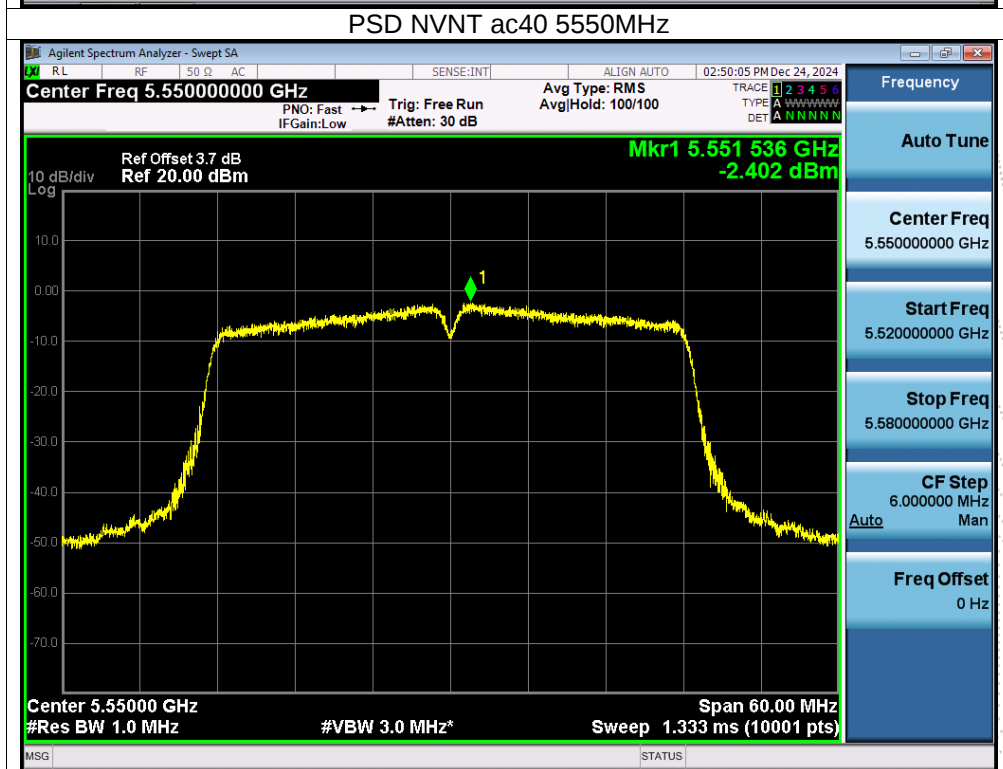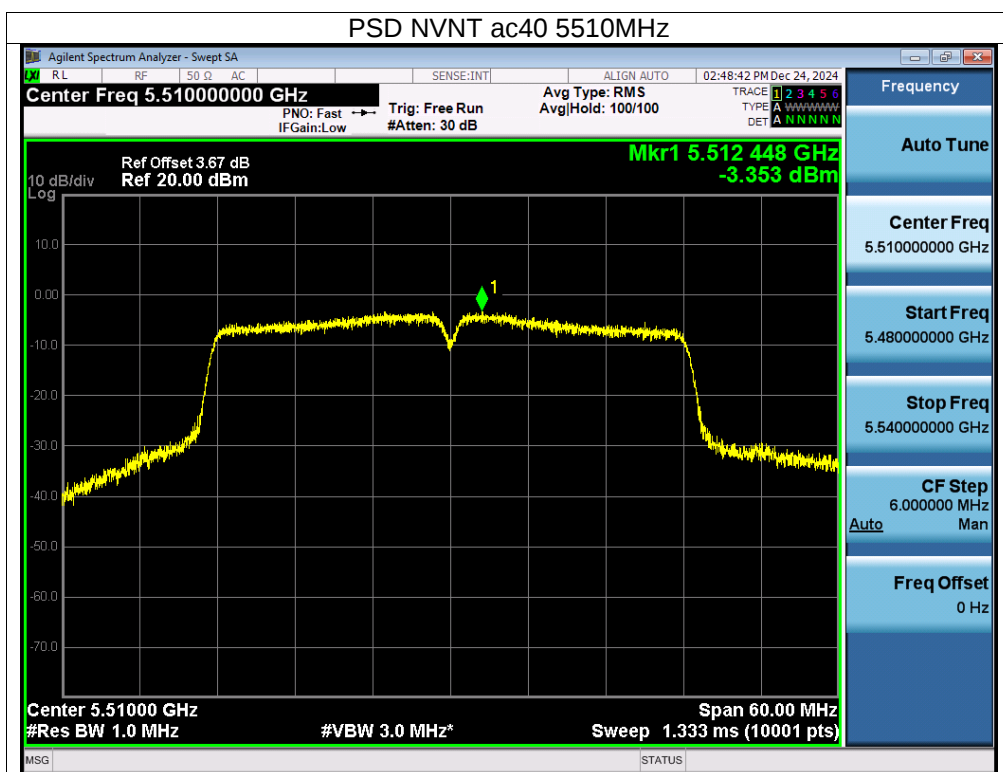


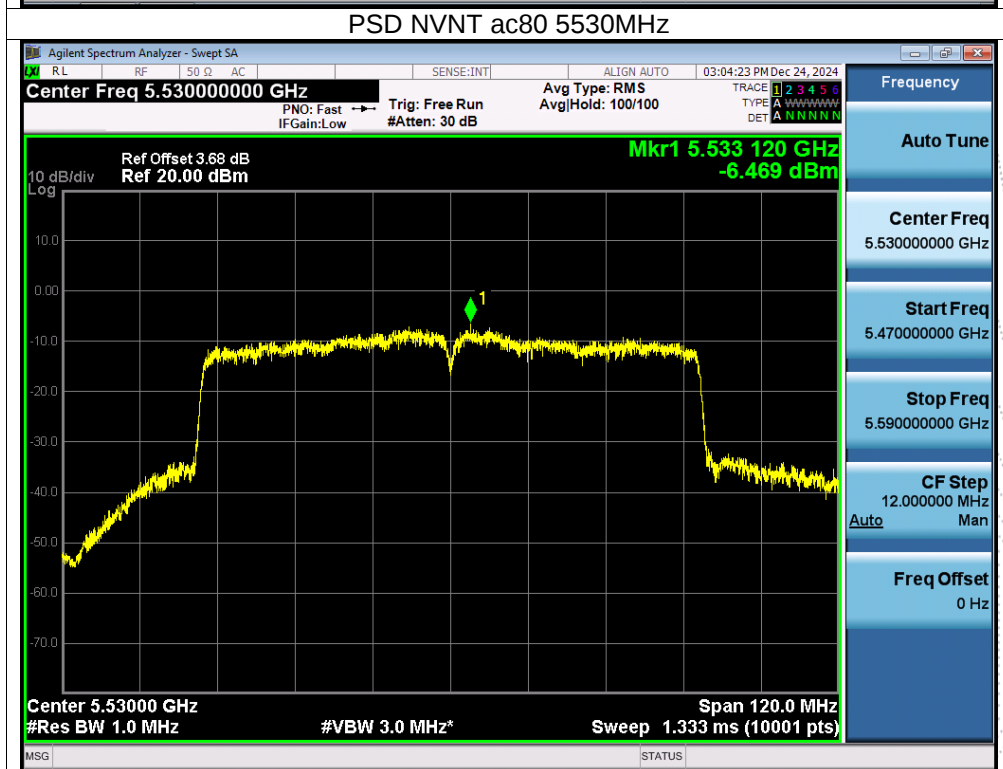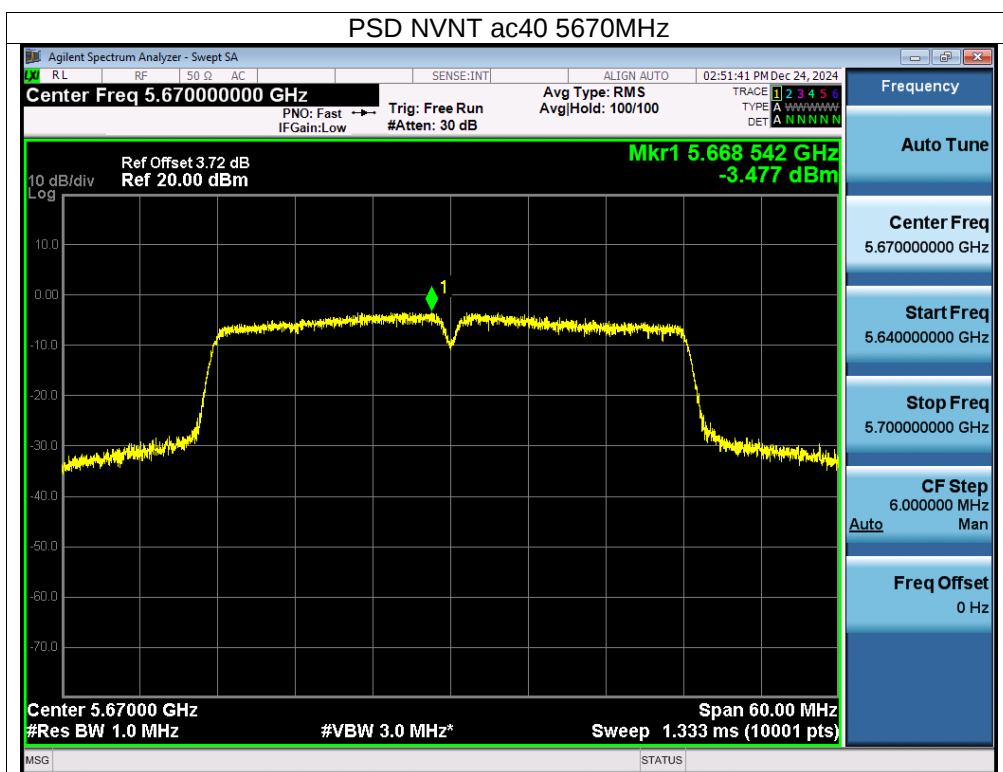

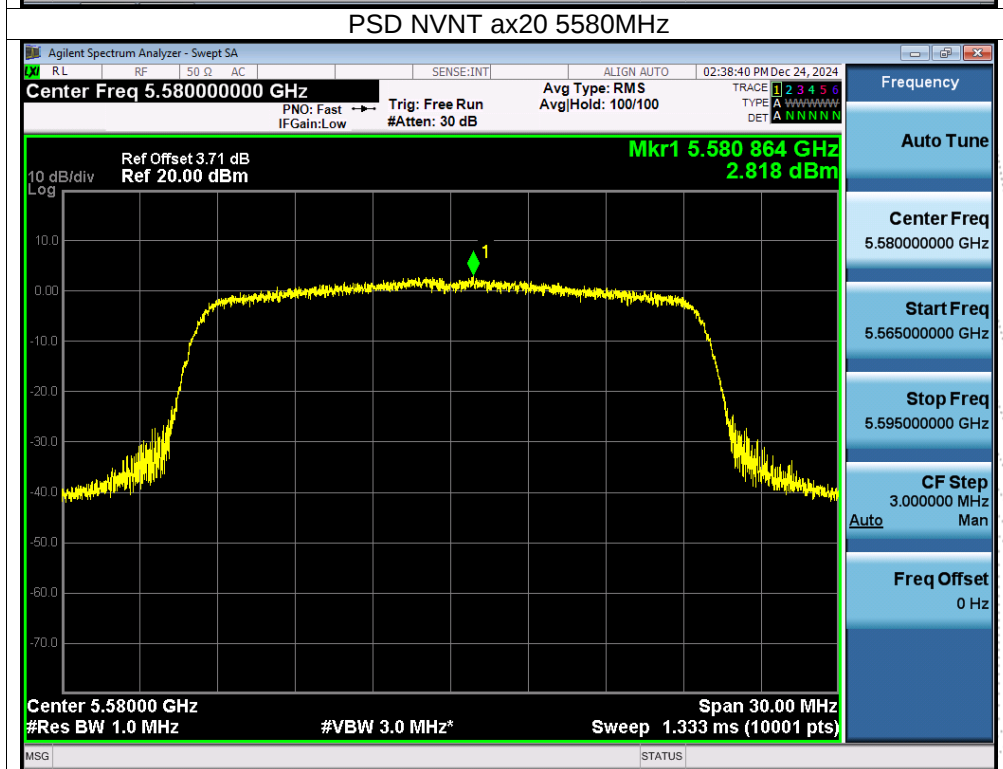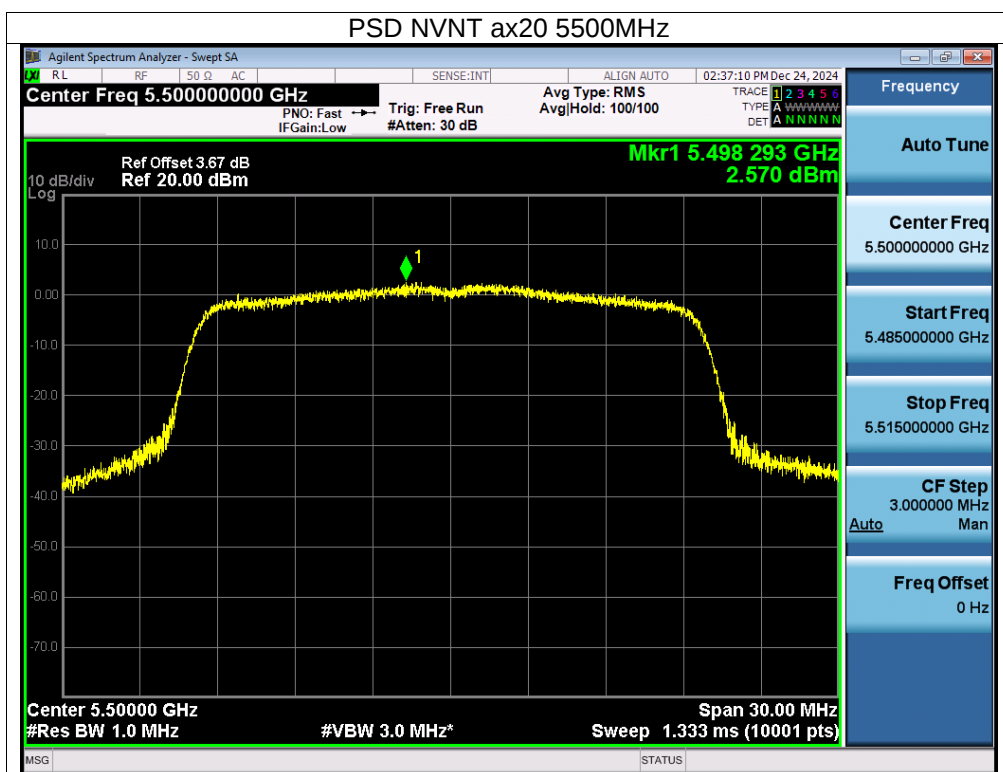

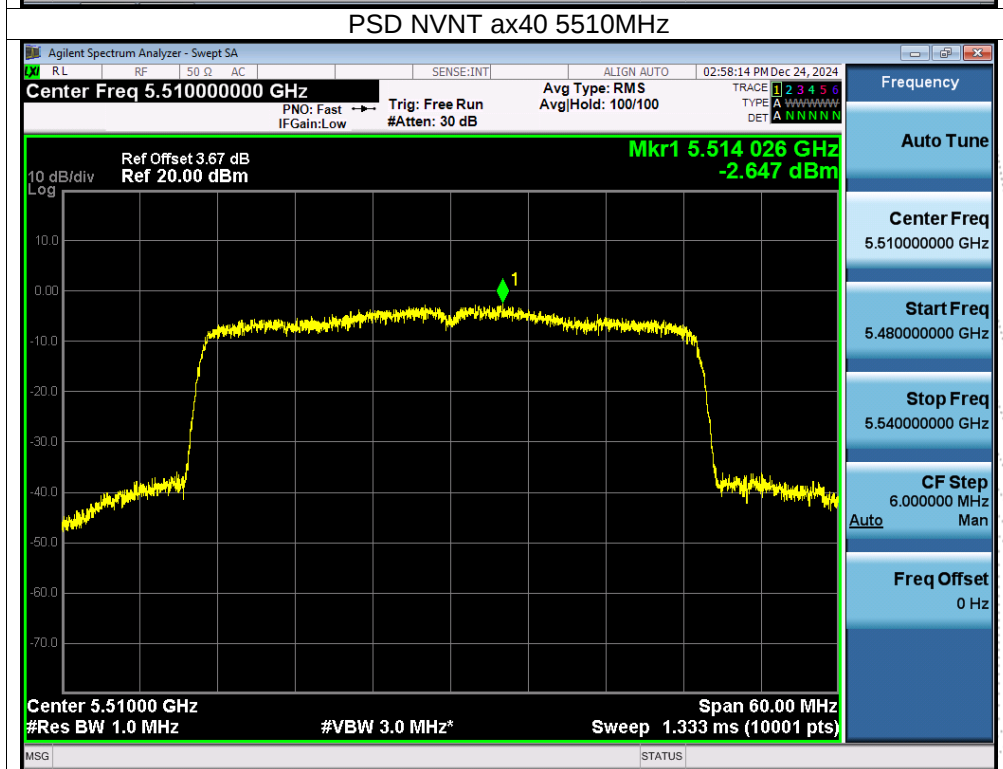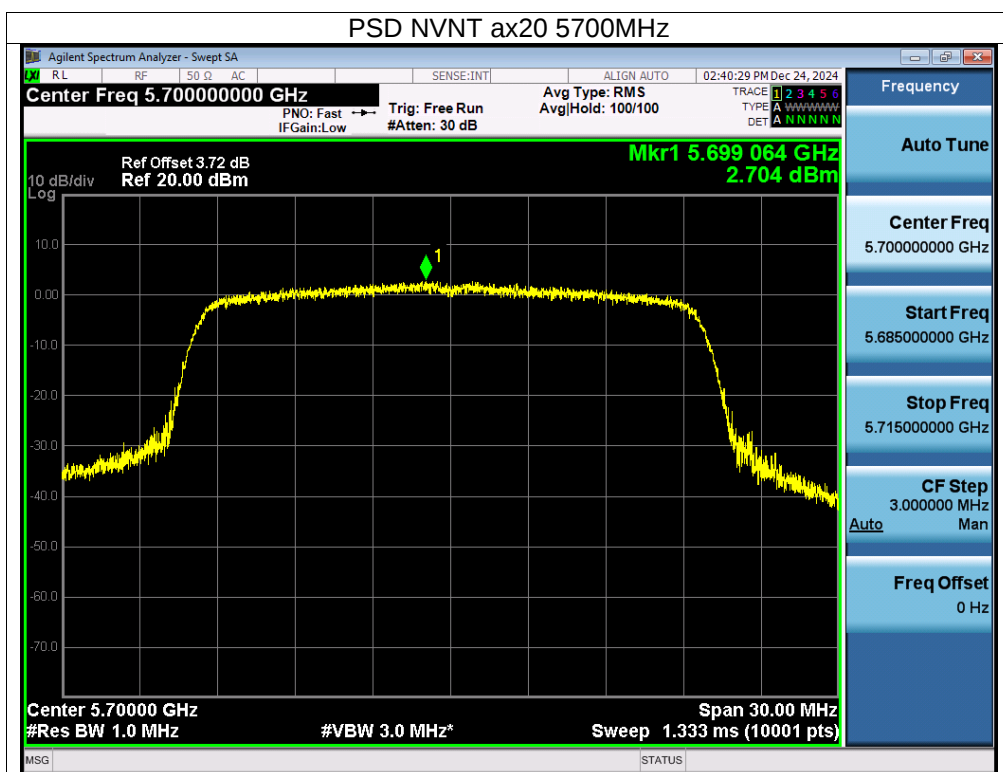

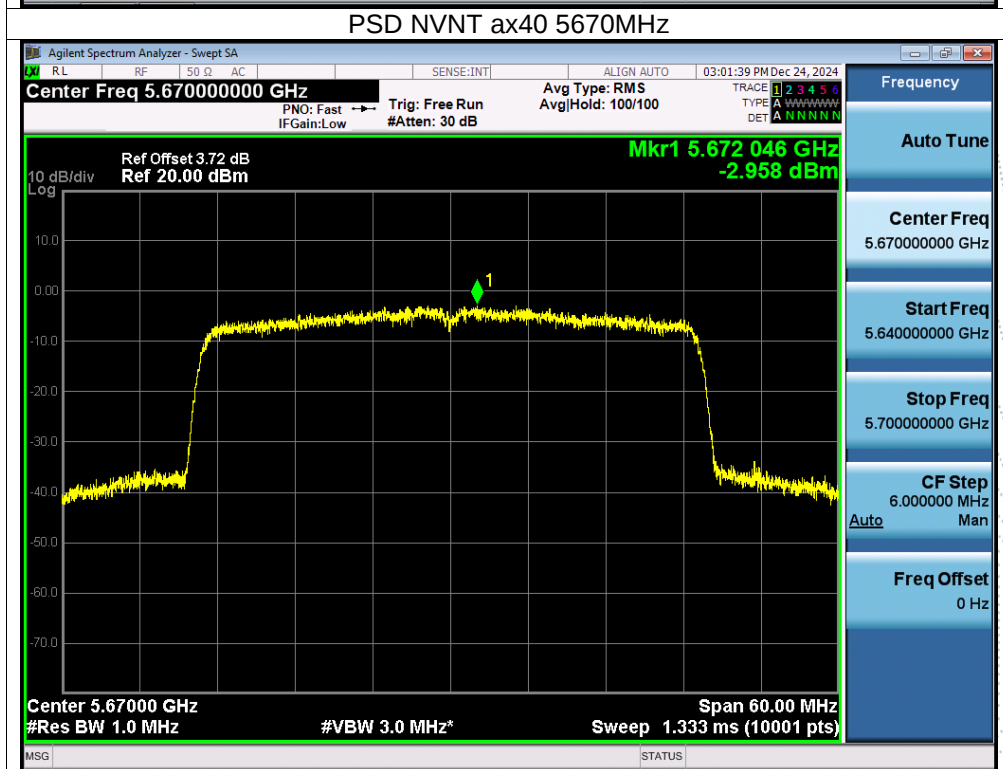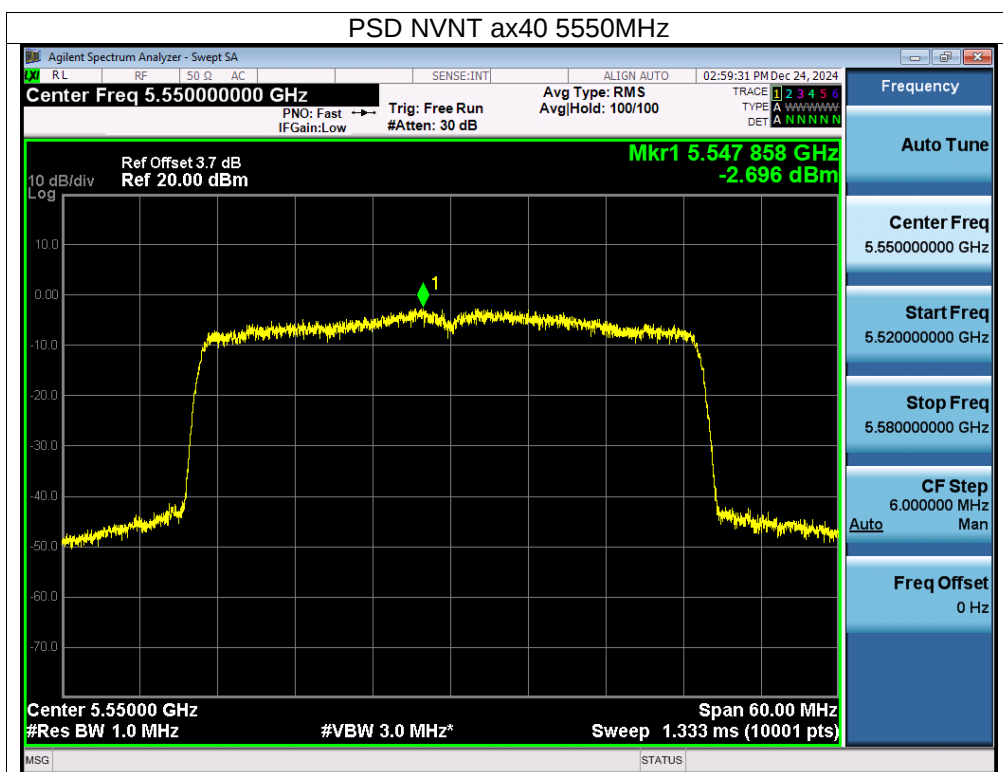

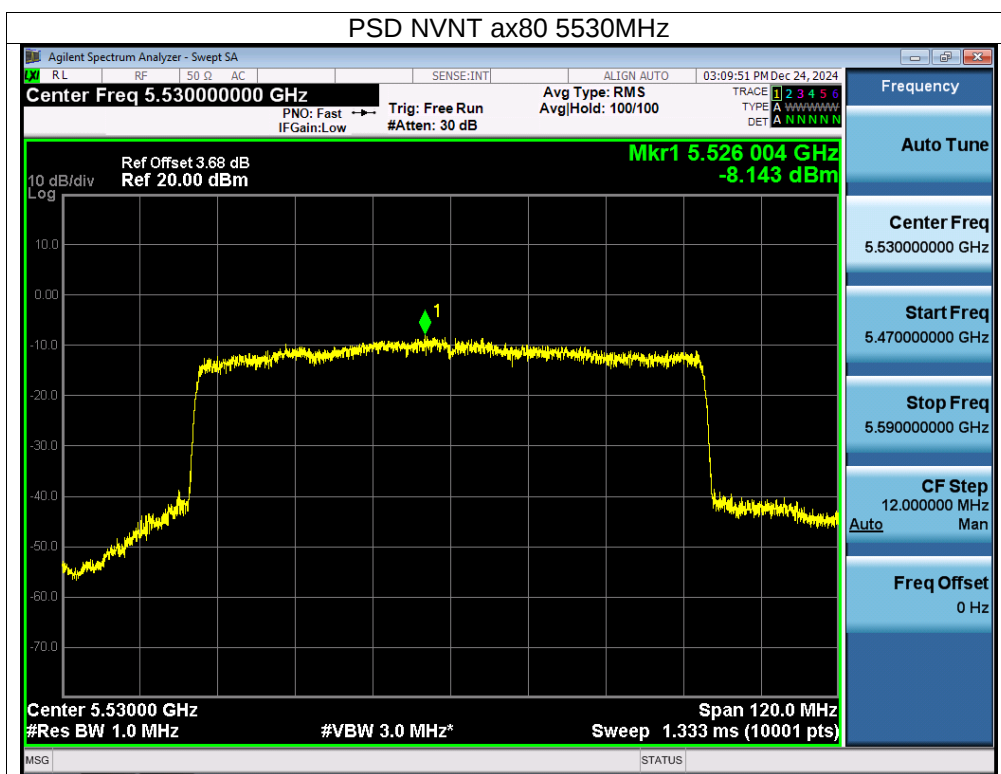

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V
Test Mode:	(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510KHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	1.99	1.904	30	Pass
NVNT	a	5785	1.66	1.574	30	Pass
NVNT	a	5825	1.05	0.964	30	Pass
NVNT	n20	5745	0.58	0.494	30	Pass
NVNT	n20	5785	0.67	0.584	30	Pass
NVNT	n20	5825	-0.32	-0.406	30	Pass
NVNT	n40	5755	-5.33	-5.416	30	Pass
NVNT	n40	5795	-5.4	-5.486	30	Pass
NVNT	ac20	5745	0.37	0.284	30	Pass
NVNT	ac20	5785	1.01	0.924	30	Pass
NVNT	ac20	5825	-0.13	-0.216	30	Pass
NVNT	ac40	5755	-5.2	-5.286	30	Pass
NVNT	ac40	5795	-6.02	-6.106	30	Pass
NVNT	ac80	5775	-10.25	-10.336	30	Pass
NVNT	ax20	5745	0.91	0.824	30	Pass
NVNT	ax20	5785	0.72	0.634	30	Pass
NVNT	ax20	5825	-0.27	-0.356	30	Pass
NVNT	ax40	5755	-5.14	-5.226	30	Pass
NVNT	ax40	5795	-5.55	-5.636	30	Pass
NVNT	ax80	5775	-11.25	-11.336	30	Pass

Note: Correction Factor = $10\log(500\text{KHz}/\text{RBW in measurement}) = -0.086$

