



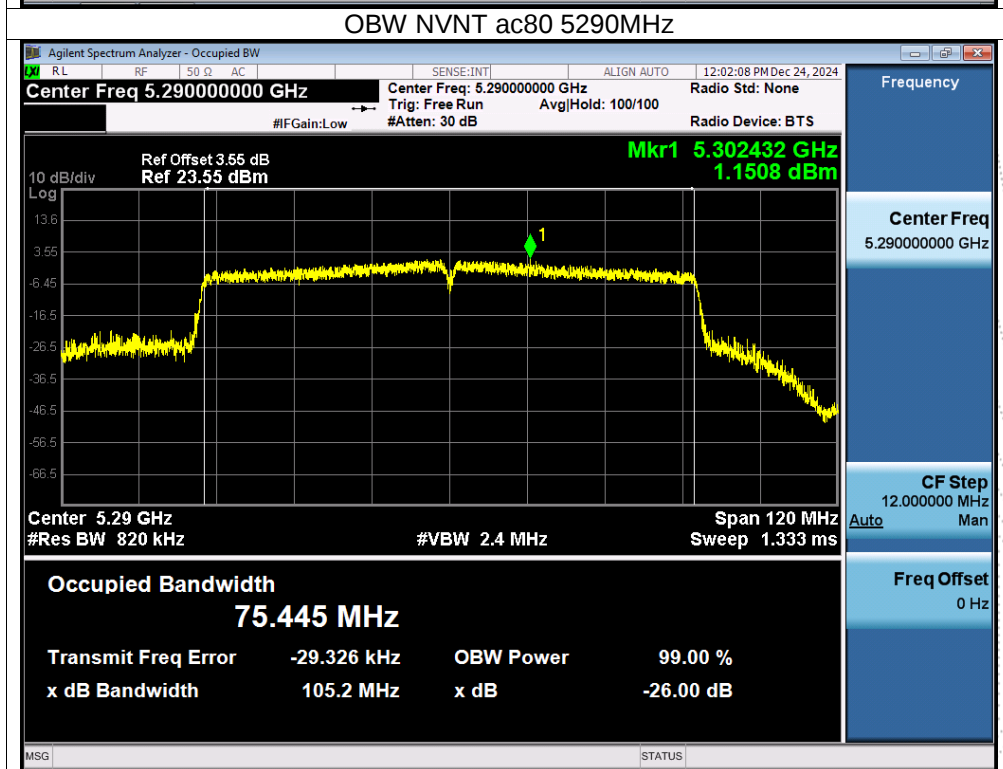
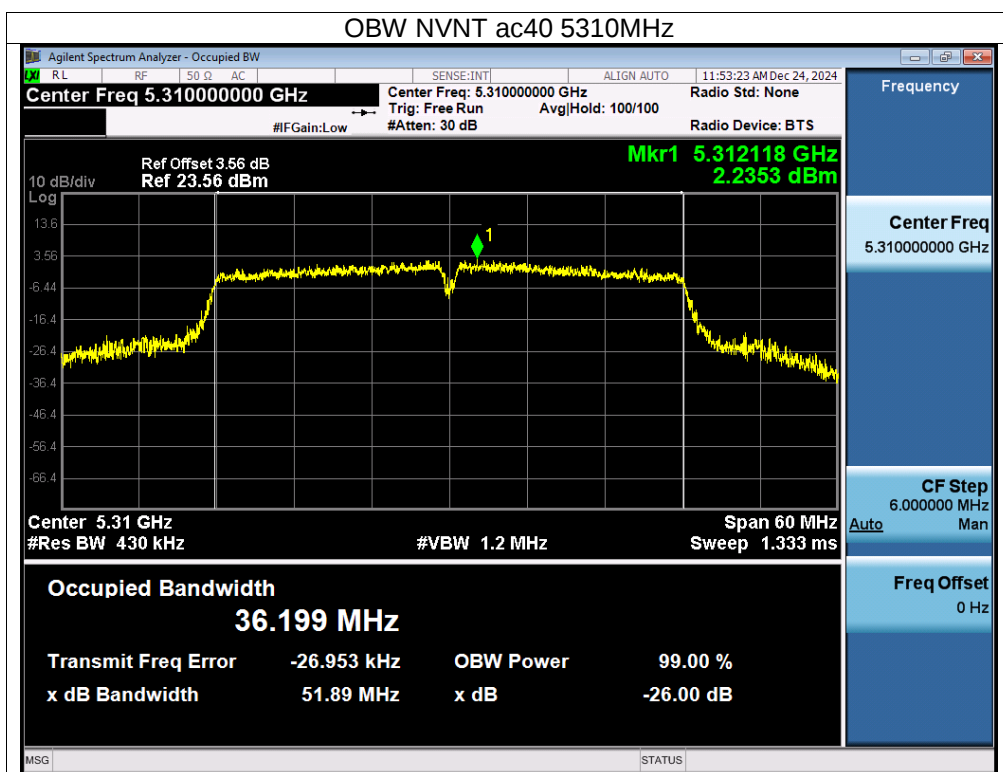
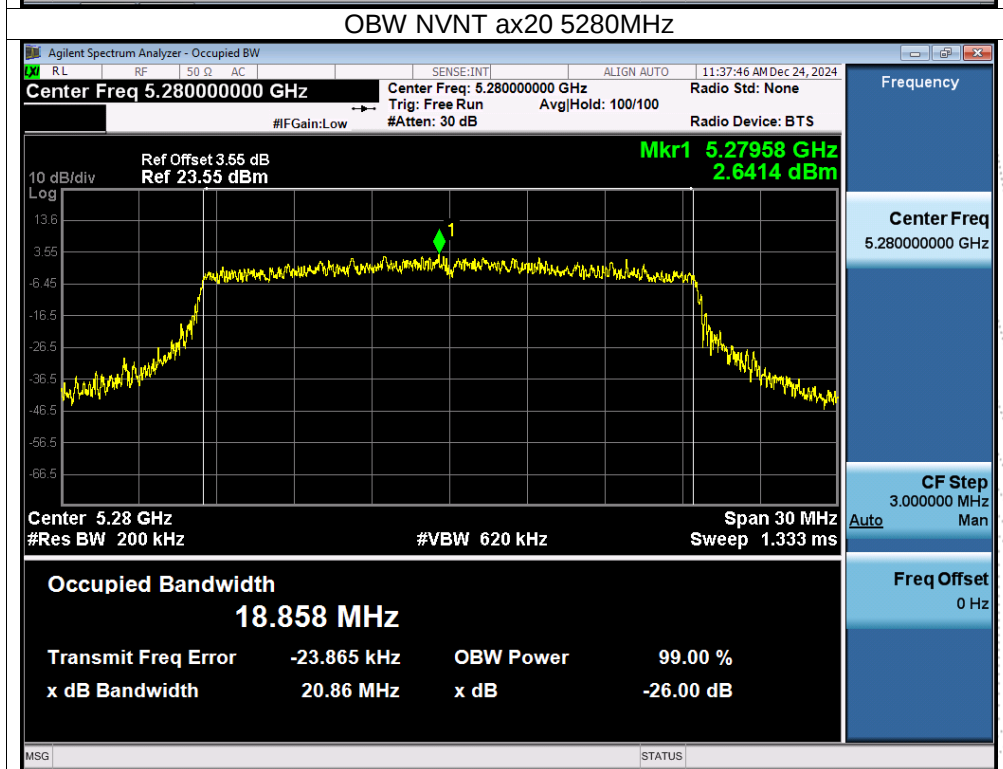
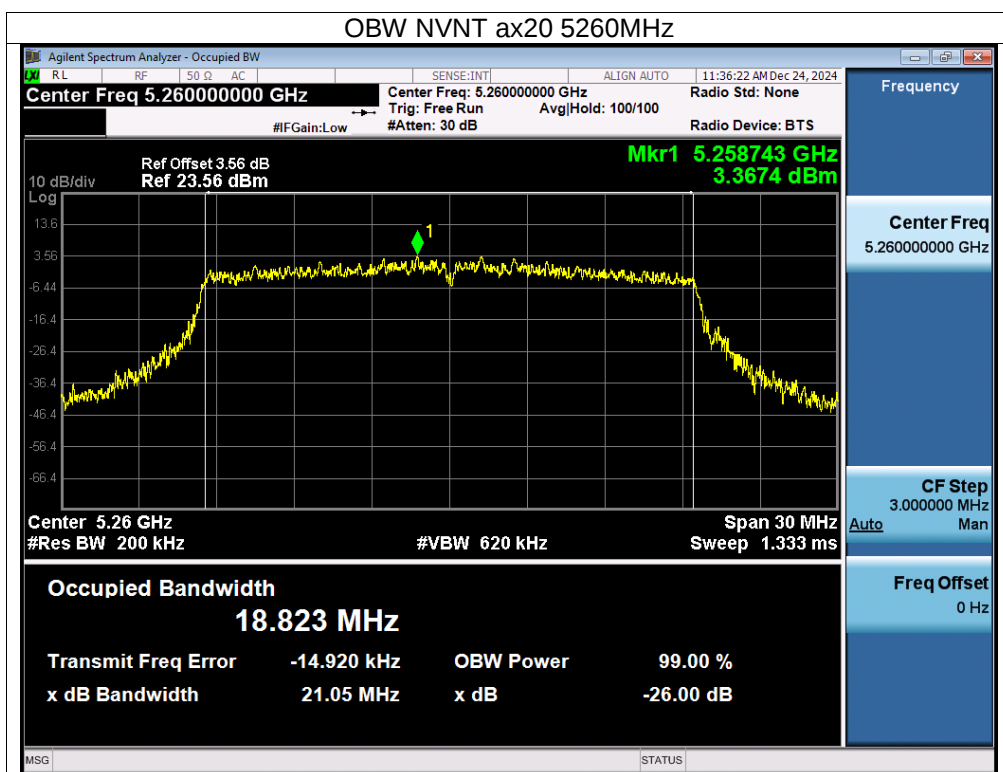


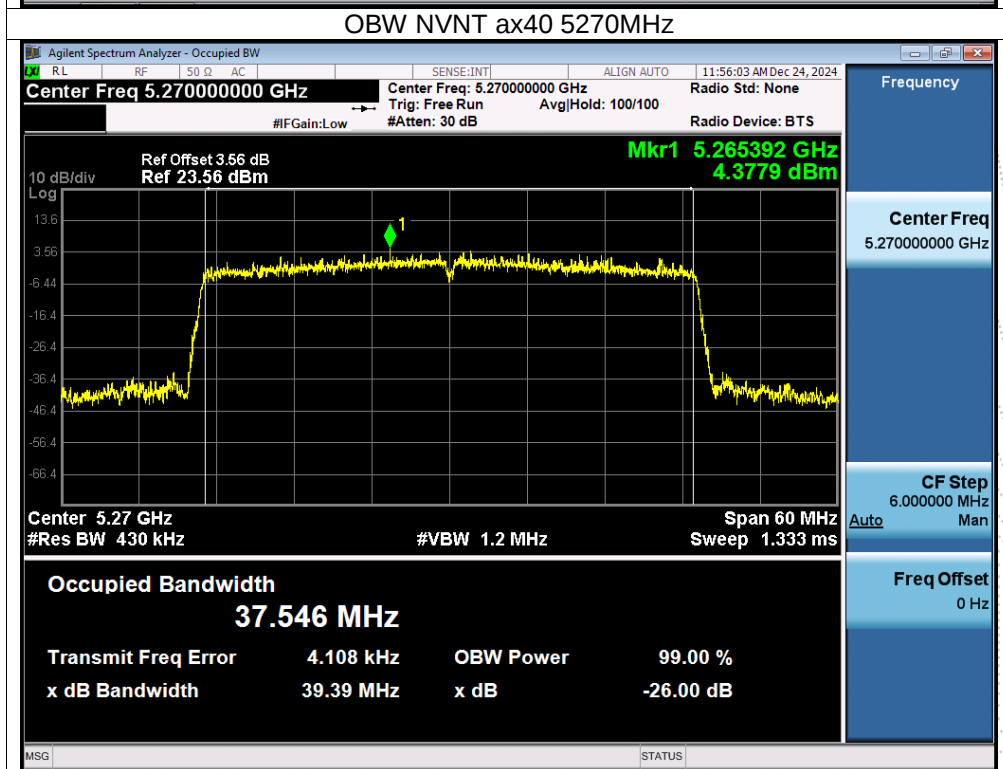

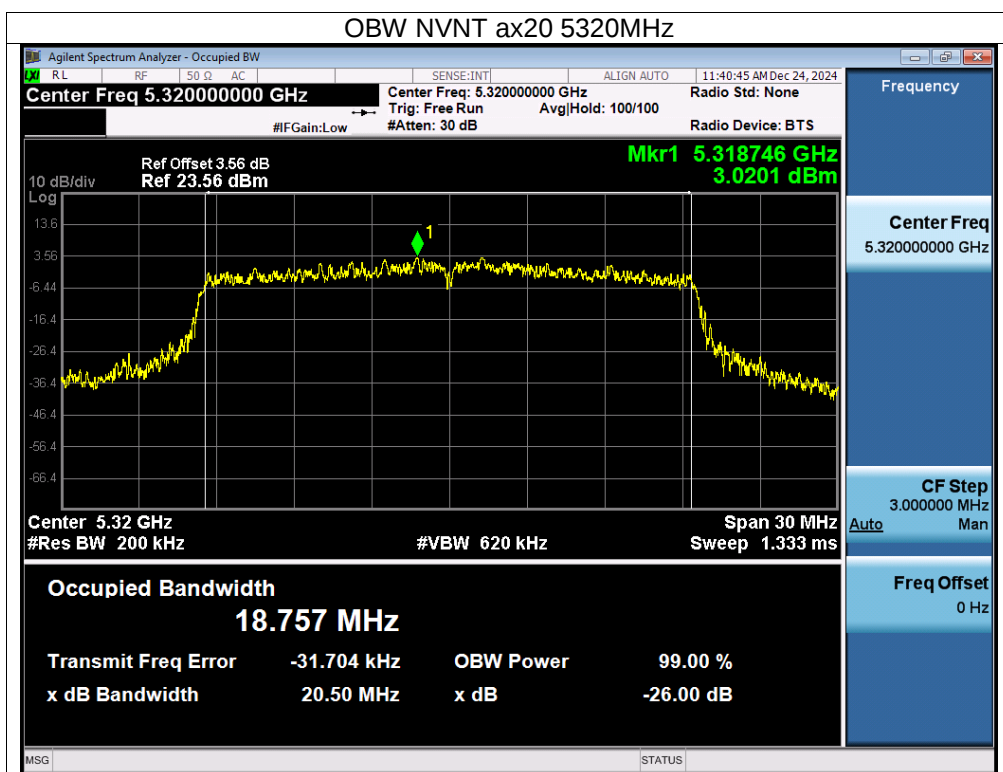



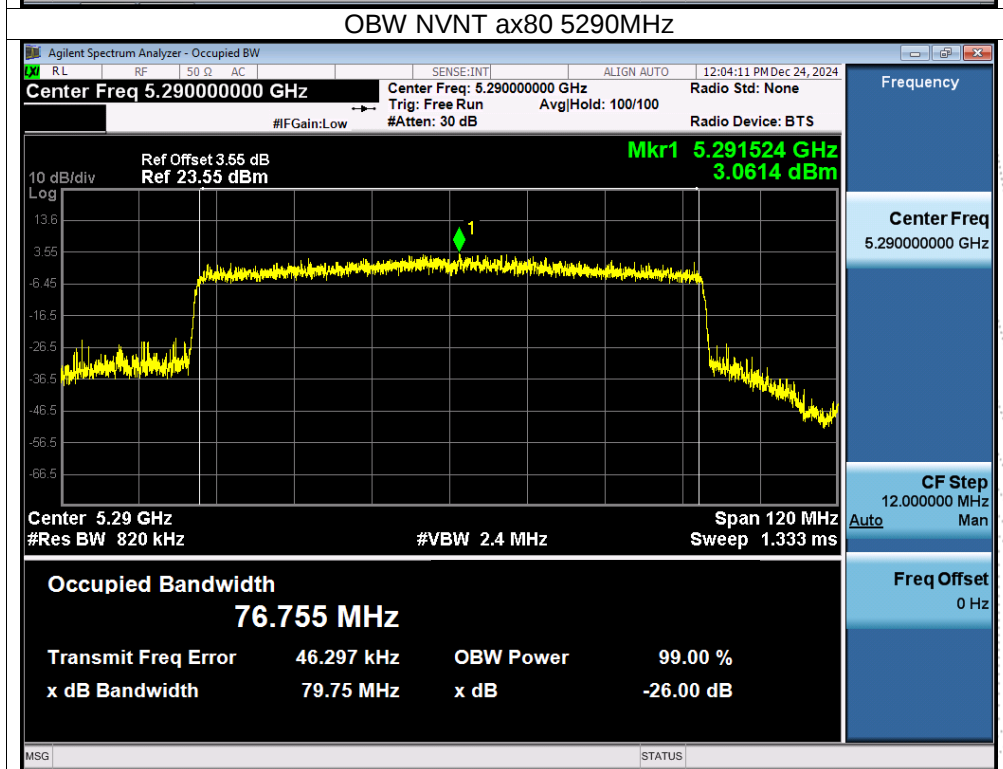



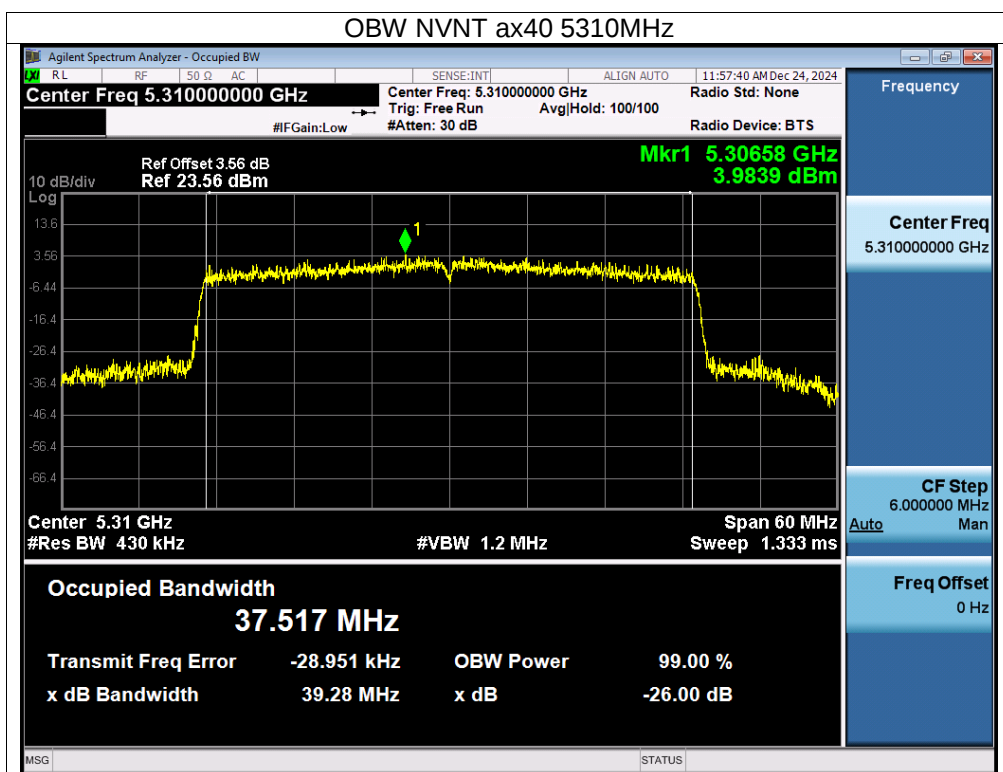




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V
Test Mode:	(5500-5700MHz)		



Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-26dB bandwidth (MHz)	Result
NVNT	a	5500	16.585	26.393	Pass
NVNT	a	5580	16.413	20.174	Pass
NVNT	a	5700	16.546	24.05	Pass
NVNT	n20	5500	17.667	24.509	Pass
NVNT	n20	5580	17.578	20.518	Pass
NVNT	n20	5700	17.683	23.944	Pass
NVNT	n40	5510	36.208	52.447	Pass
NVNT	n40	5550	36.032	39.89	Pass
NVNT	n40	5670	36.273	55.127	Pass
NVNT	ac20	5500	17.693	25.318	Pass
NVNT	ac20	5580	17.576	20.722	Pass
NVNT	ac20	5700	17.683	25.146	Pass
NVNT	ac40	5510	36.25	51.423	Pass
NVNT	ac40	5550	36.013	40.651	Pass
NVNT	ac40	5670	36.262	59.024	Pass
NVNT	ac80	5530	75.411	100.309	Pass
NVNT	ax20	5500	18.816	21.221	Pass
NVNT	ax20	5580	18.836	20.591	Pass
NVNT	ax20	5700	18.861	21.749	Pass
NVNT	ax40	5510	37.599	39.212	Pass
NVNT	ax40	5550	37.51	39.317	Pass
NVNT	ax40	5670	37.527	39.29	Pass
NVNT	ax80	5530	76.842	79.634	Pass


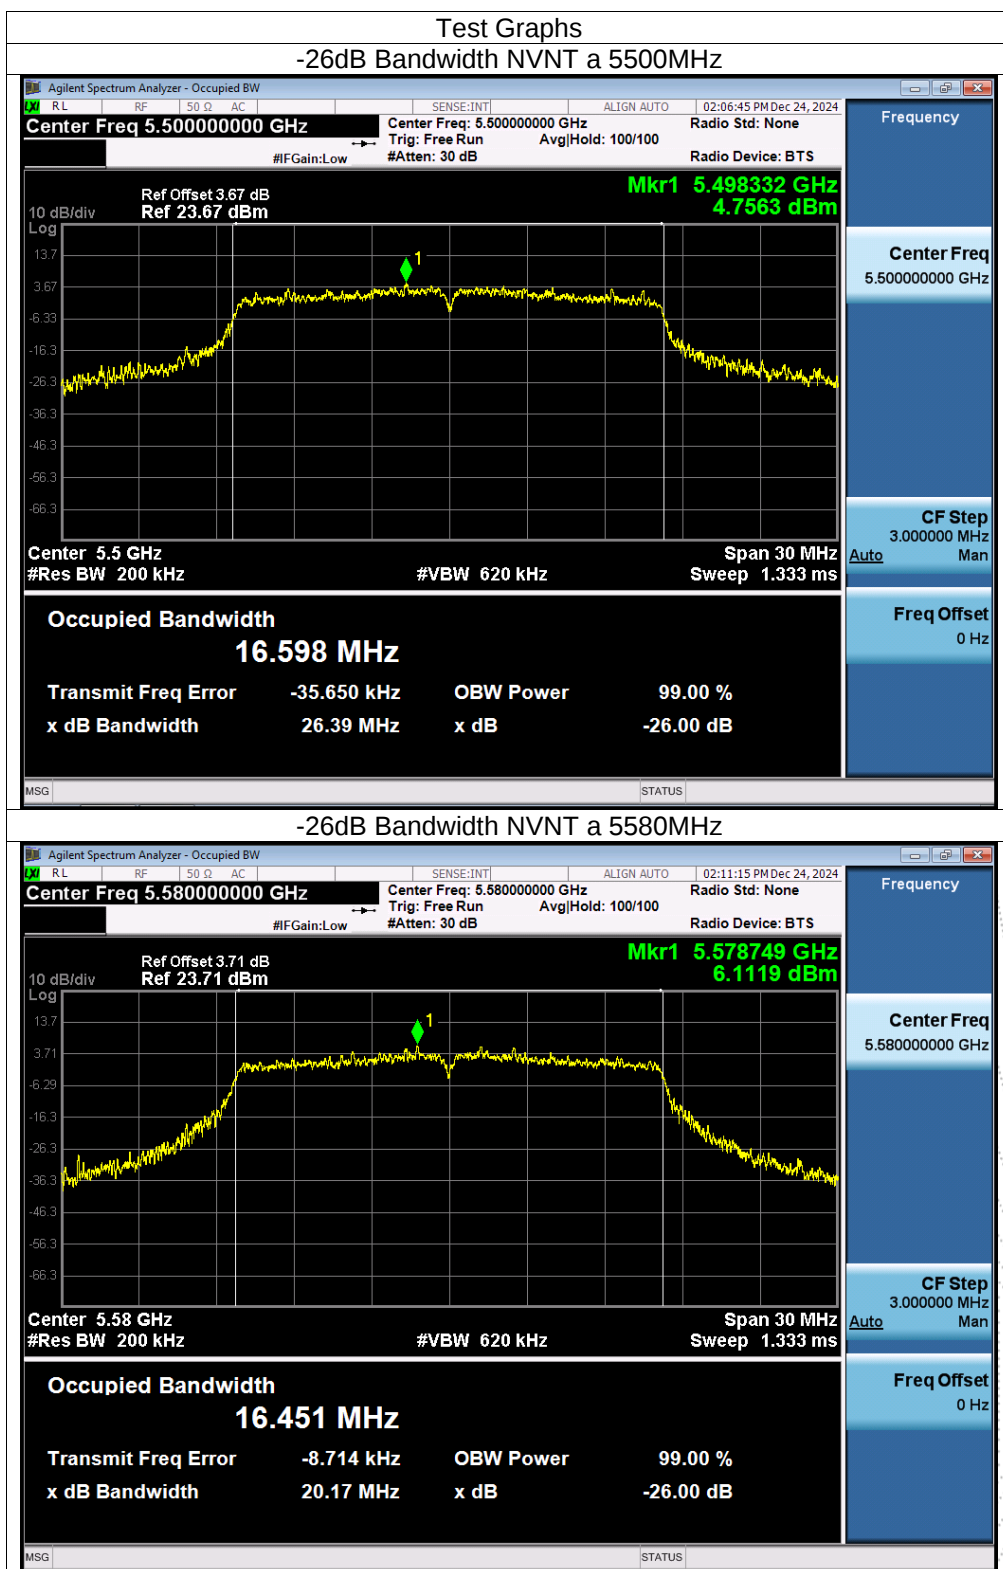


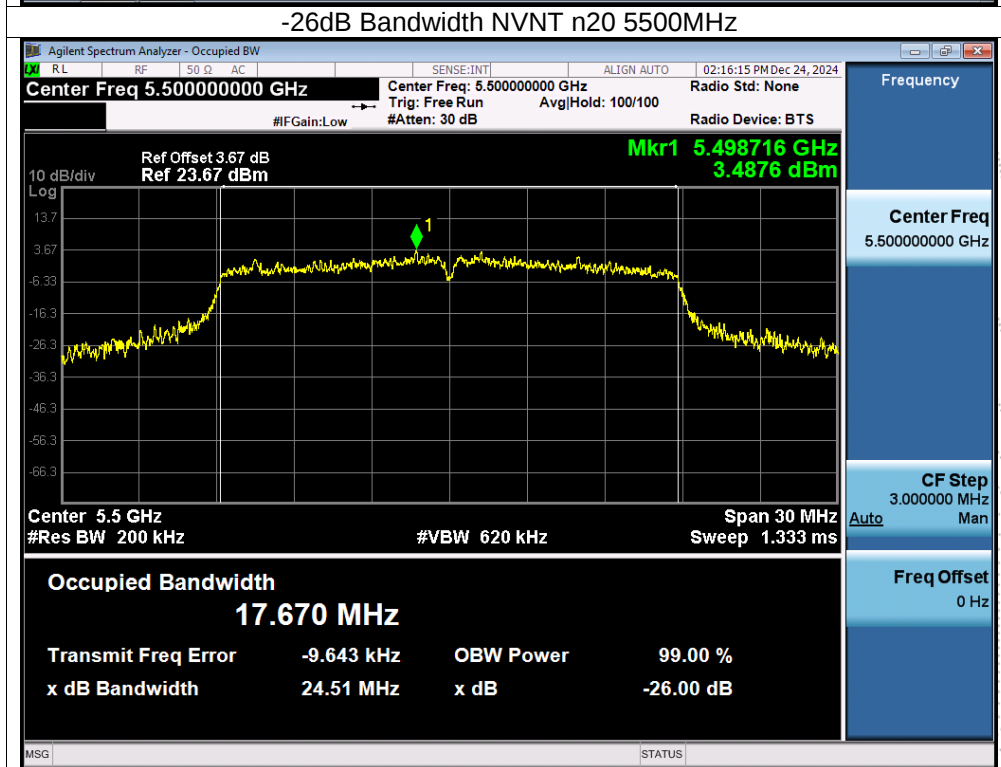
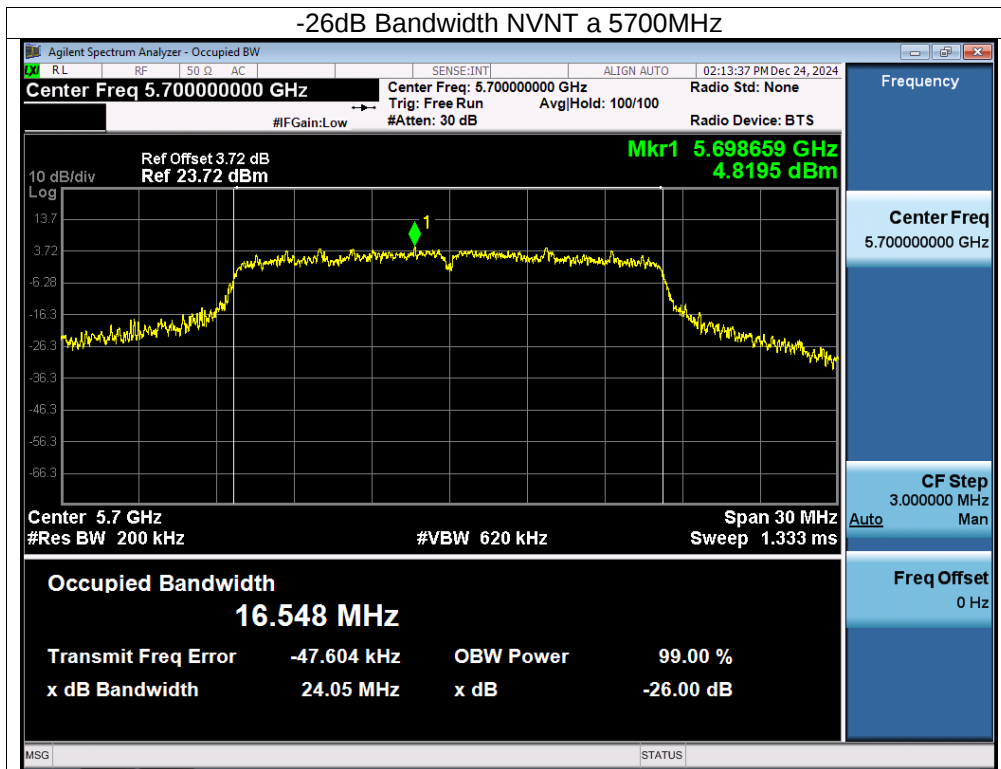


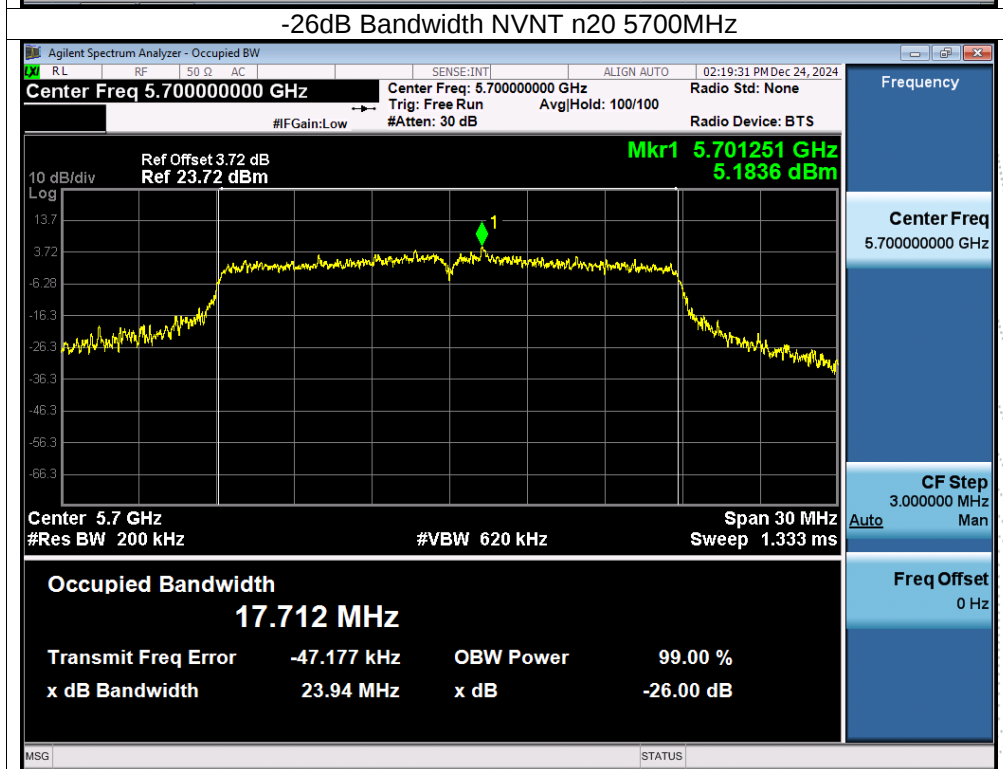
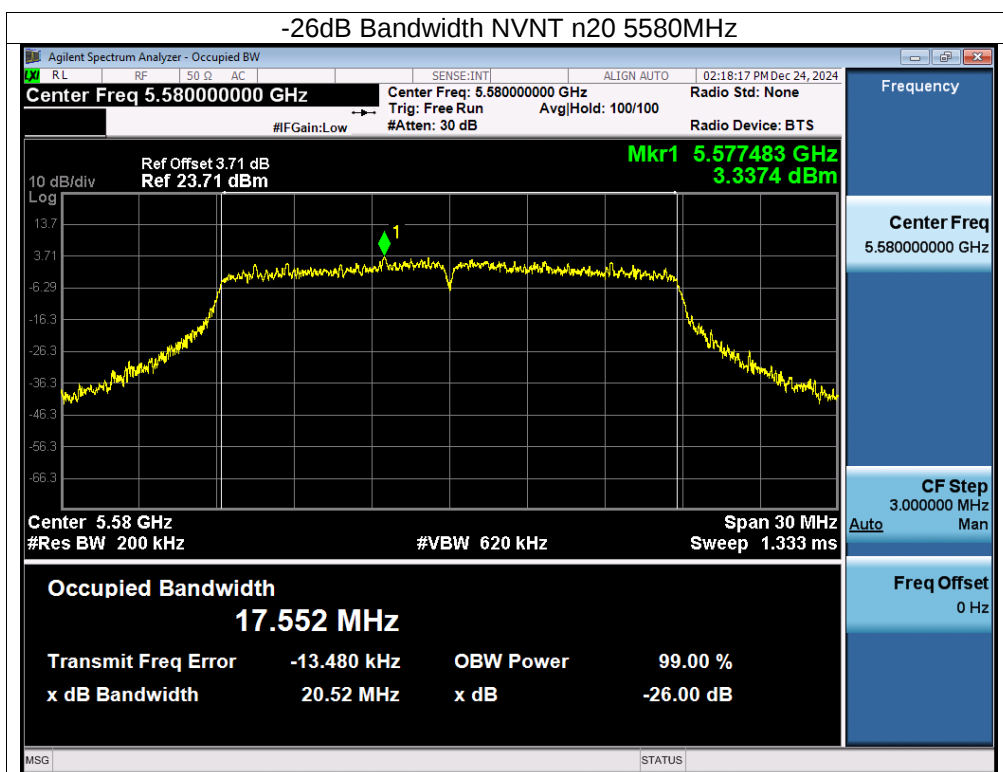


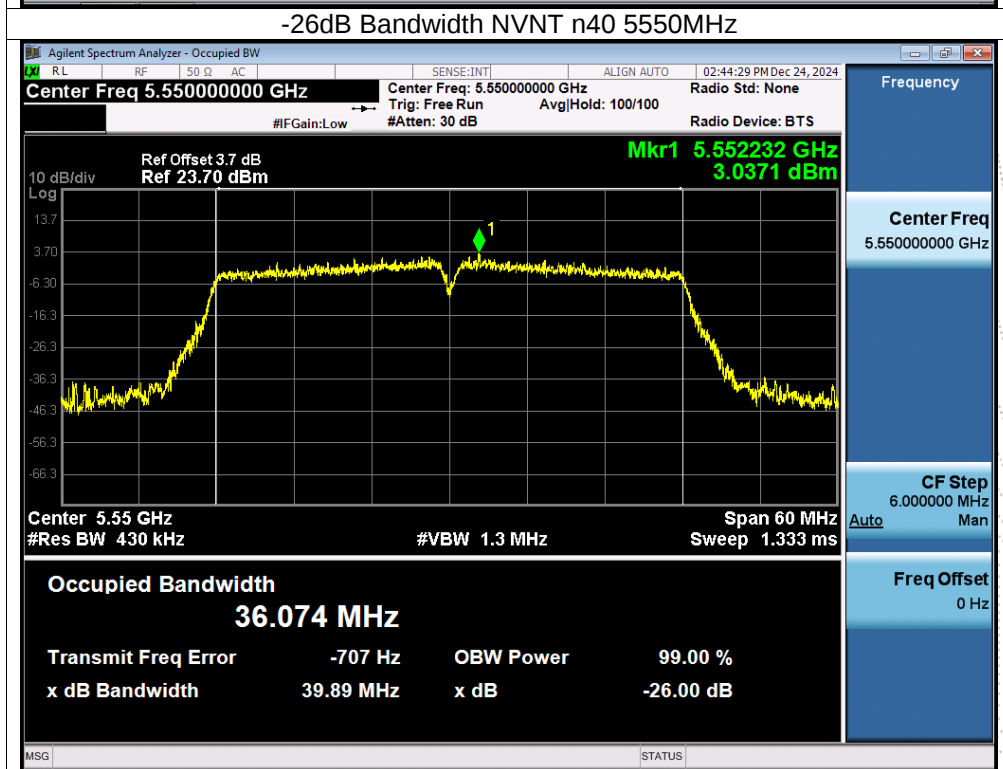
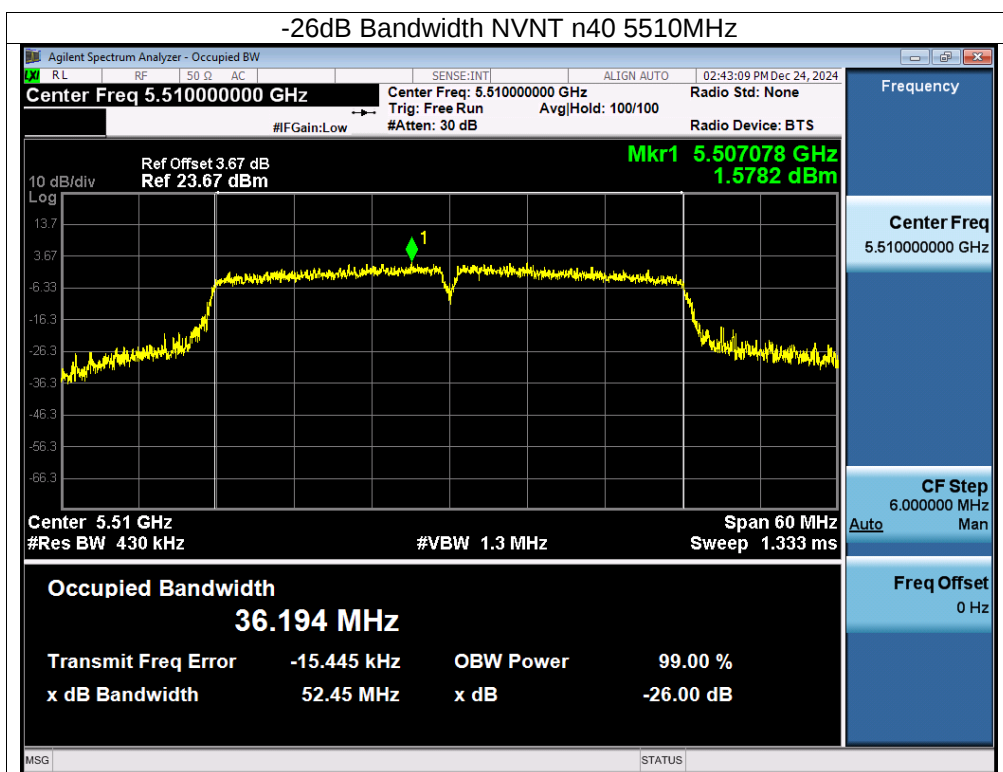


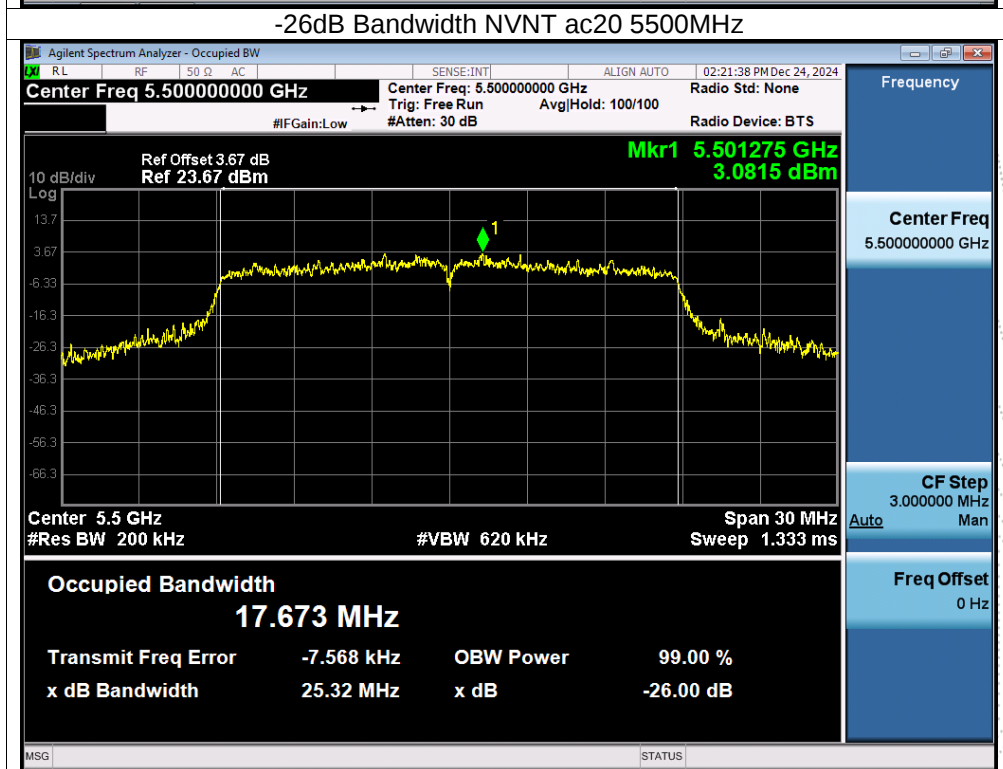
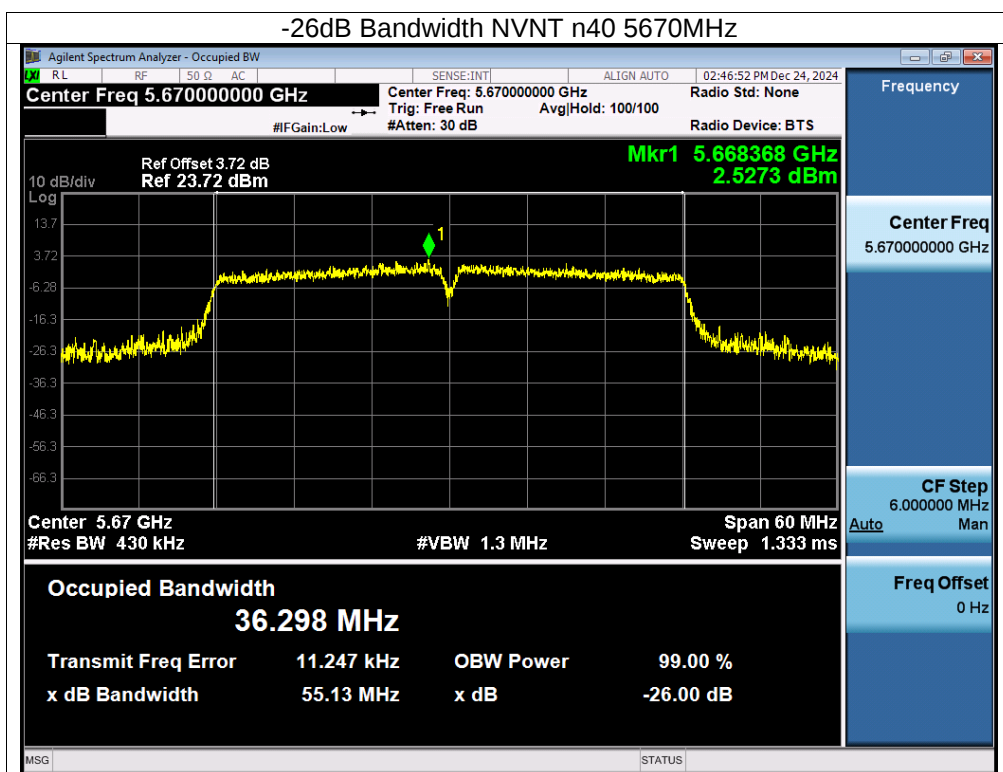


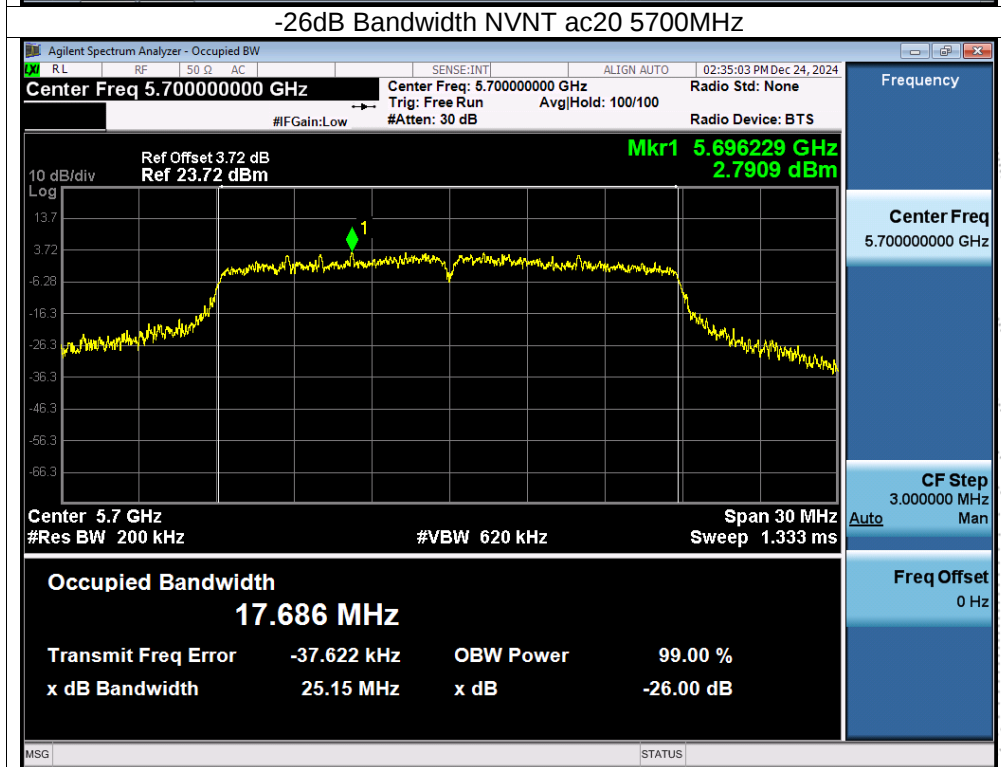
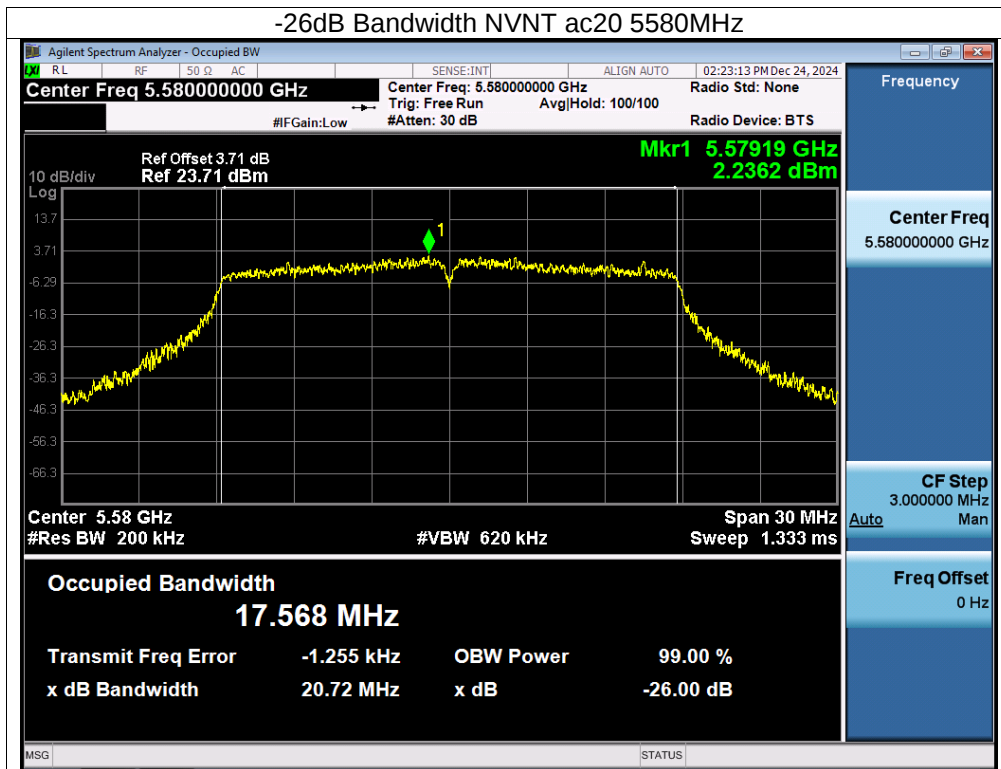


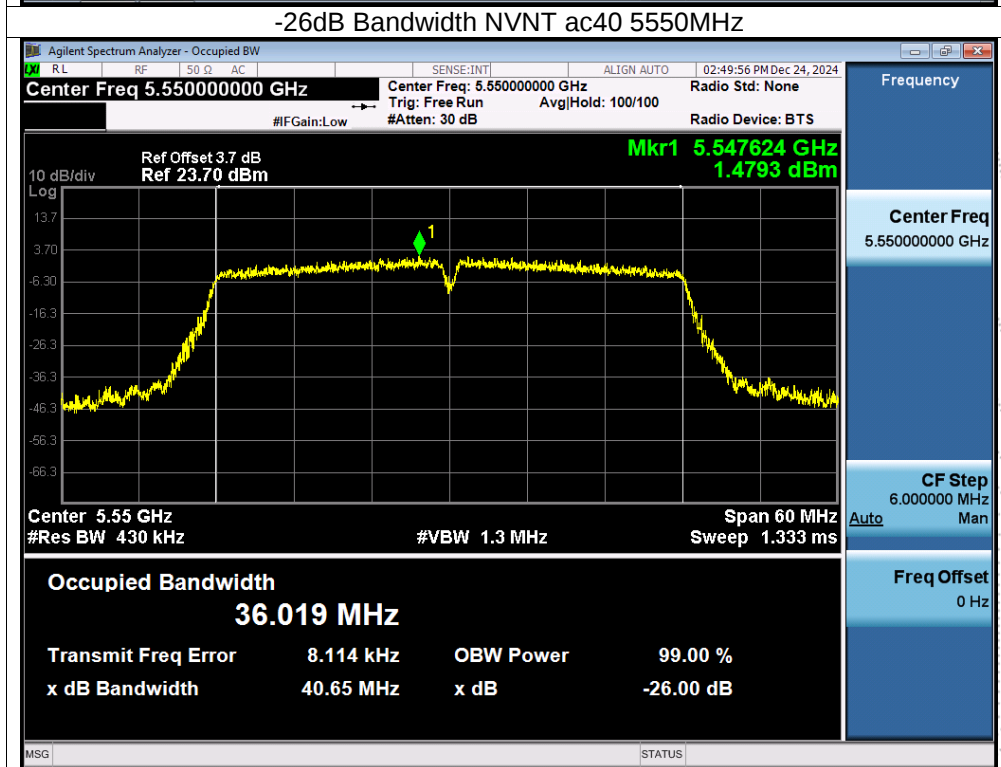
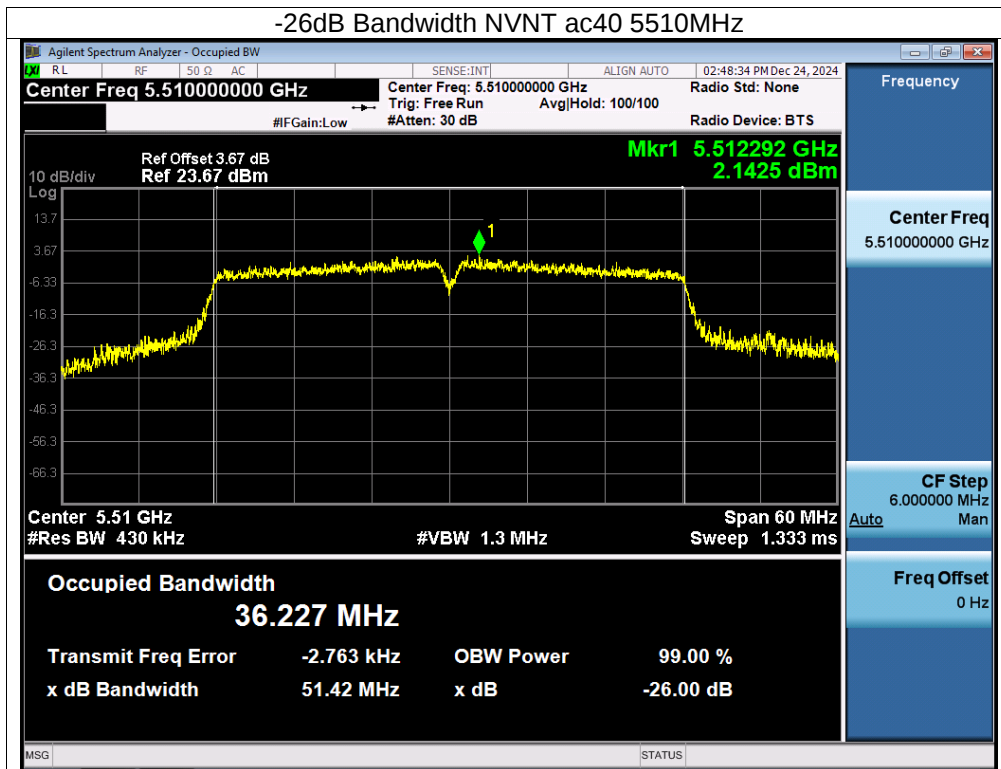


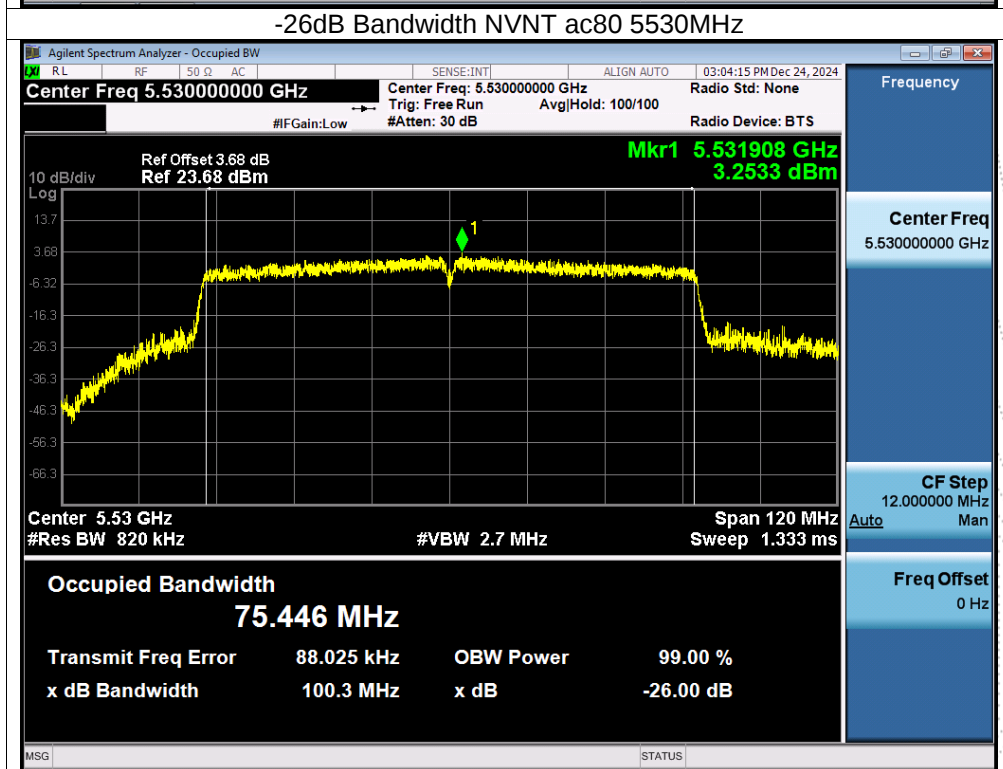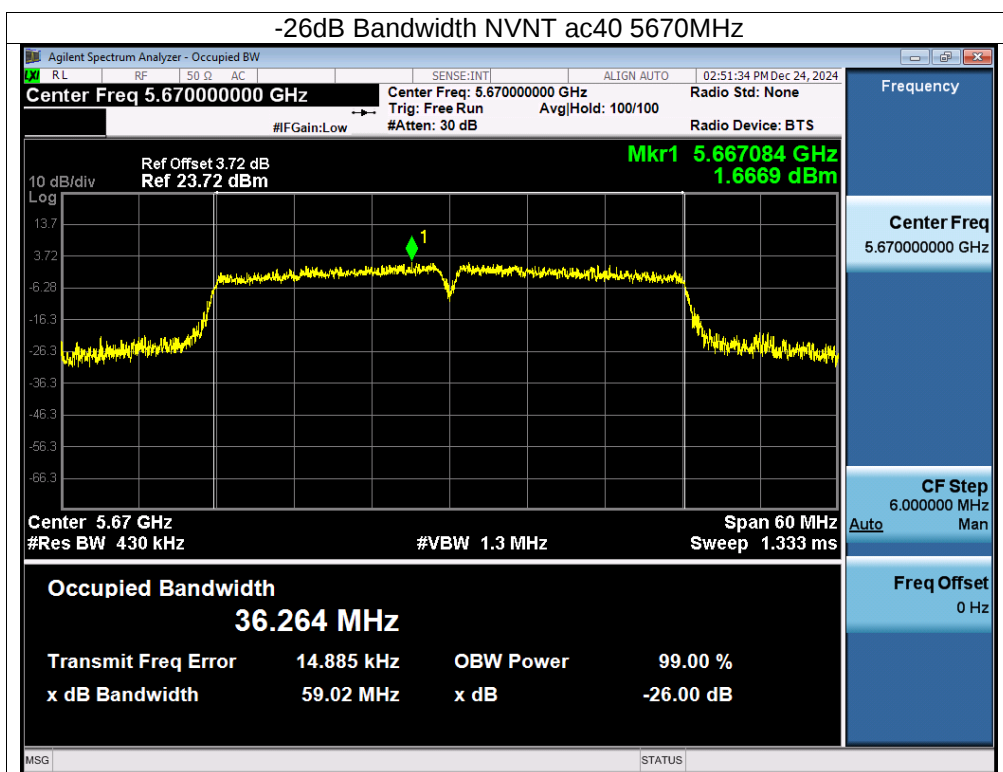


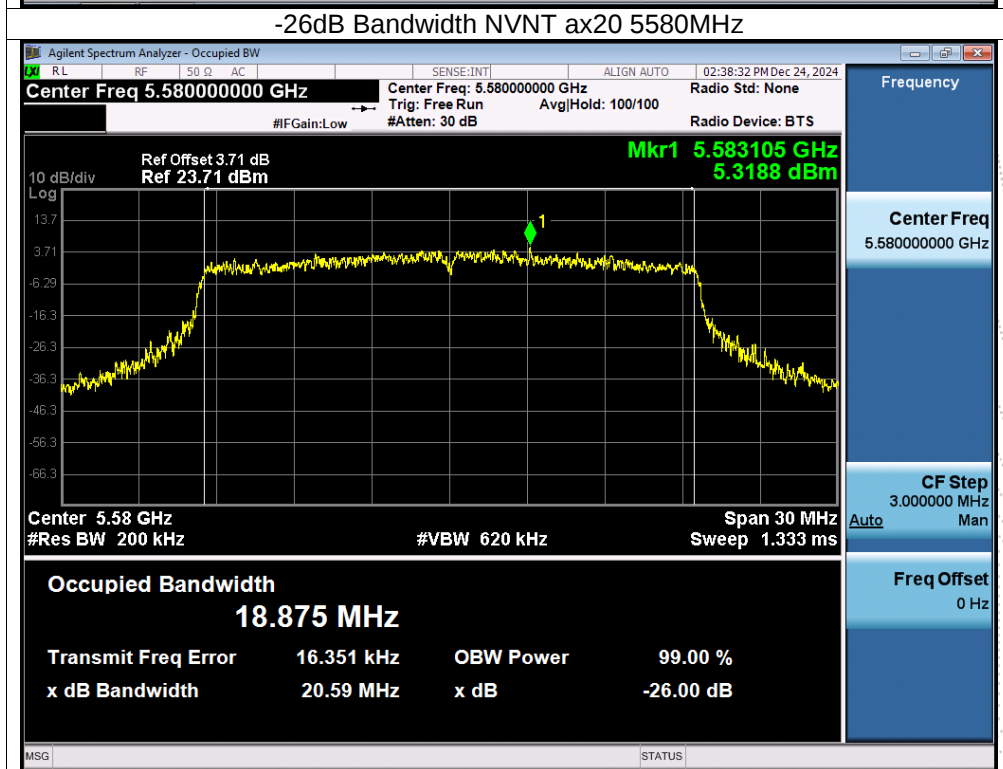
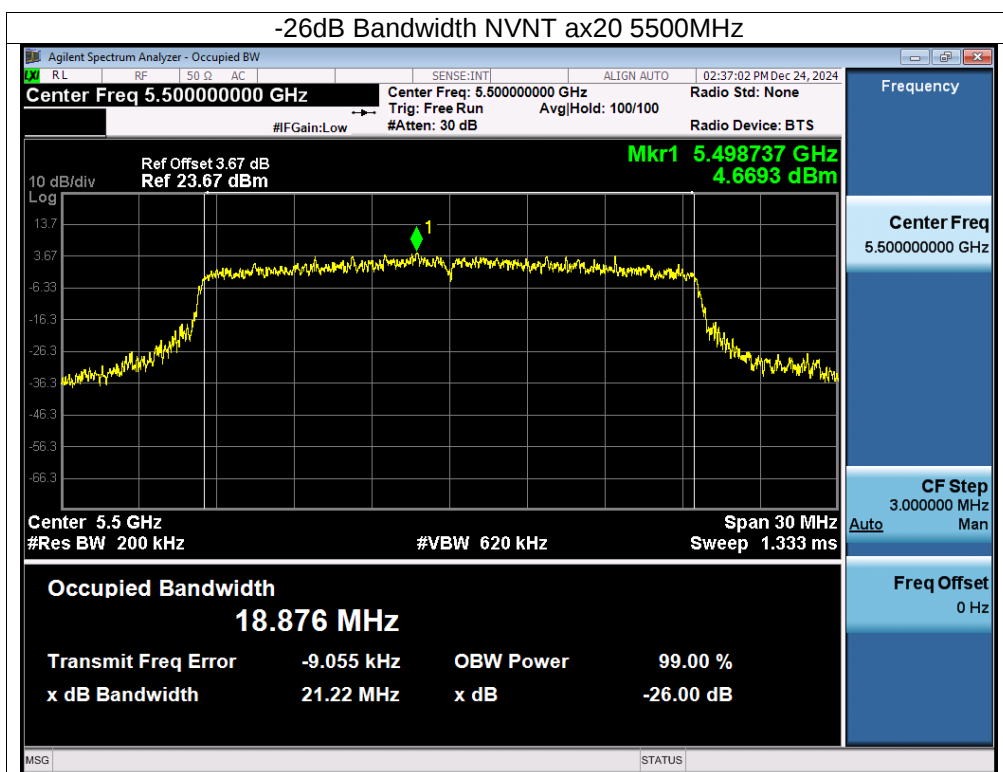


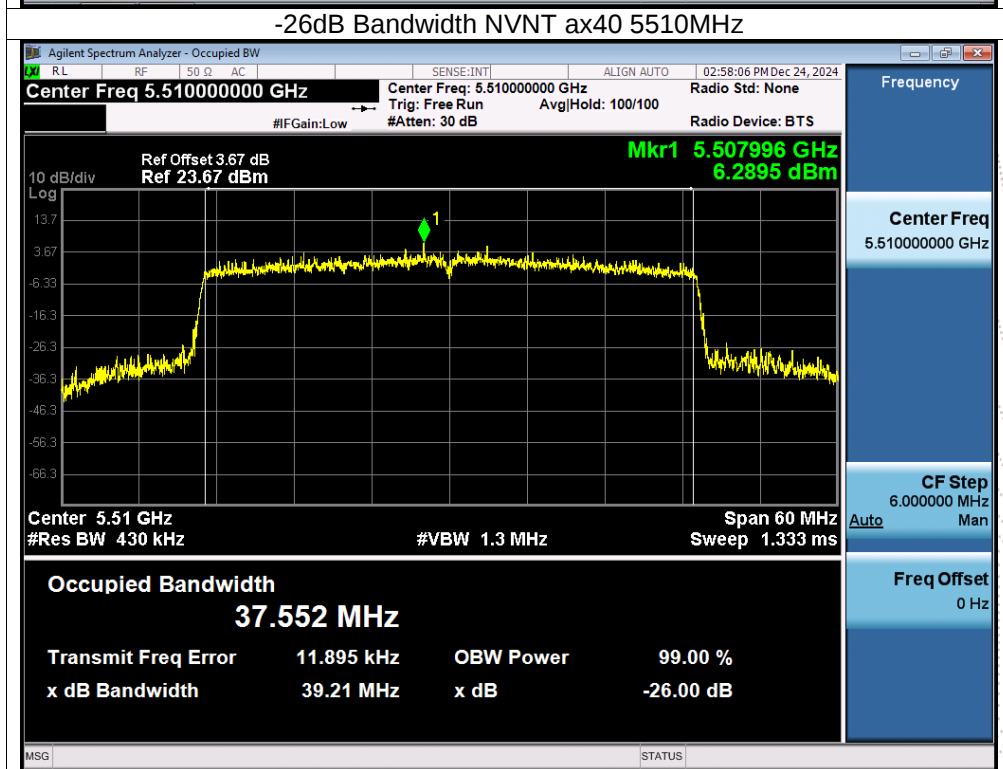
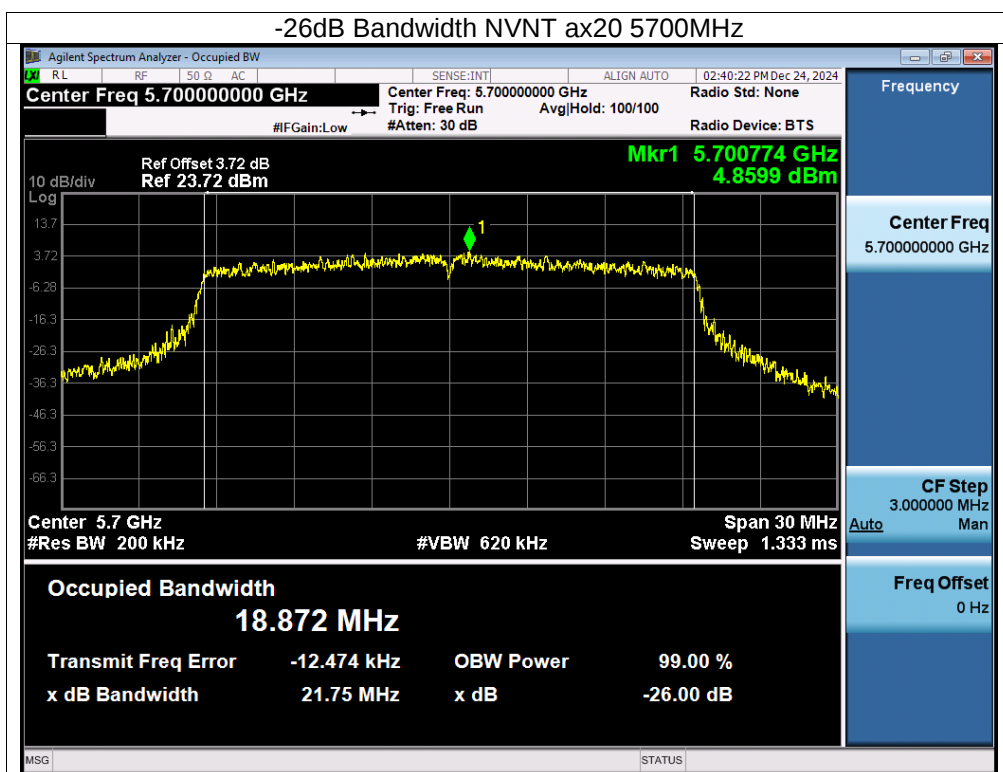


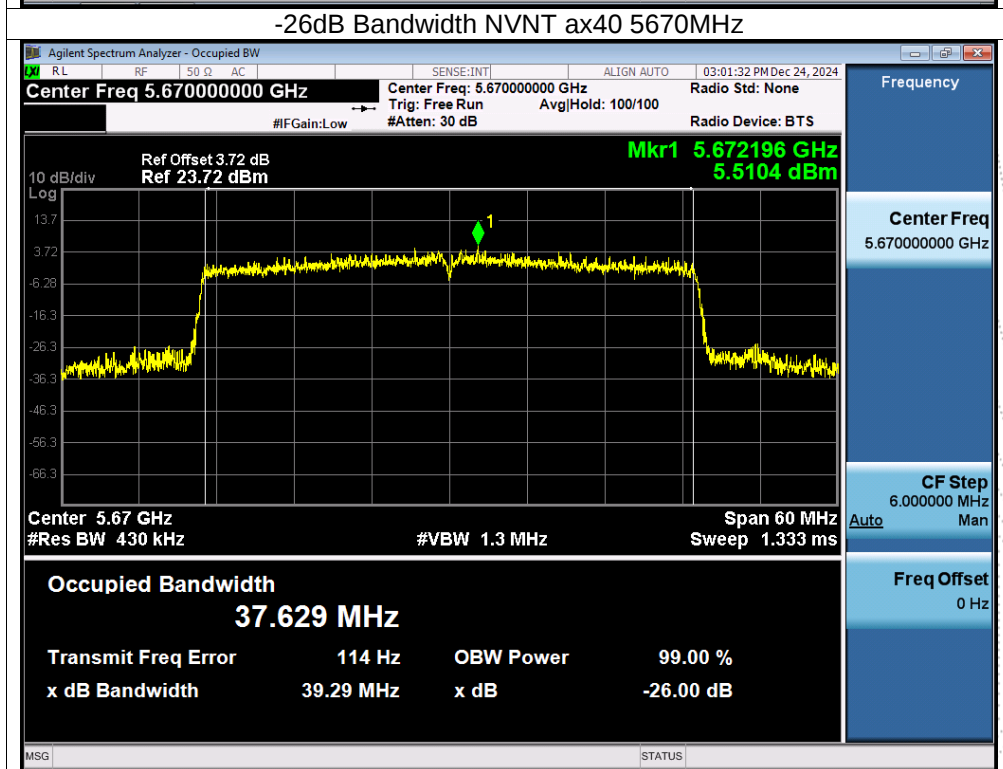
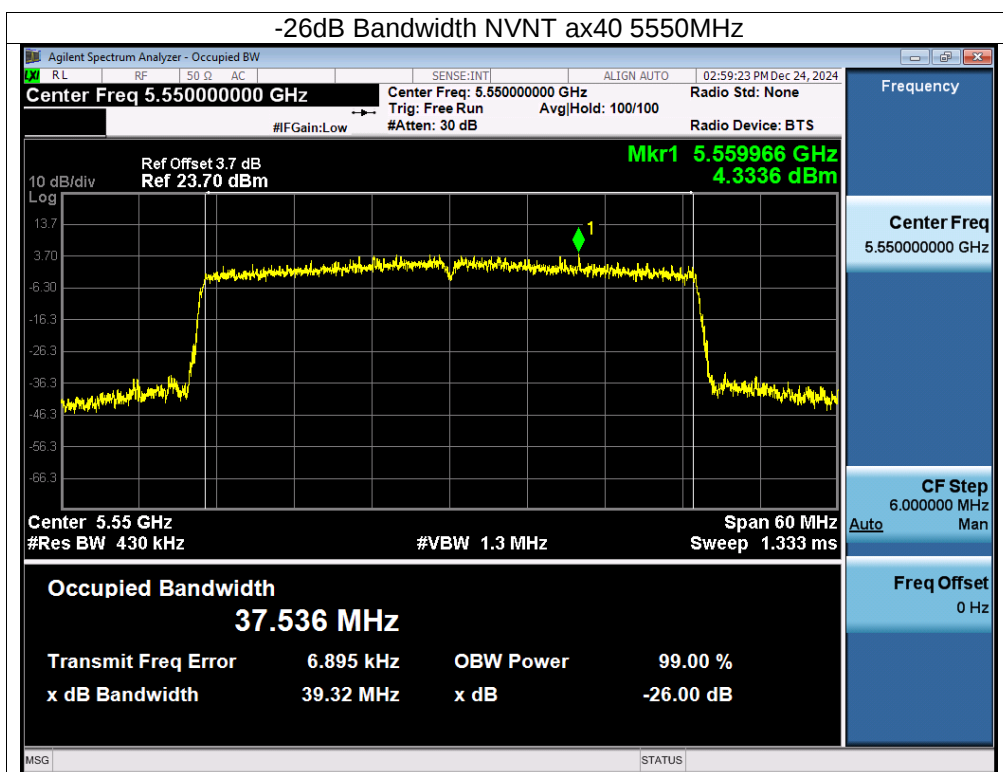


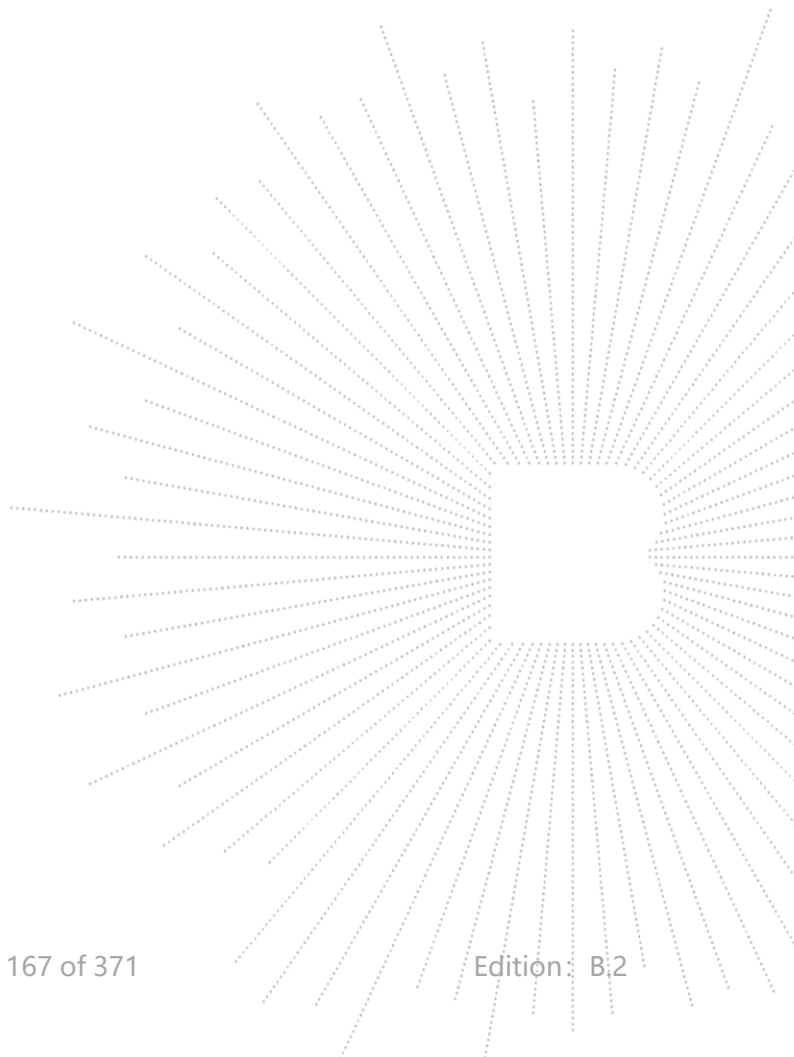
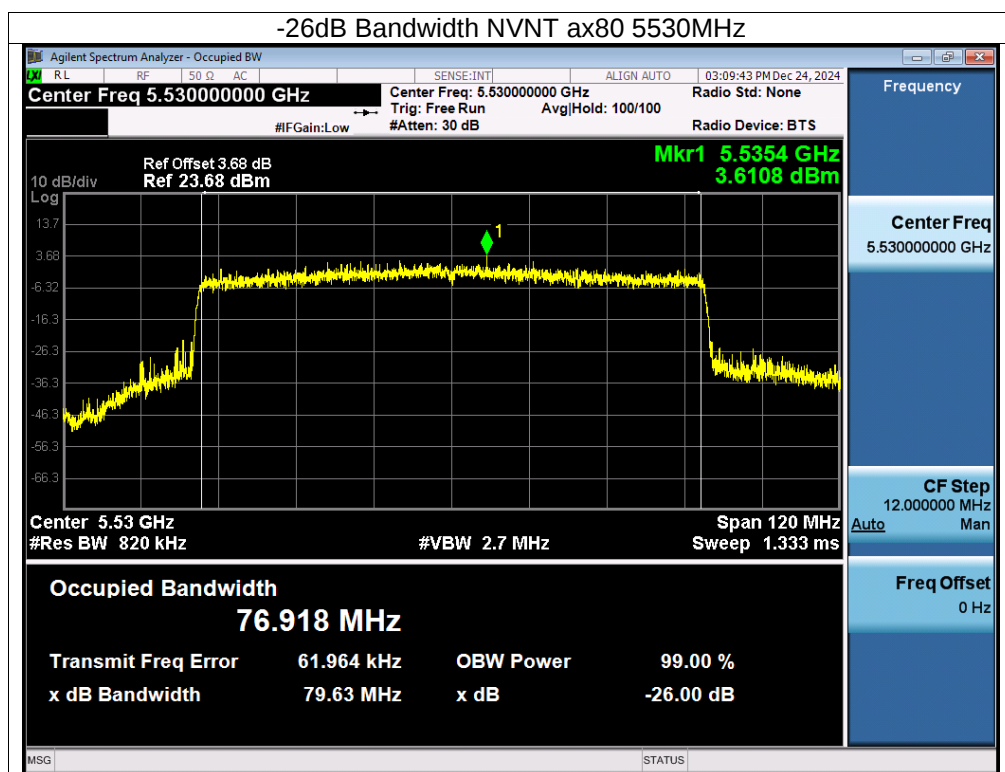



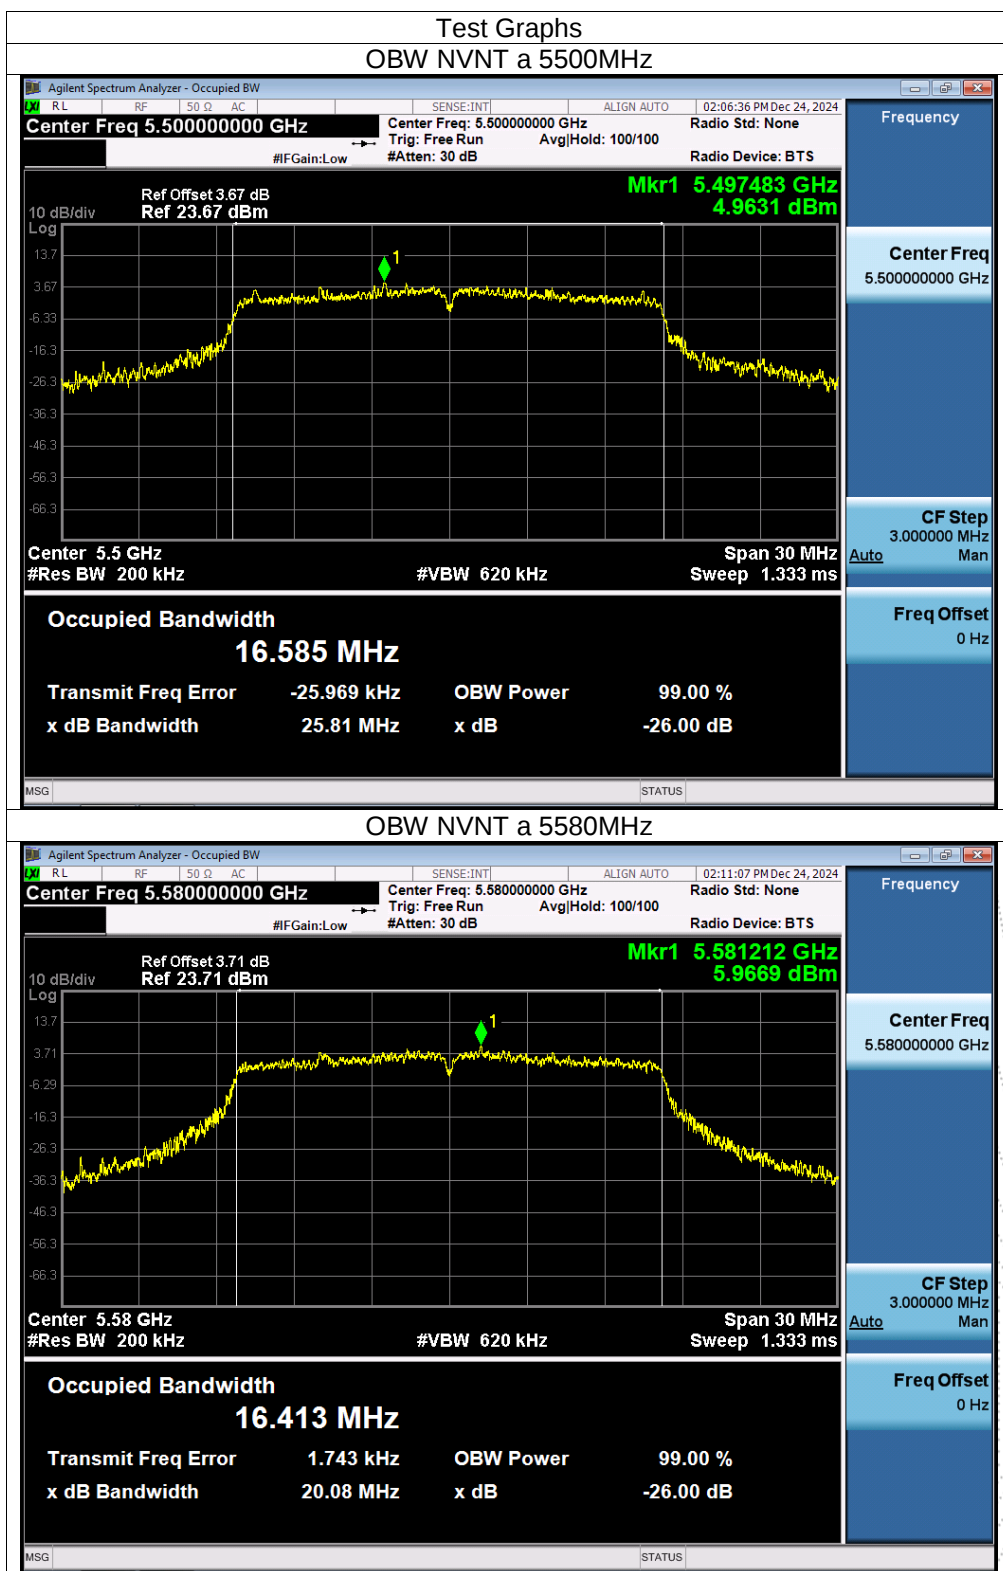


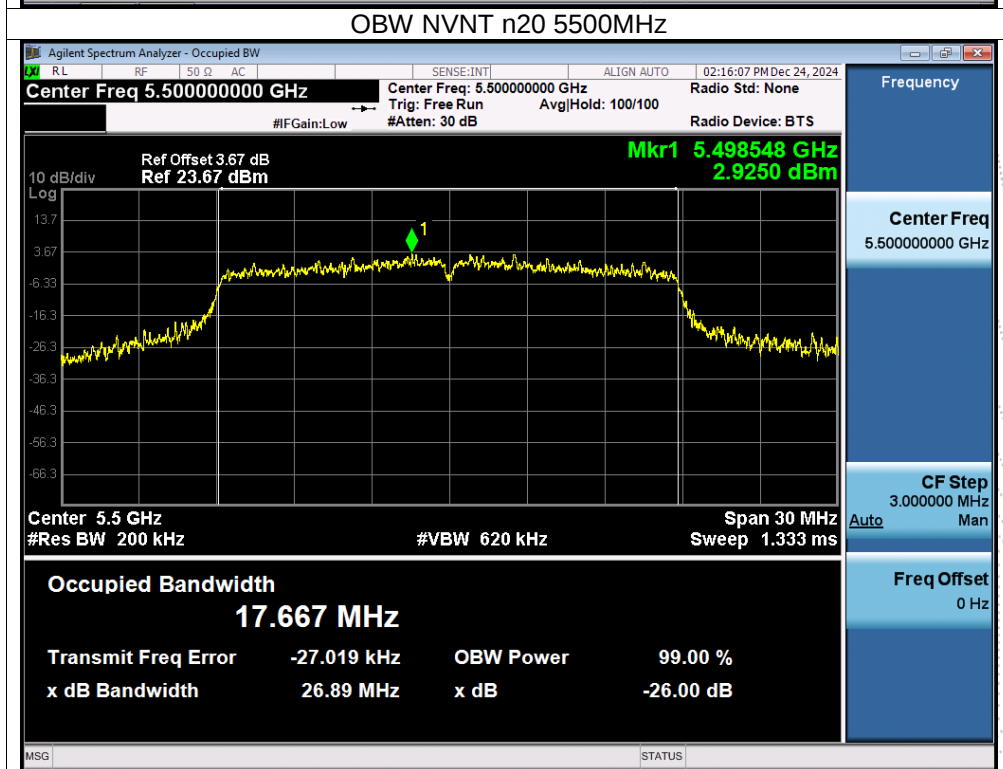
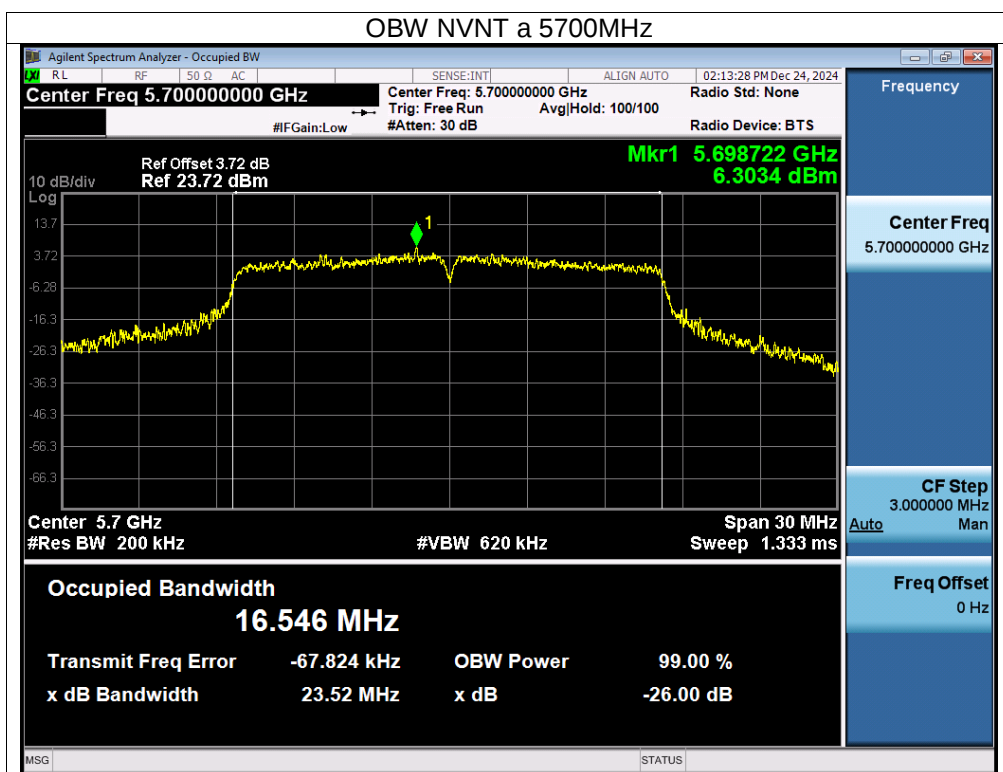


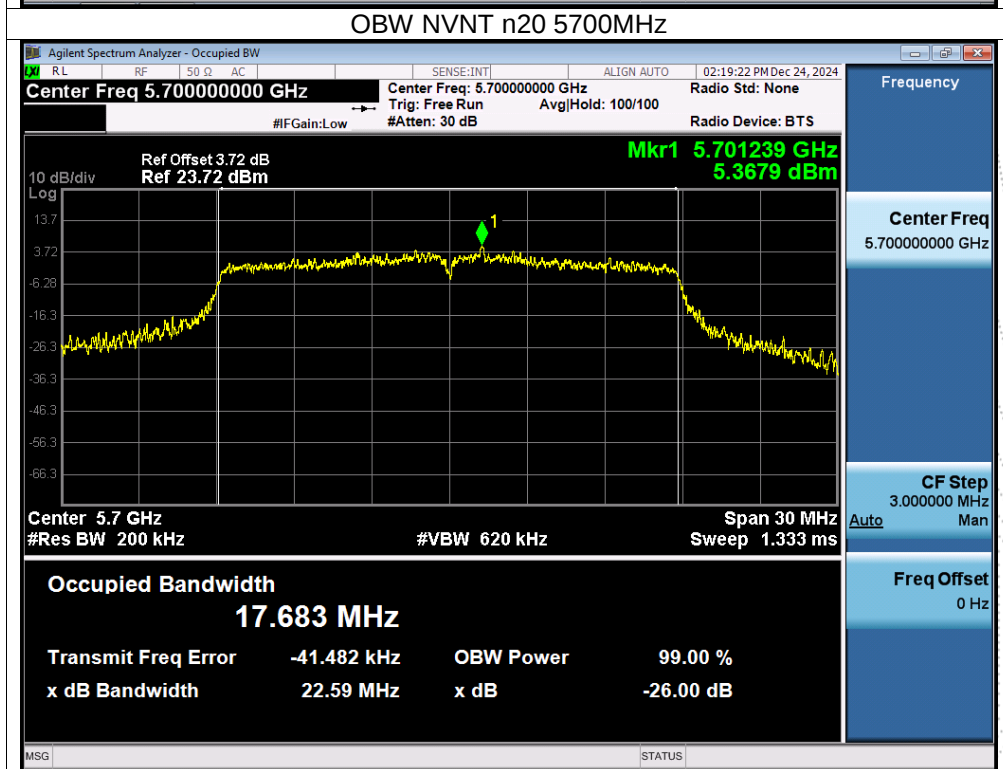
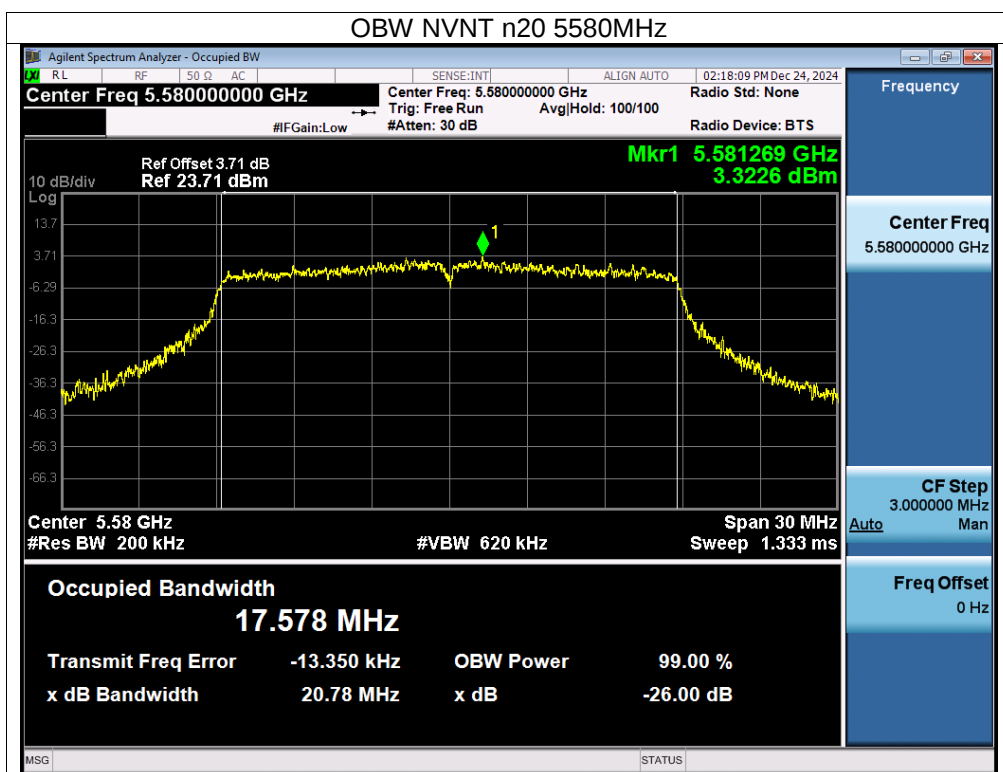


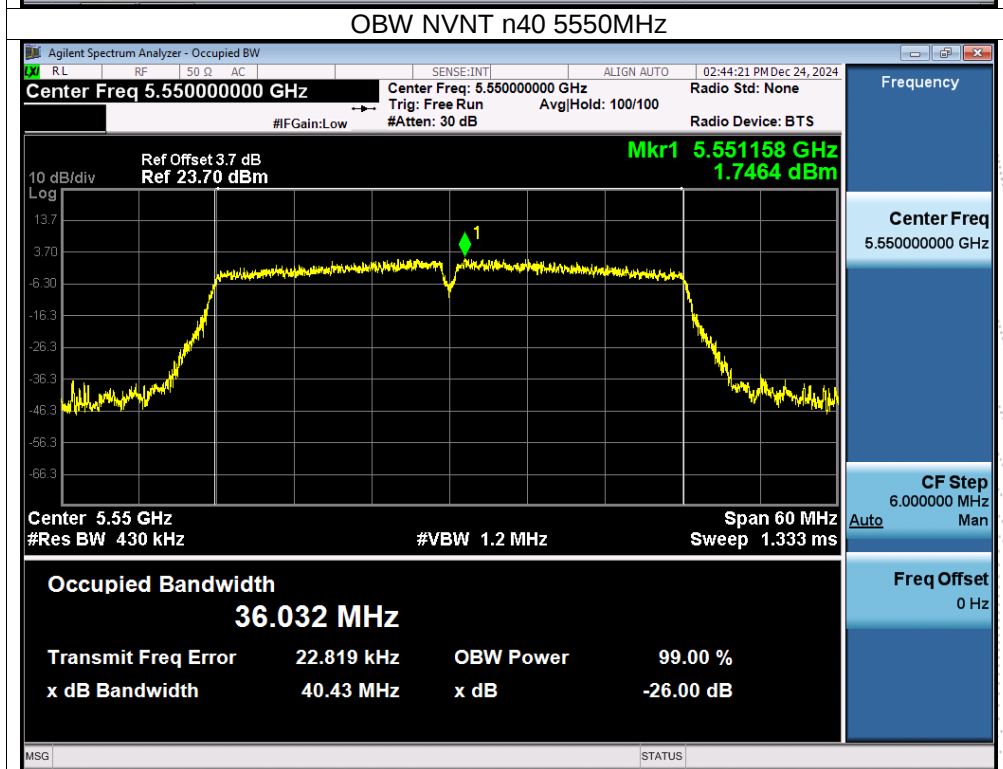
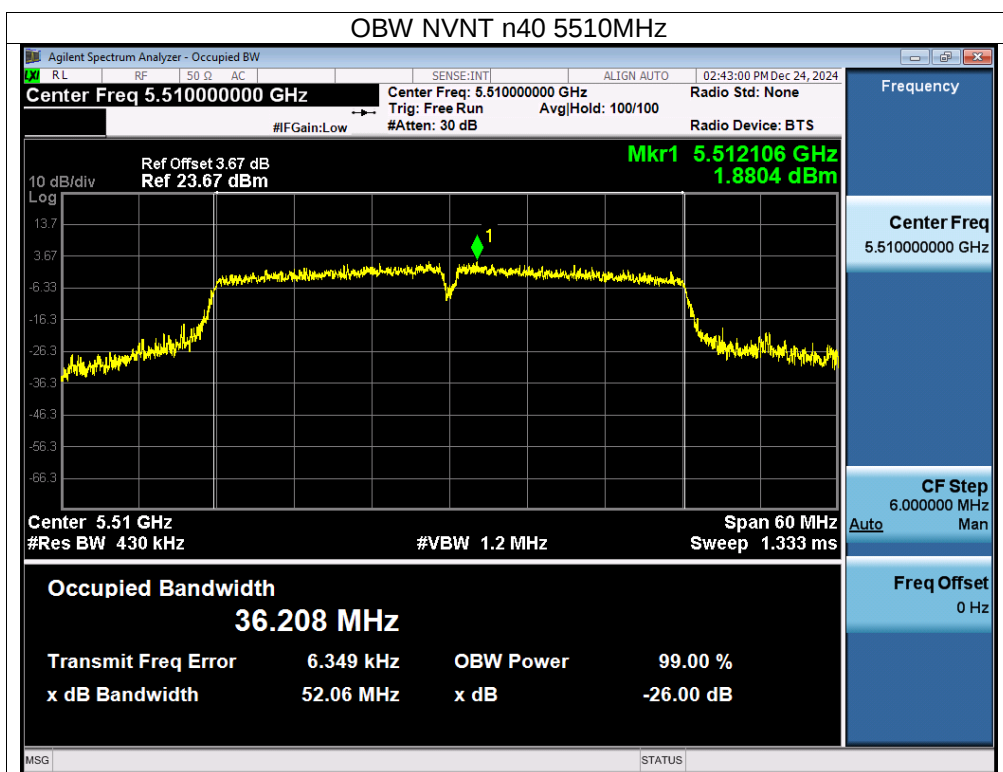


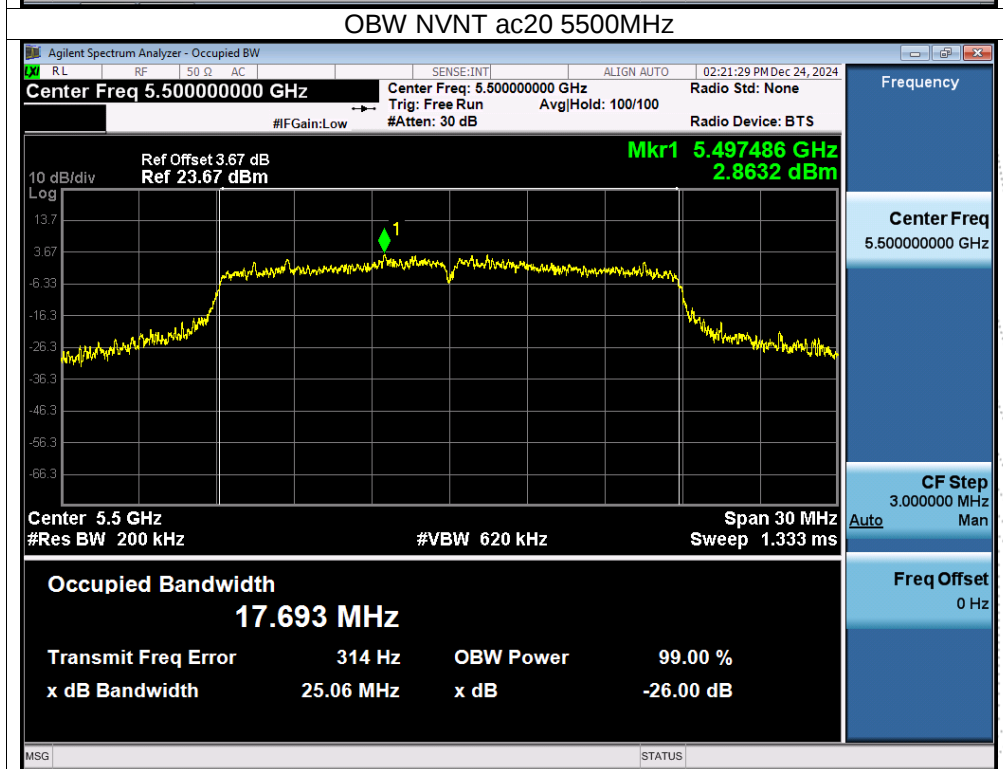
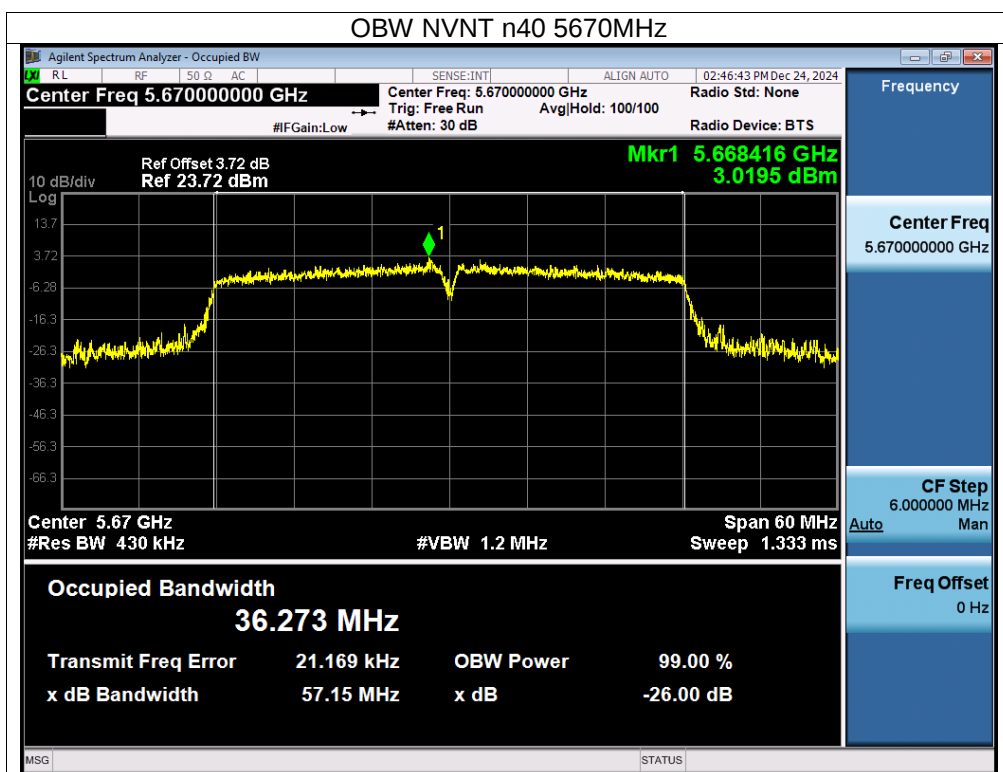


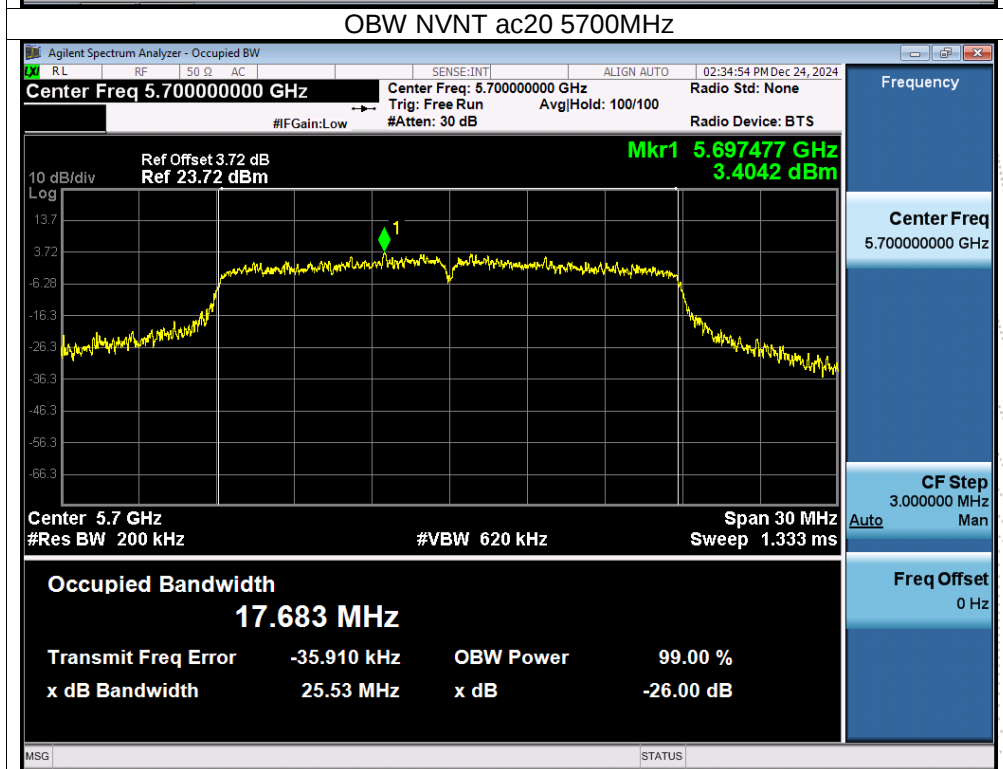
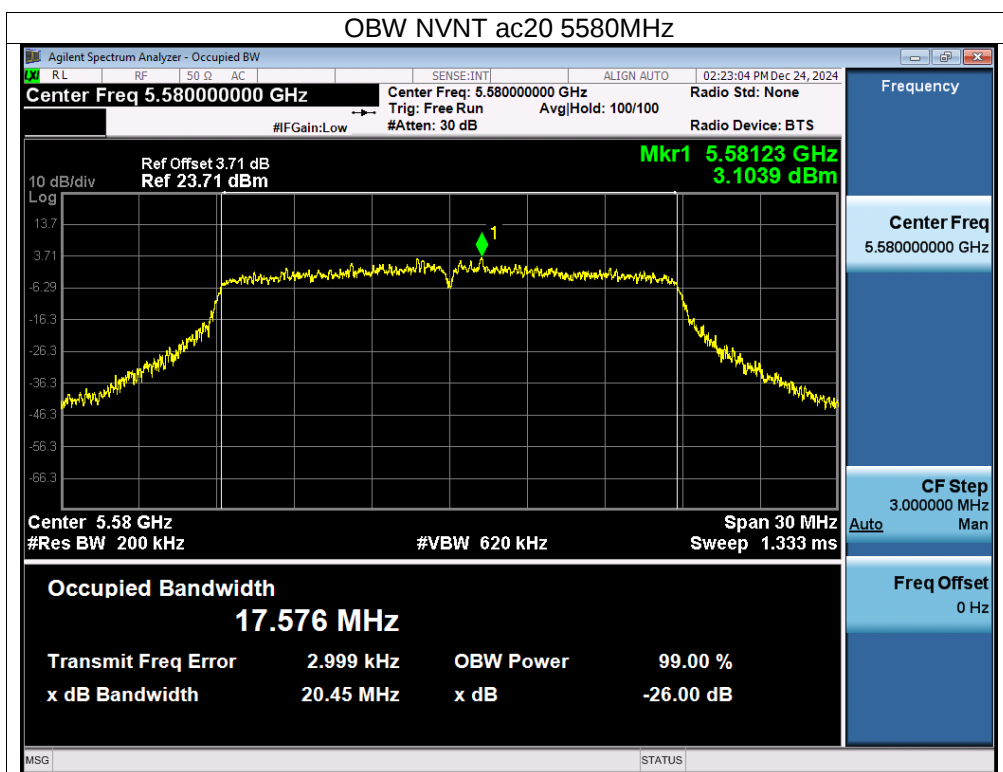


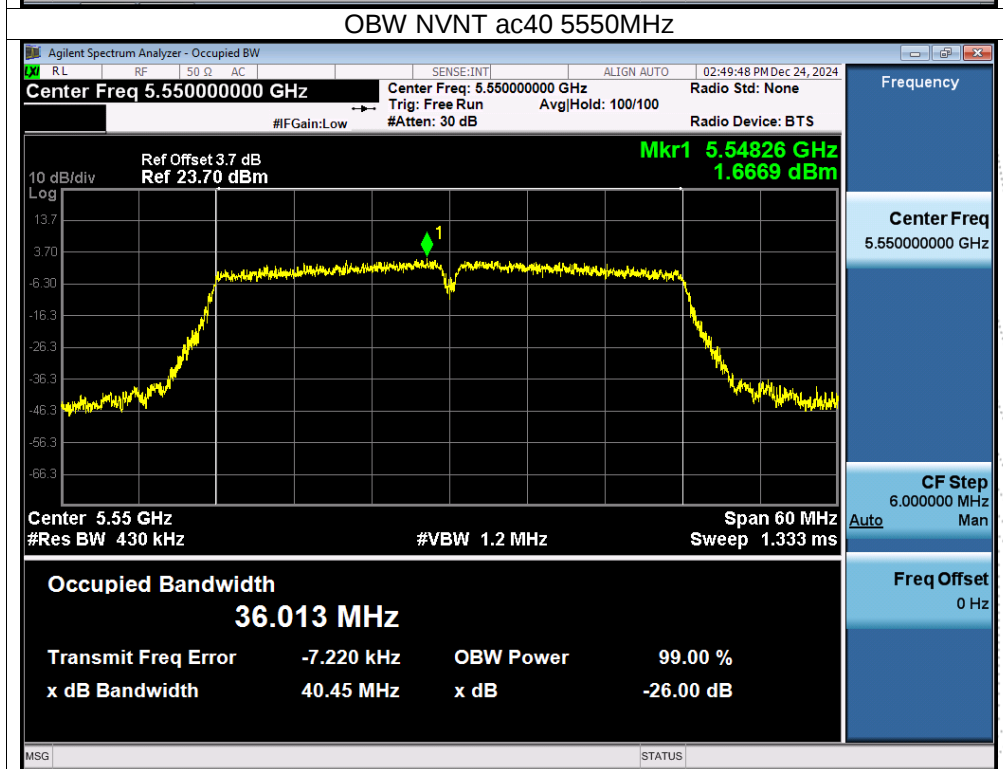
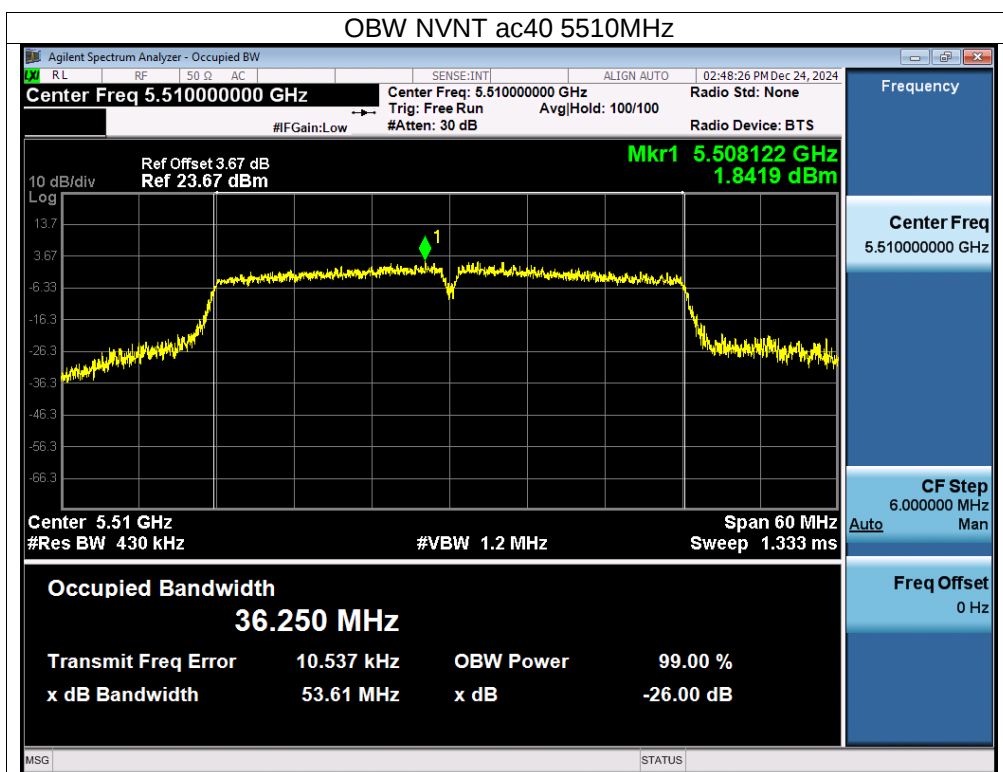


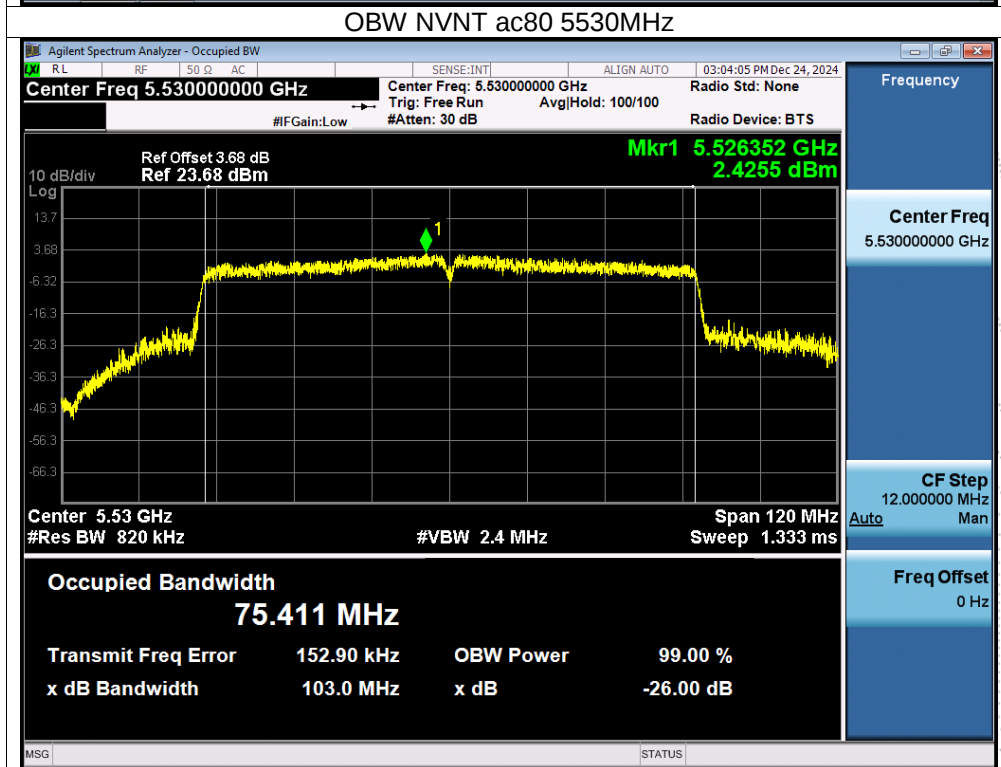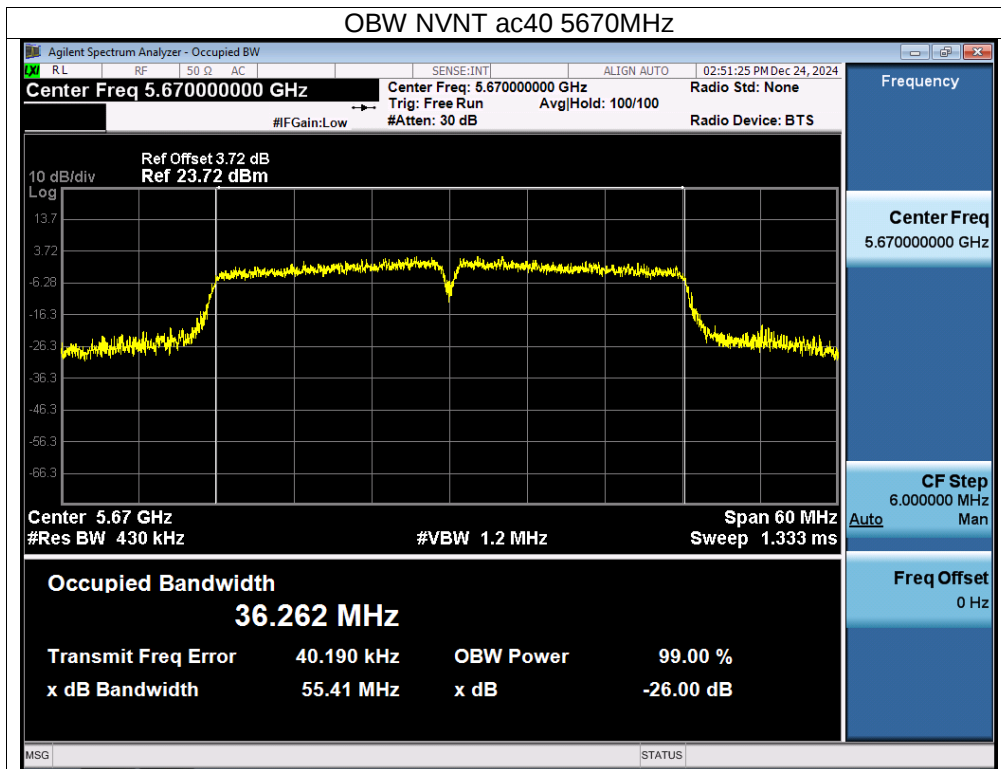

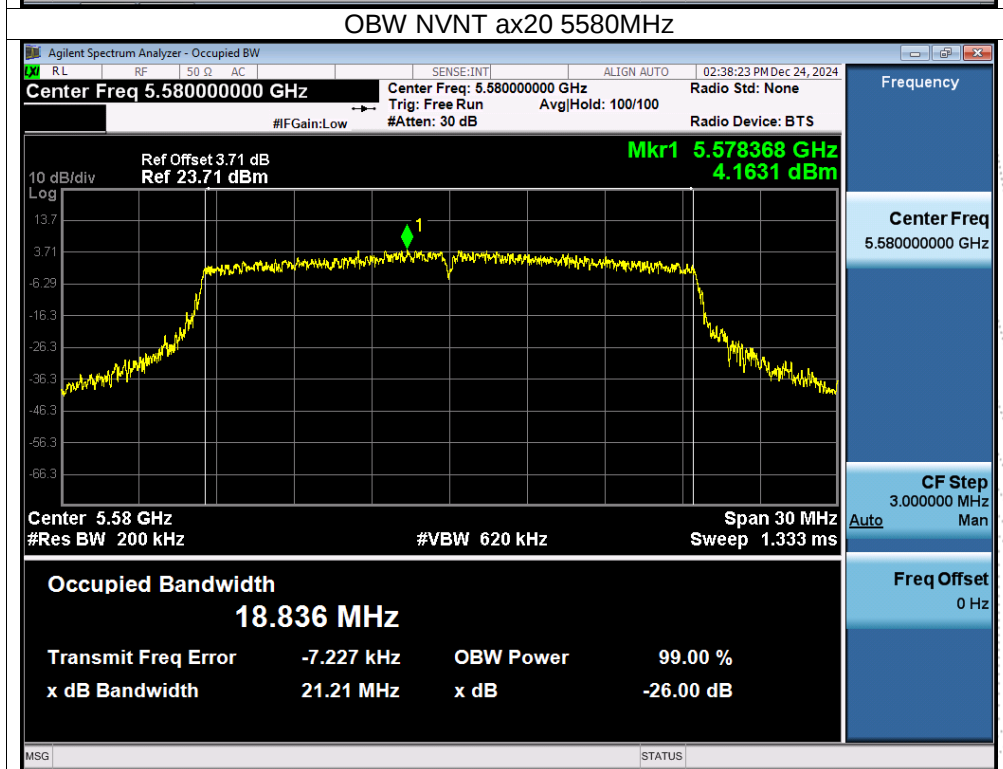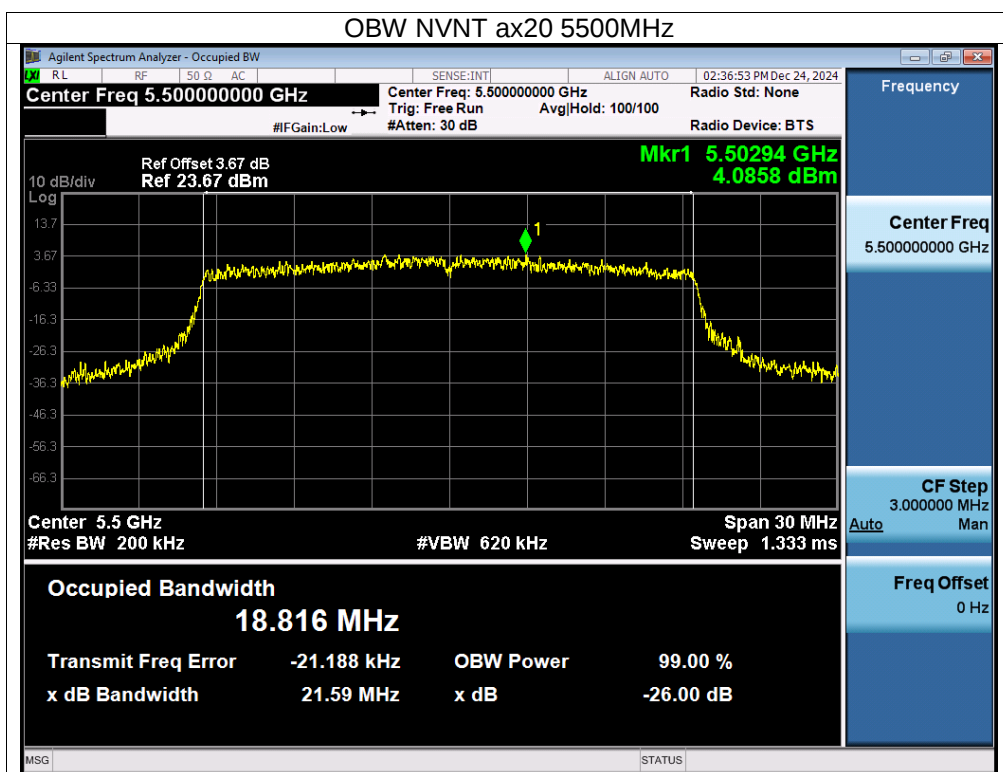

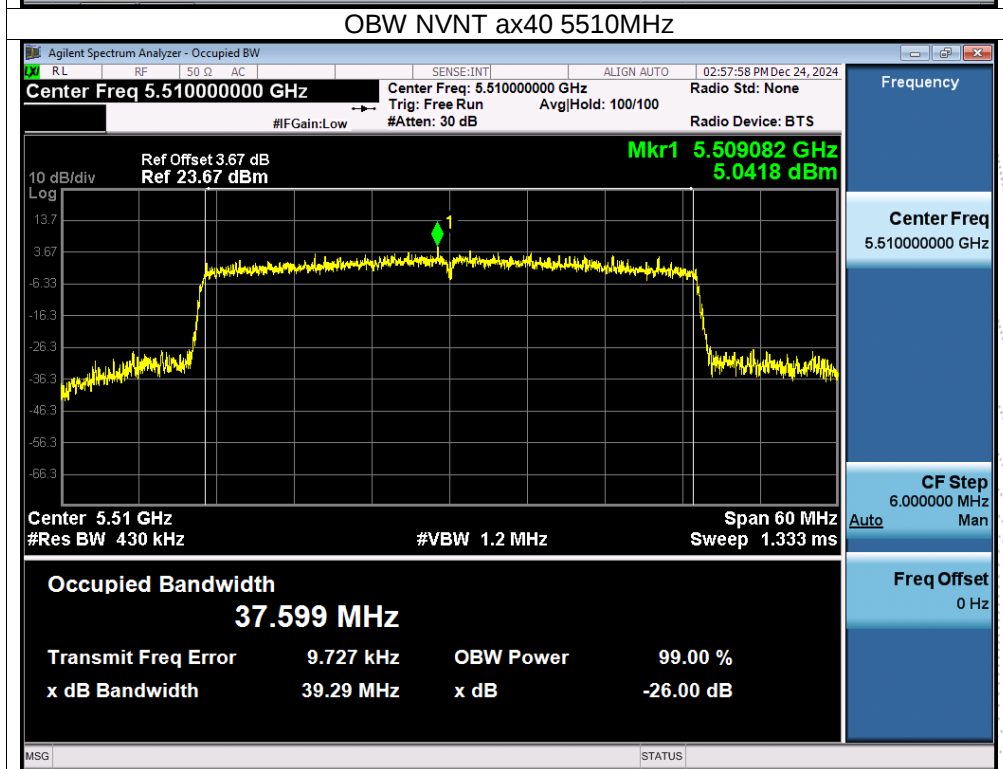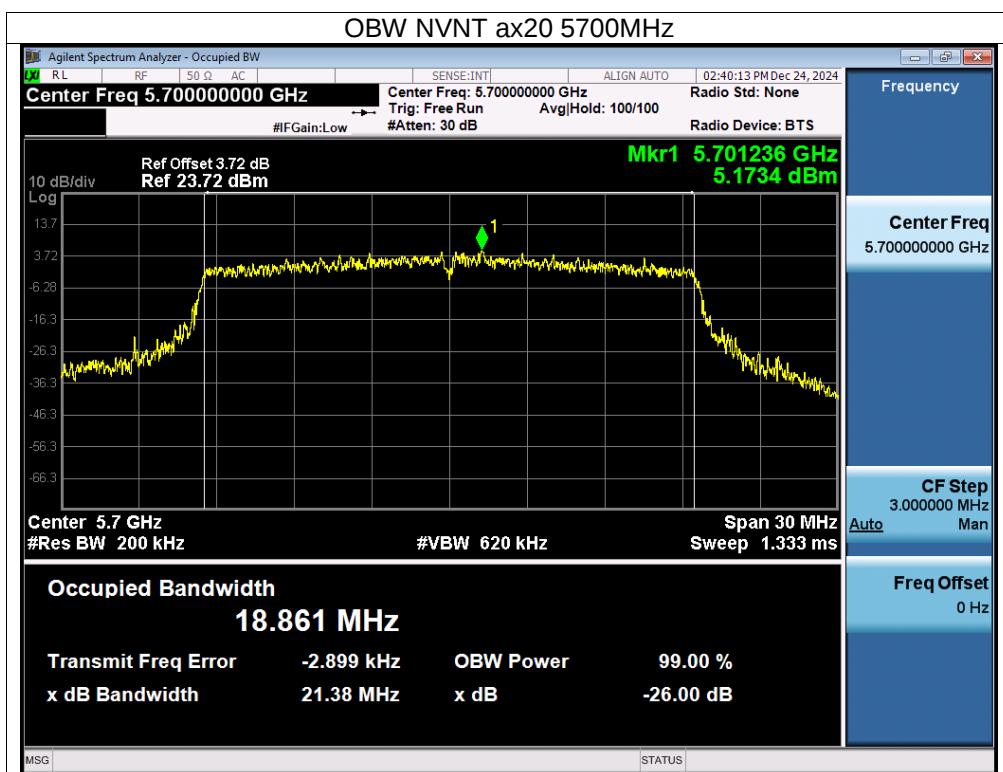

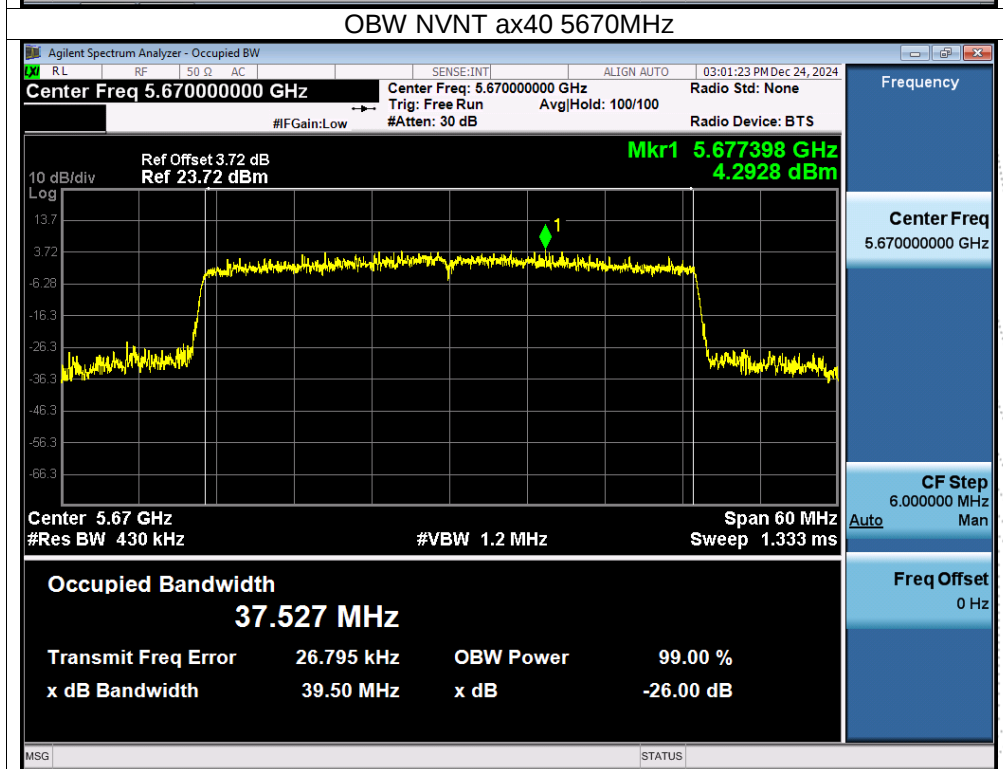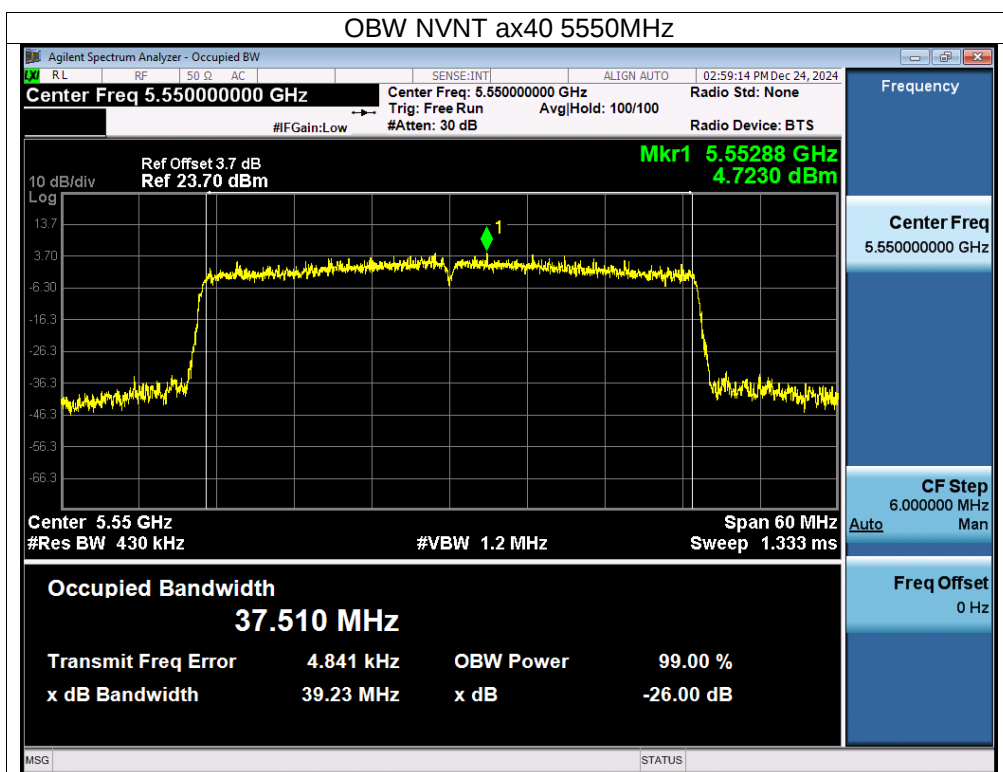

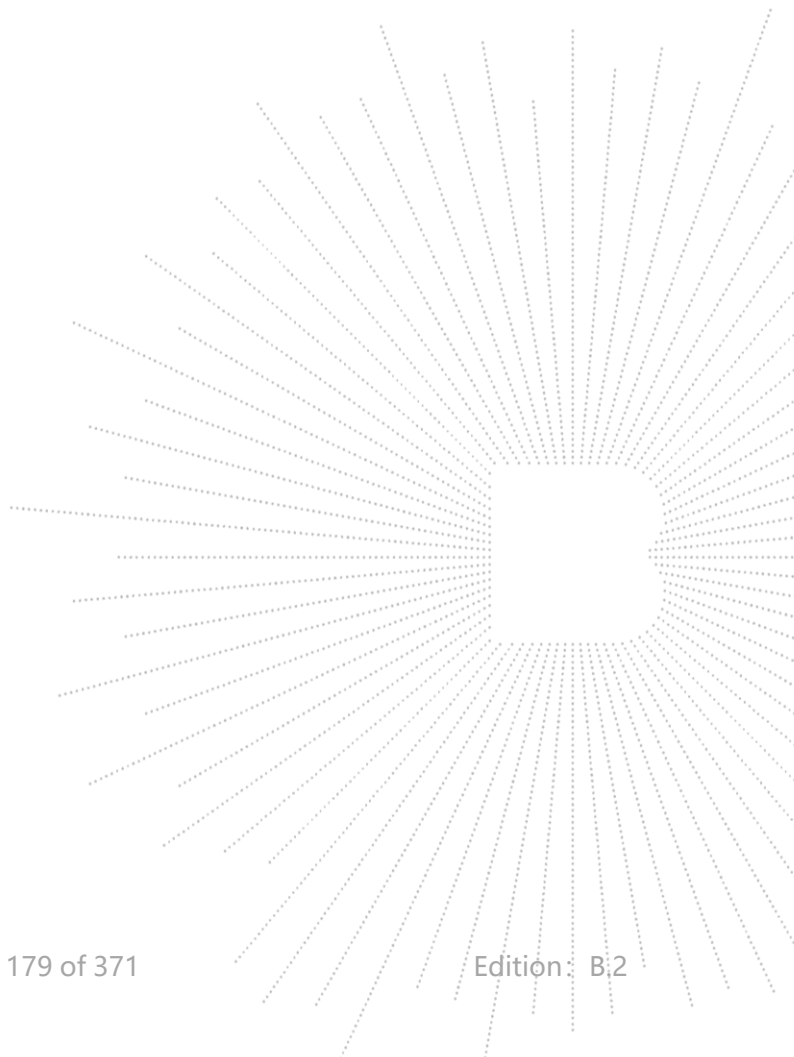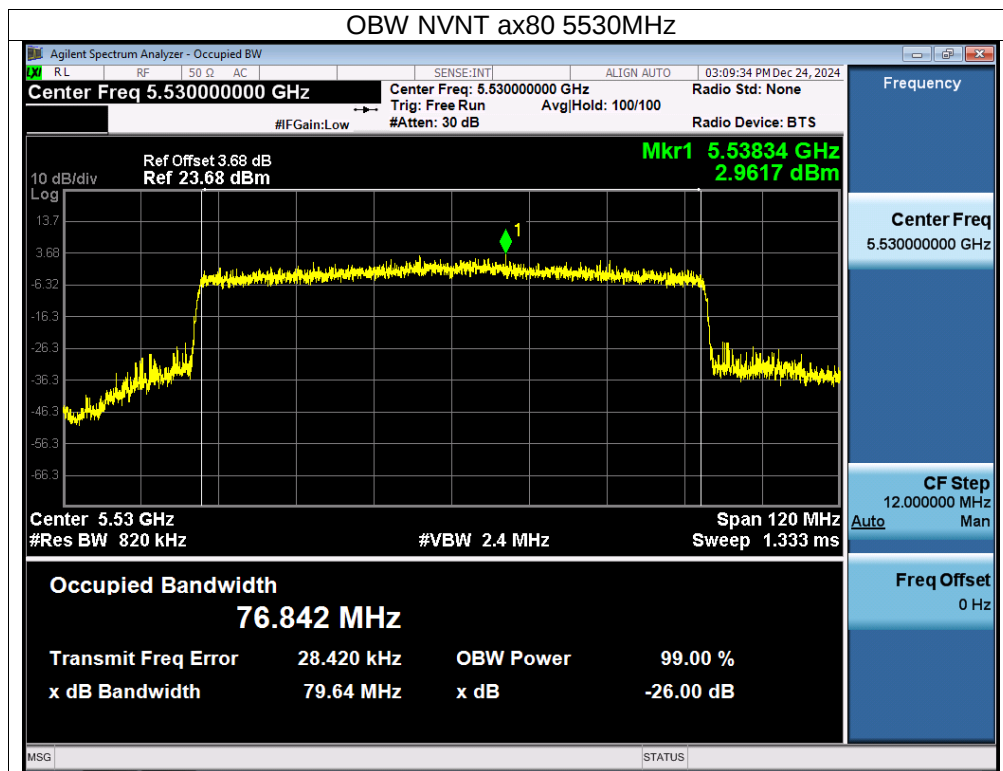

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V
Test Mode:	(5745-5825MHz)		

Condition	Mode	Frequency (MHz)	99% bandwidth (MHz)	-6dB bandwidth (MHz)	Limit -6dB bandwidth (MHz)	Result
NVNT	a	5745	16.511	13.864	0.5	Pass
NVNT	a	5785	16.441	14.362	0.5	Pass
NVNT	a	5825	16.557	15.48	0.5	Pass
NVNT	n20	5745	17.631	13.871	0.5	Pass
NVNT	n20	5785	17.559	11.368	0.5	Pass
NVNT	n20	5825	17.637	14.2	0.5	Pass
NVNT	n40	5755	36.17	35.11	0.5	Pass
NVNT	n40	5795	35.968	32.458	0.5	Pass
NVNT	ac20	5745	17.668	13.42	0.5	Pass
NVNT	ac20	5785	17.594	15.061	0.5	Pass
NVNT	ac20	5825	17.649	13.801	0.5	Pass
NVNT	ac40	5755	36.147	33.858	0.5	Pass
NVNT	ac40	5795	36.01	33.859	0.5	Pass
NVNT	ac80	5775	75.237	75.11	0.5	Pass
NVNT	ax20	5745	18.835	17.316	0.5	Pass
NVNT	ax20	5785	18.792	16.782	0.5	Pass
NVNT	ax20	5825	18.833	15.098	0.5	Pass
NVNT	ax40	5755	37.633	35.036	0.5	Pass
NVNT	ax40	5795	37.463	35.262	0.5	Pass
NVNT	ax80	5775	76.814	73.865	0.5	Pass

