



**FCC Part 22 Test Report
Part 22H Subpart E**

Report Reference No. : HK2308233869-5E

FCC ID : 2BDI3-K60

Compiled by
(position+printedname+signature).. : File administrators Gary Qian

Supervised by
(position+printedname+signature)... : Technique principal Eden Hu

Approved by
(position+printedname+signature)... : Manager Jason Zhou

Date of issue : Nov. 13, 2023

Gary Qian

Eden Hu

Jason Zhou

Testing Laboratory Name : **Shenzhen HUAK Testing Technology Co., Ltd.**
Address : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Applicant's name : **Shenzhen Haimeilan Technology Co., LTD.**
Address : 9V777, East 9th Floor, Building 2, SEG Science Park, Huaqiang
North Street, Futian District, Shenzhen, 518000 China

Test specification :
Standard : **FCC CFR Title 47 Part 2, Part 22H**
TRF Originator : Shenzhen HUAK Testing Technology Co., Ltd.

Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description..... : Smart Phone
Trade Mark..... : N/A
Manufacturer : **Shenzhen Shengkai Technology Co., Ltd.**
Model/Type reference..... : K60
Series Models : F5 Pro, F50 Pro, K60 Pro, K60E, M13, M13 Pro, M5s Pro, M5s, X5 Pro, F3 Pro, X40, X40 Pro, X40 Edge, F5, Note12 Pro, M6 Pro, I14 Pro max, I15 Pro max, G14 Pro, S22Ultra, S23 Ultra, G22
Modulation Type : QPSK,16QAM
Rating..... : DC 5V From Type-C or DC 3.8V From Battery
Hardware version..... : V1.0
Software version : V1.0
Result..... : **PASS**



TEST REPORT

Test Report No. :	HK2308233869-5E	Nov. 13, 2023
		Date of issue

Equipment under Test : Smart Phone

Model /Type : K60

Series Models : F5 Pro, F50 Pro, K60 Pro, K60E, M13, M13 Pro, M5s Pro, M5s, X5 Pro, F3 Pro, X40, X40 Pro, X40 Edge, F5, Note12 Pro, M6 Pro, I14 Pro max, I15 Pro max, G14 Pro, S22Ultra, S23 Ultra, G22

Applicant : **Shenzhen Haimeilan Technology Co., LTD.**

Address : 9V777, East 9th Floor, Building 2, SEG Science Park, Huaqiang North Street, Futian District, Shenzhen, 518000 China

Manufacturer : **Shenzhen Shengkai Technology Co., Ltd.**

Address : 4th floor, Building 7, Hongye Industrial Park, Zhujiao Village, Hangcheng Street, Baoan District, Shenzhen, 518000, China

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Contents

1	<u>Test Standards</u>	<u>5</u>
2	<u>Summary</u>	<u>6</u>
2.1	General Remarks	6
2.2	Product Description	6
2.3	Equipment under Test	6
2.4	Normal Accessory Setting	7
2.5	EUT Configuration	7
2.6	Related Submittal(s) / Grant (s)	7
2.7	Modifications	7
2.8	General Test Conditions/Configurations	7
3	<u>Test Environment</u>	<u>8</u>
3.1	Information of the Test Laboratory	8
3.2	Environmental Conditions	8
3.3	Test Description	8
3.4	Equipments Used During The Test	9
4	<u>Test Conditions and Results</u>	<u>10</u>
4.1	Output Power	10
4.2	Peak-to-Average Ratio (PAR)	15
4.3	Occupied Bandwidth and Emission Bandwidth	20
4.4	Band Edge Compliance	25
4.5	Spurious Emission on Antenna Port	30
4.6	Radiated Spurious Emission	53
4.7	Frequency Stability	59
5	<u>Test Setup Photos of the EUT</u>	<u>61</u>
6	<u>External and Internal photos of the EUT</u>	<u>62</u>



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Nov. 13, 2023	Jason Zhou



1 Test Standards

The tests were performed according to following standards:

[FCC Part 2](#): Frequency Allocations And Radio Treaty Matters; General Rules And Regulations.

[FCC Part 22 Subpart H](#): Private Land Mobile Radio Services.

[ANSI/TIA-603-E-2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

[FCC KDB 971168D01 v03r01](#) Power Meas License Digital Systems.



2 Summary

2.1 General Remarks

Date of receipt of test sample	:	Aug. 23, 2023
Testing commenced on	:	Aug. 23, 2023
Testing concluded on	:	Nov. 13, 2023

2.2 Product Description

Name of EUT:	Smart Phone
Model/Type reference:	K60
Series Models:	F5 Pro, F50 Pro, K60 Pro, K60E, M13, M13 Pro, M5s Pro, M5s, X5 Pro, F3 Pro, X40, X40 Pro, X40 Edge, F5, Note12 Pro, M6 Pro, I14 Pro max, I15 Pro max, G14 Pro, S22Ultra, S23 Ultra, G22
Power supply:	DC 5V From Type-C or DC 3.8V From Battery
Modulation Type:	QPSK,16QAM
Antenna type:	Internal Antenna
Antenna gain:	-1.4dBi
Operation Frequency Band:	LTE BAND 5
Operation frequency:	LTE BAND 5:824~849 MHz
LTE Release:	R8
Extreme temp. Tolerance:	-30°C to +50°C
Extreme vol. Limits:	4.25VDC to 5.75VDC (nominal: 5.0VDC)

2.3 Equipment under Test

Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V/ 60 Hz	<input type="radio"/> 115V/60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 5V From Type-C or DC 3.8V From Battery



2.4 Normal Accessory Setting

Fully charged battery was used during the test.

2.5 EUT Configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
<input type="radio"/>	Multimeter	Manufacturer :	/
		Model No. :	/

2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended filing to comply with FCC Part 22H, Rules.

2.7 Modifications

No modifications were implemented to meet testing criteria.

2.8 General Test Conditions/Configurations

2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	4.25V
	VN	5.0V
	VH	5.75V

NOTE: VL=lower extreme test voltage VN=nominal voltage VH=upper extreme test voltage TN=normal temperature



3 Test Environment

3.1 Information of the Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.
FCC Designation Number is CN1229.
Canada IC CAB identifier is CN0045.
CNAS Registration Number is L9589.

3.2 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

Band 5 (824~849 MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic) Radiated Output Power	§2.1046, §22.913(a)(2)	EIRP ≤ 2W	Pass
Peak-Average Ratio	§24.232(d)	FCC:Limit≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	Pass
Bandwidth	§2.1049	OBW: Nolimit. EBW: Nolimit.	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13dBm/1%*EBW, In1MHz bands immediately outside and adjacent to Thefrequency block.	Pass
Spurious Emission at AntennaTerminals	§2.1051, §24.238	≤-13dBm/1MHz, from9kHz to 10th harmonics but outside authorized Operating frequency ranges.	Pass
Field Strength of Spurious Radiation	Clause 7of KDB971168 D01 v02r02	≤ -13dBm/1MHz.	Pass
Frequency Stability	§2.1055, §22.355, §24.235	FCC:within authorized frequency block.	Pass

NOTE 1:For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "nottested".

Remark:

1. The measurement uncertainty is not included in the test result.



3.4 Equipments Used During The Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	HKE-059	2023/02/17	2024/02/16
LISN	R&S	ENV216	HKE-002	2023/02/17	2024/02/16
Receiver	R&S	ESCI 7	HKE-010	2023/02/17	2024/02/16
Spectrum analyzer	R&S	FSP40	HKE-025	2023/02/17	2024/02/16
Spectrum analyzer	Agilent	N9020A	HKE-048	2023/02/17	2024/02/16
RF automatic control unit	Tonscend	JS0806-1	HKE-060	2023/02/17	2024/02/16
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2023/02/17	2024/02/16
Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-013	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2023/02/17	2024/02/16
Preamplifier	EMCI	EMC051845SE	HKE-015	2023/02/17	2024/02/16
Preamplifier	Agilent	83051A	HKE-016	2023/02/17	2024/02/16
Preamplifier	Schwarzbeck	BBV 9743	HKE-006	2023/02/17	2024/02/16
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2023/02/17	2024/02/16
High-low temperature chamber	Guangke	HT-80L	HKE-118	2023/02/17	2024/02/16
High pass filter unit	Tonscend	JS0806-F	HKE-055	2023/02/17	2024/02/16
RF Cable(below1GHz)	Times	9kHz-1GHz	HKE-117	2023/02/17	2024/02/16
RF Cable(above 1GHz)	Times	1-40G	HKE-034	2023/02/17	2024/02/16
Power meter	Agilent	E4419B	HKE-085	2023/02/17	2024/02/16
Power Sensor	Agilent	E9300A	HKE-086	2023/02/17	2024/02/16
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A	N/A
RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A	N/A
RF test software	Tonscend	JS1120-4	HKE-113	N/A	N/A
RF test software	Tonscend	JS1120-3	HKE-114	N/A	N/A
RF test software	Tonscend	JS1120-1	HKE-115	N/A	N/A
Wireless Communication Test Set	R&S	CMW500	HKE-026	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMU200	HKE-029	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-135	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-128	2023/02/17	2024/02/16
Broadband antenna	Schwarzbeck	VULB 9163	HKE-087	2023/02/17	2024/02/16
Signal generator	Agilent	E4433B	HKE-120	2023/02/17	2024/02/16
Signal generator	Agilent	E4421B	HKE-121	2023/02/17	2024/02/16

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



4 Test Conditions and Results


4.1 Output Power

4.1.1 Conducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

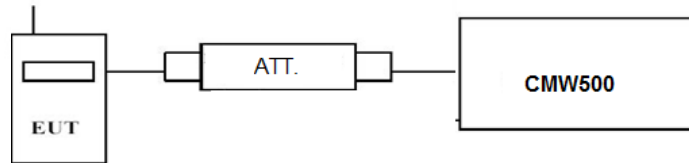

TEST PROCEDURE

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

TEST RESULTS

compliance *

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5;

LTE FDD Band 5				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	824.7	1 RB low	24.61	23.54
		1 RB high	24.62	23.60
		50% RB mid	24.55	23.45
		100% RB	24.65	23.47
	836.5	1 RB low	24.66	23.46
		1 RB high	24.66	23.46
		50% RB mid	23.61	22.62
		100% RB	24.43	23.34
	848.3	1 RB low	24.46	23.43
		1 RB high	24.40	23.31
		50% RB mid	24.49	23.28
		100% RB	24.49	23.29
3 MHz	825.5	1 RB low	24.50	23.69
		1 RB high	24.49	23.67
		50% RB mid	24.38	23.56
		100% RB	23.58	22.63
	836.5	1 RB low	23.58	22.63
		1 RB high	23.55	22.60

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



	847.5	50% RB mid	23.55	22.58
		100% RB	24.26	23.44
		1 RB low	24.29	23.45
		1 RB high	24.25	23.41
		50% RB mid	23.39	22.42
		100% RB	23.39	22.43
5 MHz	826.5	1 RB low	24.69	23.69
		1 RB high	24.59	23.60
		50% RB mid	24.48	23.49
		100% RB	23.66	22.68
	836.5	1 RB low	23.66	22.68
		1 RB high	23.66	22.67
		50% RB mid	23.56	22.57
		100% RB	24.49	23.46
	846.5	1 RB low	24.46	23.47
		1 RB high	24.40	23.43
		50% RB mid	23.48	22.49
		100% RB	23.47	22.48
10 MHz	829.0	1 RB low	24.73	23.78
		1 RB high	24.77	23.78
		50% RB mid	24.65	23.65
		100% RB	23.81	22.82
	836.5	1 RB low	23.81	22.82
		1 RB high	23.82	22.81
		50% RB mid	23.80	22.80
		100% RB	24.73	23.77
	844.0	1 RB low	24.55	23.58
		1 RB high	24.32	23.37
		50% RB mid	23.70	22.67
		100% RB	23.72	22.68

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China


4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.

Rule Part 22H.232(b) specifies, "Mobile/portable stations are limited to 7 watts e.i.r.p.

TEST CONFIGURATION

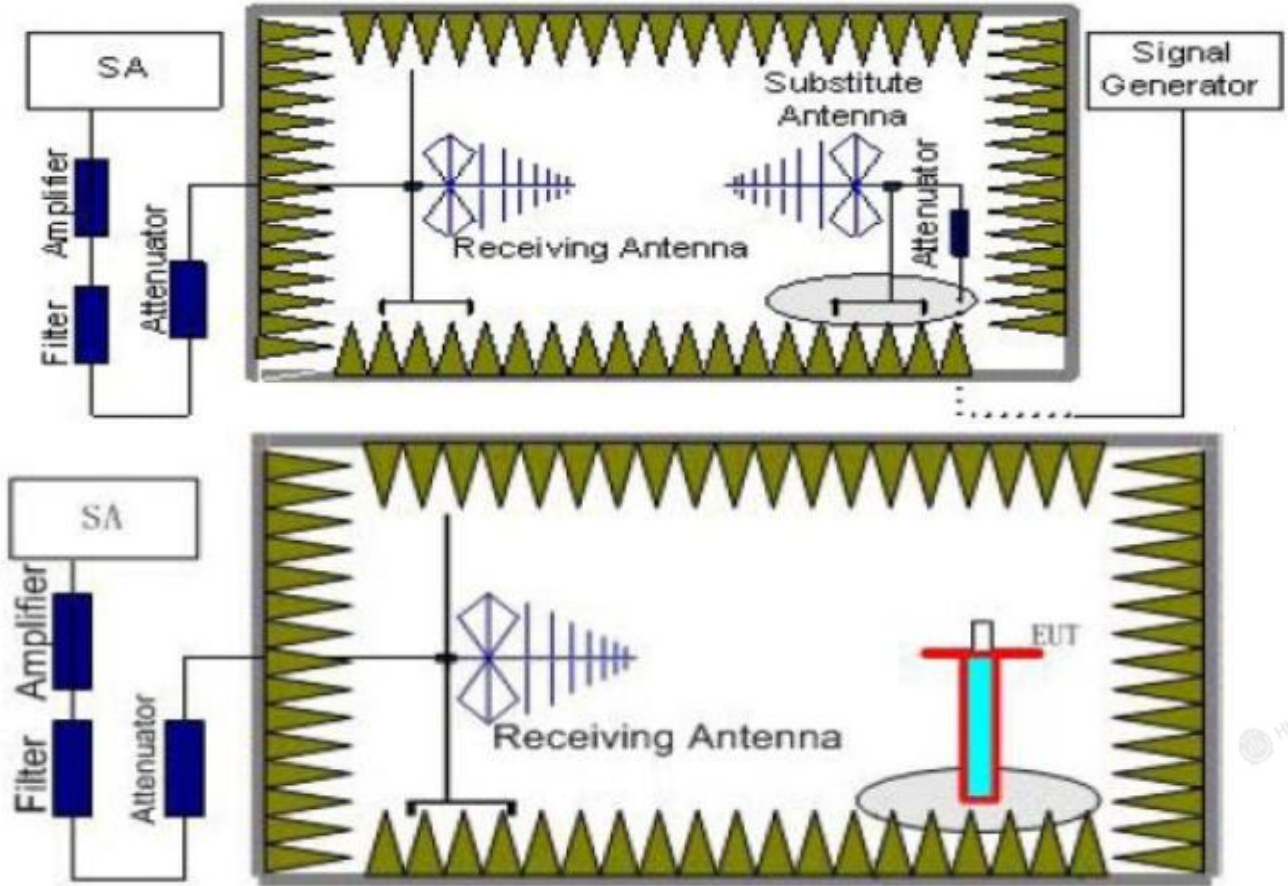

TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver.



- 5. reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below: $Power(EIRP)=P_{Mea}-P_{Ag}-P_{cl}+G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$Power(EIRP)=P_{Mea}-P_{cl}+G_a$

- 7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 8. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP-2.15dBi$.

TEST RESULTS

Radiated Measurement:

Remark:

- 1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.
- 2. $EIRP=P_{Mea}(dBm)-P_{cl}(dB)+P_{Ag}(dB)+G_a(dBi)$
- 3. We measured both Horizontal and Vertical direction, recorded worst case direction.

LTE FDDBand 5_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-18.61	2.42	8.45	36.82	24.24	22.09	38.45	16.36	V
836.5	-17.12	3.46	8.45	36.82	24.69	22.54	38.45	15.91	V
848.3	-19.5	2.53	8.36	36.82	23.15	21	38.45	17.45	V

LTE FDDBand 5_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-17.91	2.42	8.45	36.82	24.94	22.79	38.45	15.66	V
836.5	-16.85	3.46	8.45	36.82	24.96	22.81	38.45	15.64	V
847.5	-19.35	2.53	8.36	36.82	23.3	21.15	38.45	17.3	V

LTE FDD Band 5_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-18.37	2.42	8.45	36.82	24.48	22.33	38.45	16.12	V
836.5	-16.58	3.46	8.45	36.82	25.23	23.08	38.45	15.37	V
846.5	-19.77	2.53	8.36	36.82	22.88	20.73	38.45	17.72	V

LTE FDD Band 5_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.67	2.42	8.45	36.82	24.18	22.03	38.45	16.42	V
836.5	-15.81	3.46	8.45	36.82	26	23.85	38.45	14.6	V
844.0	-17.35	2.53	8.36	36.82	25.3	23.15	38.45	15.3	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



LTE FDD Band 5_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-18.65	2.42	8.45	36.82	24.2	22.05	38.45	16.4	V
836.5	-17.13	3.46	8.45	36.82	24.68	22.53	38.45	15.92	V
848.3	-19.44	2.53	8.36	36.82	23.21	21.06	38.45	17.39	V

LTE FDD Band 5_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-18.31	2.42	8.45	36.82	24.54	22.39	38.45	16.06	V
836.5	-16.86	3.46	8.45	36.82	24.95	22.8	38.45	15.65	V
847.5	-19.29	2.53	8.36	36.82	23.36	21.21	38.45	17.24	V

LTE FDD Band 5_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-17.33	2.42	8.45	36.82	25.52	23.37	38.45	15.08	V
836.5	-17.17	3.46	8.45	36.82	24.64	22.49	38.45	15.96	V
846.5	-18.16	2.53	8.36	36.82	24.49	22.34	38.45	16.11	V

LTE FDD Band 5_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-17.57	2.42	8.45	36.82	25.28	23.13	38.45	15.32	V
836.5	-16.94	3.46	8.45	36.82	24.87	22.72	38.45	15.73	V
844.0	-18.6	2.53	8.36	36.82	24.05	21.9	38.45	16.55	V

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

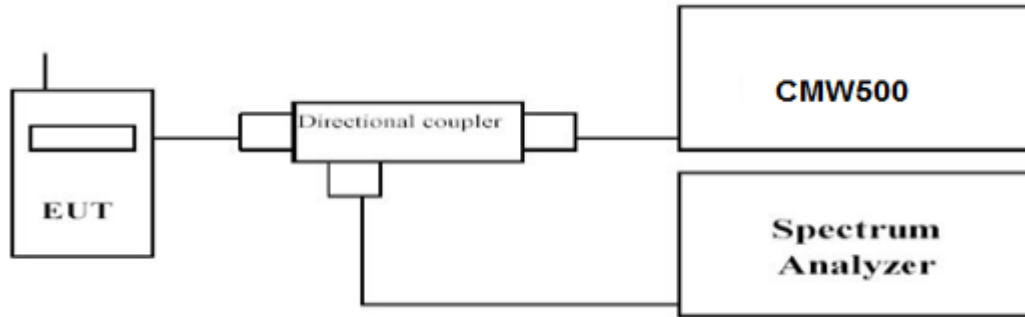

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms;
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

LTE FDD Band 5				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
1.4 MHz	824.7	1RB#0	4.56	5.62
	836.5		4.69	5.51
	848.3		3.60	4.52
3 MHz	825.5	1RB#0	4.21	5.29
	836.5		4.27	5.19
	847.5		3.57	4.61
5 MHz	826.5	1RB#0	4.18	4.91
	836.5		4.02	4.79
	846.5		3.96	4.58
10 MHz	829.0	1RB#0	4.04	5.26
	836.5		3.70	4.72
	844.0		4.23	5.17

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.





LTE FDD Band 5- 1.4 MHz Channel BandwidthPAPR

QPSK

16QAM


Low Channel

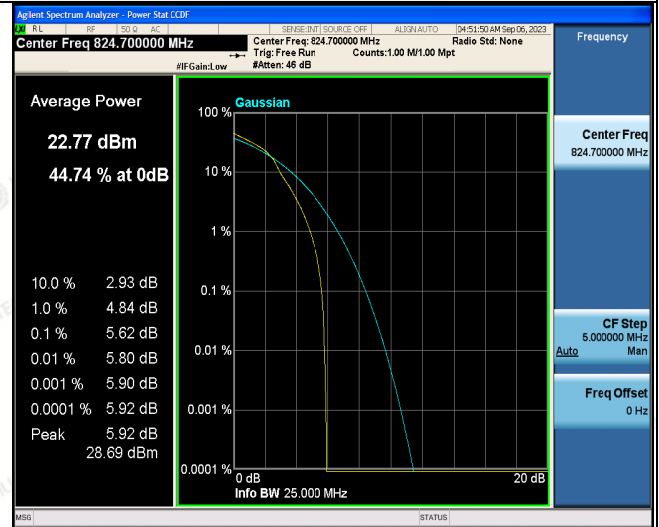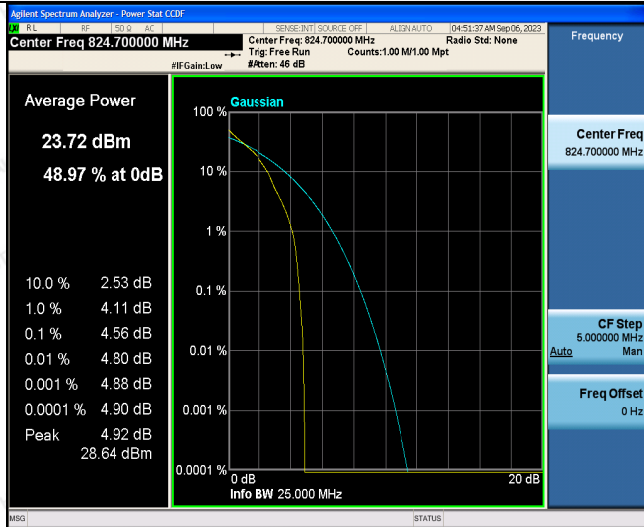

1RB#0

1RB#0



Middle Channel

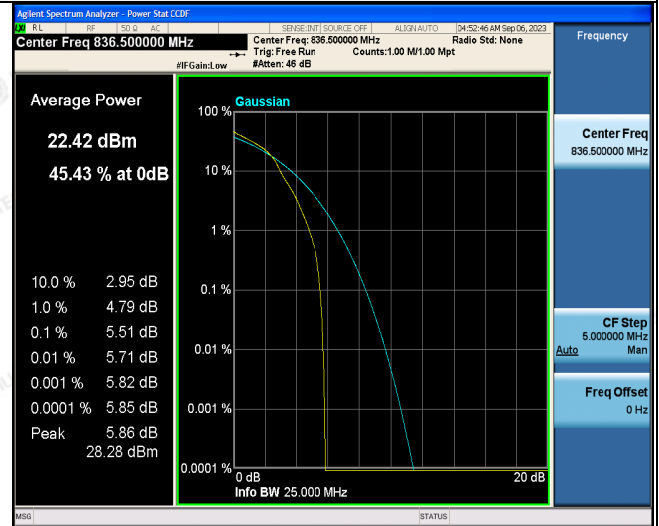

1RB#0

1RB#0

High Channel

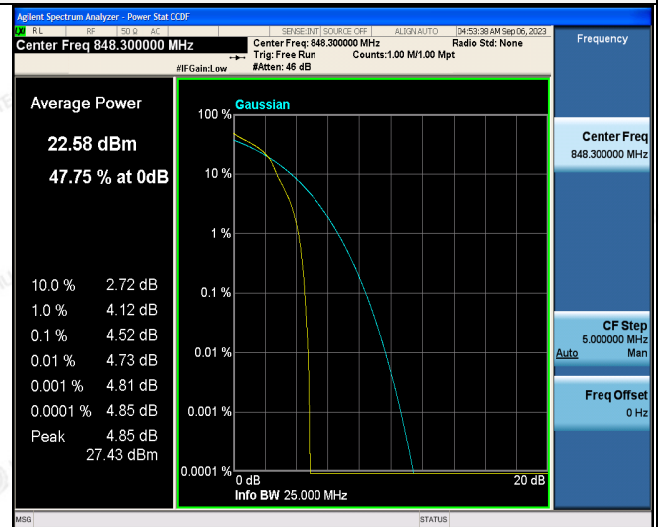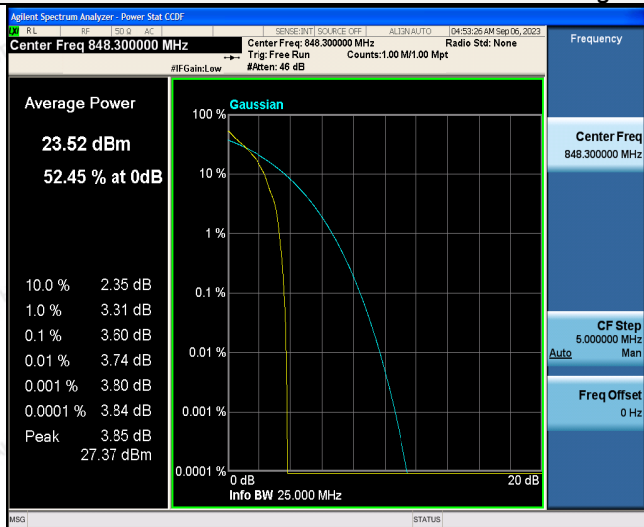

1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. This document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 5-3MHz Channel BandwidthPAPR

QPSK

16QAM



Low Channel

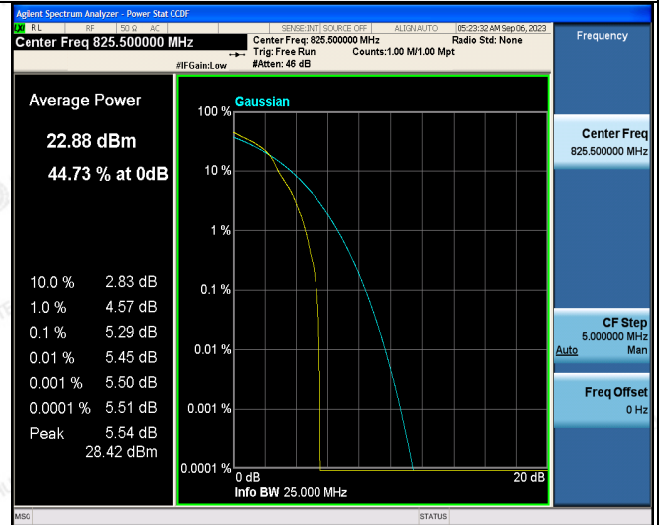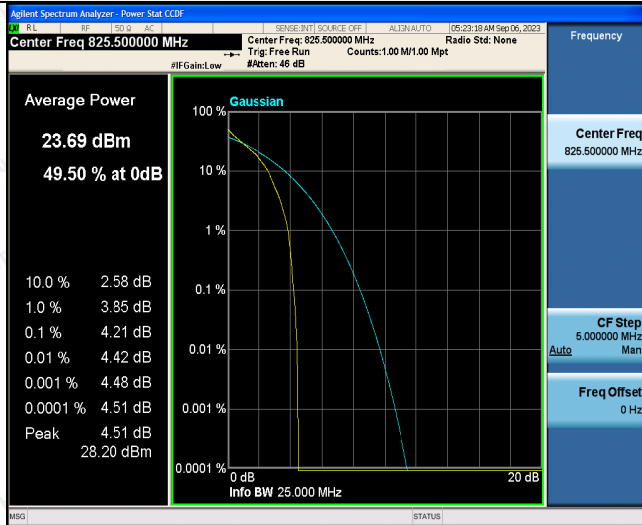

1RB#0

1RB#0



Middle Channel

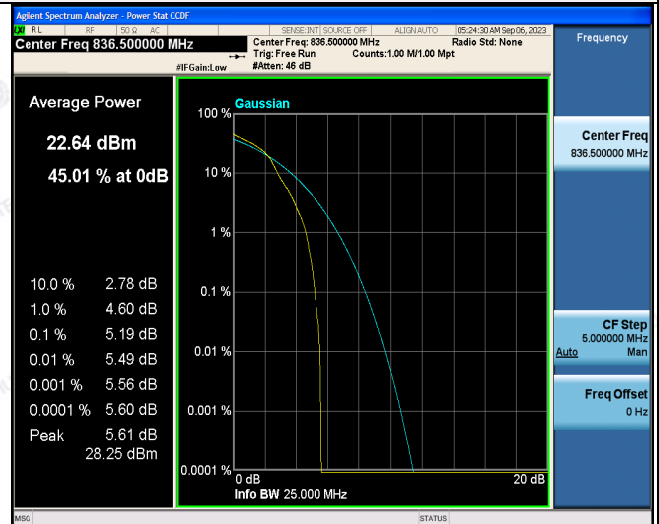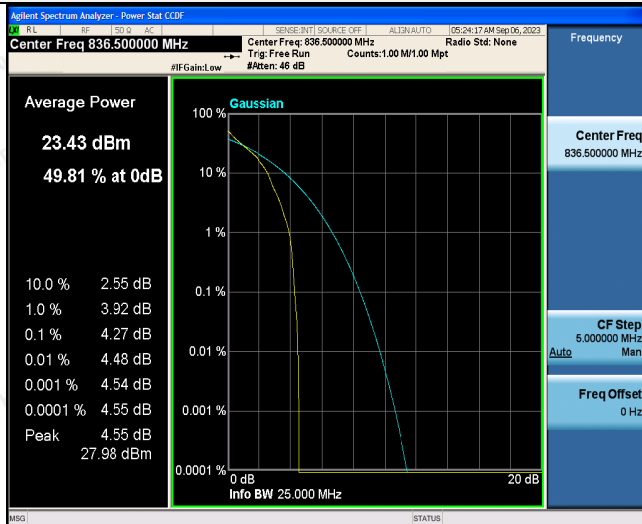

1RB#0

1RB#0

High Channel

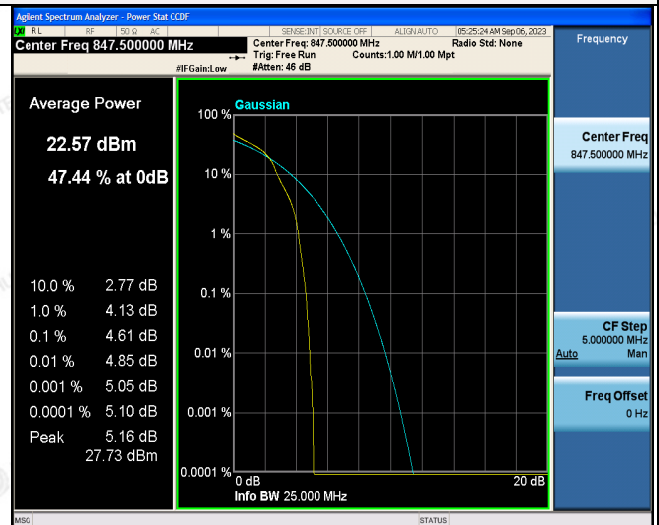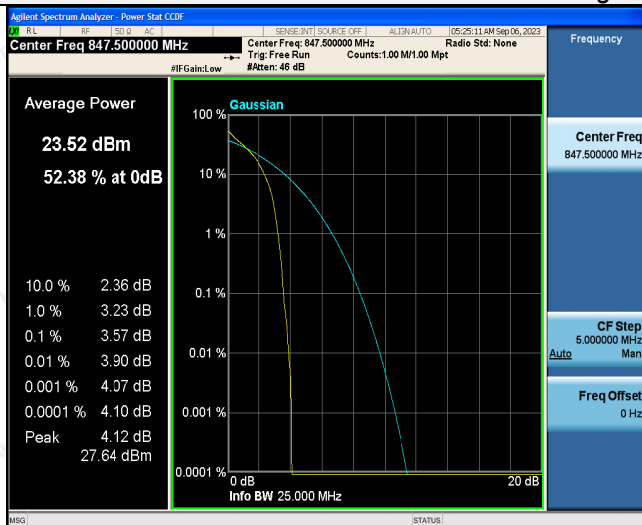

1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 5-5MHz Channel BandwidthPAPR

QPSK

16QAM



Low Channel

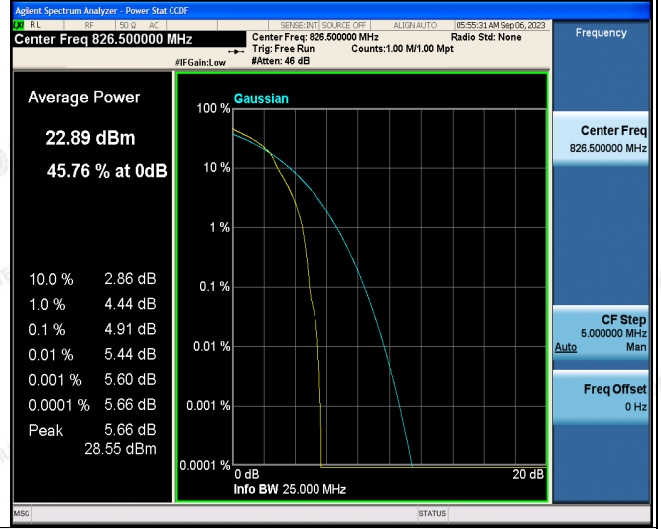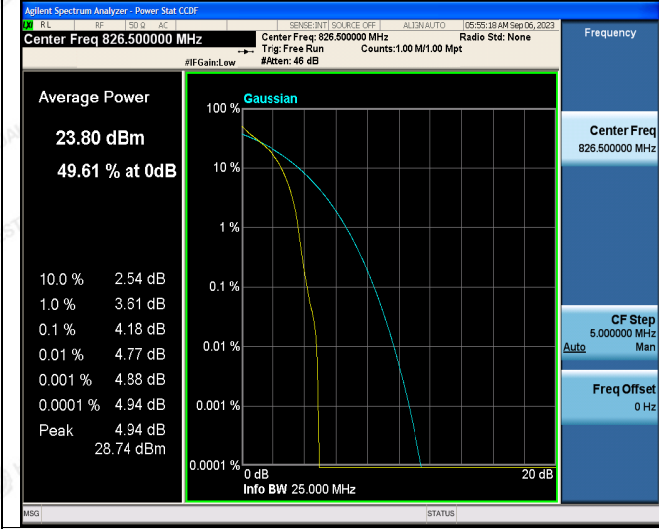

1RB#0

1RB#0


Middle Channel

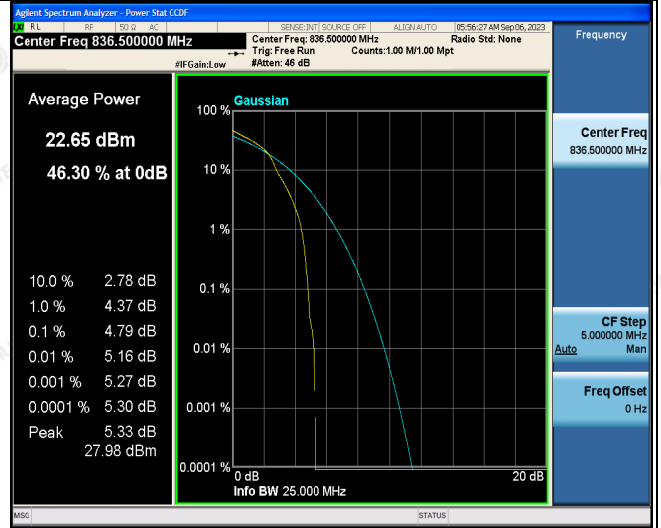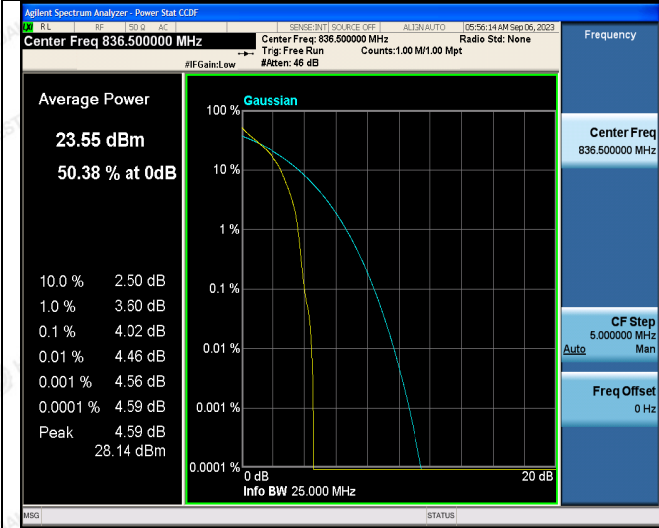

1RB#0

1RB#0

High Channel

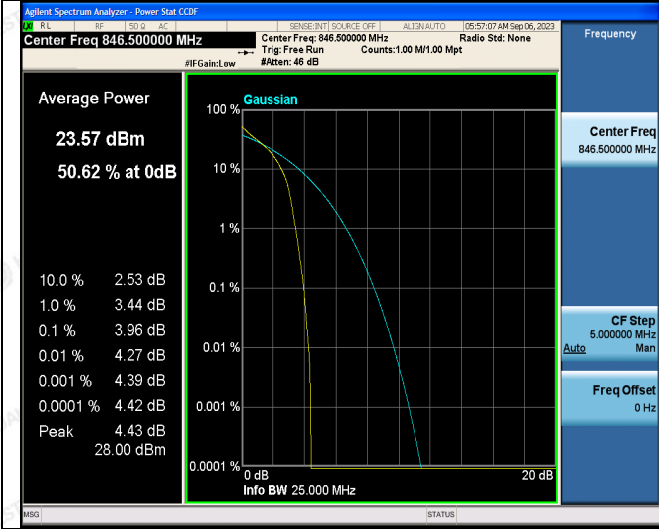


1RB#0

1RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

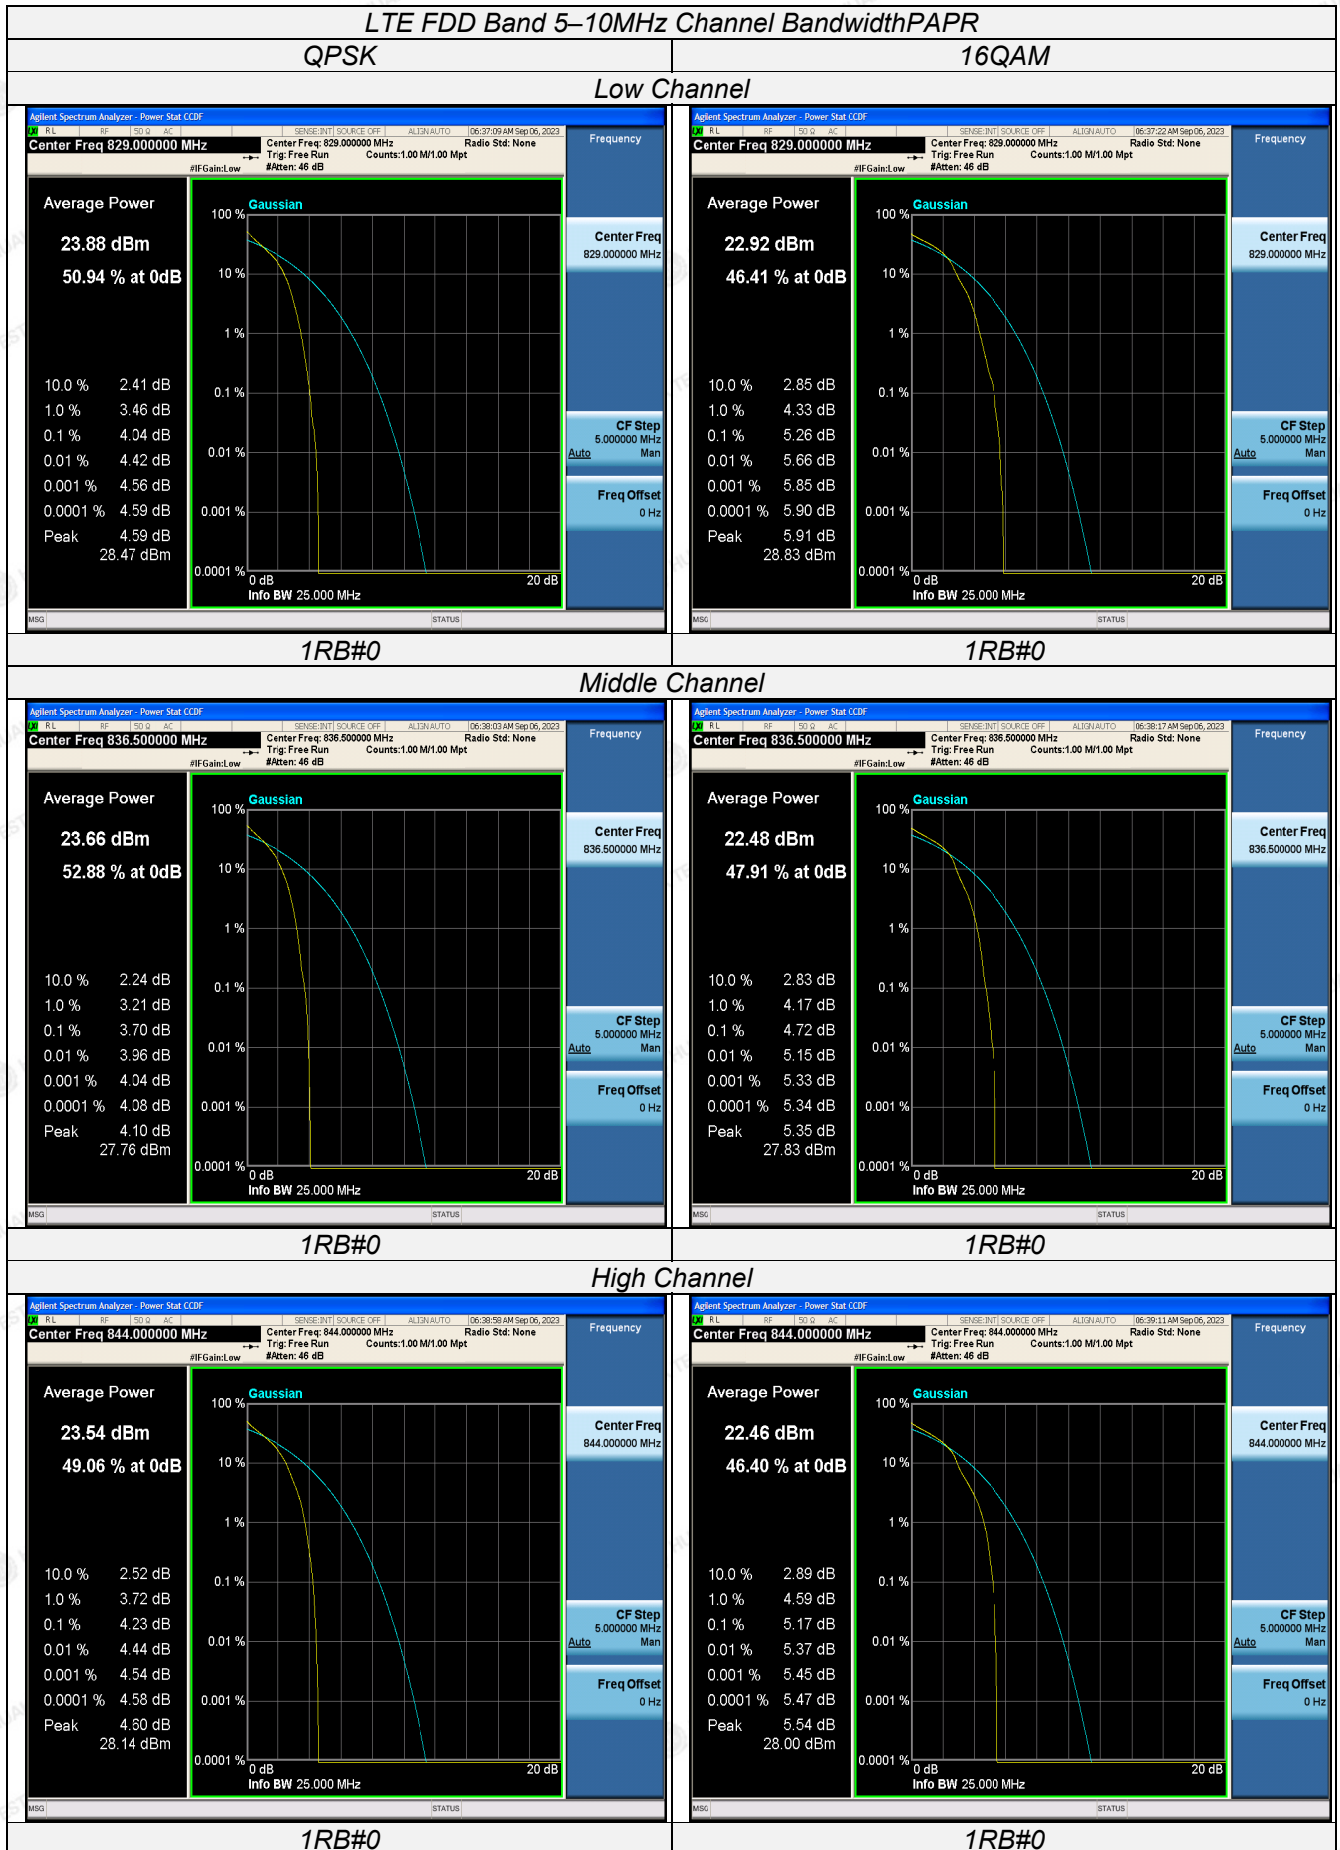

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

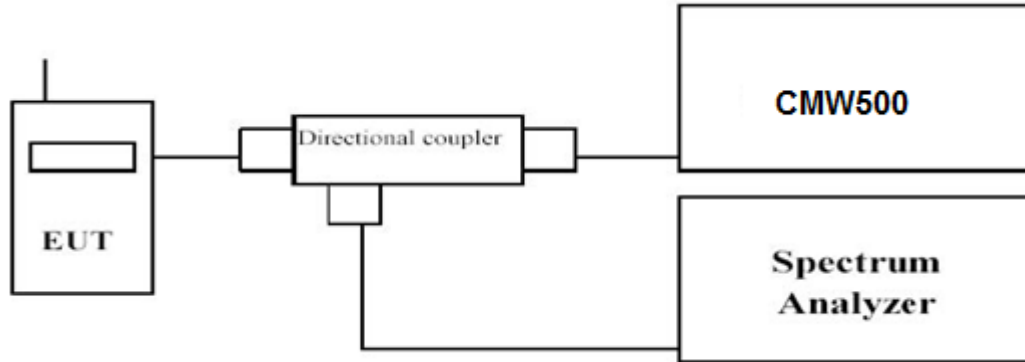

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW ≥ 3 times RBW. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.

LTE FDD Band 5						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	824.7	1.265	1.282	1.0929	1.0993
		836.5	1.264	1.276	1.0936	1.0990
		848.3	1.270	1.272	1.0992	1.0979
3 MHz	15RB#0	825.5	2.937	2.975	2.6975	2.6943
		836.5	2.941	2.947	2.6884	2.6932
		847.5	2.960	2.965	2.7005	2.6930
5 MHz	25RB#0	826.5	5.084	5.046	4.5309	4.5181
		836.5	5.051	5.016	4.5263	4.5080
		846.5	5.081	5.098	4.5164	4.5411
10 MHz	50RB#0	829.0	9.937	9.938	9.0222	9.0037
		836.5	9.815	9.851	8.9565	8.9535
		844.0	9.981	9.921	9.0358	9.0396

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.





LTE FDD Band 5- 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM


Low Channel

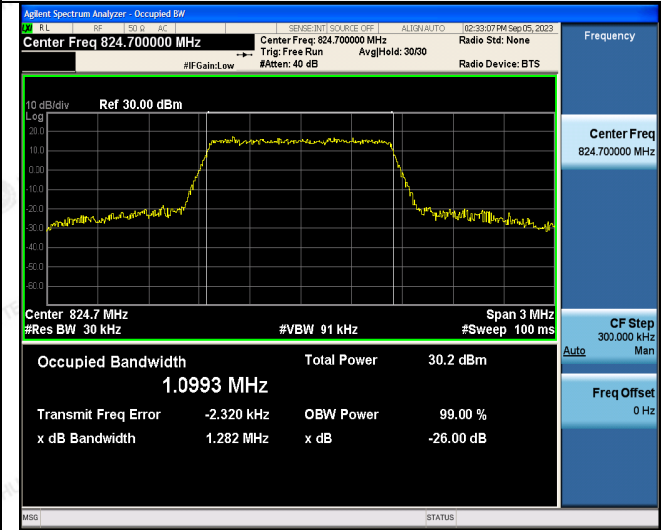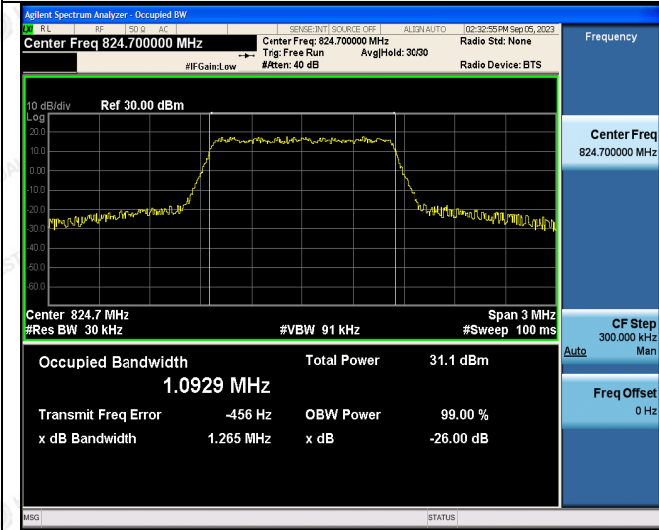

6RB#0

6RB#0



Middle Channel

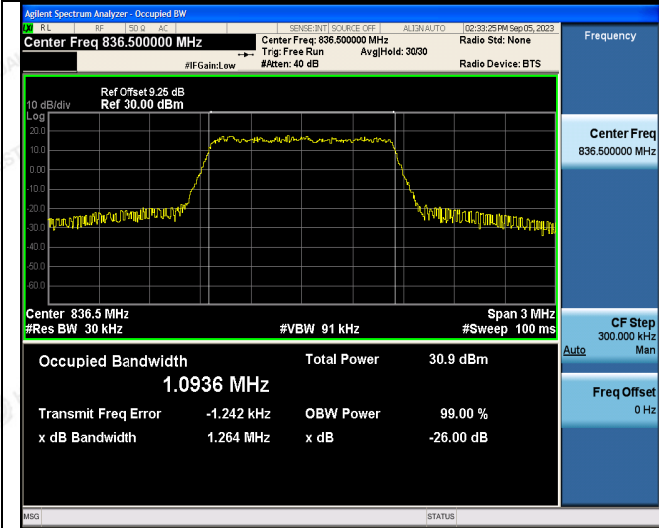

6RB#0

6RB#0

High Channel

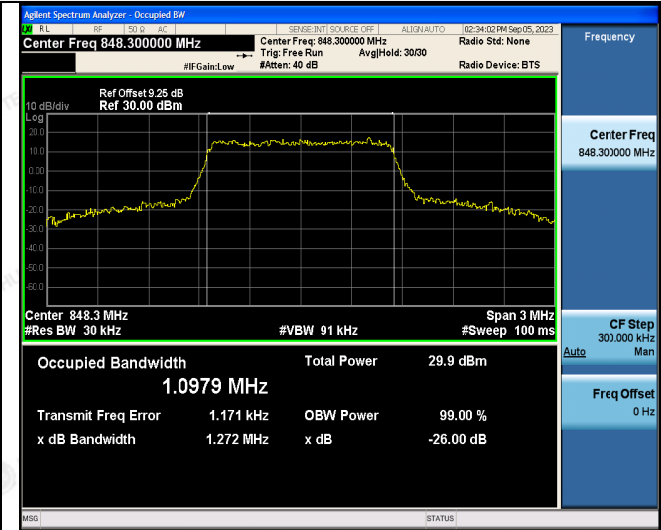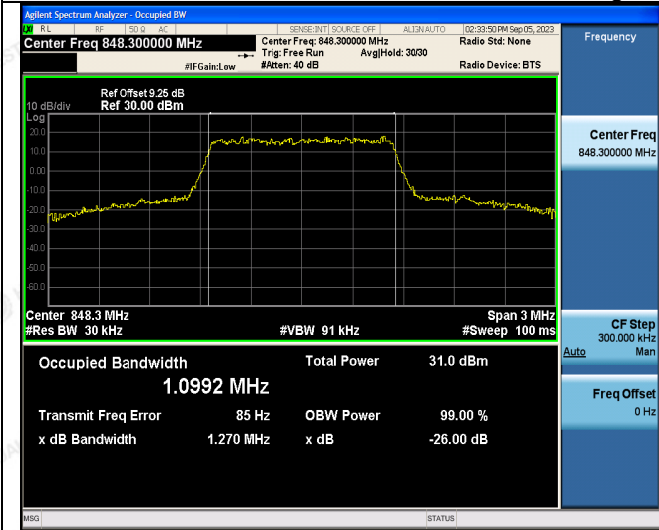

6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. This document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 5-3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

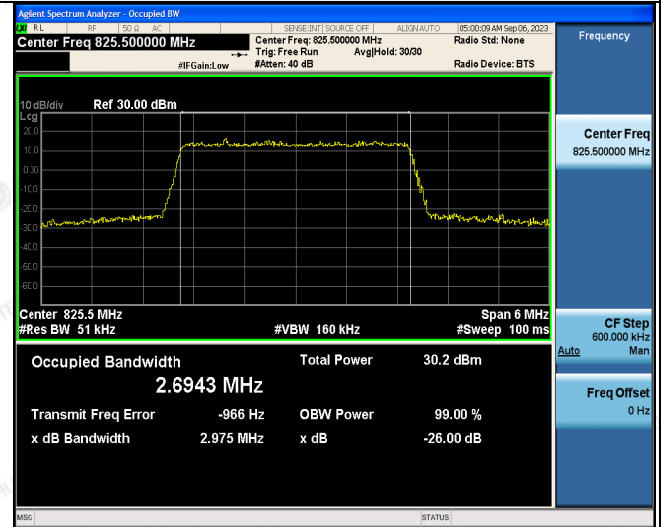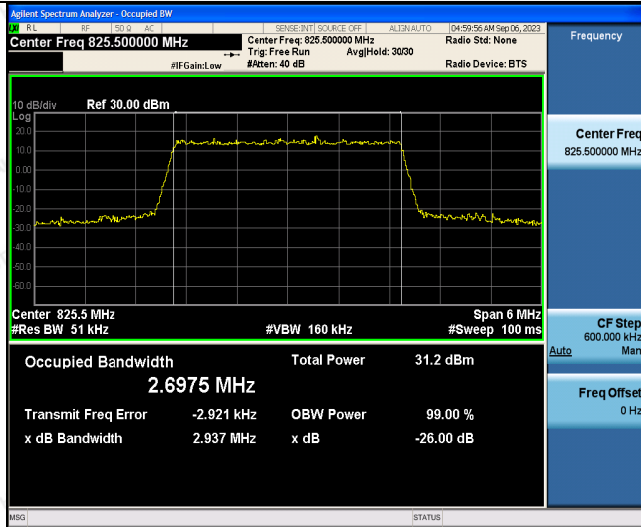

15RB#0

15RB#0



Middle Channel

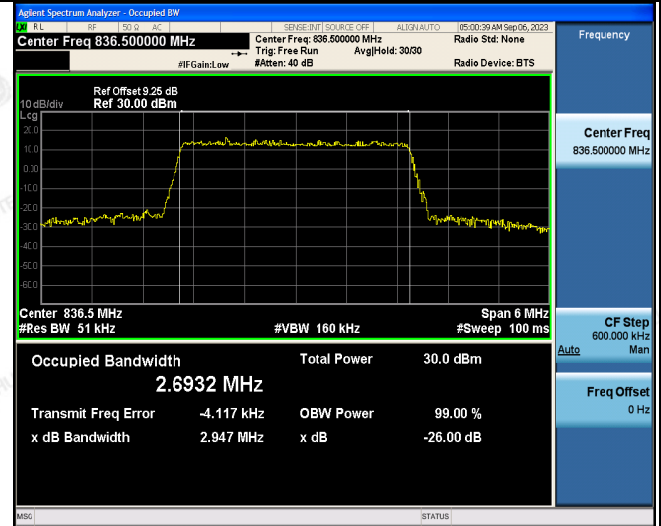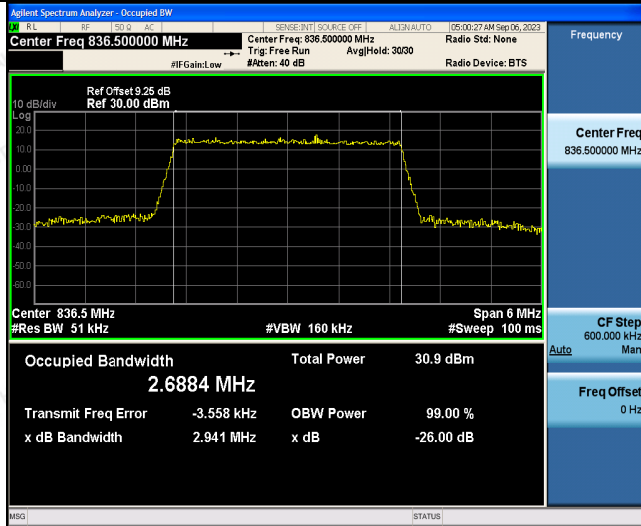

15RB#0

15RB#0

High Channel

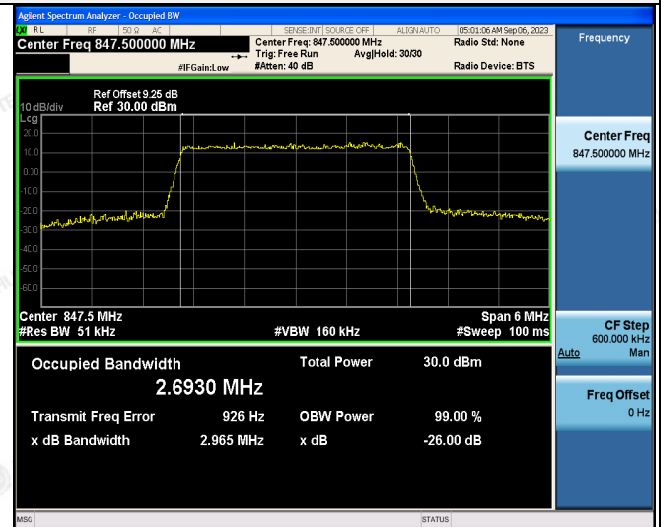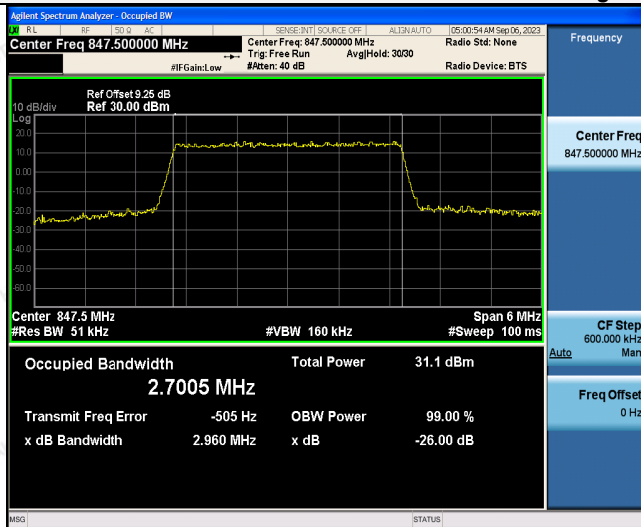

15RB#0

15RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. This document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 5-5MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

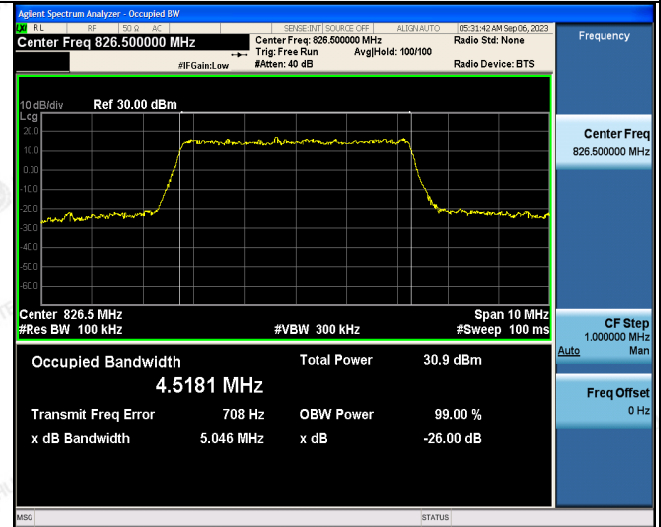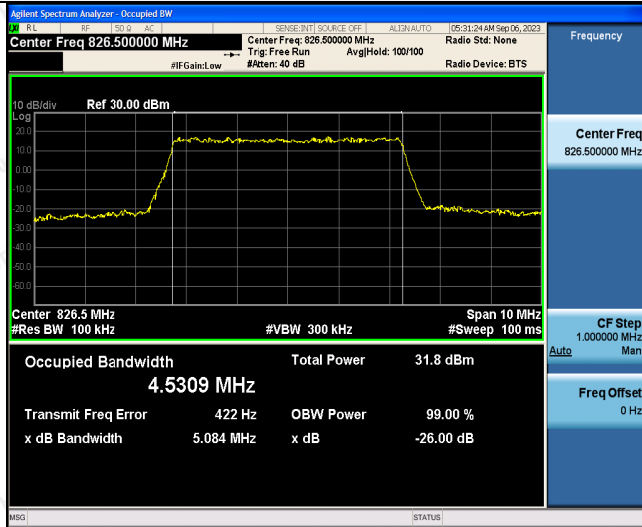

25RB#0

25RB#0



Middle Channel

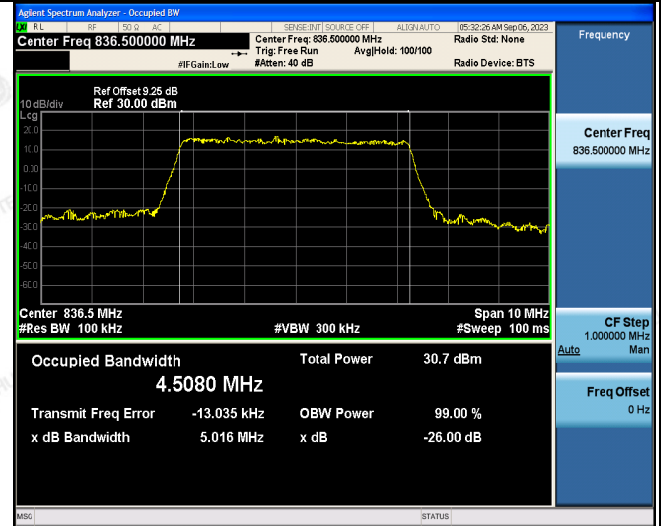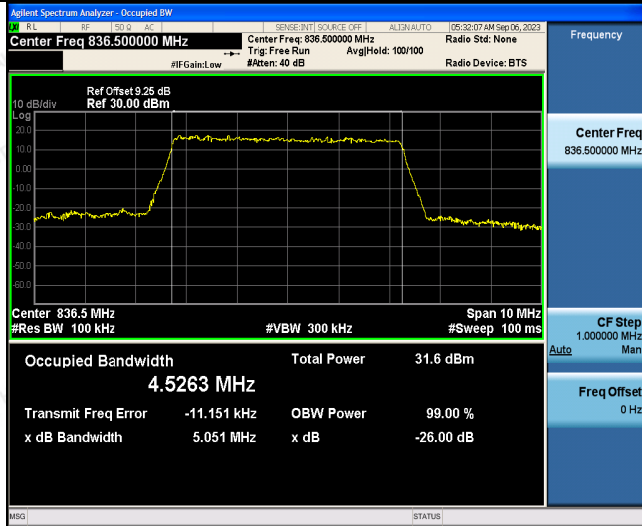

25RB#0

25RB#0

High Channel

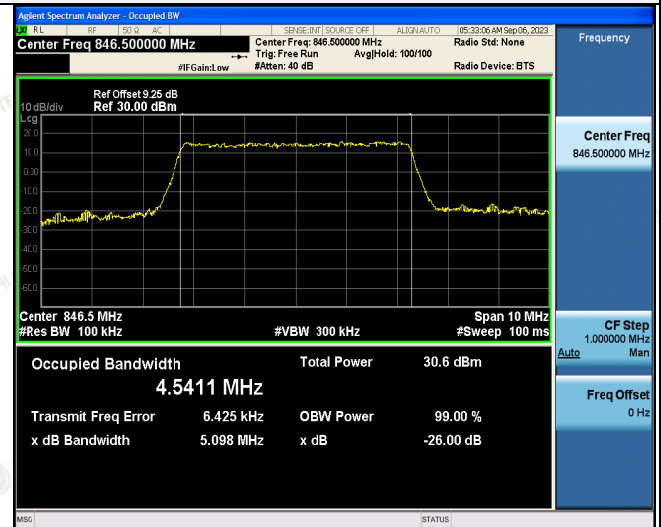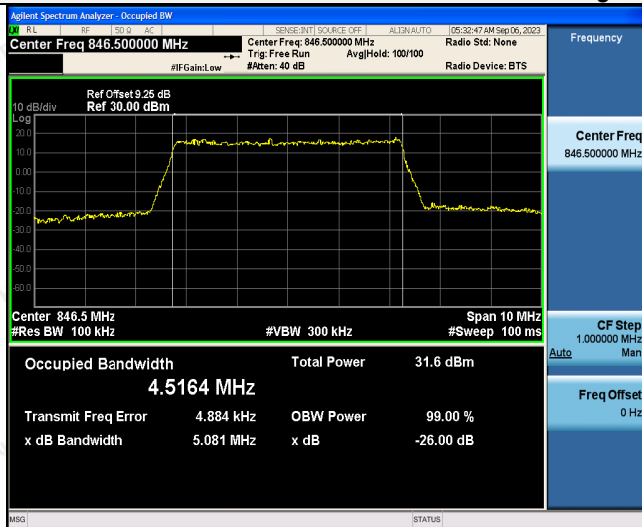

25RB#0

25RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. This document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 5-10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

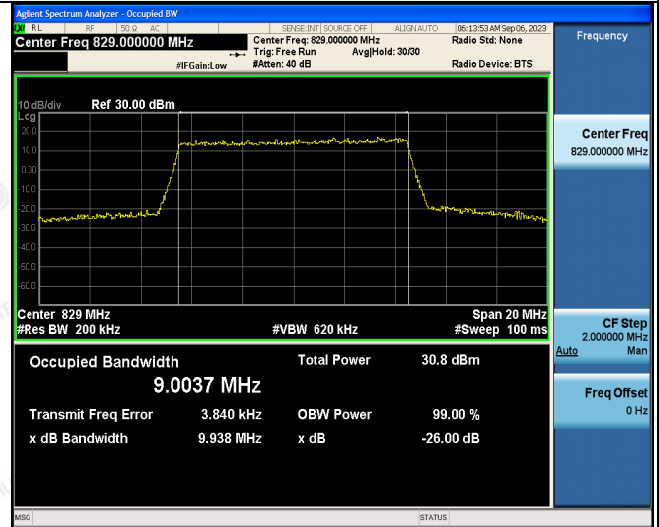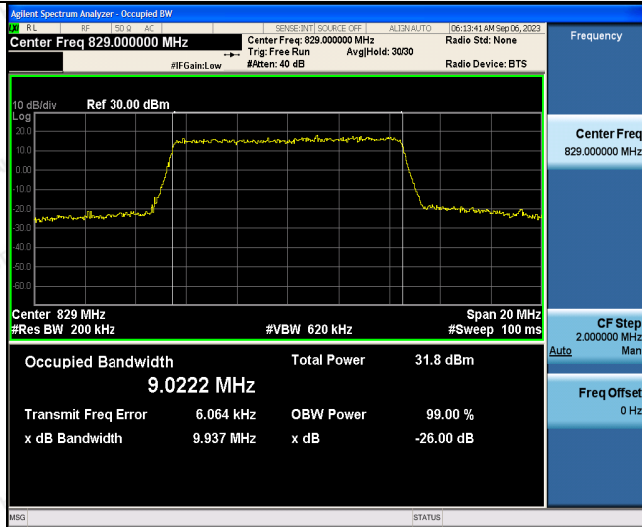

50RB#0

50RB#0



Middle Channel

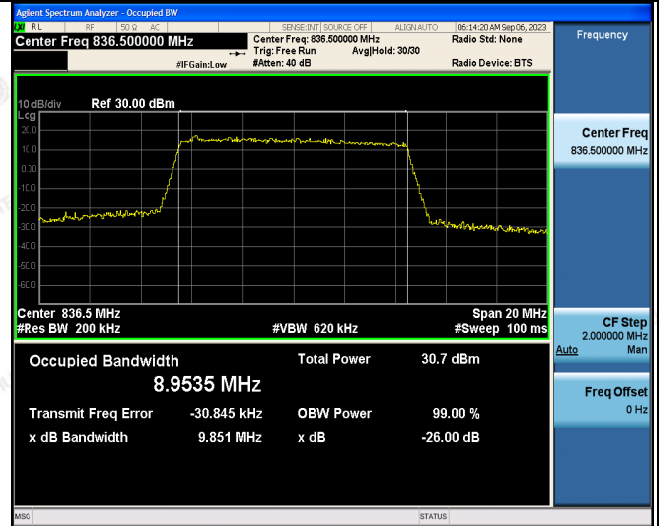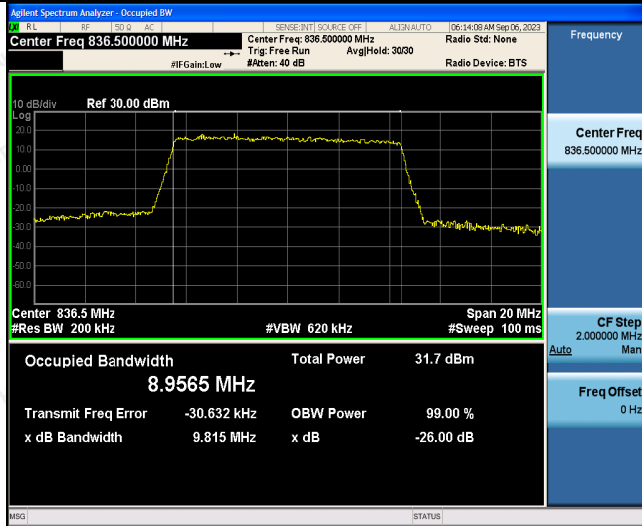

50RB#0

50RB#0

High Channel

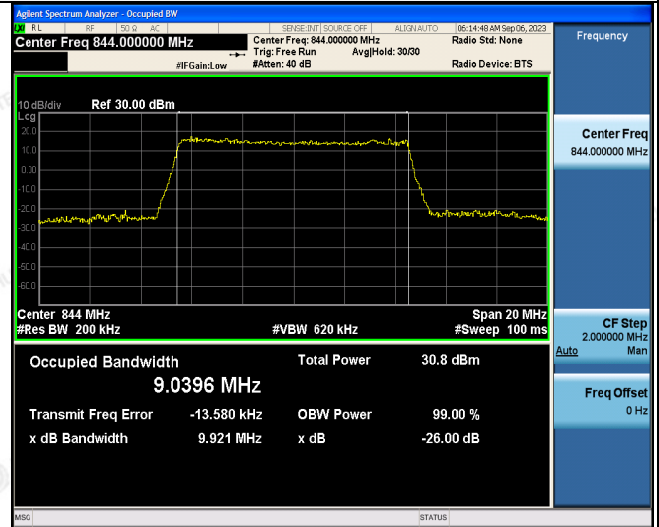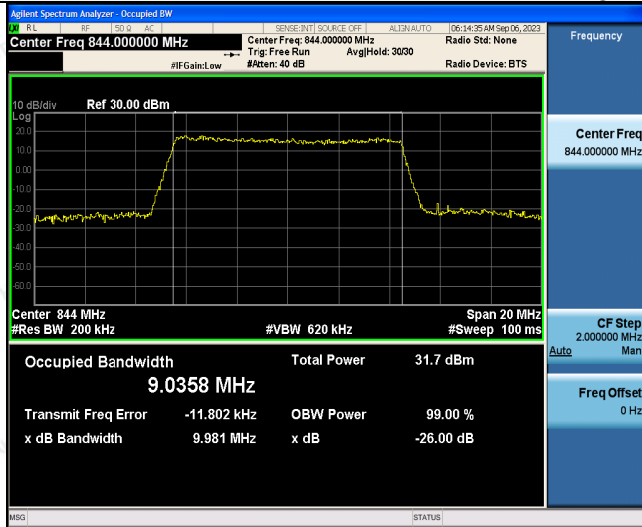

50RB#0

50RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. This document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




4.4 Band Edge Compliance

LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

TEST CONFIGURATION

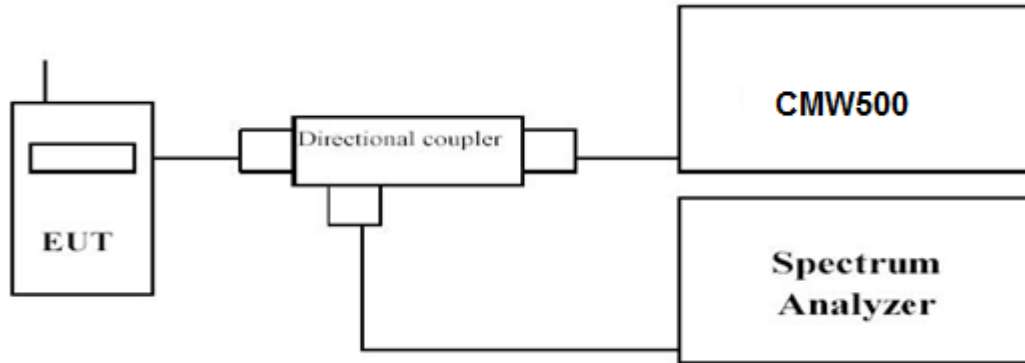

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 5; recorded worst case for each Channel Bandwidth of LTE FDD Band 5.





LTE FDD Band 5- 1.4 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



Low Channel

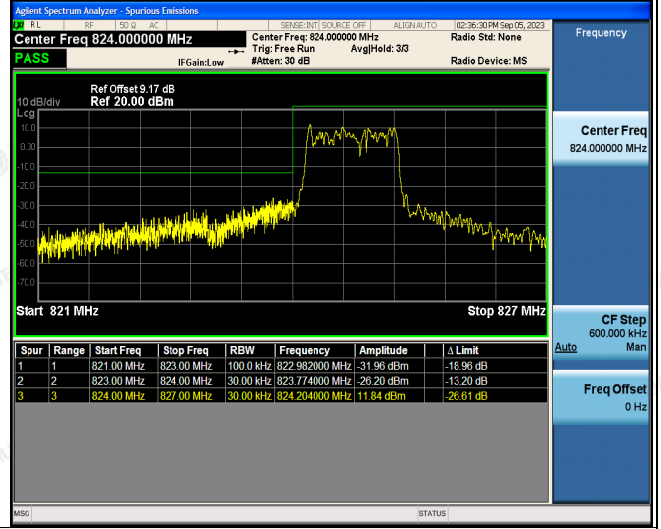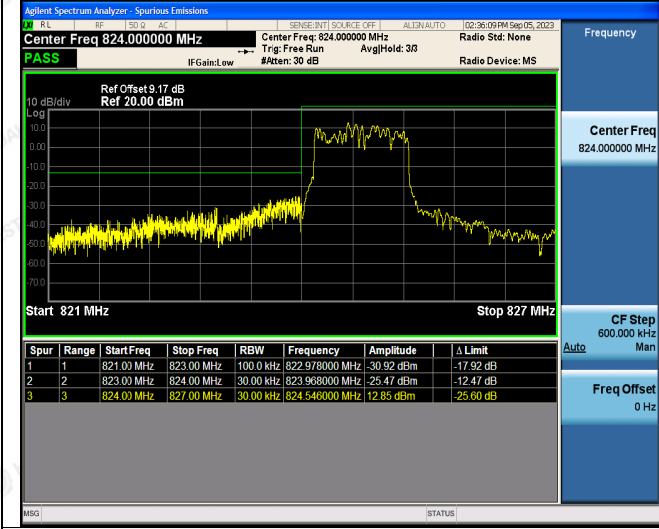

6RB#0

6RB#0

High Channel

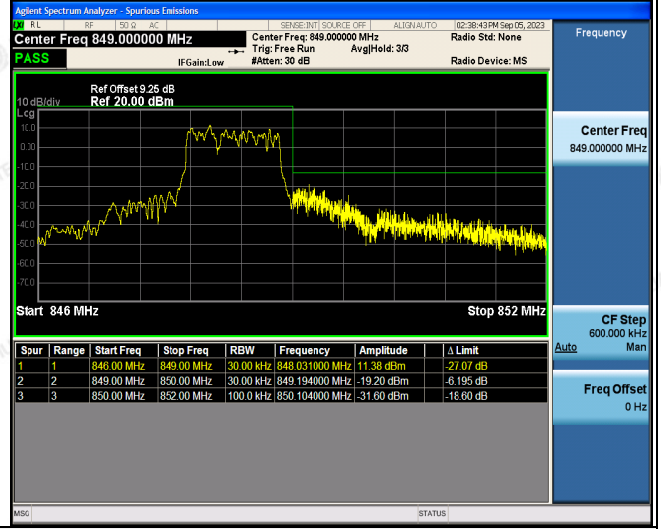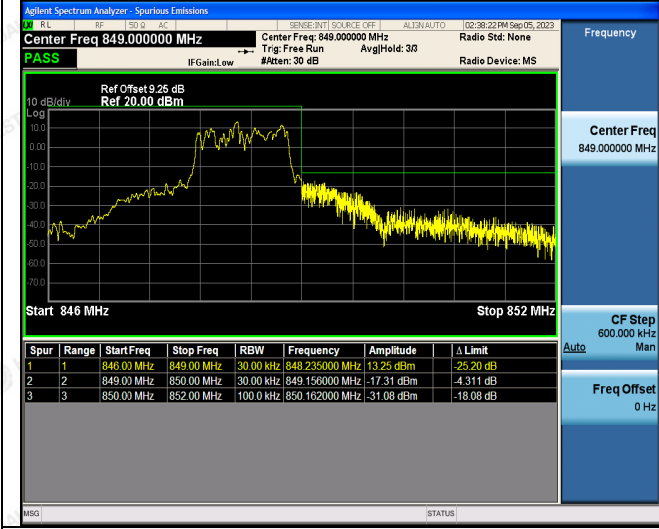


6RB#0

6RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

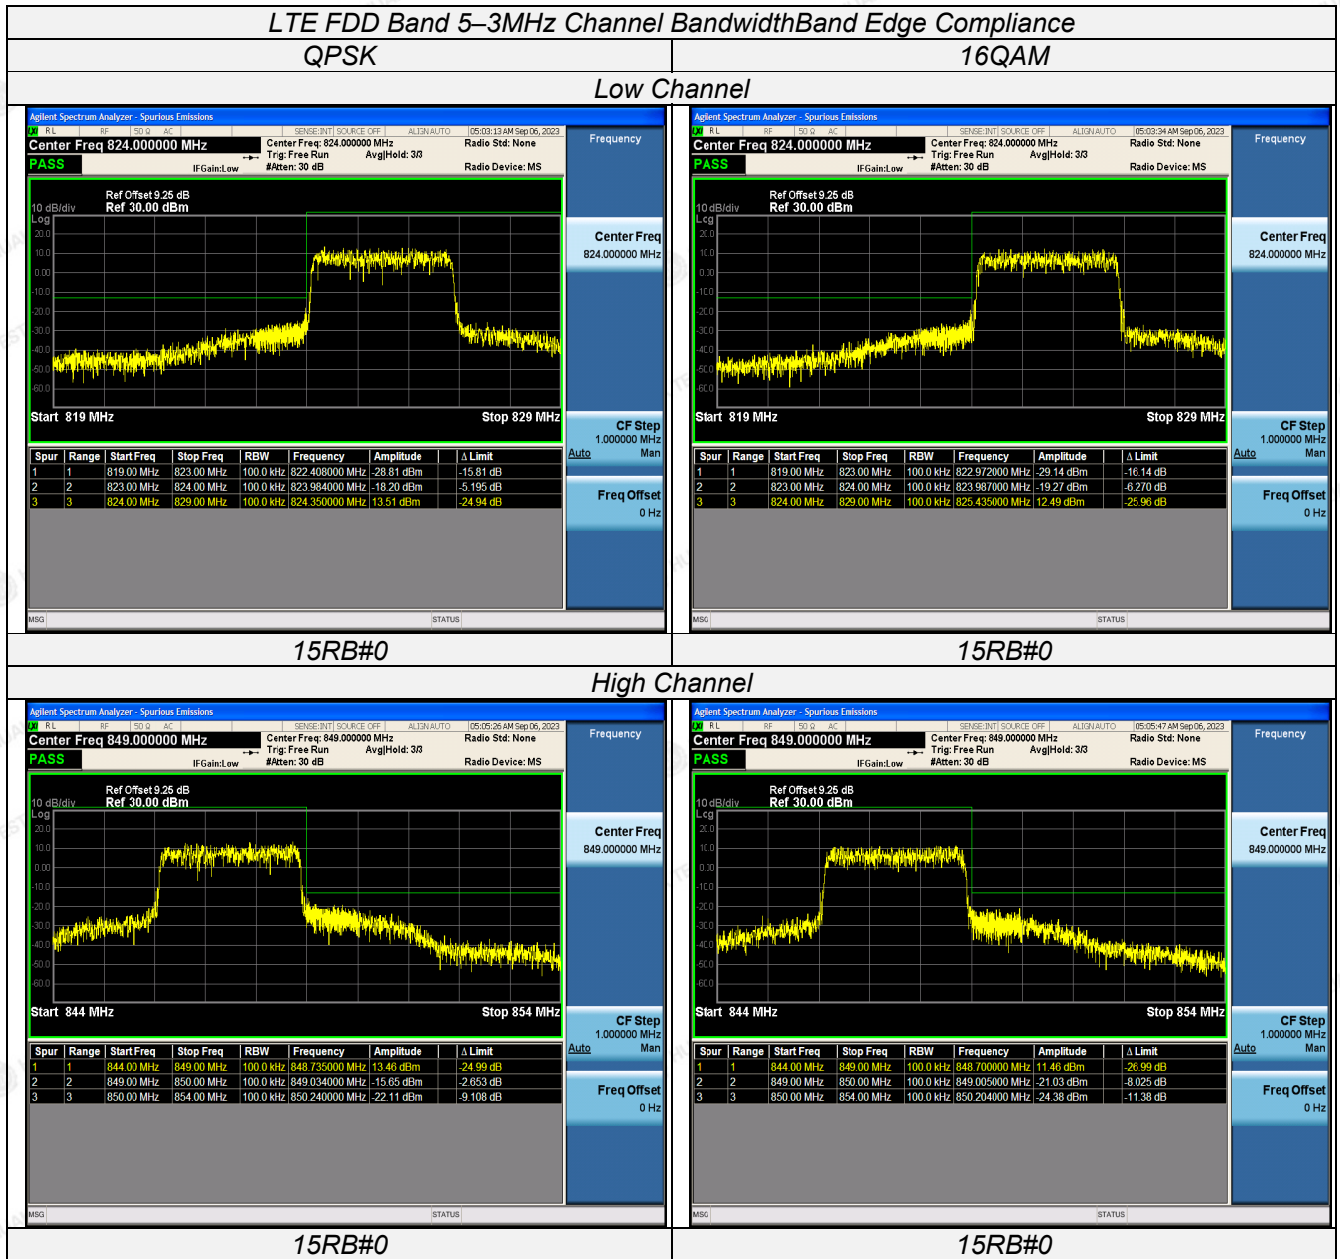

The results shown in this test report refer only to the sample(s) tested otherwise stated and the sample(s) are retained for 90 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 5-5MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



Low Channel

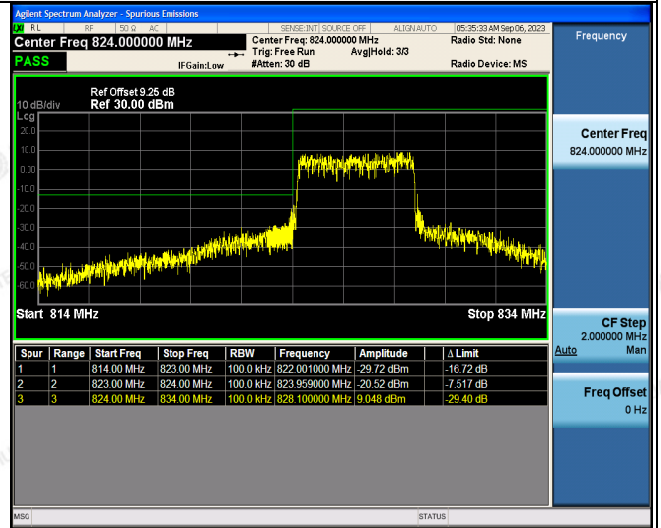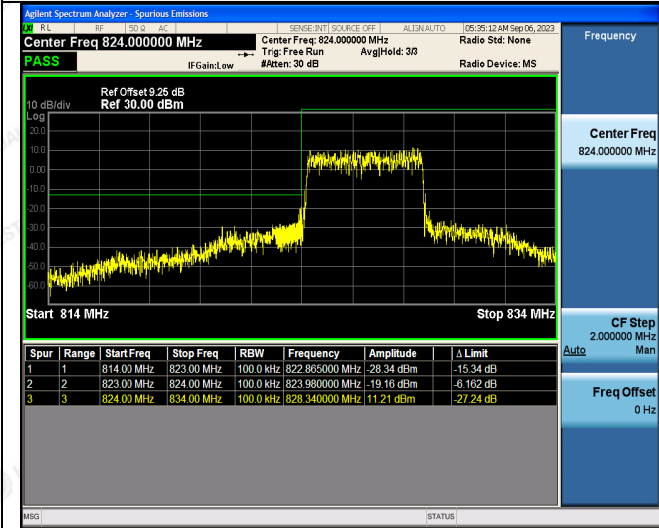

25RB#0

25RB#0

High Channel

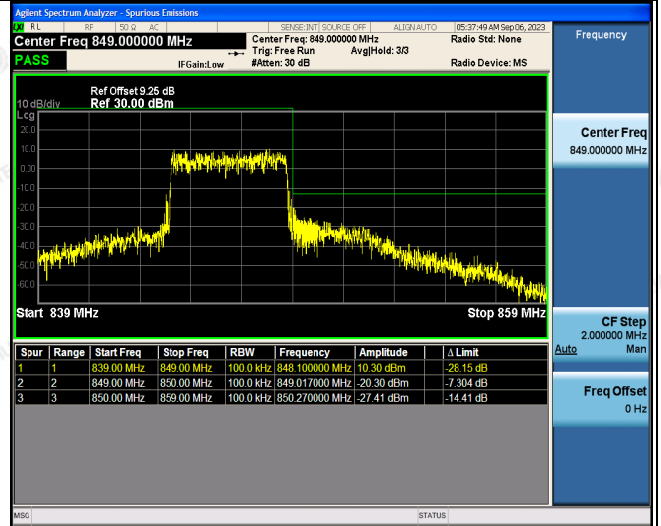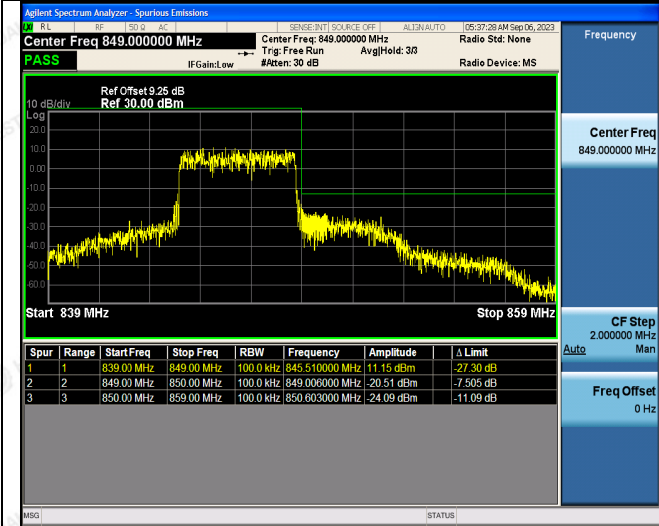

25RB#0

25RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





LTE FDD Band 5- 10 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



Low Channel

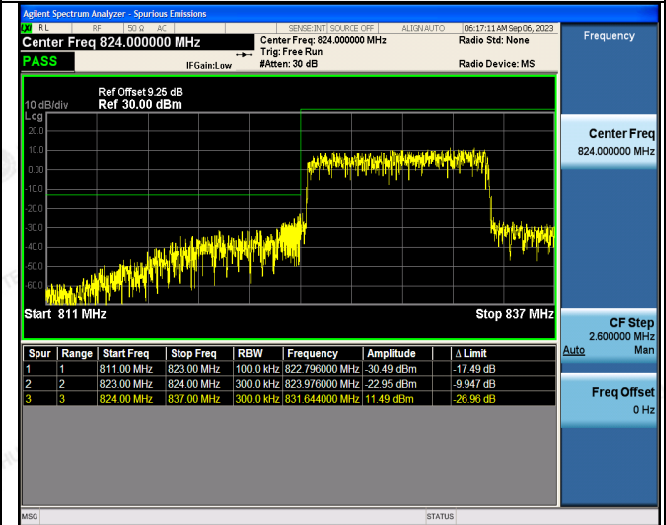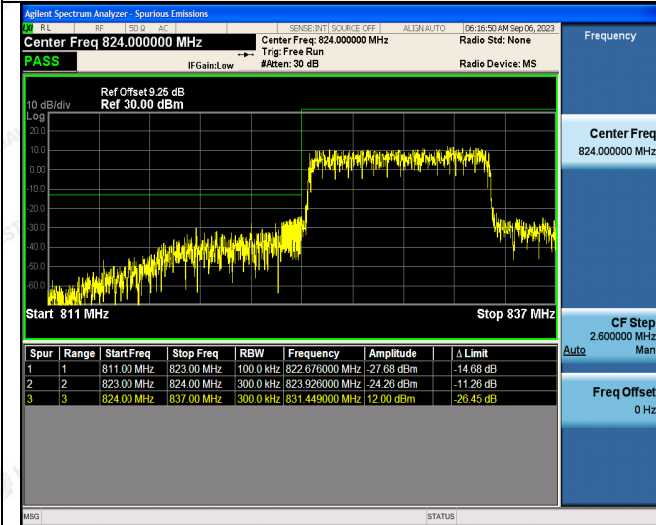

50RB#0

50RB#0

High Channel

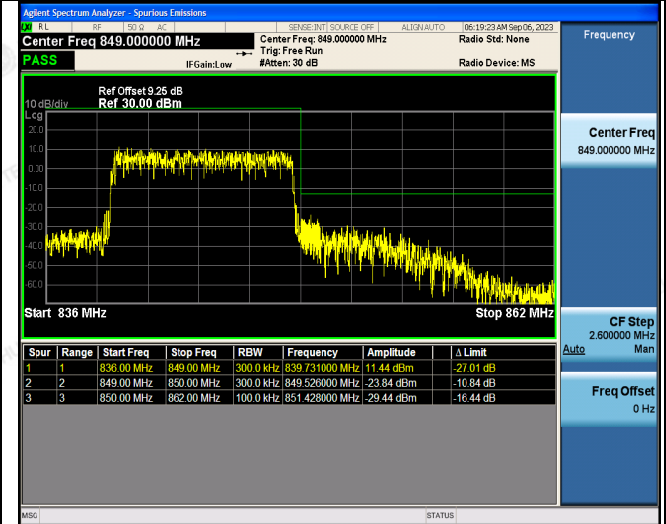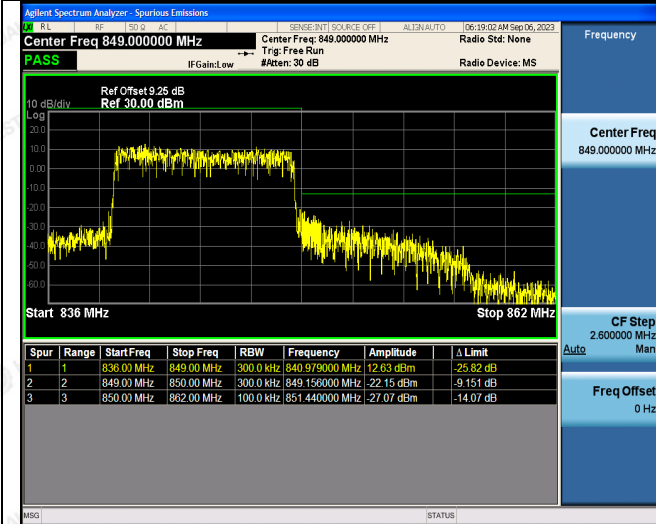

50RB#0

50RB#0

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.cer-mark.com.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China