



Radiates Emission from 110kHz to 490kHz

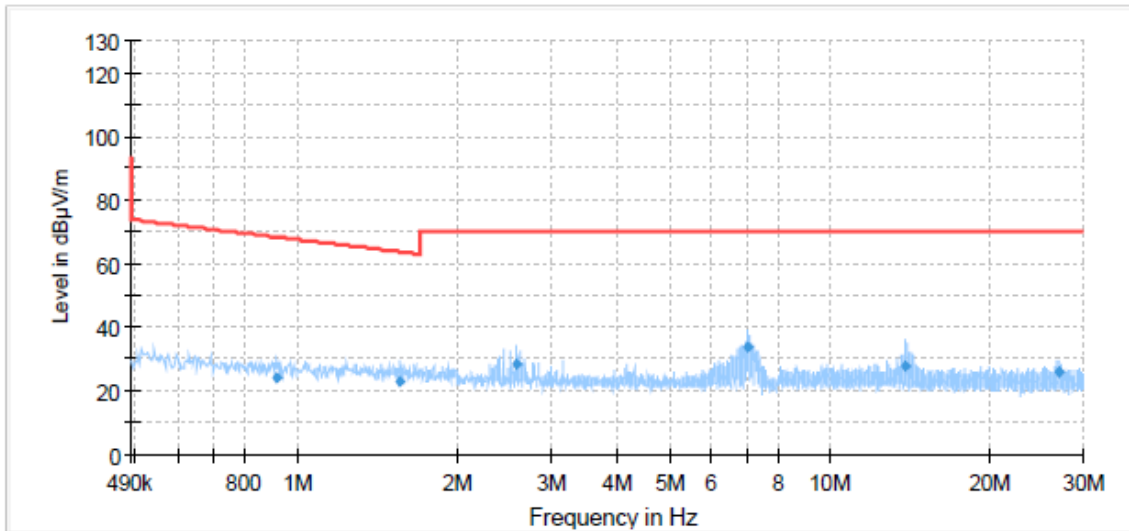

Radiates Emission from 490kHz to 30MHz

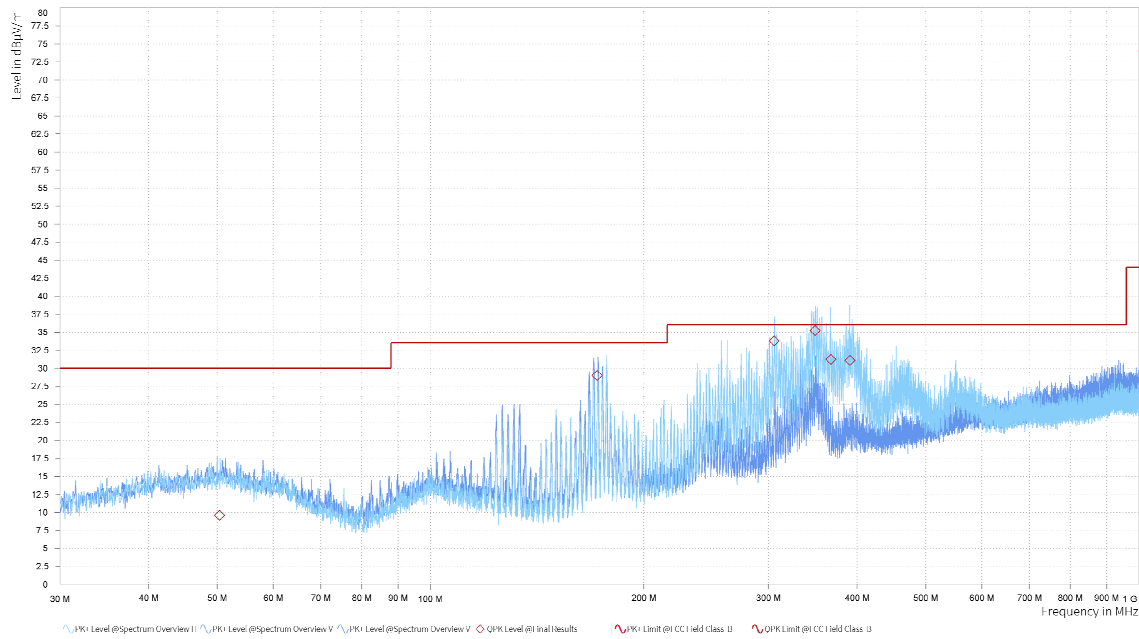


Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (m)	Polarization	Azimuth (deg)	Correct Factor (dB)
50.407	9.57	30.00	20.43	2.25	H	183.6	-8.04
305.653	33.78	36.00	2.22	2.06	H	279.2	-7.79
349.123	35.19	36.00	0.81	1.94	H	309.4	-6.60
367.393	31.20	36.00	4.80	2.22	H	341.7	-6.51
390.924	31.06	36.00	4.94	2.01	H	330	-5.85
171.888	28.97	33.50	4.53	1.05	V	170.4	-12.03

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
 2. Margin = Limit – Quasi-Peak

802.11b CH1

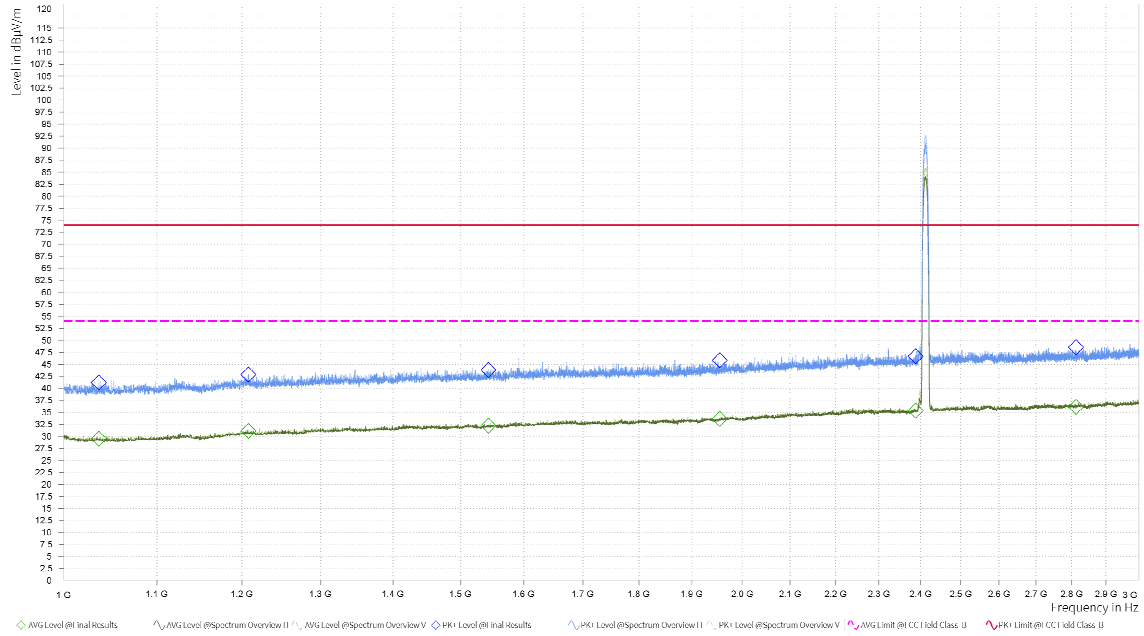

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

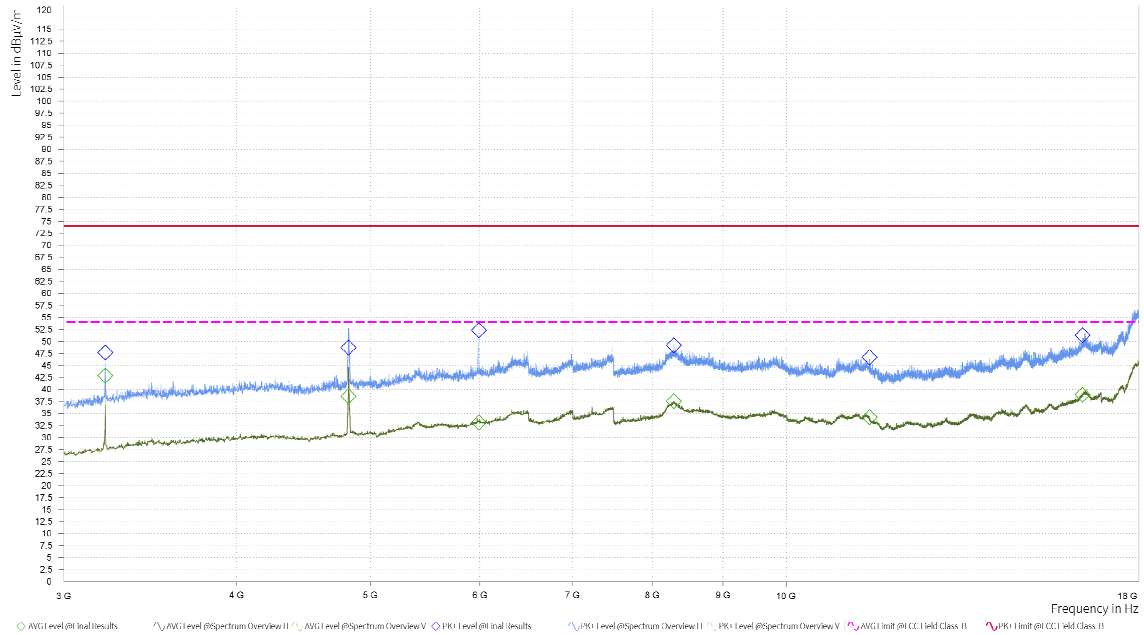


Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	Average (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,036.500	41.16	74.00	32.84	29.46	54.00	24.54	1.000	1.00	V	231.8	-6.58
1,207.750	42.82	74.00	31.18	31.09	54.00	22.91	1.000	1.00	H	298.9	-4.53
1,543.500	43.79	74.00	30.21	32.18	54.00	21.82	1.000	1.00	V	1.4	-2.22
1,955.000	45.81	74.00	28.19	33.61	54.00	20.39	1.000	1.00	H	100	0.35
2,388.000	46.64	74.00	27.36	35.34	54.00	18.66	1.000	2.00	H	102.1	2.40
2,812.750	48.51	74.00	25.49	36.08	54.00	17.92	1.000	2.00	V	155.8	3.69


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit -MAX Peak/ Average

802.11b CH6

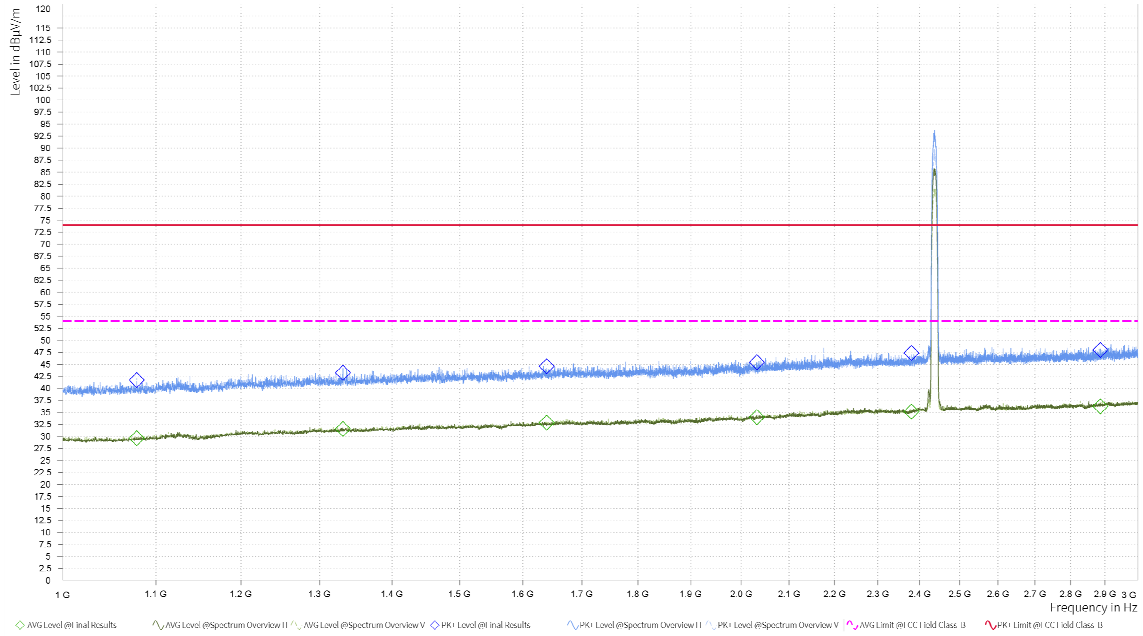

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

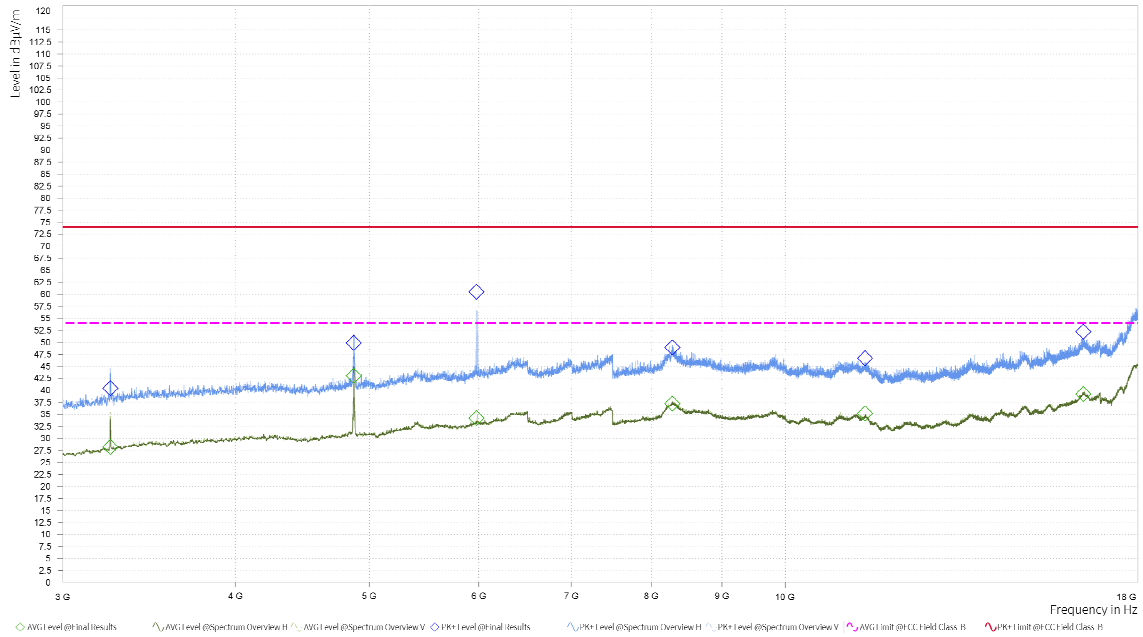

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Peak Limit (dB μ V/m)	Peak Margin (dB)	Average (dB μ V/m)	Average Limit (dB μ V/m)	Average Margin (dB)	Meas. Time (s)	Height (m)	Pol	Azimuth (deg)	Corr. (dB/m)
1,078.500	41.71	74.00	32.29	29.58	54.00	24.42	1.000	1.00	V	320.2	-6.22
1,331.500	43.21	74.00	30.79	31.50	54.00	22.50	1.000	1.00	H	237.6	-3.59
1,639.500	44.56	74.00	29.44	32.79	54.00	21.21	1.000	1.00	V	328.4	-1.49
2,032.250	45.37	74.00	28.63	33.96	54.00	20.04	1.000	1.00	H	357.2	0.82
2,380.000	47.35	74.00	26.65	35.10	54.00	18.90	1.000	2.00	H	238.7	2.26
2,887.000	47.95	74.00	26.05	36.22	54.00	17.78	1.000	1.00	H	278.7	3.97

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit - MAX Peak/ Average