



Bluetooth Antenna  
specification&Test report

Yichip Microelectronics

©2014


Manufacturer

SHENZHEN STARWAVE INDUSTRIAL TECHNOLOGY CO.,LTD

Add: 1505 Floor 15,Huaide International Building,No.73, Fuyong Section,Guangshen Road,Huaide Community, Fuyong Street, Bao'an District, Shenzhen, China

Model: 144A


ANT :

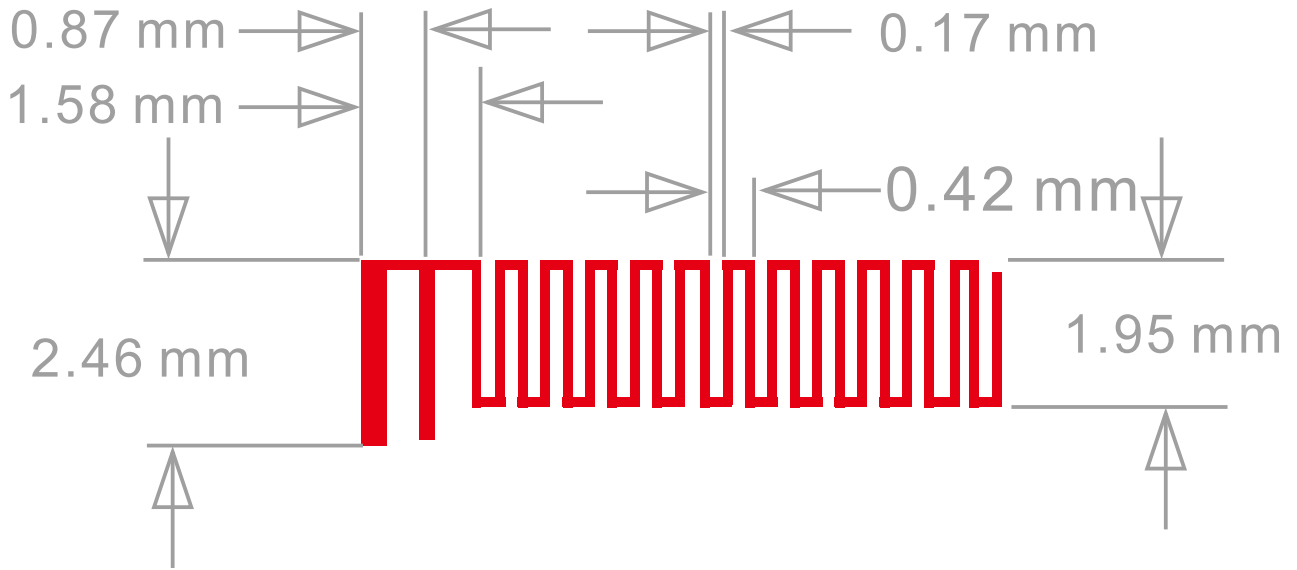


Gain and Efficiency


Frequency (MHz)	Efficiency(%)	Gain(dBi)
2300	34.81	-0.14
2320	38.90	0.50
2340	38.95	1.16
2360	40.11	1.28
2380	39.28	1.80
2400	41.77	2.20
2420	49.71	2.34
2440	50.23	2.58
2460	45.91	2.45
2480	42.46	2.09
2500	41.10	2.01
2520	35.58	0.96
2540	32.43	0.44

3D and 1D Radiation Patterns

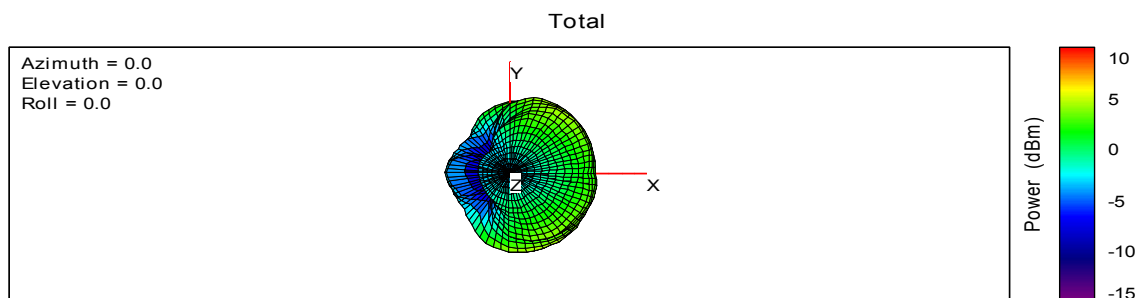


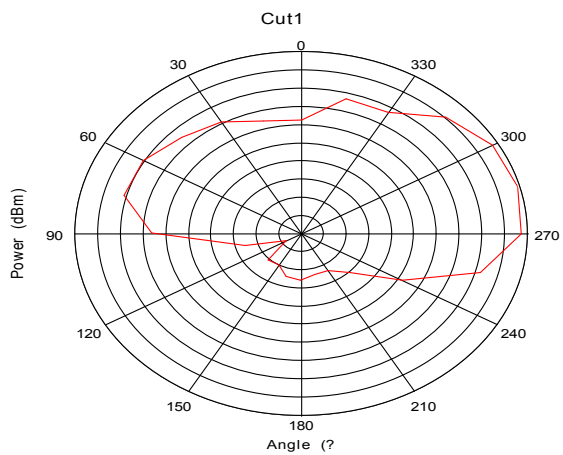

Max: 5  
Min: -5  
Scale: 1/div

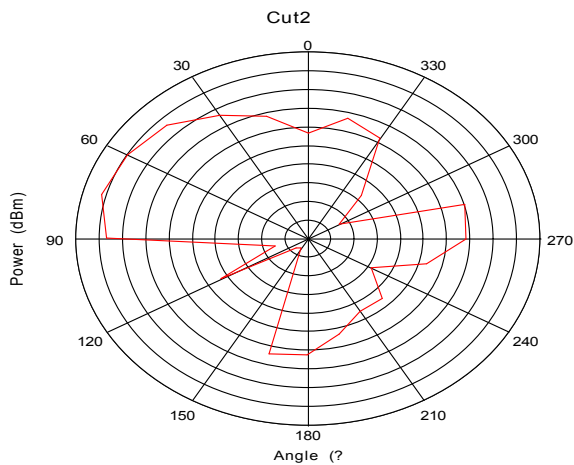

Max: 4  
Min: -16  
Scale: 2/div

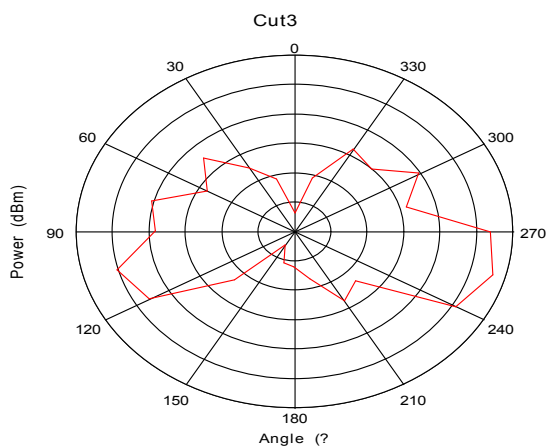

Max: 6  
Min: -6  
Scale: 2/div