




For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

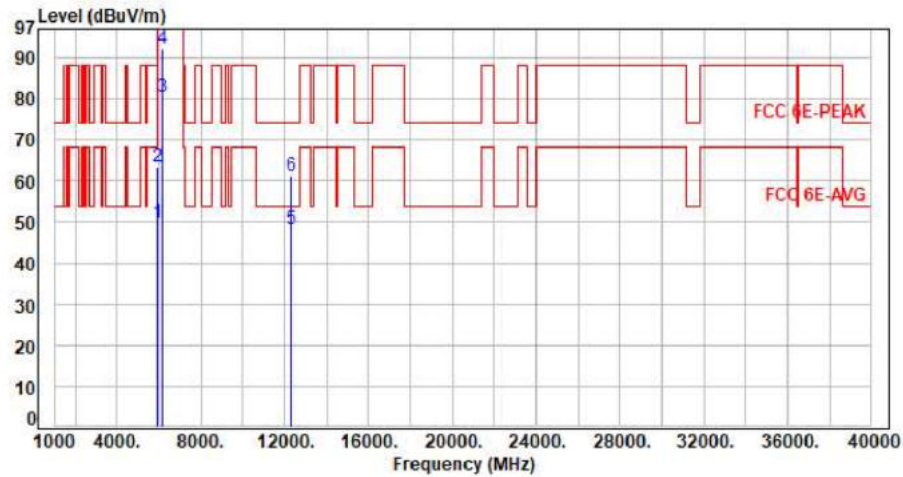


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	382	278	P
2	5925.00	7.66	55.67	63.33	88.20	-24.87	Peak	382	278	P
3	6145.00	8.31	71.97	80.28	200.00	-119.72	Average	382	278	P
4	6145.00	8.31	83.87	92.18	200.00	-107.82	Peak	382	278	P
5	12290.00	17.62	30.84	48.46	54.00	-5.54	Average	100	123	P
6	12290.00	17.62	43.72	61.34	74.00	-12.66	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

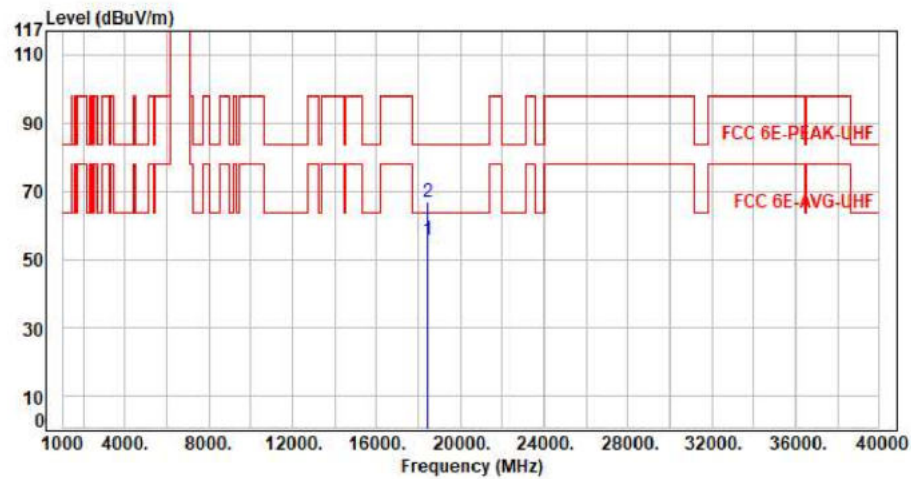


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	45.33	55.53	63.54	-8.01	Average	150	360	P
2	18435.00	10.20	56.70	66.90	83.54	-16.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

For CRIUS N320-G1-Mimo



Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

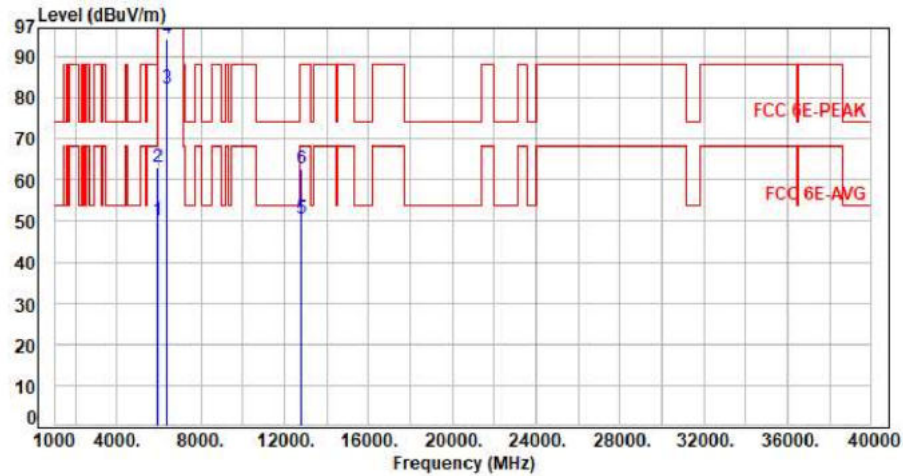


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.43	50.09	68.20	-18.11	Average	300	16	P
2	5925.00	7.66	55.51	63.17	88.20	-25.03	Peak	300	16	P
3	6385.00	8.34	74.03	82.37	200.00	-117.63	Average	300	16	P
4	6385.00	8.34	86.16	94.50	200.00	-105.50	Peak	300	16	P
5	12770.00	18.73	31.62	50.35	68.20	-17.85	Average	100	142	P
6	12770.00	18.73	43.98	62.71	88.20	-25.49	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

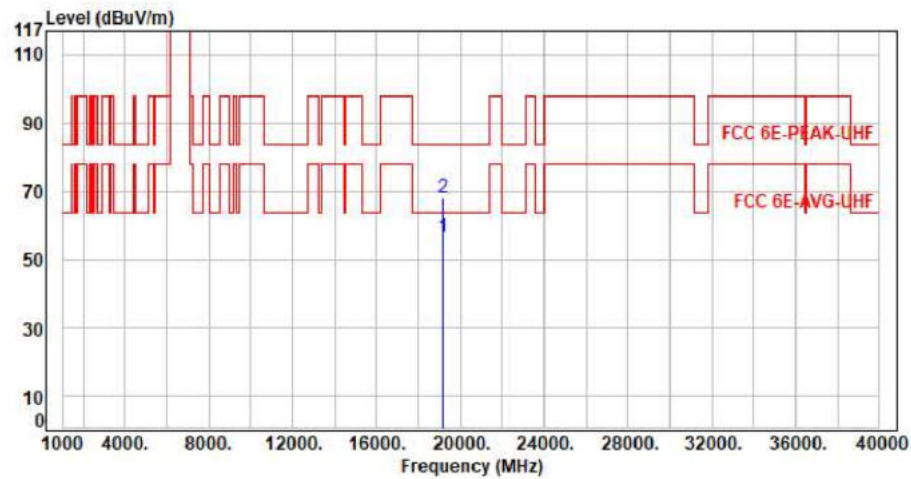


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	45.24	56.58	63.54	-6.96	Average	150	360	P
2	19155.00	11.34	56.77	68.11	83.54	-15.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

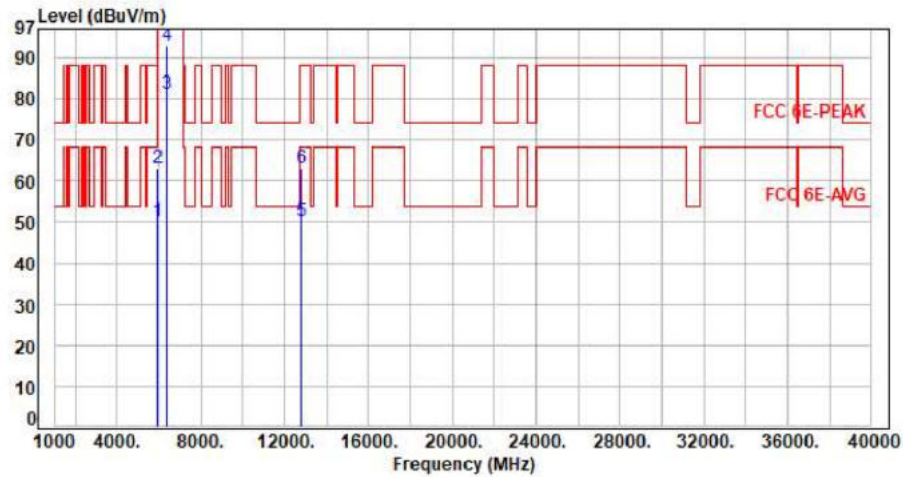


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.33	49.99	68.20	-18.21	Average	400	91	P
2	5925.00	7.66	55.28	62.94	88.20	-25.26	Peak	400	91	P
3	6385.00	8.34	72.64	80.98	200.00	-119.02	Average	400	91	P
4	6385.00	8.34	84.48	92.82	200.00	-107.18	Peak	400	91	P
5	12770.00	18.73	31.58	50.31	68.20	-17.89	Average	100	225	P
6	12770.00	18.73	44.21	62.94	88.20	-25.26	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

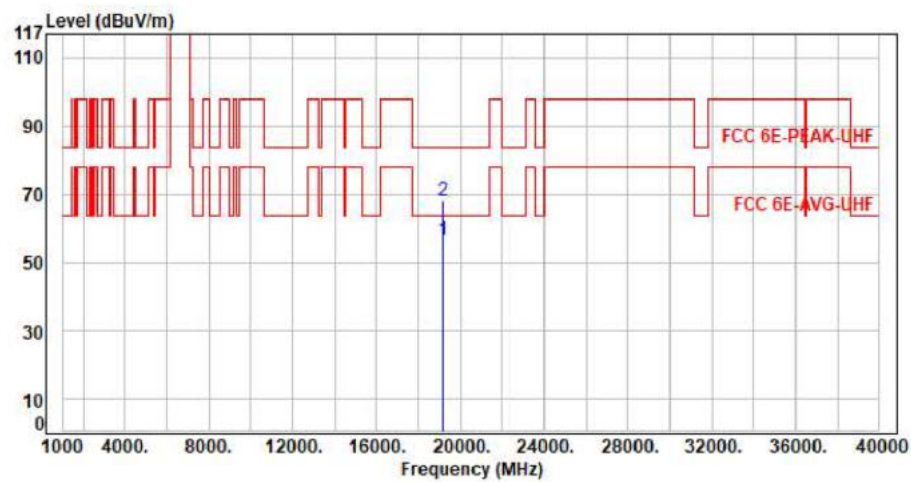

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	45.02	56.36	63.54	-7.18	Average	150	360	P
2	19155.00	11.34	56.75	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

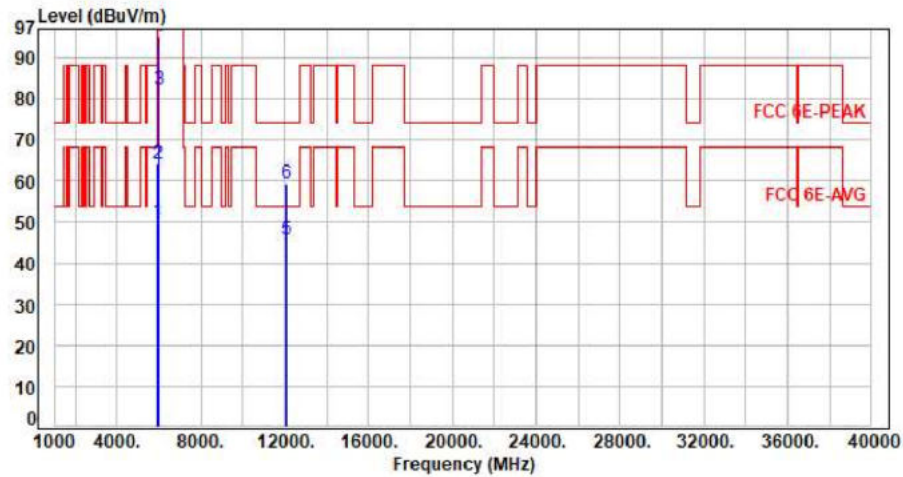


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.53	50.19	68.20	-18.01	Average	285	19	P
2	5925.00	7.66	56.40	64.06	88.20	-24.14	Peak	285	19	P
3	6025.00	7.91	74.26	82.17	200.00	-117.83	Average	285	19	P
4	6025.00	7.91	87.07	94.98	200.00	-105.02	Peak	285	19	P
5	12050.00	17.81	27.88	45.69	54.00	-8.31	Average	100	226	P
6	12050.00	17.81	41.55	59.36	74.00	-14.64	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

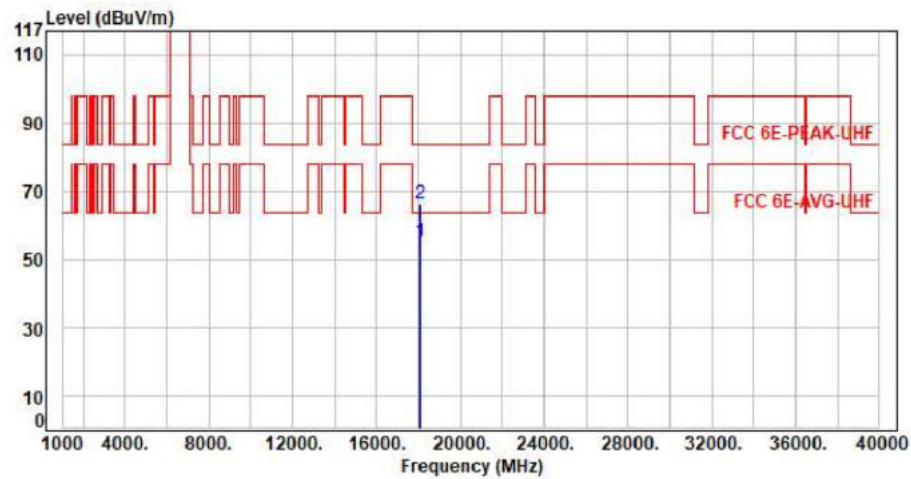


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	45.48	55.38	63.54	-8.16	Average	150	360	P
2	18075.00	9.90	56.32	66.22	83.54	-17.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

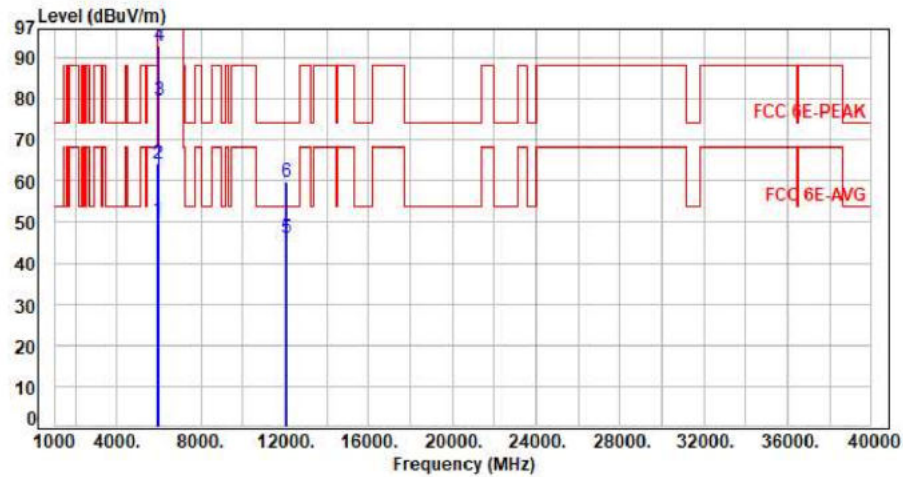


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.94	50.60	68.20	-17.60	Average	375	286	P
2	5925.00	7.66	56.38	64.04	88.20	-24.16	Peak	375	286	P
3	6025.00	7.91	71.82	79.73	200.00	-120.27	Average	375	286	P
4	6025.00	7.91	84.85	92.76	200.00	-107.24	Peak	375	286	P
5	12050.00	17.81	28.21	46.02	54.00	-7.98	Average	100	120	P
6	12050.00	17.81	41.77	59.58	74.00	-14.42	Peak	100	120	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

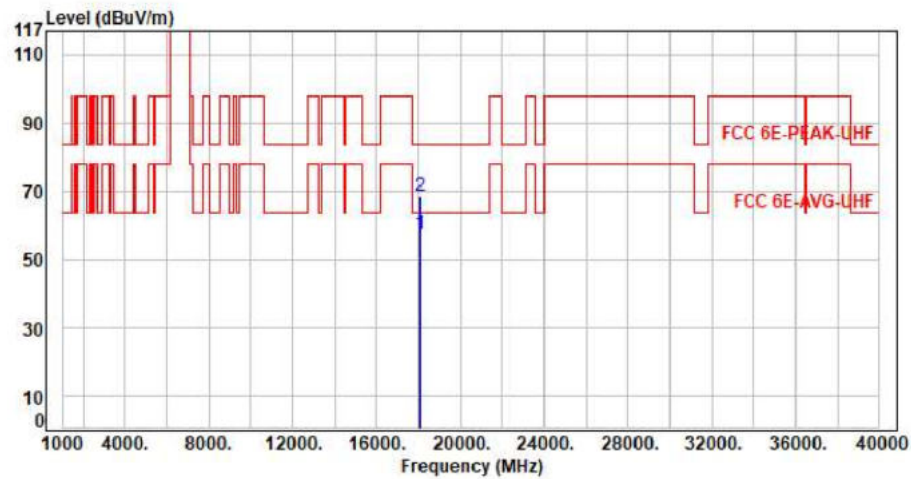


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	47.34	57.24	63.54	-6.30	Average	150	360	P
2	18075.00	9.90	58.77	68.67	83.54	-14.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

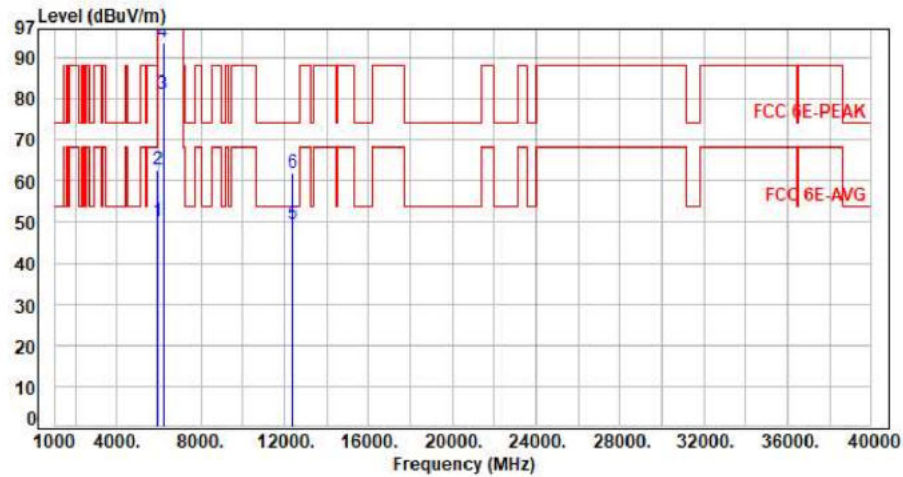


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.34	50.00	68.20	-18.20	Average	289	22	P
2	5925.00	7.66	55.02	62.68	88.20	-25.52	Peak	289	22	P
3	6185.00	8.36	72.81	81.17	200.00	-118.83	Average	289	22	P
4	6185.00	8.36	85.18	93.54	200.00	-106.46	Peak	289	22	P
5	12370.00	17.74	31.59	49.33	54.00	-4.67	Average	100	124	P
6	12370.00	17.74	44.30	62.04	74.00	-11.96	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

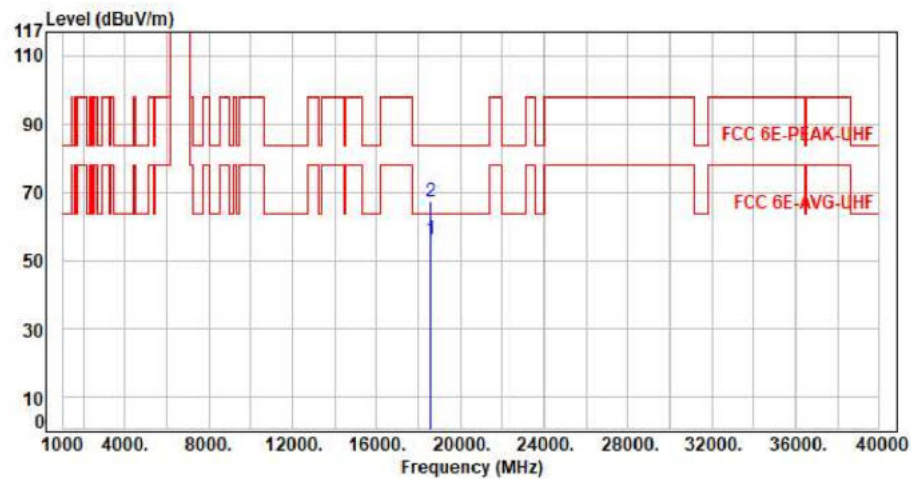


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.28	55.94	63.54	-7.60	Average	150	360	P
2	18555.00	10.66	56.52	67.18	83.54	-16.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

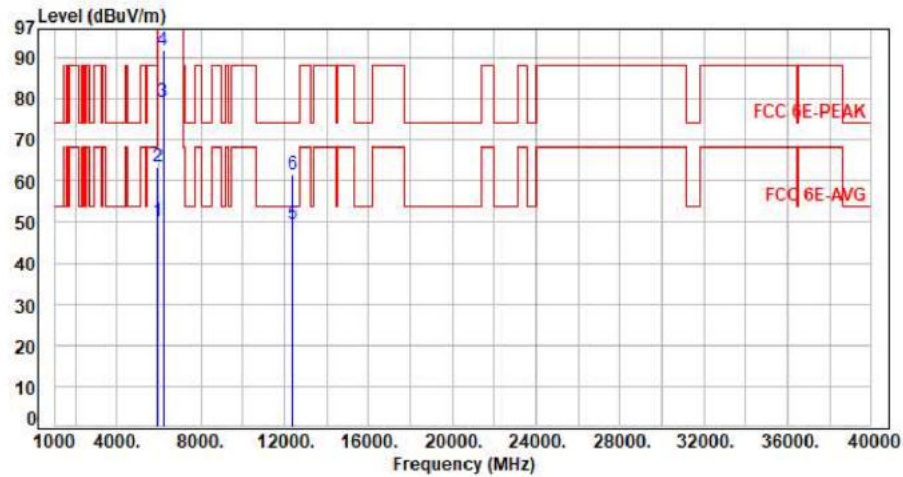


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.44	50.10	68.20	-18.10	Average	392	84	P
2	5925.00	7.66	55.78	63.44	88.20	-24.76	Peak	392	84	P
3	6185.00	8.36	70.98	79.34	200.00	-120.66	Average	392	84	P
4	6185.00	8.36	83.61	91.97	200.00	-108.03	Peak	392	84	P
5	12370.00	17.74	31.60	49.34	54.00	-4.66	Average	100	110	P
6	12370.00	17.74	43.68	61.42	74.00	-12.58	Peak	100	110	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

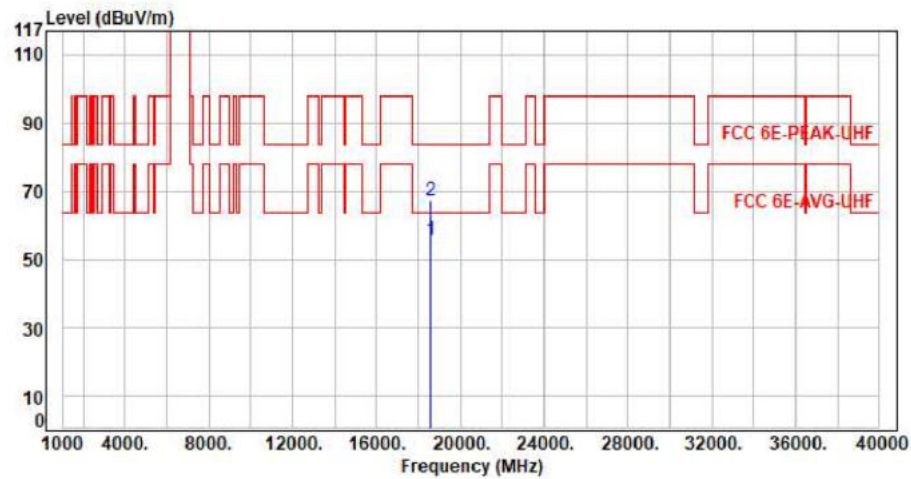


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.09	55.75	63.54	-7.79	Average	150	360	P
2	18555.00	10.66	56.72	67.38	83.54	-16.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

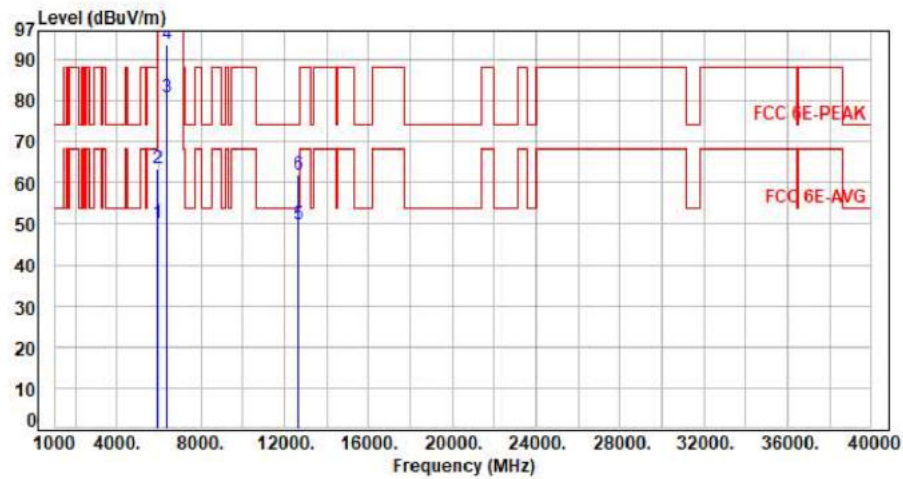


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.35	50.01	68.20	-18.19	Average	296	3	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	296	3	P
3	6345.00	8.31	72.64	80.95	200.00	-119.05	Average	296	3	P
4	6345.00	8.31	85.33	93.64	200.00	-106.36	Peak	296	3	P
5	12690.00	18.27	31.44	49.71	54.00	-4.29	Average	100	225	P
6	12690.00	18.27	43.82	62.09	74.00	-11.91	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

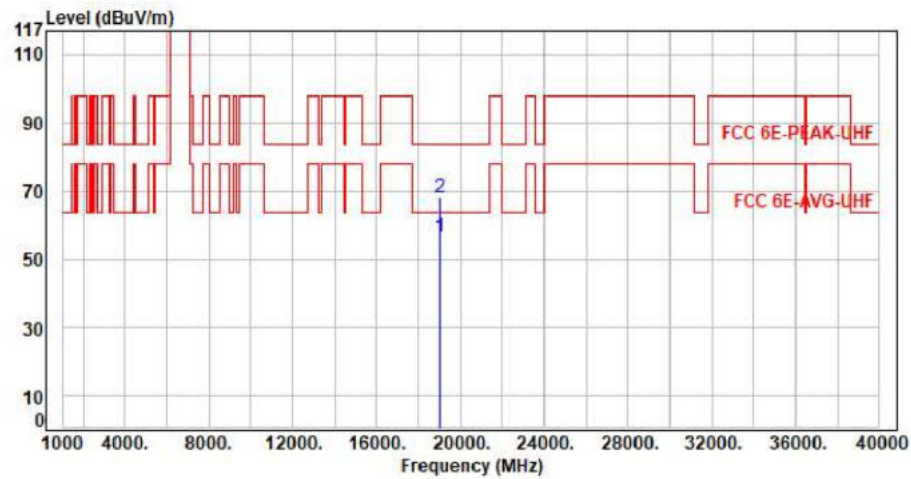


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	45.25	56.66	63.54	-6.88	Average	150	360	P
2	19035.00	11.41	56.76	68.17	83.54	-15.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

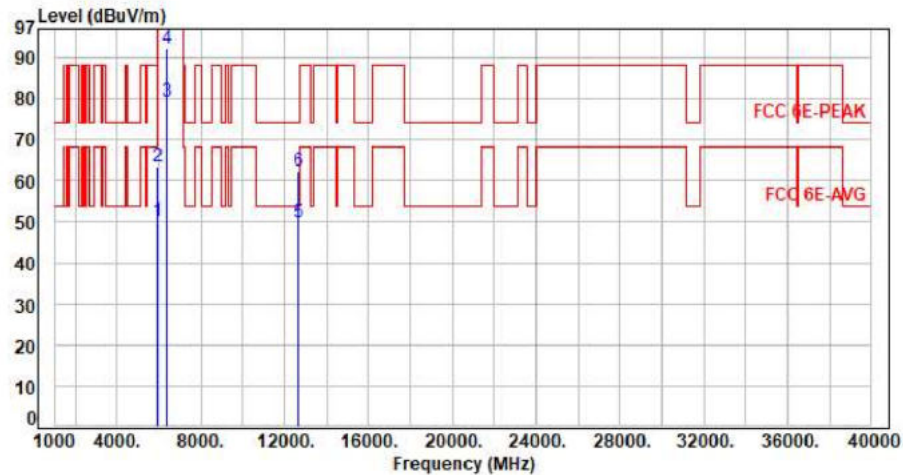


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.53	50.19	68.20	-18.01	Average	395	90	P
2	5925.00	7.66	55.85	63.51	88.20	-24.69	Peak	395	90	P
3	6345.00	8.31	70.83	79.14	200.00	-120.86	Average	395	90	P
4	6345.00	8.31	84.06	92.37	200.00	-107.63	Peak	395	90	P
5	12690.00	18.27	31.69	49.96	54.00	-4.04	Average	100	124	P
6	12690.00	18.27	44.15	62.42	74.00	-11.58	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

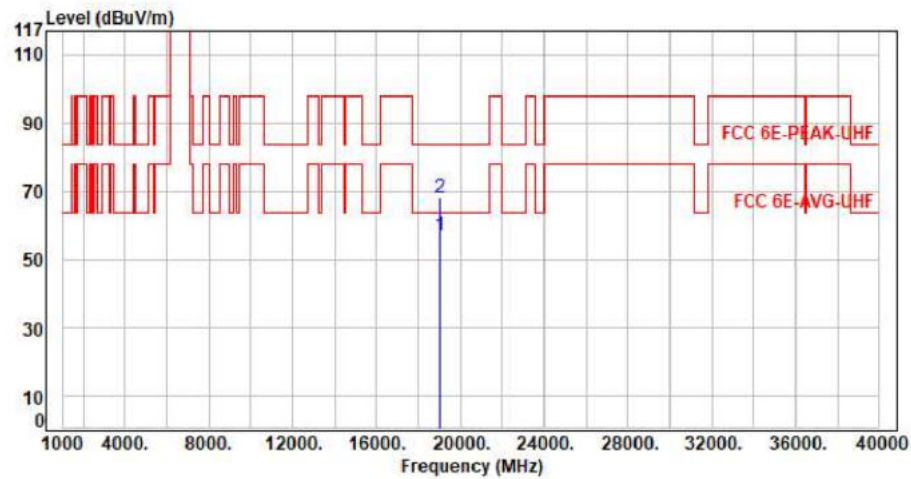

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	45.53	56.94	63.54	-6.60	Average	150	360	P
2	19035.00	11.41	56.67	68.08	83.54	-15.46	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

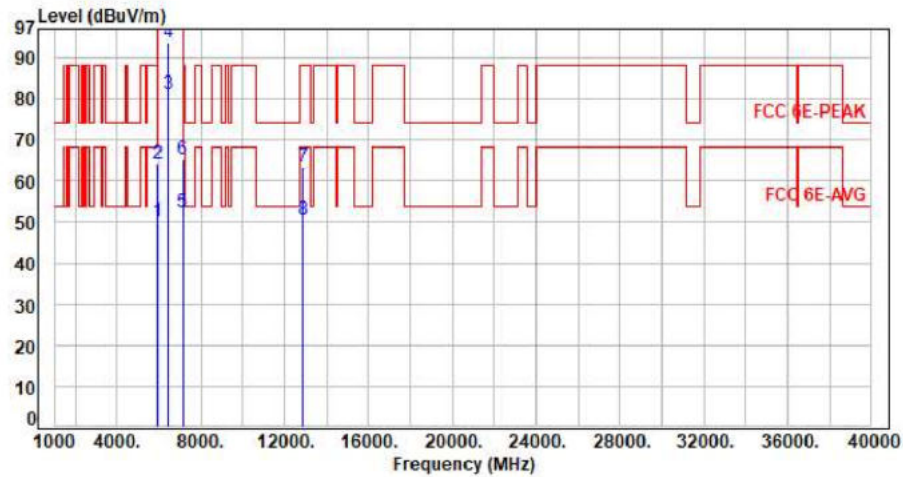

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.34	50.00	68.20	-18.20	Average	297	15	P
2	5925.00	7.66	56.48	64.14	88.20	-24.06	Peak	297	15	P
3	6435.00	8.32	72.81	81.13	200.00	-118.87	Average	297	15	P
4	6435.00	8.32	85.39	93.71	200.00	-106.29	Peak	297	15	P
5	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	297	15	P
6	7125.00	10.05	55.38	65.43	88.20	-22.77	Peak	297	15	P
7	12870.00	19.02	44.34	63.36	68.20	-4.84	Average	100	185	P
8	12870.00	19.02	31.54	50.56	88.20	-37.64	Peak	100	185	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

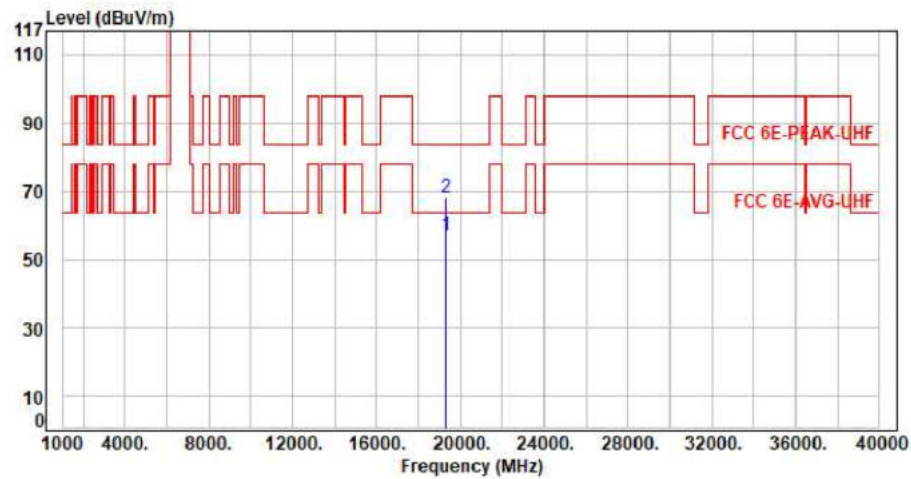


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	45.34	56.95	63.54	-6.59	Average	150	360	P
2	19305.00	11.61	56.48	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

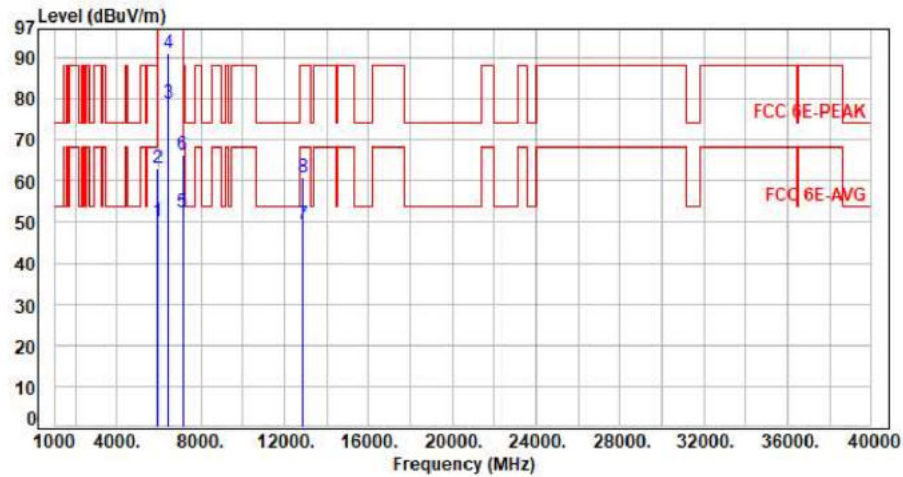


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.55	50.21	68.20	-17.99	Average	390	85	P
2	5925.00	7.66	55.40	63.06	88.20	-25.14	Peak	390	85	P
3	6435.00	8.32	70.46	78.78	200.00	-121.22	Average	390	85	P
4	6435.00	8.32	82.84	91.16	200.00	-108.84	Peak	390	85	P
5	7125.00	10.05	42.26	52.31	68.20	-15.89	Average	390	85	P
6	7125.00	10.05	56.17	66.22	88.20	-21.98	Peak	390	85	P
7	12870.00	19.02	30.58	49.60	68.20	-18.60	Average	100	134	P
8	12870.00	19.02	41.65	60.67	88.20	-27.53	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

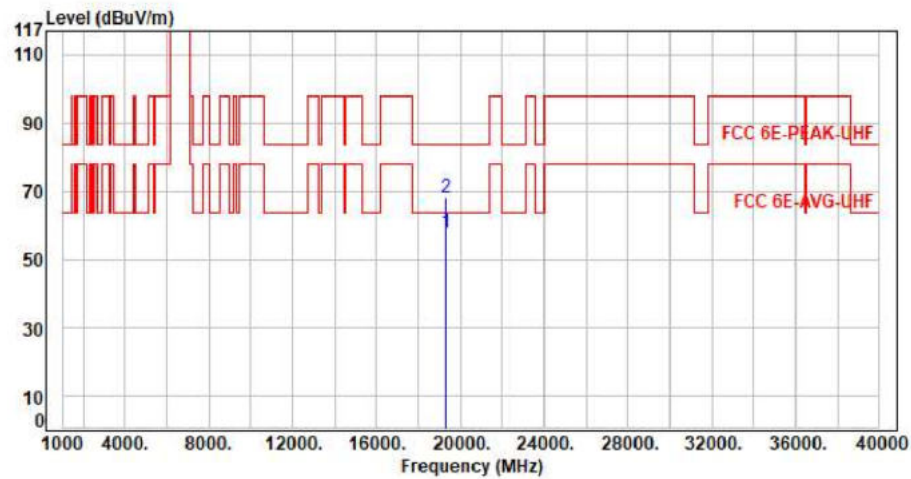


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	46.07	57.68	63.54	-5.86	Average	150	360	P
2	19305.00	11.61	56.36	67.97	83.54	-15.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

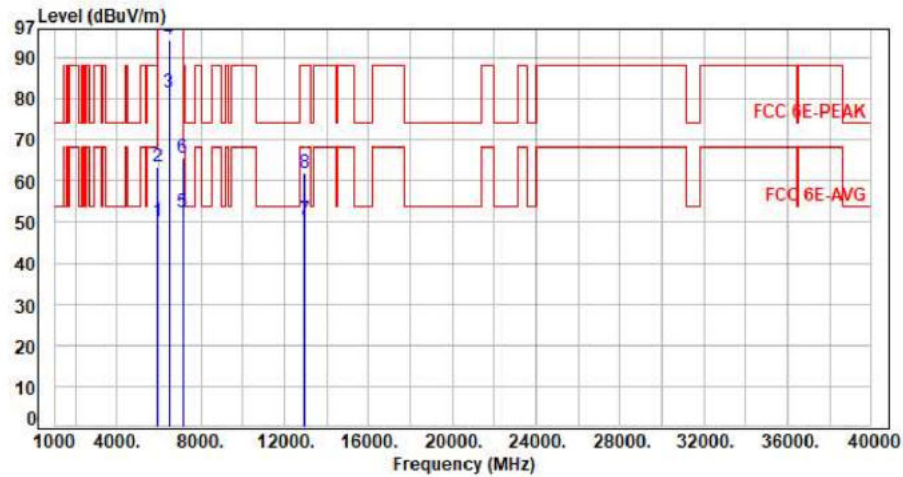


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.39	50.05	68.20	-18.15	Average	295	17	P
2	5925.00	7.66	55.95	63.61	88.20	-24.59	Peak	295	17	P
3	6475.00	8.33	73.19	81.52	200.00	-118.48	Average	295	17	P
4	6475.00	8.33	86.03	94.36	200.00	-105.64	Peak	295	17	P
5	7125.00	10.05	42.27	52.32	68.20	-15.88	Average	295	17	P
6	7125.00	10.05	55.63	65.68	88.20	-22.52	Peak	295	17	P
7	12950.00	19.39	31.22	50.61	68.20	-17.59	Average	100	158	P
8	12950.00	19.39	42.75	62.14	88.20	-26.06	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

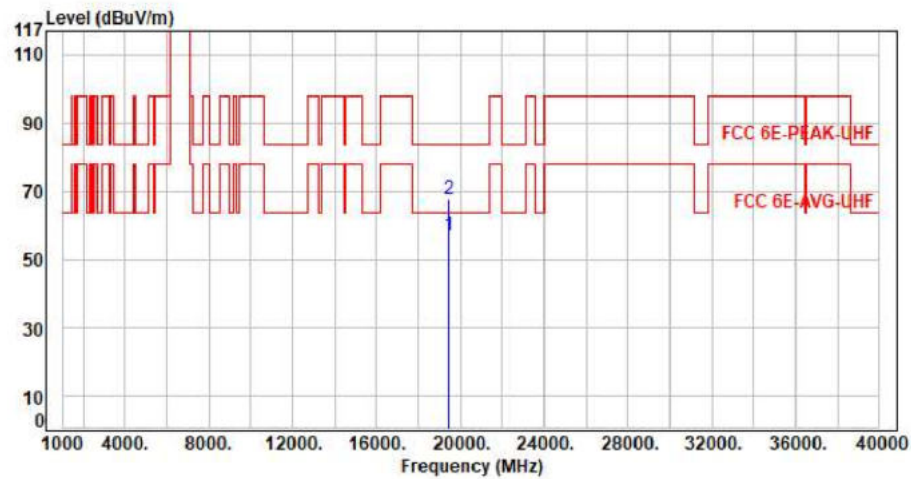


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	45.00	56.75	63.54	-6.79	Average	150	360	P
2	19425.00	11.75	55.92	67.67	83.54	-15.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

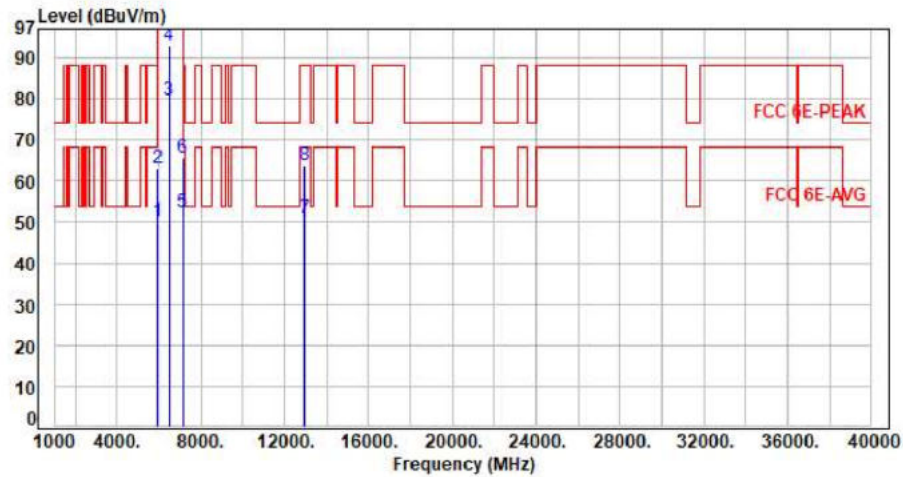


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	389	81	P
2	5925.00	7.66	55.48	63.14	88.20	-25.06	Peak	389	81	P
3	6475.00	8.33	71.46	79.79	200.00	-120.21	Average	389	81	P
4	6475.00	8.33	84.55	92.88	200.00	-107.12	Peak	389	81	P
5	7125.00	10.05	42.43	52.48	68.20	-15.72	Average	389	81	P
6	7125.00	10.05	55.63	65.68	88.20	-22.52	Peak	389	81	P
7	12950.00	19.39	31.35	50.74	68.20	-17.46	Average	100	221	P
8	12950.00	19.39	44.36	63.75	88.20	-24.45	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

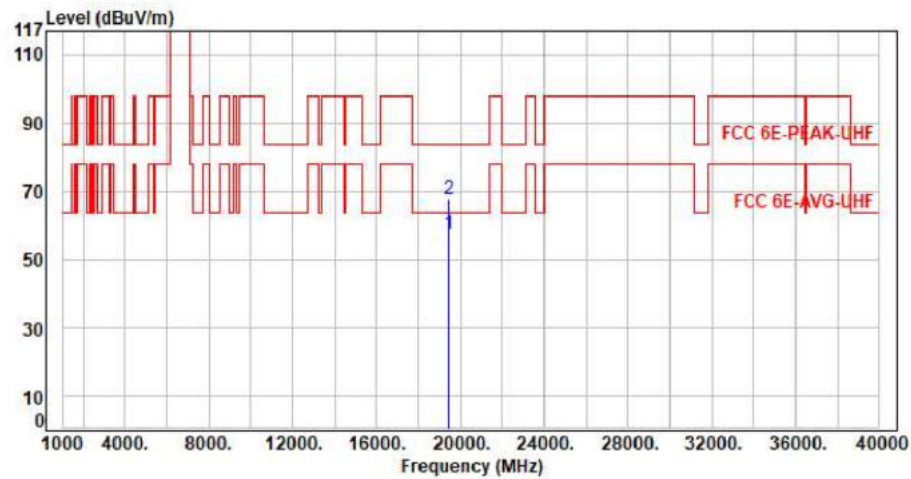


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	45.50	57.25	63.54	-6.29	Average	150	360	P
2	19425.00	11.75	56.08	67.83	83.54	-15.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

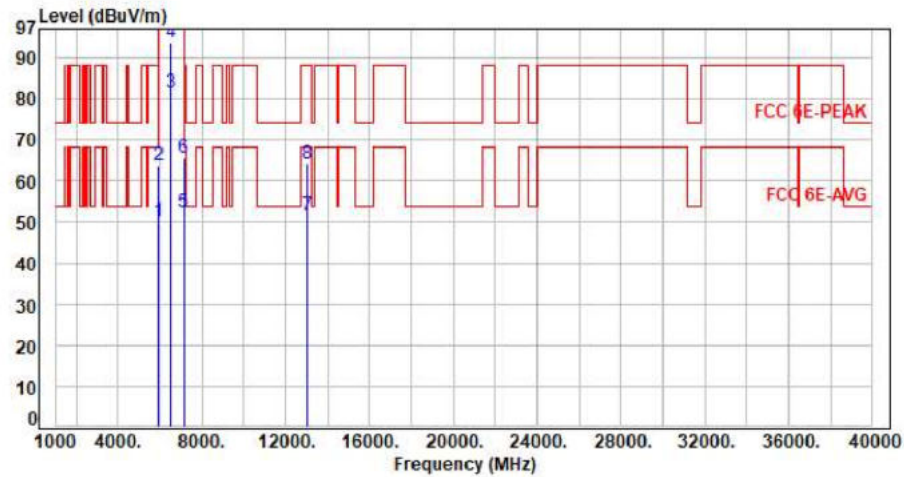

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.40	50.06	68.20	-18.14	Average	303	18	P
2	5925.00	7.66	56.32	63.98	88.20	-24.22	Peak	303	18	P
3	6515.00	8.42	73.15	81.57	200.00	-118.43	Average	303	18	P
4	6515.00	8.42	85.44	93.86	200.00	-106.14	Peak	303	18	P
5	7125.00	10.05	42.23	52.28	68.20	-15.92	Average	303	18	P
6	7125.00	10.05	55.52	65.57	88.20	-22.63	Peak	303	18	P
7	13030.00	19.86	31.62	51.48	68.20	-16.72	Average	100	114	P
8	13030.00	19.86	44.47	64.33	88.20	-23.87	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

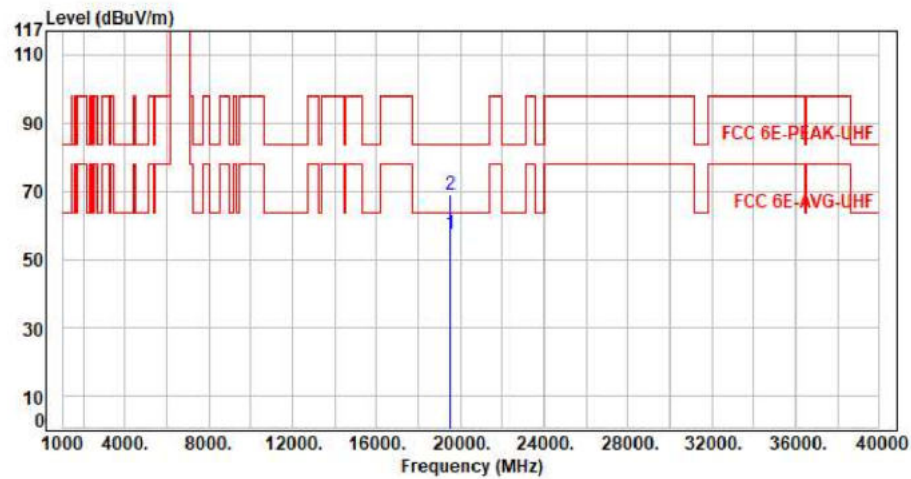


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	45.29	57.48	63.54	-6.06	Average	150	360	P
2	19545.00	12.19	56.61	68.80	83.54	-14.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

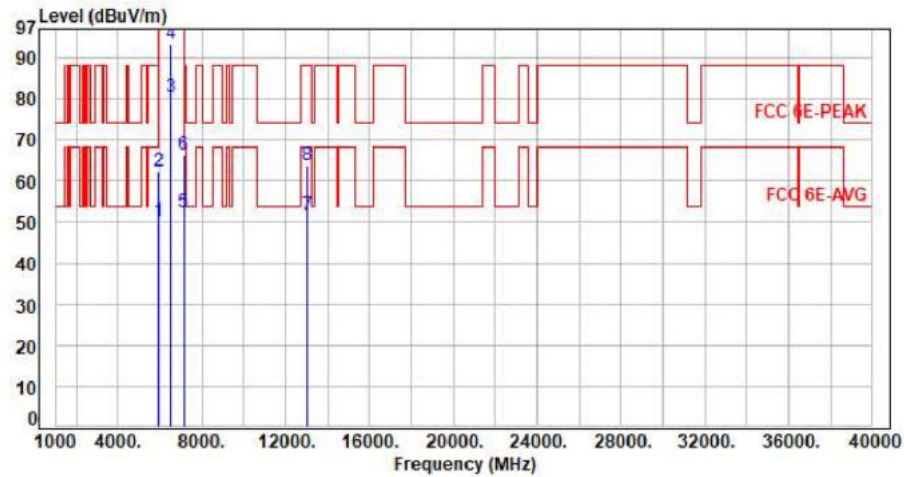

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.39	50.05	68.20	-18.15	Average	400	88	P
2	5925.00	7.66	54.62	62.28	88.20	-25.92	Peak	400	88	P
3	6515.00	8.42	71.82	80.24	200.00	-119.76	Average	400	88	P
4	6515.00	8.42	84.72	93.14	200.00	-106.86	Peak	400	88	P
5	7125.00	10.05	42.28	52.33	68.20	-15.87	Average	400	88	P
6	7125.00	10.05	56.48	66.53	88.20	-21.67	Peak	400	88	P
7	13030.00	19.86	31.64	51.50	68.20	-16.70	Average	100	124	P
8	13030.00	19.86	43.83	63.69	88.20	-24.51	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

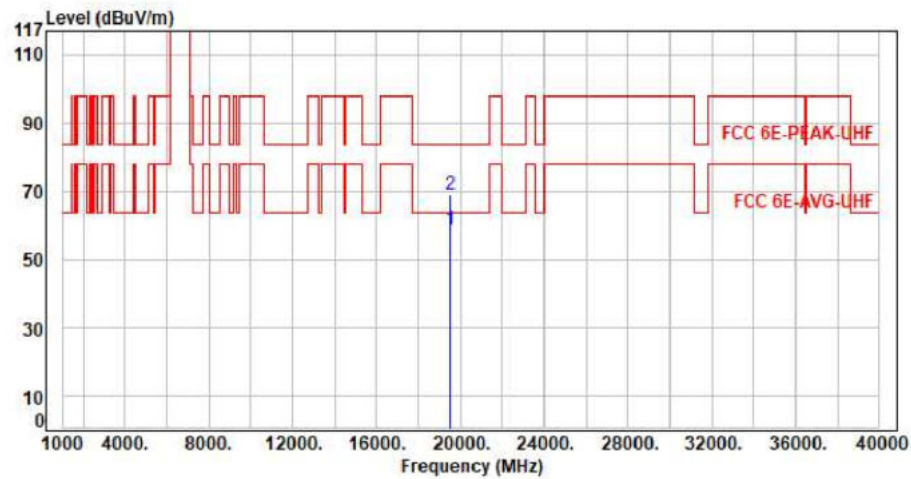


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	46.54	58.73	63.54	-4.81	Average	150	360	P
2	19545.00	12.19	56.73	68.92	83.54	-14.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

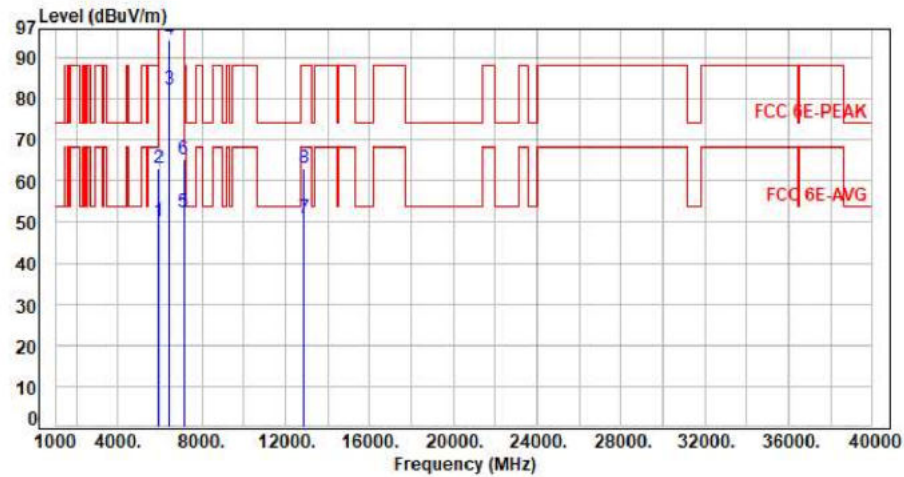

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.33	49.99	68.20	-18.21	Average	299	14	P
2	5925.00	7.66	55.53	63.19	88.20	-25.01	Peak	299	14	P
3	6445.00	8.31	73.91	82.22	200.00	-117.78	Average	299	14	P
4	6445.00	8.31	85.93	94.24	200.00	-105.76	Peak	299	14	P
5	7125.00	10.05	42.27	52.32	68.20	-15.88	Average	299	14	P
6	7125.00	10.05	55.08	65.13	88.20	-23.07	Peak	299	14	P
7	12890.00	19.05	31.69	50.74	68.20	-17.46	Average	100	221	P
8	12890.00	19.05	44.14	63.19	88.20	-25.01	Peak	100	221	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

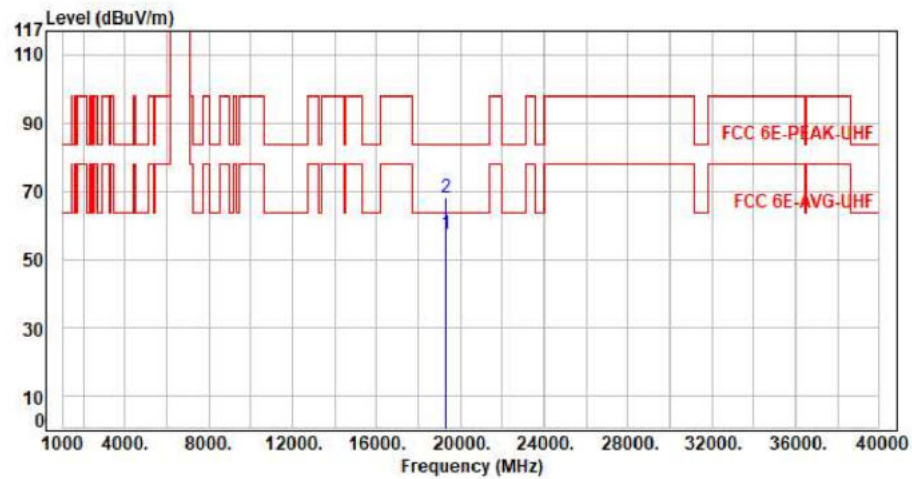


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	45.58	57.20	63.54	-6.34	Average	150	360	P
2	19335.00	11.62	56.66	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

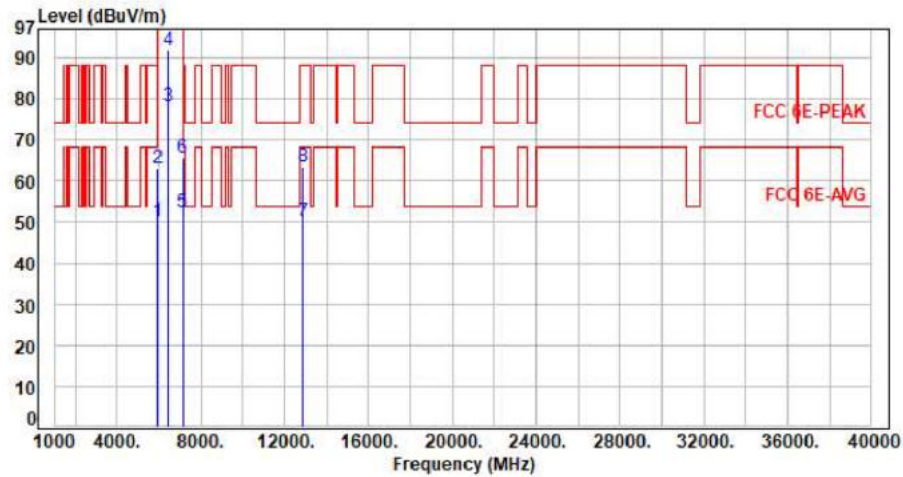

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.33	49.99	68.20	-18.21	Average	392	92	P
2	5925.00	7.66	55.57	63.23	88.20	-24.97	Peak	392	92	P
3	6445.00	8.31	70.03	78.34	200.00	-121.66	Average	392	92	P
4	6445.00	8.31	83.61	91.92	200.00	-108.08	Peak	392	92	P
5	7125.00	10.05	42.24	52.29	68.20	-15.91	Average	392	92	P
6	7125.00	10.05	55.50	65.55	88.20	-22.65	Peak	392	92	P
7	12890.00	19.05	31.26	50.31	68.20	-17.89	Average	100	182	P
8	12890.00	19.05	44.26	63.31	88.20	-24.89	Peak	100	182	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

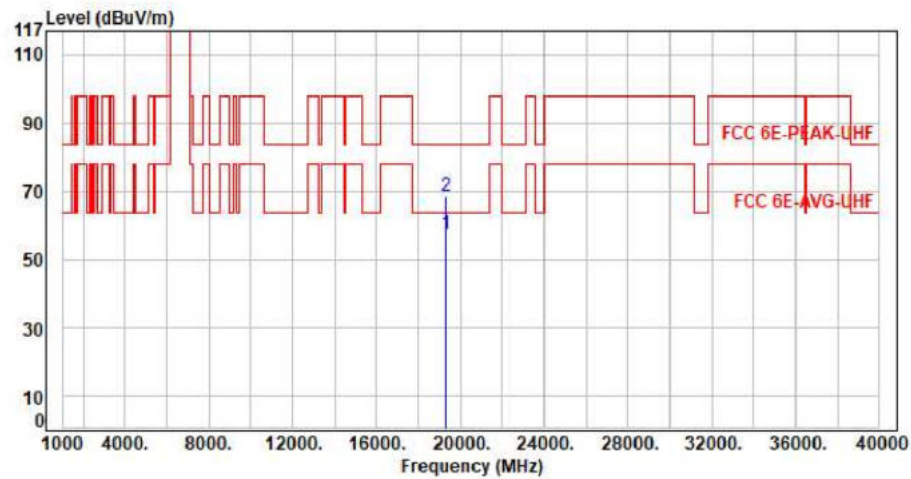

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	45.73	57.35	63.54	-6.19	Average	150	360	P
2	19335.00	11.62	56.82	68.44	83.54	-15.10	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

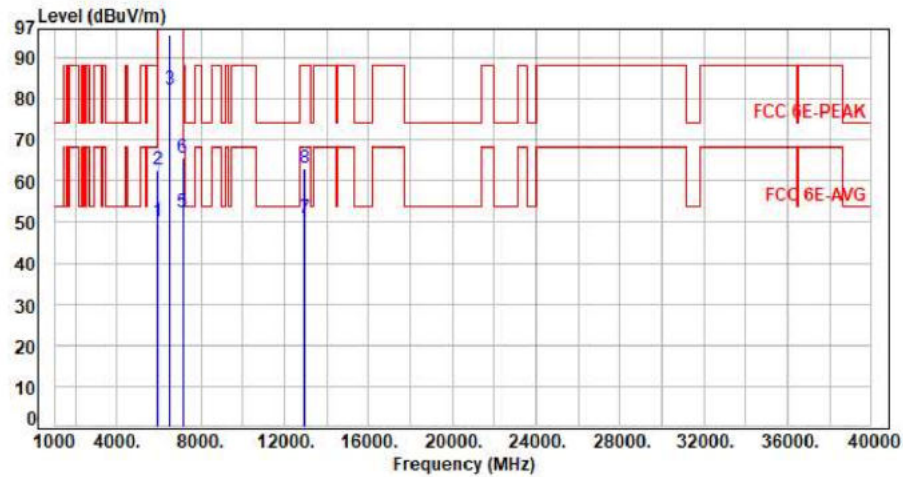

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.37	50.03	68.20	-18.17	Average	293	15	P
2	5925.00	7.66	55.13	62.79	88.20	-25.41	Peak	293	15	P
3	6485.00	8.34	73.87	82.21	200.00	-117.79	Average	293	15	P
4	6485.00	8.34	87.23	95.57	200.00	-104.43	Peak	293	15	P
5	7125.00	10.05	42.41	52.46	68.20	-15.74	Average	293	15	P
6	7125.00	10.05	55.42	65.47	88.20	-22.73	Peak	293	15	P
7	12970.00	19.47	31.28	50.75	68.20	-17.45	Average	100	151	P
8	12970.00	19.47	43.64	63.11	88.20	-25.09	Peak	100	151	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

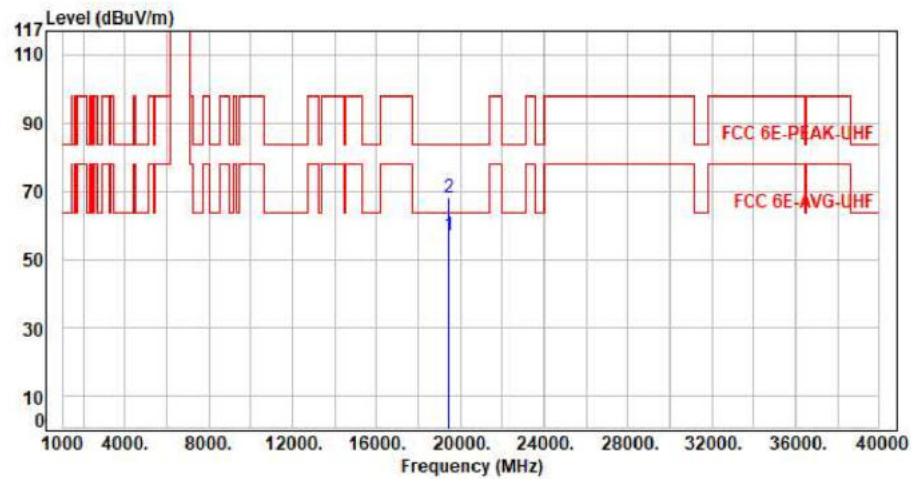


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	45.38	56.95	63.54	-6.59	Average	150	360	P
2	19455.00	11.57	56.65	68.22	83.54	-15.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

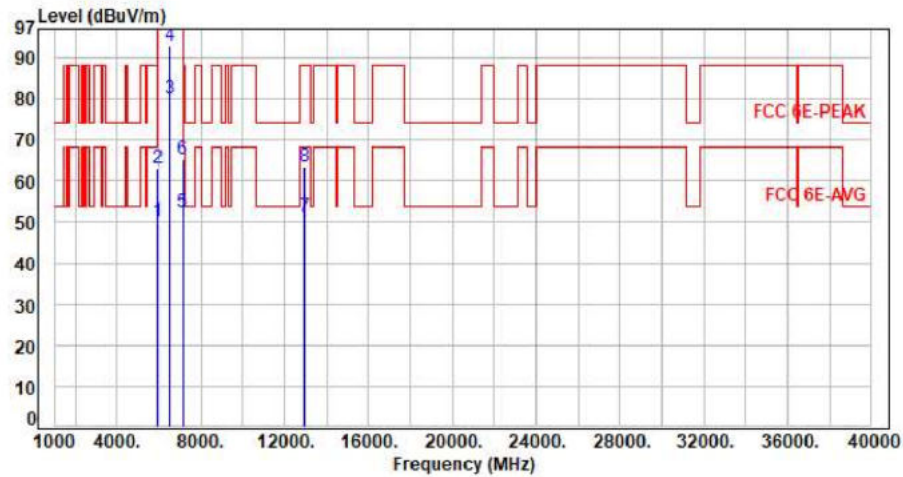

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.37	50.03	68.20	-18.17	Average	388	82	P
2	5925.00	7.66	55.40	63.06	88.20	-25.14	Peak	388	82	P
3	6485.00	8.34	71.67	80.01	200.00	-119.99	Average	388	82	P
4	6485.00	8.34	84.47	92.81	200.00	-107.19	Peak	388	82	P
5	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	388	82	P
6	7125.00	10.05	55.27	65.32	88.20	-22.88	Peak	388	82	P
7	12970.00	19.47	31.69	51.16	68.20	-17.04	Average	100	224	P
8	12970.00	19.47	44.03	63.50	88.20	-24.70	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

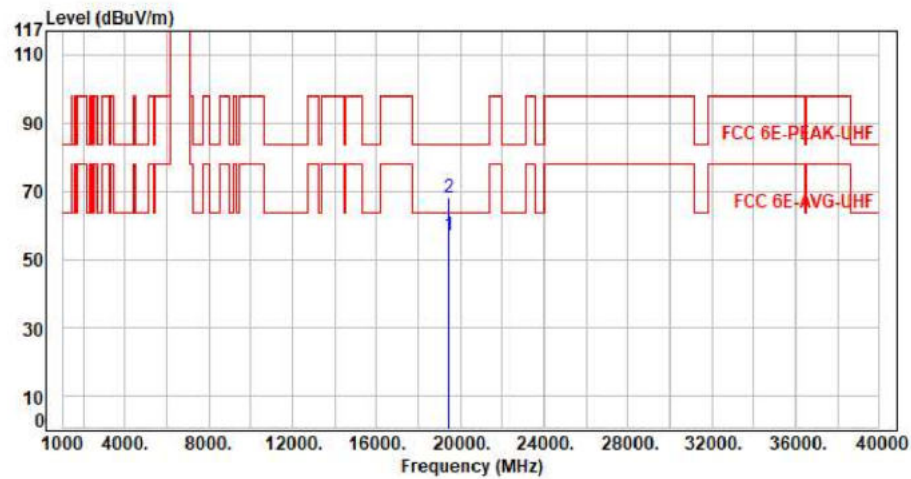


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	45.27	56.84	63.54	-6.70	Average	150	360	P
2	19455.00	11.57	56.53	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

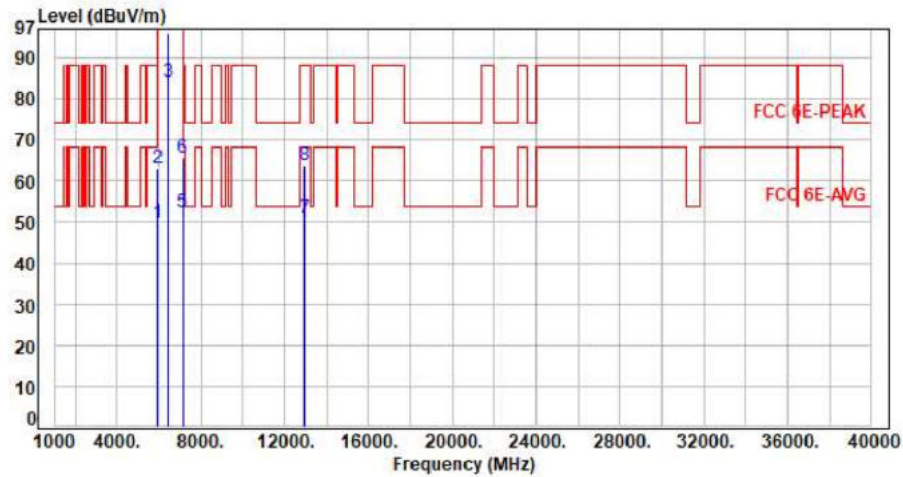

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.27	49.93	68.20	-18.27	Average	296	16	P
2	5925.00	7.66	55.59	63.25	88.20	-24.95	Peak	296	16	P
3	6465.00	8.32	75.80	84.12	200.00	-115.88	Average	296	16	P
4	6465.00	8.32	87.44	95.76	200.00	-104.24	Peak	296	16	P
5	7125.00	10.05	42.48	52.53	68.20	-15.67	Average	296	16	P
6	7125.00	10.05	55.55	65.60	88.20	-22.60	Peak	296	16	P
7	12930.00	19.27	31.66	50.93	68.20	-17.27	Average	100	169	P
8	12930.00	19.27	44.57	63.84	88.20	-24.36	Peak	100	169	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

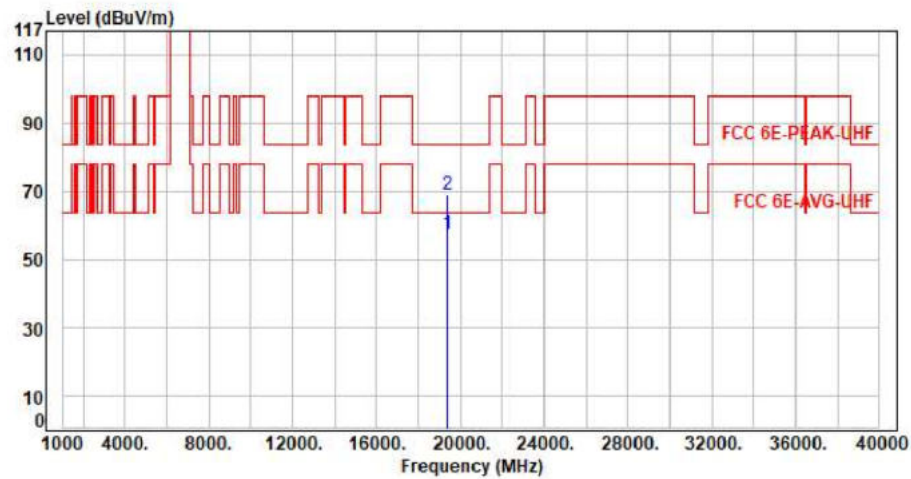


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.57	57.48	63.54	-6.06	Average	150	360	P
2	19395.00	11.91	57.08	68.99	83.54	-14.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

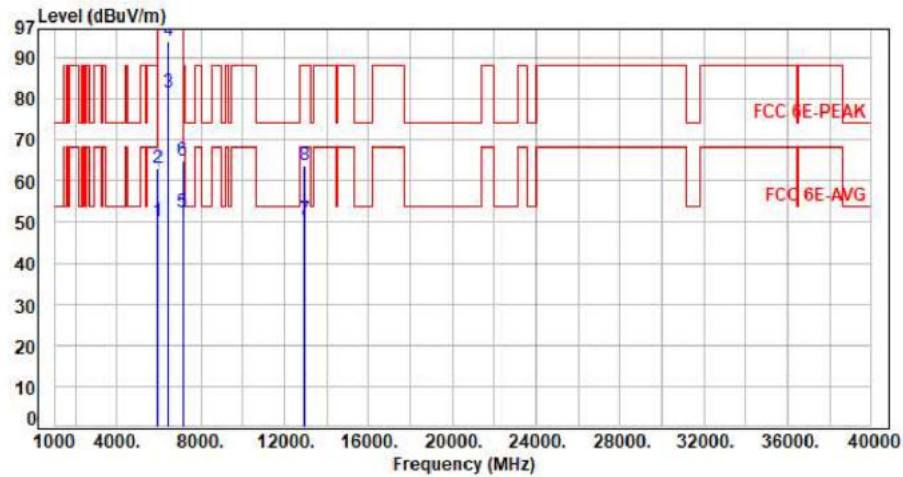

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.50	50.16	68.20	-18.04	Average	388	83	P
2	5925.00	7.66	55.43	63.09	88.20	-25.11	Peak	388	83	P
3	6465.00	8.32	73.11	81.43	200.00	-118.57	Average	388	83	P
4	6465.00	8.32	85.82	94.14	200.00	-105.86	Peak	388	83	P
5	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	388	83	P
6	7125.00	10.05	55.01	65.06	88.20	-23.14	Peak	388	83	P
7	12930.00	19.27	31.21	50.48	68.20	-17.72	Average	100	143	P
8	12930.00	19.27	44.37	63.64	88.20	-24.56	Peak	100	143	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

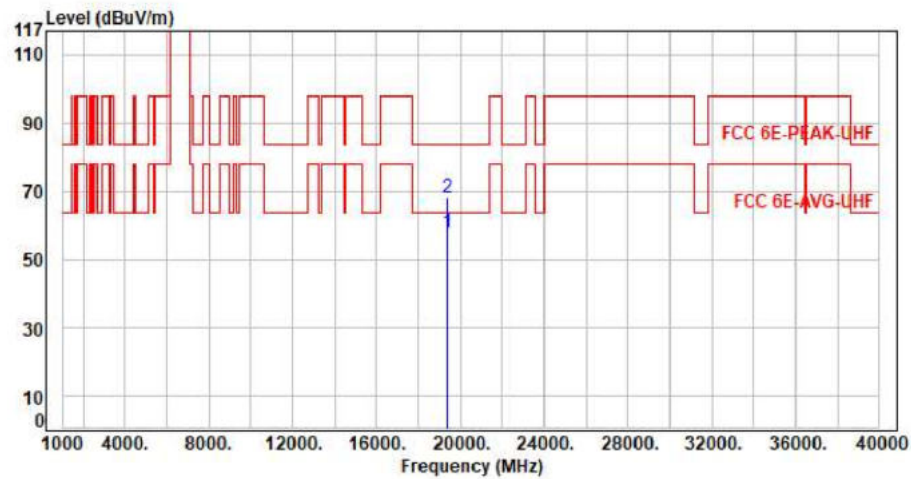


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.72	57.63	63.54	-5.91	Average	150	360	P
2	19395.00	11.91	56.37	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

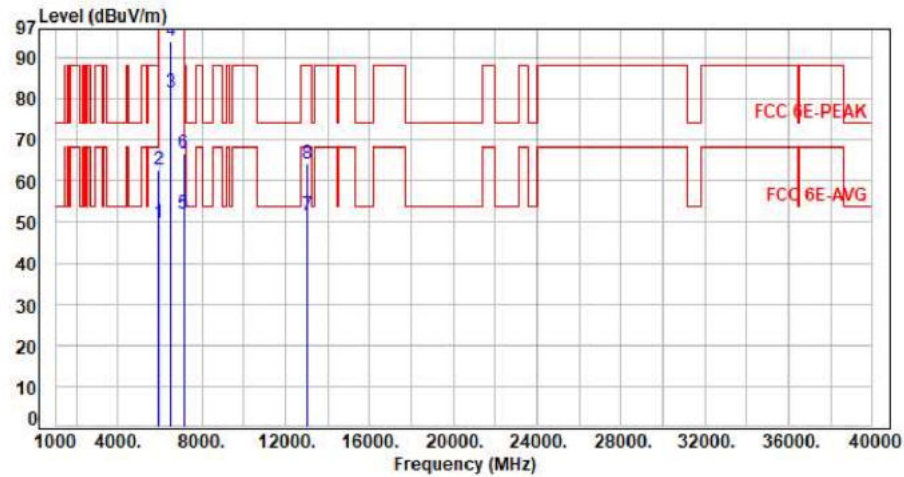

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.31	49.97	68.20	-18.23	Average	100	5	P
2	5925.00	7.66	55.19	62.85	88.20	-25.35	Peak	100	5	P
3	6525.00	8.45	73.21	81.66	200.00	-118.34	Average	100	5	P
4	6525.00	8.45	85.49	93.94	200.00	-106.06	Peak	100	5	P
5	7125.00	10.05	42.03	52.08	68.20	-16.12	Average	100	5	P
6	7125.00	10.05	56.60	66.65	88.20	-21.55	Peak	100	5	P
7	13050.00	20.02	31.52	51.54	68.20	-16.66	Average	100	225	P
8	13050.00	20.02	44.31	64.33	88.20	-23.87	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

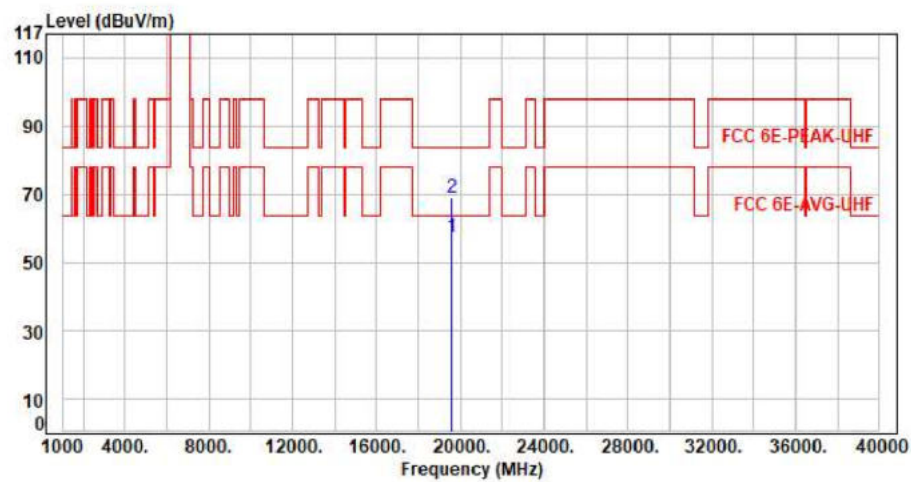

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.38	57.40	63.54	-6.14	Average	150	360	P
2	19575.00	12.02	56.88	68.90	83.54	-14.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

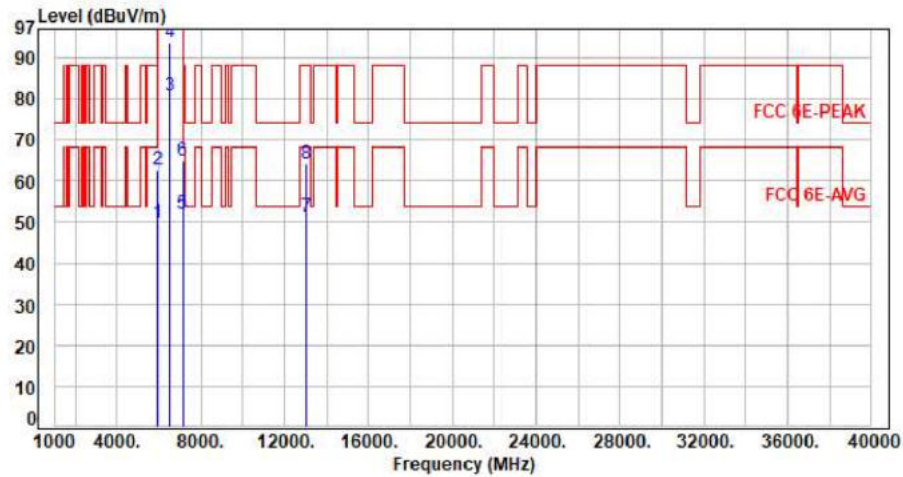

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.26	49.92	68.20	-18.28	Average	400	87	P
2	5925.00	7.66	55.20	62.86	88.20	-25.34	Peak	400	87	P
3	6525.00	8.45	72.47	80.92	200.00	-119.08	Average	400	87	P
4	6525.00	8.45	85.37	93.82	200.00	-106.18	Peak	400	87	P
5	7125.00	10.05	42.09	52.14	68.20	-16.06	Average	400	87	P
6	7125.00	10.05	54.99	65.04	88.20	-23.16	Peak	400	87	P
7	13050.00	20.02	31.08	51.10	68.20	-17.10	Average	100	112	P
8	13050.00	20.02	44.26	64.28	88.20	-23.92	Peak	100	112	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

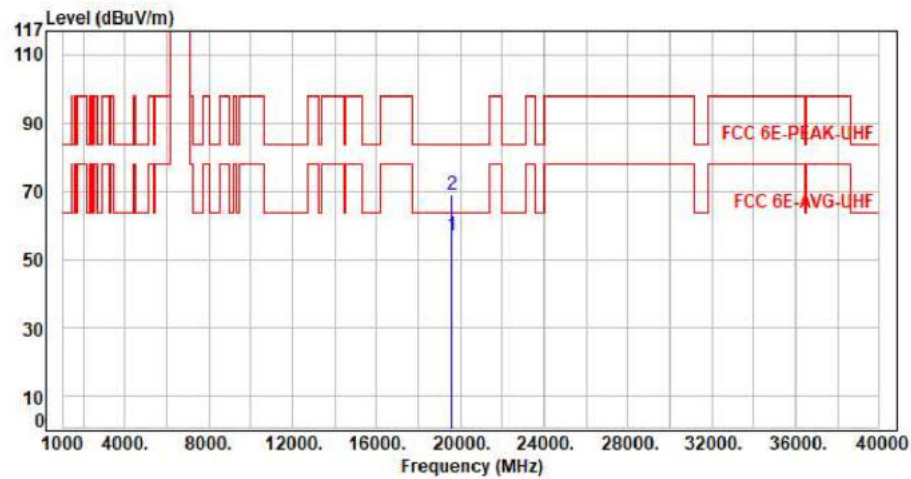


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.11	57.13	63.54	-6.41	Average	150	360	P
2	19575.00	12.02	56.72	68.74	83.54	-14.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

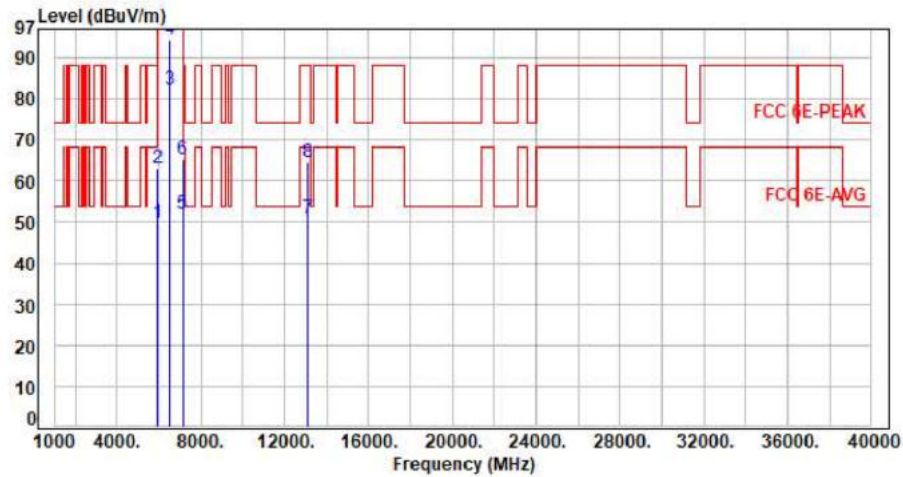


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.29	49.95	68.20	-18.25	Average	100	6	P
2	5925.00	7.66	55.59	63.25	88.20	-24.95	Peak	100	6	P
3	6545.00	8.55	73.72	82.27	200.00	-117.73	Average	100	6	P
4	6545.00	8.55	85.69	94.24	200.00	-105.76	Peak	100	6	P
5	7125.00	10.05	42.04	52.09	68.20	-16.11	Average	100	6	P
6	7125.00	10.05	55.32	65.37	88.20	-22.83	Peak	100	6	P
7	13090.00	20.20	30.65	50.85	68.20	-17.35	Average	100	225	P
8	13090.00	20.20	44.21	64.41	88.20	-23.79	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

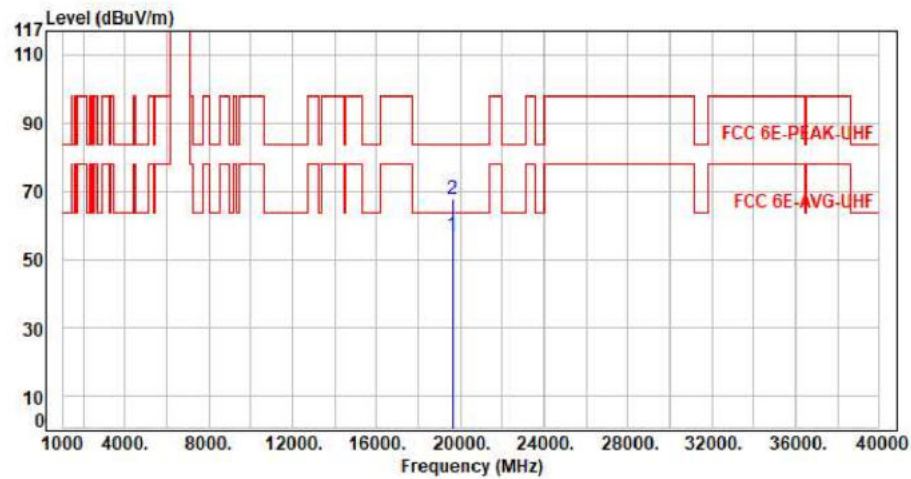

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	45.22	56.80	63.54	-6.74	Average	150	360	P
2	19635.00	11.58	55.99	67.57	83.54	-15.97	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

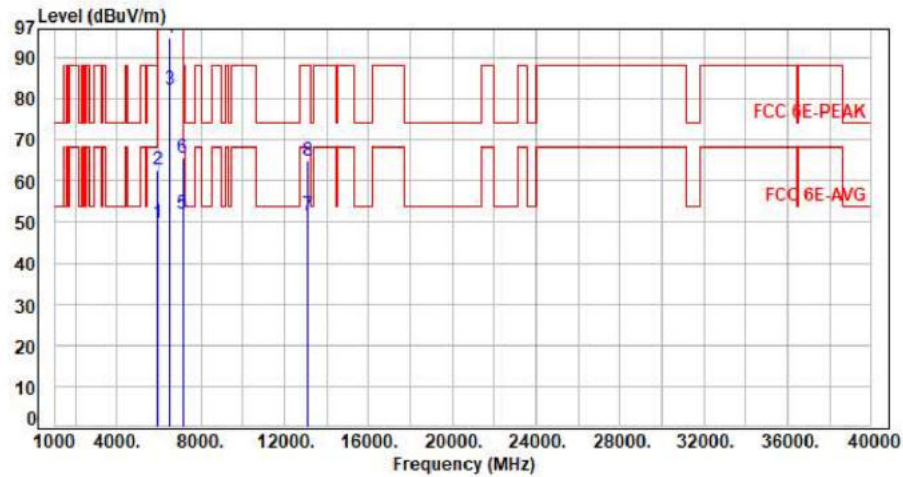

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	400	85	P
2	5925.00	7.66	55.21	62.87	88.20	-25.33	Peak	400	85	P
3	6545.00	8.55	73.60	82.15	200.00	-117.85	Average	400	85	P
4	6545.00	8.55	86.07	94.62	200.00	-105.38	Peak	400	85	P
5	7125.00	10.05	42.11	52.16	68.20	-16.04	Average	400	85	P
6	7125.00	10.05	55.55	65.60	88.20	-22.60	Peak	400	85	P
7	13090.00	20.20	31.54	51.74	68.20	-16.46	Average	100	225	P
8	13090.00	20.20	44.82	65.02	88.20	-23.18	Peak	100	225	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor