

**Appendix G. Maximum Equivalent Isotropically Radiated Power(E.I.R.P.)****1.1. Test Result and Data**

For CRIUS CO310-G1-Aux- U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.5	1	5955	4.49	4.49	2.812	5.10	9.59	9.10	24.00
11ax HE20	NSS1-MCS0	4.625	45	6175	4.35	4.35	2.723	5.10	9.45	8.81	24.00
11ax HE20	NSS1-MCS0	4.75	93	6415	4.34	4.34	2.716	5.10	9.44	8.79	24.00
11ax HE40	NSS1-MCS0	7.5	3	5965	7.64	7.64	5.808	5.10	12.74	18.79	24.00
11ax HE40	NSS1-MCS0	7.625	43	6165	7.48	7.48	5.598	5.10	12.58	18.11	24.00
11ax HE40	NSS1-MCS0	7.625	91	6405	7.33	7.33	5.408	5.10	12.43	17.50	24.00
11ax HE80	NSS1-MCS0	10.75	7	5985	10.41	10.41	10.990	5.10	15.51	35.56	24.00
11ax HE80	NSS1-MCS0	11	39	6145	10.53	10.53	11.298	5.10	15.63	36.56	24.00
11ax HE80	NSS1-MCS0	11.125	87	6385	10.38	10.38	10.914	5.10	15.48	35.32	24.00
11axHE160	NSS1-MCS0	12.5	15	6025	12.38	12.38	17.298	5.10	17.48	55.98	24.00
11ax HE160	NSS1-MCS0	12.5	47	6185	12.33	12.33	17.100	5.10	17.43	55.34	24.00
11ax HE160	NSS1-MCS0	12.5	79	6345	12.34	12.34	17.140	5.10	17.44	55.46	24.00

For CRIUS CO310-G1-Aux- U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.75	97	6435	4.39	4.39	2.748	3.36	7.75	5.96	24.00
11ax HE20	NSS1-MCS0	4.75	105	6475	4.33	4.33	2.710	3.36	7.69	5.87	24.00
11ax HE20	NSS1-MCS0	5.125	113	6515	4.37	4.37	2.735	3.36	7.73	5.93	24.00
11ax HE40	NSS1-MCS0	7.625	99	6445	7.40	7.40	5.495	3.36	10.76	11.91	24.00
11ax HE40	NSS1-MCS0	7.625	107	6485	7.32	7.32	5.395	3.36	10.68	11.69	24.00
11ax HE80	NSS1-MCS0	11.125	103	6465	10.39	10.39	10.940	3.36	13.75	23.71	24.00



For CRIUS CO310-G1-Aux- U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.875	117	6535	4.35	4.35	2.723	4.99	9.34	8.59	24.00
11ax HE20	NSS1-MCS0	5.25	153	6715	4.33	4.33	2.710	4.99	9.32	8.55	24.00
11ax HE20	NSS1-MCS0	4.875	181	6855	4.38	4.38	2.742	4.99	9.37	8.65	24.00
11ax HE40	NSS1-MCS0	7.75	123	6565	7.33	7.33	5.408	4.99	12.32	17.06	24.00
11ax HE40	NSS1-MCS0	8	155	6725	7.39	7.39	5.483	4.99	12.38	17.30	24.00
11ax HE40	NSS1-MCS0	7.625	179	6845	7.34	7.34	5.420	4.99	12.33	17.10	24.00
11ax HE80	NSS1-MCS0	11.125	135	6625	10.39	10.39	10.940	4.99	15.38	34.51	24.00
11ax HE80	NSS1-MCS0	11.25	151	6705	10.36	10.36	10.864	4.99	15.35	34.28	24.00
11ax HE80	NSS1-MCS0	11.125	167	6785	10.34	10.34	10.814	4.99	15.33	34.12	24.00
11ax HE160	NSS1-MCS0	12.875	143	6665	12.39	12.39	17.338	4.99	17.38	54.70	24.00

For CRIUS CO310-G1-Aux- U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	5.125	189	6895	4.37	4.37	2.735	4.21	8.58	7.21	24.00
11ax HE20	NSS1-MCS0	5.125	213	7015	4.34	4.34	2.716	4.21	8.55	7.16	24.00
11ax HE20	NSS1-MCS0	5	229	7095	4.36	4.36	2.729	4.21	8.57	7.19	24.00
11ax HE20	NSS1-MCS0	0	233	7115	0.21	0.21	1.050	4.21	4.42	2.77	24.00
11ax HE40	NSS1-MCS0	8	195	6925	7.35	7.35	5.433	4.21	11.56	14.32	24.00
11ax HE40	NSS1-MCS0	7.75	211	7005	7.36	7.36	5.445	4.21	11.57	14.35	24.00
11ax HE40	NSS1-MCS0	7.75	227	7085	7.38	7.38	5.470	4.21	11.59	14.42	24.00
11ax HE80	NSS1-MCS0	11.125	199	6945	10.35	10.35	10.839	4.21	14.56	28.58	24.00
11ax HE80	NSS1-MCS0	11	215	7025	10.39	10.39	10.940	4.21	14.60	28.84	24.00
11ax HE160	NSS1-MCS0	12.875	207	6985	12.38	12.38	17.298	4.21	16.59	45.60	24.00



For CRIUS N310-G1-Aux

Maximum Conducted Output Power (Within 6425-6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
7.75	11ax HE40	NSS1-MCS0	6525	3.95	3.95	0.00	3.95	3.36	7.31	24.00
11.125	11ax HE80	NSS1-MCS0	6545	3.30	3.30	0.00	3.30	3.36	6.66	24.00
12.75	11ax HE160	NSS1-MCS0	6505	10.81	10.81	0.00	10.81	3.36	14.17	24.00

Maximum Conducted Output Power (Extends across 6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
7.75	11ax HE40	NSS1-MCS0	6525	4.00	4.00	0.00	4.00	4.99	8.99	24.00
11.125	11ax HE80	NSS1-MCS0	6545	9.28	9.28	0.00	9.28	4.99	14.27	24.00
12.75	11ax HE160	NSS1-MCS0	6505	7.70	7.70	0.00	7.70	4.99	12.69	24.00



For CRIUS N310-G1-Aux

Maximum Conducted Output Power (Within 6525-6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
4.875	11ax HE20	NSS1-MCS0	6875	1.01	1.01	0.00	1.01	4.99	6.00	24.00
7.75	11ax HE40	NSS1-MCS0	6885	0.69	0.69	0.00	0.69	4.99	5.68	24.00
11	11ax HE80	NSS1-MCS0	6865	8.14	8.14	0.00	8.14	4.99	13.13	24.00
12.5	11ax HE160	NSS1-MCS0	6825	11.70	11.70	0.00	11.70	4.99	16.69	24.00

Maximum Conducted Output Power (Extends across 6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
4.875	11ax HE20	NSS1-MCS0	6875	1.05	1.05	0.00	1.05	4.21	5.26	24.00
7.75	11ax HE40	NSS1-MCS0	6885	5.88	5.88	0.00	5.88	4.21	10.09	24.00
11	11ax HE80	NSS1-MCS0	6865	5.46	5.46	0.00	5.46	4.21	9.67	24.00
12.5	11ax HE160	NSS1-MCS0	6825	2.39	2.39	0.00	2.39	4.21	6.60	24.00



For CRIUS CO310-G1-Main- U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5	1	5955	4.51	4.51	2.825	3.91	8.42	6.95	24.00
11ax HE20	NSS1-MCS0	5.125	45	6175	4.57	4.57	2.864	3.91	8.48	7.05	24.00
11ax HE20	NSS1-MCS0	5.25	93	6415	4.43	4.43	2.773	3.91	8.34	6.82	24.00
11ax HE40	NSS1-MCS0	7.75	3	5965	7.62	7.62	5.781	3.91	11.53	14.22	24.00
11ax HE40	NSS1-MCS0	7.875	43	6165	7.58	7.58	5.728	3.91	11.49	14.09	24.00
11ax HE40	NSS1-MCS0	8	91	6405	7.48	7.48	5.598	3.91	11.39	13.77	24.00
11ax HE80	NSS1-MCS0	10.875	7	5985	10.36	10.36	10.864	3.91	14.27	26.73	24.00
11ax HE80	NSS1-MCS0	11.125	39	6145	10.46	10.46	11.117	3.91	14.37	27.35	24.00
11ax HE80	NSS1-MCS0	11.125	87	6385	10.41	10.41	10.990	3.91	14.32	27.04	24.00
11axHE160	NSS1-MCS0	12.5	15	6025	12.47	12.47	17.660	3.91	16.38	43.45	24.00
11ax HE160	NSS1-MCS0	12.5	47	6185	12.43	12.43	17.498	3.91	16.34	43.05	24.00
11ax HE160	NSS1-MCS0	12.625	79	6345	12.48	12.48	17.701	3.91	16.39	43.55	24.00

For CRIUS CO310-G1-Main- U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.375	97	6435	4.49	4.49	2.812	2.41	6.90	4.90	24.00
11ax HE20	NSS1-MCS0	5.375	105	6475	4.46	4.46	2.793	2.41	6.87	4.86	24.00
11ax HE20	NSS1-MCS0	5.375	113	6515	4.42	4.42	2.767	2.41	6.83	4.82	24.00
11ax HE40	NSS1-MCS0	7.875	99	6445	7.39	7.39	5.483	2.41	9.80	9.55	24.00
11ax HE40	NSS1-MCS0	7.875	107	6485	7.44	7.44	5.546	2.41	9.85	9.66	24.00
11ax HE80	NSS1-MCS0	11.125	103	6465	10.42	10.42	11.015	2.41	12.83	19.19	24.00



For CRIUS CO310-G1-Main- U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.25	117	6535	4.43	4.43	2.773	2.67	7.10	5.13	24.00
11ax HE20	NSS1-MCS0	5.375	153	6715	4.46	4.46	2.793	2.67	7.13	5.16	24.00
11ax HE20	NSS1-MCS0	5.5	181	6855	4.42	4.42	2.767	2.67	7.09	5.12	24.00
11ax HE40	NSS1-MCS0	8	123	6565	7.47	7.47	5.585	2.67	10.14	10.33	24.00
11ax HE40	NSS1-MCS0	8.125	155	6725	7.48	7.48	5.598	2.67	10.15	10.35	24.00
11ax HE40	NSS1-MCS0	8.125	179	6845	7.43	7.43	5.534	2.67	10.10	10.23	24.00
11ax HE80	NSS1-MCS0	11.125	135	6625	10.47	10.47	11.143	2.67	13.14	20.61	24.00
11ax HE80	NSS1-MCS0	11.25	151	6705	10.46	10.46	11.117	2.67	13.13	20.56	24.00
11ax HE80	NSS1-MCS0	11.25	167	6785	10.41	10.41	10.990	2.67	13.08	20.32	24.00
11ax HE160	NSS1-MCS0	12.625	143	6665	12.42	12.42	17.458	2.67	15.09	32.28	24.00

For CRIUS CO310-G1-Main- U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.5	189	6895	4.46	4.46	2.793	2.15	6.61	4.58	24.00
11ax HE20	NSS1-MCS0	5.375	213	7015	4.41	4.41	2.761	2.15	6.56	4.53	24.00
11ax HE20	NSS1-MCS0	5.25	229	7095	4.38	4.38	2.742	2.15	6.53	4.50	24.00
11ax HE20	NSS1-MCS0	-3	233	7115	-4.78	-4.78	0.333	2.15	-2.63	0.55	24.00
11ax HE40	NSS1-MCS0	8	195	6925	7.44	7.44	5.546	2.15	9.59	9.10	24.00
11ax HE40	NSS1-MCS0	8	211	7005	7.42	7.42	5.521	2.15	9.57	9.06	24.00
11ax HE40	NSS1-MCS0	8	227	7085	7.45	7.45	5.559	2.15	9.60	9.12	24.00
11ax HE80	NSS1-MCS0	11.25	199	6945	10.39	10.39	10.940	2.15	12.54	17.95	24.00
11ax HE80	NSS1-MCS0	11.25	215	7025	10.45	10.45	11.092	2.15	12.60	18.20	24.00
11ax HE160	NSS1-MCS0	12.75	207	6985	12.39	12.39	17.338	2.15	14.54	28.44	24.00



For CRIUS CO310-G1-Main

Maximum Conducted Output Power (Within 6425-6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
8	11ax HE40	NSS1-MCS0	6525	4.52	4.52	0.00	4.52	2.41	6.93	24.00
11.125	11ax HE80	NSS1-MCS0	6545	3.15	3.15	0.00	3.15	2.41	5.56	24.00
12.625	11ax HE160	NSS1-MCS0	6505	10.83	10.83	0.00	10.83	2.41	13.24	24.00

Maximum Conducted Output Power (Extends across 6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
8	11ax HE40	NSS1-MCS0	6525	4.77	4.77	0.00	4.77	2.67	7.44	24.00
11.125	11ax HE80	NSS1-MCS0	6545	9.74	9.74	0.00	9.74	2.67	12.41	24.00
12.625	11ax HE160	NSS1-MCS0	6505	8.28	8.28	0.00	8.28	2.67	10.95	24.00



For CRIUS CO310-G1-Main

Maximum Conducted Output Power (Within 6525-6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
5.5	11ax HE20	NSS1-MCS0	6875	1.68	1.68	0.00	1.68	2.67	4.35	24.00
8.125	11ax HE40	NSS1-MCS0	6885	1.35	1.35	0.00	1.35	2.67	4.02	24.00
11.125	11ax HE80	NSS1-MCS0	6865	8.56	8.56	0.00	8.56	2.67	11.23	24.00
13	11ax HE160	NSS1-MCS0	6825	12.15	12.15	0.00	12.15	2.67	14.82	24.00

Maximum Conducted Output Power (Extends across 6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
5.5	11ax HE20	NSS1-MCS0	6875	1.42	1.42	0.00	1.42	2.15	3.57	24.00
8.125	11ax HE40	NSS1-MCS0	6885	6.07	6.07	0.00	6.07	2.15	8.22	24.00
11.125	11ax HE80	NSS1-MCS0	6865	5.48	5.48	0.00	5.48	2.15	7.63	24.00
13	11ax HE160	NSS1-MCS0	6825	2.65	2.65	0.00	2.65	2.15	4.80	24.00



For CRIUS CO310-G1-Mimo U-NII-5

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.5	1	5955	2.27	2.10	5.20	3.31	5.10	10.30	10.71	24.00
11ax HE20	NSS1-MCS0	2.625	45	6175	2.11	1.98	5.06	3.20	5.10	10.16	10.37	24.00
11ax HE20	NSS1-MCS0	2.625	93	6415	2.03	1.66	4.86	3.06	5.10	9.96	9.91	24.00
11ax HE40	NSS1-MCS0	5	3	5965	5.11	4.92	8.03	6.35	5.10	13.13	20.54	24.00
11ax HE40	NSS1-MCS0	5.25	43	6165	5.06	4.87	7.98	6.28	5.10	13.08	20.31	24.00
11ax HE40	NSS1-MCS0	5.125	91	6405	4.92	4.74	7.84	6.08	5.10	12.94	19.68	24.00
11ax HE80	NSS1-MCS0	7.5	7	5985	7.30	7.21	10.27	10.63	5.10	15.37	34.40	24.00
11ax HE80	NSS1-MCS0	7.5	39	6145	7.18	7.06	10.13	10.31	5.10	15.23	33.35	24.00
11ax HE80	NSS1-MCS0	7.625	87	6385	7.19	7.28	10.25	10.58	5.10	15.35	34.24	24.00
11axHE160	NSS1-MCS0	10	15	6025	9.98	9.85	12.93	19.61	5.10	18.03	63.47	24.00
11ax HE160	NSS1-MCS0	10.125	47	6185	9.89	9.98	12.95	19.70	5.10	18.05	63.76	24.00
11ax HE160	NSS1-MCS0	10.25	79	6345	9.86	9.82	12.85	19.28	5.10	17.95	62.38	24.00

For CRIUS CO310-G1-Mimo U-NII-6

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.625	97	6435	2.14	1.73	4.95	3.13	3.36	8.31	6.78	24.00
11ax HE20	NSS1-MCS0	2.75	105	6475	2.19	1.54	4.89	3.08	3.36	8.25	6.68	24.00
11ax HE20	NSS1-MCS0	2.875	113	6515	2.16	1.59	4.89	3.09	3.36	8.25	6.69	24.00
11ax HE40	NSS1-MCS0	5.125	99	6445	4.93	4.79	7.87	6.12	3.36	11.23	13.28	24.00
11ax HE40	NSS1-MCS0	5.125	107	6485	4.85	4.82	7.85	6.09	3.36	11.21	13.20	24.00
11ax HE80	NSS1-MCS0	8.25	103	6465	7.54	7.43	10.50	11.21	3.36	13.86	24.30	24.00



For CRIUS CO310-G1-Mimo U-NII-7

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.5	117	6535	1.51	1.94	4.74	2.98	4.99	9.73	9.40	24.00
11ax HE20	NSS1-MCS0	2.75	153	6715	1.64	1.96	4.81	3.03	4.99	9.80	9.56	24.00
11ax HE20	NSS1-MCS0	2.75	181	6855	2.12	2.02	5.08	3.22	4.99	10.07	10.16	24.00
11ax HE40	NSS1-MCS0	5.25	123	6565	4.95	4.86	7.92	6.19	4.99	12.91	19.52	24.00
11ax HE40	NSS1-MCS0	5.375	155	6725	4.85	4.78	7.83	6.06	4.99	12.82	19.12	24.00
11ax HE40	NSS1-MCS0	5.25	179	6845	5.14	4.63	7.90	6.17	4.99	12.89	19.47	24.00
11ax HE80	NSS1-MCS0	7.75	135	6625	7.35	7.36	10.37	10.88	4.99	15.36	34.32	24.00
11ax HE80	NSS1-MCS0	7.75	151	6705	7.19	7.29	10.25	10.59	4.99	15.24	33.42	24.00
11ax HE80	NSS1-MCS0	7.5	167	6785	6.96	6.99	9.99	9.97	4.99	14.98	31.44	24.00
11ax HE160	NSS1-MCS0	10	143	6665	9.46	9.71	12.60	18.18	4.99	17.59	57.37	24.00

For CRIUS CO310-G1-Mimo U-NII-8

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	3	189	6895	2.24	1.64	4.96	3.13	4.21	9.17	8.26	24.00
11ax HE20	NSS1-MCS0	3	213	7015	2.15	1.63	4.91	3.10	4.21	9.12	8.16	24.00
11ax HE20	NSS1-MCS0	2.875	229	7095	2.23	1.55	4.91	3.10	4.21	9.12	8.17	24.00
11ax HE20	NSS1-MCS0	-3.25	233	7115	-5.60	-3.42	-1.36	0.73	4.21	2.85	1.93	24.00
11ax HE40	NSS1-MCS0	5.375	195	6925	5.06	4.85	7.97	6.26	4.21	12.18	16.51	24.00
11ax HE40	NSS1-MCS0	5.375	211	7005	5.01	4.72	7.88	6.13	4.21	12.09	16.17	24.00
11ax HE40	NSS1-MCS0	5.25	227	7085	5.12	4.56	7.86	6.11	4.21	12.07	16.10	24.00
11ax HE80	NSS1-MCS0	8.75	199	6945	7.85	7.91	10.89	12.28	4.21	15.10	32.36	24.00
11ax HE80	NSS1-MCS0	8.875	215	7025	8.01	7.91	10.97	12.50	4.21	15.18	32.97	24.00
11ax HE160	NSS1-MCS0	10.375	207	6985	10.05	9.84	12.96	19.75	4.21	17.17	52.08	24.00



For CRIUS CO310-G1-Mimo

Maximum Conducted Output Power (Within 6425-6525MHz band)
RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5	11ax HE40	NSS1-MCS0	6525	-0.57	-0.57	2.44	0.00	2.44	3.36	5.80	24.00
7.25	11ax HE80	NSS1-MCS0	6545	-2.56	-2.91	0.28	0.00	0.28	3.36	3.64	24.00
10	11ax HE160	NSS1-MCS0	6505	6.01	5.61	8.82	0.00	8.82	3.36	12.18	24.00

Maximum Conducted Output Power (Extends across 6525MHz band)
RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5	11ax HE40	NSS1-MCS0	6525	-0.71	-0.88	2.22	0.00	2.22	4.99	7.21	24.00
7.25	11ax HE80	NSS1-MCS0	6545	3.43	3.35	6.40	0.00	6.40	4.99	11.39	24.00
10	11ax HE160	NSS1-MCS0	6505	3.00	2.53	5.78	0.00	5.78	4.99	10.77	24.00



For CRIUS CO310-G1-Mimo

Maximum Conducted Output Power (Within 6525-6875MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
2.75	11ax HE20	NSS1-MCS0	6875	-3.46	-4.29	-0.84	0.00	-0.84	4.99	4.15	24.00
5.375	11ax HE40	NSS1-MCS0	6885	-3.84	-4.33	-1.07	0.00	-1.07	4.99	3.92	24.00
8	11ax HE80	NSS1-MCS0	6865	3.26	2.50	5.91	0.00	5.91	4.99	10.90	24.00
10	11ax HE160	NSS1-MCS0	6825	7.29	6.21	9.79	0.00	9.79	4.99	14.78	24.00

Maximum Conducted Output Power (Extends across 6875MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
2.75	11ax HE20	NSS1-MCS0	6875	-3.71	-4.36	-1.01	0.00	-1.01	4.21	3.20	24.00
5.375	11ax HE40	NSS1-MCS0	6885	1.28	0.50	3.92	0.00	3.92	4.21	8.13	24.00
8	11ax HE80	NSS1-MCS0	6865	0.45	-0.27	3.12	0.00	3.12	4.21	7.33	24.00
10	11ax HE160	NSS1-MCS0	6825	-2.23	-3.29	0.28	0.00	0.28	4.21	4.49	24.00



For CRIUS N310-G1-Aux- U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.5	1	5955	4.49	4.49	2.812	3.43	7.92	6.19	24.00
11ax HE20	NSS1-MCS0	4.625	45	6175	4.35	4.35	2.723	3.43	7.78	6.00	24.00
11ax HE20	NSS1-MCS0	4.75	93	6415	4.34	4.34	2.716	3.43	7.77	5.98	24.00
11ax HE40	NSS1-MCS0	7.5	3	5965	7.64	7.64	5.808	3.43	11.07	12.79	24.00
11ax HE40	NSS1-MCS0	7.625	43	6165	7.48	7.48	5.598	3.43	10.91	12.33	24.00
11ax HE40	NSS1-MCS0	7.625	91	6405	7.33	7.33	5.408	3.43	10.76	11.91	24.00
11ax HE80	NSS1-MCS0	10.75	7	5985	10.41	10.41	10.990	3.43	13.84	24.21	24.00
11ax HE80	NSS1-MCS0	11	39	6145	10.53	10.53	11.298	3.43	13.96	24.89	24.00
11ax HE80	NSS1-MCS0	11.125	87	6385	10.38	10.38	10.914	3.43	13.81	24.04	24.00
11axHE160	NSS1-MCS0	12.5	15	6025	12.38	12.38	17.298	3.43	15.81	38.11	24.00
11ax HE160	NSS1-MCS0	12.5	47	6185	12.33	12.33	17.100	3.43	15.76	37.67	24.00
11ax HE160	NSS1-MCS0	12.5	79	6345	12.34	12.34	17.140	3.43	15.77	37.76	24.00

For CRIUS N310-G1-Aux- U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.75	97	6435	4.39	4.39	2.748	3.50	7.89	6.15	24.00
11ax HE20	NSS1-MCS0	4.75	105	6475	4.33	4.33	2.710	3.50	7.83	6.07	24.00
11ax HE20	NSS1-MCS0	5.125	113	6515	4.37	4.37	2.735	3.50	7.87	6.12	24.00
11ax HE40	NSS1-MCS0	7.625	99	6445	7.40	7.40	5.495	3.50	10.90	12.30	24.00
11ax HE40	NSS1-MCS0	7.625	107	6485	7.32	7.32	5.395	3.50	10.82	12.08	24.00
11ax HE80	NSS1-MCS0	11.125	103	6465	10.39	10.39	10.940	3.50	13.89	24.49	24.00



For CRIUS N310-G1-Aux- U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.875	117	6535	4.35	4.35	2.723	4.04	8.39	6.90	24.00
11ax HE20	NSS1-MCS0	5.25	153	6715	4.33	4.33	2.710	4.04	8.37	6.87	24.00
11ax HE20	NSS1-MCS0	4.875	181	6855	4.38	4.38	2.742	4.04	8.42	6.95	24.00
11ax HE40	NSS1-MCS0	7.75	123	6565	7.33	7.33	5.408	4.04	11.37	13.71	24.00
11ax HE40	NSS1-MCS0	8	155	6725	7.39	7.39	5.483	4.04	11.43	13.90	24.00
11ax HE40	NSS1-MCS0	7.625	179	6845	7.34	7.34	5.420	4.04	11.38	13.74	24.00
11ax HE80	NSS1-MCS0	11.125	135	6625	10.39	10.39	10.940	4.04	14.43	27.73	24.00
11ax HE80	NSS1-MCS0	11.25	151	6705	10.36	10.36	10.864	4.04	14.40	27.54	24.00
11ax HE80	NSS1-MCS0	11.125	167	6785	10.34	10.34	10.814	4.04	14.38	27.42	24.00
11ax HE160	NSS1-MCS0	12.875	143	6665	12.39	12.39	17.338	4.04	16.43	43.95	24.00

For CRIUS N310-G1-Aux- U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	5.125	189	6895	4.37	4.37	2.735	3.45	7.82	6.05	24.00
11ax HE20	NSS1-MCS0	5.125	213	7015	4.34	4.34	2.716	3.45	7.79	6.01	24.00
11ax HE20	NSS1-MCS0	5	229	7095	4.36	4.36	2.729	3.45	7.81	6.04	24.00
11ax HE20	NSS1-MCS0	0	233	7115	0.21	0.21	1.050	3.45	3.66	2.32	24.00
11ax HE40	NSS1-MCS0	8	195	6925	7.35	7.35	5.433	3.45	10.80	12.02	24.00
11ax HE40	NSS1-MCS0	7.75	211	7005	7.36	7.36	5.445	3.45	10.81	12.05	24.00
11ax HE40	NSS1-MCS0	7.75	227	7085	7.38	7.38	5.470	3.45	10.83	12.11	24.00
11ax HE80	NSS1-MCS0	11.125	199	6945	10.35	10.35	10.839	3.45	13.80	23.99	24.00
11ax HE80	NSS1-MCS0	11	215	7025	10.39	10.39	10.940	3.45	13.84	24.21	24.00
11ax HE160	NSS1-MCS0	12.875	207	6985	12.38	12.38	17.298	3.45	15.83	38.28	24.00



For CRIUS N310-G1-Aux

Maximum Conducted Output Power (Within 6425-6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
7.75	11ax HE40	NSS1-MCS0	6525	3.95	3.95	0.00	3.95	3.50	7.45	24.00
11.125	11ax HE80	NSS1-MCS0	6545	3.30	3.30	0.00	3.30	3.50	6.80	24.00
12.75	11ax HE160	NSS1-MCS0	6505	10.81	10.81	0.00	10.81	3.50	14.31	24.00

Maximum Conducted Output Power (Extends across 6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
7.75	11ax HE40	NSS1-MCS0	6525	4.00	4.00	0.00	4.00	4.04	8.04	24.00
11.125	11ax HE80	NSS1-MCS0	6545	9.28	9.28	0.00	9.28	4.04	13.32	24.00
12.75	11ax HE160	NSS1-MCS0	6505	7.70	7.70	0.00	7.70	4.04	11.74	24.00



For CRIUS N310-G1-Aux

Maximum Conducted Output Power (Within 6525-6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
4.875	11ax HE20	NSS1-MCS0	6875	1.01	1.01	0.00	1.01	4.04	5.05	24.00
7.75	11ax HE40	NSS1-MCS0	6885	0.69	0.69	0.00	0.69	4.04	4.73	24.00
11	11ax HE80	NSS1-MCS0	6865	8.14	8.14	0.00	8.14	4.04	12.18	24.00
12.5	11ax HE160	NSS1-MCS0	6825	11.70	11.70	0.00	11.70	4.04	15.74	24.00

Maximum Conducted Output Power (Extends across 6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
4.875	11ax HE20	NSS1-MCS0	6875	1.05	1.05	0.00	1.05	3.45	4.50	24.00
7.75	11ax HE40	NSS1-MCS0	6885	5.88	5.88	0.00	5.88	3.45	9.33	24.00
11	11ax HE80	NSS1-MCS0	6865	5.46	5.46	0.00	5.46	3.45	8.91	24.00
12.5	11ax HE160	NSS1-MCS0	6825	2.39	2.39	0.00	2.39	3.45	5.84	24.00



For CRIUS N310-G1-Main- U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5	1	5955	4.51	4.51	2.825	4.99	9.50	8.91	24.00
11ax HE20	NSS1-MCS0	5.125	45	6175	4.57	4.57	2.864	4.99	9.56	9.04	24.00
11ax HE20	NSS1-MCS0	5.25	93	6415	4.43	4.43	2.773	4.99	9.42	8.75	24.00
11ax HE40	NSS1-MCS0	7.75	3	5965	7.62	7.62	5.781	4.99	12.61	18.24	24.00
11ax HE40	NSS1-MCS0	7.875	43	6165	7.58	7.58	5.728	4.99	12.57	18.07	24.00
11ax HE40	NSS1-MCS0	8	91	6405	7.48	7.48	5.598	4.99	12.47	17.66	24.00
11ax HE80	NSS1-MCS0	10.875	7	5985	10.36	10.36	10.864	4.99	15.35	34.28	24.00
11ax HE80	NSS1-MCS0	11.125	39	6145	10.46	10.46	11.117	4.99	15.45	35.08	24.00
11ax HE80	NSS1-MCS0	11.125	87	6385	10.41	10.41	10.990	4.99	15.40	34.67	24.00
11axHE160	NSS1-MCS0	12.5	15	6025	12.47	12.47	17.660	4.99	17.46	55.72	24.00
11ax HE160	NSS1-MCS0	12.5	47	6185	12.43	12.43	17.498	4.99	17.42	55.21	24.00
11ax HE160	NSS1-MCS0	12.625	79	6345	12.48	12.48	17.701	4.99	17.47	55.85	24.00

For CRIUS N310-G1-Main- U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.375	97	6435	4.49	4.49	2.812	4.75	9.24	8.39	24.00
11ax HE20	NSS1-MCS0	5.375	105	6475	4.46	4.46	2.793	4.75	9.21	8.34	24.00
11ax HE20	NSS1-MCS0	5.375	113	6515	4.42	4.42	2.767	4.75	9.17	8.26	24.00
11ax HE40	NSS1-MCS0	7.875	99	6445	7.39	7.39	5.483	4.75	12.14	16.37	24.00
11ax HE40	NSS1-MCS0	7.875	107	6485	7.44	7.44	5.546	4.75	12.19	16.56	24.00
11ax HE80	NSS1-MCS0	11.125	103	6465	10.42	10.42	11.015	4.75	15.17	32.89	24.00



For CRIUS N310-G1-Main- U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.25	117	6535	4.43	4.43	2.773	5.68	10.11	10.26	24.00
11ax HE20	NSS1-MCS0	5.375	153	6715	4.46	4.46	2.793	5.68	10.14	10.33	24.00
11ax HE20	NSS1-MCS0	5.5	181	6885	4.42	4.42	2.767	5.68	10.10	10.23	24.00
11ax HE40	NSS1-MCS0	8	123	6565	7.47	7.47	5.585	5.68	13.15	20.65	24.00
11ax HE40	NSS1-MCS0	8.125	155	6725	7.48	7.48	5.598	5.68	13.16	20.70	24.00
11ax HE40	NSS1-MCS0	8.125	179	6845	7.43	7.43	5.534	5.68	13.11	20.46	24.00
11ax HE80	NSS1-MCS0	11.125	135	6625	10.47	10.47	11.143	5.68	16.15	41.21	24.00
11ax HE80	NSS1-MCS0	11.25	151	6705	10.46	10.46	11.117	5.68	16.14	41.11	24.00
11ax HE80	NSS1-MCS0	11.25	167	6785	10.41	10.41	10.990	5.68	16.09	40.64	24.00
11ax HE160	NSS1-MCS0	12.625	143	6665	12.42	12.42	17.458	5.68	18.10	64.57	24.00

For CRIUS N310-G1-Main- U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.5	189	6895	4.46	4.46	2.793	3.60	8.06	6.40	24.00
11ax HE20	NSS1-MCS0	5.375	213	7015	4.41	4.41	2.761	3.60	8.01	6.32	24.00
11ax HE20	NSS1-MCS0	5.25	229	7095	4.38	4.38	2.742	3.60	7.98	6.28	24.00
11ax HE20	NSS1-MCS0	-3	233	7115	-4.78	-4.78	0.333	3.60	-1.18	0.76	24.00
11ax HE40	NSS1-MCS0	8	195	6925	7.44	7.44	5.546	3.60	11.04	12.71	24.00
11ax HE40	NSS1-MCS0	8	211	7005	7.42	7.42	5.521	3.60	11.02	12.65	24.00
11ax HE40	NSS1-MCS0	8	227	7085	7.45	7.45	5.559	3.60	11.05	12.74	24.00
11ax HE80	NSS1-MCS0	11.25	199	6945	10.39	10.39	10.940	3.60	13.99	25.06	24.00
11ax HE80	NSS1-MCS0	11.25	215	7025	10.45	10.45	11.092	3.60	14.05	25.41	24.00
11ax HE160	NSS1-MCS0	12.75	207	6985	12.39	12.39	17.338	3.60	15.99	39.72	24.00



For CRIUS N310-G1- Main

Maximum Conducted Output Power (Within 6425-6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
8	11ax HE40	NSS1-MCS0	6525	4.52	4.52	0.00	4.52	4.75	9.27	24.00
11.125	11ax HE80	NSS1-MCS0	6545	3.15	3.15	0.00	3.15	4.75	7.90	24.00
12.625	11ax HE160	NSS1-MCS0	6505	10.83	10.83	0.00	10.83	4.75	15.58	24.00

Maximum Conducted Output Power (Extends across 6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
8	11ax HE40	NSS1-MCS0	6525	4.77	4.77	0.00	4.77	5.68	10.45	24.00
11.125	11ax HE80	NSS1-MCS0	6545	9.74	9.74	0.00	9.74	5.68	15.42	24.00
12.625	11ax HE160	NSS1-MCS0	6505	8.28	8.28	0.00	8.28	5.68	13.96	24.00



For CRIUS N310-G1- Main

Maximum Conducted Output Power (Within 6525-6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
5.5	11ax HE20	NSS1-MCS0	6875	1.68	1.68	0.00	1.68	5.68	7.36	24.00
8.125	11ax HE40	NSS1-MCS0	6885	1.35	1.35	0.00	1.35	5.68	7.03	24.00
11.125	11ax HE80	NSS1-MCS0	6865	8.56	8.56	0.00	8.56	5.68	14.24	24.00
13	11ax HE160	NSS1-MCS0	6825	12.15	12.15	0.00	12.15	5.68	17.83	24.00

Maximum Conducted Output Power (Extends across 6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
5.5	11ax HE20	NSS1-MCS0	6875	1.42	1.42	0.00	1.42	3.60	5.02	24.00
8.125	11ax HE40	NSS1-MCS0	6885	6.07	6.07	0.00	6.07	3.60	9.67	24.00
11.125	11ax HE80	NSS1-MCS0	6865	5.48	5.48	0.00	5.48	3.60	9.08	24.00
13	11ax HE160	NSS1-MCS0	6825	2.65	2.65	0.00	2.65	3.60	6.25	24.00



For CRIUS N310-G1- Mimo - U-NII-5

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.5	1	5955	2.27	2.10	5.20	3.31	4.99	10.19	10.44	24.00
11ax HE20	NSS1-MCS0	2.65	45	6175	2.11	1.98	5.06	3.20	4.99	10.05	10.11	24.00
11ax HE20	NSS1-MCS0	2.625	93	6415	2.03	1.66	4.86	3.06	4.99	9.85	9.66	24.00
11ax HE40	NSS1-MCS0	5	3	5965	5.11	4.92	8.03	6.35	4.99	13.02	20.03	24.00
11ax HE40	NSS1-MCS0	5.25	43	6165	5.06	4.87	7.98	6.28	4.99	12.97	19.80	24.00
11ax HE40	NSS1-MCS0	5.125	91	6405	4.92	4.74	7.84	6.08	4.99	12.83	19.19	24.00
11ax HE80	NSS1-MCS0	7.5	7	5985	7.30	7.21	10.27	10.63	4.99	15.26	33.54	24.00
11ax HE80	NSS1-MCS0	7.5	39	6145	7.18	7.06	10.13	10.31	4.99	15.12	32.51	24.00
11ax HE80	NSS1-MCS0	7.625	87	6385	7.19	7.28	10.25	10.58	4.99	15.24	33.39	24.00
11axHE160	NSS1-MCS0	10	15	6025	9.98	9.85	12.93	19.61	4.99	17.92	61.88	24.00
11ax HE160	NSS1-MCS0	10.125	47	6185	9.89	9.98	12.95	19.70	4.99	17.94	62.17	24.00
11ax HE160	NSS1-MCS0	10.25	79	6345	9.86	9.82	12.85	19.28	4.99	17.84	60.82	24.00

For CRIUS N310-G1- Mimo - U-NII-6

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.625	97	6435	2.14	1.73	4.95	3.13	4.75	9.70	9.33	24.00
11ax HE20	NSS1-MCS0	2.75	105	6475	2.19	1.54	4.89	3.08	4.75	9.64	9.20	24.00
11ax HE20	NSS1-MCS0	2.875	113	6515	2.16	1.59	4.89	3.09	4.75	9.64	9.21	24.00
11ax HE40	NSS1-MCS0	5.125	99	6445	4.93	4.79	7.87	6.12	4.75	12.62	18.28	24.00
11ax HE40	NSS1-MCS0	5.125	107	6485	4.85	4.82	7.85	6.09	4.75	12.60	18.18	24.00
11ax HE80	NSS1-MCS0	8.25	103	6465	7.54	7.43	10.50	11.21	4.75	15.25	33.46	24.00



For CRIUS N310-G1- Mimo - U-NII-7

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.5	117	6535	1.51	1.94	4.74	2.98	5.68	10.42	11.02	24.00
11ax HE20	NSS1-MCS0	2.75	153	6715	1.64	1.96	4.81	3.03	5.68	10.49	11.20	24.00
11ax HE20	NSS1-MCS0	2.75	181	6855	2.12	2.02	5.08	3.22	5.68	10.76	11.91	24.00
11ax HE40	NSS1-MCS0	5.25	123	6565	4.95	4.86	7.92	6.19	5.68	13.60	22.89	24.00
11ax HE40	NSS1-MCS0	5.375	155	6725	4.85	4.78	7.83	6.06	5.68	13.51	22.42	24.00
11ax HE40	NSS1-MCS0	5.25	179	6845	5.14	4.63	7.90	6.17	5.68	13.58	22.82	24.00
11ax HE80	NSS1-MCS0	7.75	135	6625	7.35	7.36	10.37	10.88	5.68	16.05	40.23	24.00
11ax HE80	NSS1-MCS0	7.75	151	6705	7.19	7.29	10.25	10.59	5.68	15.93	39.18	24.00
11ax HE80	NSS1-MCS0	7.5	167	6785	6.96	6.99	9.99	9.97	5.68	15.67	36.86	24.00
11ax HE160	NSS1-MCS0	10	143	6665	9.46	9.71	12.60	18.18	5.68	18.28	67.25	24.00

For CRIUS N310-G1- Mimo - U-NII-8

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	3	189	6895	2.24	1.64	4.96	3.13	3.60	8.56	7.18	24.00
11ax HE20	NSS1-MCS0	3	213	7015	2.15	1.63	4.91	3.10	3.60	8.51	7.09	24.00
11ax HE20	NSS1-MCS0	2.875	229	7095	2.23	1.55	4.91	3.10	3.60	8.51	7.10	24.00
11ax HE20	NSS1-MCS0	-3.25	233	7115	-5.60	-3.42	-1.36	0.73	3.60	2.24	1.67	24.00
11ax HE40	NSS1-MCS0	5.375	195	6925	5.06	4.85	7.97	6.26	3.60	11.57	14.34	24.00
11ax HE40	NSS1-MCS0	5.375	211	7005	5.01	4.72	7.88	6.13	3.60	11.48	14.05	24.00
11ax HE40	NSS1-MCS0	5.25	227	7085	5.12	4.56	7.86	6.11	3.60	11.46	13.99	24.00
11ax HE80	NSS1-MCS0	8.75	199	6945	7.85	7.91	10.89	12.28	3.60	14.49	28.12	24.00
11ax HE80	NSS1-MCS0	8.875	215	7025	8.01	7.91	10.97	12.50	3.60	14.57	28.65	24.00
11ax HE160	NSS1-MCS0	10.375	207	6985	10.05	9.84	12.96	19.75	3.60	16.56	45.25	24.00



For CRIUS N310-G1-Mimo

Maximum Conducted Output Power (Within 6425-6525MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5	11ax HE40	NSS1-MCS0	6525	-0.57	-0.57	2.44	0.00	2.44	4.75	7.19	24.00
7.25	11ax HE80	NSS1-MCS0	6545	-2.56	-2.91	0.28	0.00	0.28	4.75	5.03	24.00
10	11ax HE160	NSS1-MCS0	6505	6.01	5.61	8.82	0.00	8.82	4.75	13.57	24.00

Maximum Conducted Output Power (Extends across 6525MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5	11ax HE40	NSS1-MCS0	6525	-0.71	-0.88	2.22	0.00	2.22	5.68	7.90	24.00
7.25	11ax HE80	NSS1-MCS0	6545	3.43	3.35	6.40	0.00	6.40	5.68	12.08	24.00
10	11ax HE160	NSS1-MCS0	6505	3.00	2.53	5.78	0.00	5.78	5.68	11.46	24.00



For CRIUS N310-G1-Mimo

Maximum Conducted Output Power (Within 6525-6875MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
2.75	11ax HE20	NSS1-MCS0	6875	-3.46	-4.29	-0.84	0.00	-0.84	5.68	4.84	24.00
5.375	11ax HE40	NSS1-MCS0	6885	-3.84	-4.33	-1.07	0.00	-1.07	5.68	4.61	24.00
8	11ax HE80	NSS1-MCS0	6865	3.26	2.50	5.91	0.00	5.91	5.68	11.59	24.00
10	11ax HE160	NSS1-MCS0	6825	7.29	6.21	9.79	0.00	9.79	5.68	15.47	24.00

Maximum Conducted Output Power (Extends across 6875MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
2.75	11ax HE20	NSS1-MCS0	6875	-3.71	-4.36	-1.01	0.00	-1.01	3.60	2.59	24.00
5.375	11ax HE40	NSS1-MCS0	6885	1.28	0.50	3.92	0.00	3.92	3.60	7.52	24.00
8	11ax HE80	NSS1-MCS0	6865	0.45	-0.27	3.12	0.00	3.12	3.60	6.72	24.00
10	11ax HE160	NSS1-MCS0	6825	-2.23	-3.29	0.28	0.00	0.28	3.60	3.88	24.00



For CRIUS N320-G1-Aux- U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.5	1	5955	4.49	4.49	2.812	2.31	6.80	4.79	24.00
11ax HE20	NSS1-MCS0	4.625	45	6175	4.35	4.35	2.723	2.31	6.66	4.63	24.00
11ax HE20	NSS1-MCS0	4.75	93	6415	4.34	4.34	2.716	2.31	6.65	4.62	24.00
11ax HE40	NSS1-MCS0	7.5	3	5965	7.64	7.64	5.808	2.31	9.95	9.89	24.00
11ax HE40	NSS1-MCS0	7.625	43	6165	7.48	7.48	5.598	2.31	9.79	9.53	24.00
11ax HE40	NSS1-MCS0	7.625	91	6405	7.33	7.33	5.408	2.31	9.64	9.20	24.00
11ax HE80	NSS1-MCS0	10.75	7	5985	10.41	10.41	10.990	2.31	12.72	18.71	24.00
11ax HE80	NSS1-MCS0	11	39	6145	10.53	10.53	11.298	2.31	12.84	19.23	24.00
11ax HE80	NSS1-MCS0	11.125	87	6385	10.38	10.38	10.914	2.31	12.69	18.58	24.00
11ax HE160	NSS1-MCS0	12.5	15	6025	12.33	12.33	17.100	2.31	14.64	29.11	24.00
11ax HE160	NSS1-MCS0	12.5	47	6185	12.33	12.33	17.100	2.31	14.64	29.11	24.00
11ax HE160	NSS1-MCS0	12.5	79	6345	12.34	12.34	17.140	2.31	14.65	29.17	24.00

For CRIUS N320-G1-Aux- U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.75	97	6435	4.39	4.39	2.748	1.98	6.37	4.34	24.00
11ax HE20	NSS1-MCS0	4.75	105	6475	4.33	4.33	2.710	1.98	6.31	4.28	24.00
11ax HE20	NSS1-MCS0	5.125	113	6515	4.37	4.37	2.735	1.98	6.35	4.32	24.00
11ax HE40	NSS1-MCS0	7.625	99	6445	7.40	7.40	5.495	1.98	9.38	8.67	24.00
11ax HE40	NSS1-MCS0	7.625	107	6485	7.32	7.32	5.395	1.98	9.30	8.51	24.00
11ax HE80	NSS1-MCS0	11.125	103	6465	10.39	10.39	10.940	1.98	12.37	17.26	24.00



For CRIUS N320-G1-Aux- U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	4.875	117	6535	4.35	4.35	2.723	2.58	6.93	4.93	24.00
11ax HE20	NSS1-MCS0	5.25	153	6715	4.33	4.33	2.710	2.58	6.91	4.91	24.00
11ax HE20	NSS1-MCS0	4.875	181	6855	4.38	4.38	2.742	2.58	6.96	4.97	24.00
11ax HE40	NSS1-MCS0	7.75	123	6565	7.33	7.33	5.408	2.58	9.91	9.79	24.00
11ax HE40	NSS1-MCS0	8	155	6725	7.39	7.39	5.483	2.58	9.97	9.93	24.00
11ax HE40	NSS1-MCS0	7.625	179	6845	7.34	7.34	5.420	2.58	9.92	9.82	24.00
11ax HE80	NSS1-MCS0	11.125	135	6625	10.39	10.39	10.940	2.58	12.97	19.82	24.00
11ax HE80	NSS1-MCS0	11.25	151	6705	10.36	10.36	10.864	2.58	12.94	19.68	24.00
11ax HE80	NSS1-MCS0	11.125	167	6785	10.34	10.34	10.814	2.58	12.92	19.59	24.00
11ax HE160	NSS1-MCS0	12.875	143	6665	12.39	12.39	17.338	2.58	14.97	31.41	24.00

For CRIUS N320-G1-Aux- U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT B (AUX)						
11ax HE20	NSS1-MCS0	5.125	189	6895	4.37	4.37	2.735	2.19	6.56	4.53	24.00
11ax HE20	NSS1-MCS0	5.125	213	7015	4.34	4.34	2.716	2.19	6.53	4.50	24.00
11ax HE20	NSS1-MCS0	5	229	7095	4.36	4.36	2.729	2.19	6.55	4.52	24.00
11ax HE20	NSS1-MCS0	0	233	7115	0.21	0.21	1.050	2.19	2.40	1.74	24.00
11ax HE40	NSS1-MCS0	8	195	6925	7.35	7.35	5.433	2.19	9.54	8.99	24.00
11ax HE40	NSS1-MCS0	7.75	211	7005	7.36	7.36	5.445	2.19	9.55	9.02	24.00
11ax HE40	NSS1-MCS0	7.75	227	7085	7.38	7.38	5.470	2.19	9.57	9.06	24.00
11ax HE80	NSS1-MCS0	11.125	199	6945	10.35	10.35	10.839	2.19	12.54	17.95	24.00
11ax HE80	NSS1-MCS0	11	215	7025	10.39	10.39	10.940	2.19	12.58	18.11	24.00
11ax HE160	NSS1-MCS0	12.875	207	6985	12.38	12.38	17.298	2.19	14.57	28.64	24.00



For CRIUS N320-G1-Aux

Maximum Conducted Output Power (Within 6425-6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
7.75	11ax HE40	NSS1-MCS0	6525	3.95	3.95	0.00	3.95	1.98	5.93	24.00
11.125	11ax HE80	NSS1-MCS0	6545	3.30	3.30	0.00	3.30	1.98	5.28	24.00
12.75	11ax HE160	NSS1-MCS0	6505	10.81	10.81	0.00	10.81	1.98	12.79	24.00

Maximum Conducted Output Power (Extends across 6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
7.75	11ax HE40	NSS1-MCS0	6525	4.00	4.00	0.00	4.00	2.58	6.58	24.00
11.125	11ax HE80	NSS1-MCS0	6545	9.28	9.28	0.00	9.28	2.58	11.86	24.00
12.75	11ax HE160	NSS1-MCS0	6505	7.70	7.70	0.00	7.70	2.58	10.28	24.00



For CRIUS N320-G1-Aux

Maximum Conducted Output Power (Within 6525-6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
4.875	11ax HE20	NSS1-MCS0	6875	1.01	1.01	0.00	1.01	2.58	3.59	24.00
7.75	11ax HE40	NSS1-MCS0	6885	0.69	0.69	0.00	0.69	2.58	3.27	24.00
11	11ax HE80	NSS1-MCS0	6865	8.14	8.14	0.00	8.14	2.58	10.72	24.00
12.5	11ax HE160	NSS1-MCS0	6825	11.70	11.70	0.00	11.70	2.58	14.28	24.00

Maximum Conducted Output Power (Extends across 6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT B						
4.875	11ax HE20	NSS1-MCS0	6875	1.05	1.05	0.00	1.05	2.19	3.24	24.00
7.75	11ax HE40	NSS1-MCS0	6885	5.88	5.88	0.00	5.88	2.19	8.07	24.00
11	11ax HE80	NSS1-MCS0	6865	5.46	5.46	0.00	5.46	2.19	7.65	24.00
12.5	11ax HE160	NSS1-MCS0	6825	2.39	2.39	0.00	2.39	2.19	4.58	24.00



For CRIUS N320-G1-Main U-NII-5

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5	1	5955	4.51	4.51	2.825	3.80	8.31	6.78	24.00
11ax HE20	NSS1-MCS0	5.125	45	6175	4.57	4.57	2.864	3.80	8.37	6.87	24.00
11ax HE20	NSS1-MCS0	5.25	93	6415	4.43	4.43	2.773	3.80	8.23	6.65	24.00
11ax HE40	NSS1-MCS0	7.75	3	5965	7.62	7.62	5.781	3.80	11.42	13.87	24.00
11ax HE40	NSS1-MCS0	7.875	43	6165	7.58	7.58	5.728	3.80	11.38	13.74	24.00
11ax HE40	NSS1-MCS0	8	91	6405	7.48	7.48	5.598	3.80	11.28	13.43	24.00
11ax HE80	NSS1-MCS0	10.875	7	5985	10.36	10.36	10.864	3.80	14.16	26.06	24.00
11ax HE80	NSS1-MCS0	11.125	39	6145	10.46	10.46	11.117	3.80	14.26	26.67	24.00
11ax HE80	NSS1-MCS0	11.125	87	6385	10.41	10.41	10.990	3.80	14.21	26.36	24.00
11ax HE160	NSS1-MCS0	12.5	15	6025	12.47	12.47	17.660	3.80	16.27	42.36	24.00
11ax HE160	NSS1-MCS0	12.5	47	6185	12.43	12.43	17.498	3.80	16.23	41.98	24.00
11ax HE160	NSS1-MCS0	12.625	79	6345	12.48	12.48	17.701	3.80	16.28	42.46	24.00

For CRIUS N320-G1-Main U-NII-6

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.375	97	6435	4.49	4.49	2.812	3.77	8.26	6.70	24.00
11ax HE20	NSS1-MCS0	5.375	105	6475	4.46	4.46	2.793	3.77	8.23	6.65	24.00
11ax HE20	NSS1-MCS0	5.375	113	6515	4.42	4.42	2.767	3.77	8.19	6.59	24.00
11ax HE40	NSS1-MCS0	7.875	99	6445	7.39	7.39	5.483	3.77	11.16	13.06	24.00
11ax HE40	NSS1-MCS0	7.875	107	6485	7.44	7.44	5.546	3.77	11.21	13.21	24.00
11ax HE80	NSS1-MCS0	11.125	103	6465	10.42	10.42	11.015	3.77	14.19	26.24	24.00



For CRIUS N320-G1-Main U-NII-7

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.25	117	6535	4.43	4.43	2.773	4.00	8.43	6.97	24.00
11ax HE20	NSS1-MCS0	5.375	153	6715	4.46	4.46	2.793	4.00	8.46	7.01	24.00
11ax HE20	NSS1-MCS0	5.5	181	6885	4.42	4.42	2.767	4.00	8.42	6.95	24.00
11ax HE40	NSS1-MCS0	8	123	6565	7.47	7.47	5.585	4.00	11.47	14.03	24.00
11ax HE40	NSS1-MCS0	8.125	155	6725	7.48	7.48	5.598	4.00	11.48	14.06	24.00
11ax HE40	NSS1-MCS0	8.125	179	6845	7.43	7.43	5.534	4.00	11.43	13.90	24.00
11ax HE80	NSS1-MCS0	11.125	135	6625	10.47	10.47	11.143	4.00	14.47	27.99	24.00
11ax HE80	NSS1-MCS0	11.25	151	6705	10.46	10.46	11.117	4.00	14.46	27.93	24.00
11ax HE80	NSS1-MCS0	11.25	167	6785	10.41	10.41	10.990	4.00	14.41	27.61	24.00
11ax HE160	NSS1-MCS0	12.625	143	6665	12.42	12.42	17.458	4.00	16.42	43.85	24.00

For CRIUS N320-G1-Main U-NII-8

Modulation Type	Data Rate	Conducted Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)	Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A (Main)						
11ax HE20	NSS1-MCS0	5.5	189	6895	4.46	4.46	2.793	4.23	8.69	7.40	24.00
11ax HE20	NSS1-MCS0	5.375	213	7015	4.41	4.41	2.761	4.23	8.64	7.31	24.00
11ax HE20	NSS1-MCS0	5.25	229	7095	4.38	4.38	2.742	4.23	8.61	7.26	24.00
11ax HE20	NSS1-MCS0	-3	233	7115	-4.78	-4.78	0.333	4.23	-0.55	0.88	24.00
11ax HE40	NSS1-MCS0	8	195	6925	7.44	7.44	5.546	4.23	11.67	14.69	24.00
11ax HE40	NSS1-MCS0	8	211	7005	7.42	7.42	5.521	4.23	11.65	14.62	24.00
11ax HE40	NSS1-MCS0	8	227	7085	7.45	7.45	5.559	4.23	11.68	14.72	24.00
11ax HE80	NSS1-MCS0	11.25	199	6945	10.39	10.39	10.940	4.23	14.62	28.97	24.00
11ax HE80	NSS1-MCS0	11.25	215	7025	10.45	10.45	11.092	4.23	14.68	29.38	24.00
11ax HE160	NSS1-MCS0	12.75	207	6985	12.39	12.39	17.338	4.23	16.62	45.92	24.00



For CRIUS N320-G1-Main

Maximum Conducted Output Power (Within 6425-6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
8	11ax HE40	NSS1-MCS0	6525	4.52	4.52	0.00	4.52	3.77	8.29	24.00
11.125	11ax HE80	NSS1-MCS0	6545	3.15	3.15	0.00	3.15	3.77	6.92	24.00
12.625	11ax HE160	NSS1-MCS0	6505	10.83	10.83	0.00	10.83	3.77	14.60	24.00

Maximum Conducted Output Power (Extends across 6525MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
8	11ax HE40	NSS1-MCS0	6525	4.77	4.77	0.00	4.77	4.00	8.77	24.00
11.125	11ax HE80	NSS1-MCS0	6545	9.74	9.74	0.00	9.74	4.00	13.74	24.00
12.625	11ax HE160	NSS1-MCS0	6505	8.28	8.28	0.00	8.28	4.00	12.28	24.00



For CRIUS N320-G1-Main

Maximum Conducted Output Power (Within 6525-6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
5.5	11ax HE20	NSS1-MCS0	6875	1.68	1.68	0.00	1.68	4.00	5.68	24.00
8.125	11ax HE40	NSS1-MCS0	6885	1.35	1.35	0.00	1.35	4.00	5.35	24.00
11.125	11ax HE80	NSS1-MCS0	6865	8.56	8.56	0.00	8.56	4.00	12.56	24.00
13	11ax HE160	NSS1-MCS0	6825	12.15	12.15	0.00	12.15	4.00	16.15	24.00

Maximum Conducted Output Power (Extends across 6875MHz band) RF Output Power(dBm)										
Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)	W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A						
5.5	11ax HE20	NSS1-MCS0	6875	1.42	1.42	0.00	1.42	4.23	5.65	24.00
8.125	11ax HE40	NSS1-MCS0	6885	6.07	6.07	0.00	6.07	4.23	10.30	24.00
11.125	11ax HE80	NSS1-MCS0	6865	5.48	5.48	0.00	5.48	4.23	9.71	24.00
13	11ax HE160	NSS1-MCS0	6825	2.65	2.65	0.00	2.65	4.23	6.88	24.00



For CRIUS N320-G1-Mimo-U-NII-5

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.5	1	5955	2.27	2.10	5.20	3.31	3.80	9.00	7.94	24.00
11ax HE20	NSS1-MCS0	2.65	45	6175	2.11	1.98	5.06	3.20	3.80	8.86	7.68	24.00
11ax HE20	NSS1-MCS0	2.625	93	6415	2.03	1.66	4.86	3.06	3.80	8.66	7.34	24.00
11ax HE40	NSS1-MCS0	5	3	5965	5.11	4.92	8.03	6.35	3.80	11.83	15.23	24.00
11ax HE40	NSS1-MCS0	5.25	43	6165	5.06	4.87	7.98	6.28	3.80	11.78	15.05	24.00
11ax HE40	NSS1-MCS0	5.125	91	6405	4.92	4.74	7.84	6.08	3.80	11.64	14.59	24.00
11ax HE80	NSS1-MCS0	7.5	7	5985	7.30	7.21	10.27	10.63	3.80	14.07	25.50	24.00
11ax HE80	NSS1-MCS0	7.5	39	6145	7.18	7.06	10.13	10.31	3.80	13.93	24.72	24.00
11ax HE80	NSS1-MCS0	7.625	87	6385	7.19	7.28	10.25	10.58	3.80	14.05	25.38	24.00
11ax HE160	NSS1-MCS0	10	15	6025	9.98	9.85	12.93	19.61	3.80	16.73	47.05	24.00
11ax HE160	NSS1-MCS0	10.125	47	6185	9.89	9.98	12.95	19.70	3.80	16.75	47.27	24.00
11ax HE160	NSS1-MCS0	10.25	79	6345	9.86	9.82	12.85	19.28	3.80	16.65	46.24	24.00

For CRIUS N320-G1-Mimo-U-NII-6

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.625	97	6435	2.14	1.73	4.95	3.13	3.77	8.72	7.45	24.00
11ax HE20	NSS1-MCS0	2.75	105	6475	2.19	1.54	4.89	3.08	3.77	8.66	7.34	24.00
11ax HE20	NSS1-MCS0	2.875	113	6515	2.16	1.59	4.89	3.09	3.77	8.66	7.35	24.00
11ax HE40	NSS1-MCS0	5.125	99	6445	4.93	4.79	7.87	6.12	3.77	11.64	14.59	24.00
11ax HE40	NSS1-MCS0	5.125	107	6485	4.85	4.82	7.85	6.09	3.77	11.62	14.51	24.00
11ax HE80	NSS1-MCS0	8.25	103	6465	7.54	7.43	10.50	11.21	3.77	14.27	26.70	24.00



For CRIUS N320-G1-Mimo-U-NII-7

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	2.5	117	6535	1.51	1.94	4.74	2.98	4.00	8.74	7.48	24.00
11ax HE20	NSS1-MCS0	2.75	153	6715	1.64	1.96	4.81	3.03	4.00	8.81	7.61	24.00
11ax HE20	NSS1-MCS0	2.75	181	6885	2.12	2.02	5.08	3.22	4.00	9.08	8.09	24.00
11ax HE40	NSS1-MCS0	5.25	123	6565	4.95	4.86	7.92	6.19	4.00	11.92	15.54	24.00
11ax HE40	NSS1-MCS0	5.375	155	6725	4.85	4.78	7.83	6.06	4.00	11.83	15.22	24.00
11ax HE40	NSS1-MCS0	5.25	179	6845	5.14	4.63	7.90	6.17	4.00	11.90	15.50	24.00
11ax HE80	NSS1-MCS0	7.75	135	6625	7.35	7.36	10.37	10.88	4.00	14.37	27.32	24.00
11ax HE80	NSS1-MCS0	7.75	151	6705	7.19	7.29	10.25	10.59	4.00	14.25	26.61	24.00
11ax HE80	NSS1-MCS0	7.5	167	6785	6.96	6.99	9.99	9.97	4.00	13.99	25.03	24.00
11ax HE160	NSS1-MCS0	10	143	6665	9.46	9.71	12.60	18.18	4.00	16.60	45.68	24.00

For CRIUS N320-G1-Mimo-U-NII-8

Modulation Type	Data Rate	Setting	Channel	Frequency (MHz)	Measured value of each antenna port (dBm)		Total conducted power (dBm)	Total conducted power (mW)	Antenna Gain (dBi)	Total E.I.R.P (dBm)	Total E.I.R.P (mW)	E.I.R.P Limit (dBm)
					ANT A	ANT B						
11ax HE20	NSS1-MCS0	3	189	6895	2.24	1.64	4.96	3.13	4.23	9.19	8.30	24.00
11ax HE20	NSS1-MCS0	3	213	7015	2.15	1.63	4.91	3.10	4.23	9.14	8.20	24.00
11ax HE20	NSS1-MCS0	2.875	229	7095	2.23	1.55	4.91	3.10	4.23	9.14	8.21	24.00
11ax HE20	NSS1-MCS0	-3.25	233	7115	-5.60	-3.42	-1.36	0.73	4.23	2.87	1.93	24.00
11ax HE40	NSS1-MCS0	5.375	195	6925	5.06	4.85	7.97	6.26	4.23	12.20	16.58	24.00
11ax HE40	NSS1-MCS0	5.375	211	7005	5.01	4.72	7.88	6.13	4.23	12.11	16.25	24.00
11ax HE40	NSS1-MCS0	5.25	227	7085	5.12	4.56	7.86	6.11	4.23	12.09	16.18	24.00
11ax HE80	NSS1-MCS0	8.75	199	6945	7.85	7.91	10.89	12.28	4.23	15.12	32.51	24.00
11ax HE80	NSS1-MCS0	8.875	215	7025	8.01	7.91	10.97	12.50	4.23	15.20	33.12	24.00
11ax HE160	NSS1-MCS0	10.375	207	6985	10.05	9.84	12.96	19.75	4.23	17.19	52.32	24.00



For CRIUS N320-G1-Mimo

Maximum Conducted Output Power (Within 6425-6525MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5	11ax HE40	NSS1-MCS0	6525	-0.57	-0.57	2.44	0.00	2.44	3.77	6.21	24.00
7.25	11ax HE80	NSS1-MCS0	6545	-2.56	-2.91	0.28	0.00	0.28	3.77	4.05	24.00
10	11ax HE160	NSS1-MCS0	6505	6.01	5.61	8.82	0.00	8.82	3.77	12.59	24.00

Maximum Conducted Output Power (Extends across 6525MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
5	11ax HE40	NSS1-MCS0	6525	-0.71	-0.88	2.22	0.00	2.22	4.00	6.22	24.00
7.25	11ax HE80	NSS1-MCS0	6545	3.43	3.35	6.40	0.00	6.40	4.00	10.40	24.00
10	11ax HE160	NSS1-MCS0	6505	3.00	2.53	5.78	0.00	5.78	4.00	9.78	24.00



For CRIUS N320-G1-Mimo

Maximum Conducted Output Power (Within 6525-6875MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
2.75	11ax HE20	NSS1-MCS0	6875	-3.46	-4.29	-0.84	0.00	-0.84	4.00	3.16	24.00
5.375	11ax HE40	NSS1-MCS0	6885	-3.84	-4.33	-1.07	0.00	-1.07	4.00	2.93	24.00
8	11ax HE80	NSS1-MCS0	6865	3.26	2.50	5.91	0.00	5.91	4.00	9.91	24.00
10	11ax HE160	NSS1-MCS0	6825	7.29	6.21	9.79	0.00	9.79	4.00	13.79	24.00

Maximum Conducted Output Power (Extends across 6875MHz band)

RF Output Power(dBm)

Setting	Modulation Type	Data Rate	Frequency (MHz)	W/O Duty Factor Measured value of each antenna port (dBm)		W/O duty factor Total power (dBm)	Duty Factor (dB)	With duty factor Total power (dBm)	Antenna Gain (dBi)	With duty factor EIRP (dBm)	EIRP Limit (dBm)
				ANT A	ANT B						
2.75	11ax HE20	NSS1-MCS0	6875	-3.71	-4.36	-1.01	0.00	-1.01	4.23	3.22	24.00
5.375	11ax HE40	NSS1-MCS0	6885	1.28	0.50	3.92	0.00	3.92	4.23	8.15	24.00
8	11ax HE80	NSS1-MCS0	6865	0.45	-0.27	3.12	0.00	3.12	4.23	7.35	24.00
10	11ax HE160	NSS1-MCS0	6825	-2.23	-3.29	0.28	0.00	0.28	4.23	4.51	24.00




Within 6425-6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Aux

ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

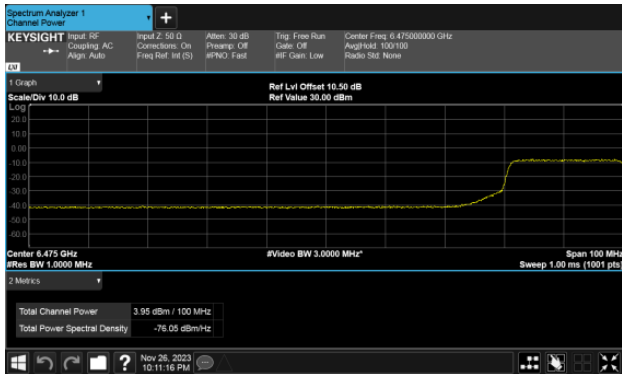


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

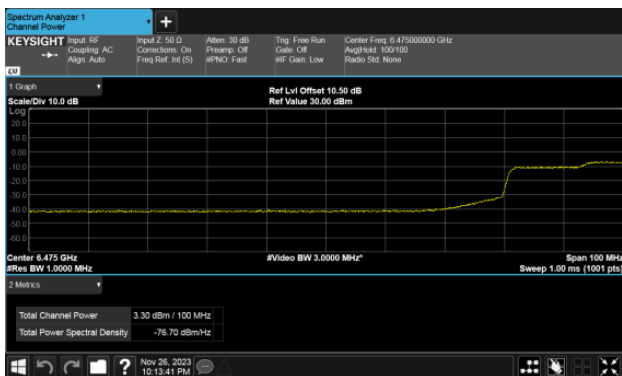

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

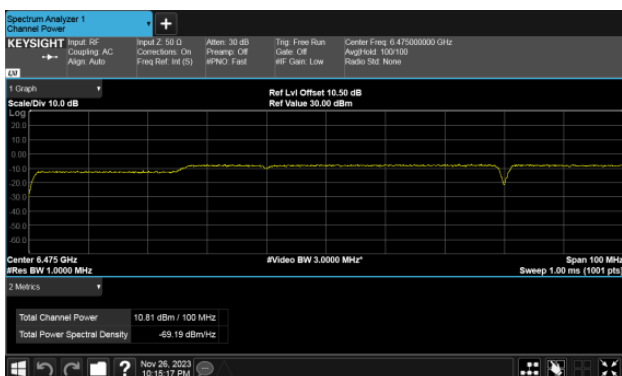




Extends across 6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Aux

ANT B


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

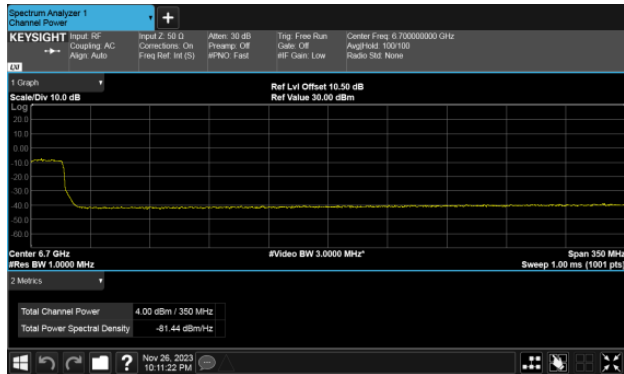


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

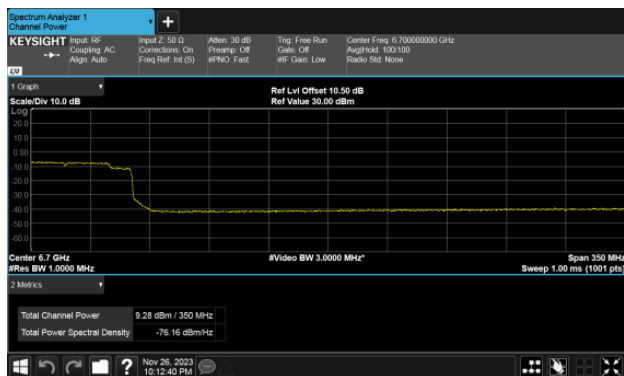

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

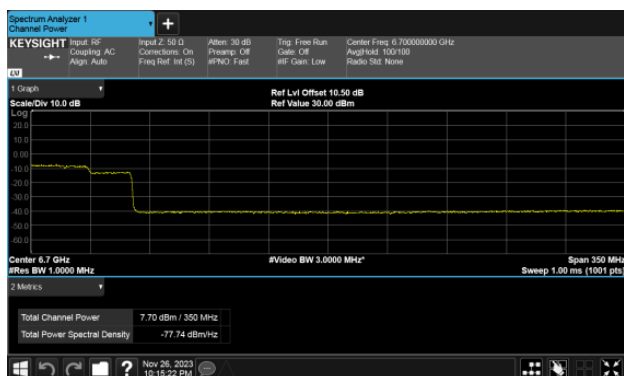





Within 6525-6875MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Aux


ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

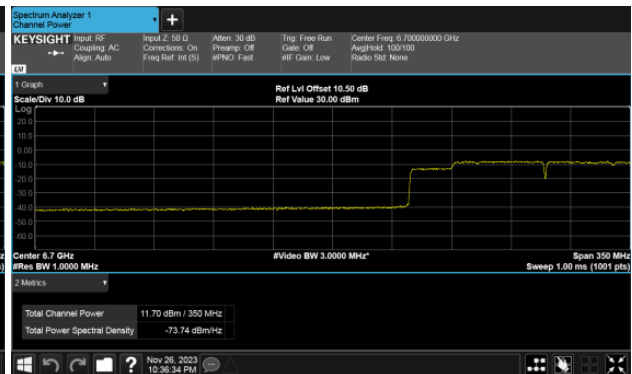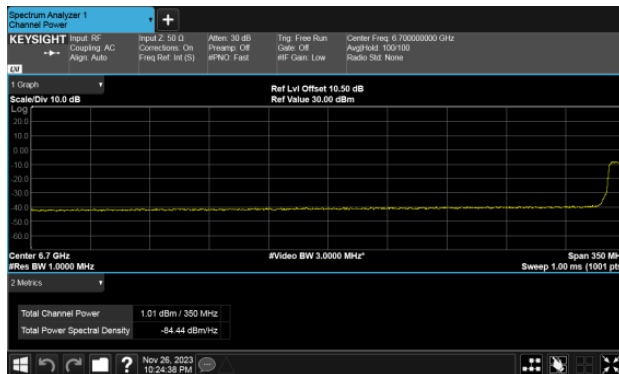

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

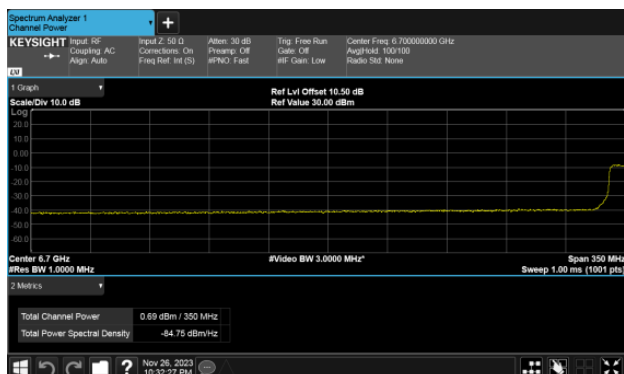

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

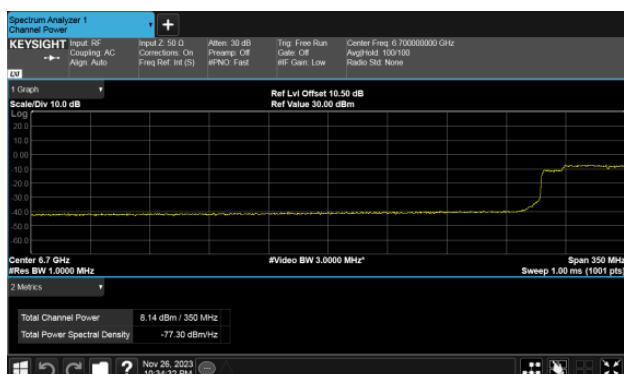





Extends across 6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Aux


ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

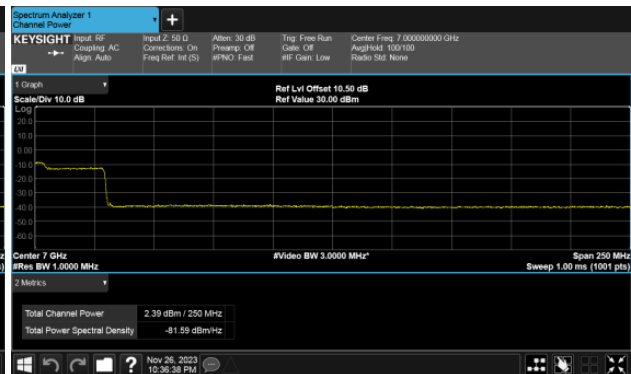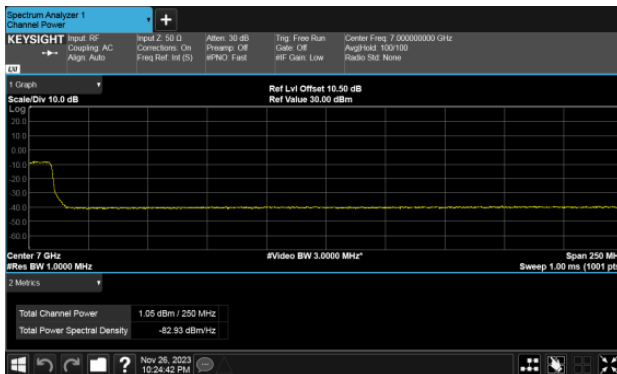

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

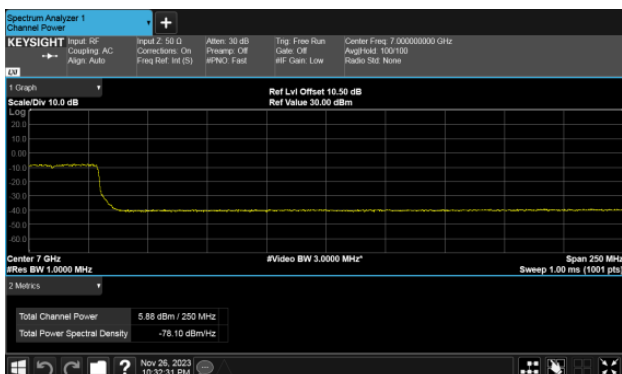

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

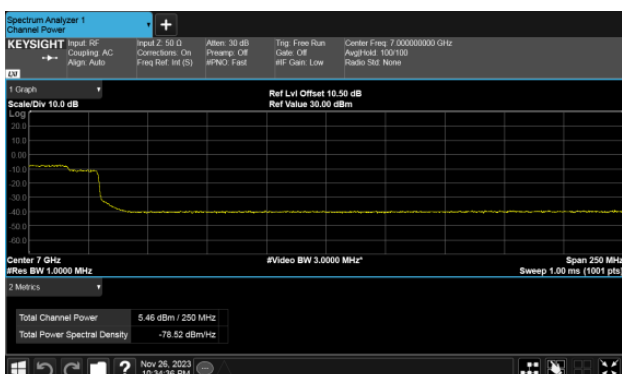




Within 6425-6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Main

ANT A


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

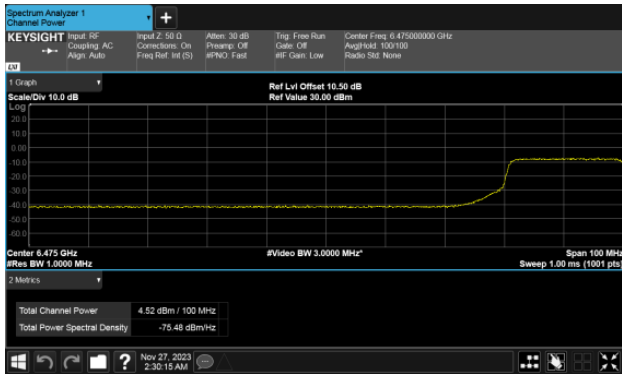


Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

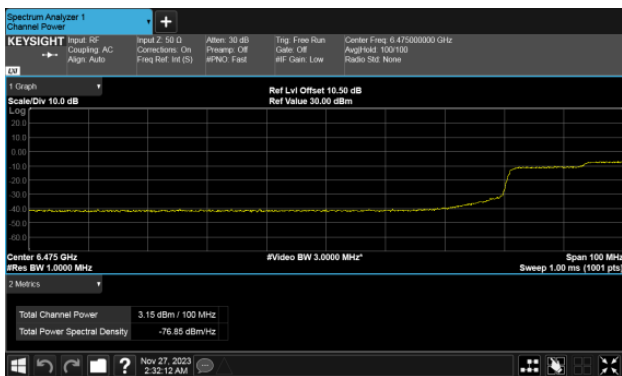

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

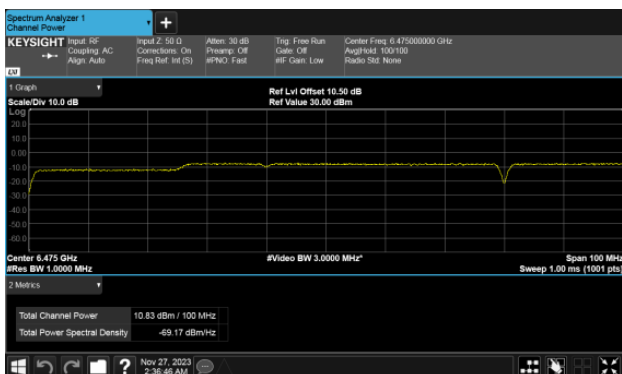



Extends across 6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Main

ANT A


Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115




Modulation Type: 802.11ax HE80 (30.6Mbps)

CH119

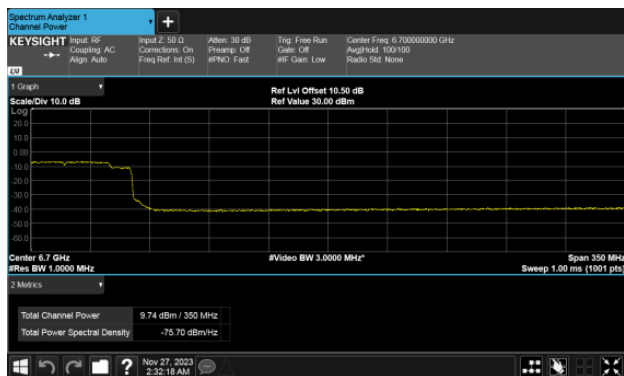

Modulation Type: 802.11ax HE160 (61.3Mbps)

CH111

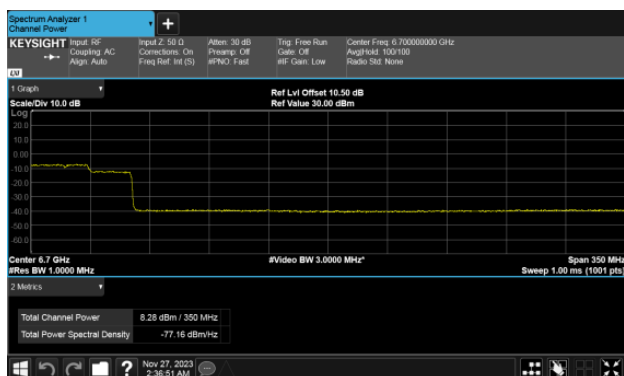





Within 6525-6875MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Main


ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

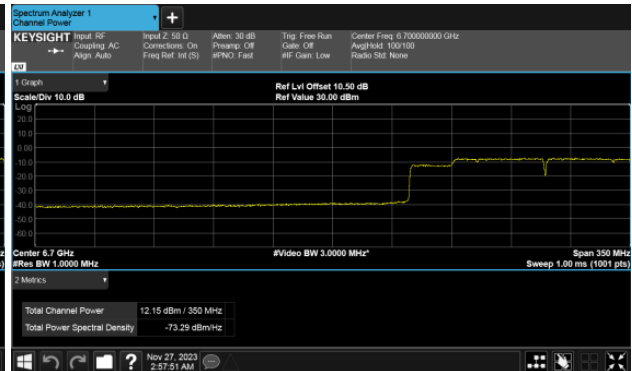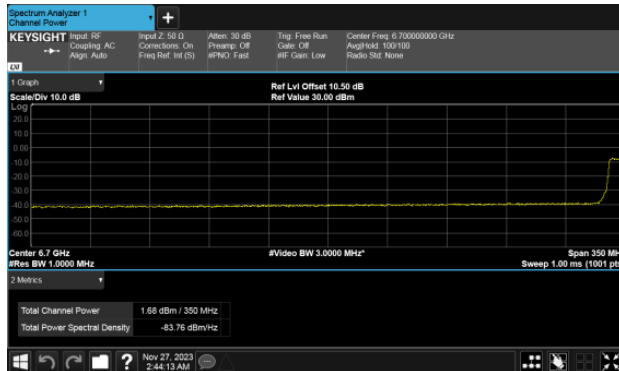

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

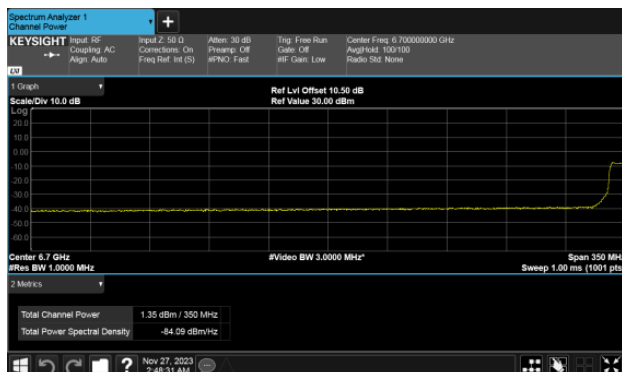

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

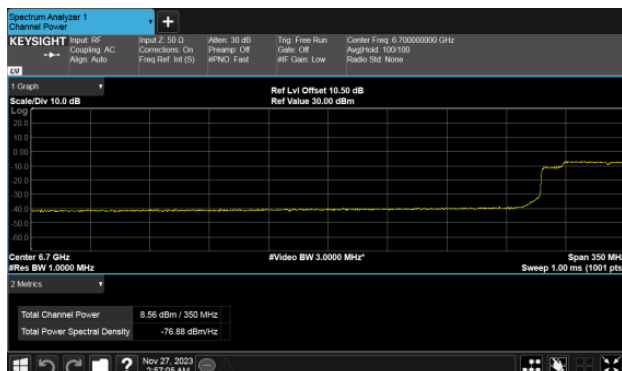





Extends across 6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Main


ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

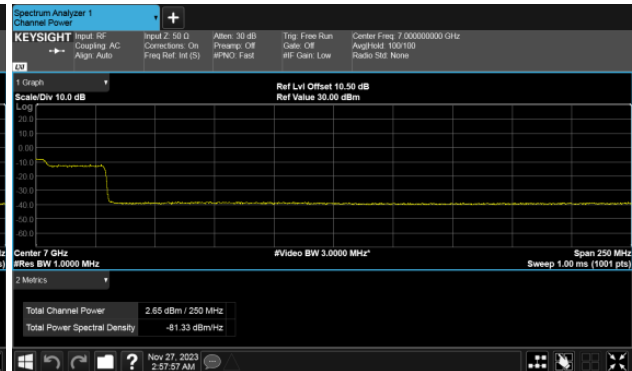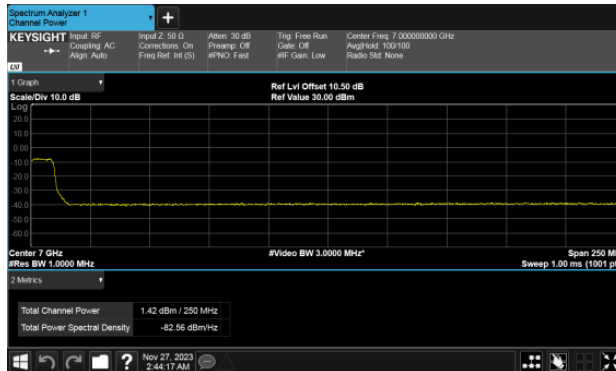

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

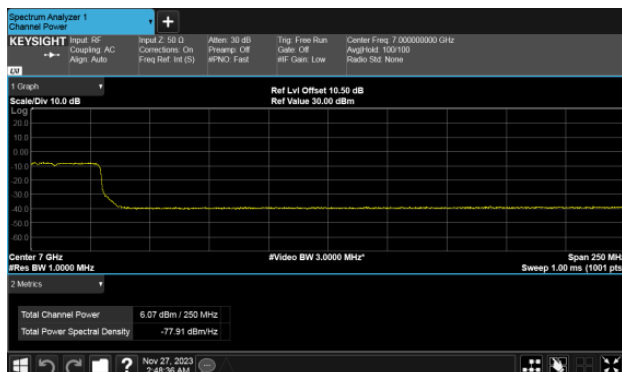

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

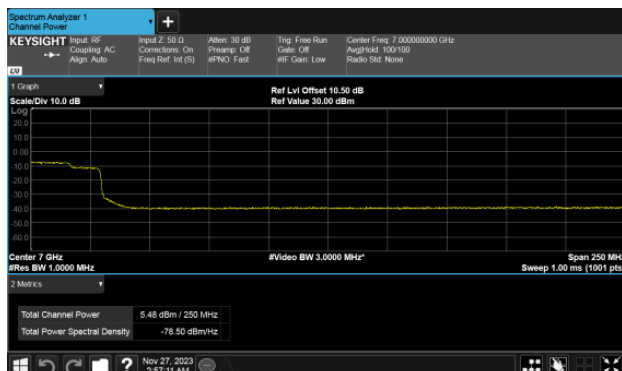









Within 6425-6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH115

ANT B

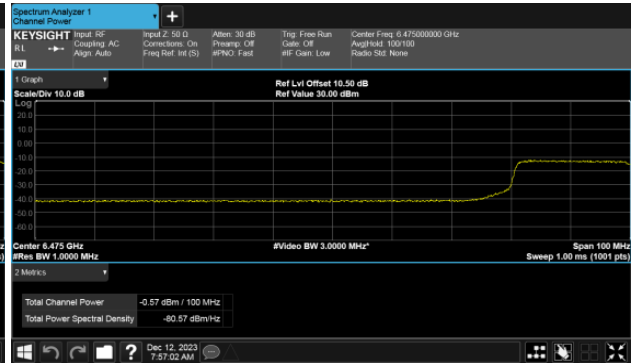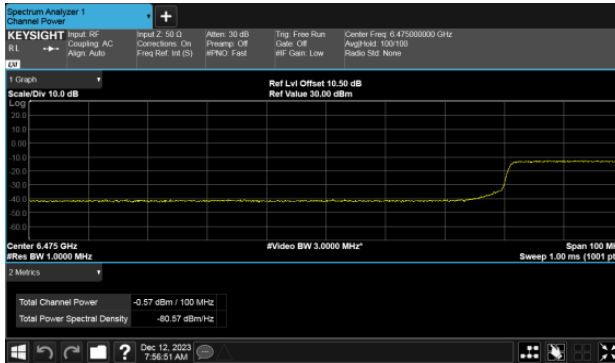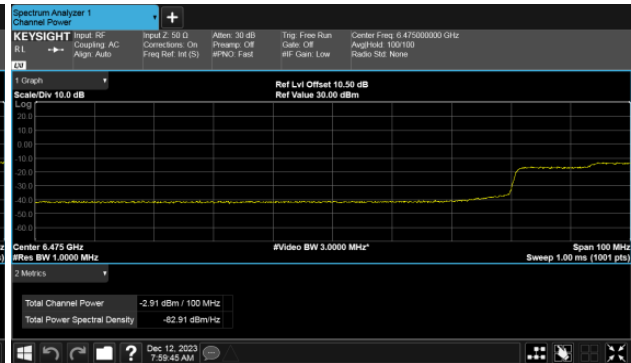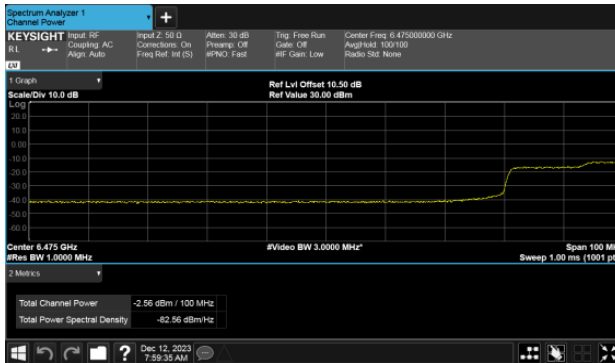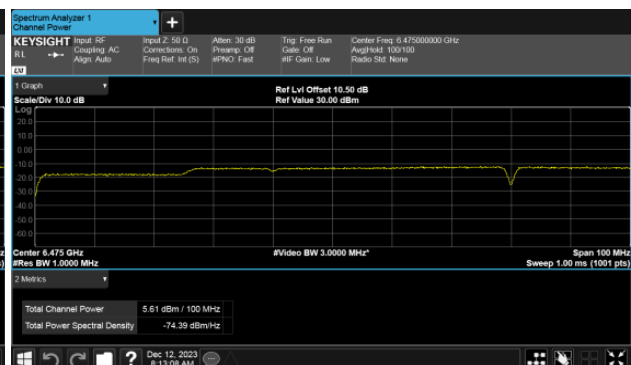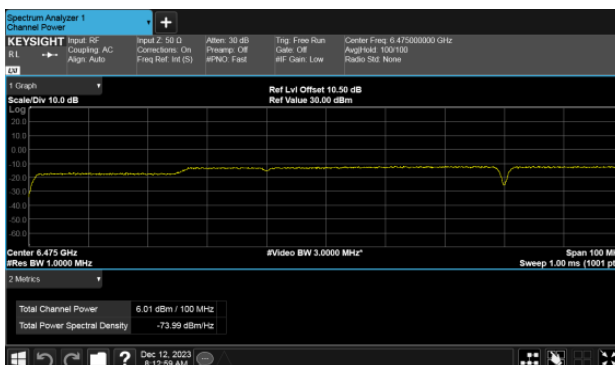Modulation Type: 802.11ax HE40 (14.6Mbps)
CH115Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111



Extends across 6525MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A



Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

ANT B



Modulation Type: 802.11ax HE40 (14.6Mbps)

CH115

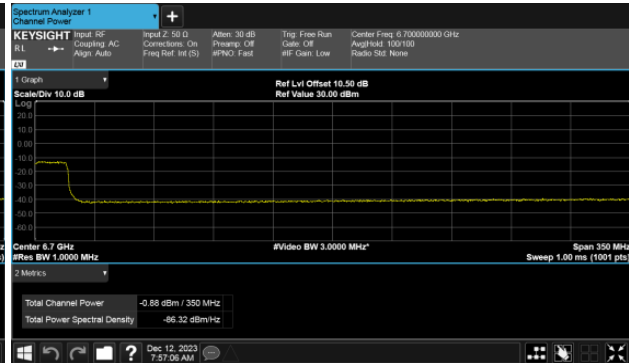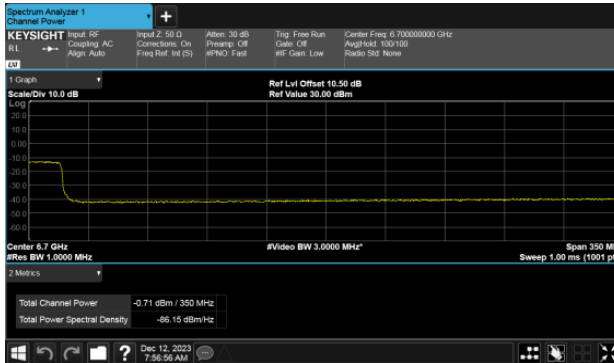



Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH119

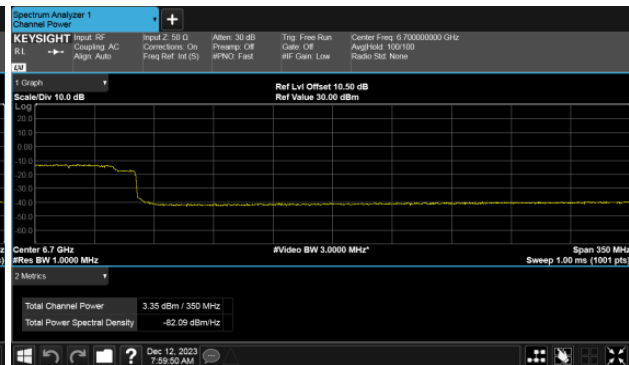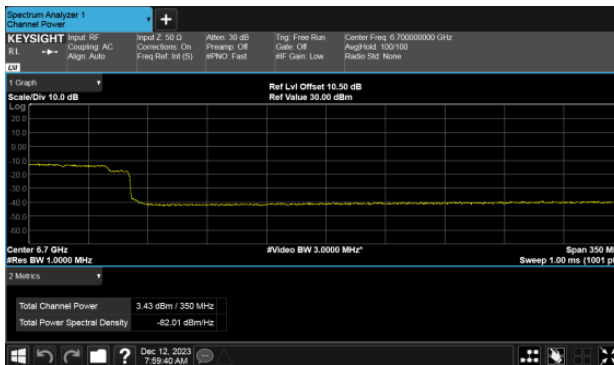

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH111

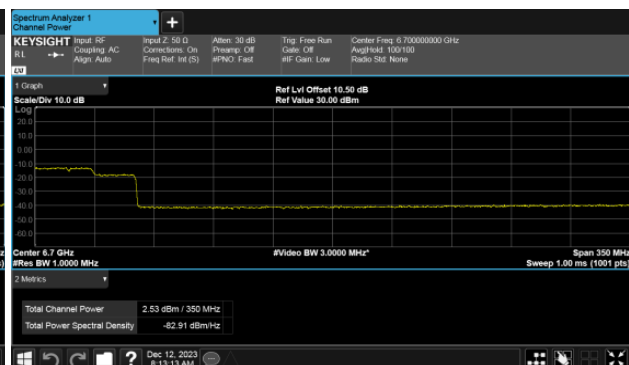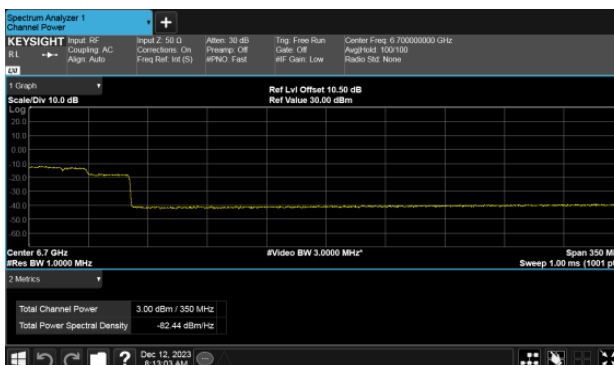





Within 6525-6875MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

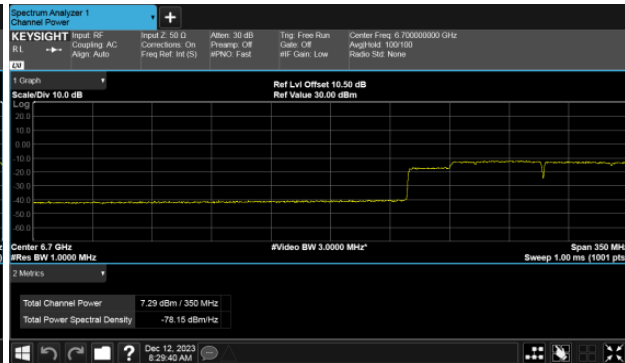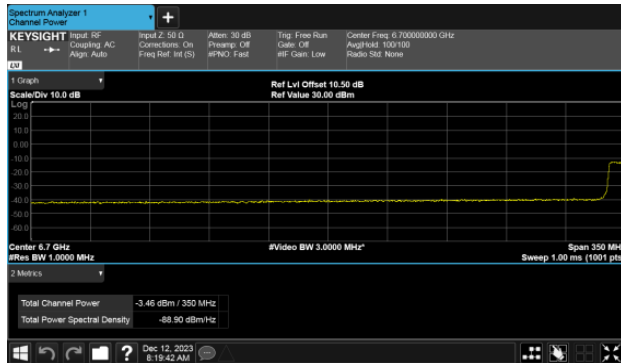

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

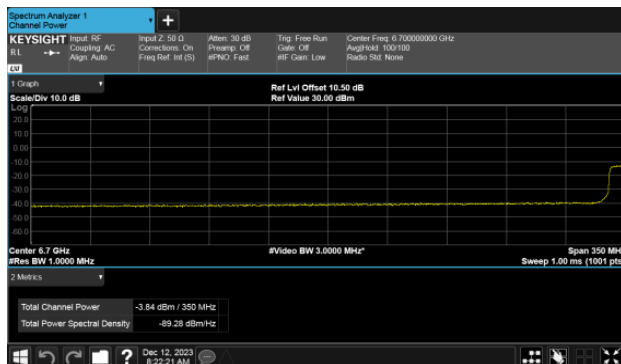

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

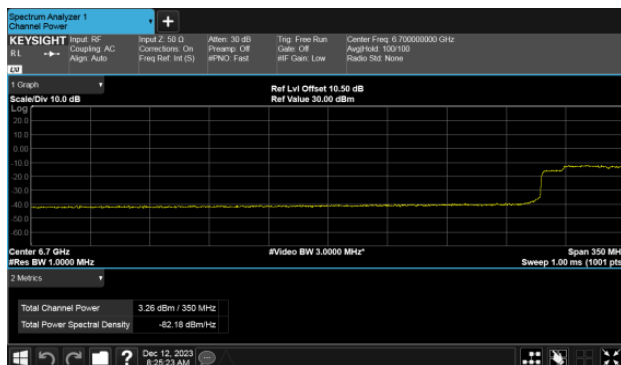





Within 6525-6875MHz band Straddle Channel

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo


ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

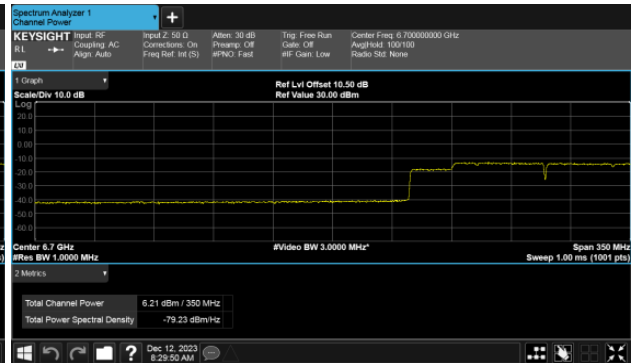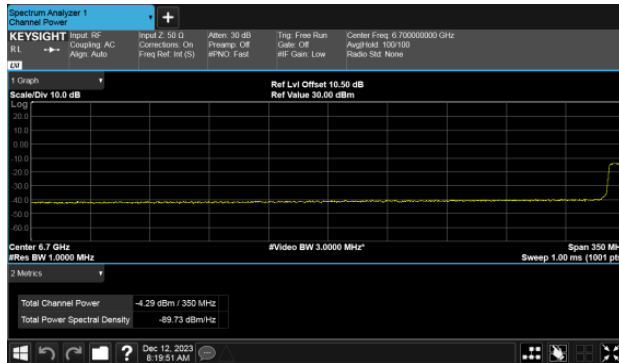

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187

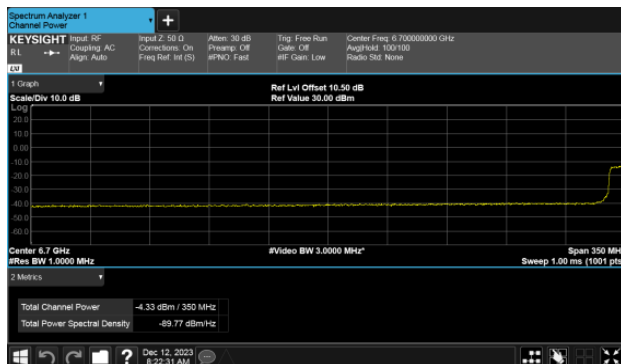

Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

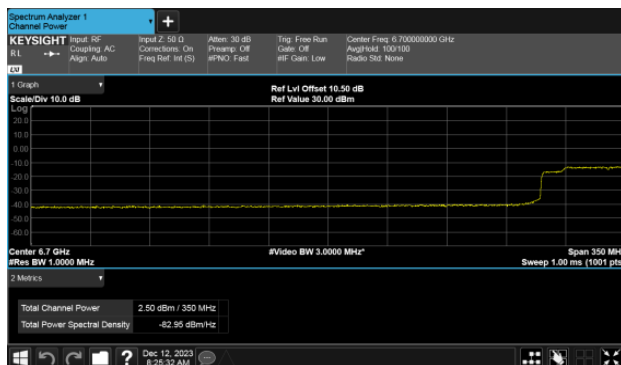



Extends across 6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT A

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185


Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175



Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187



Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

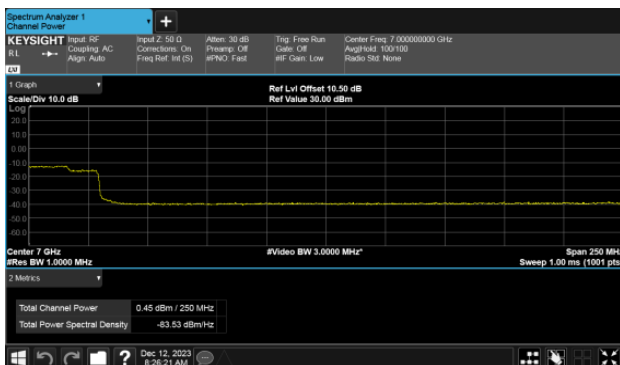





Extends across 6875MHz band

For CRIUS CO310-G1 & CRIUS N310-G1 & CRIUS N320-G1-Mimo

ANT B

Modulation Type: 802.11ax HE20 (7.3Mbps)
CH185

Modulation Type: 802.11ax HE160 (61.3Mbps)
CH175

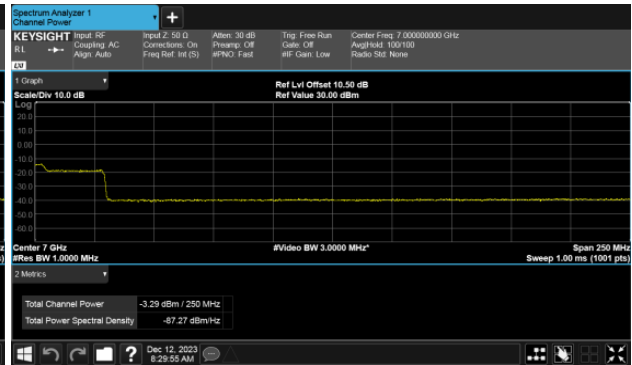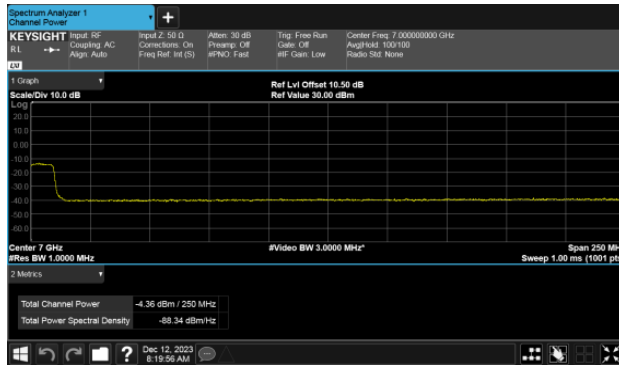

Modulation Type: 802.11ax HE40 (14.6Mbps)
CH187



Modulation Type: 802.11ax HE80 (30.6Mbps)
CH183

