





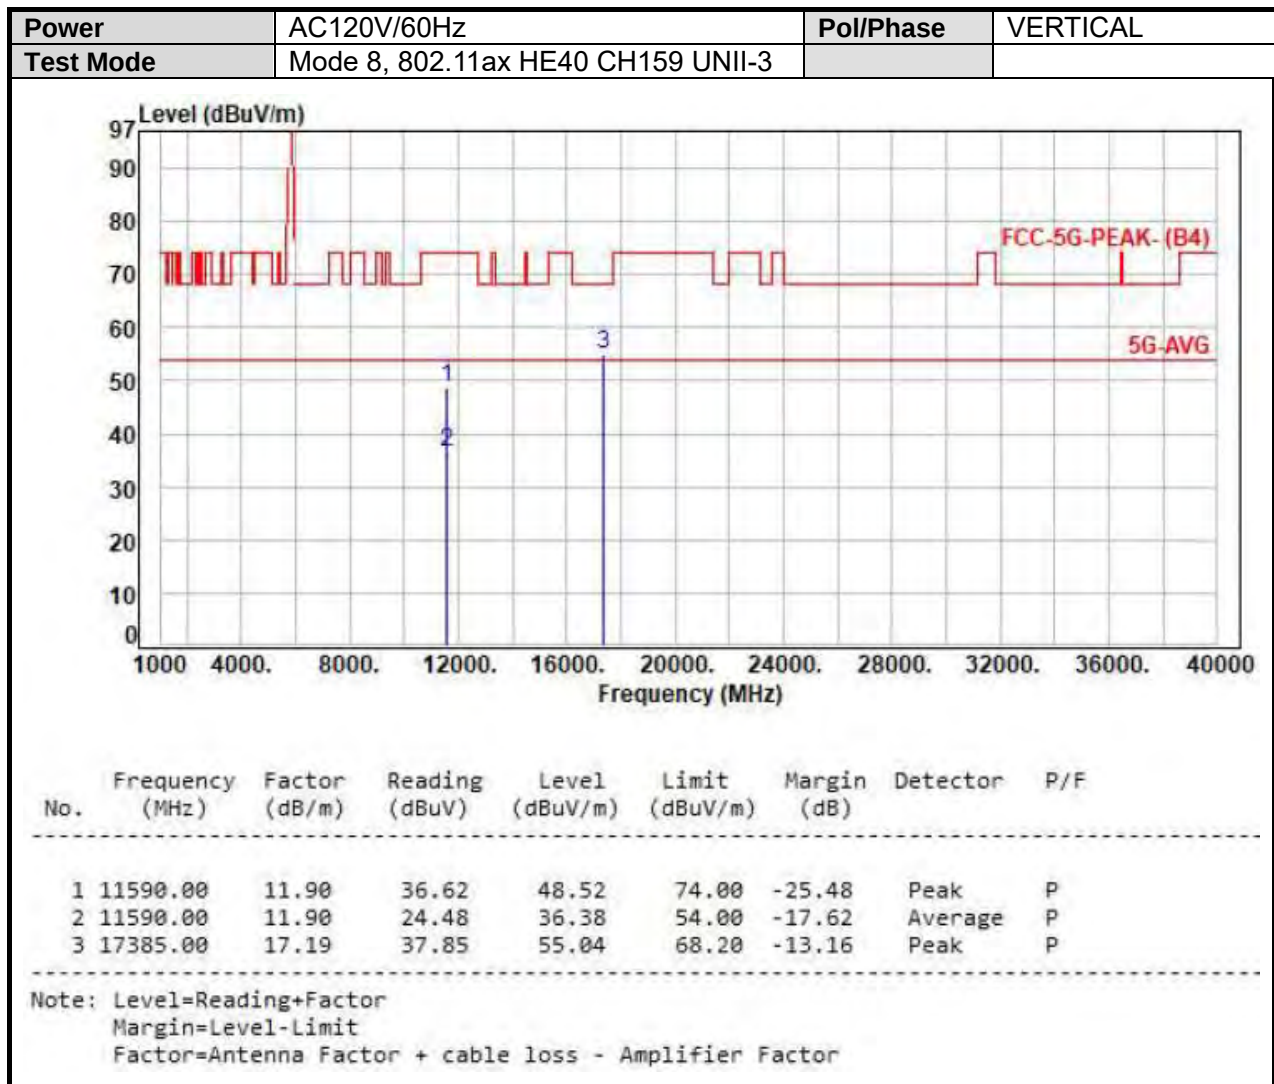

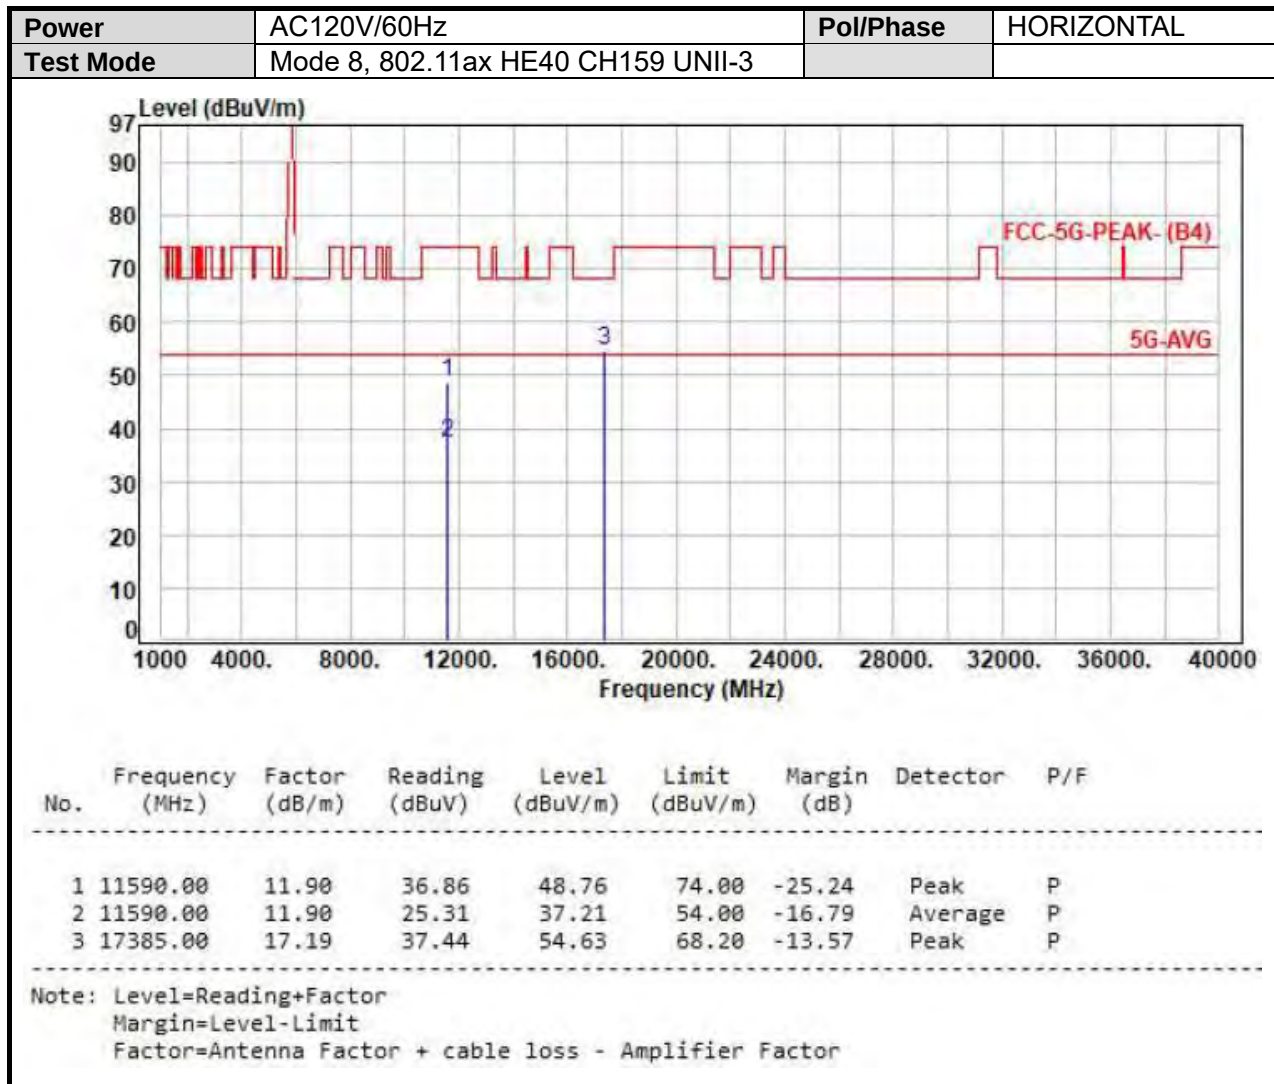


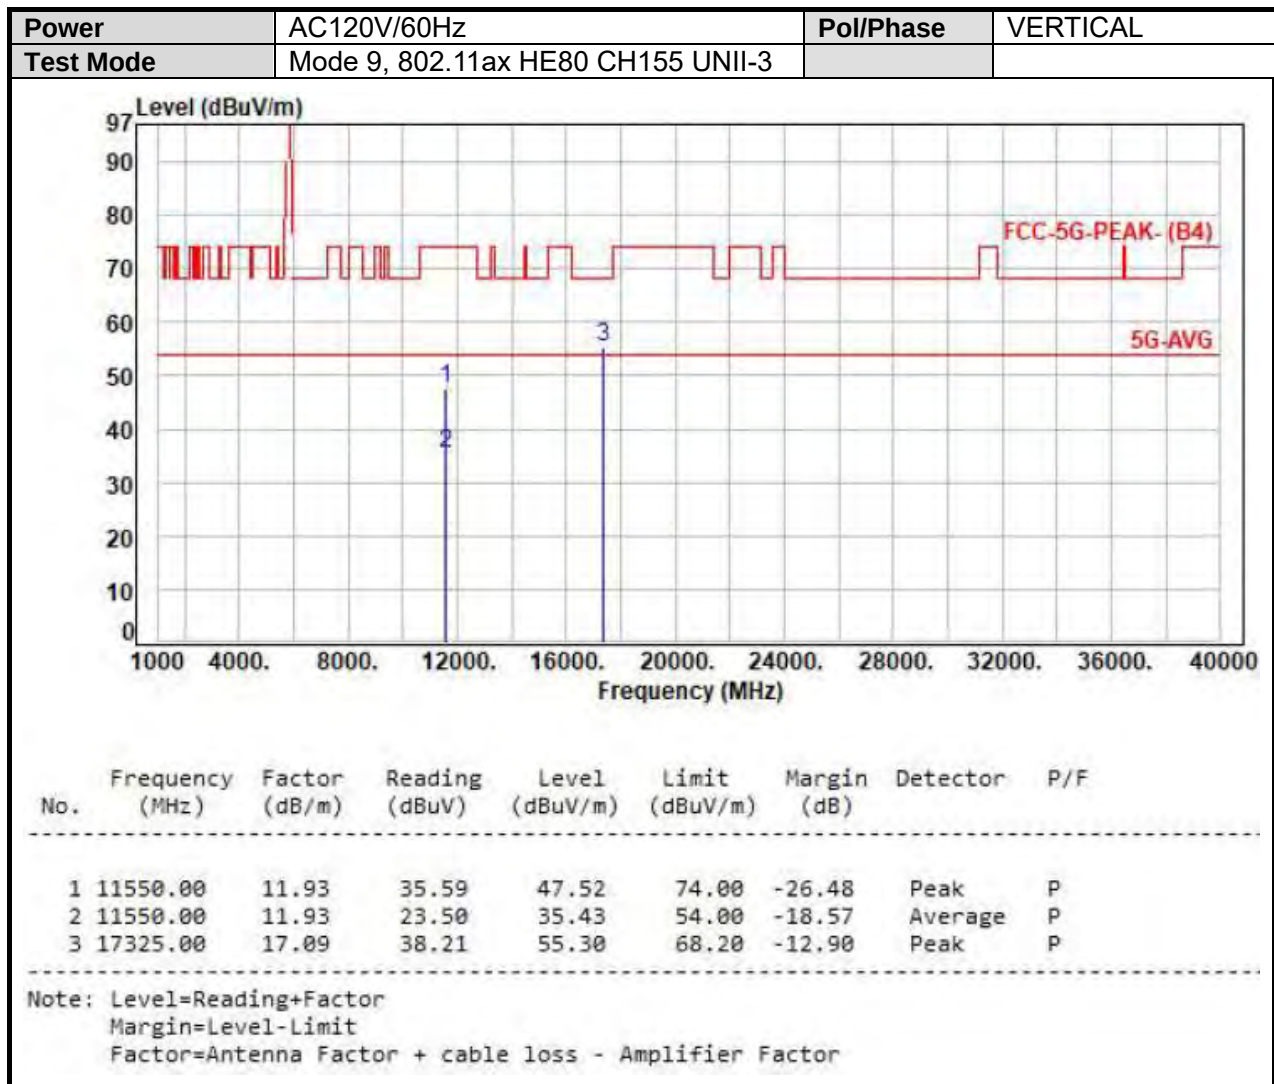

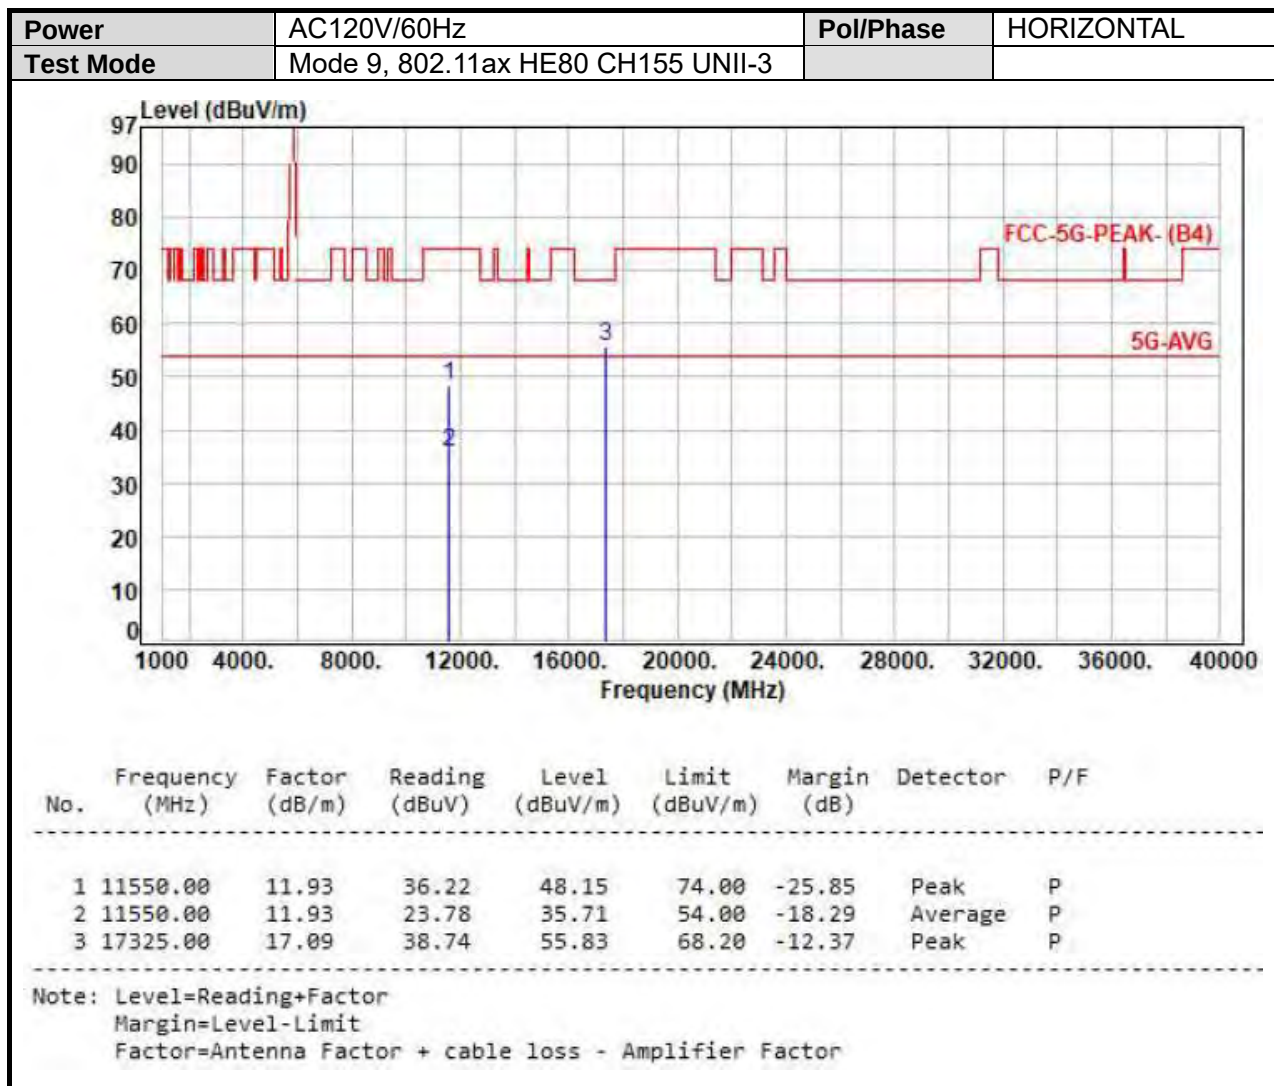

CRIUS N310-G1
MIMO

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 18, 802.11ax HE40 CH54 UNII-2A		

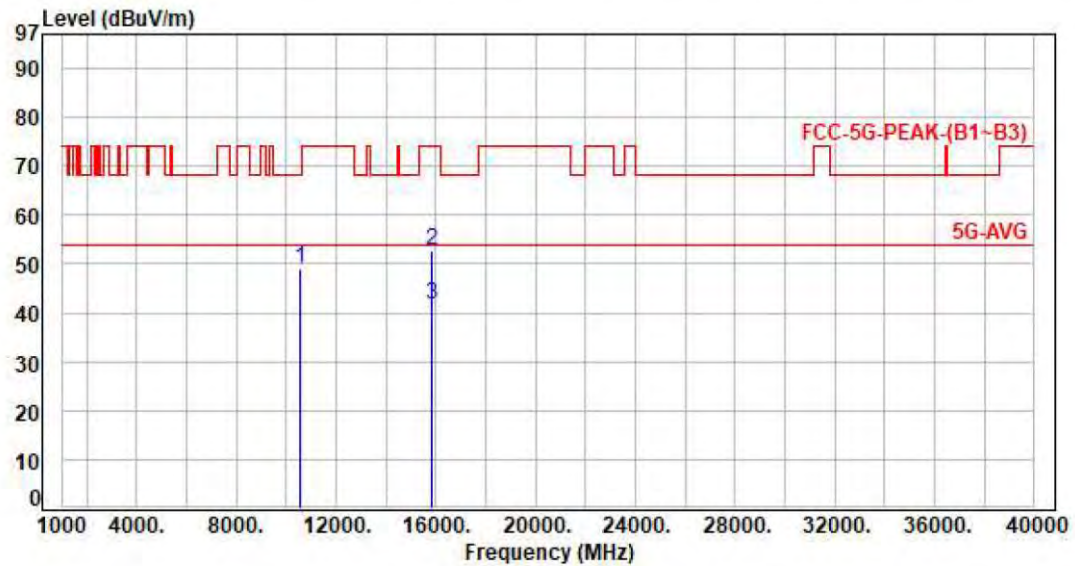



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10540.00	11.14	38.07	49.21	68.20	-18.99	Peak	P
2	15810.00	12.42	40.33	52.75	74.00	-21.25	Peak	P
3	15810.00	12.42	29.19	41.61	54.00	-12.39	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

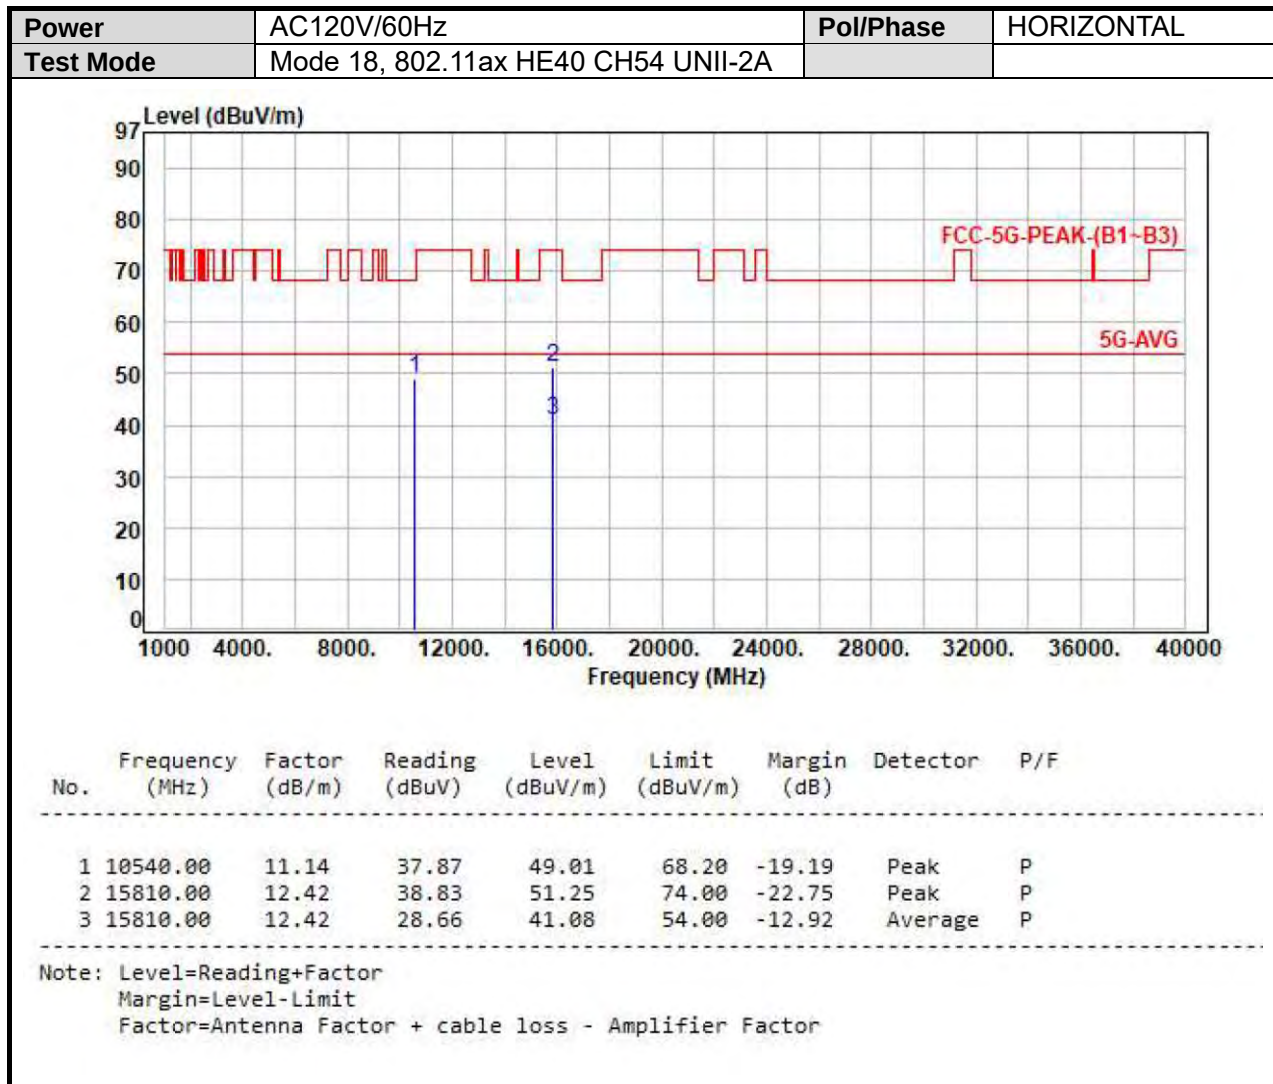

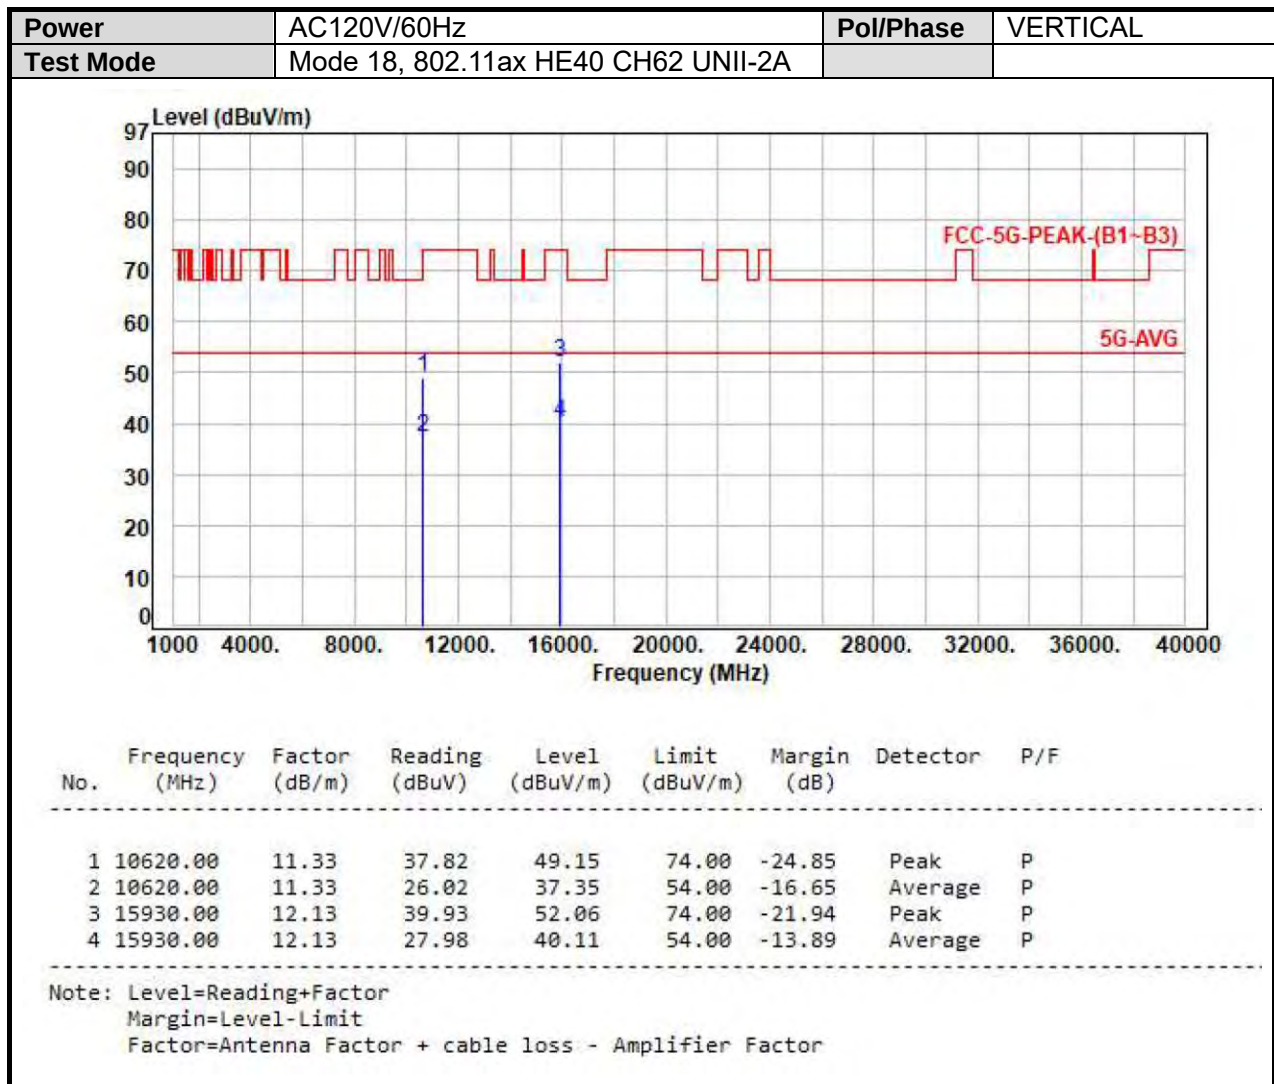

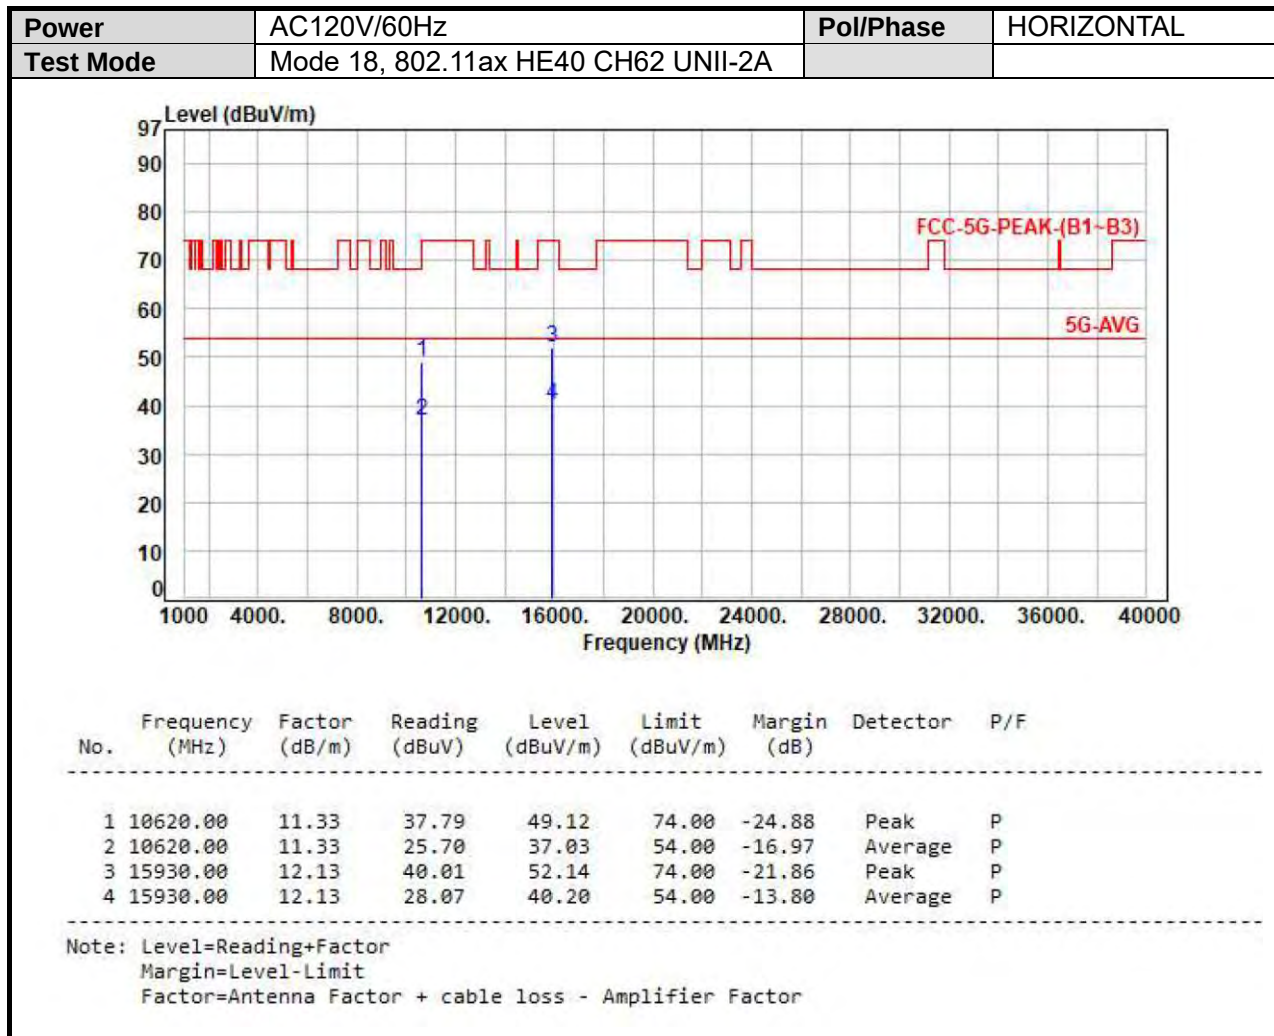




CRIUS N320-G1

MIMO

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 28, 802.11ax HE40 CH54 UNII-2A		

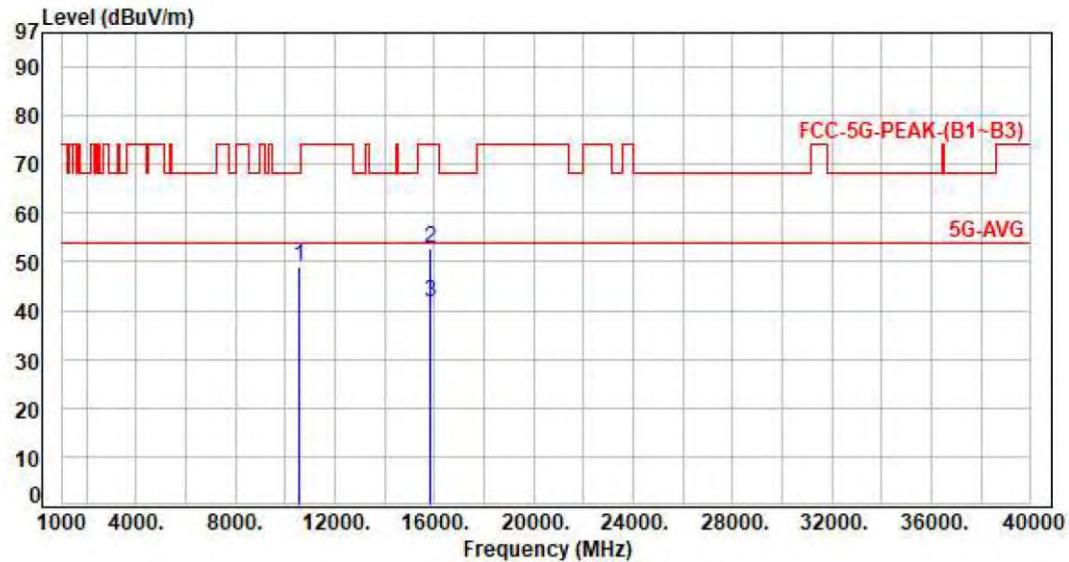



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	10540.00	11.14	38.08	49.22	68.20	-18.98	Peak	P
2	15810.00	12.42	40.31	52.73	74.00	-21.27	Peak	P
3	15810.00	12.42	29.26	41.68	54.00	-12.32	Average	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

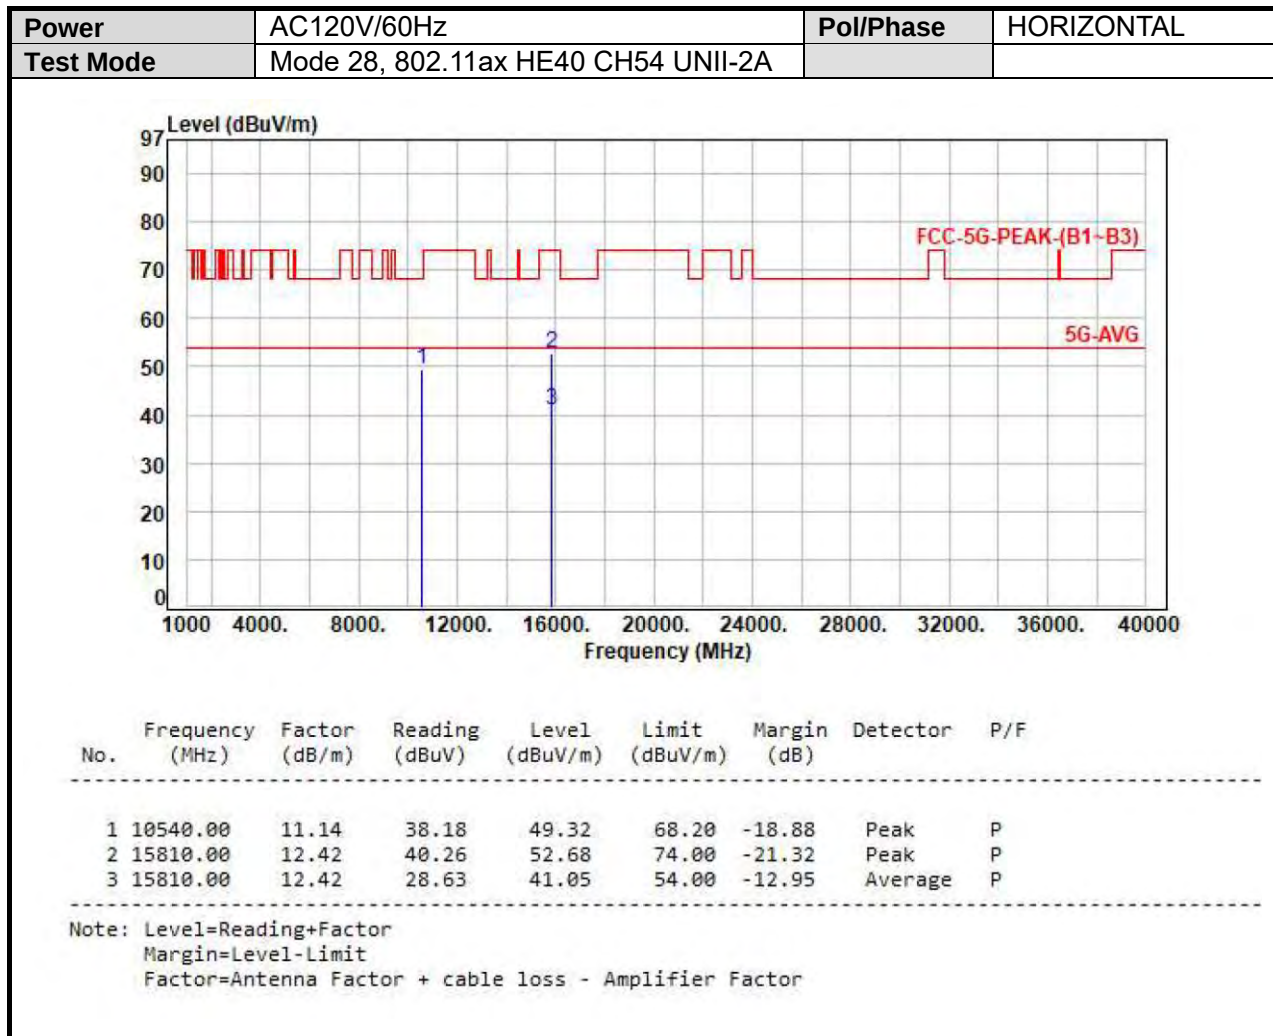

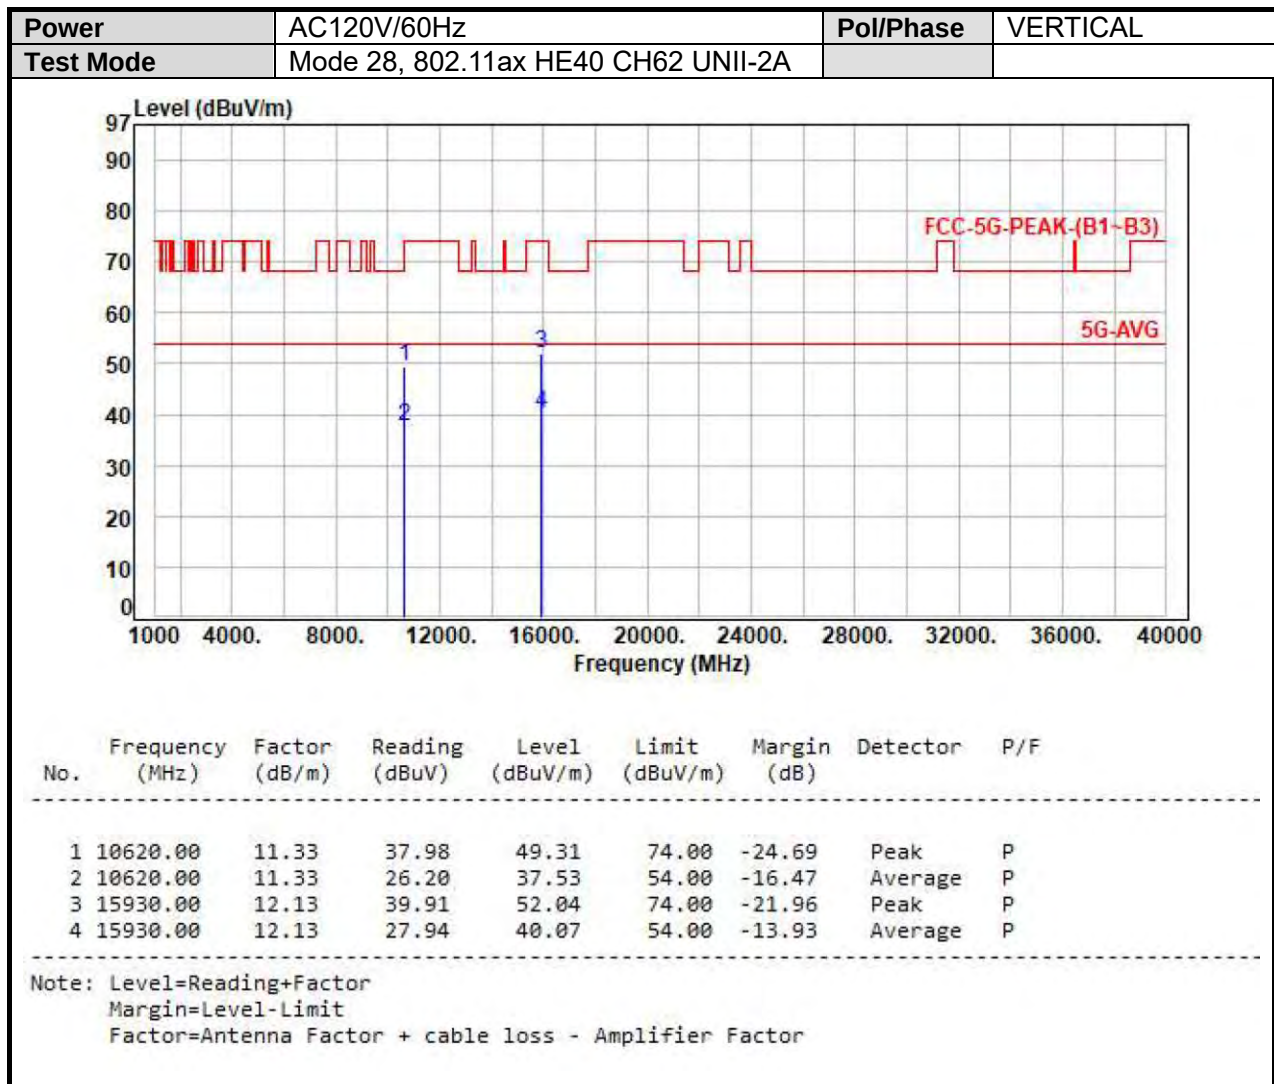

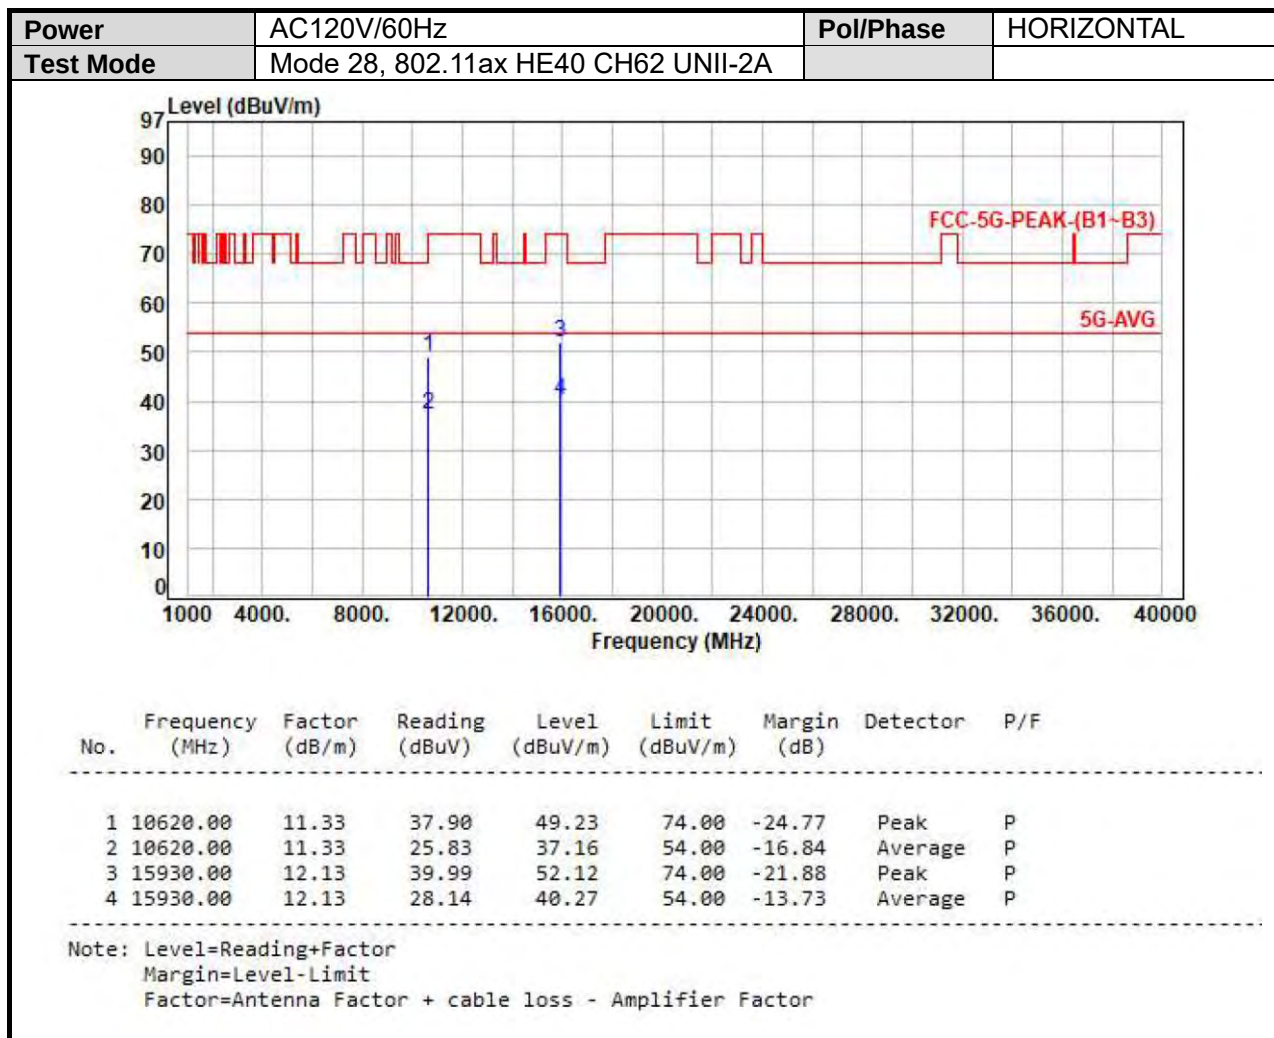



6.7. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz




CRIUS CO310-G1

SISO

UNII-1

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 1, 802.11a CH36 UNII-1		

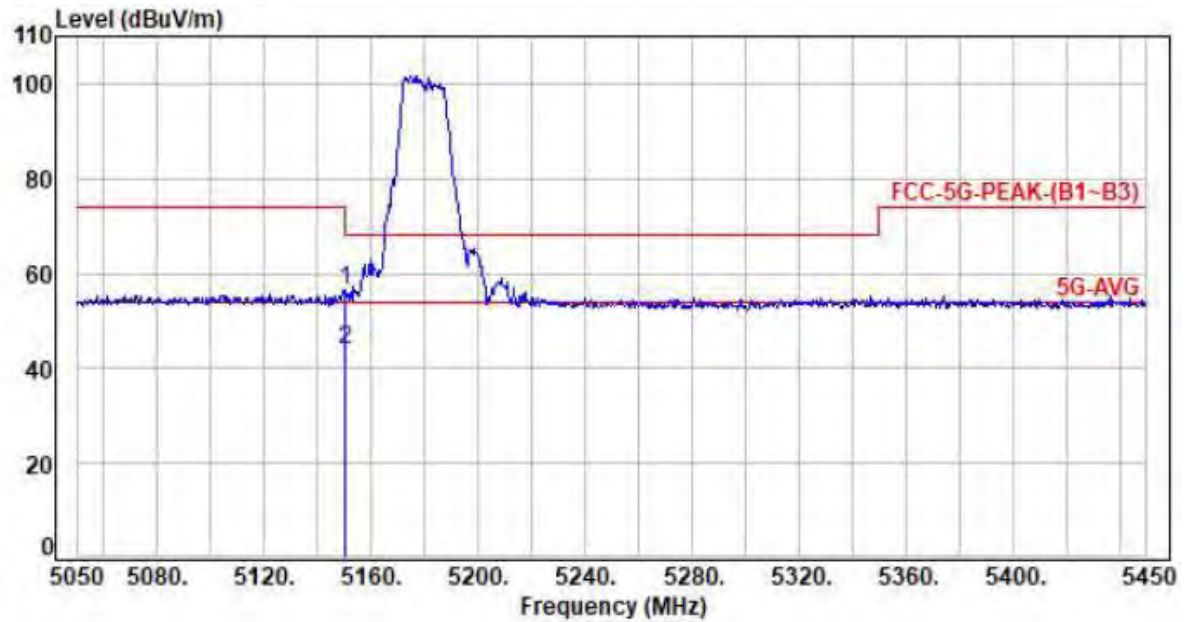



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	5150.00	11.32	45.22	56.54	74.00	-17.46	Peak	P
2	5150.00	11.32	32.56	43.88	54.00	-10.12	Average	P


Note: Level=Reading+Factor


Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor

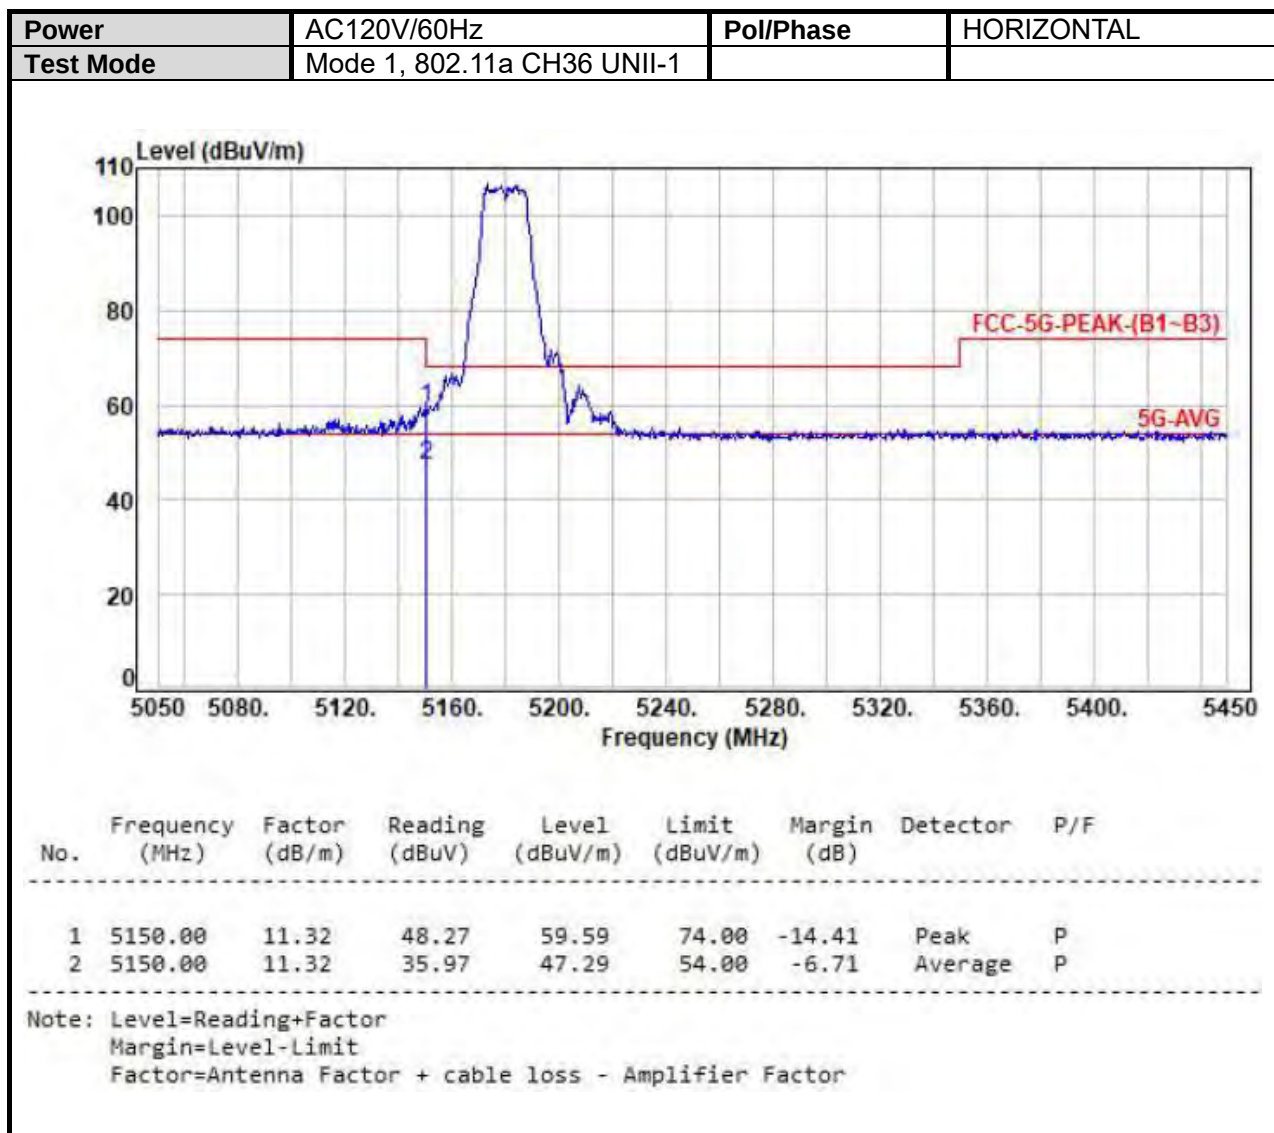


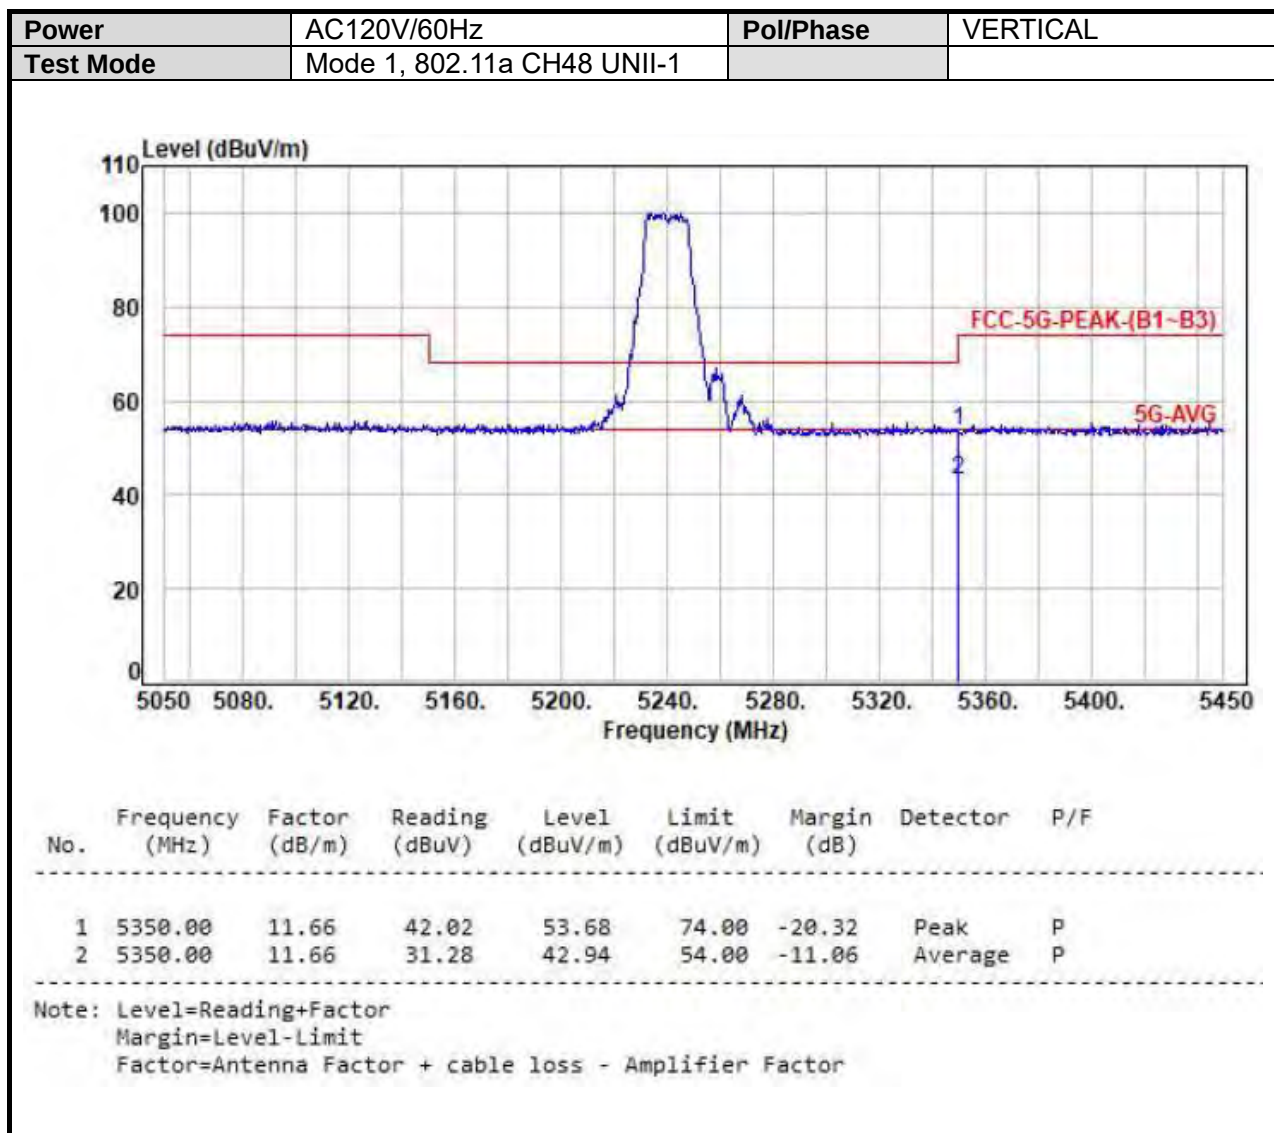


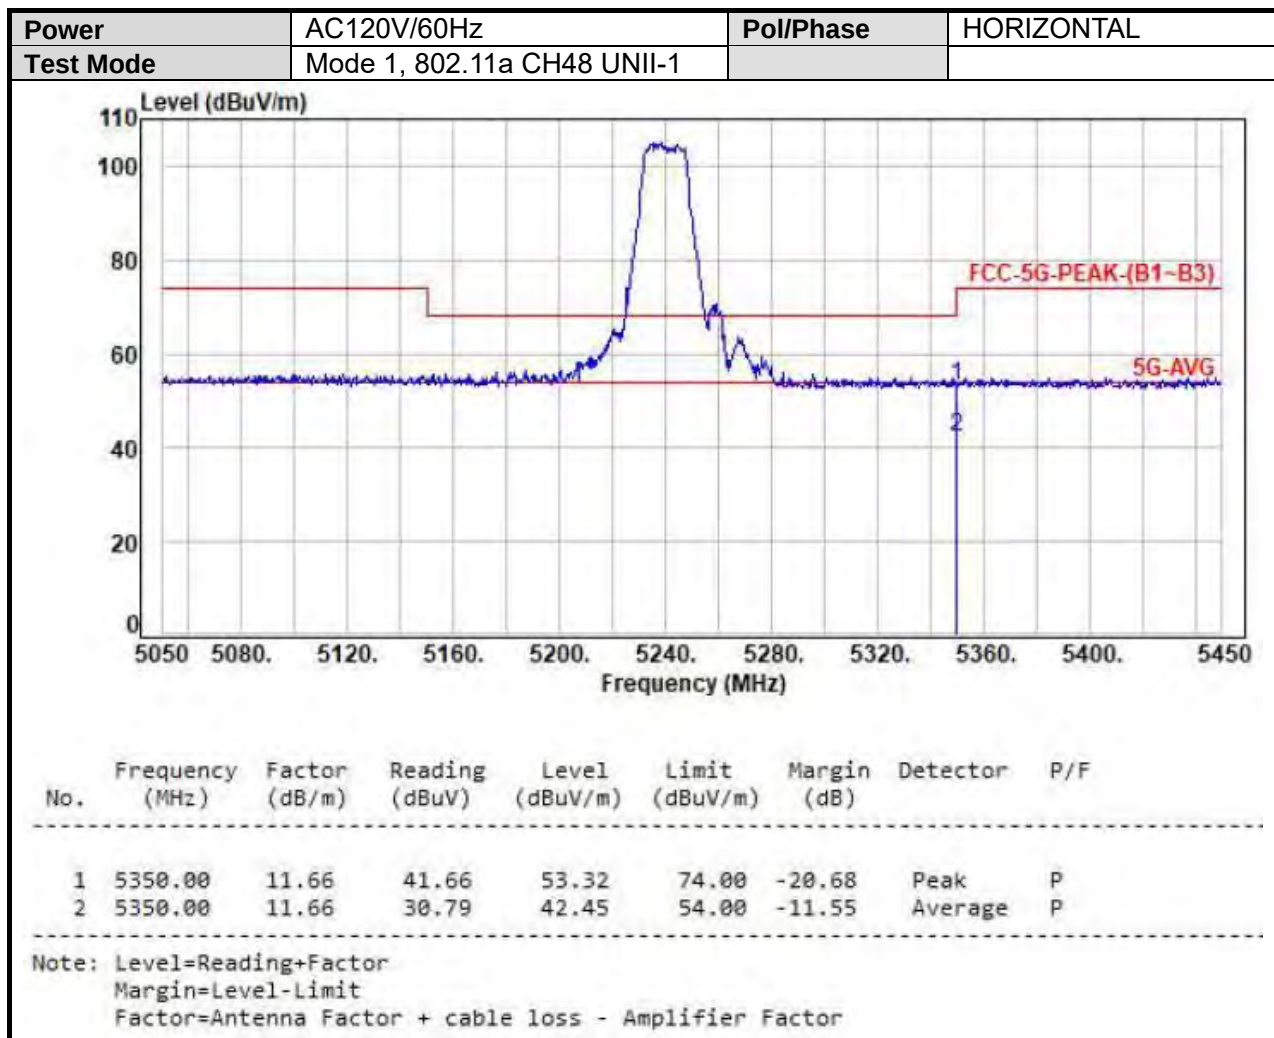


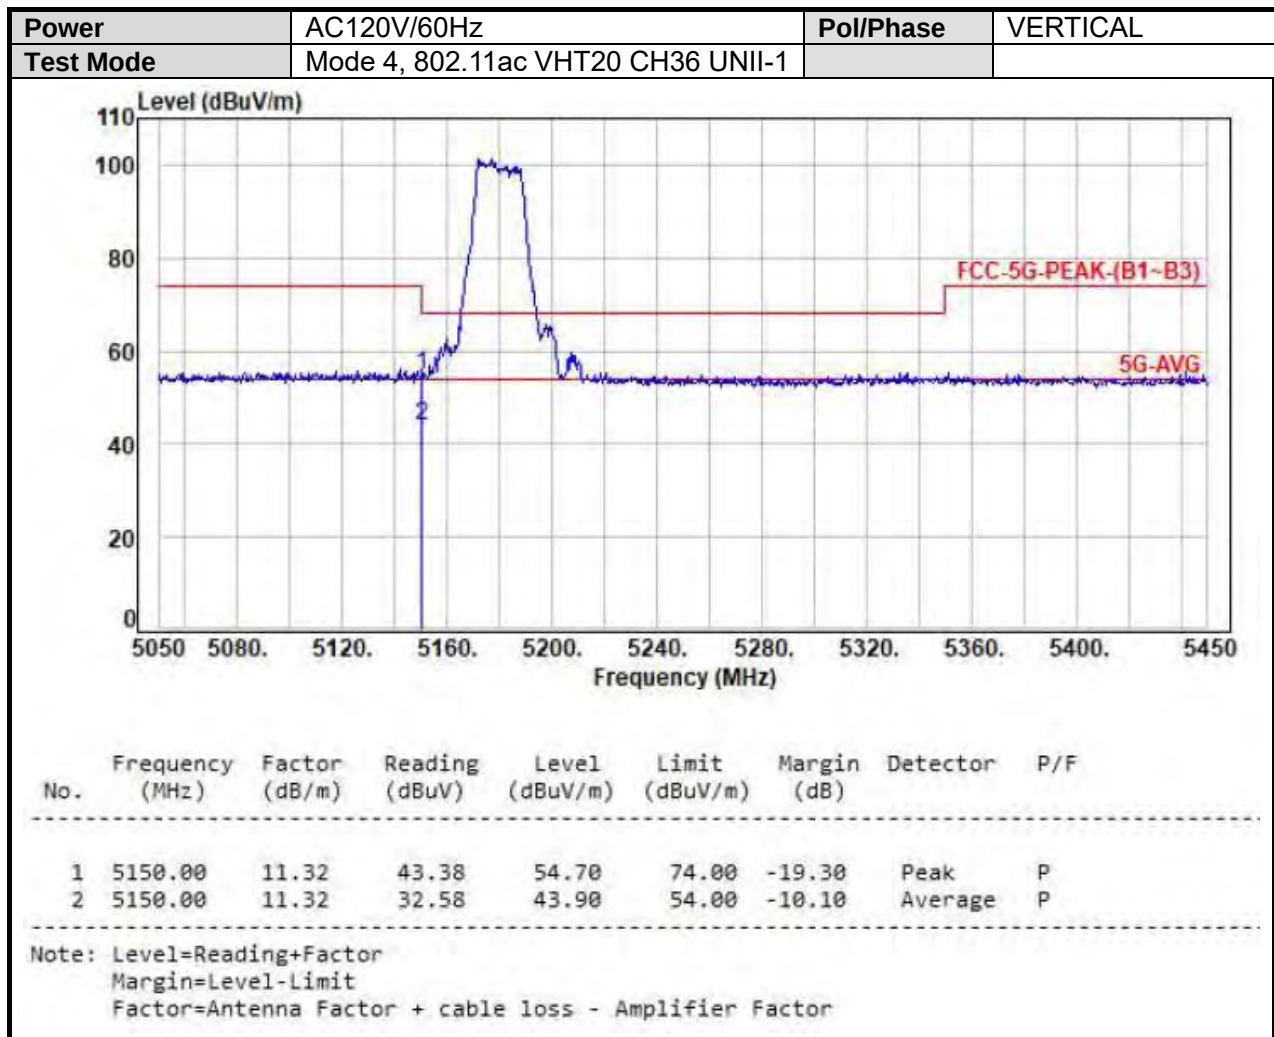


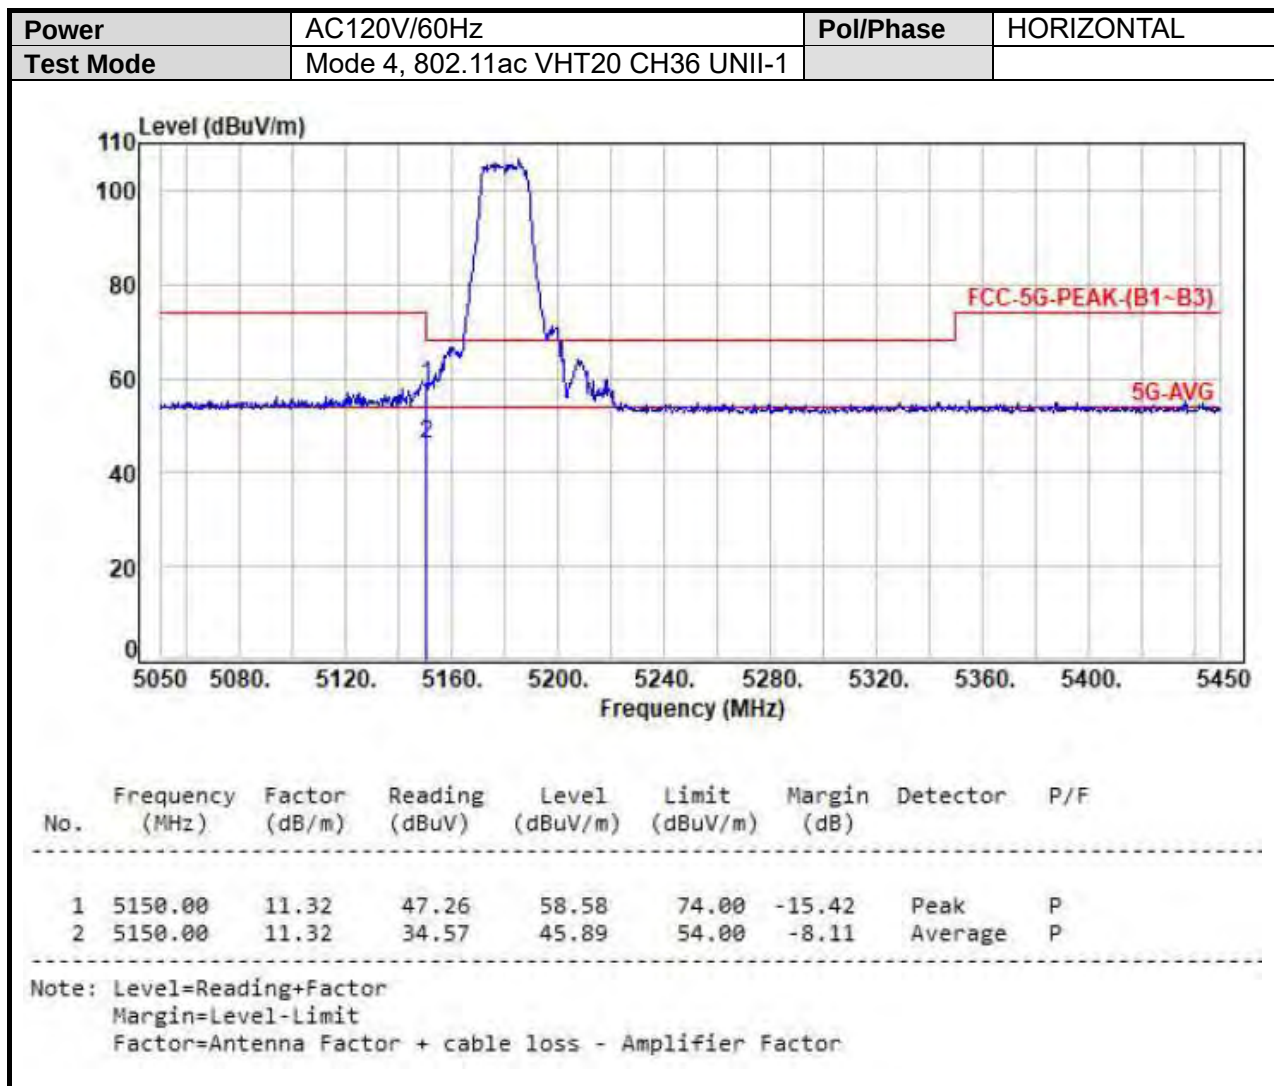


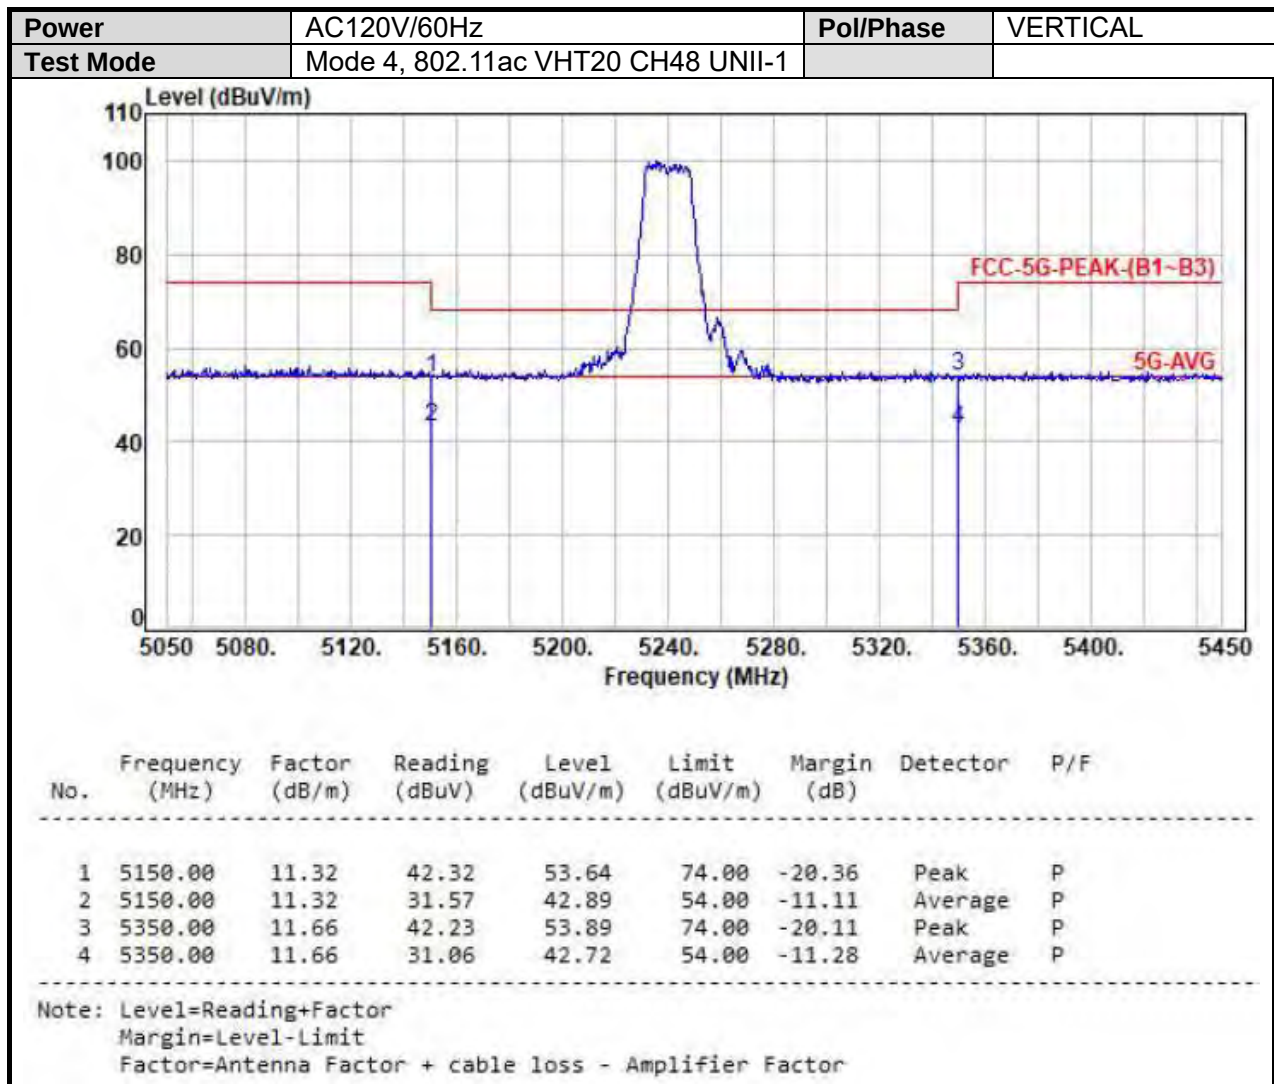


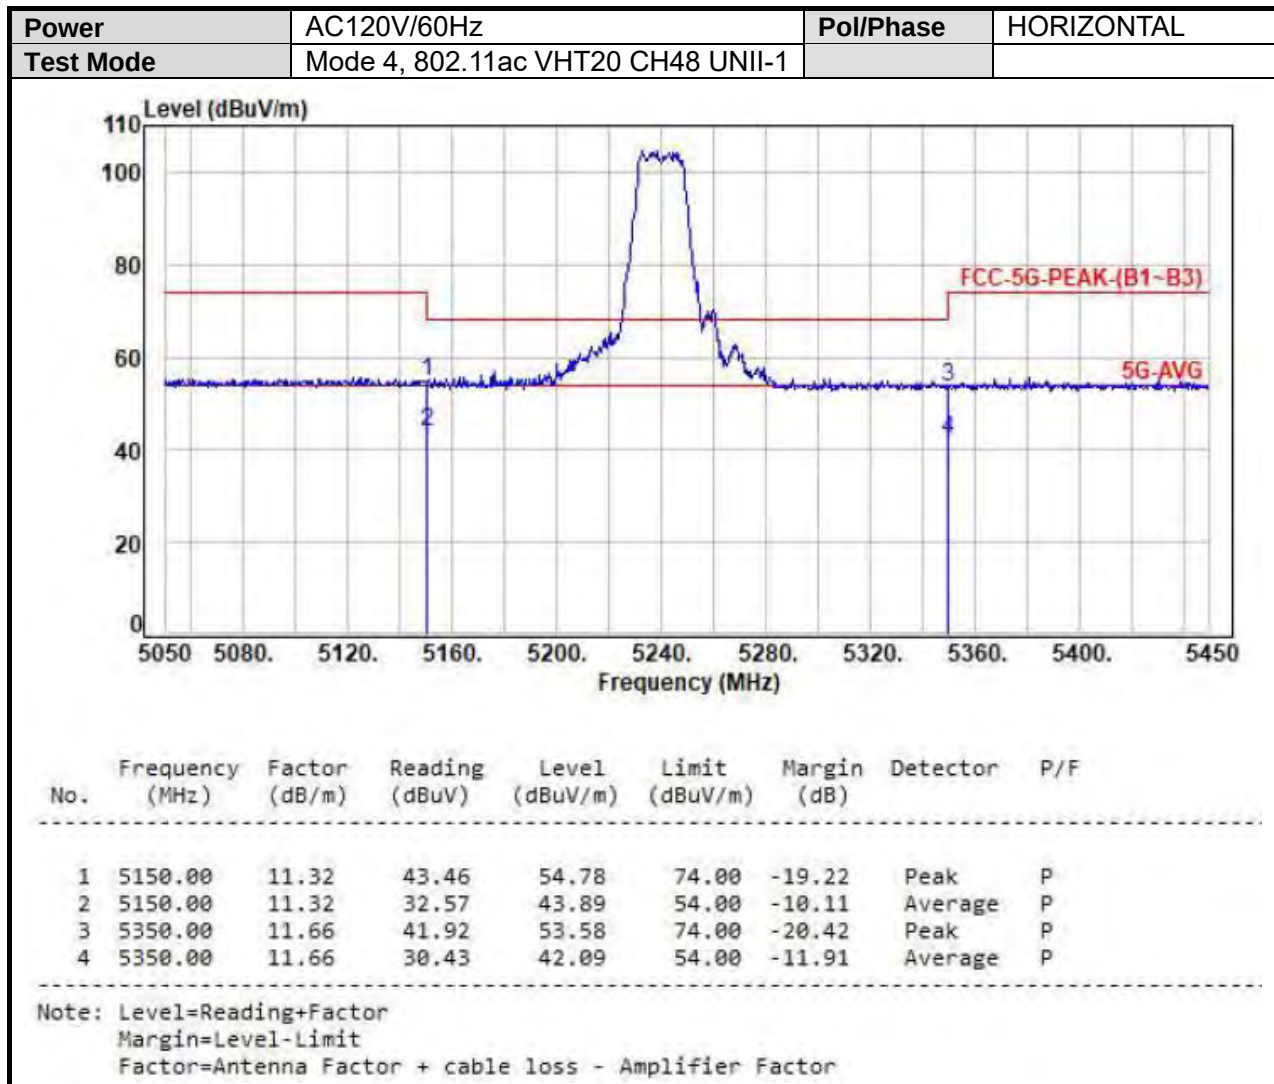


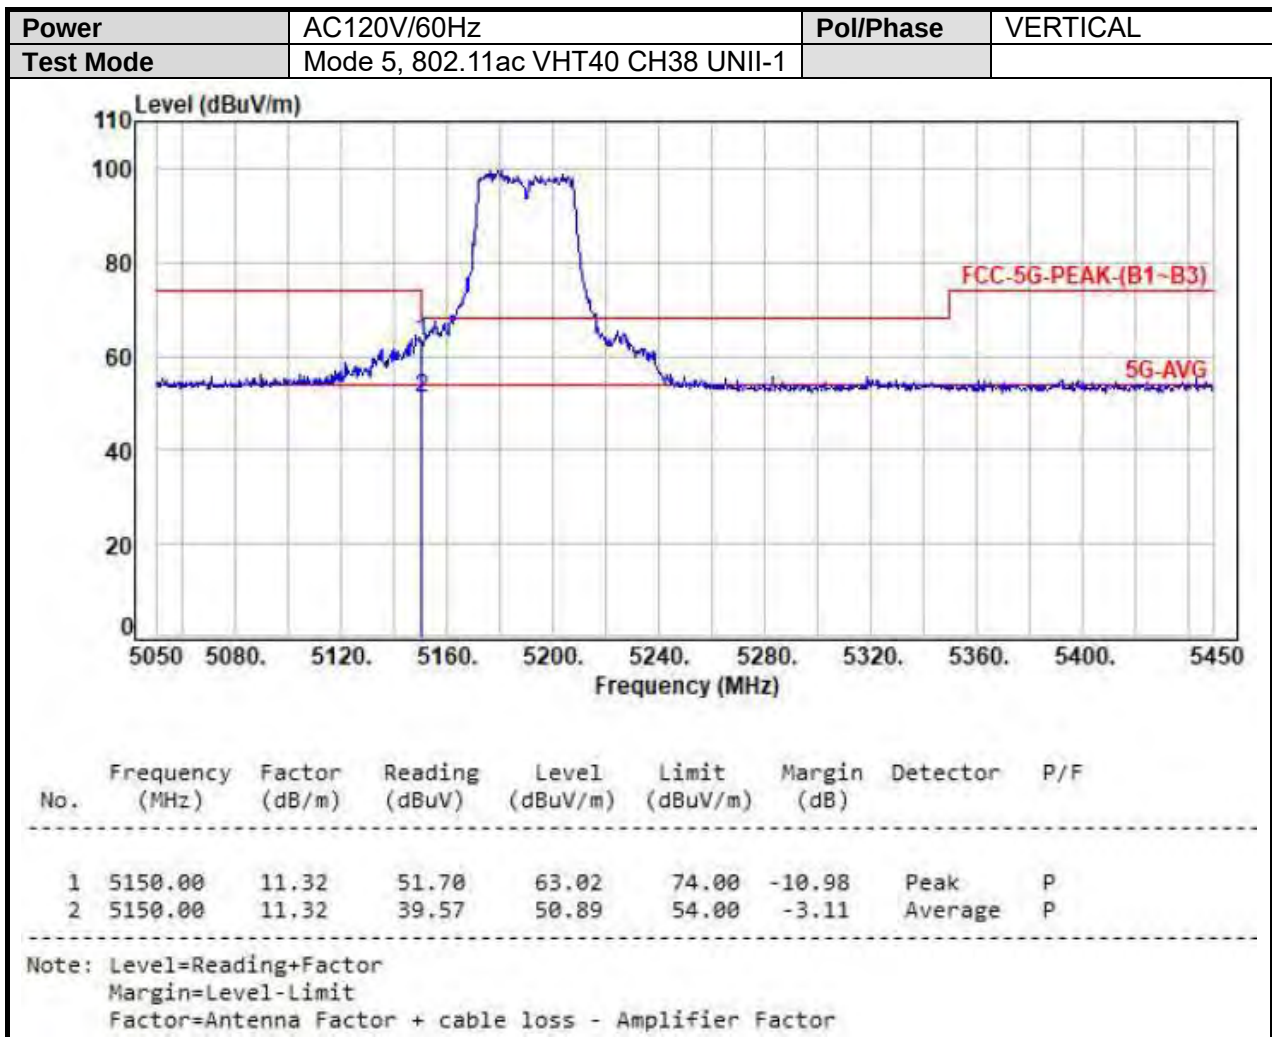


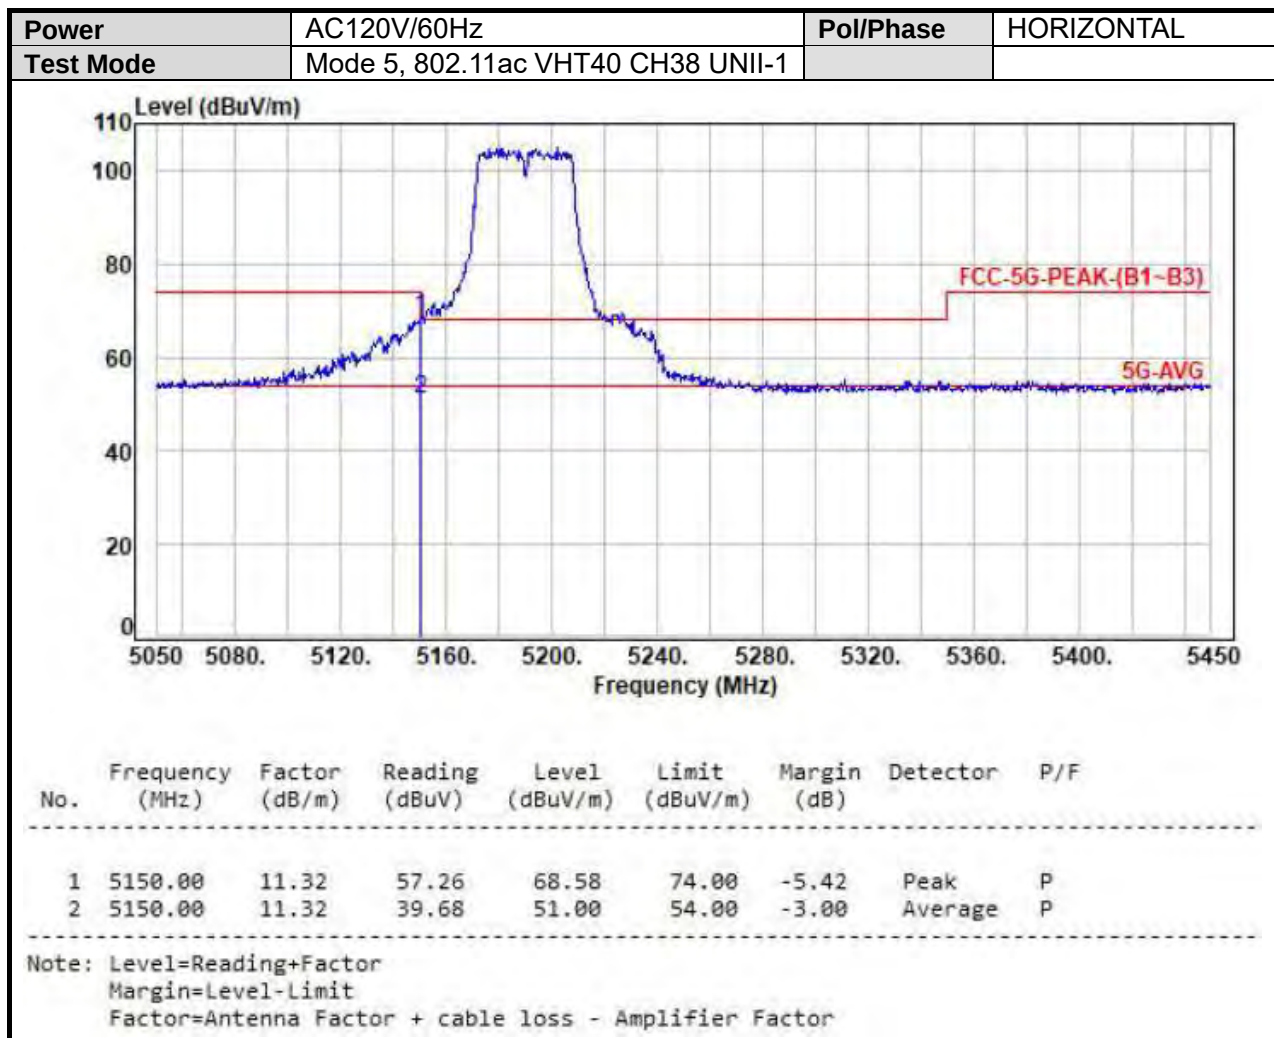


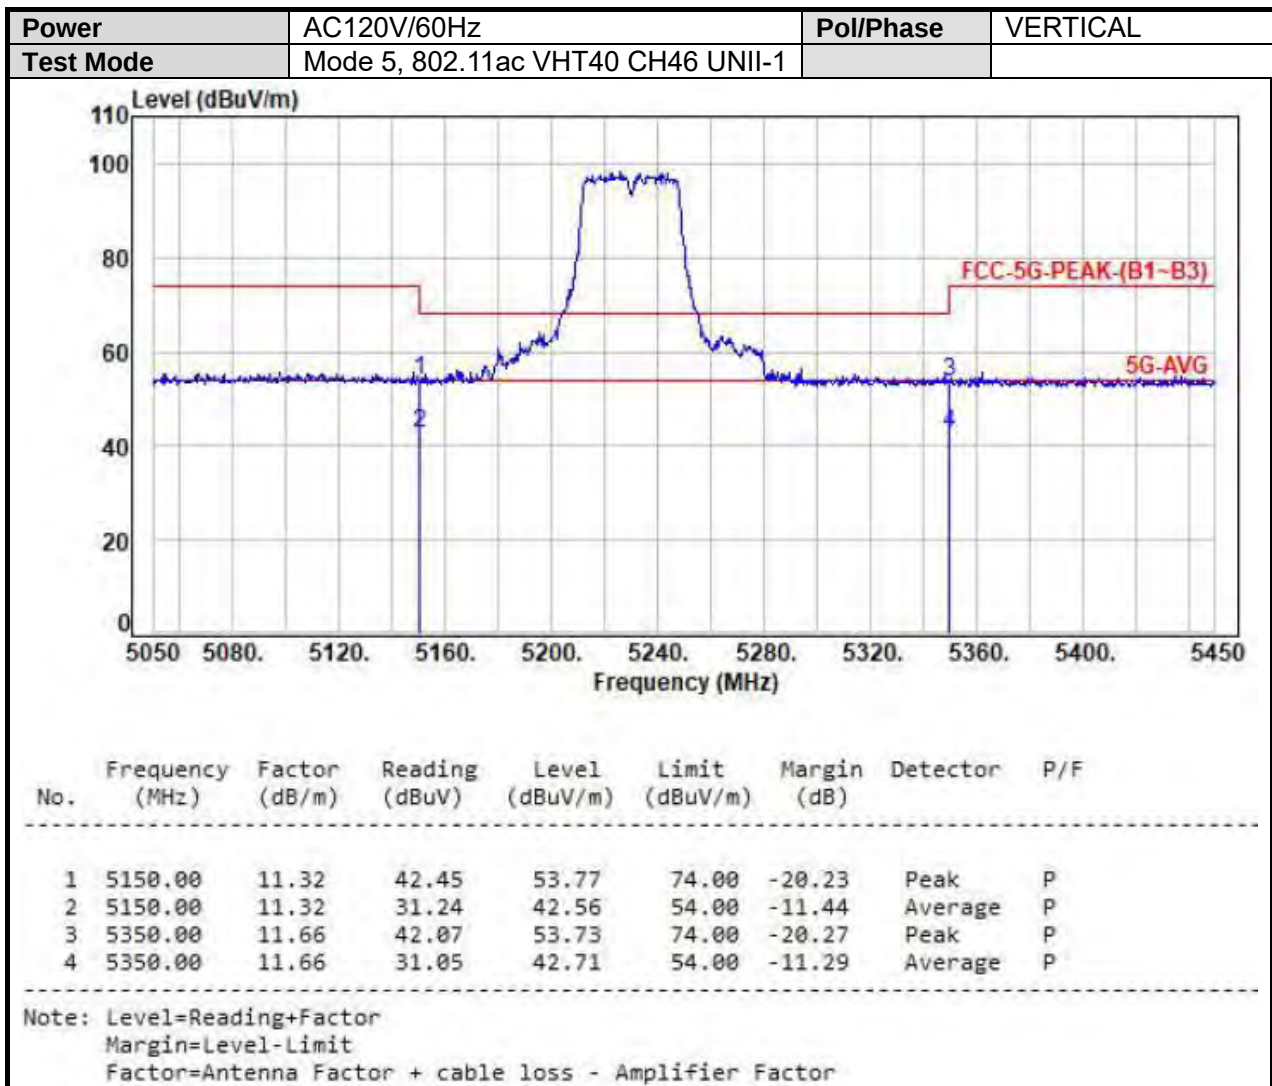


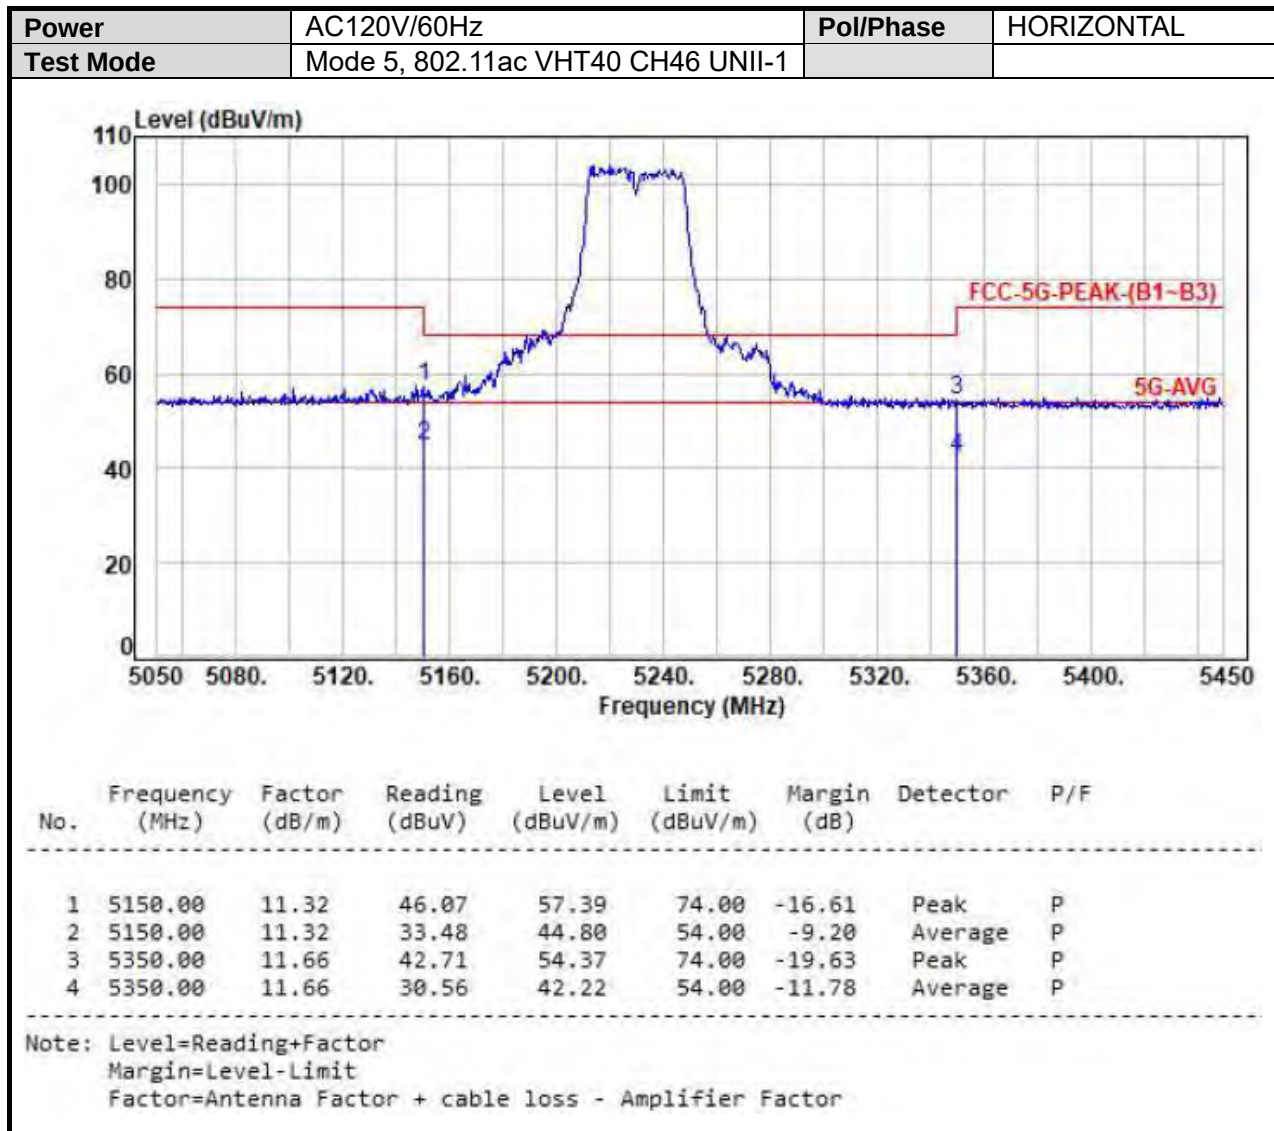


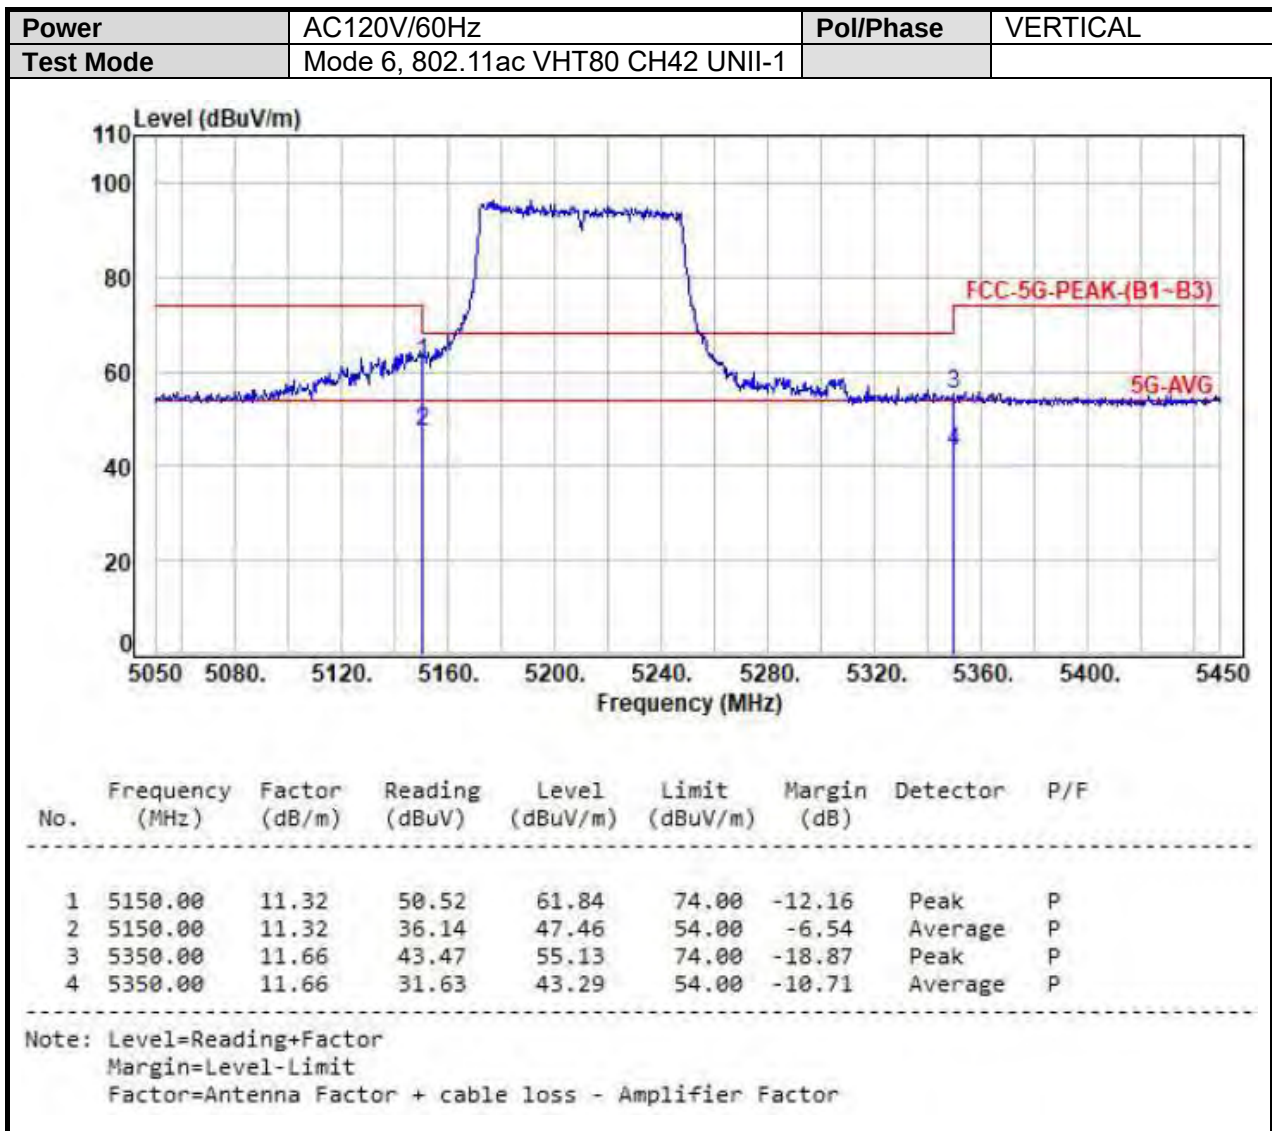


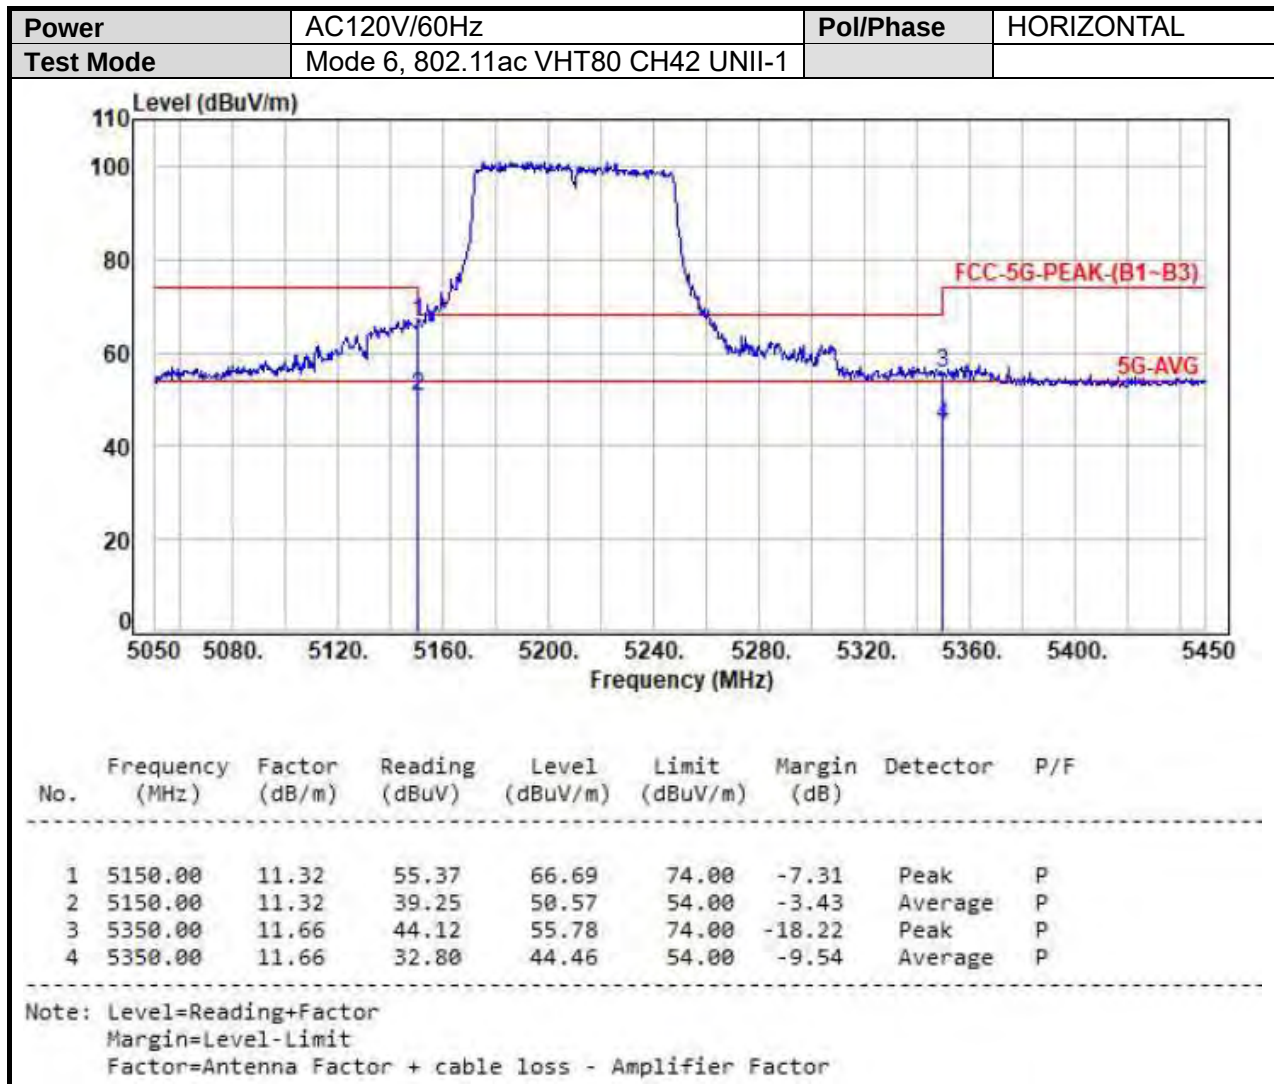


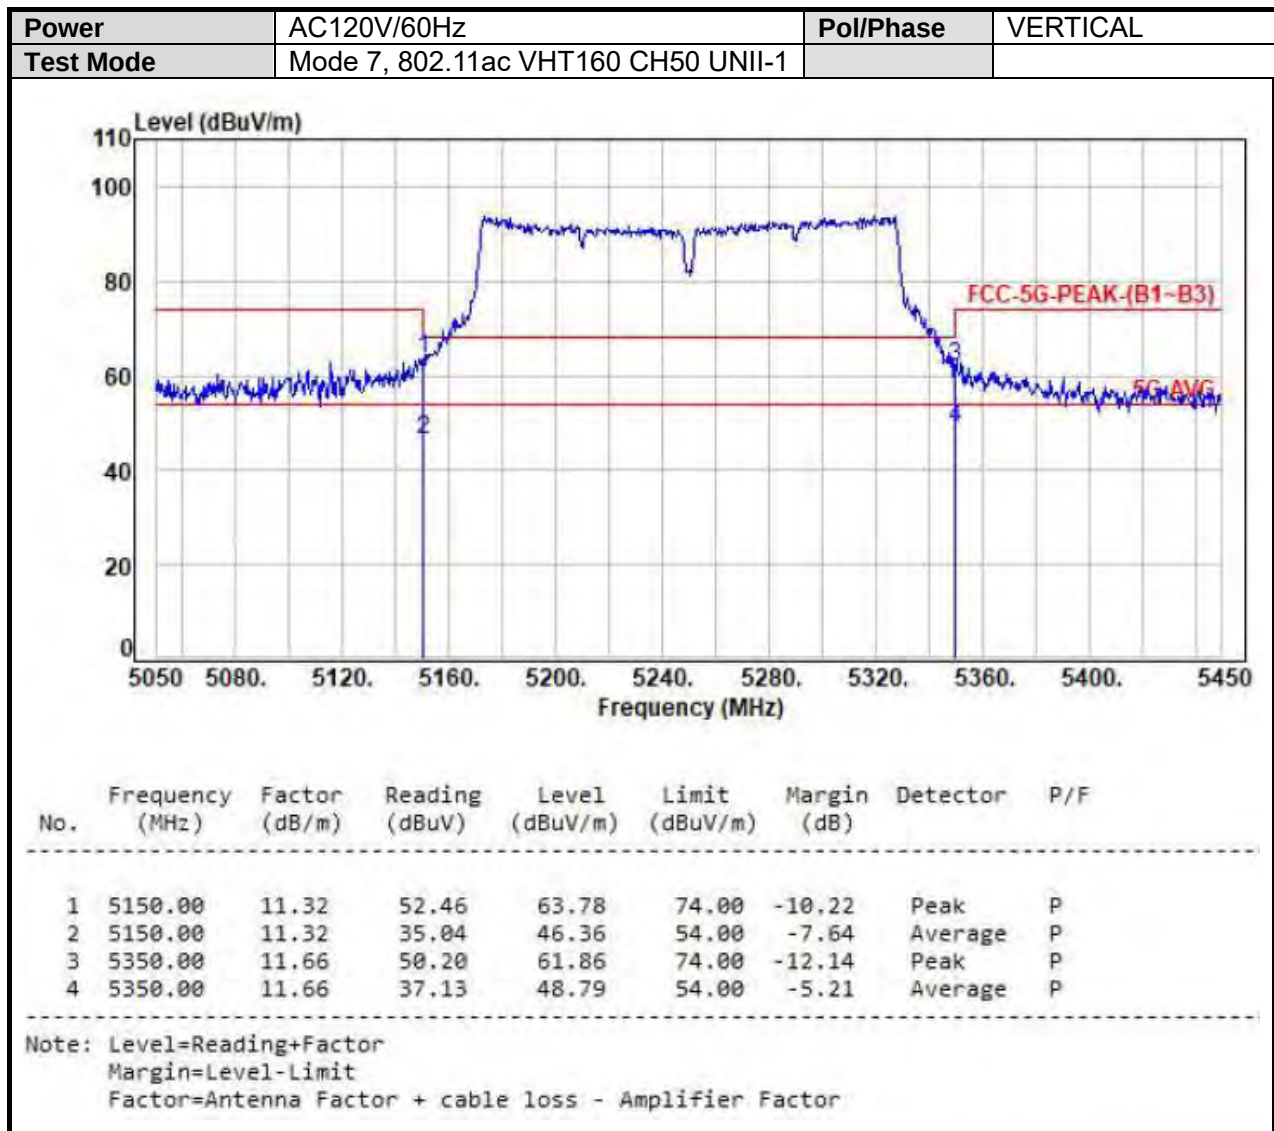


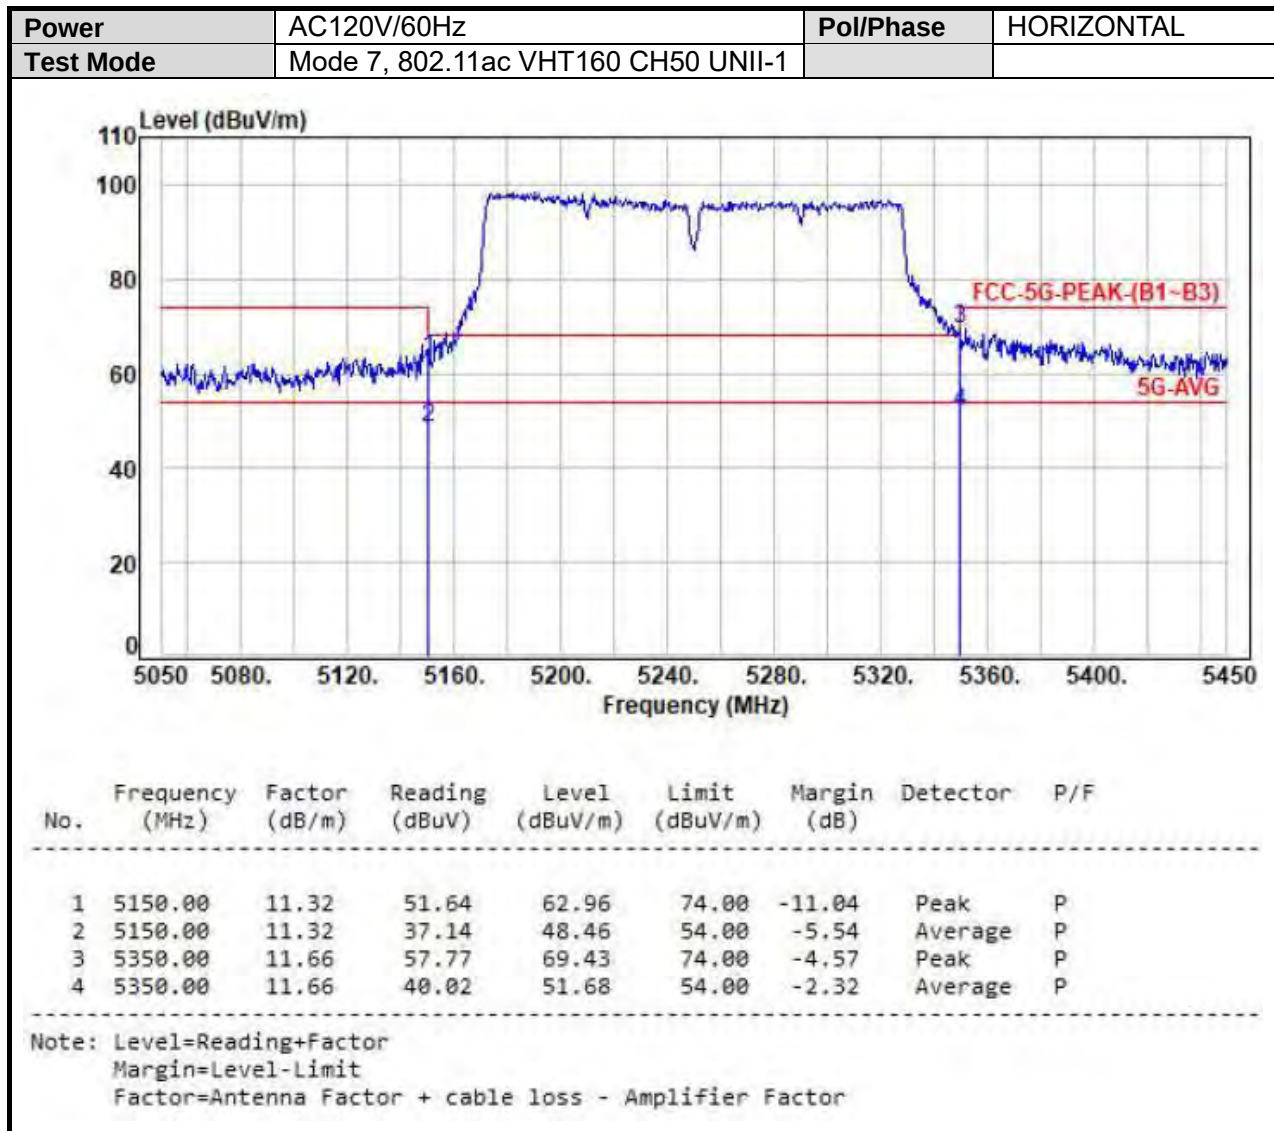


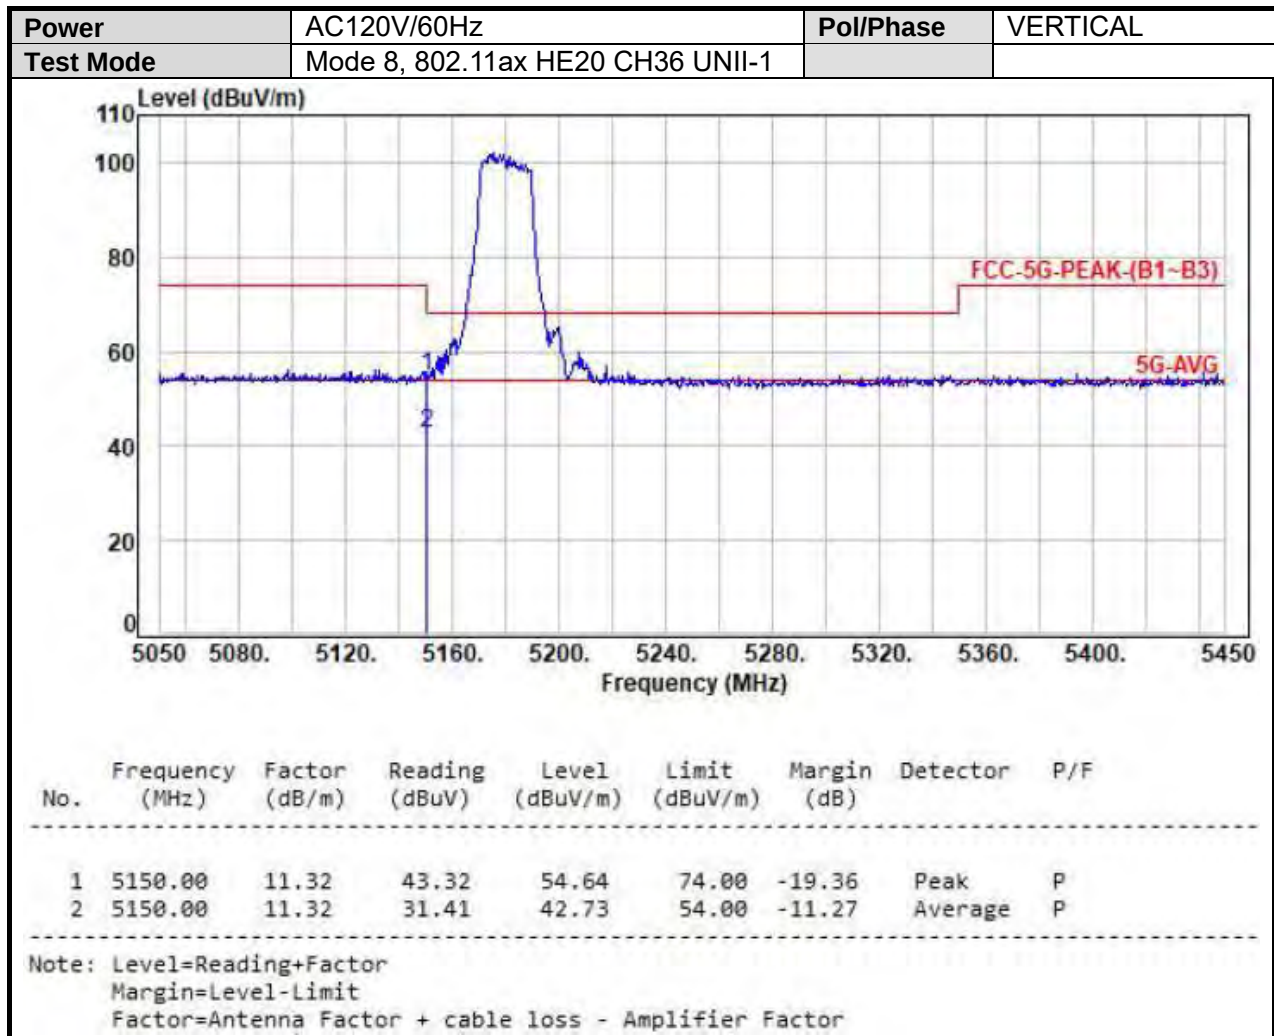


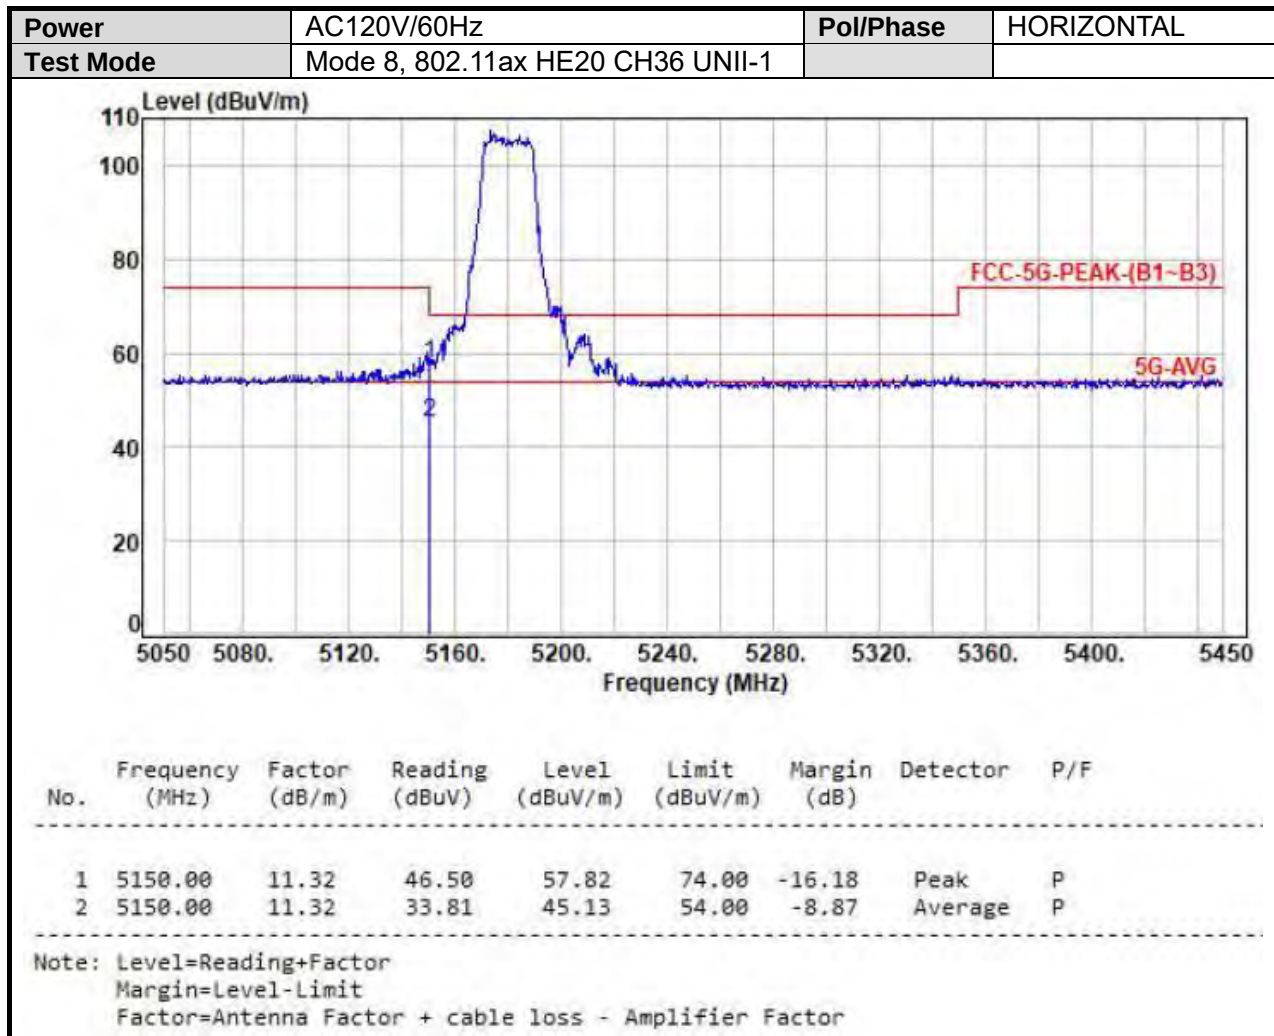


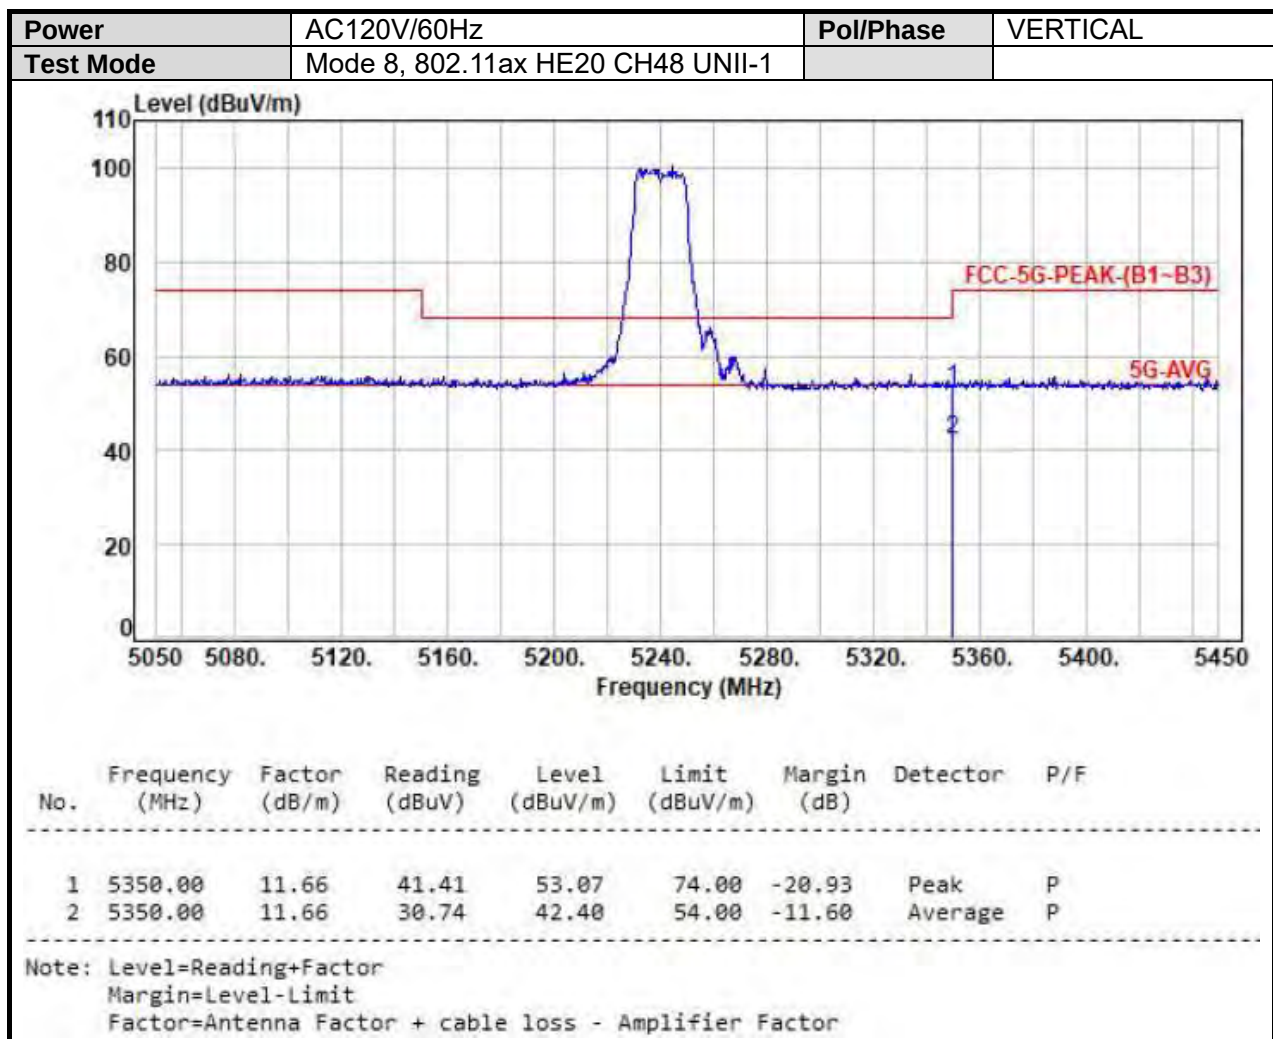


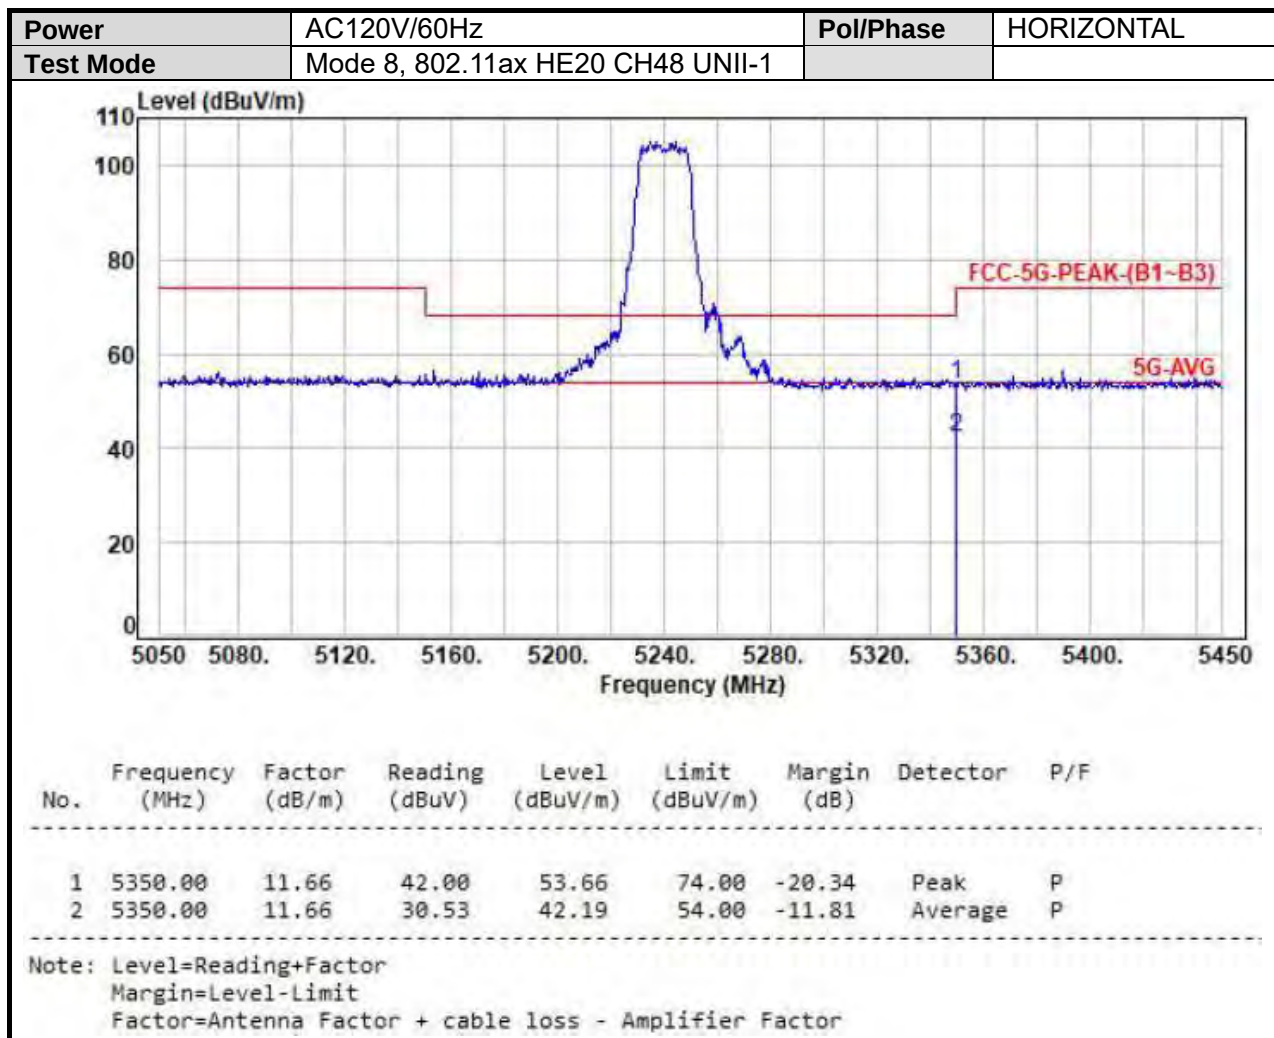


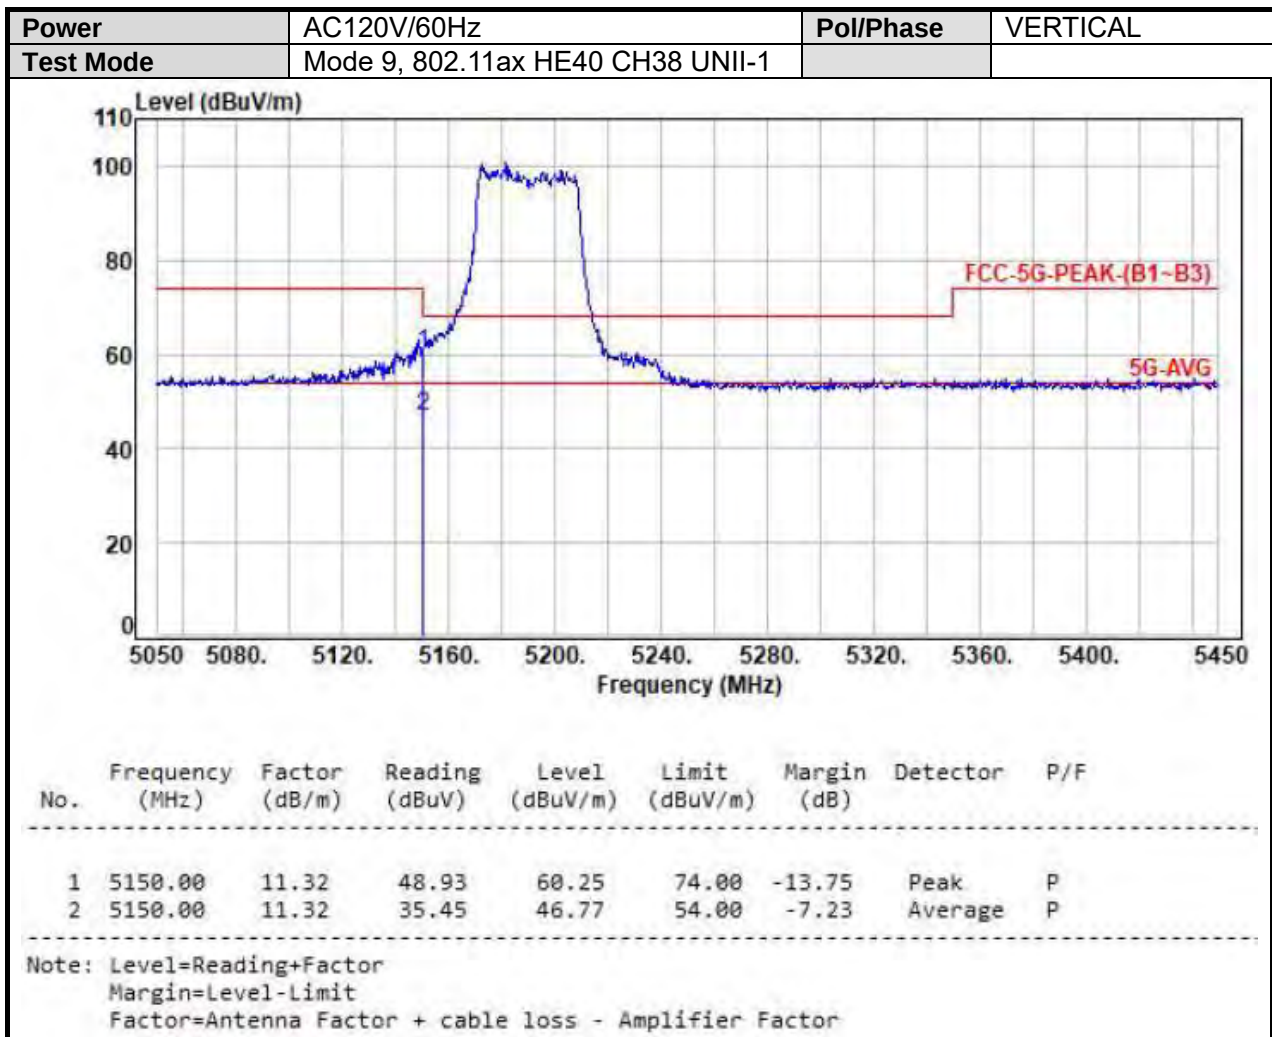


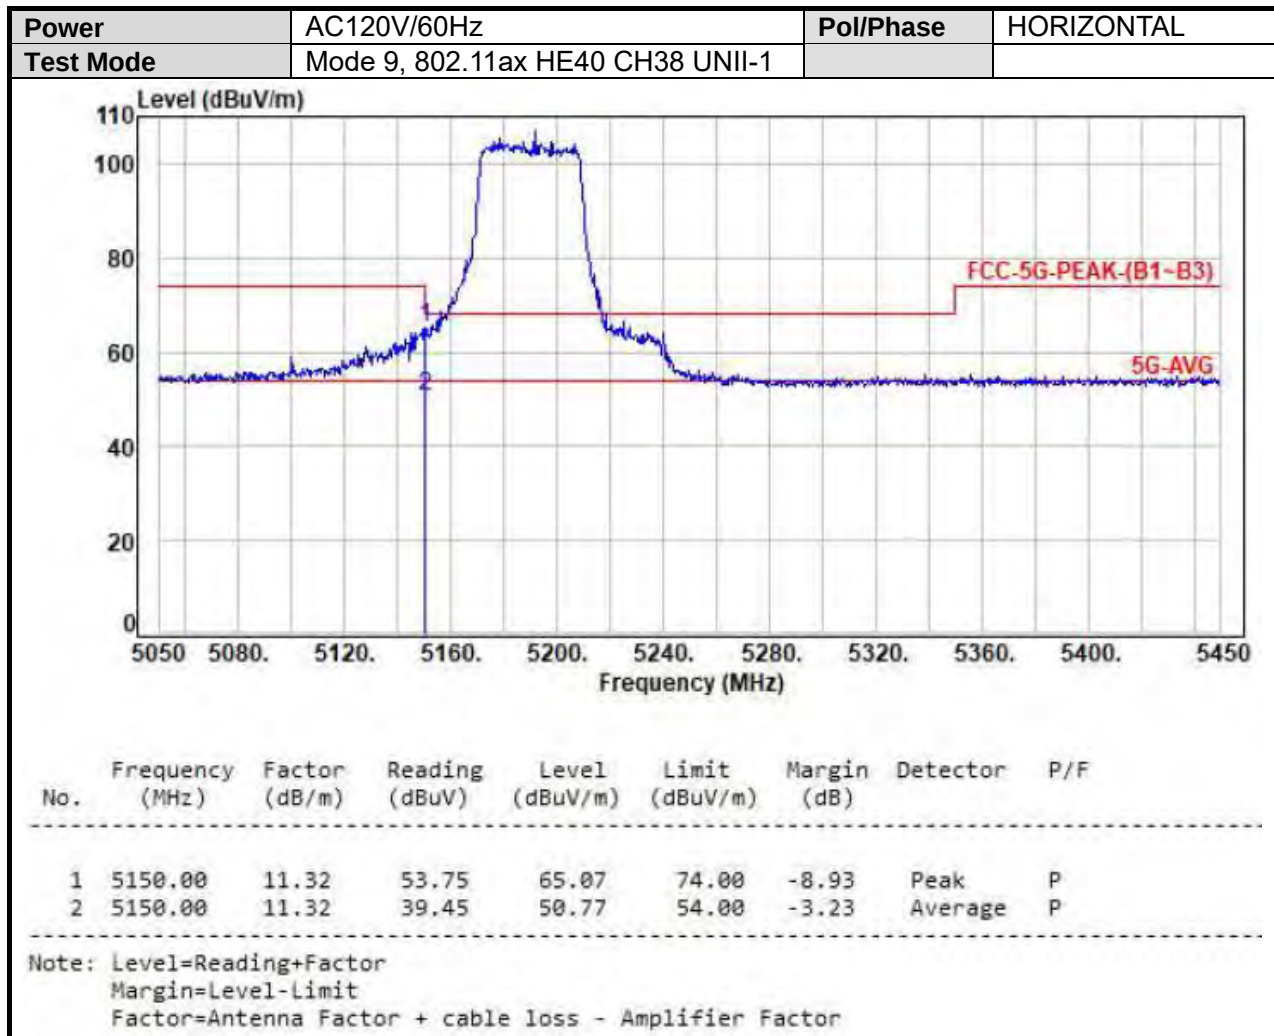


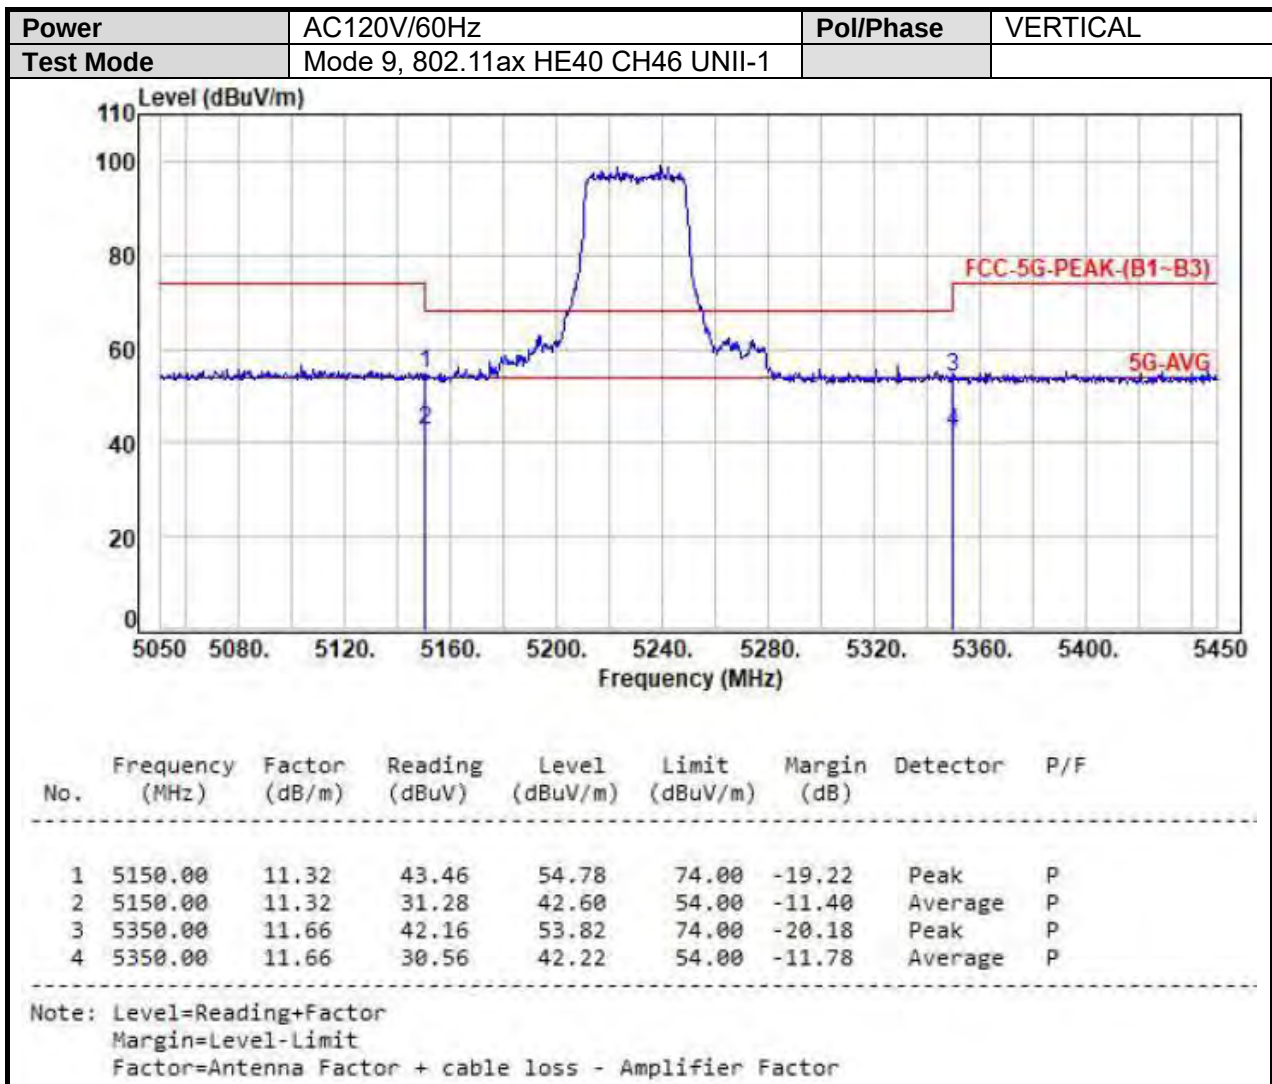


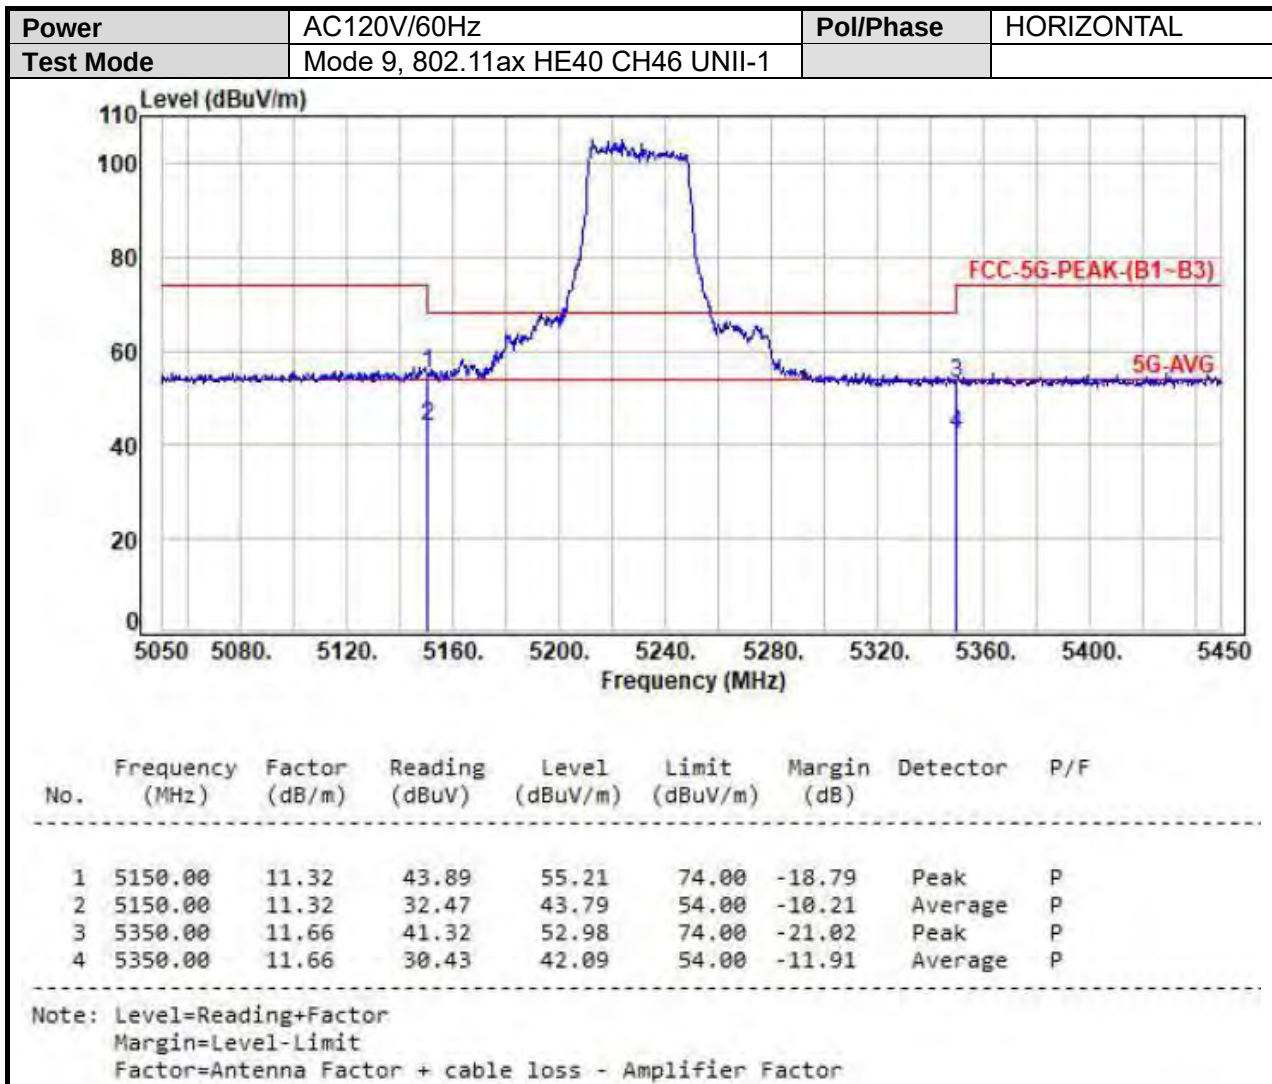

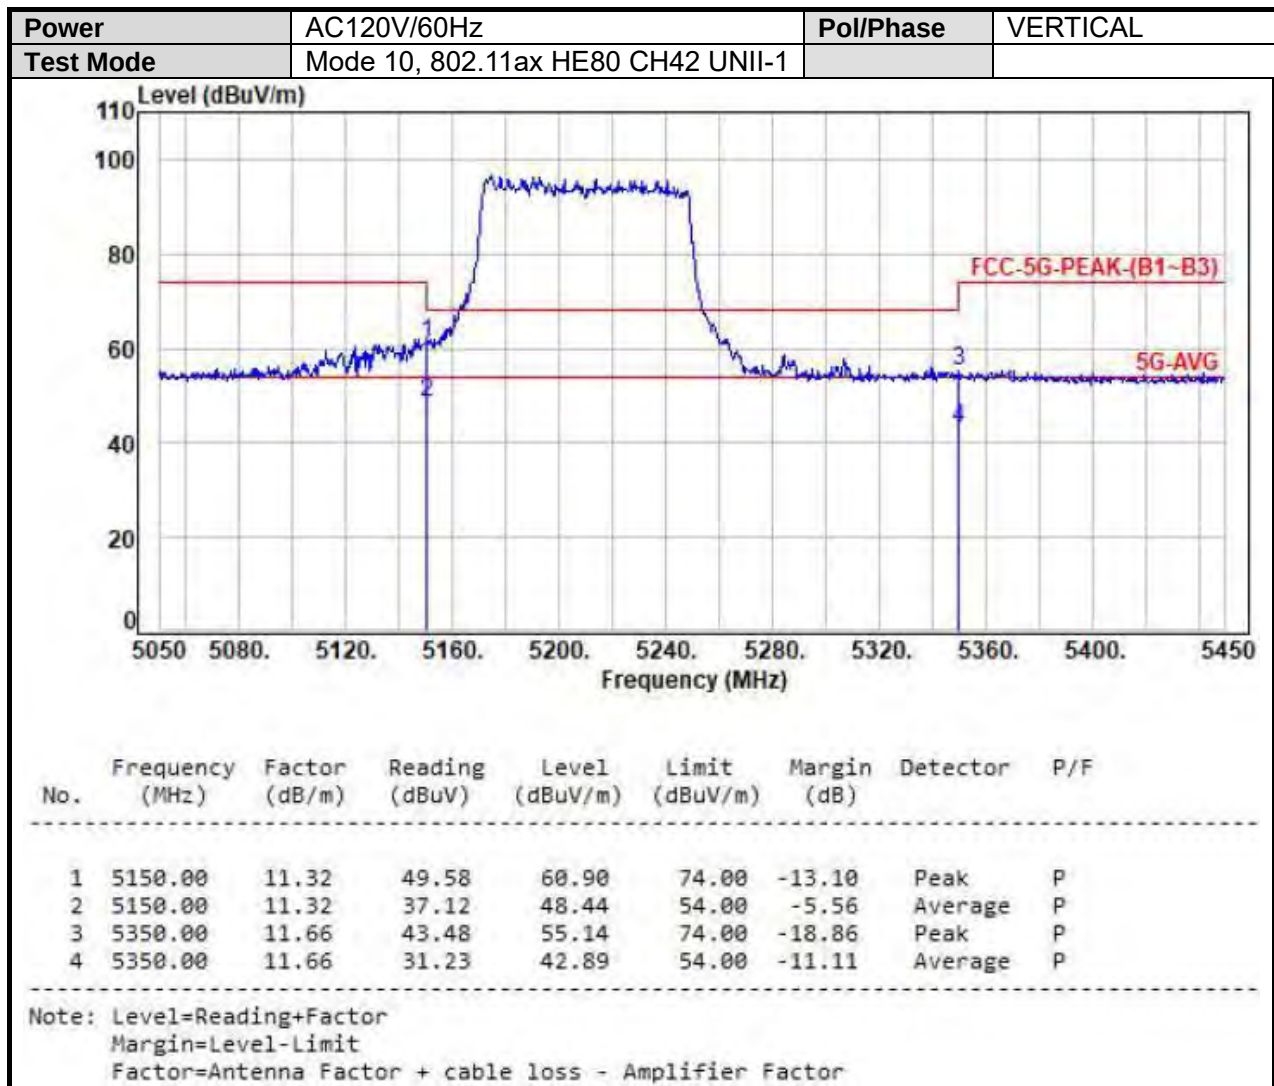

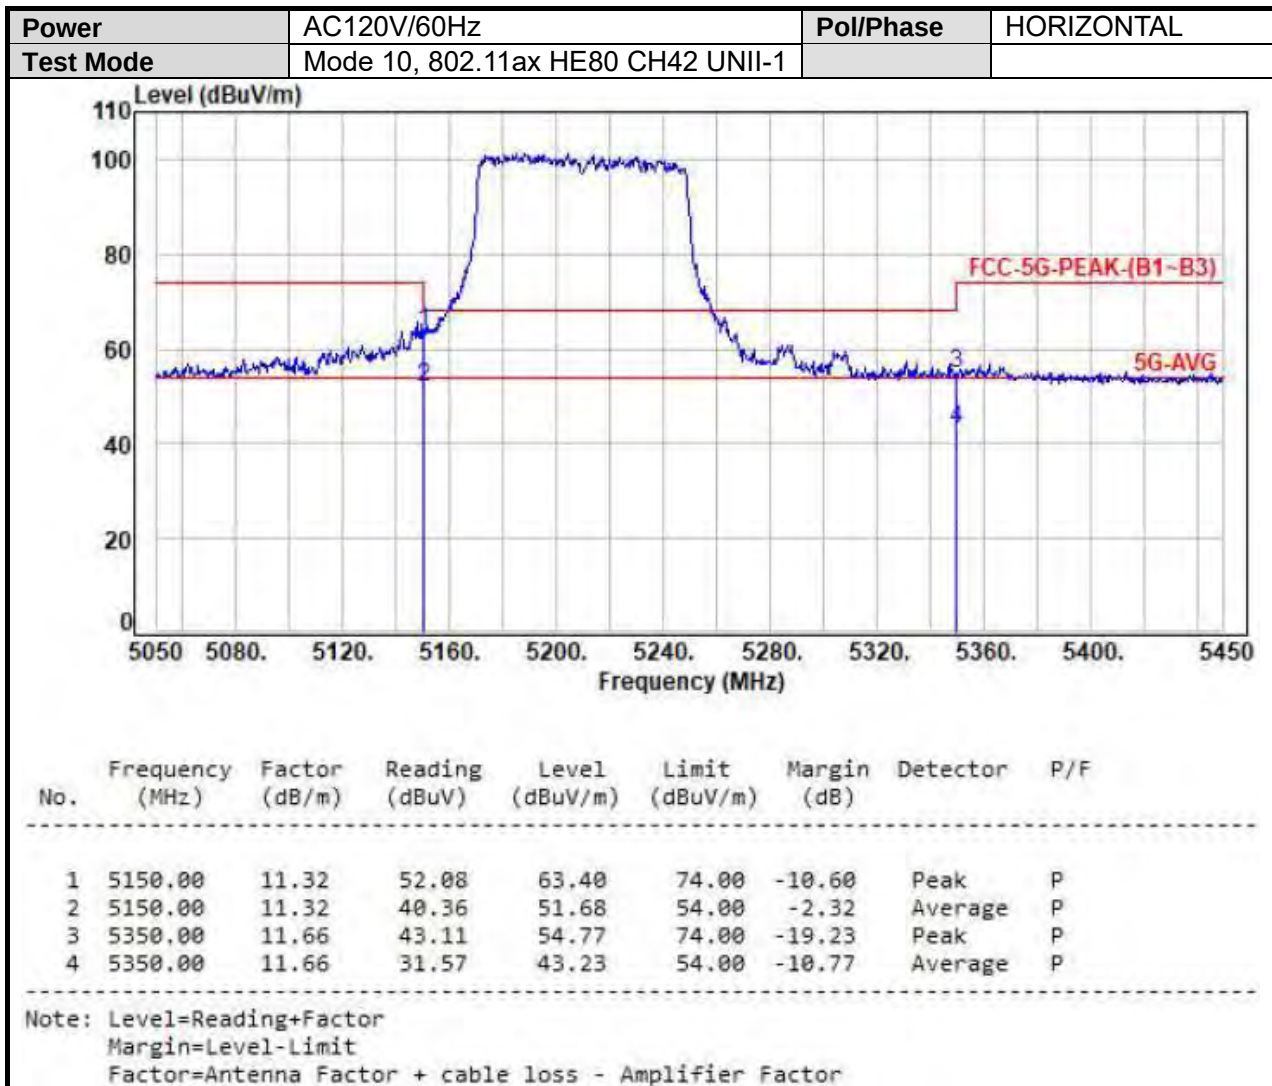


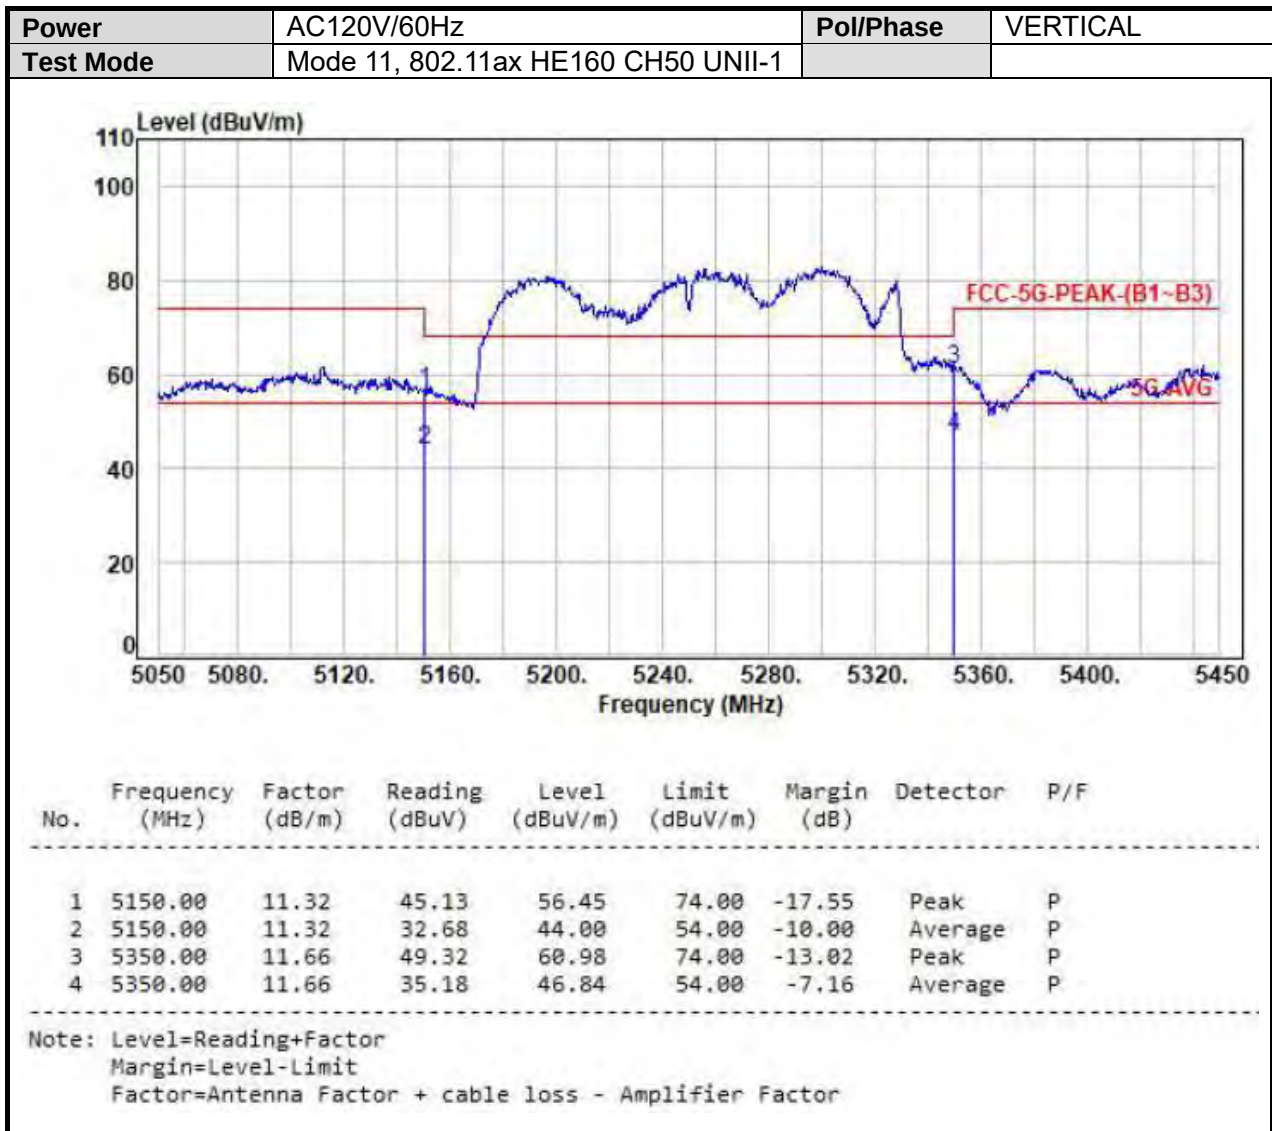


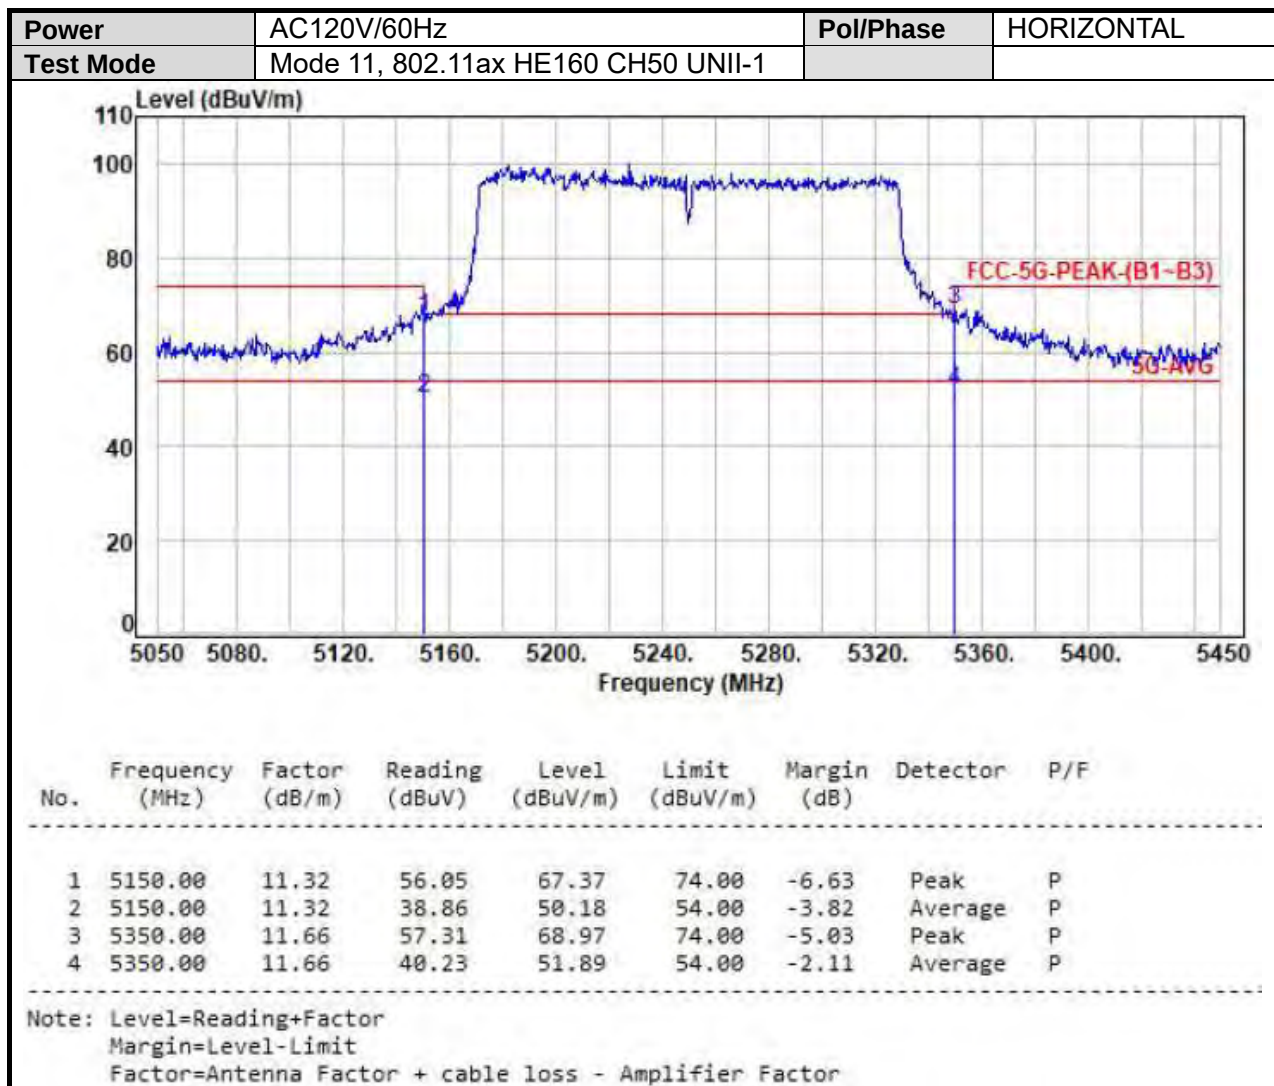






UNII-2A

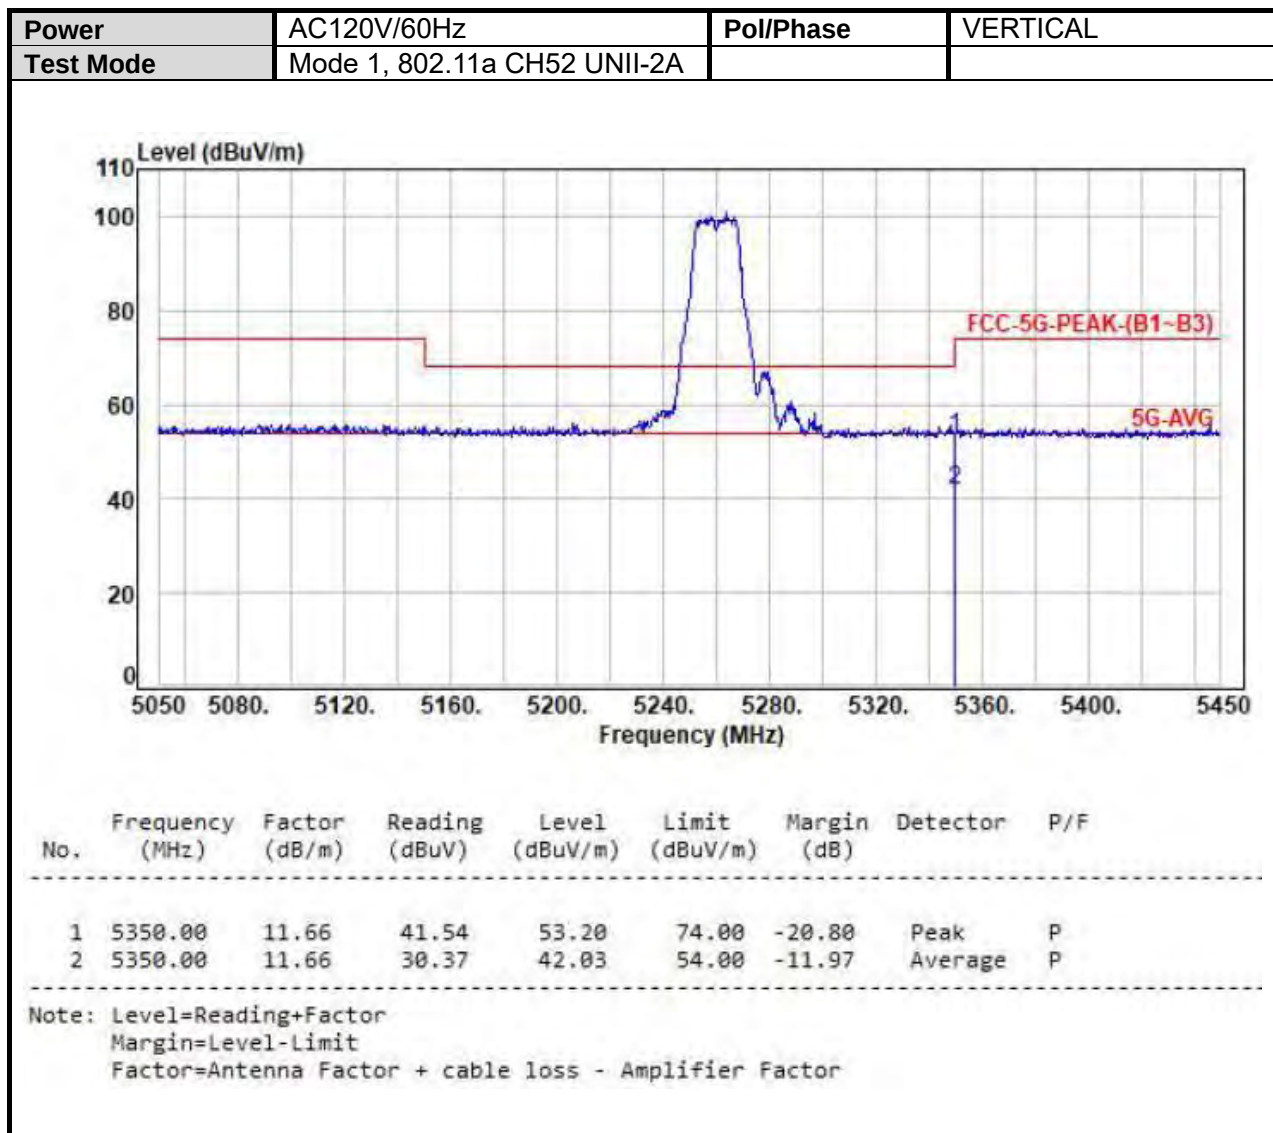


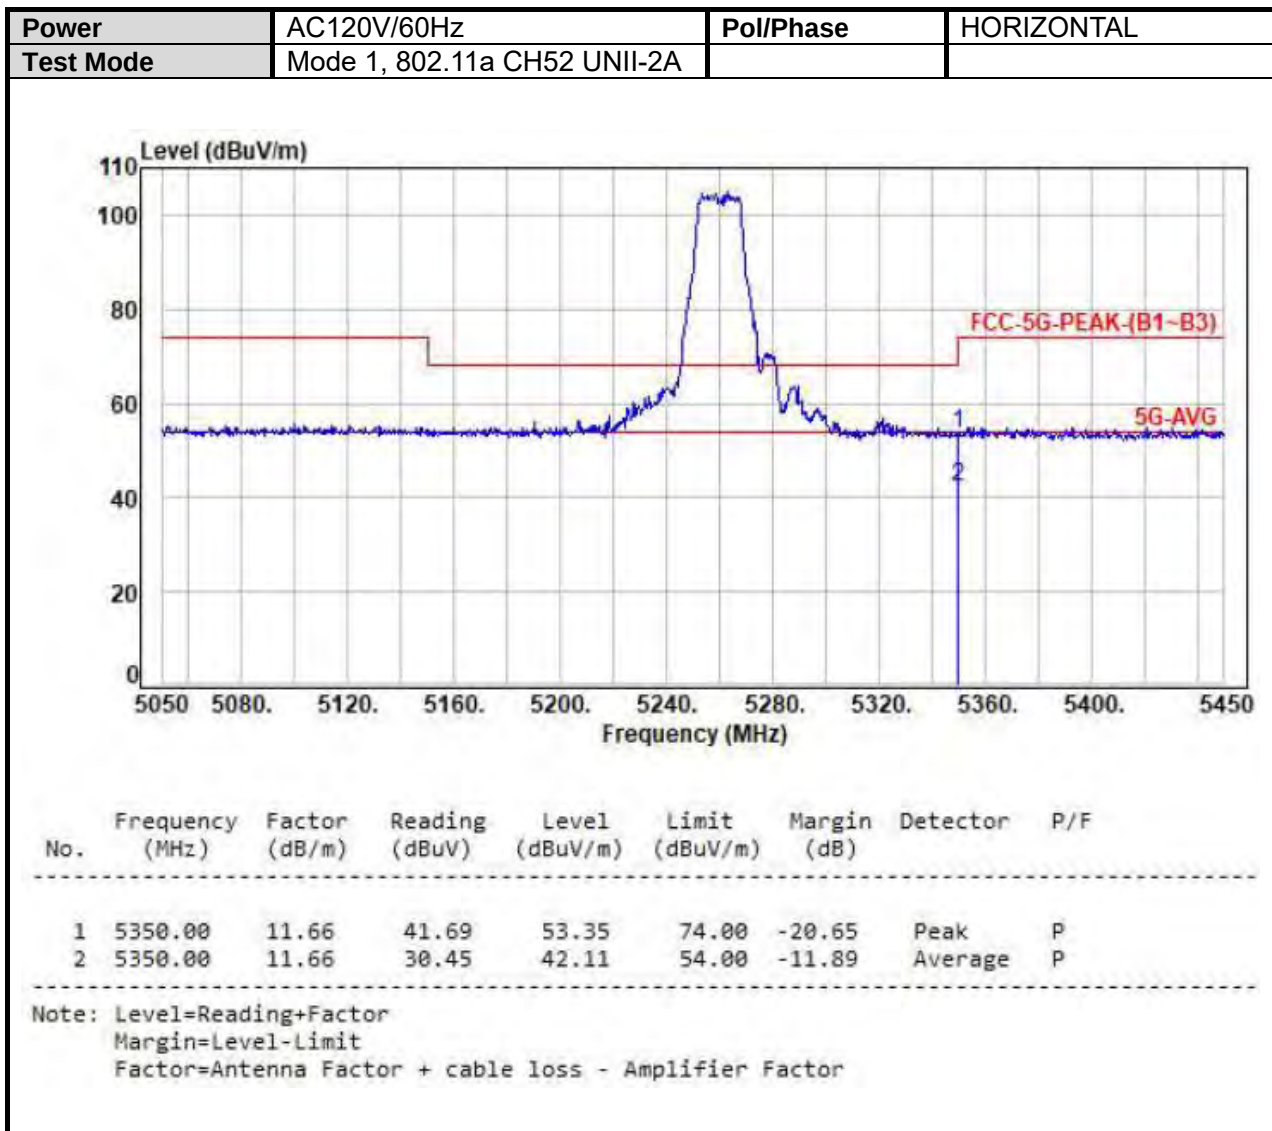


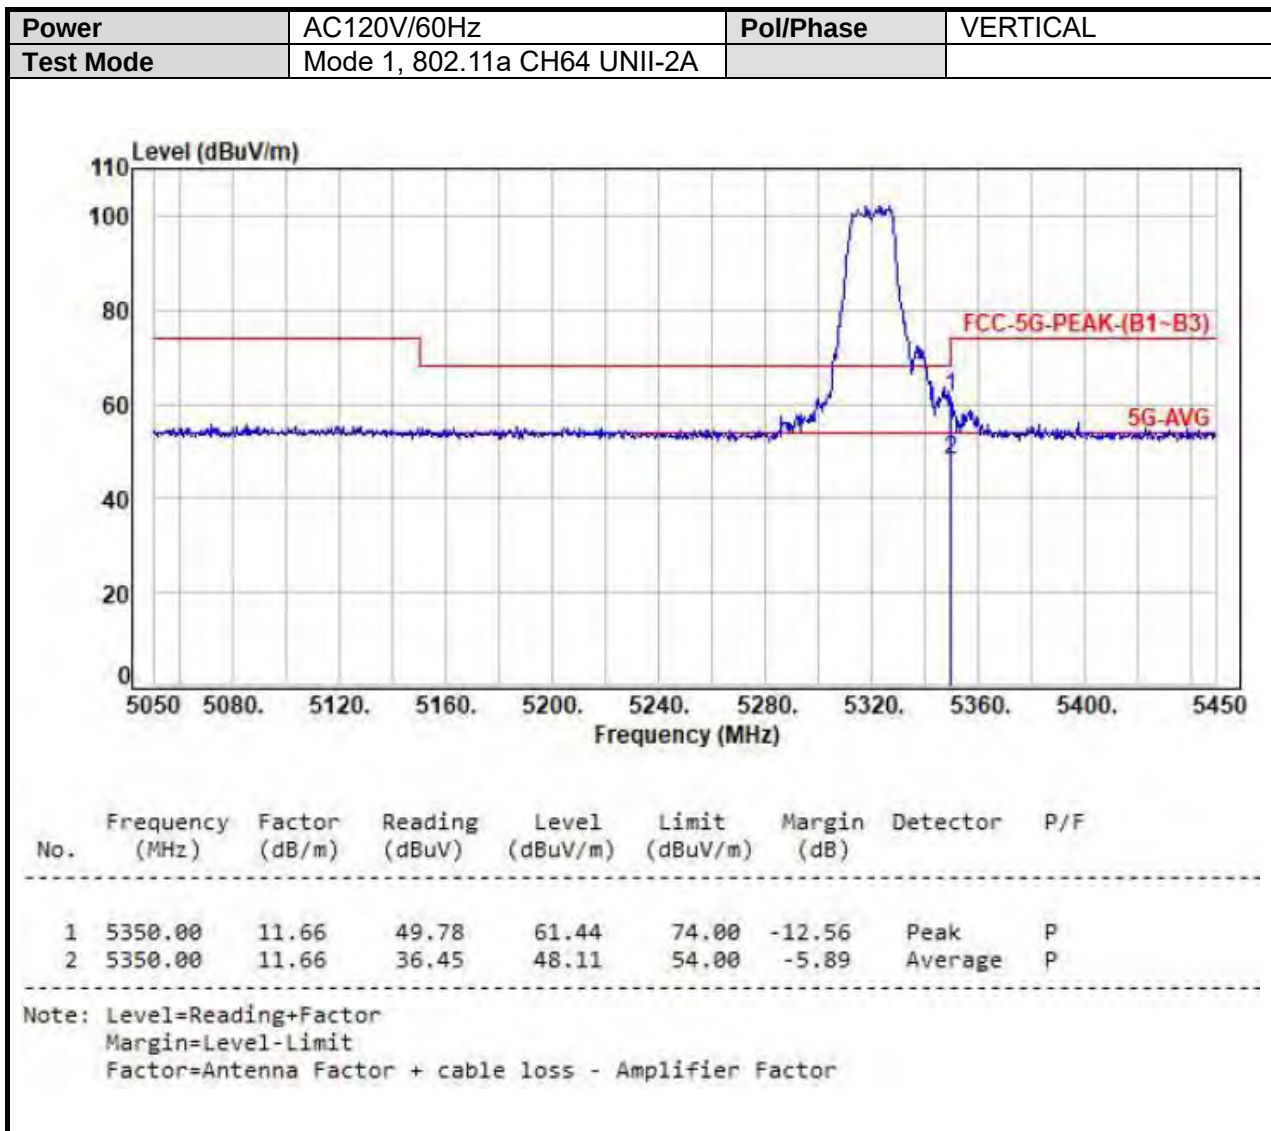


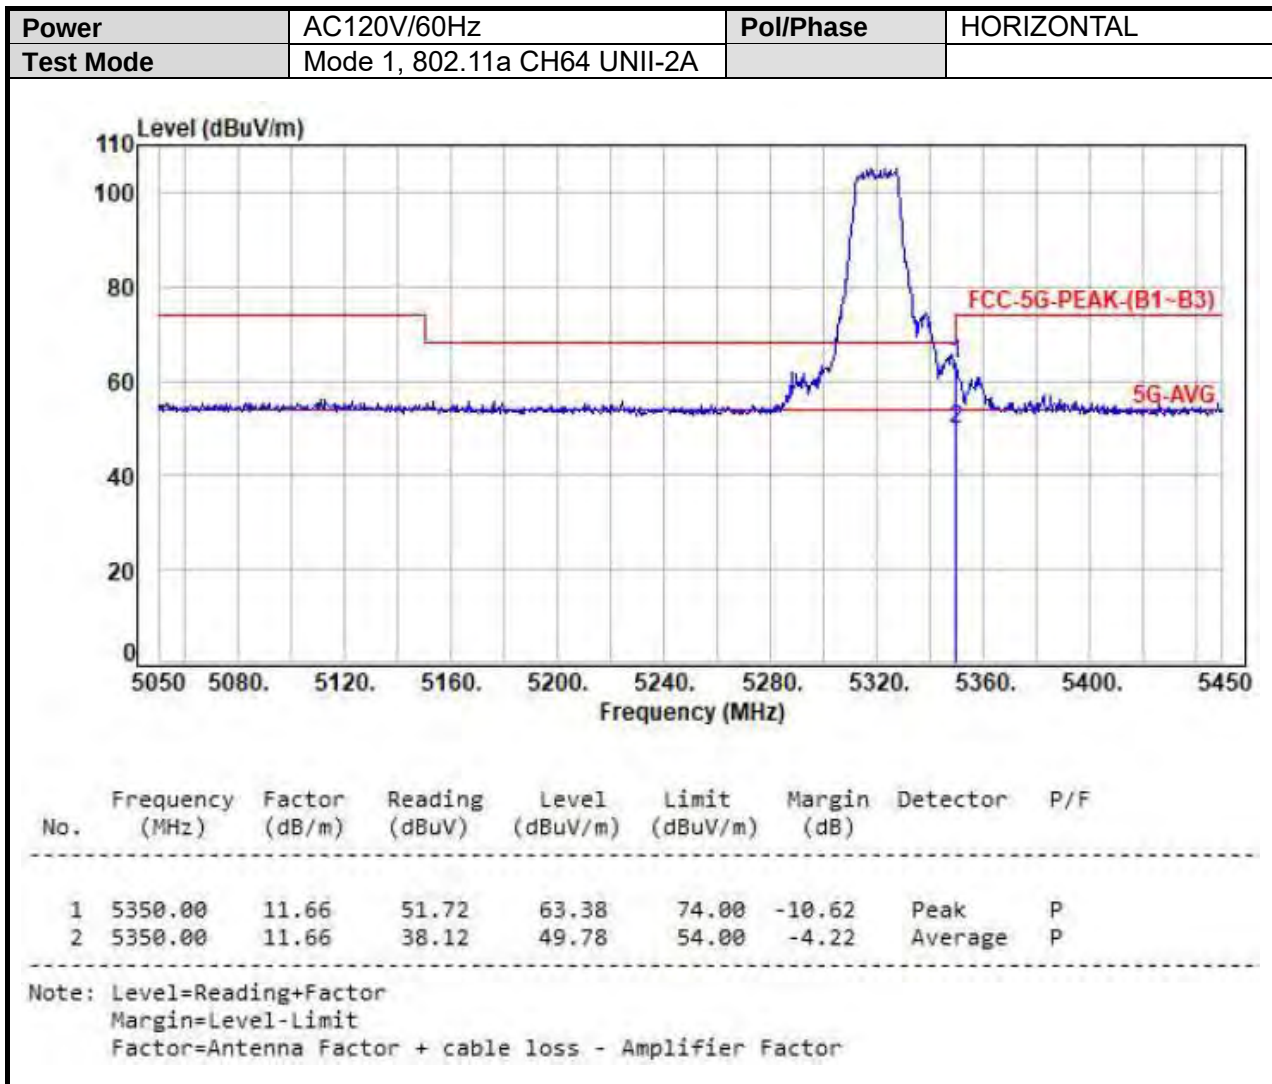


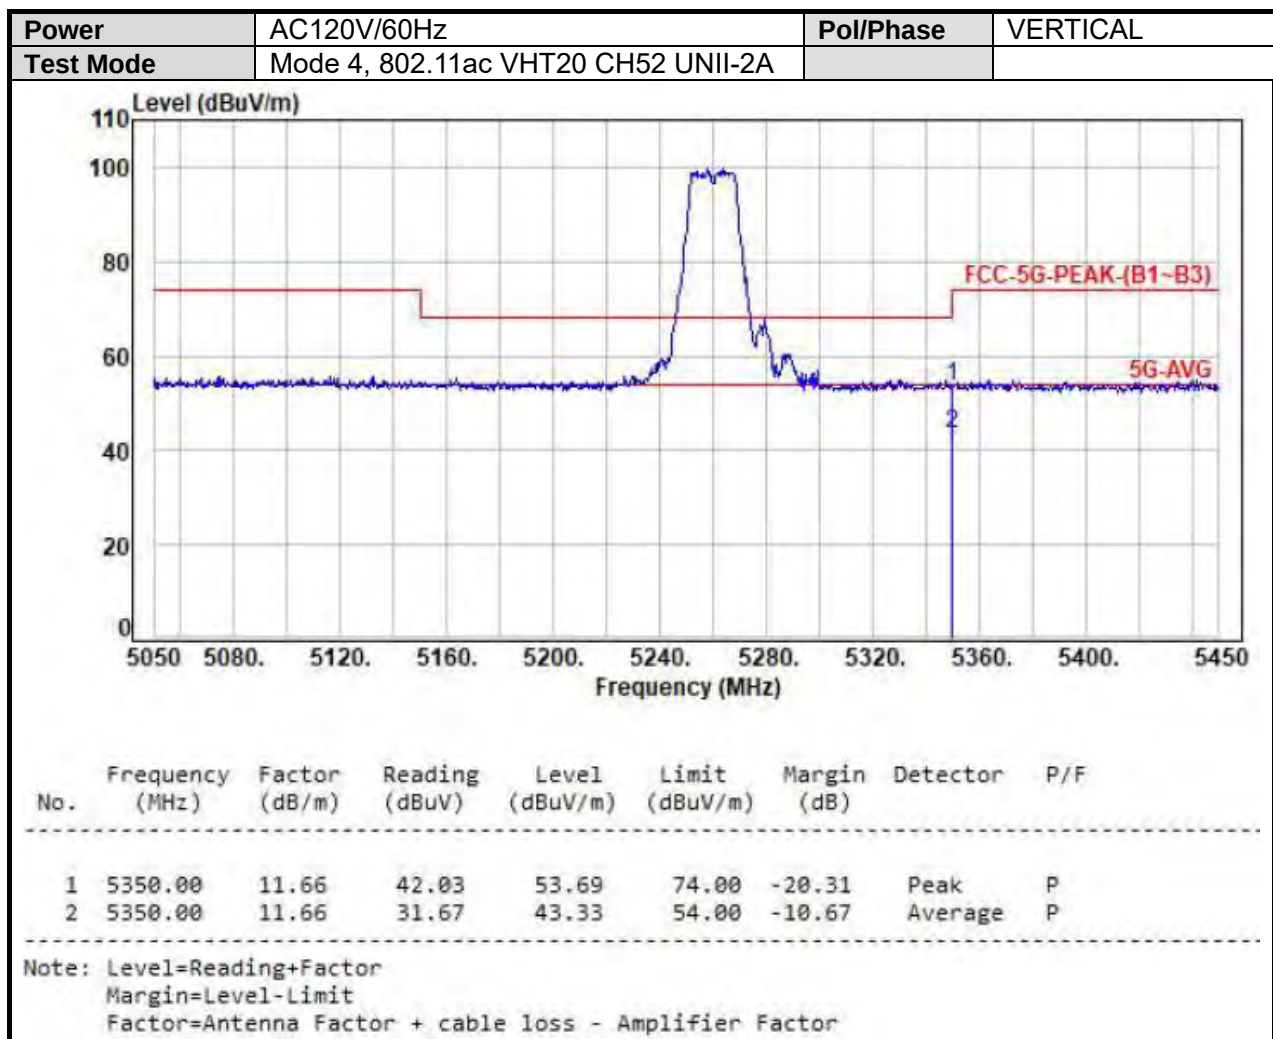


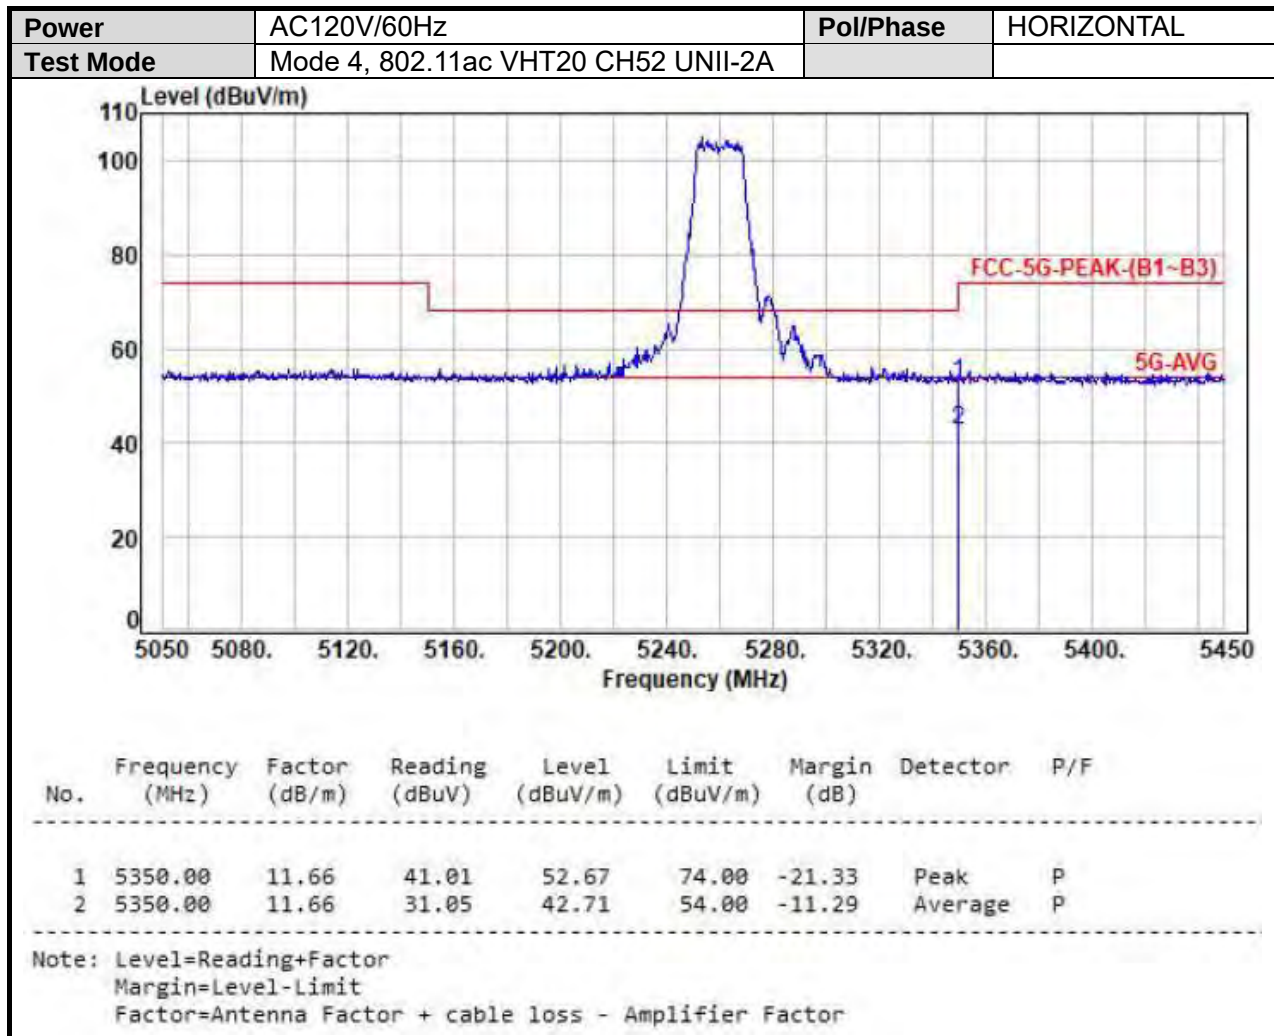


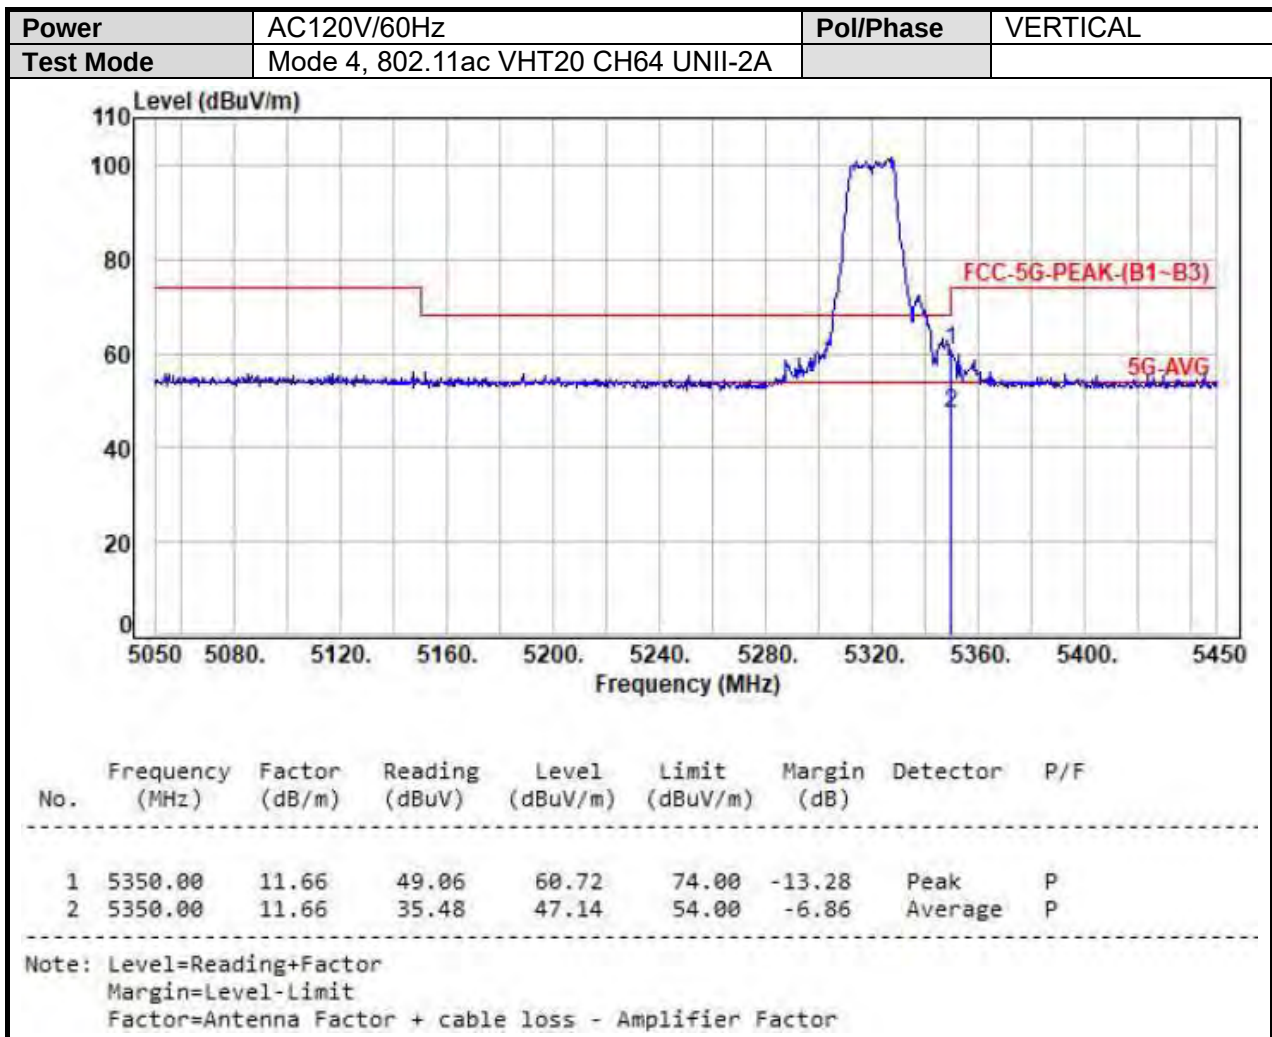


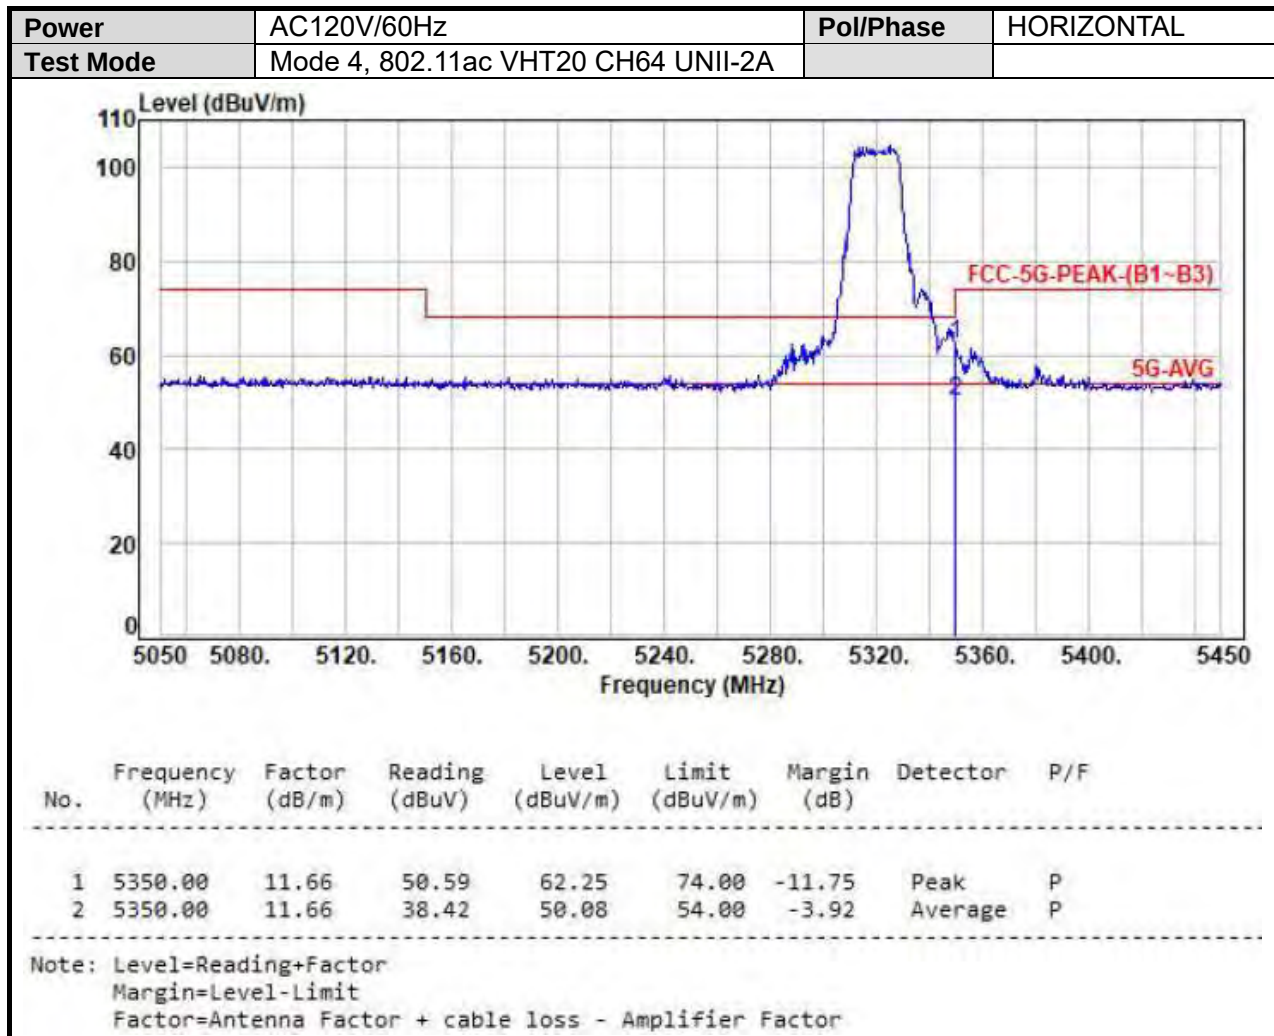


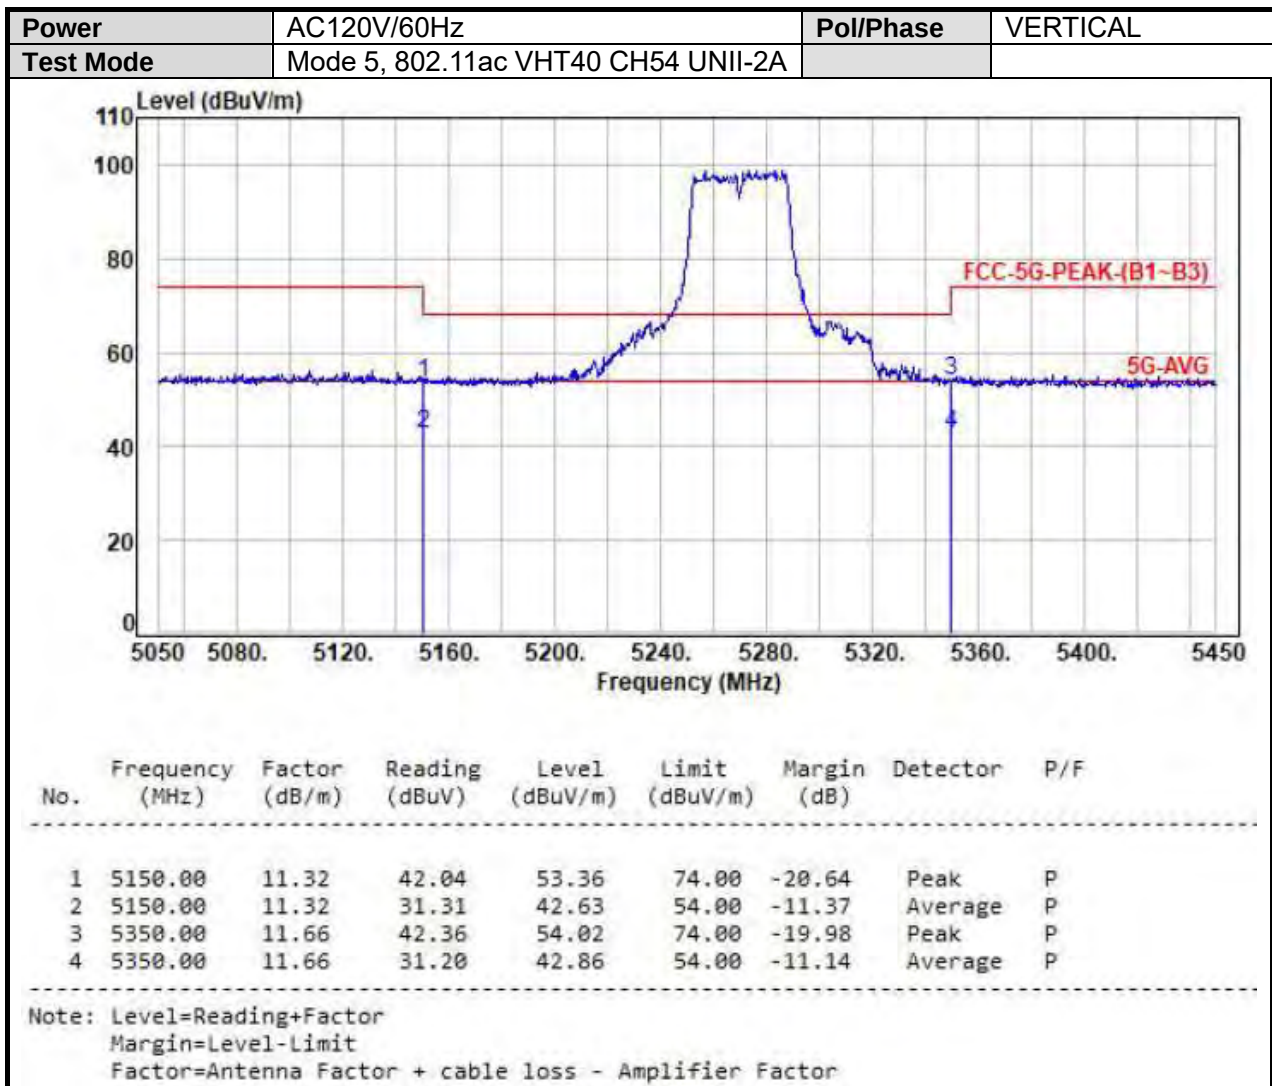


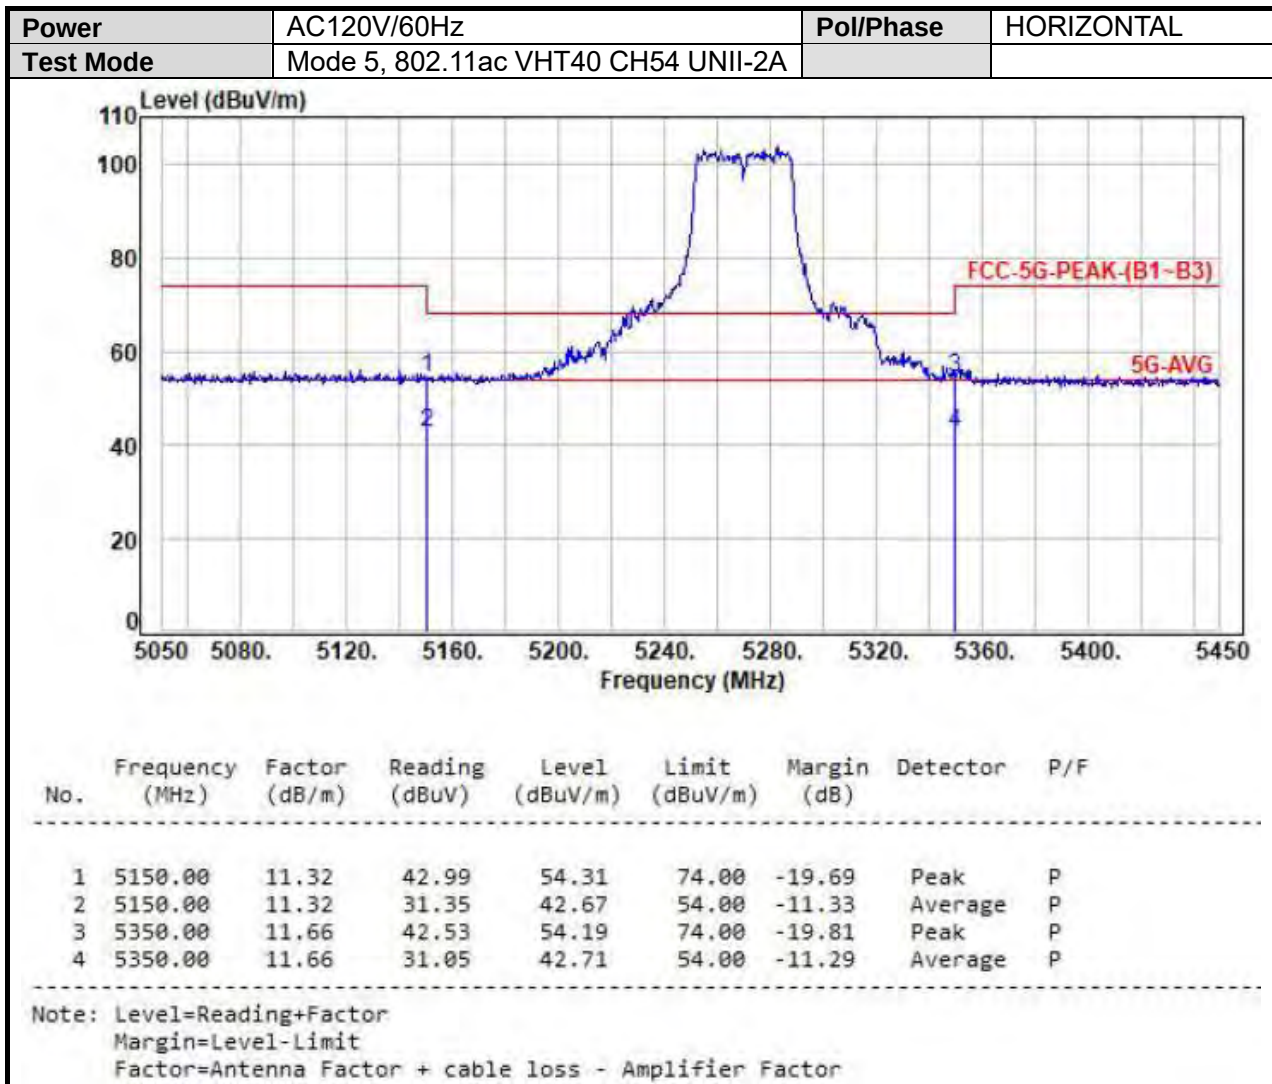


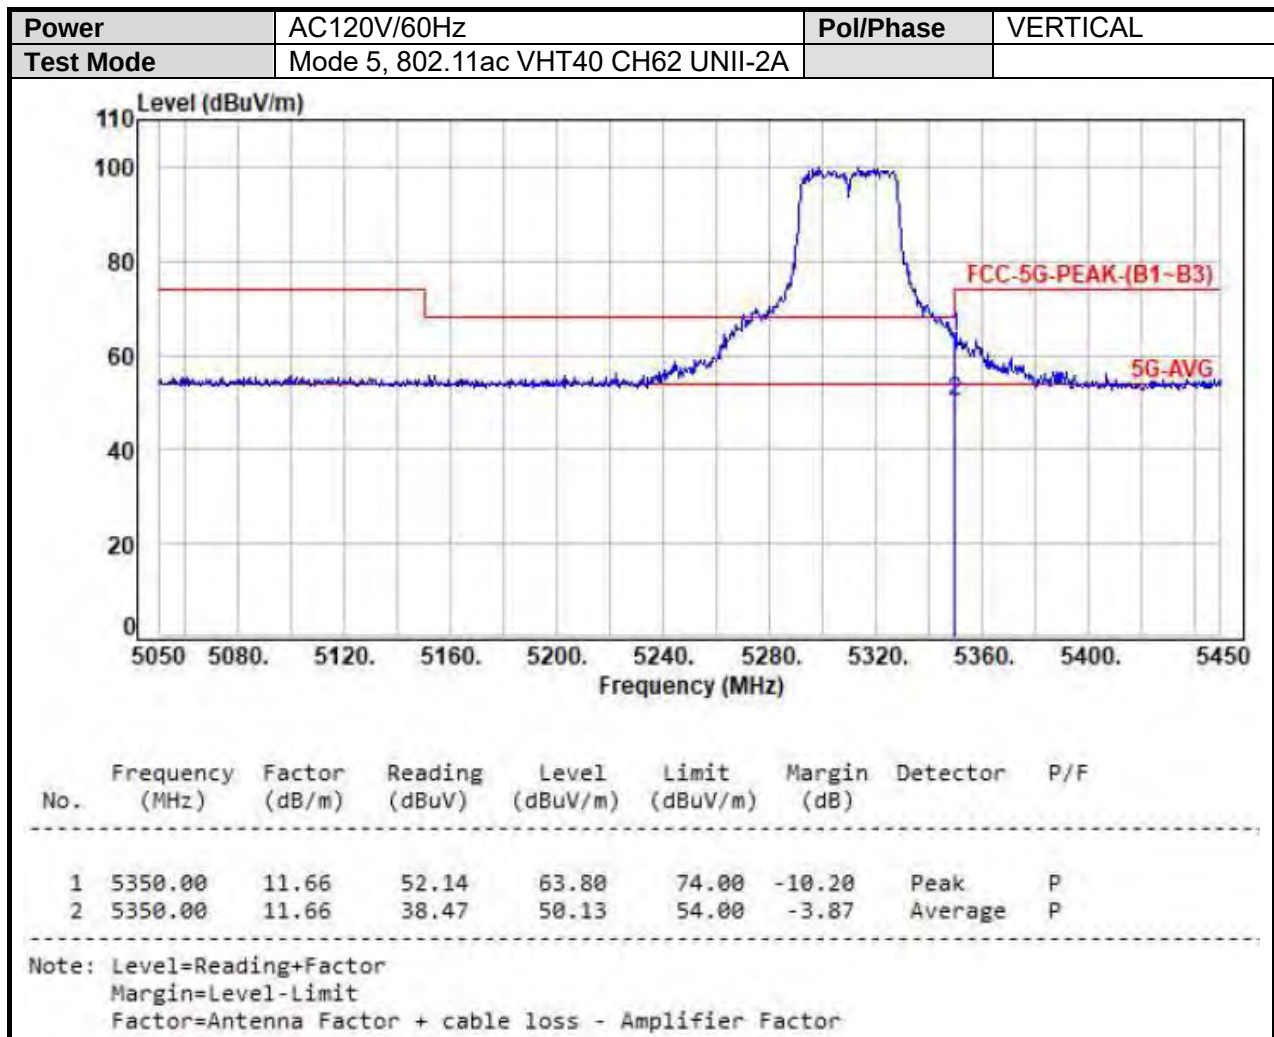


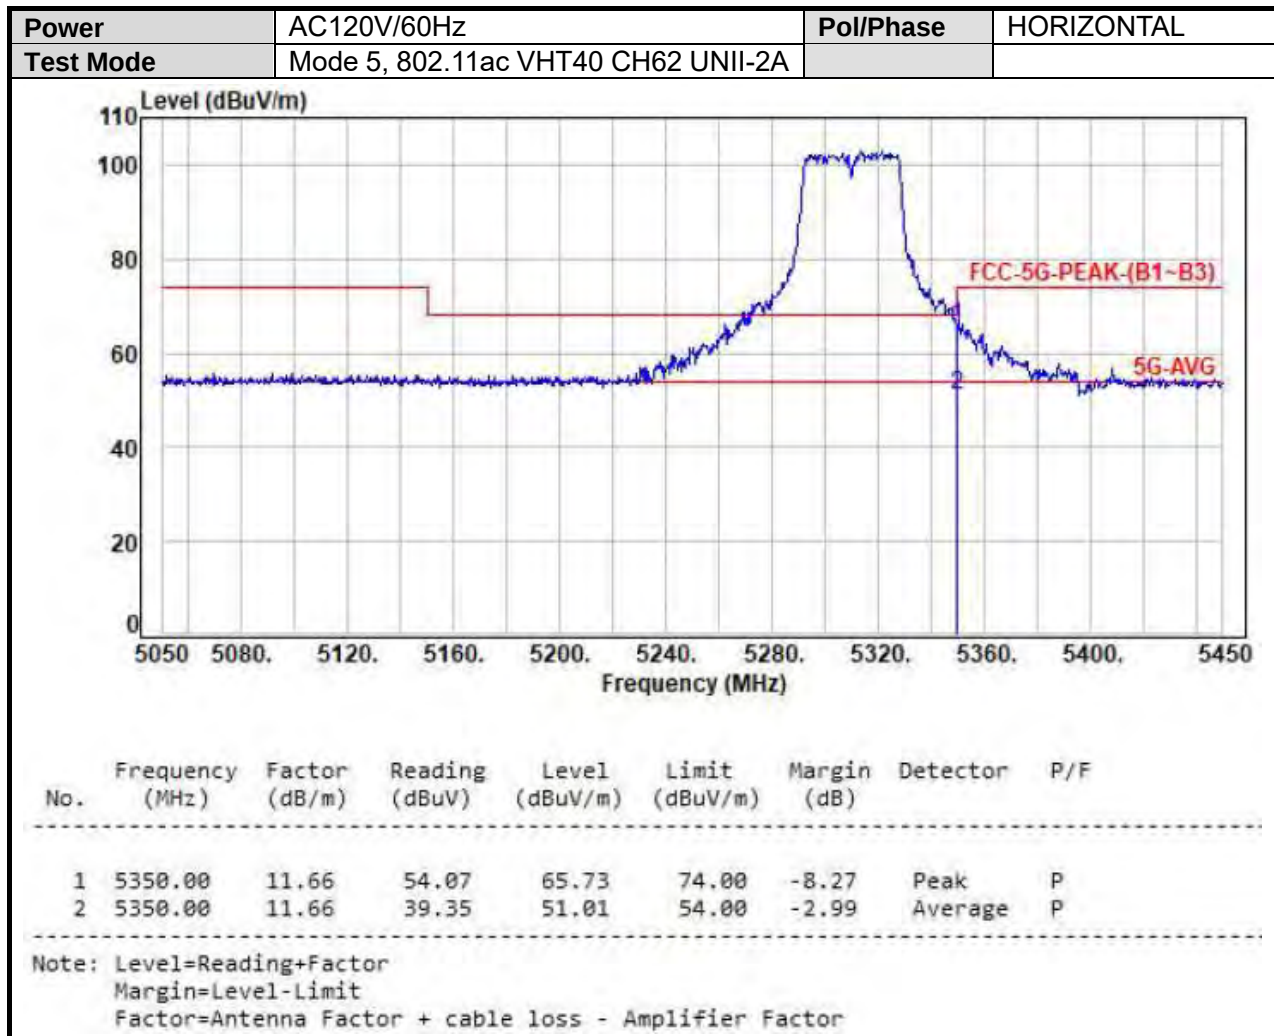


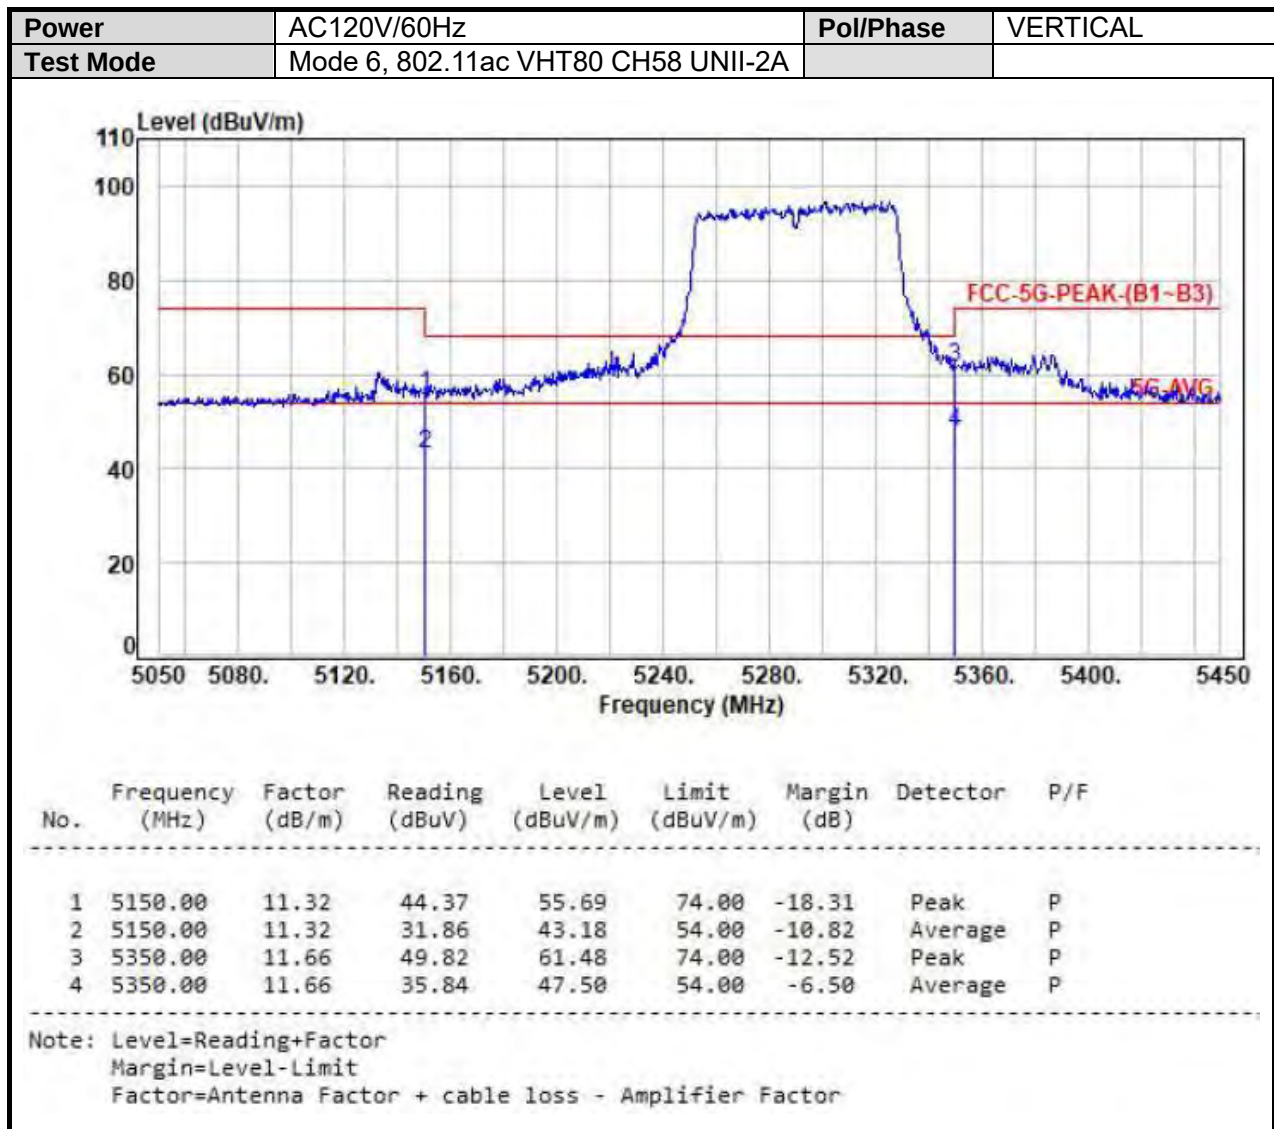


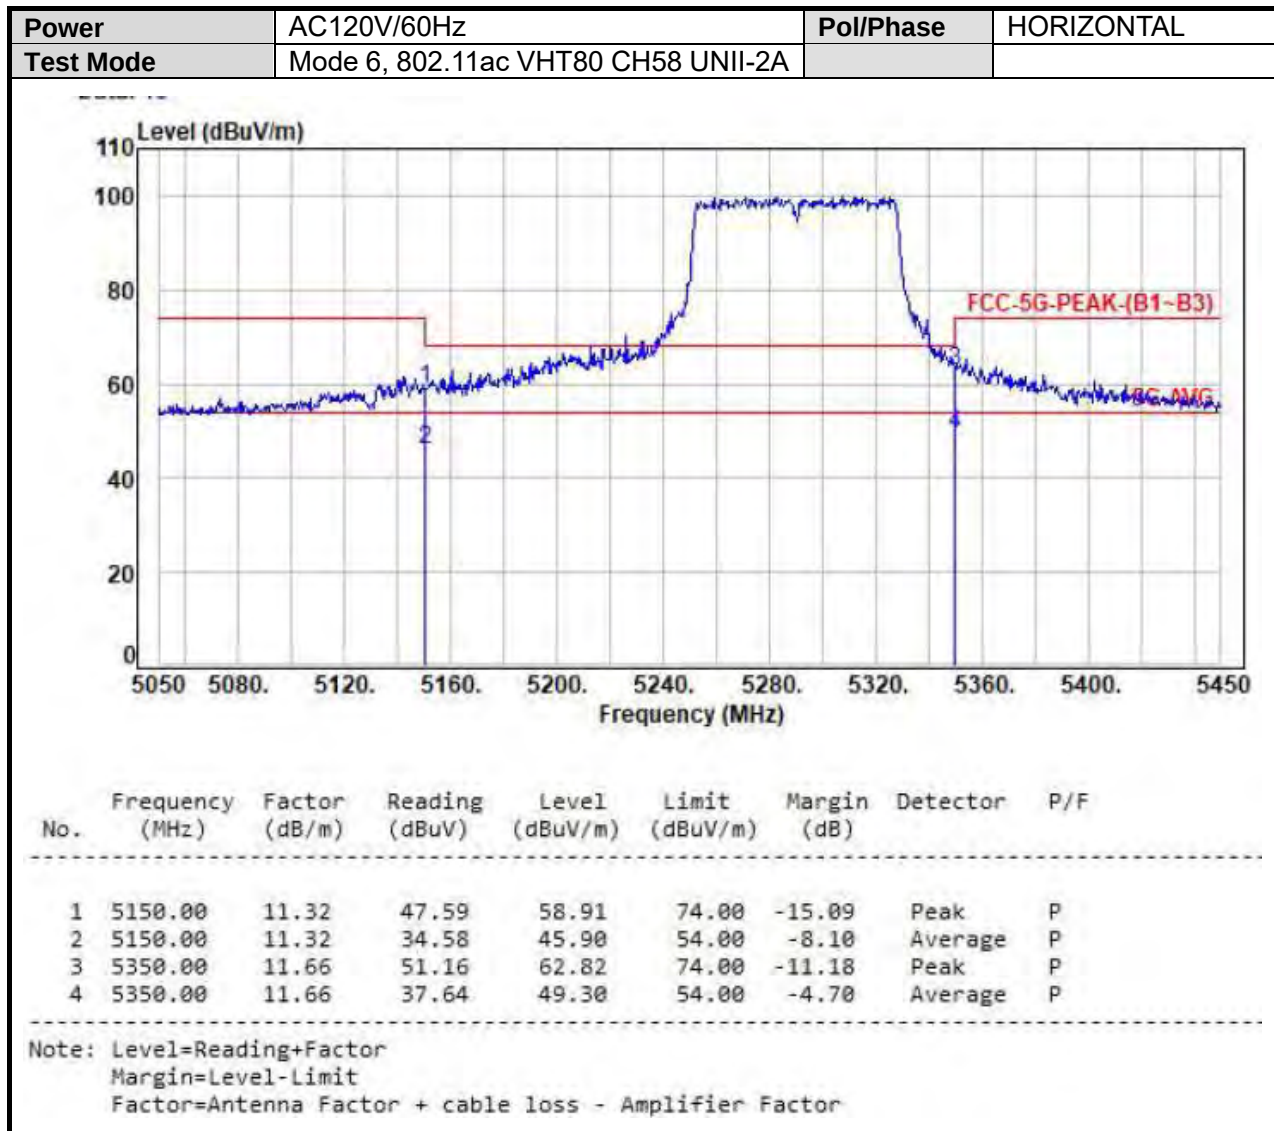


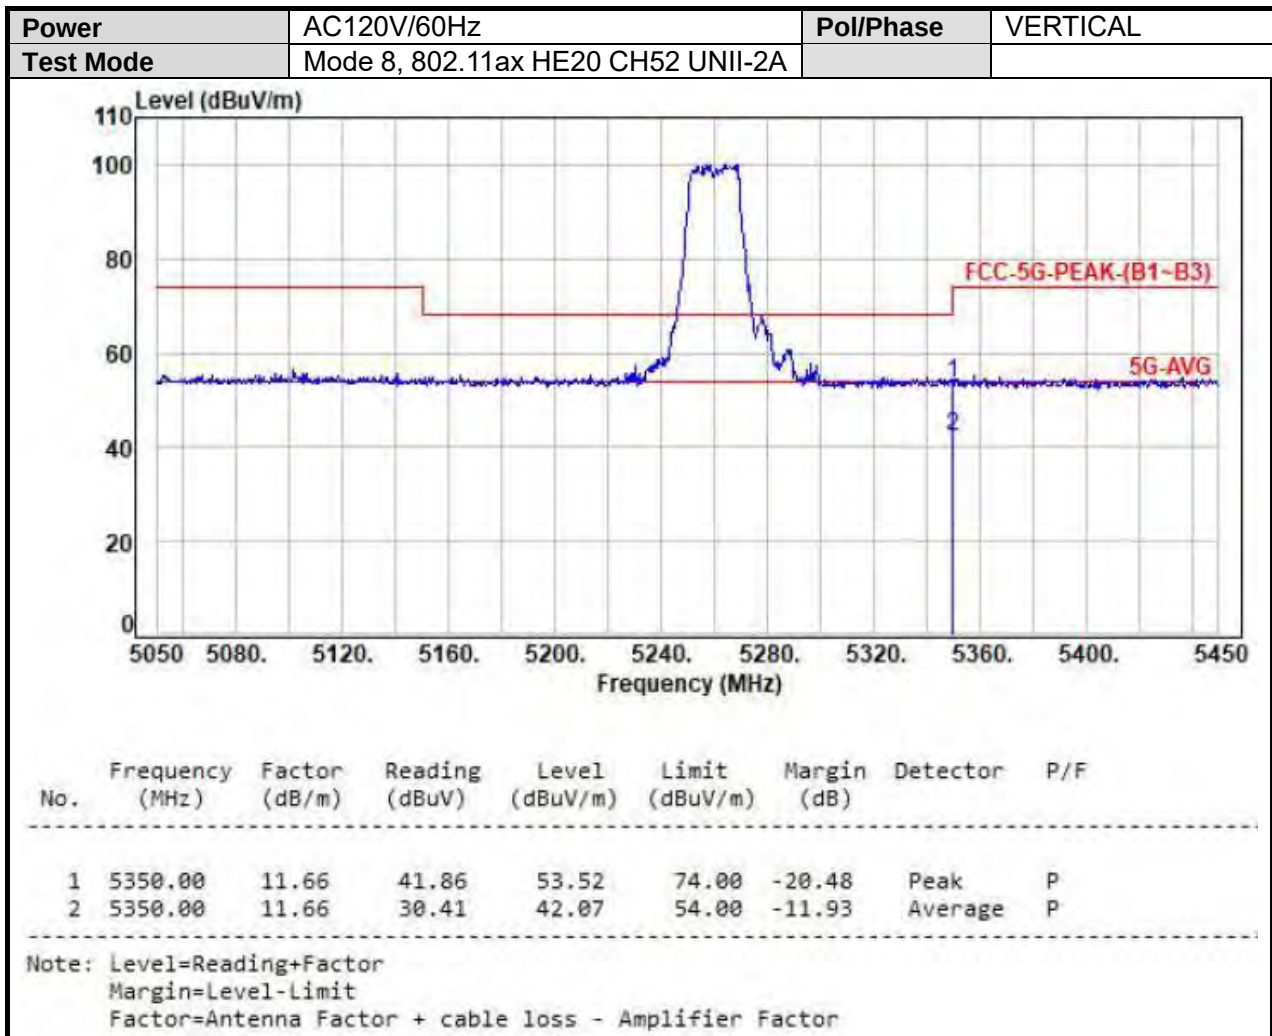


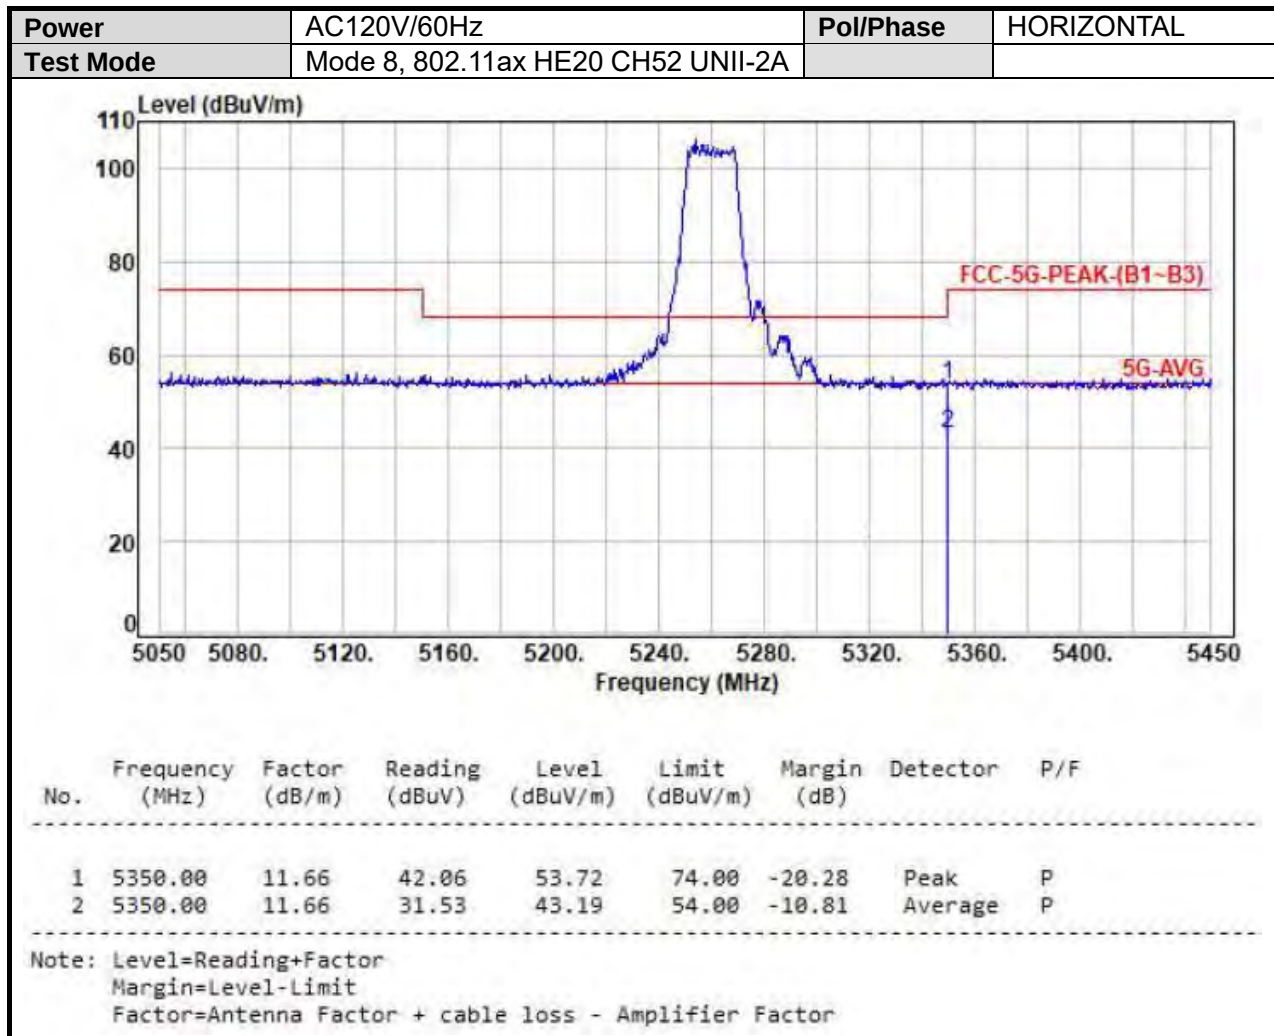


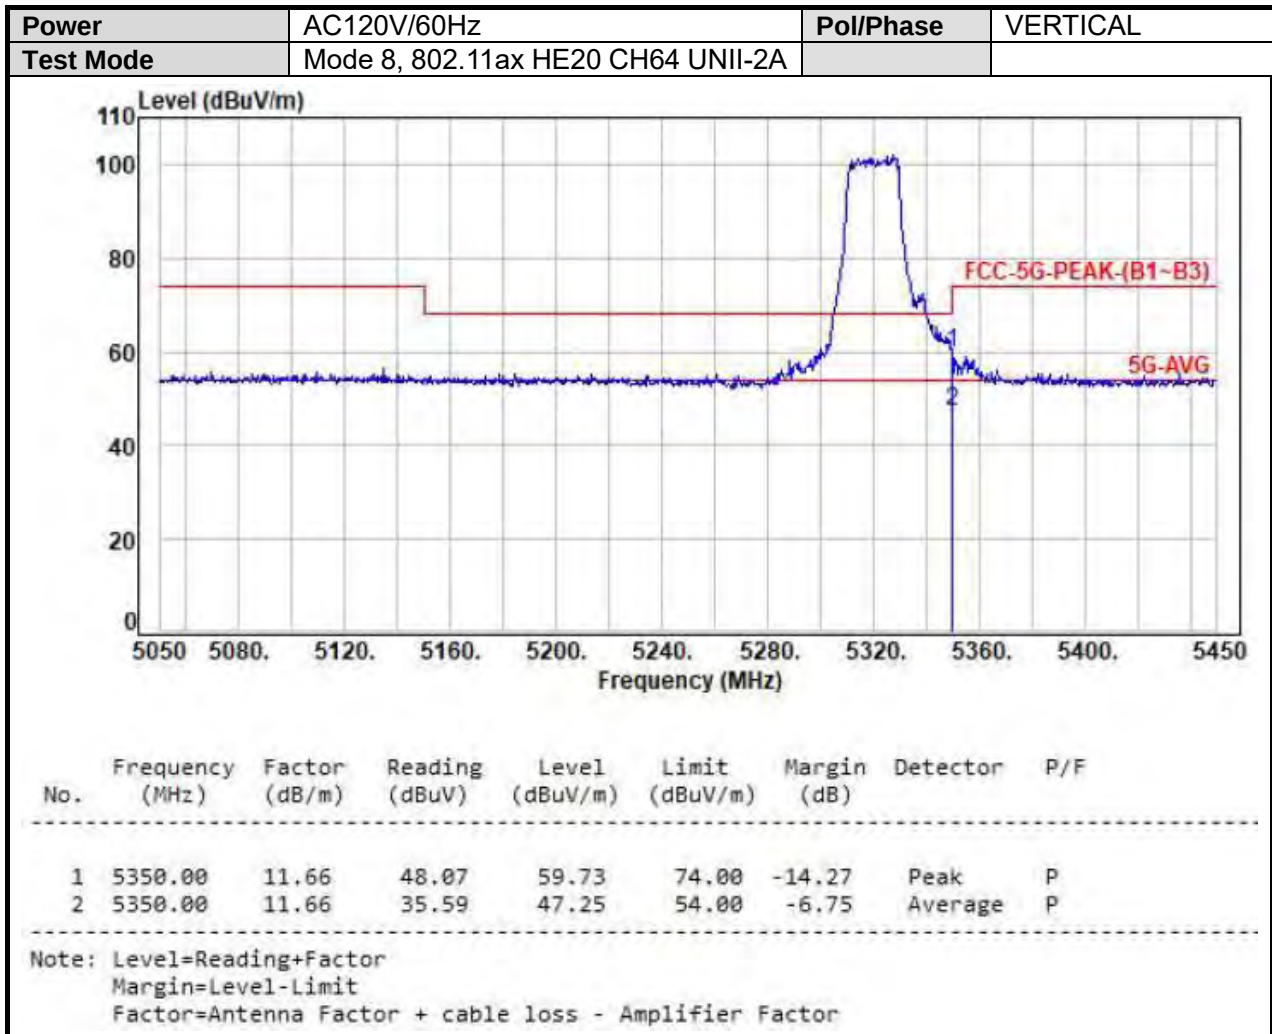


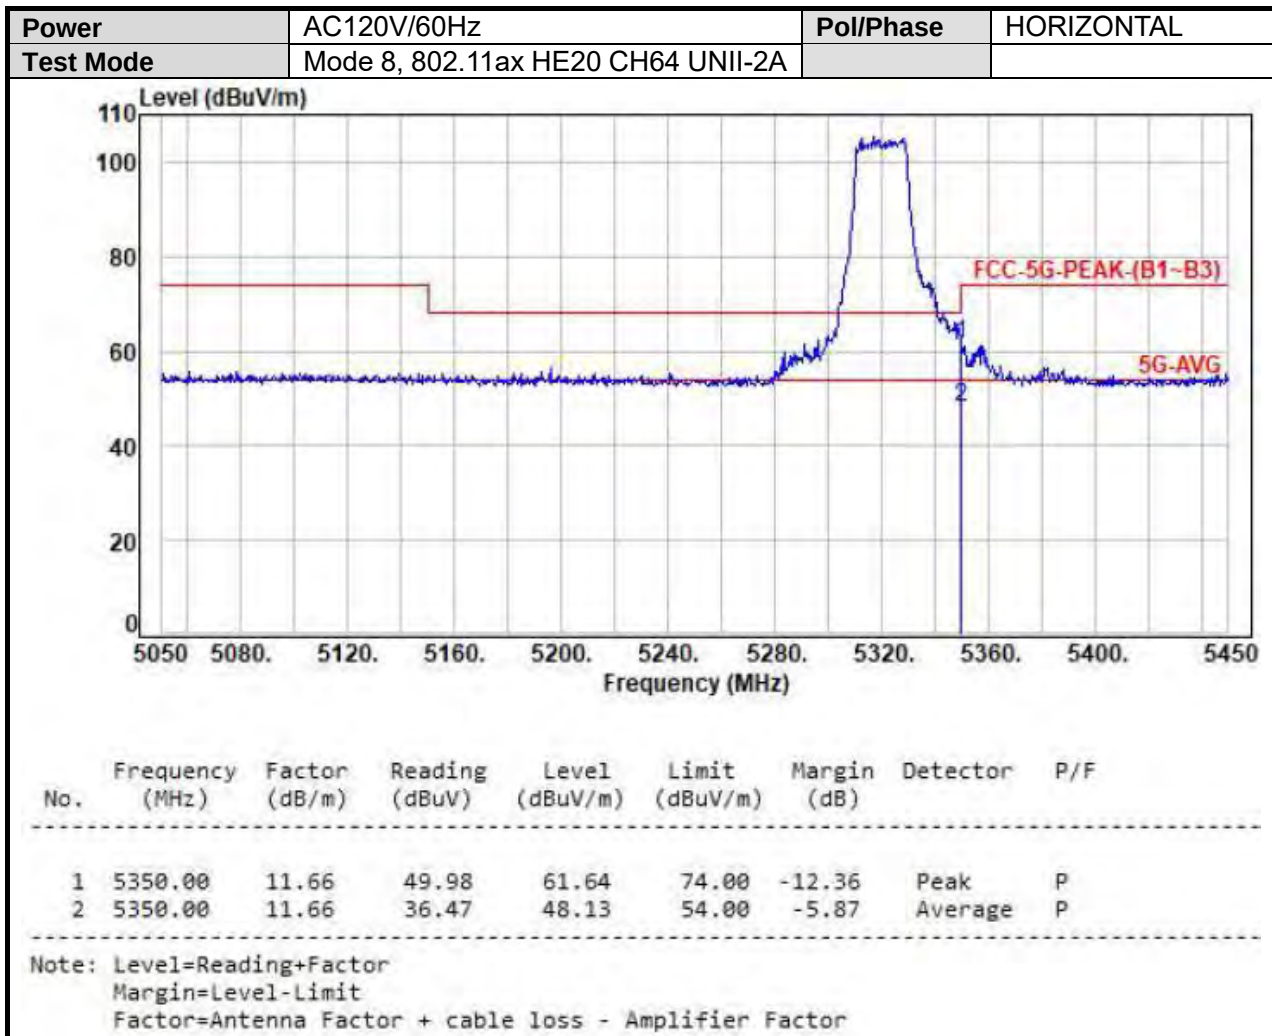


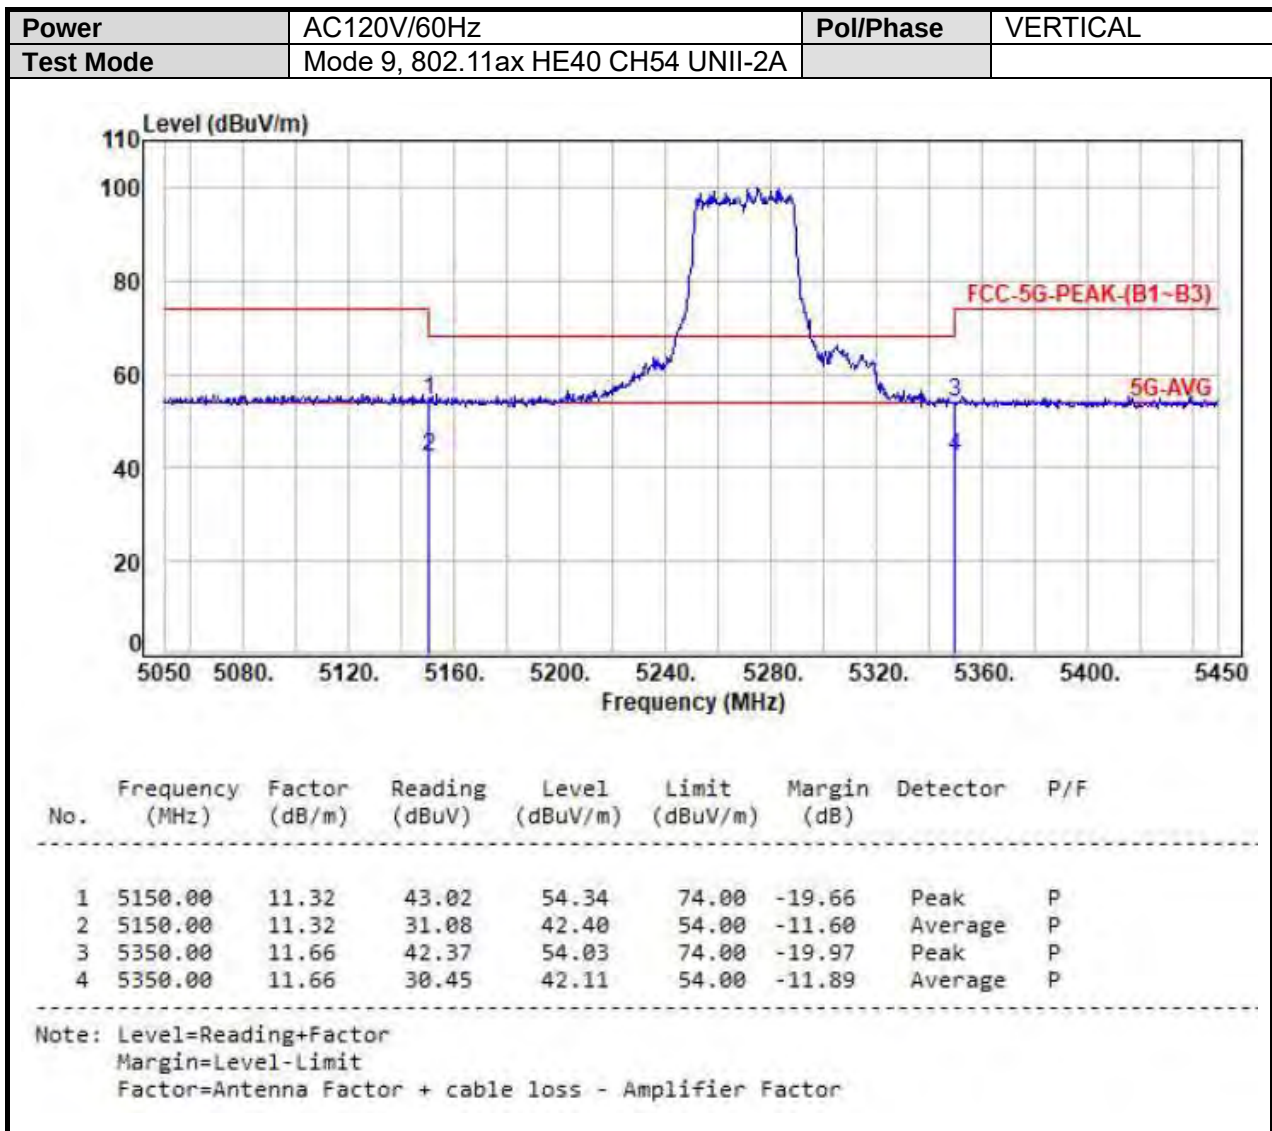


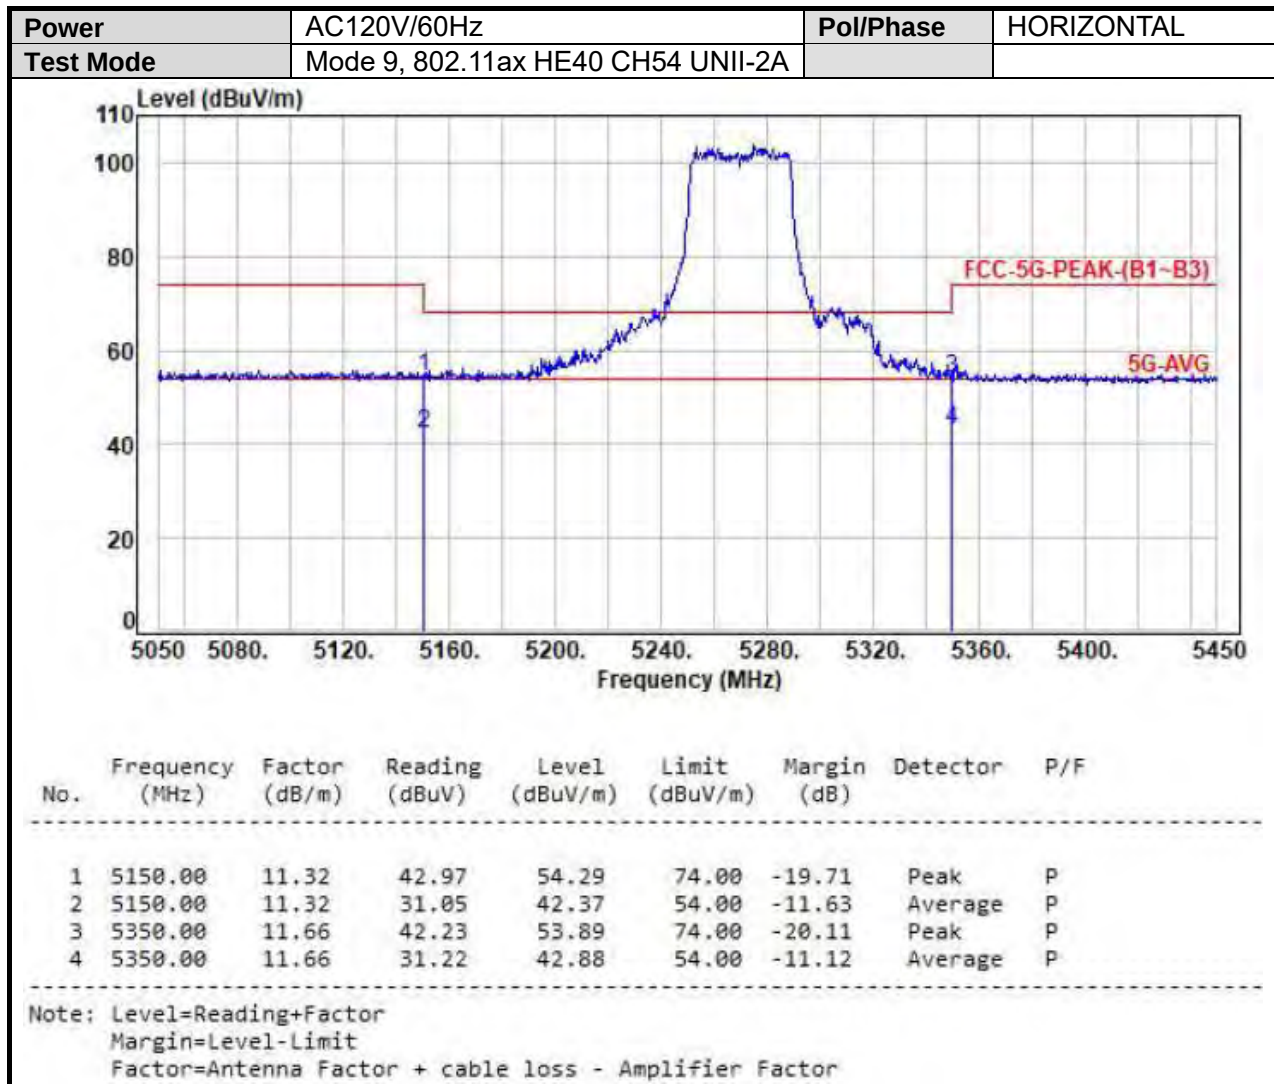

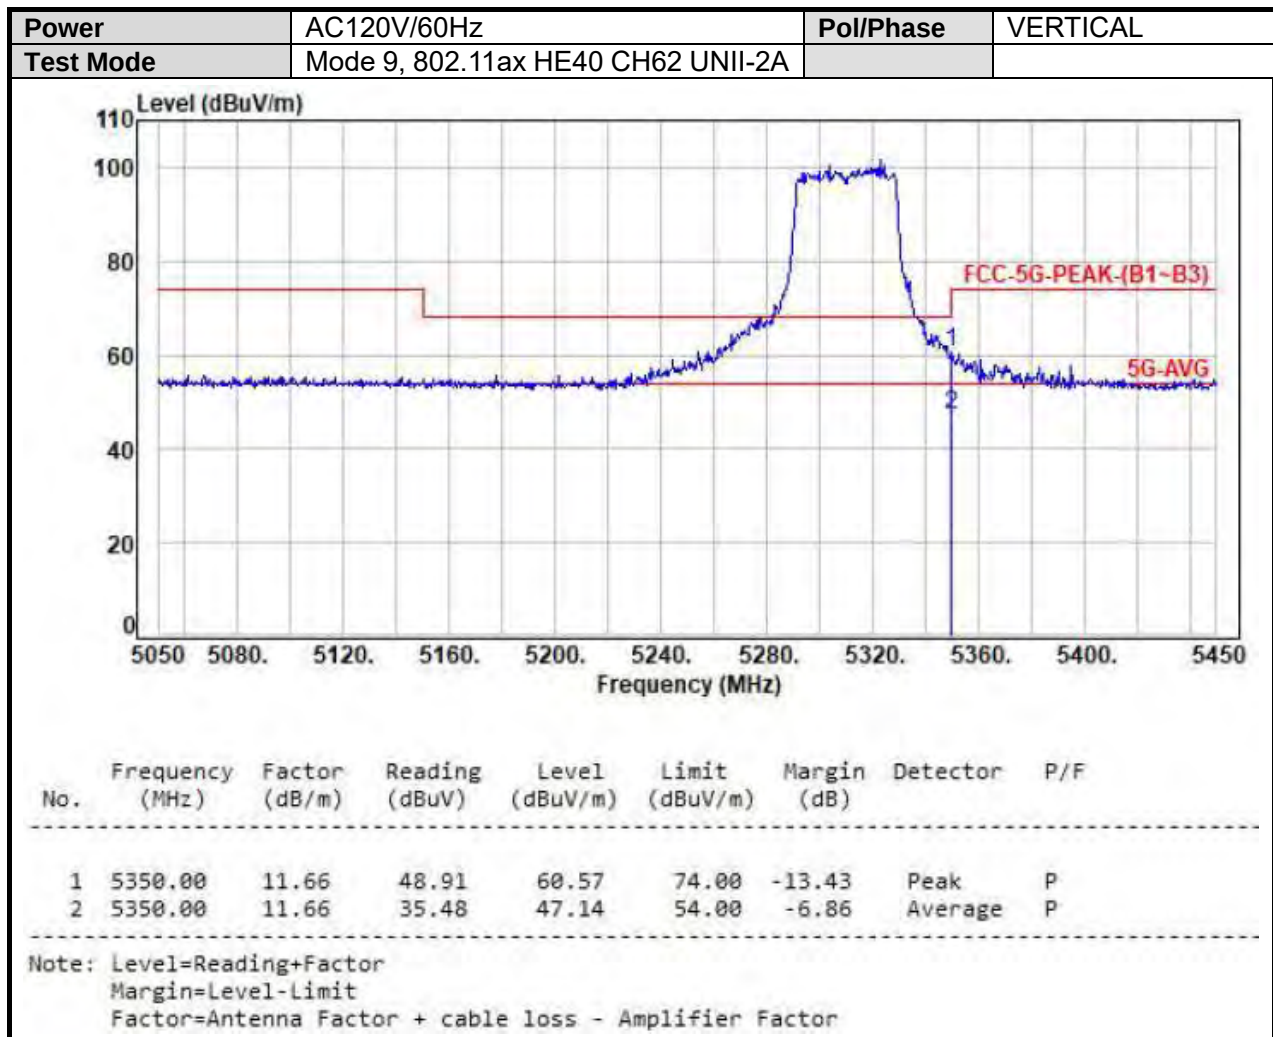

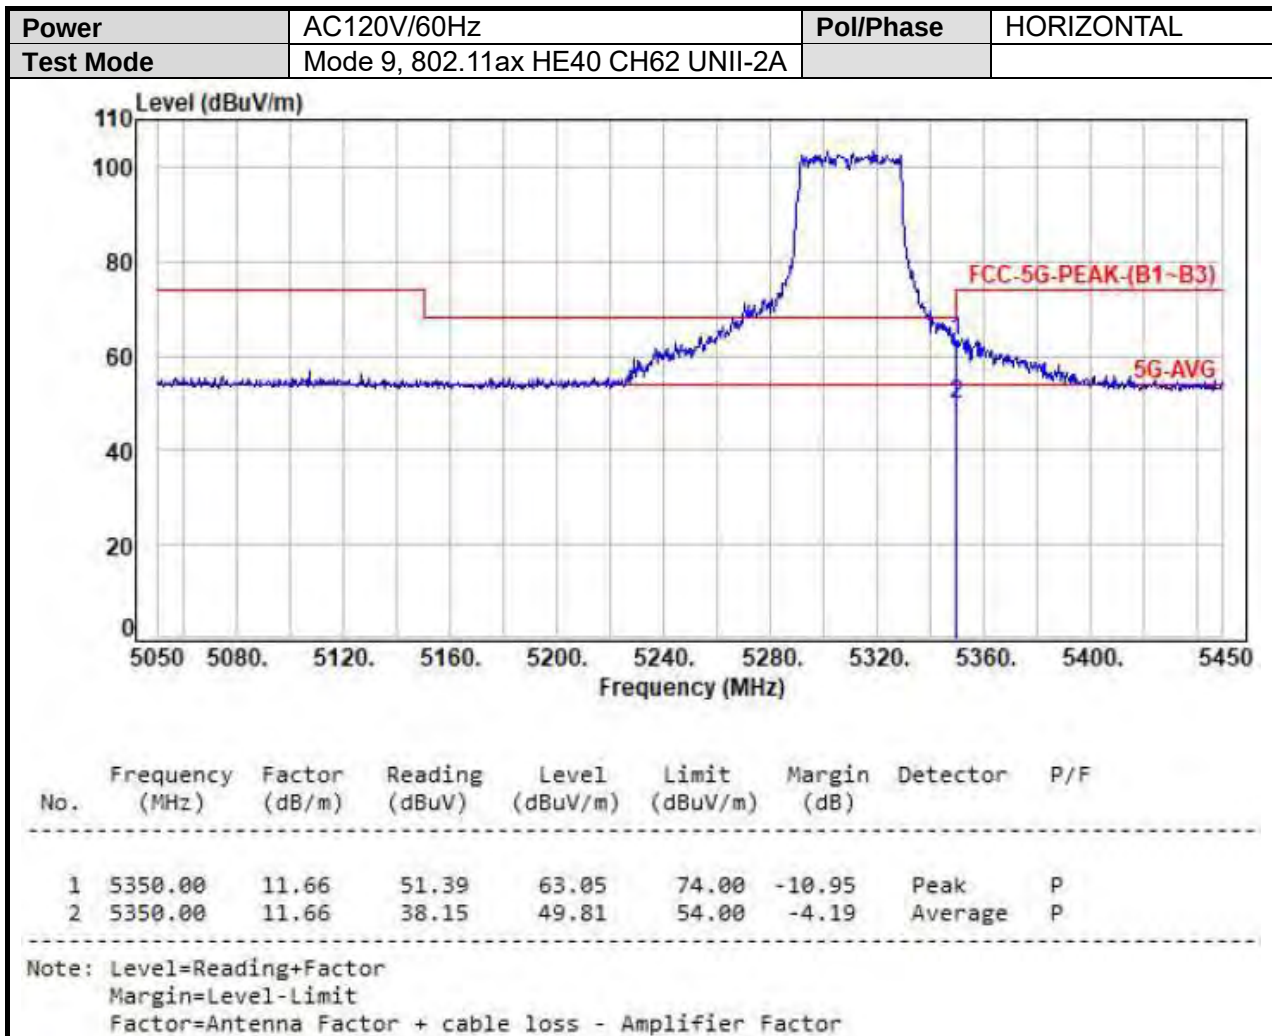


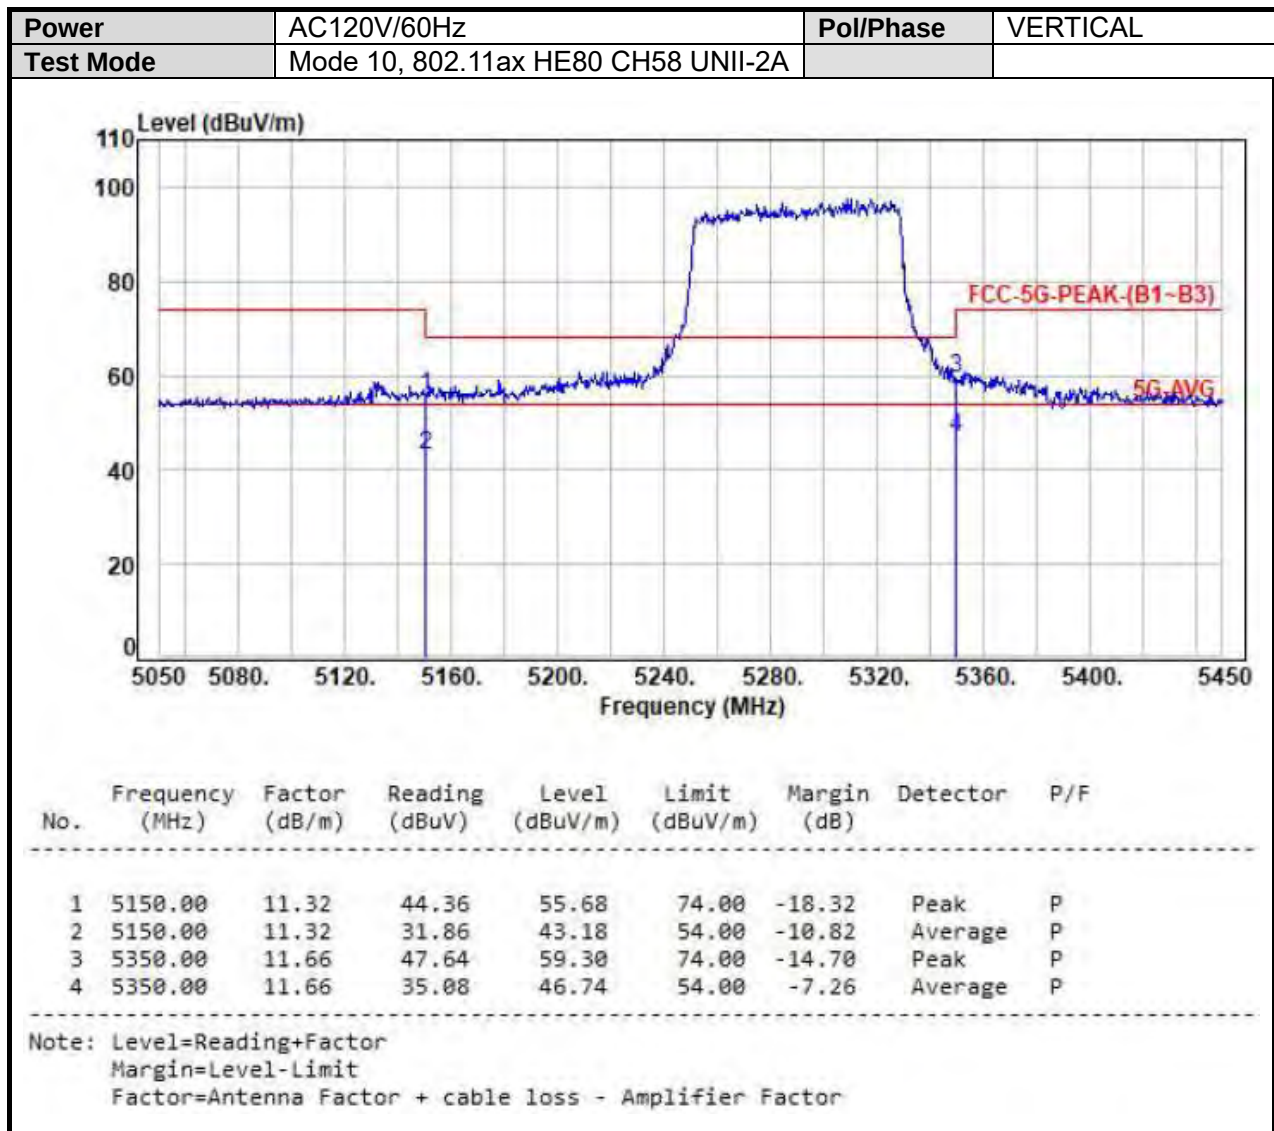


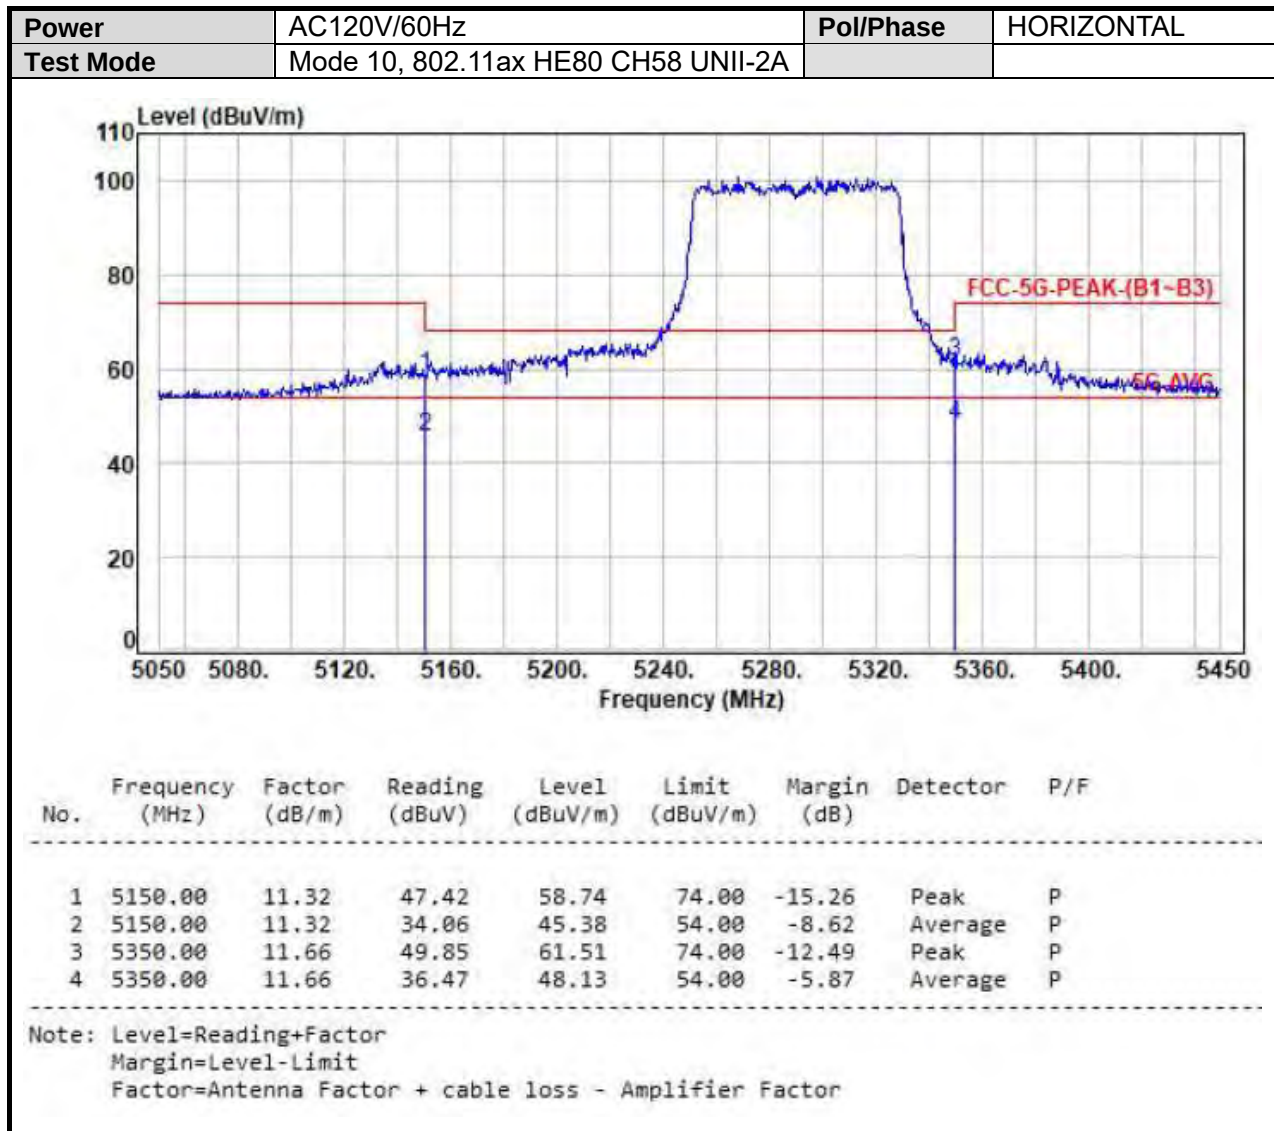






UNII-2C

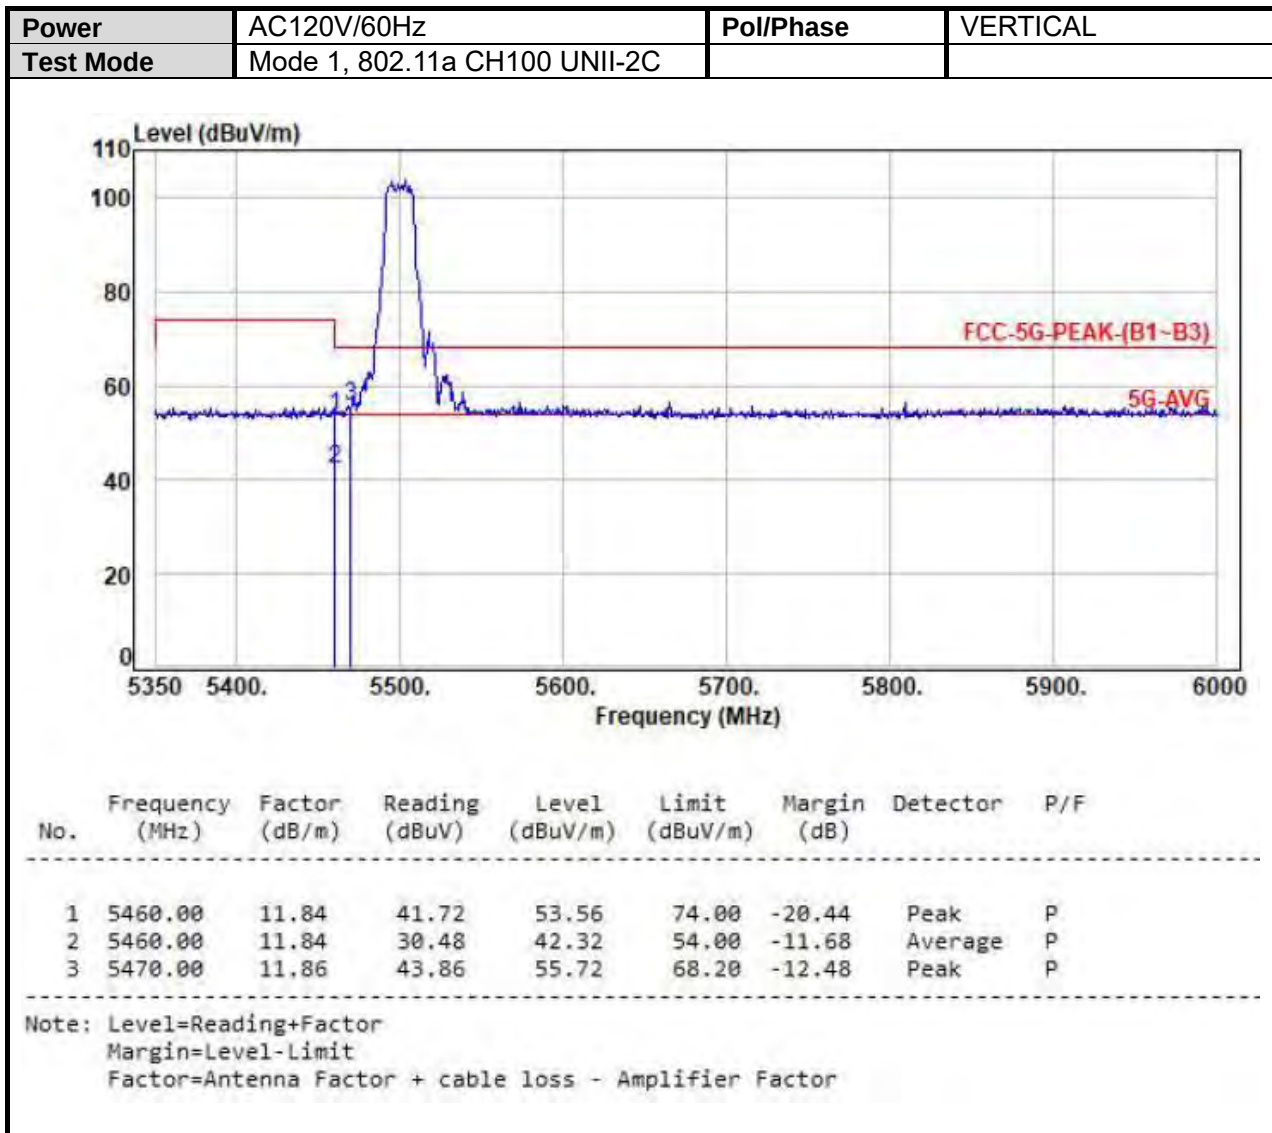


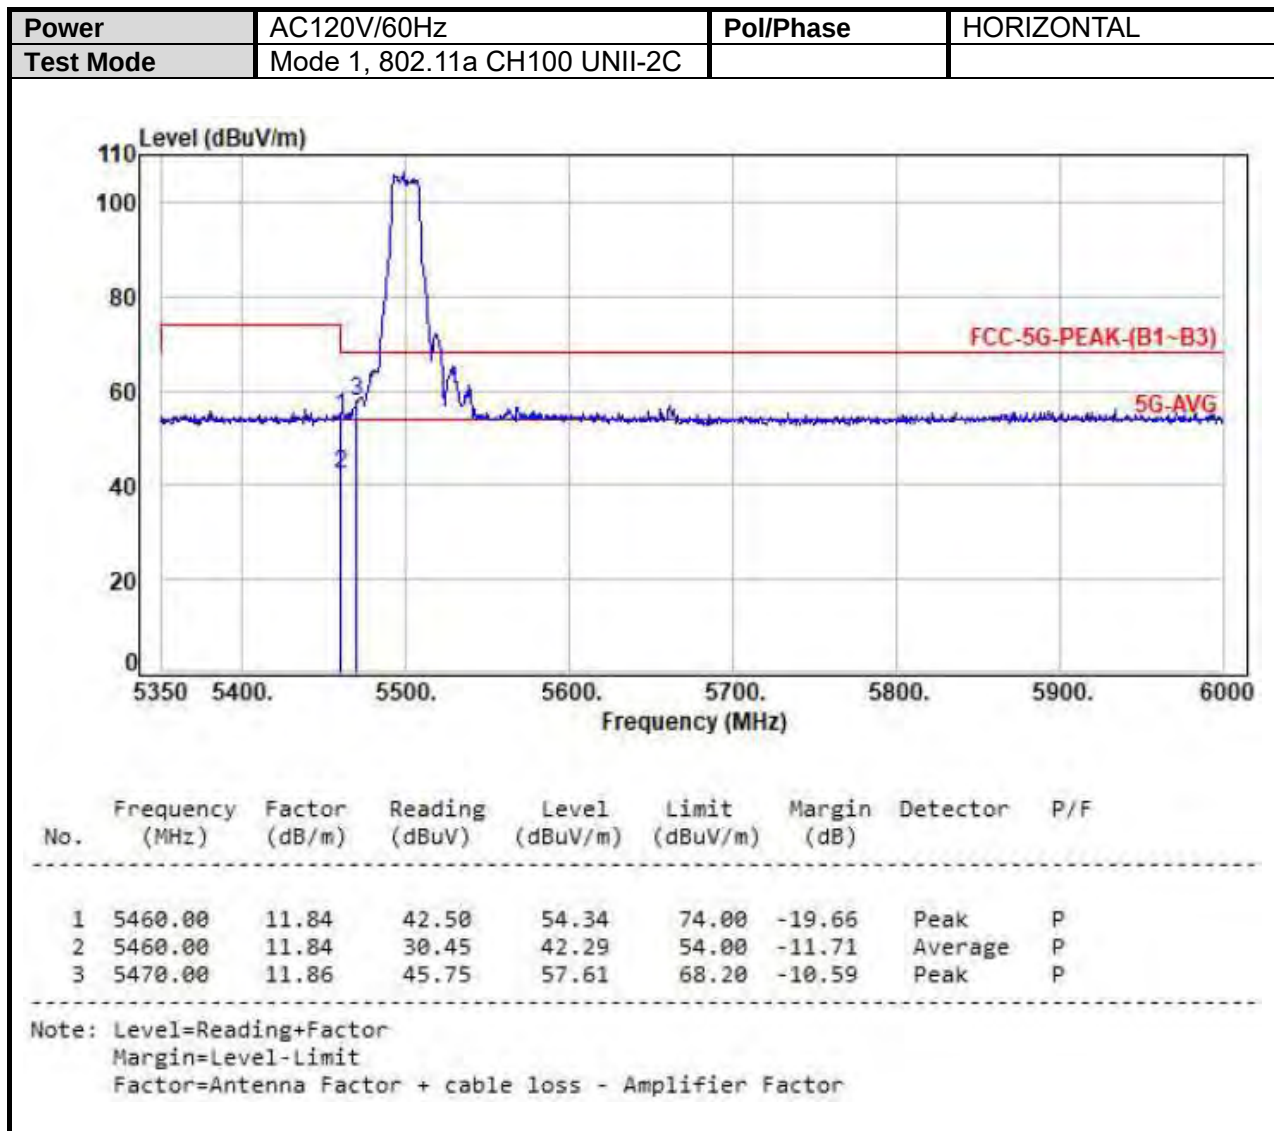


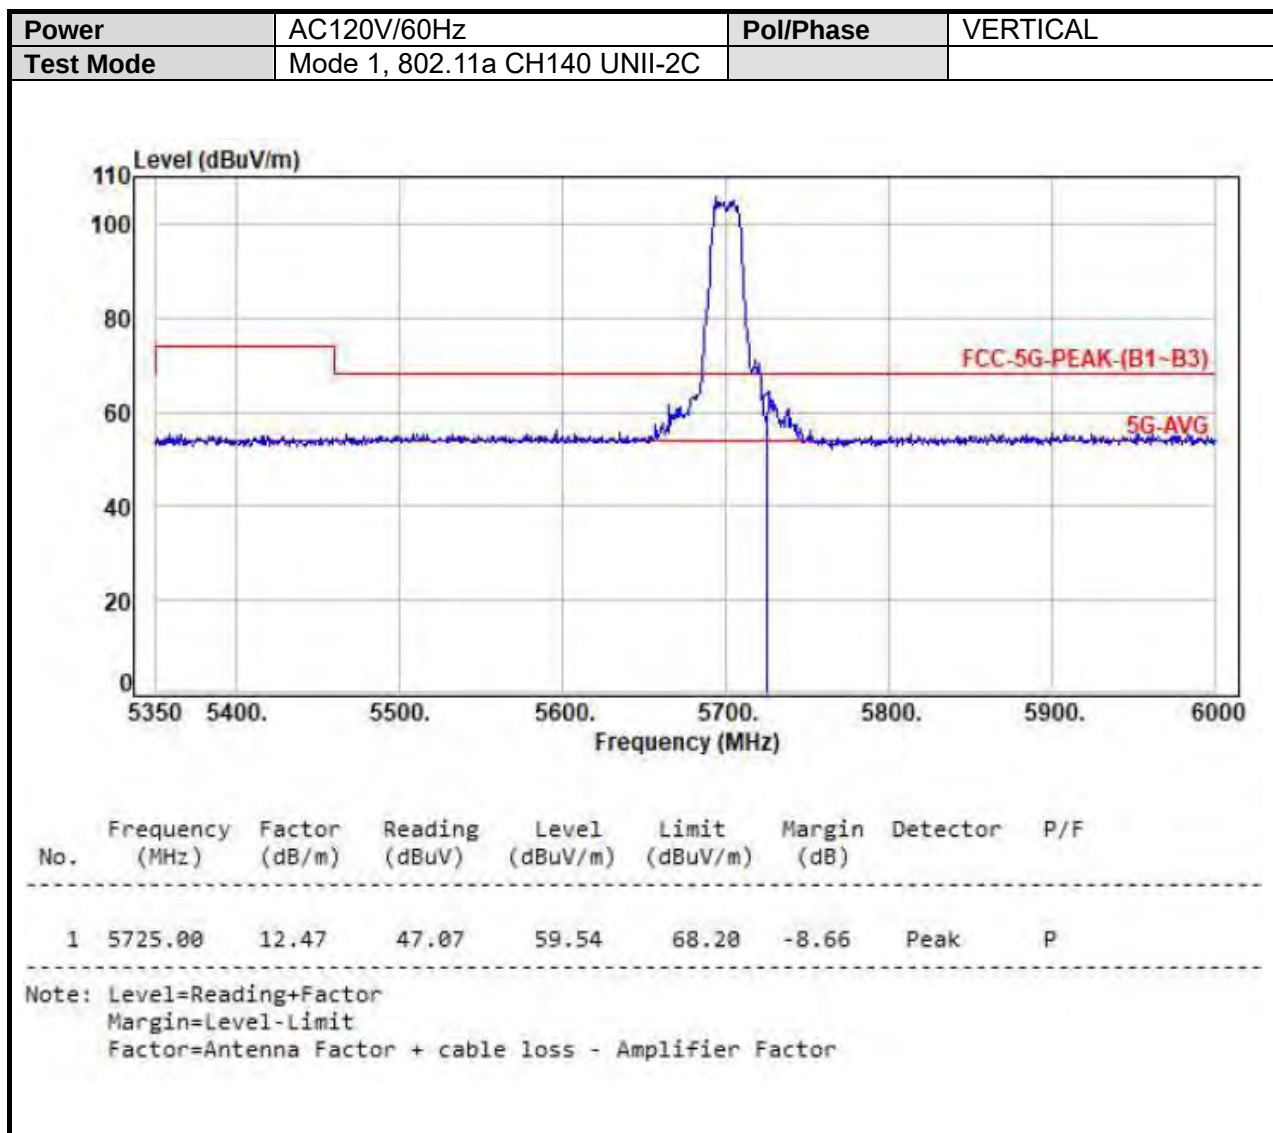


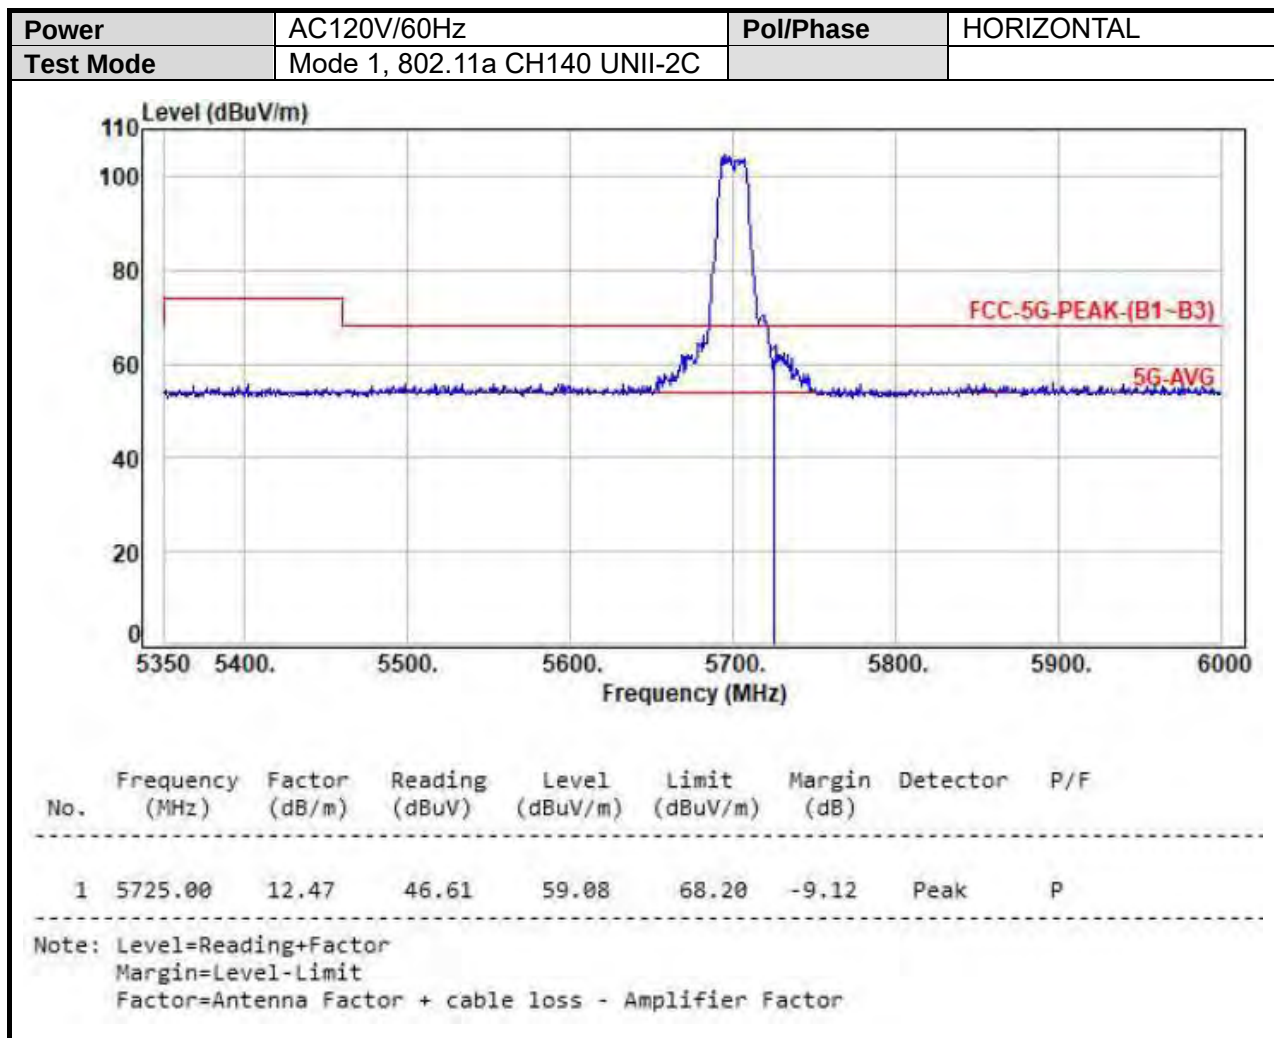


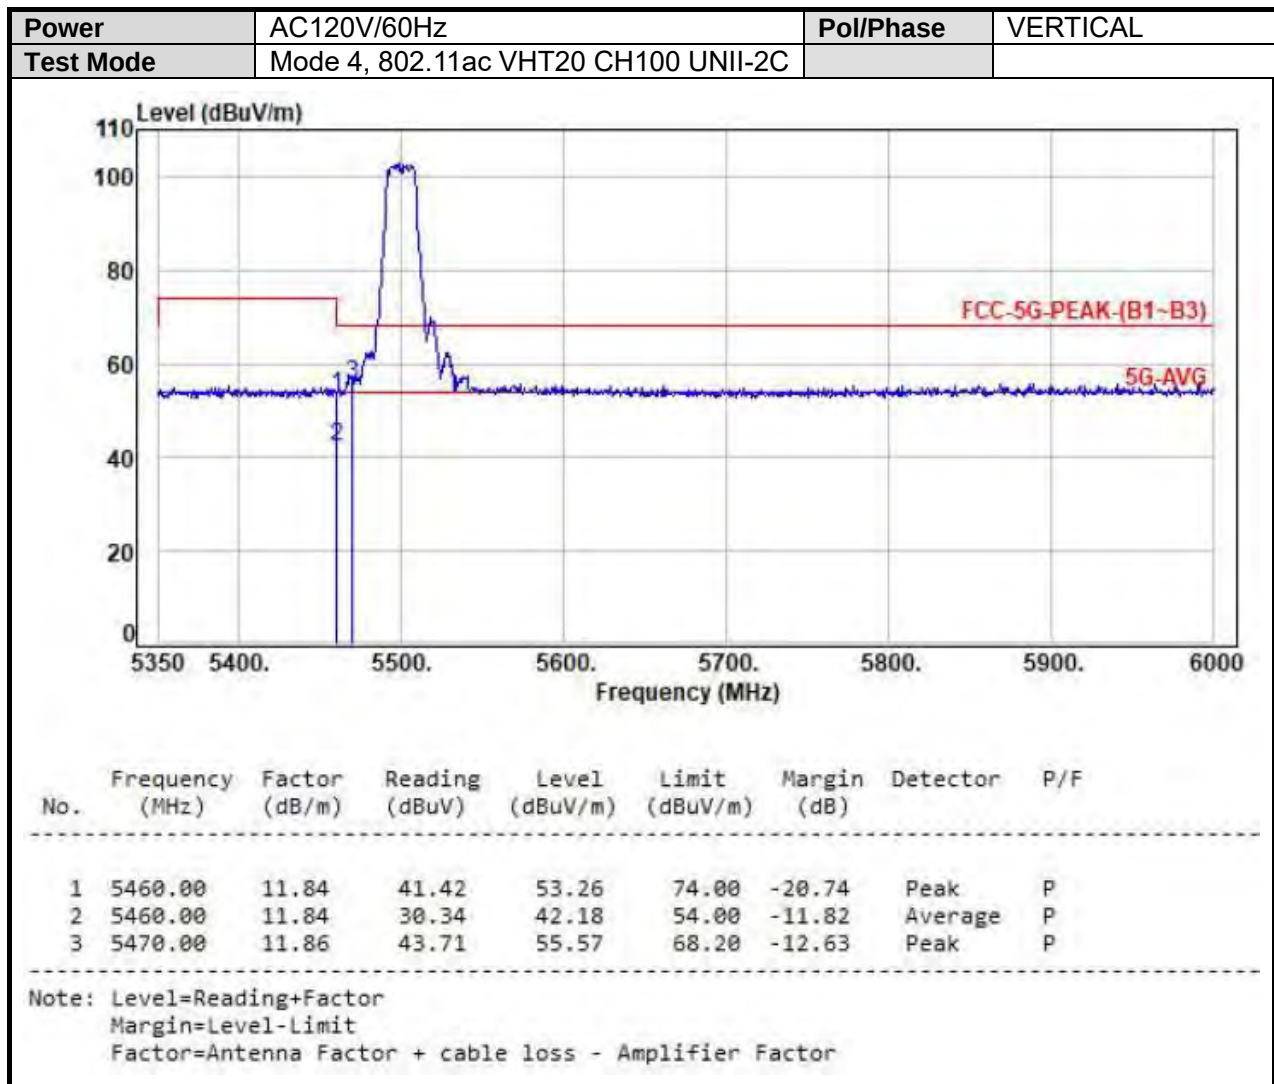


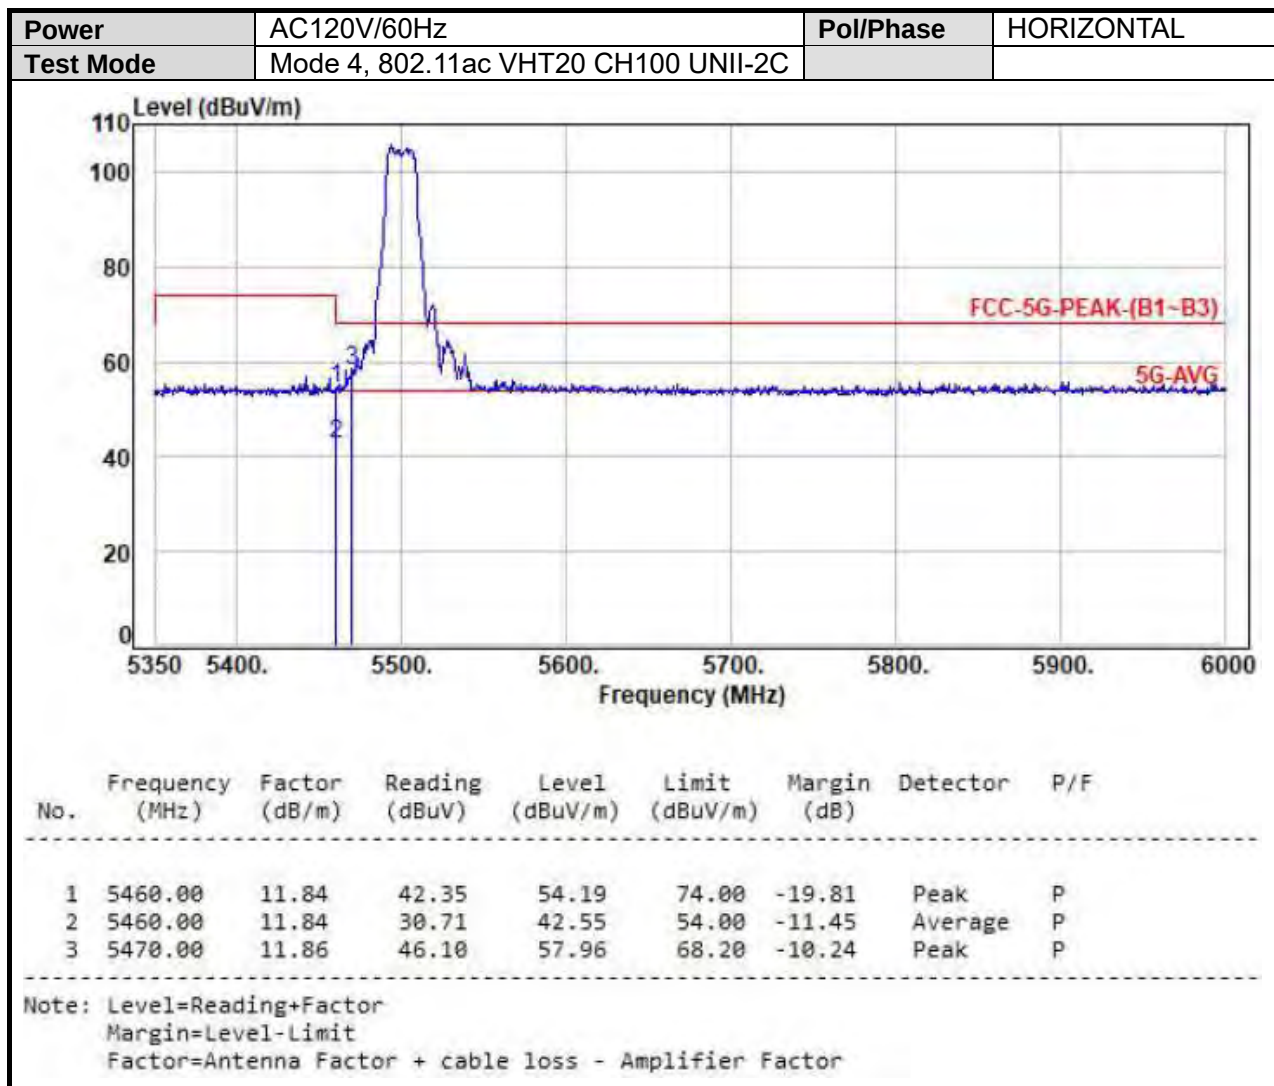


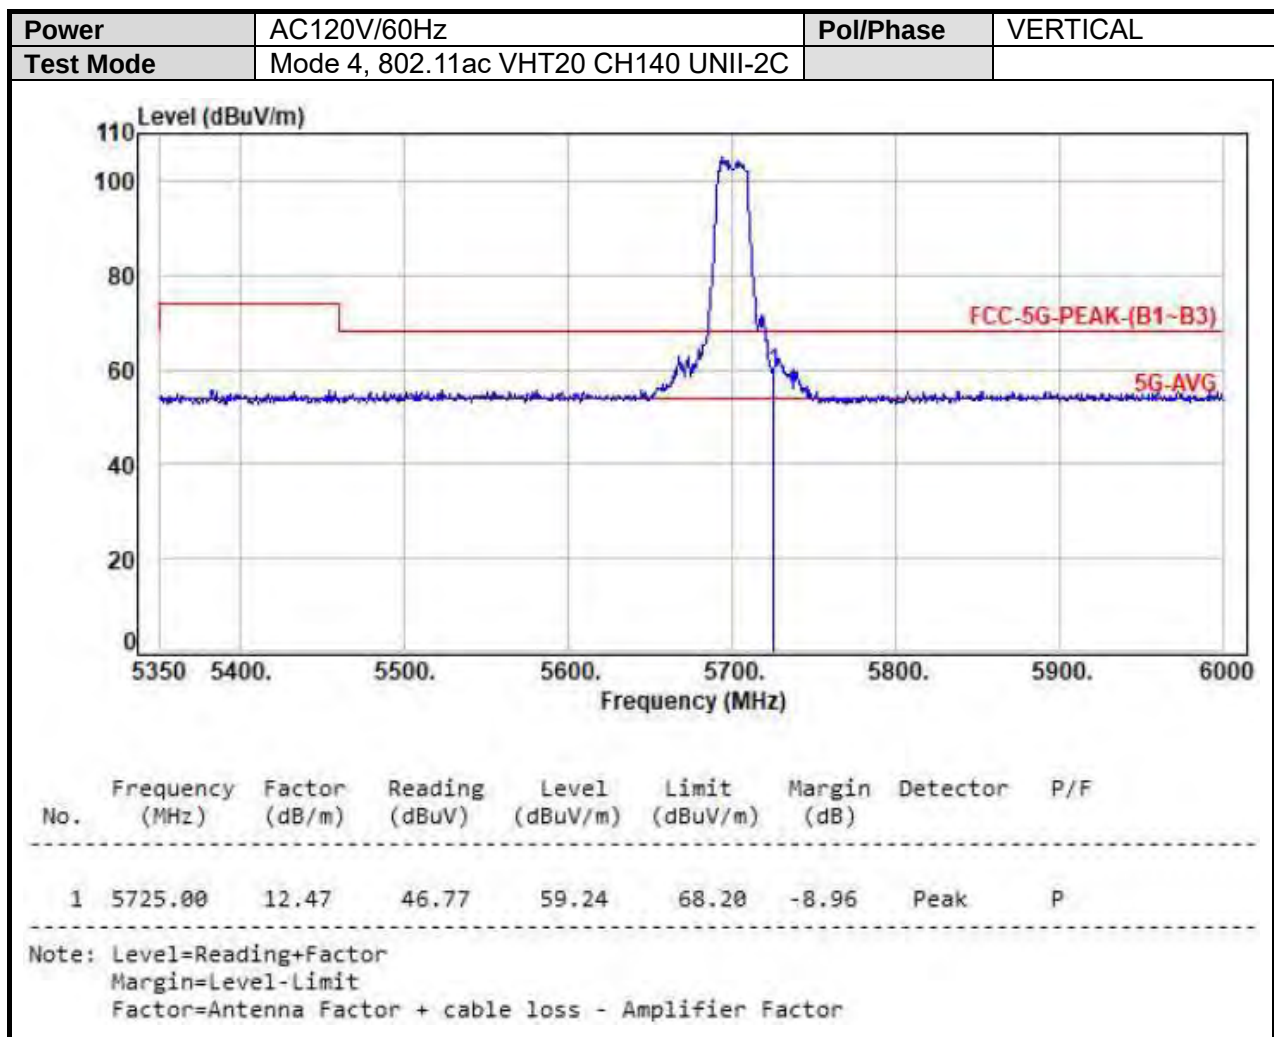


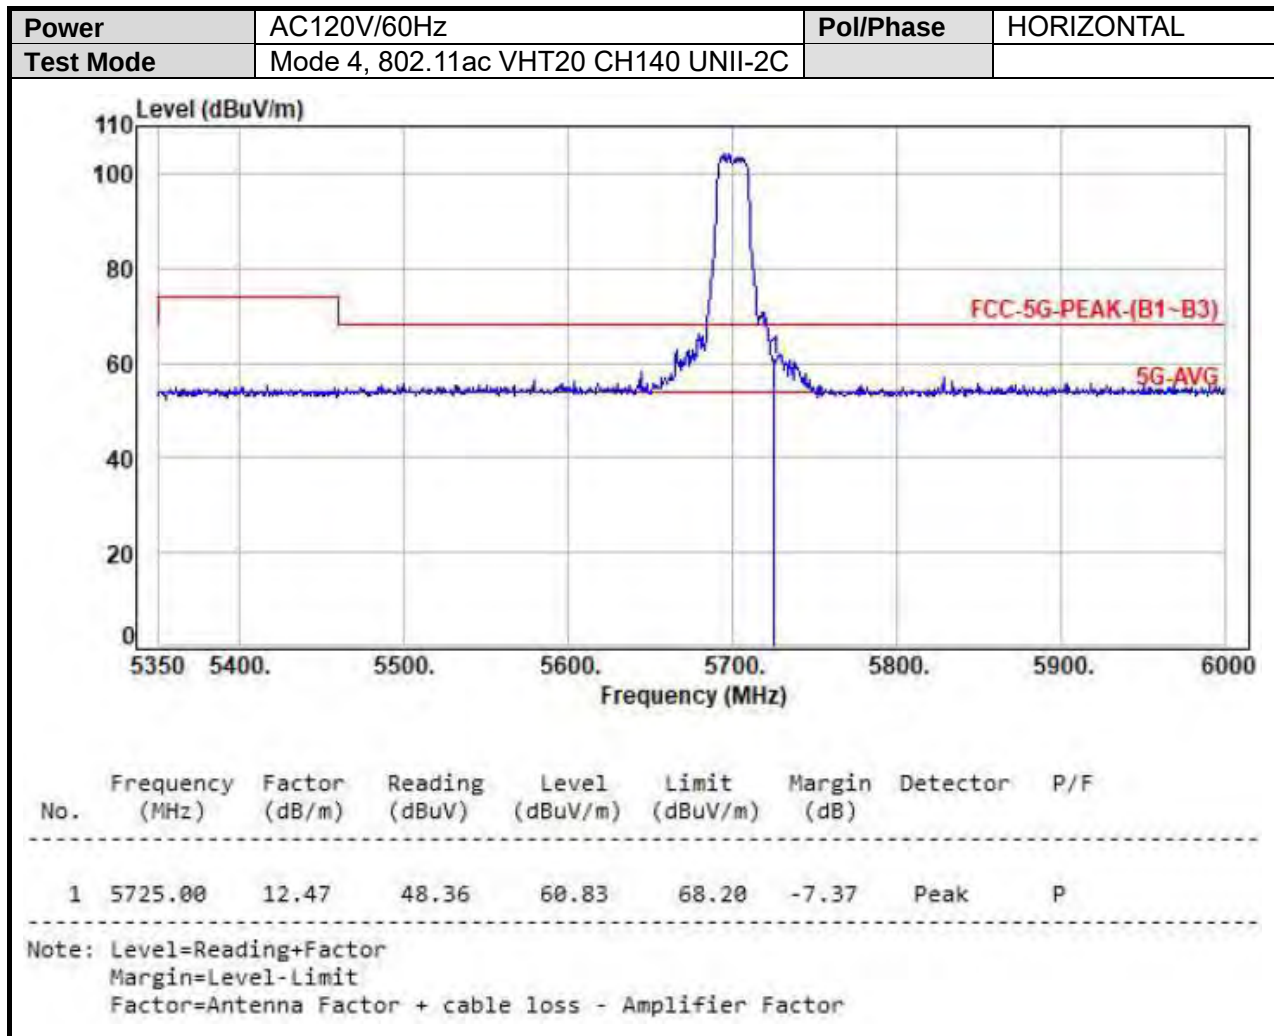


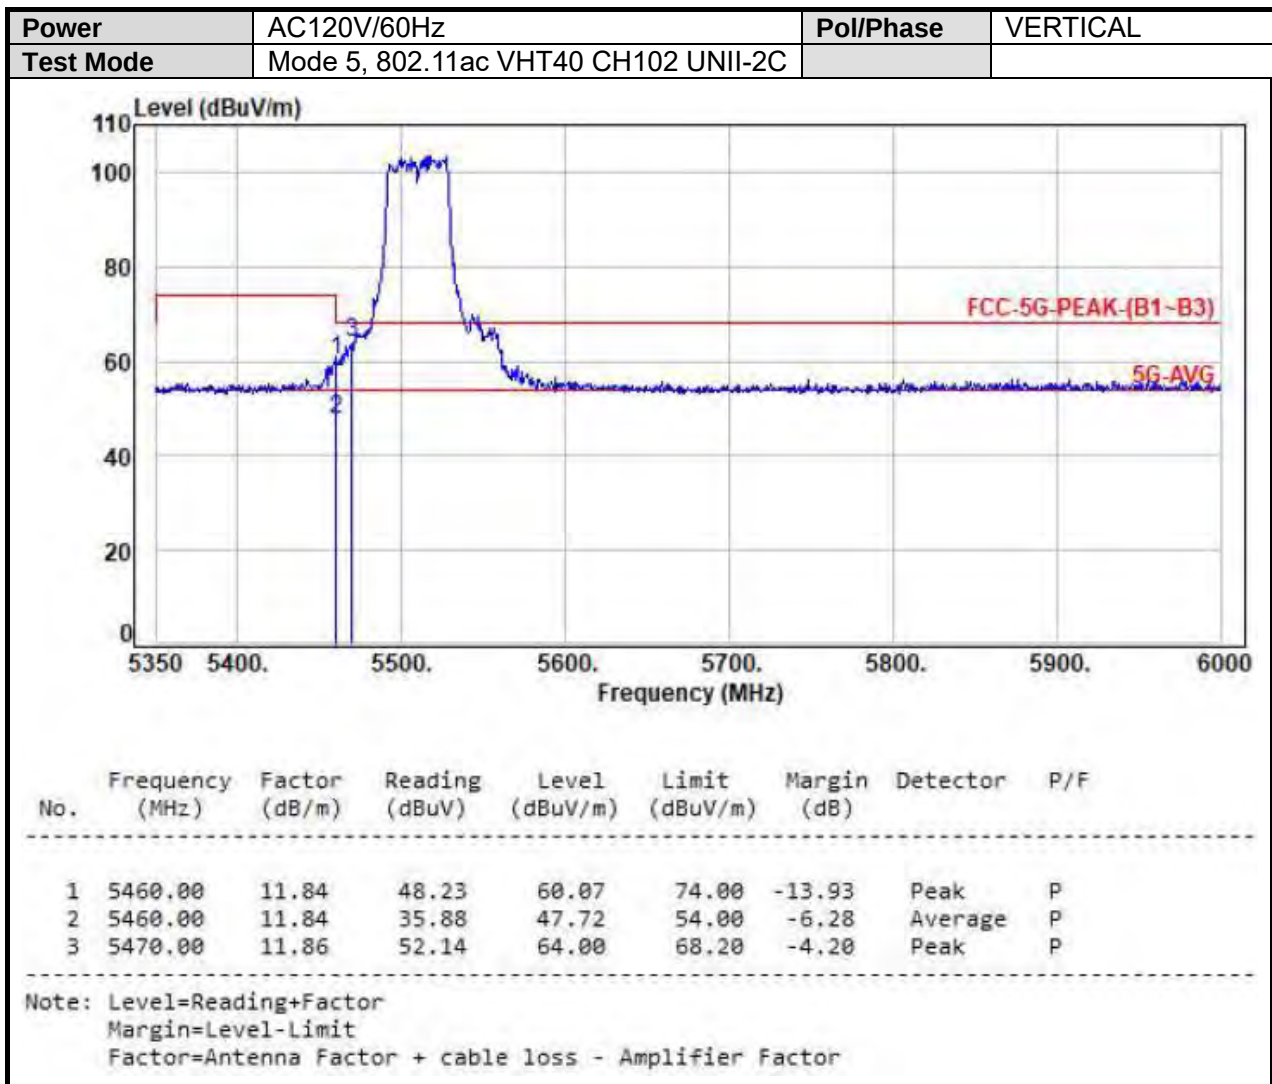


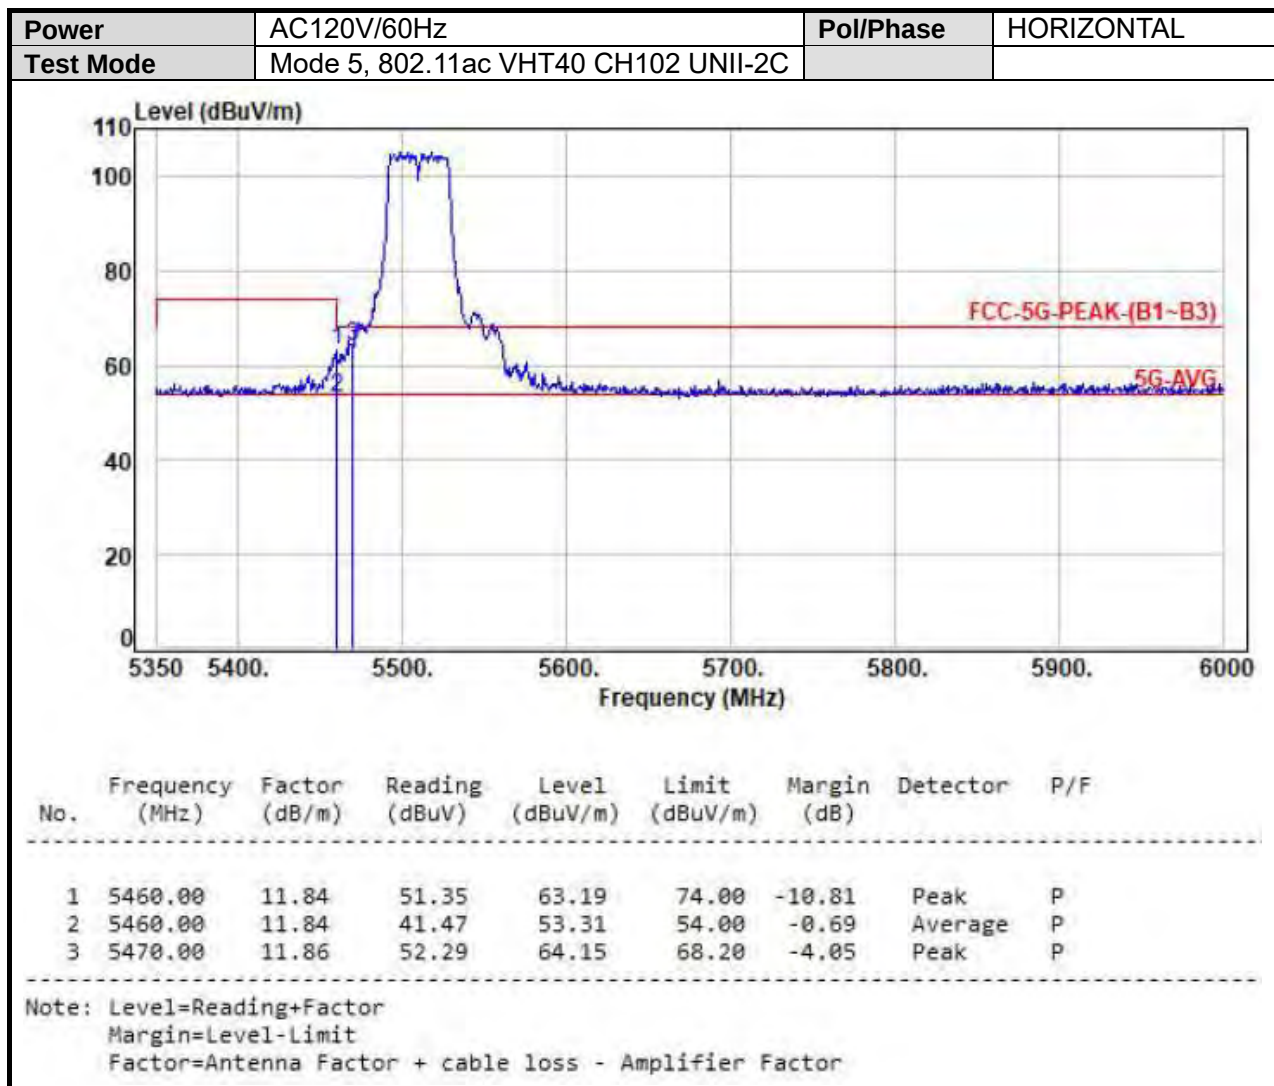


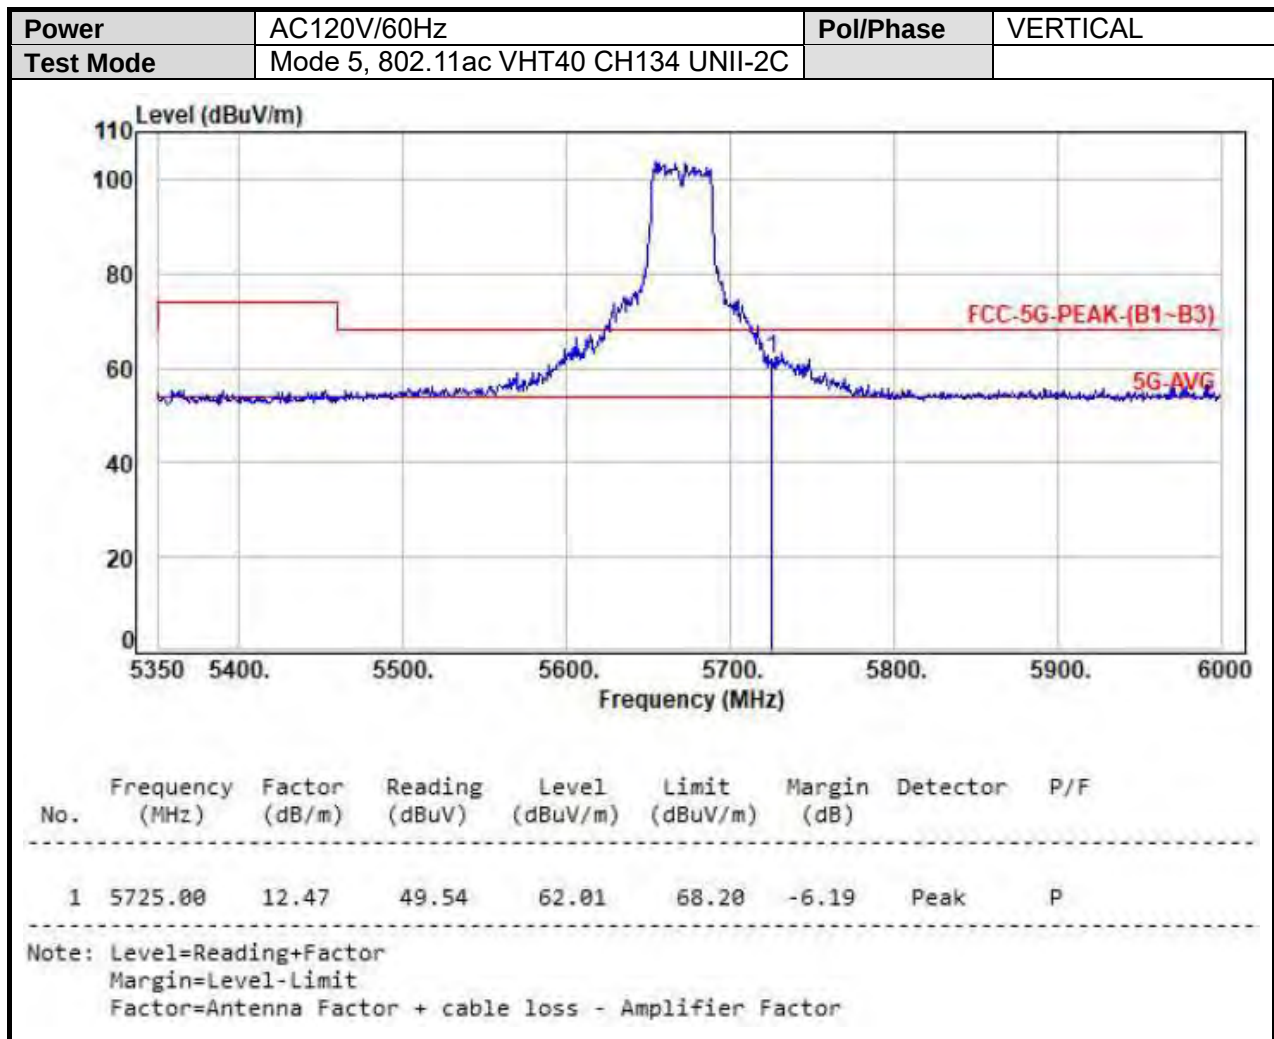


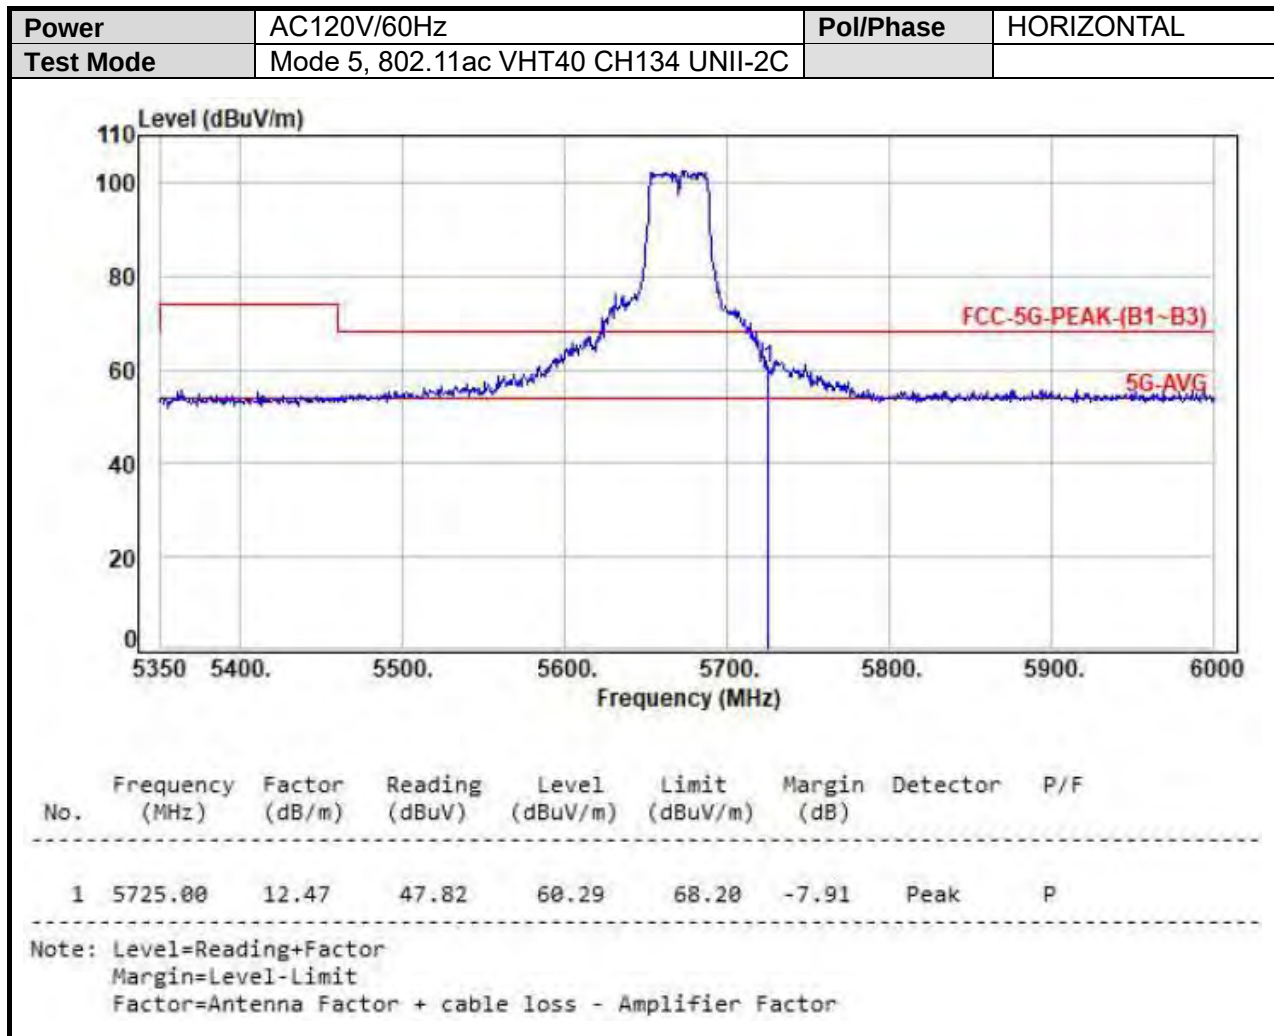


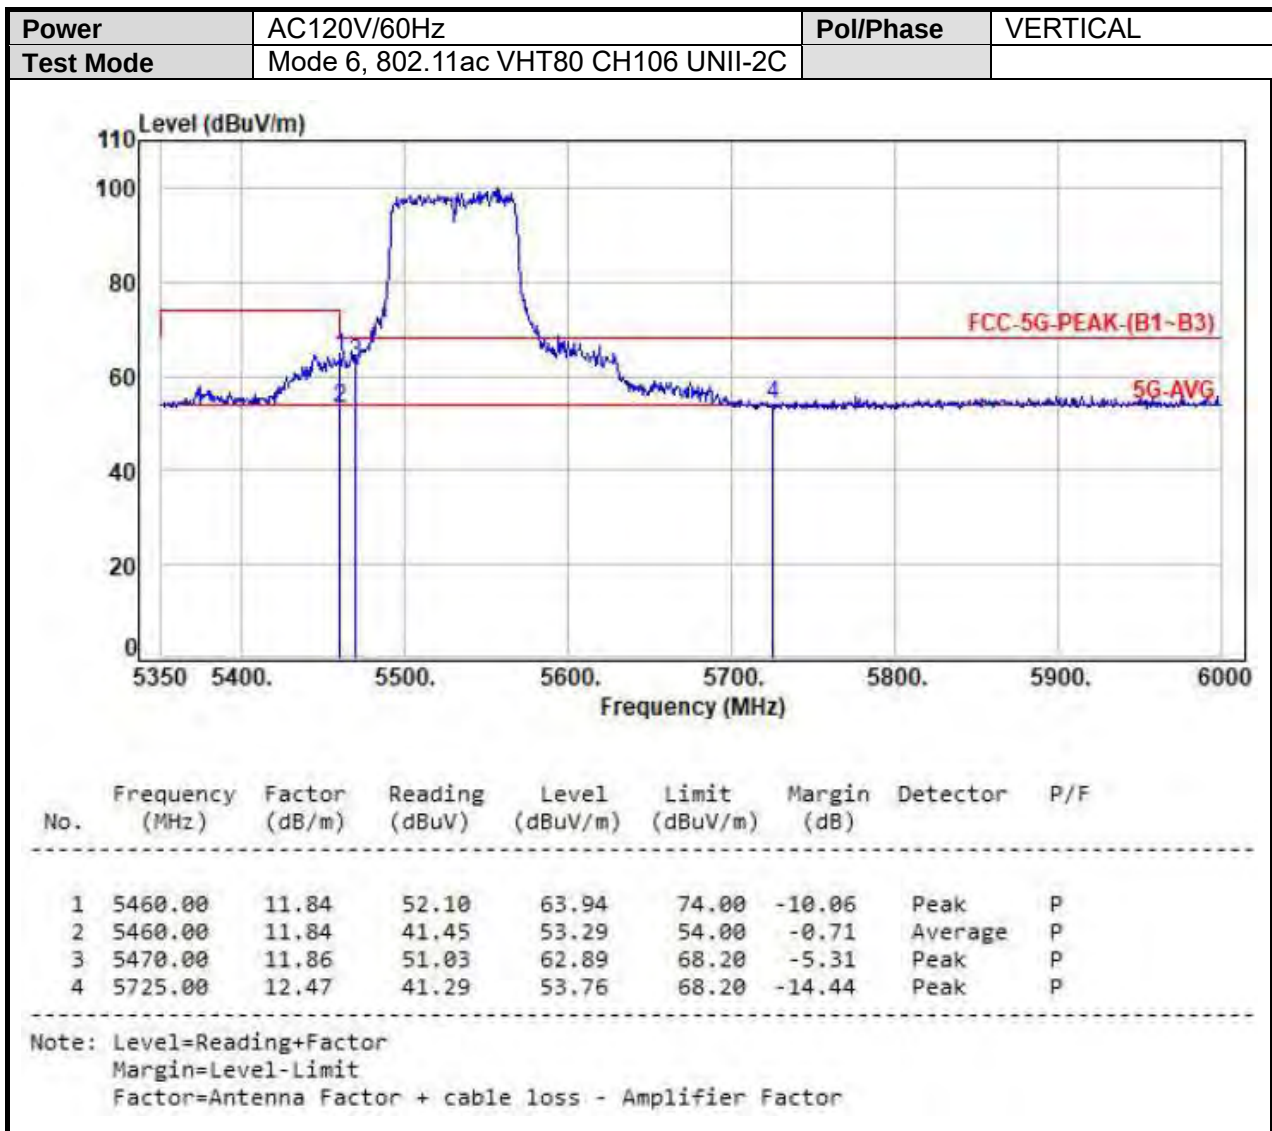


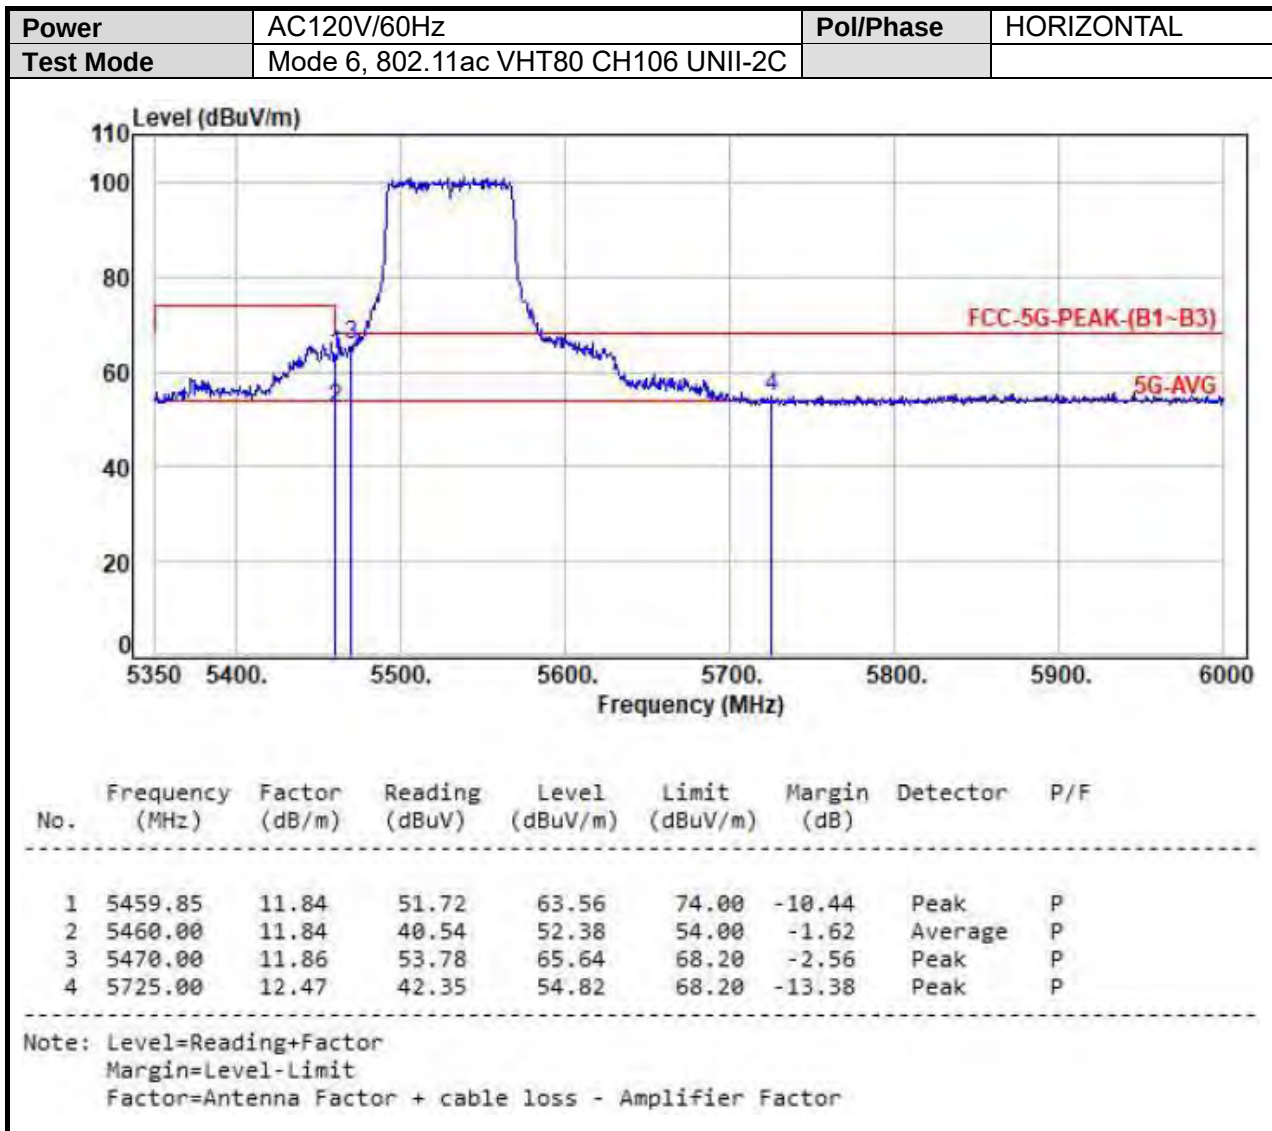


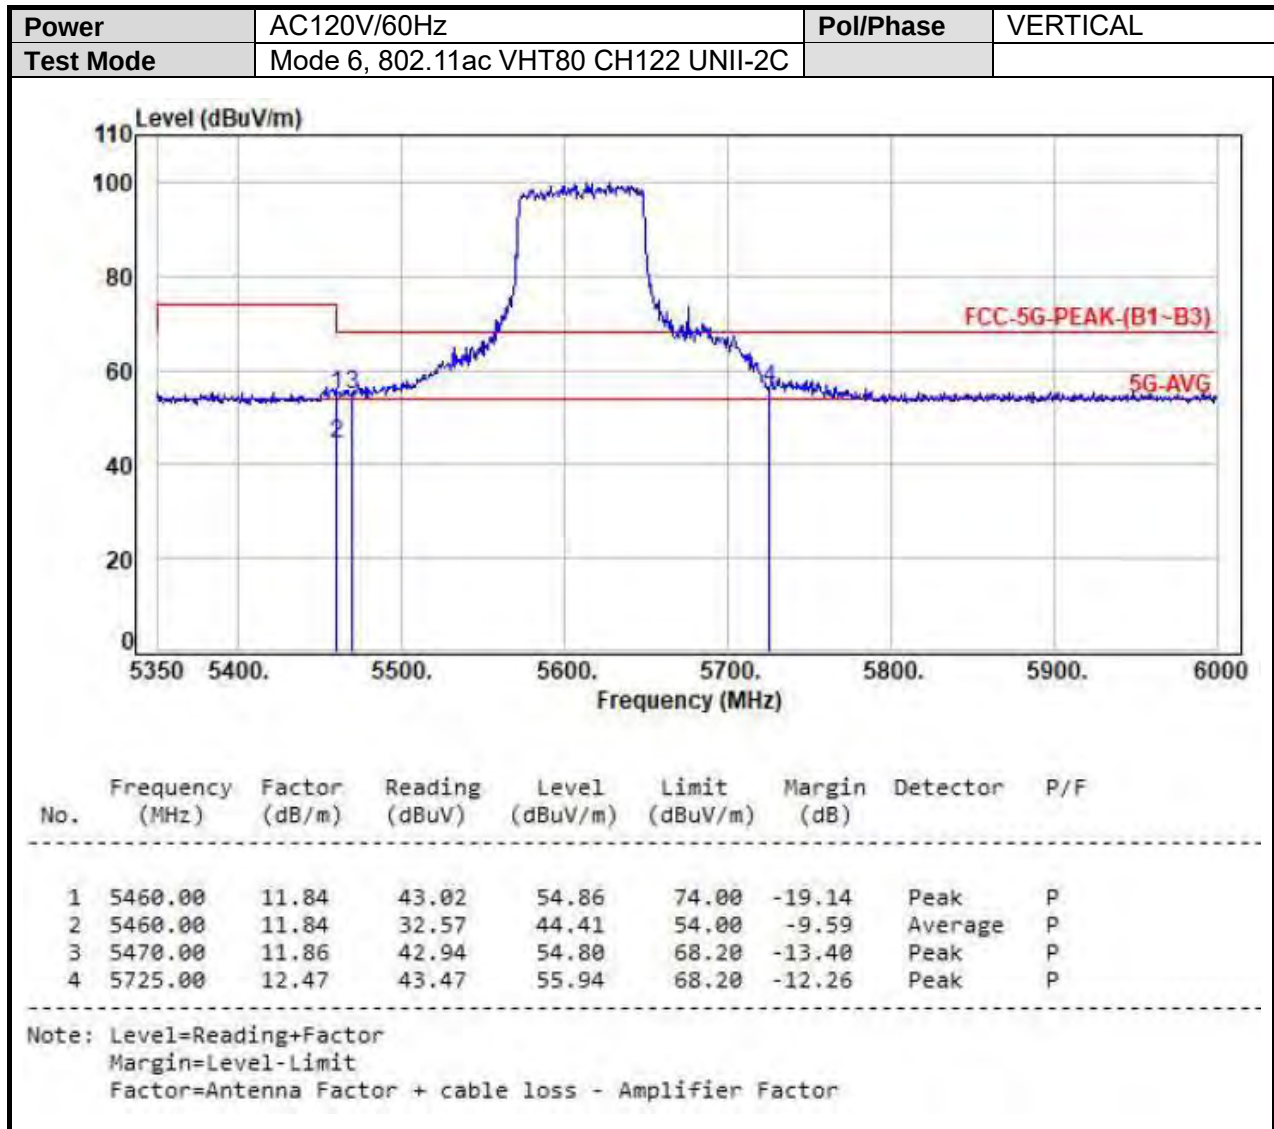


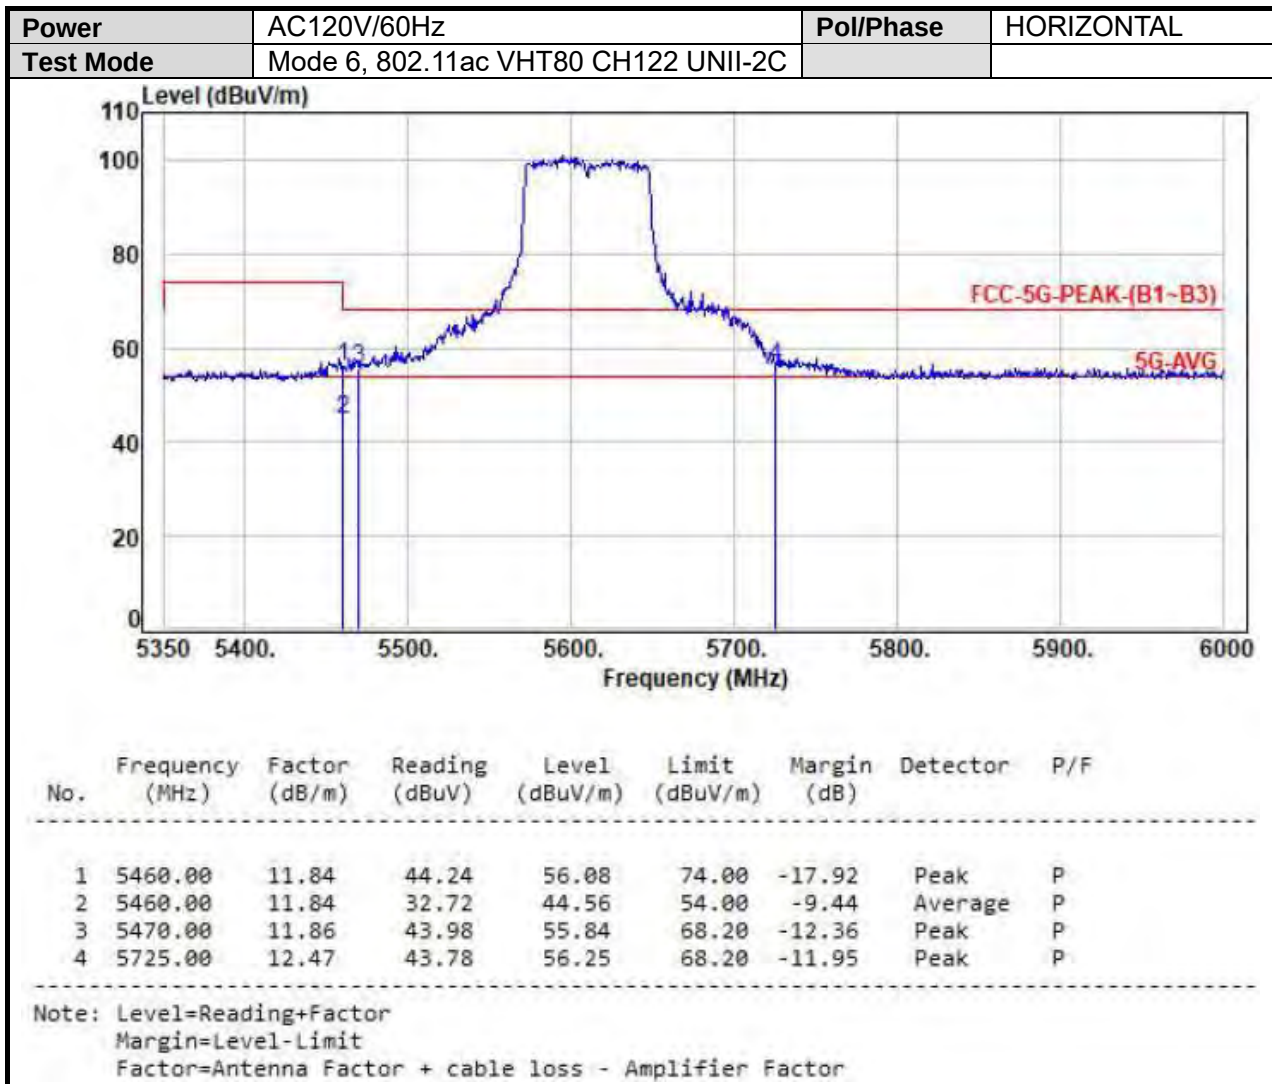


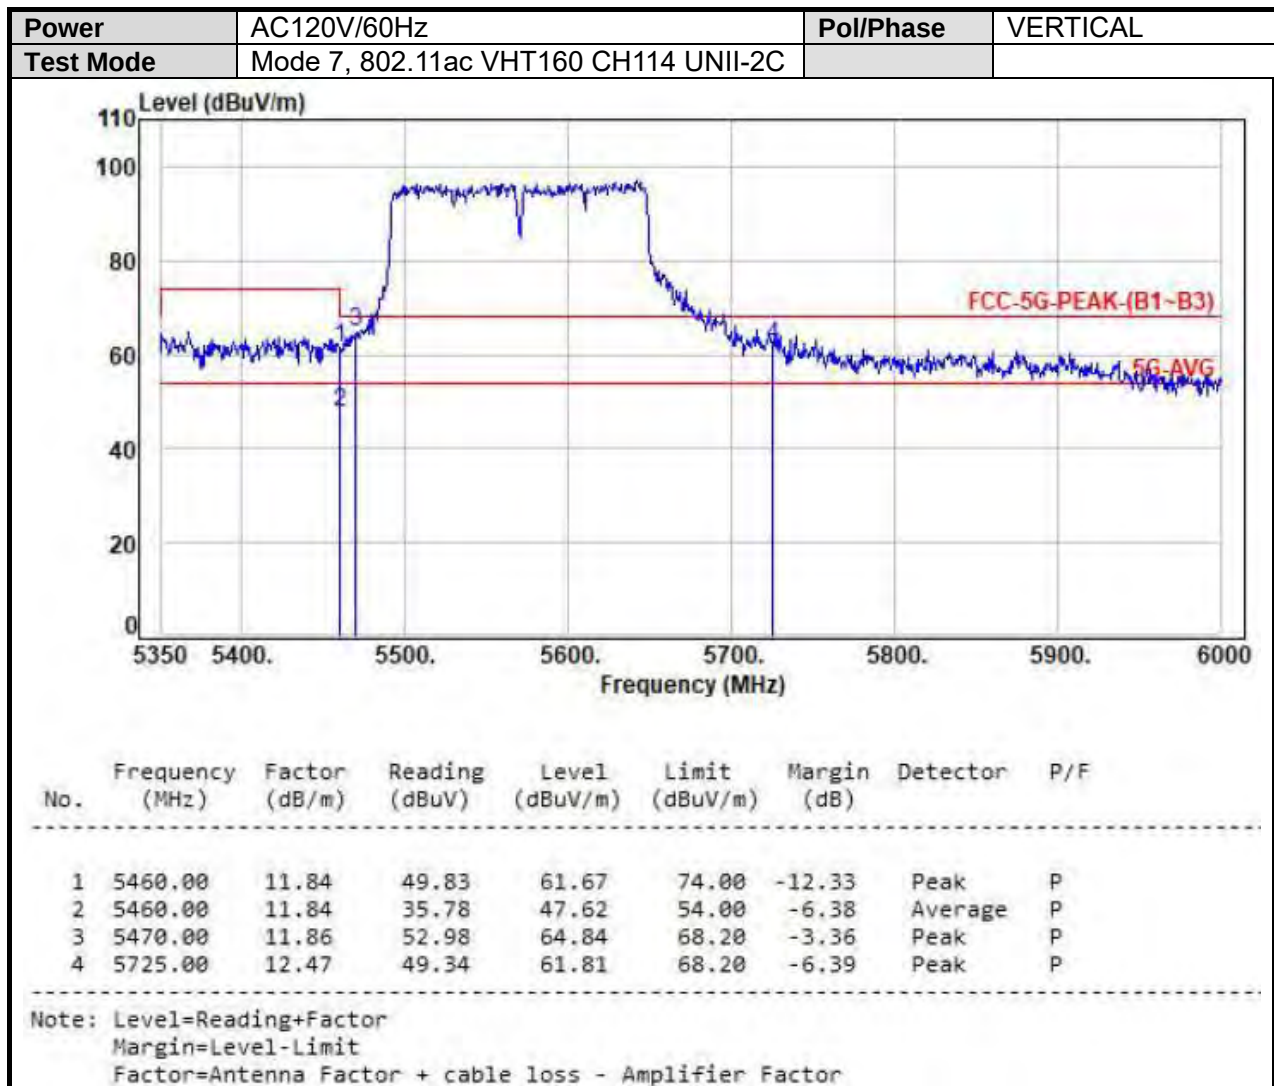


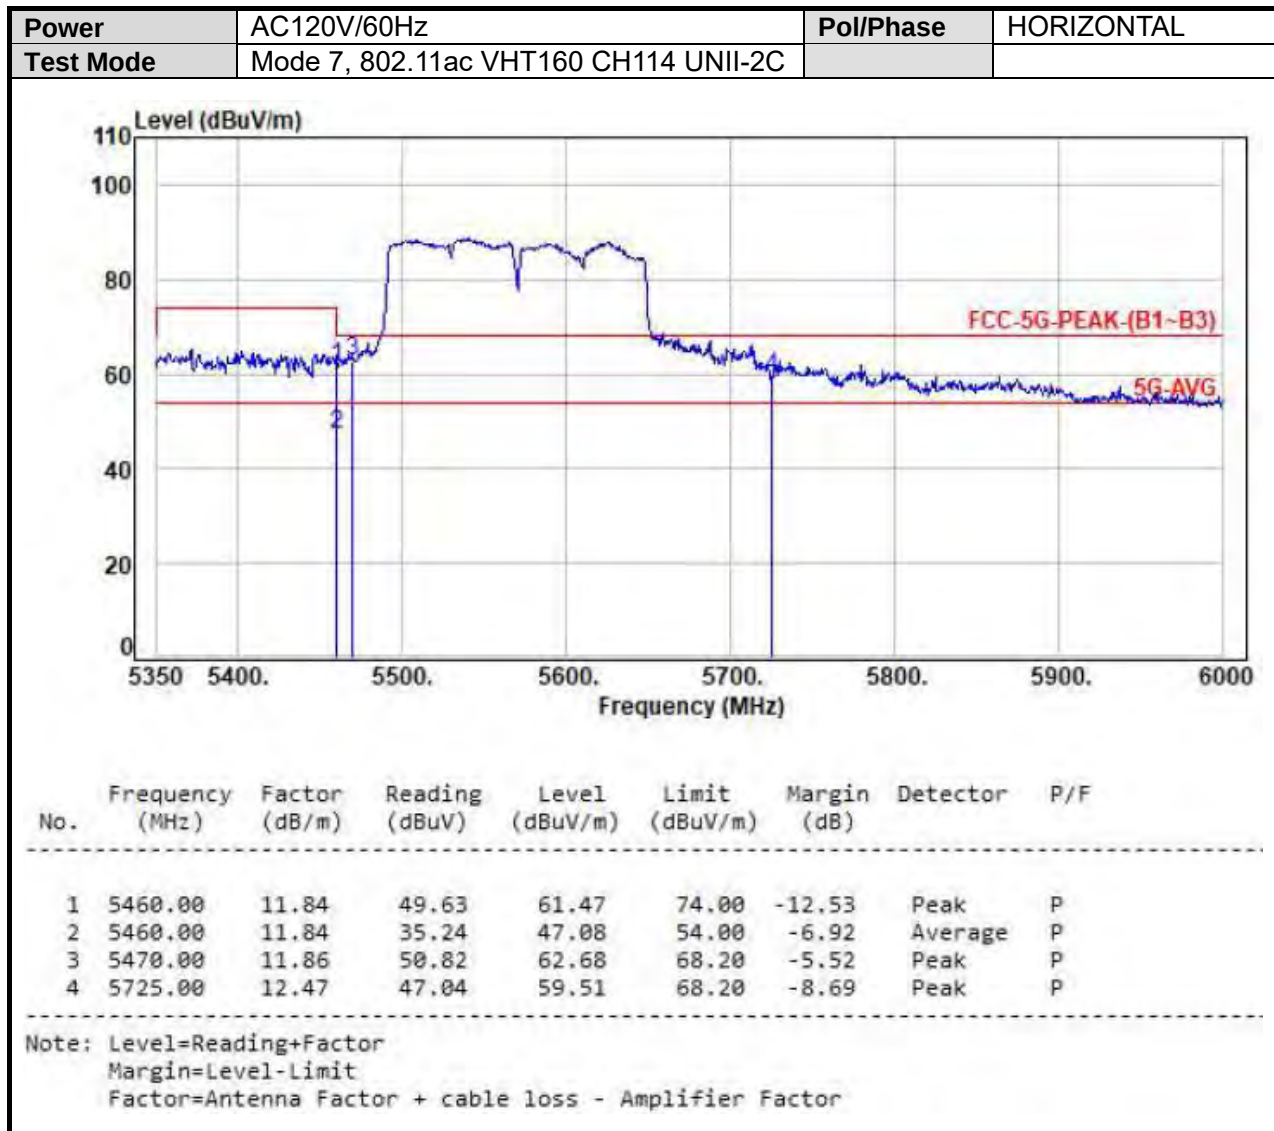


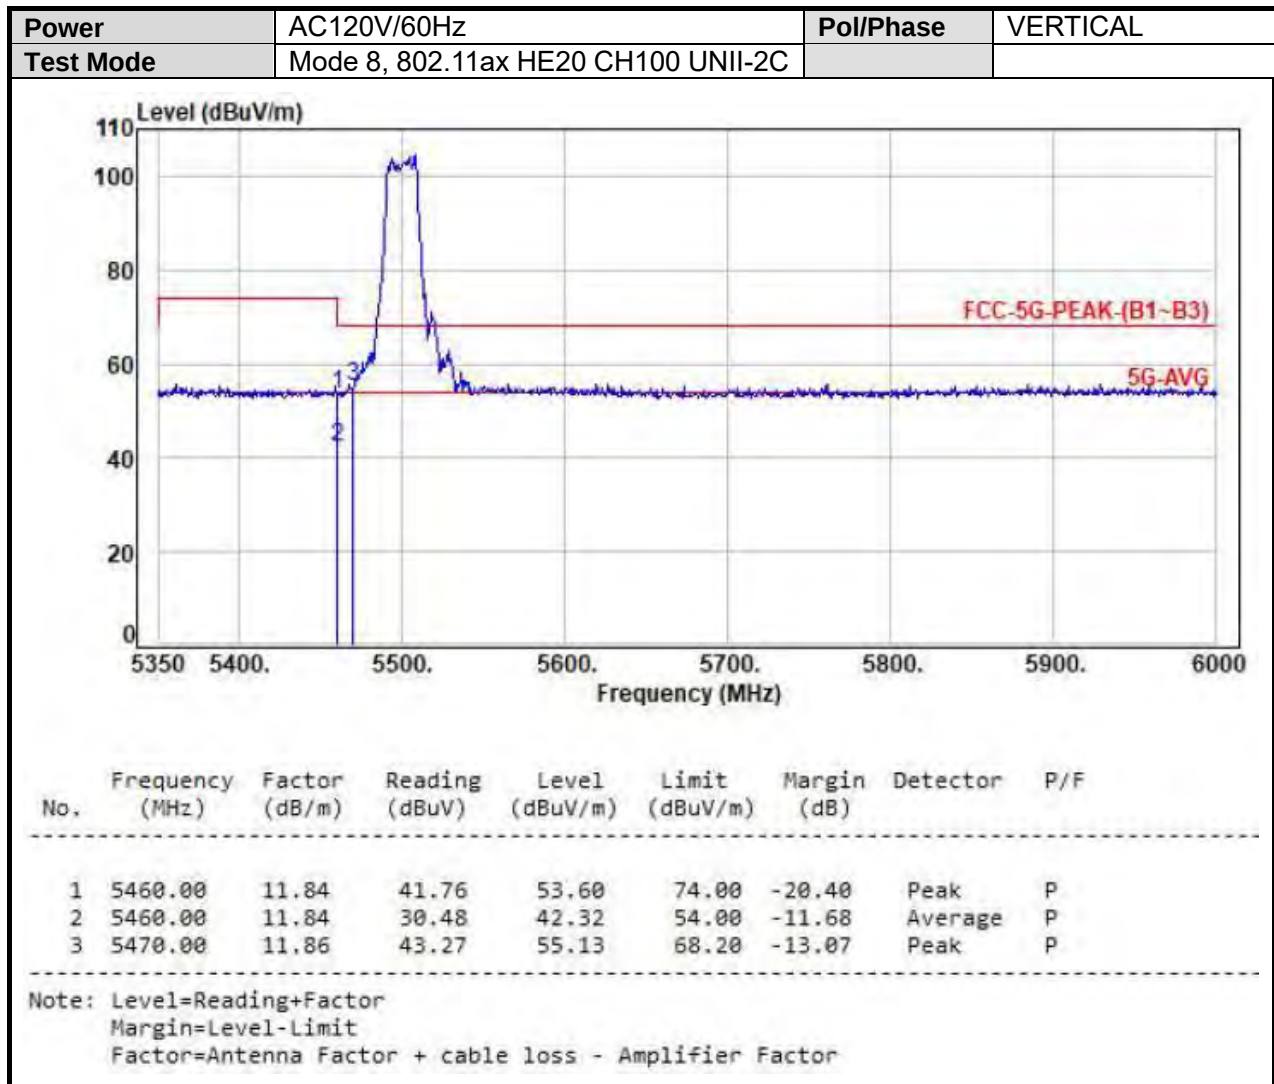


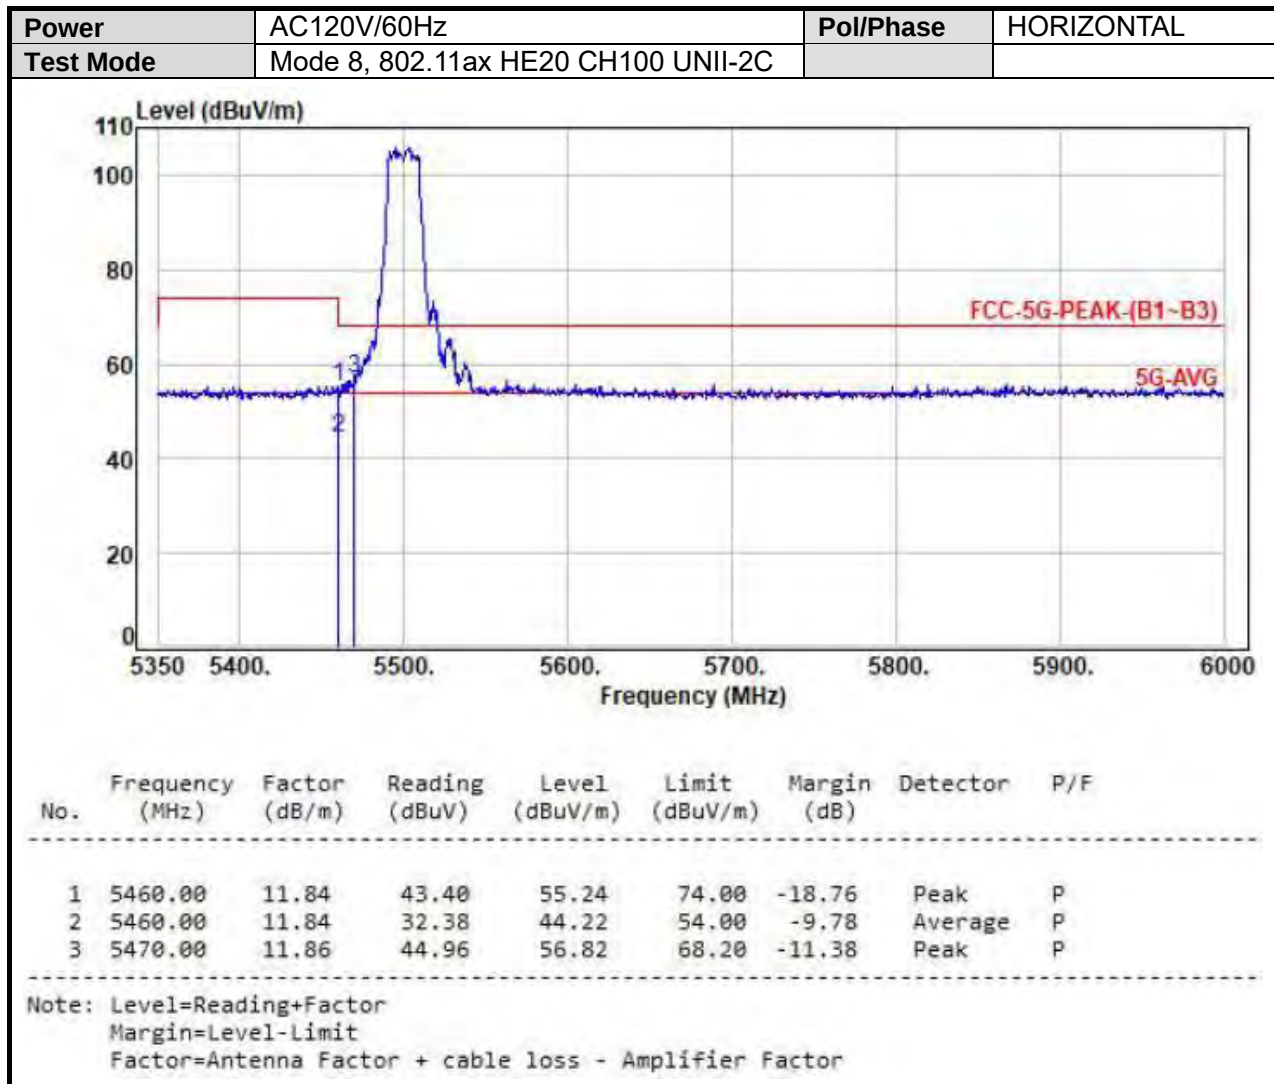


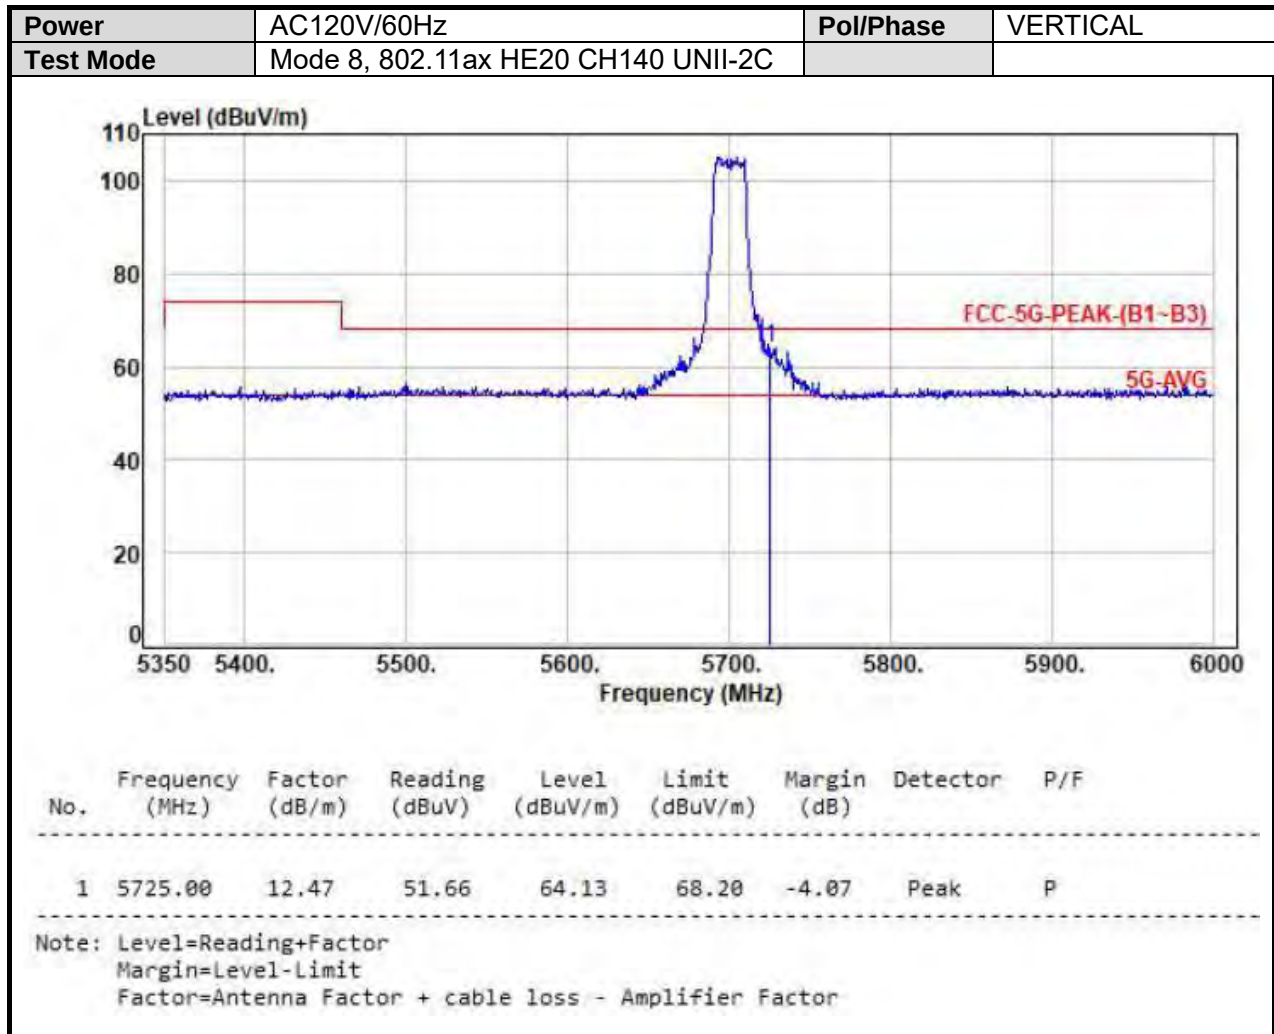


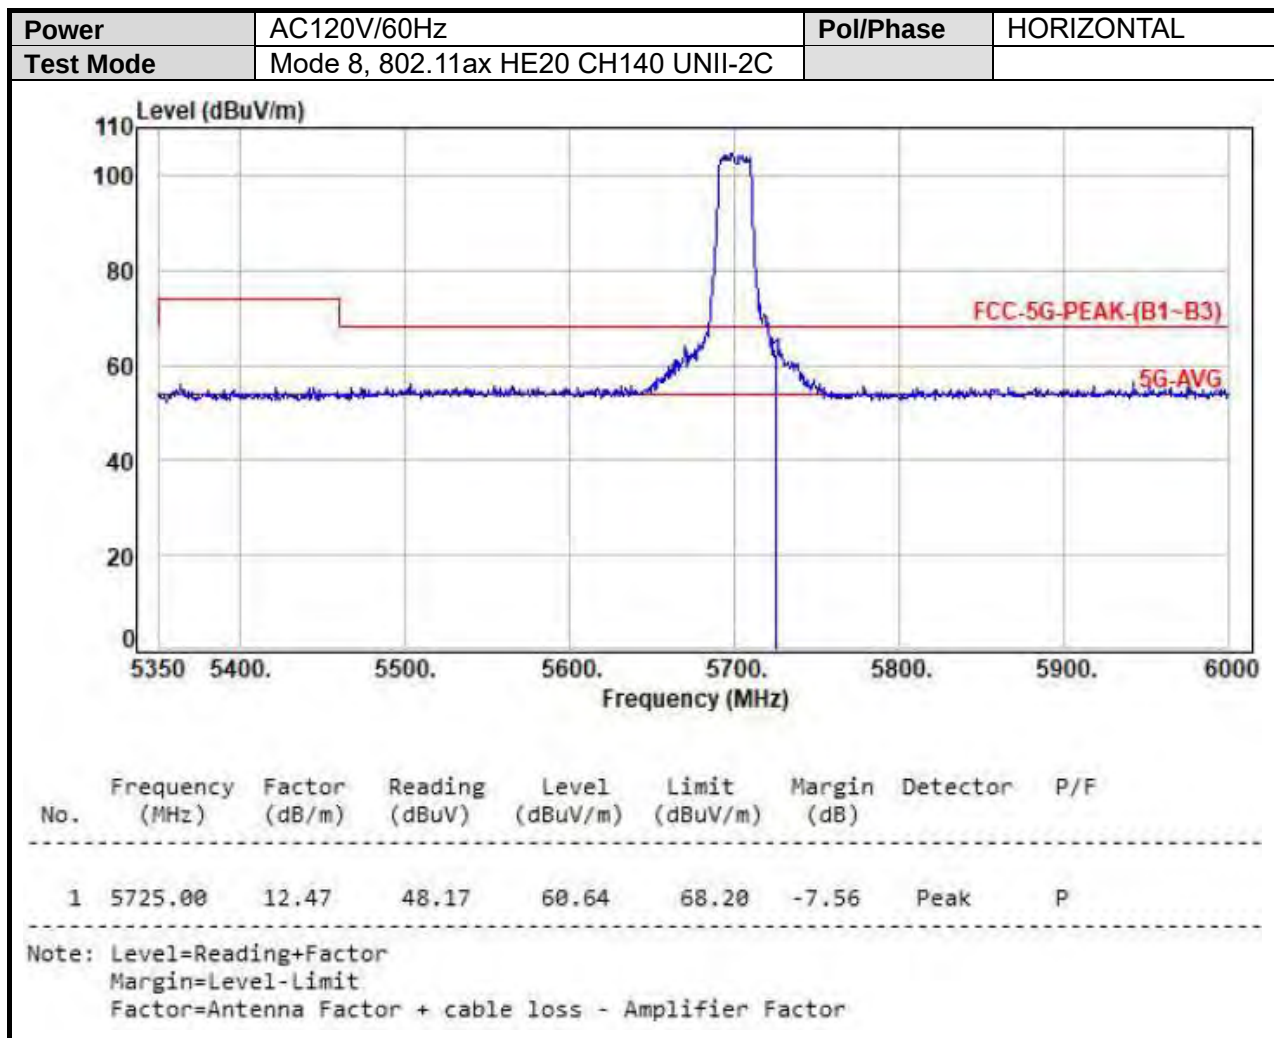


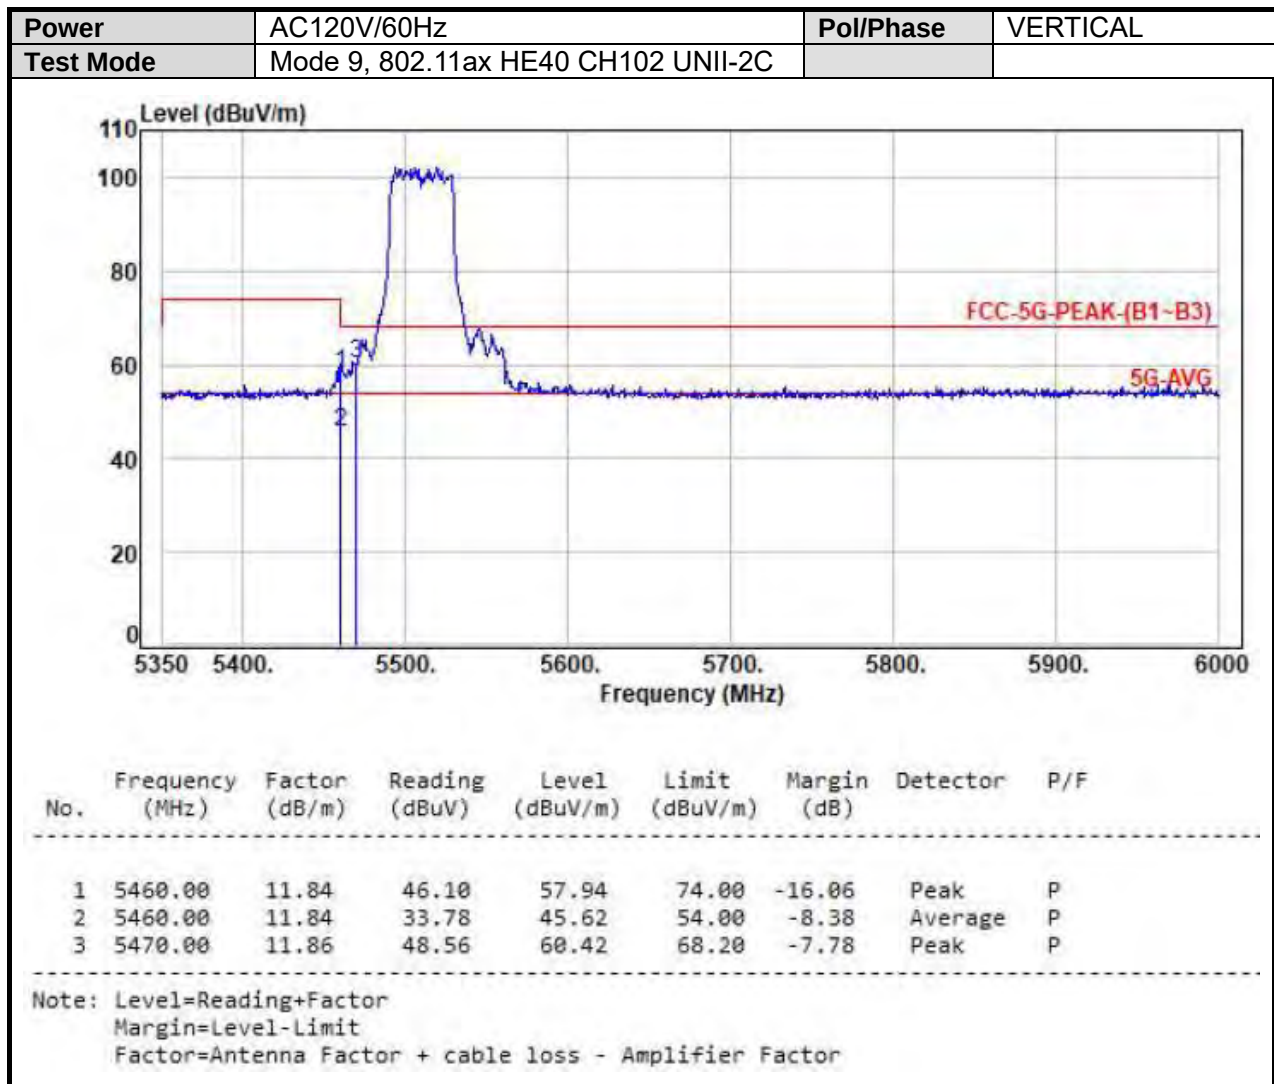


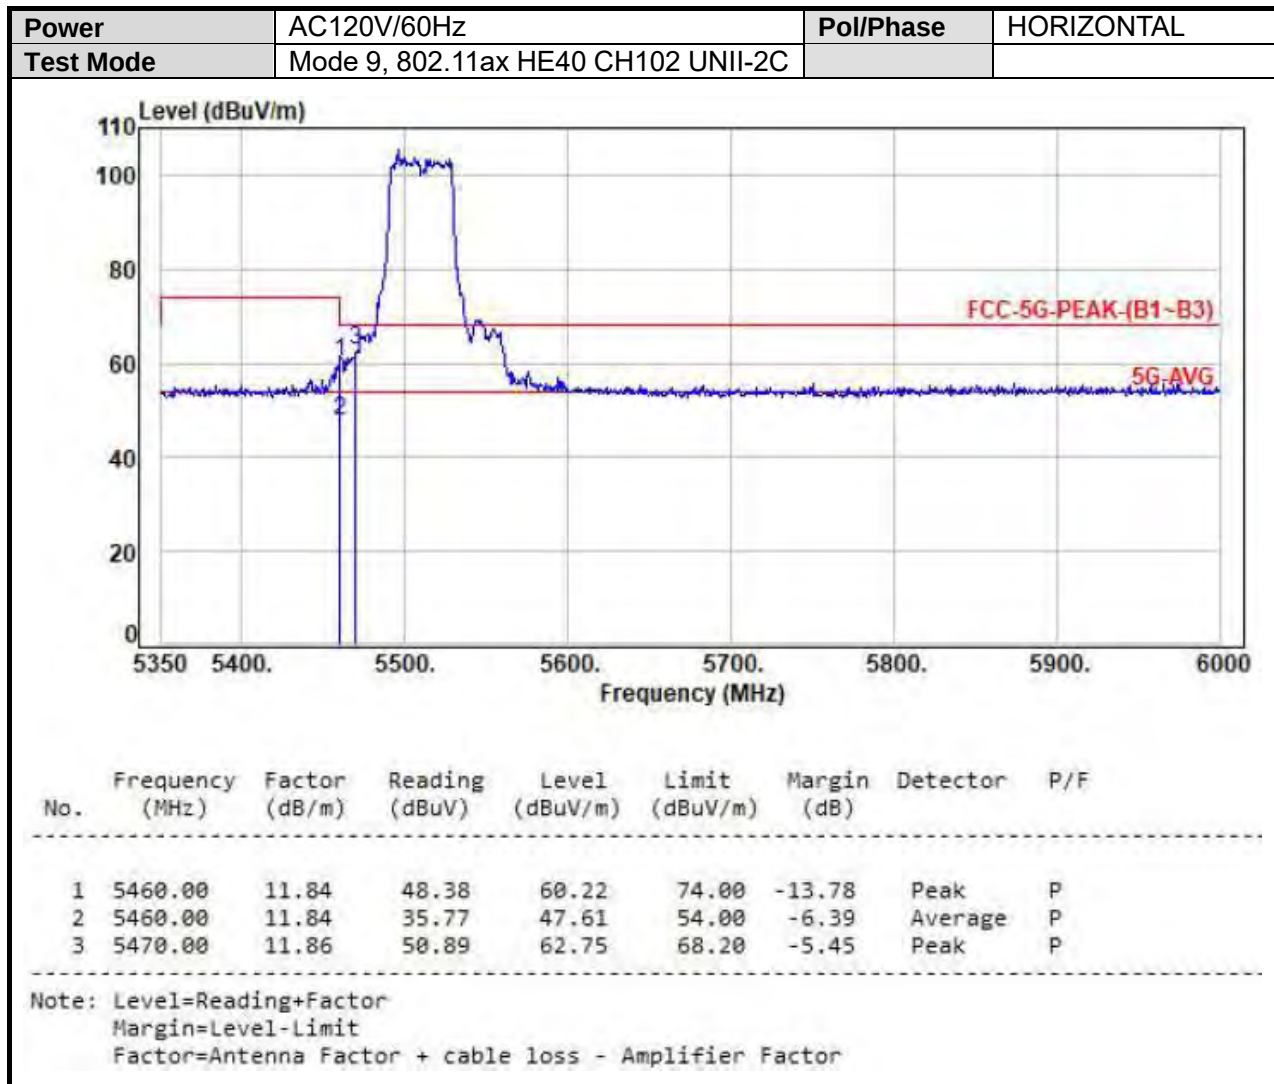


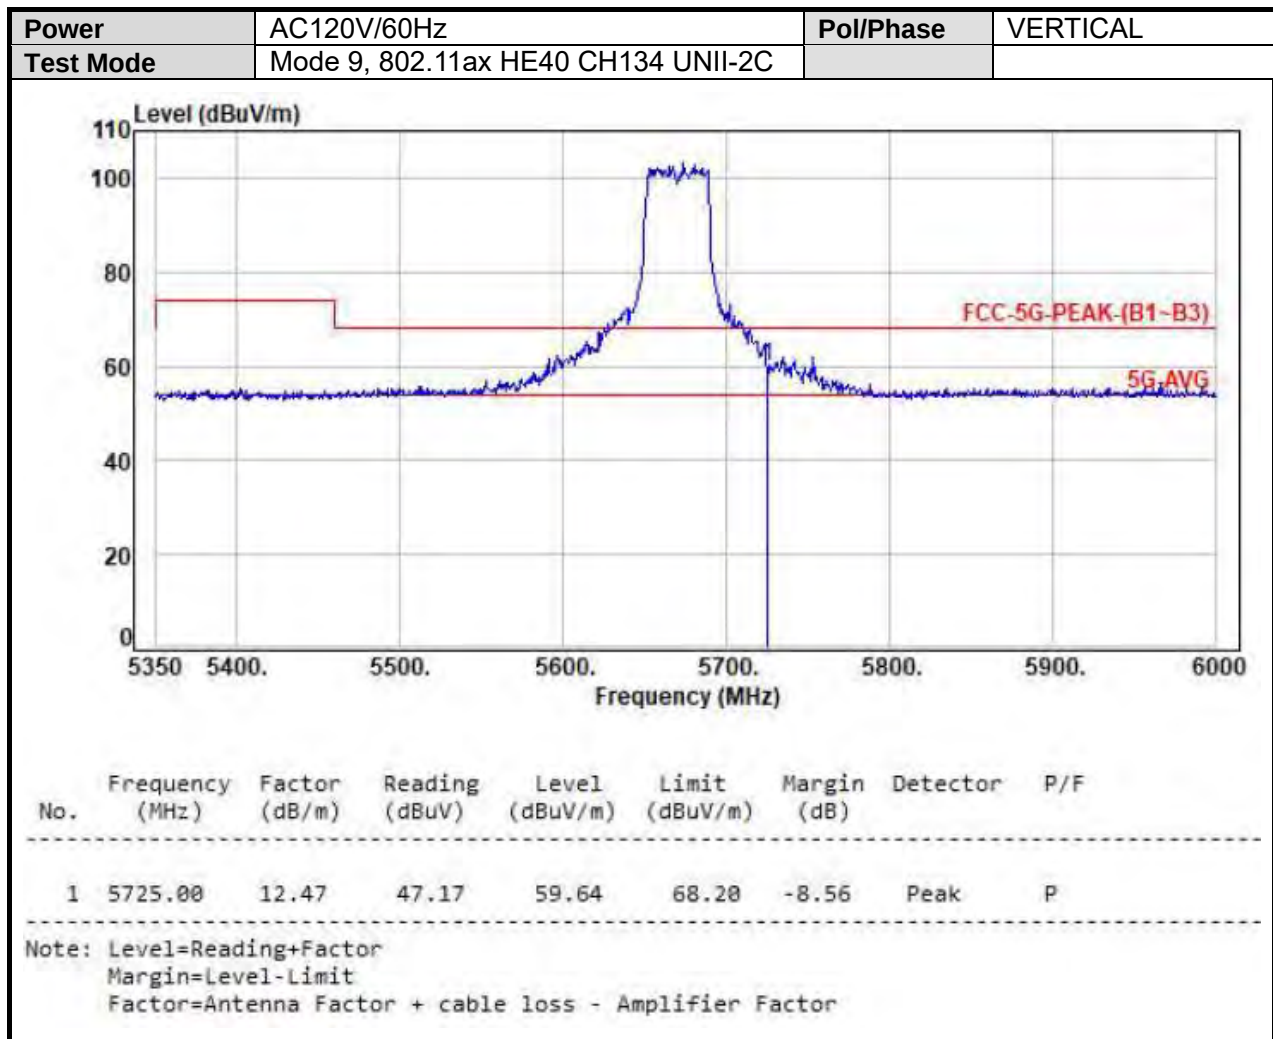


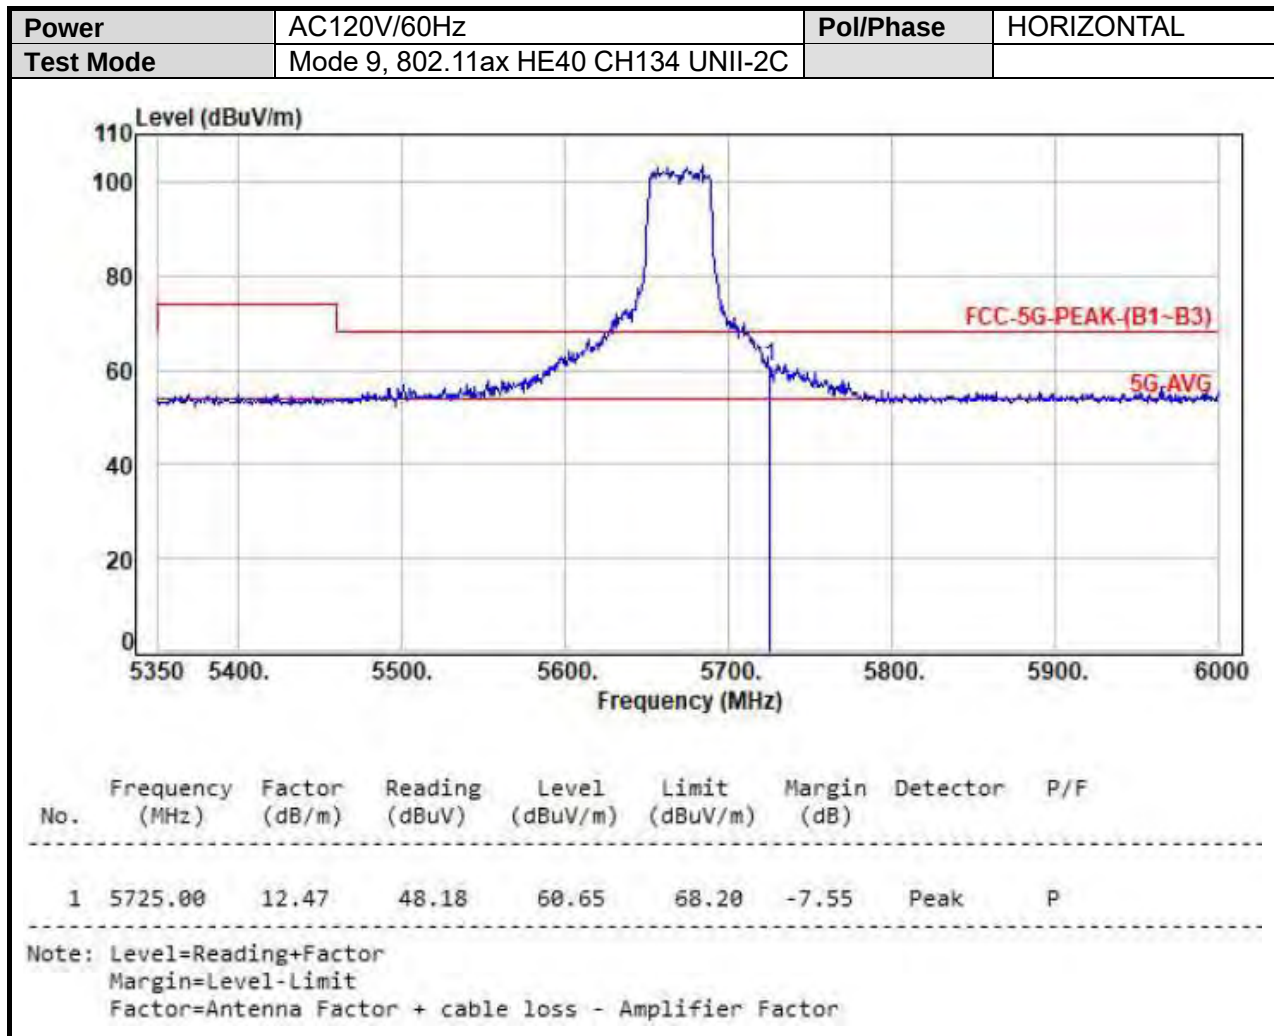


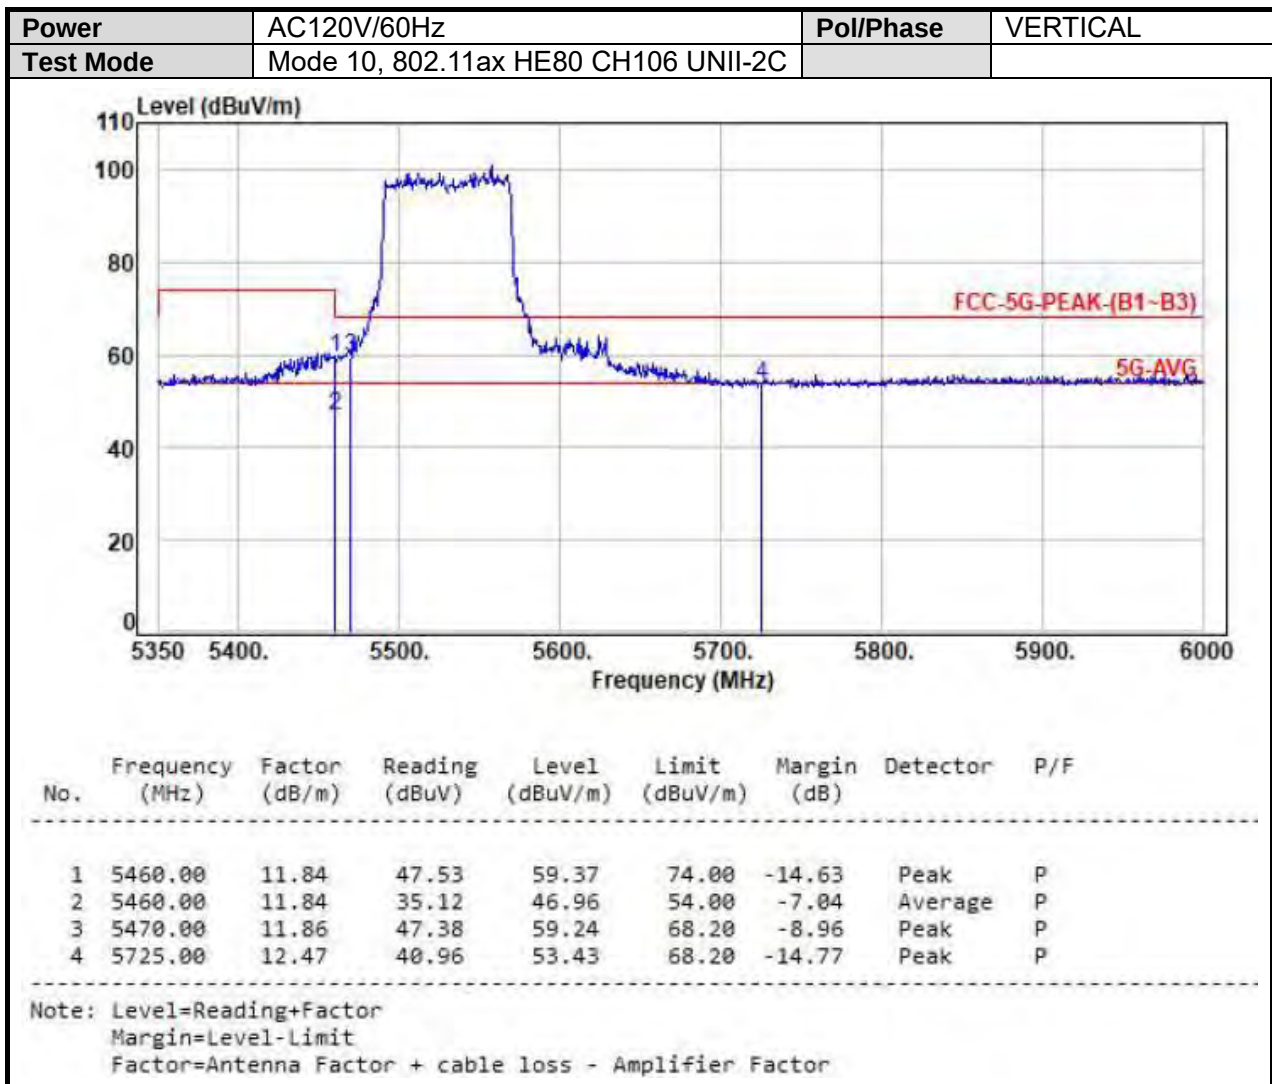


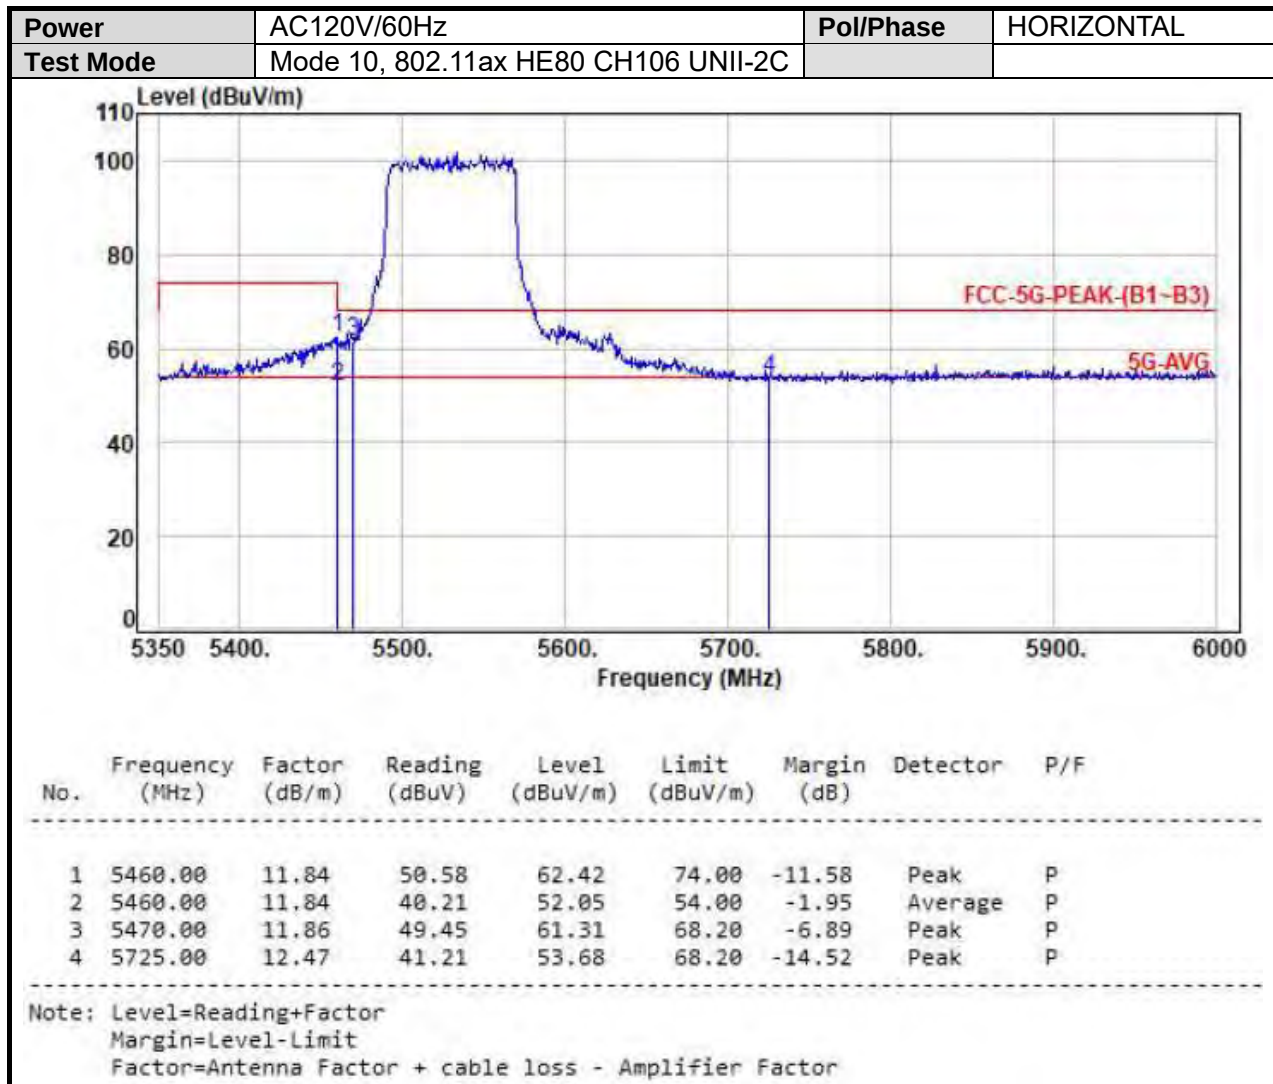

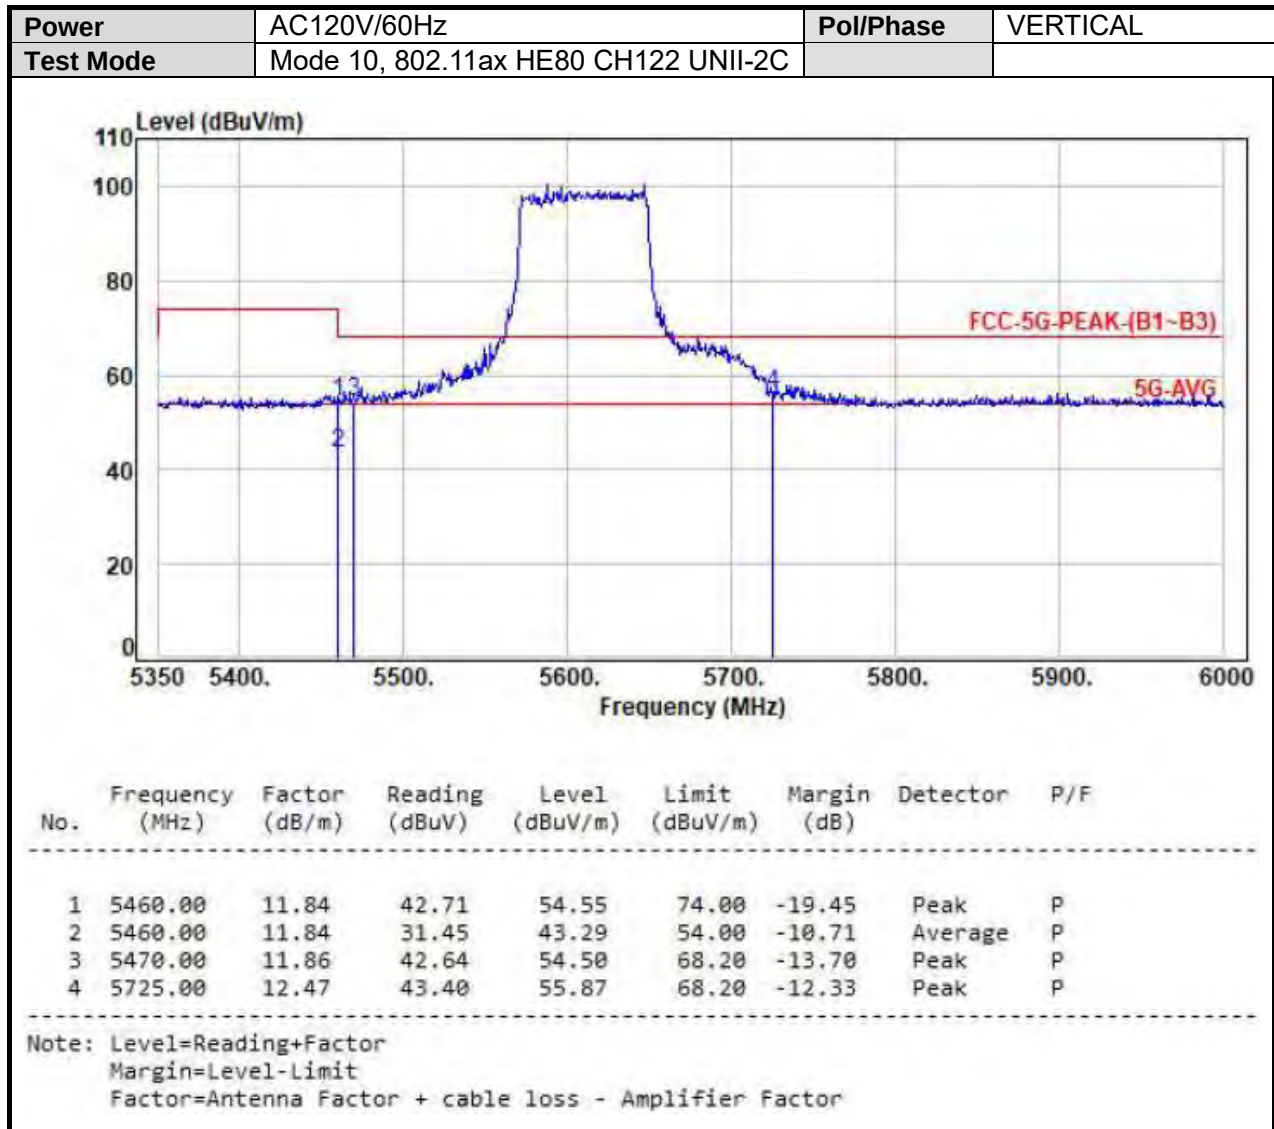

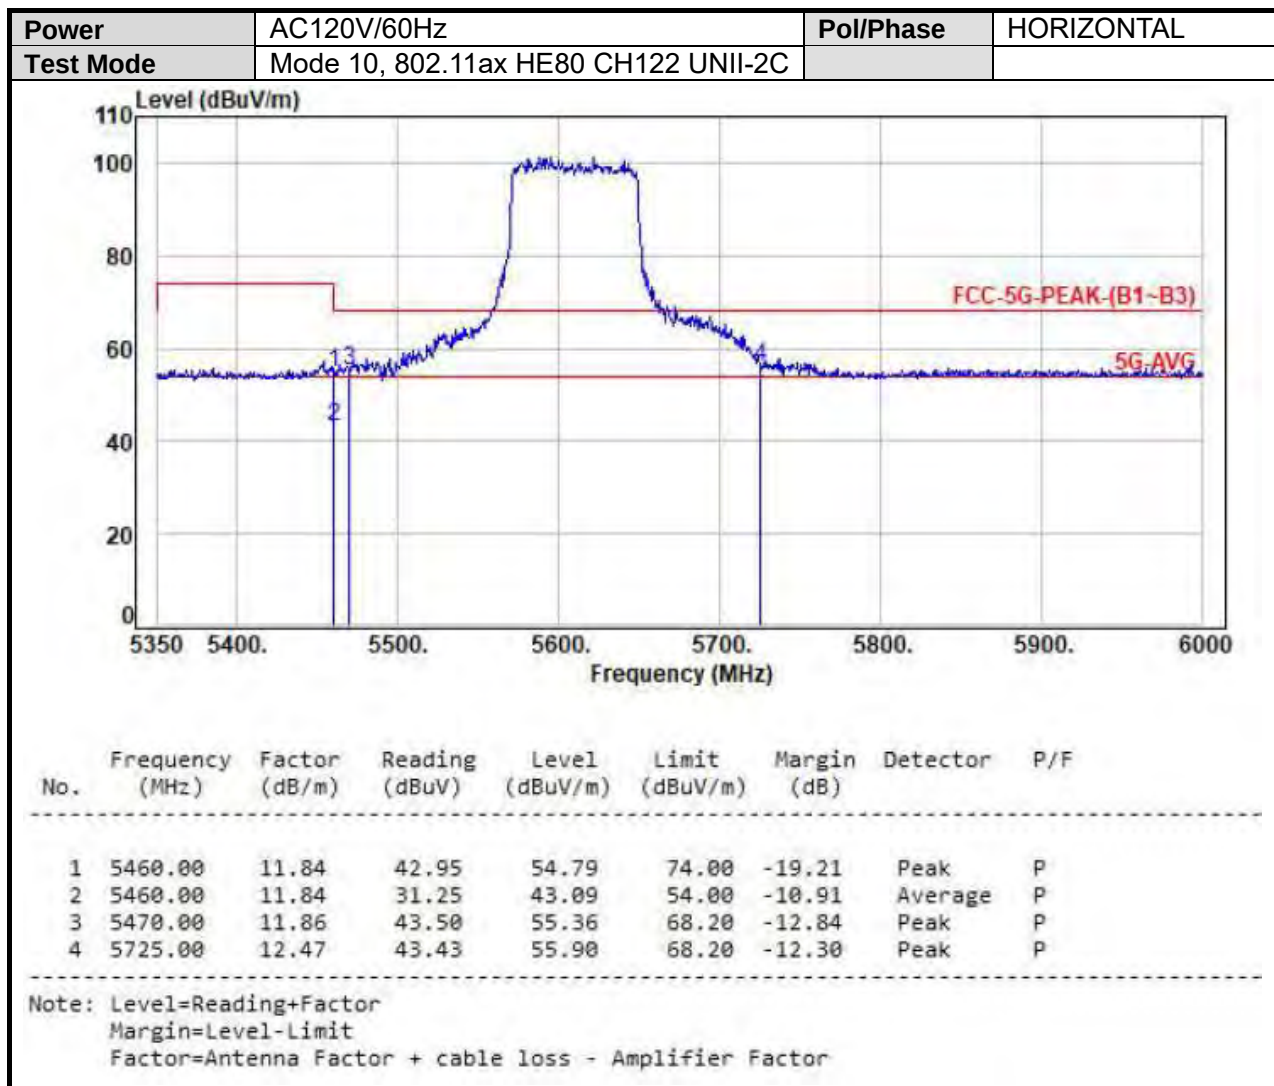


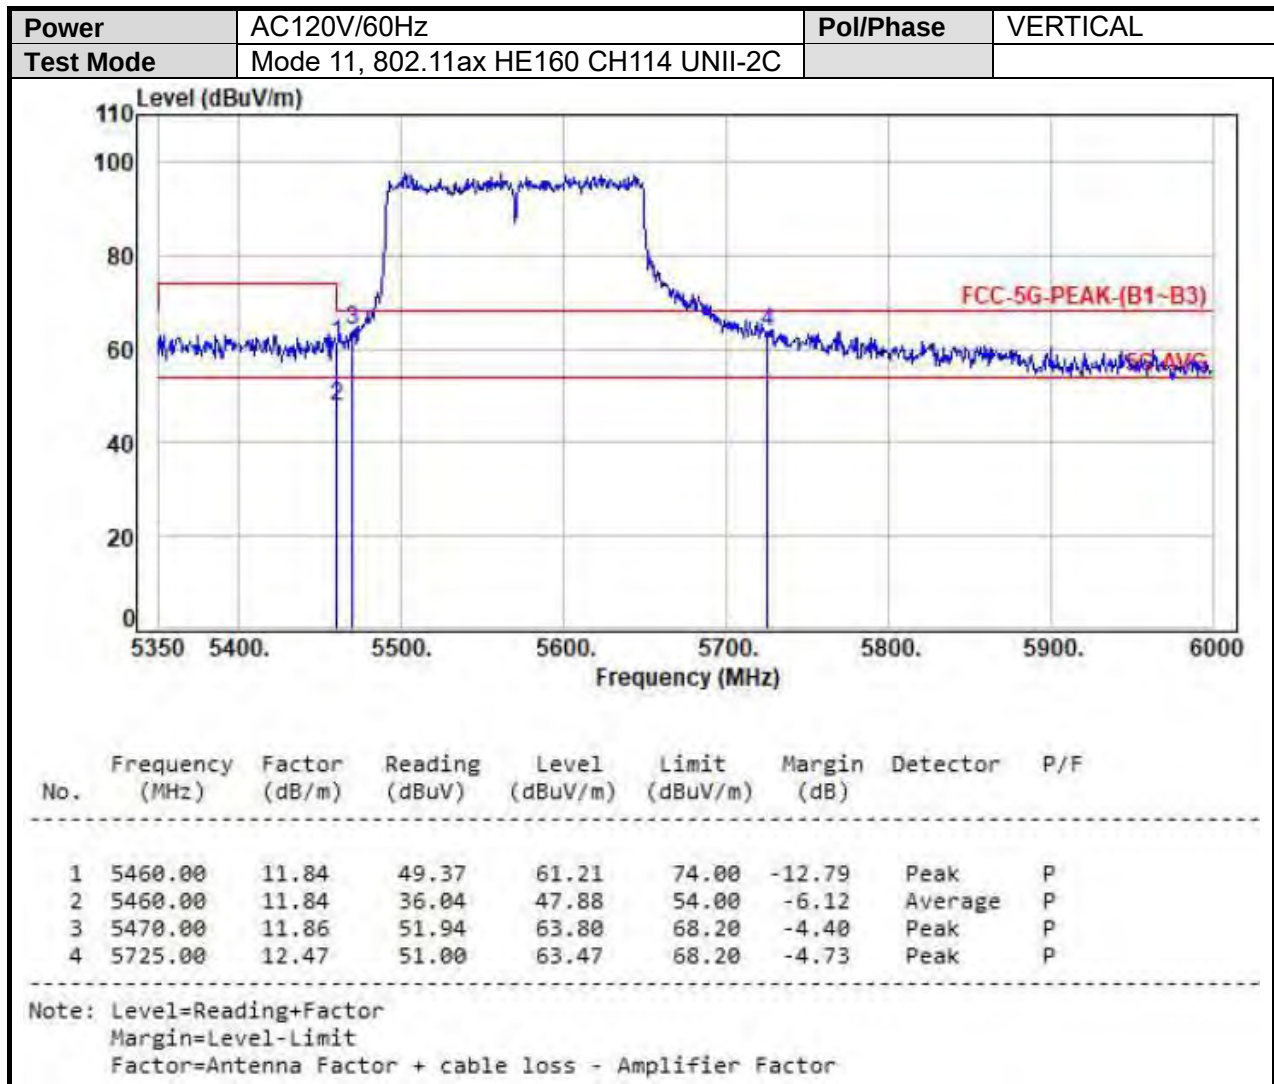


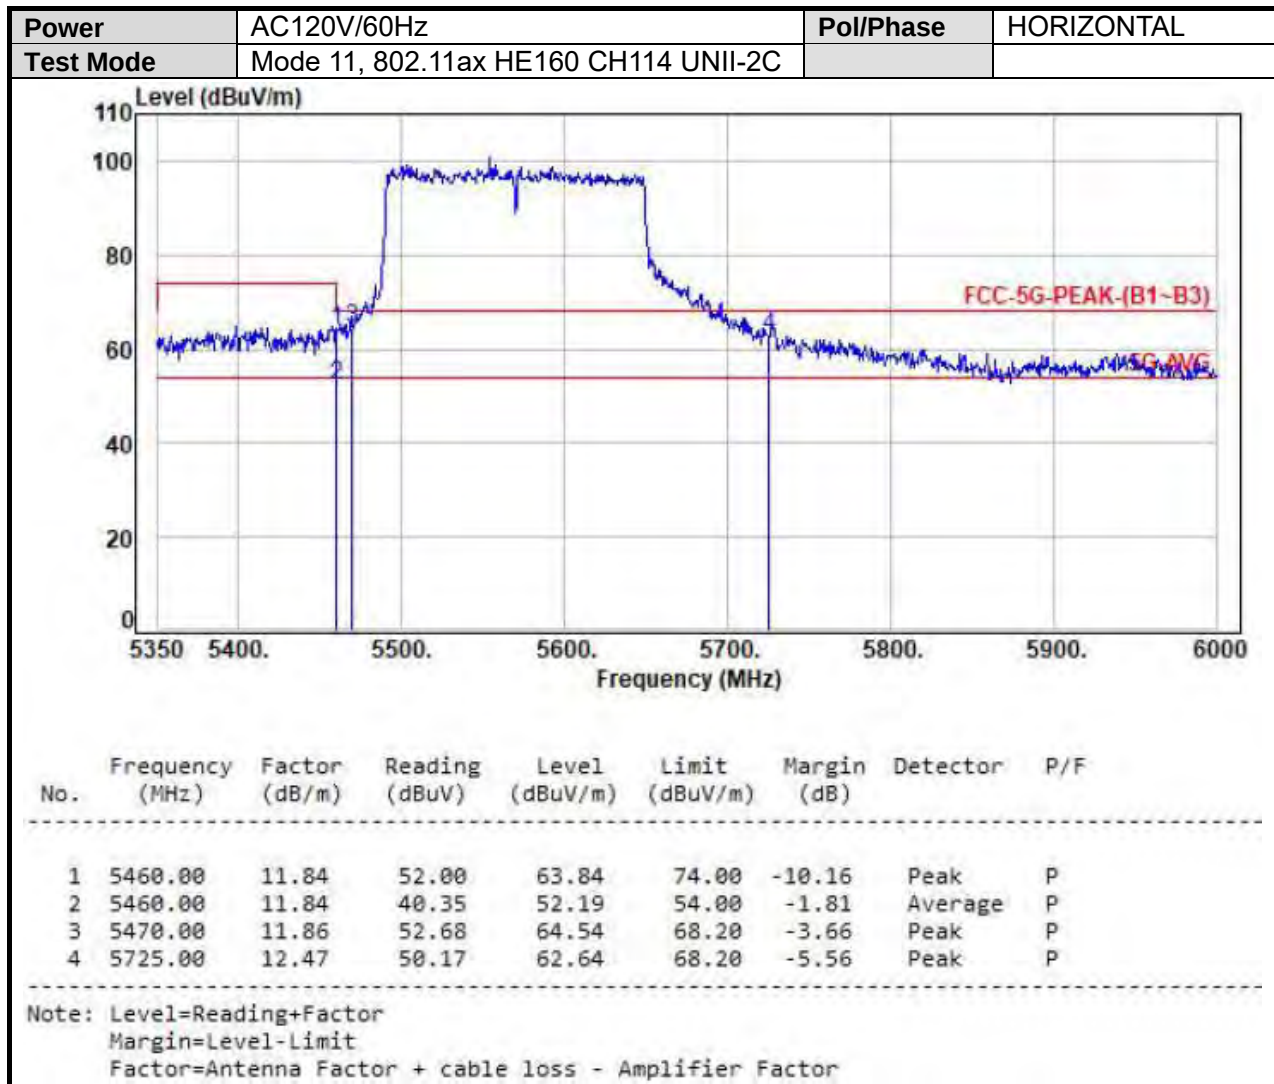






UNII-3

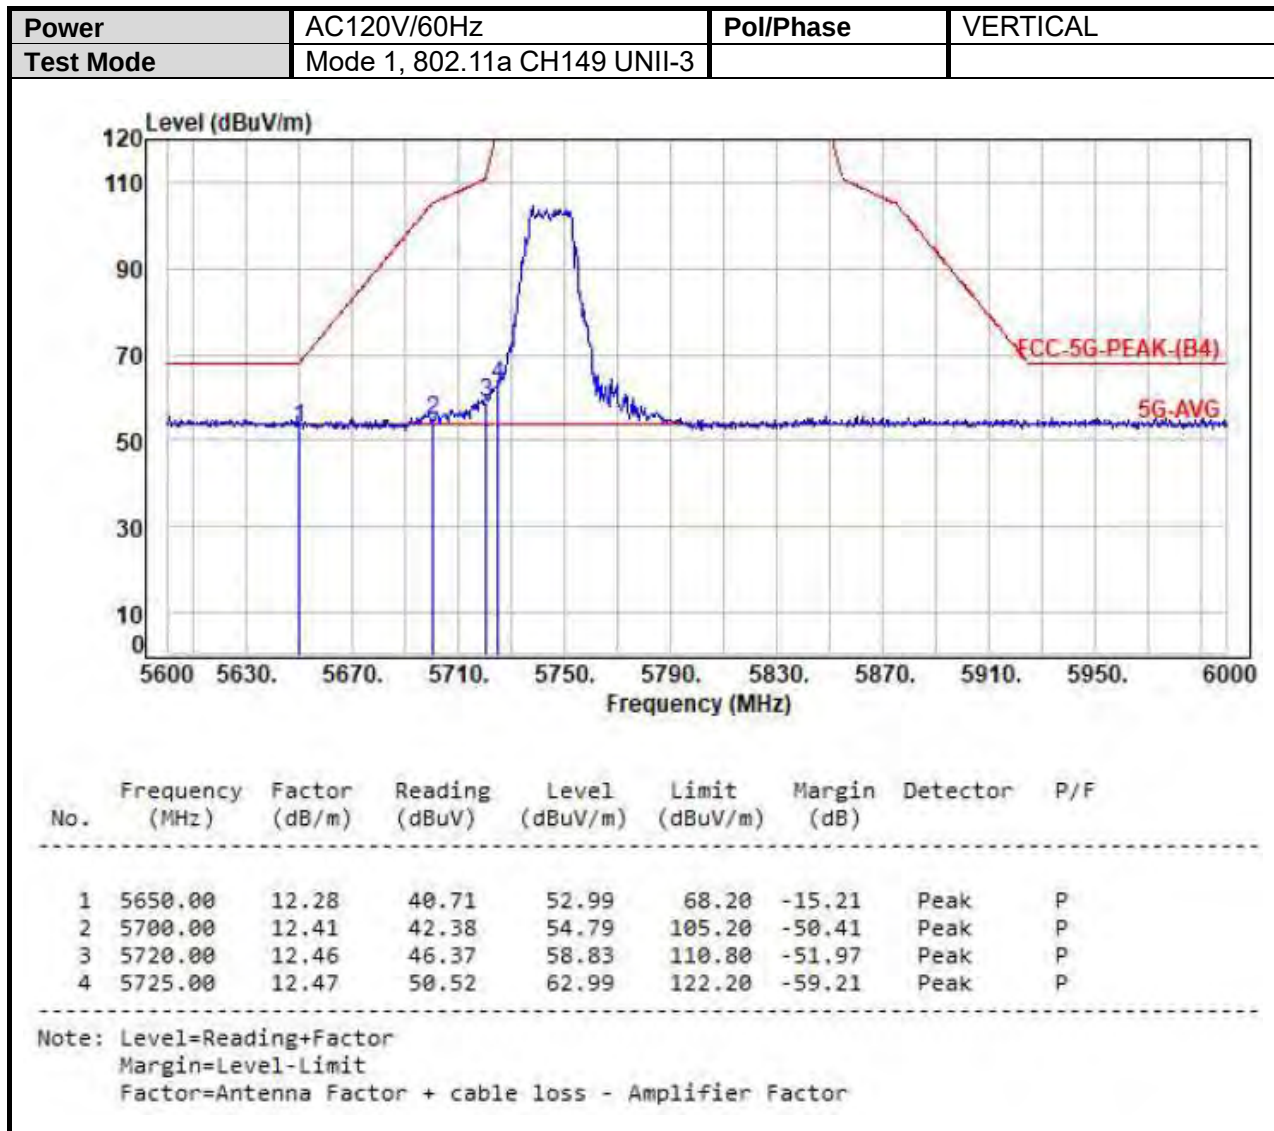


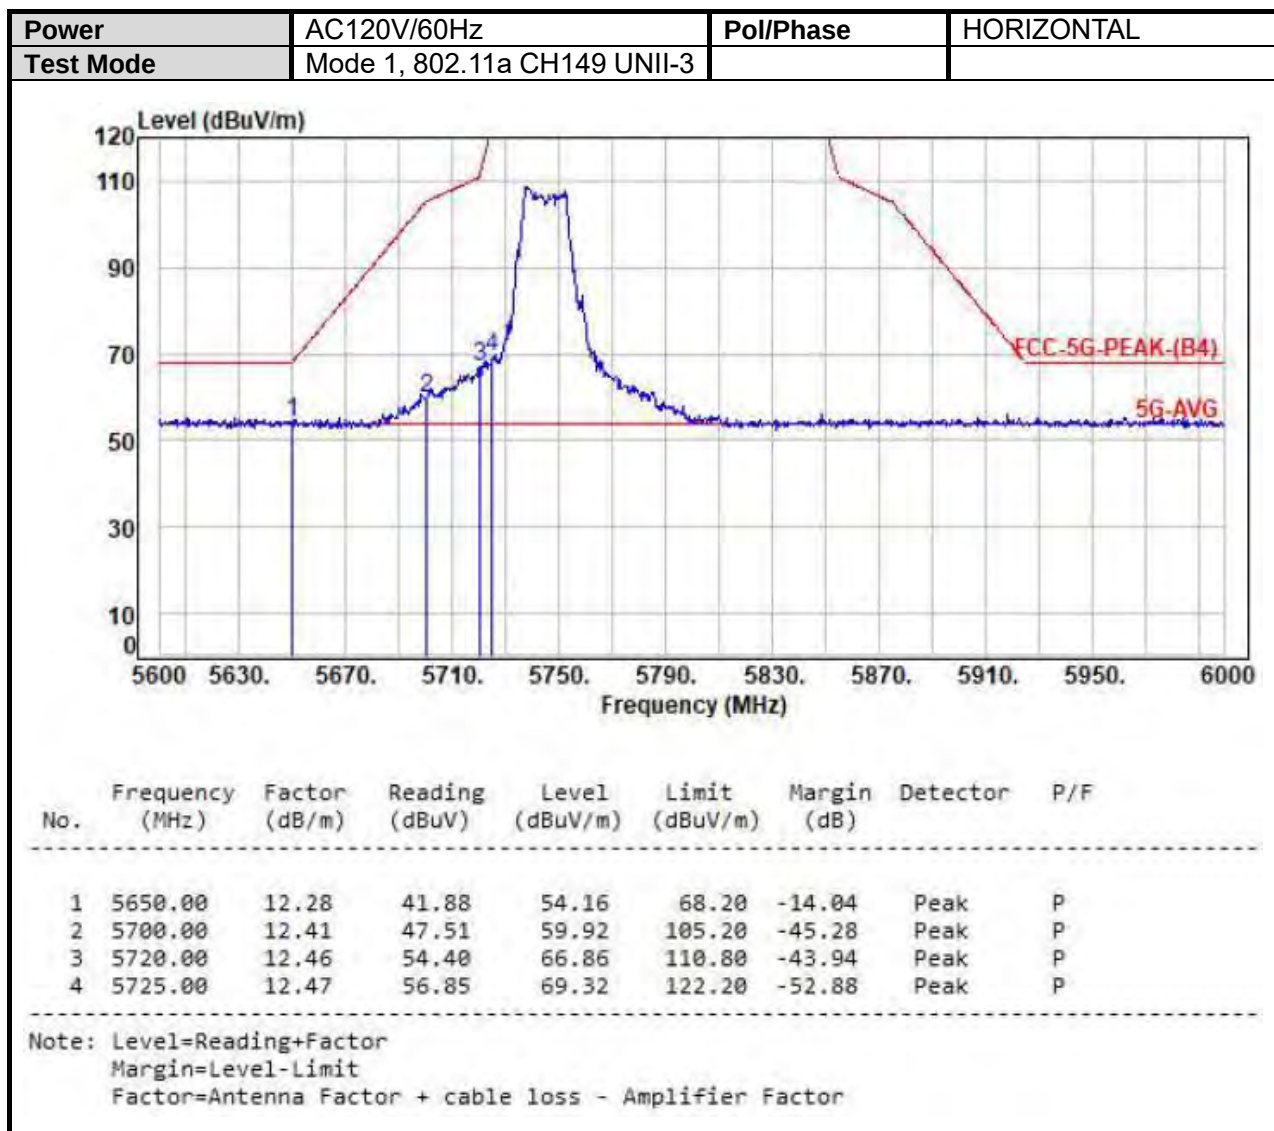


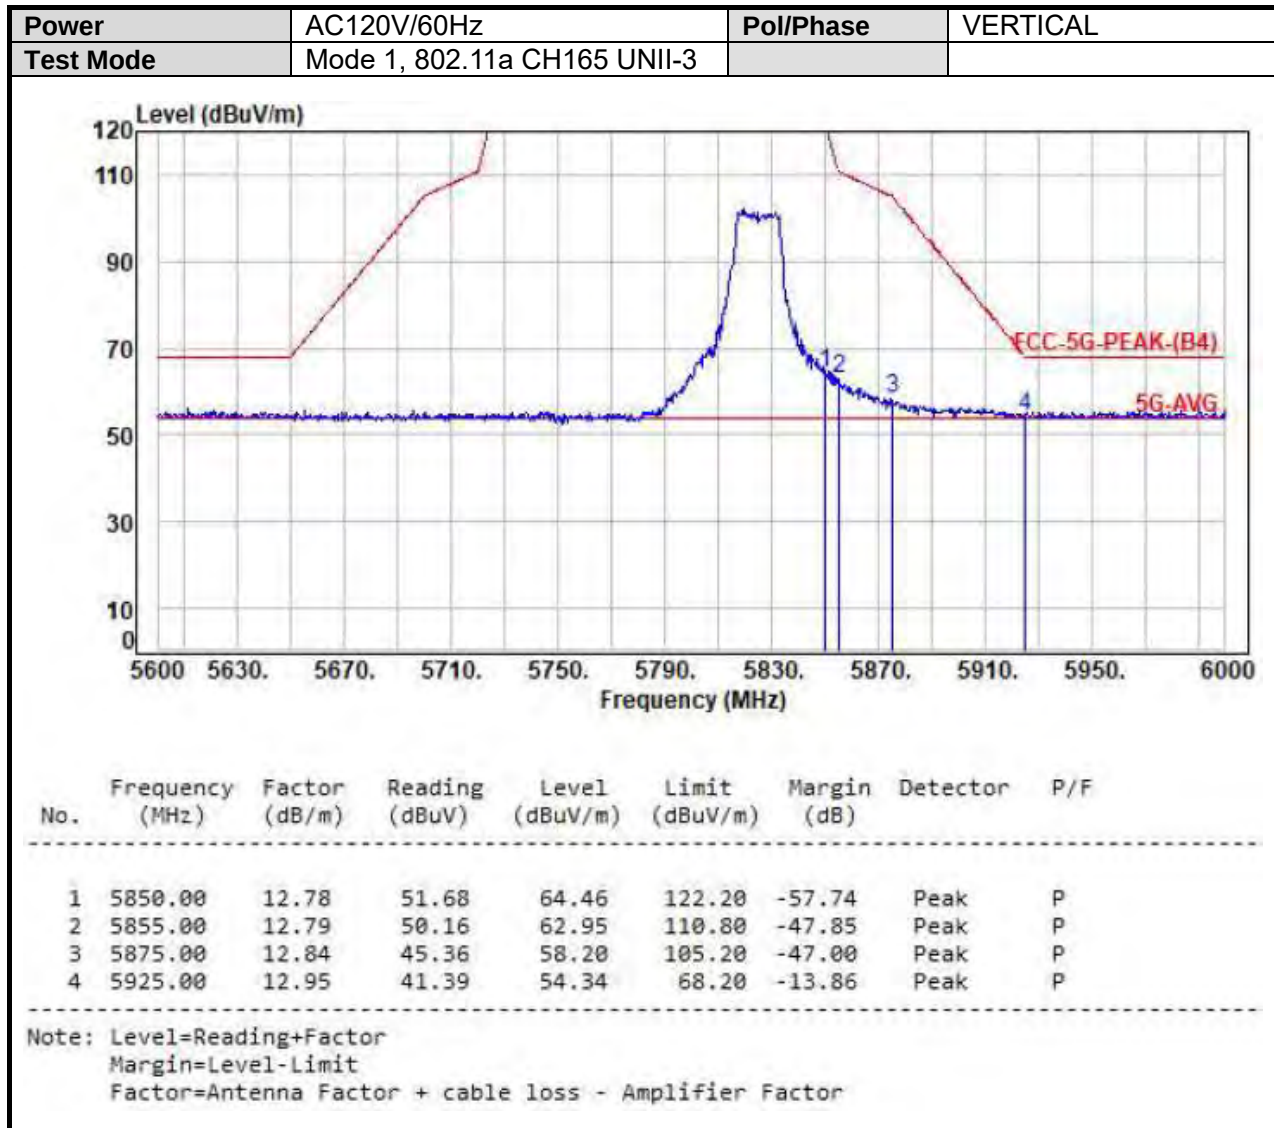


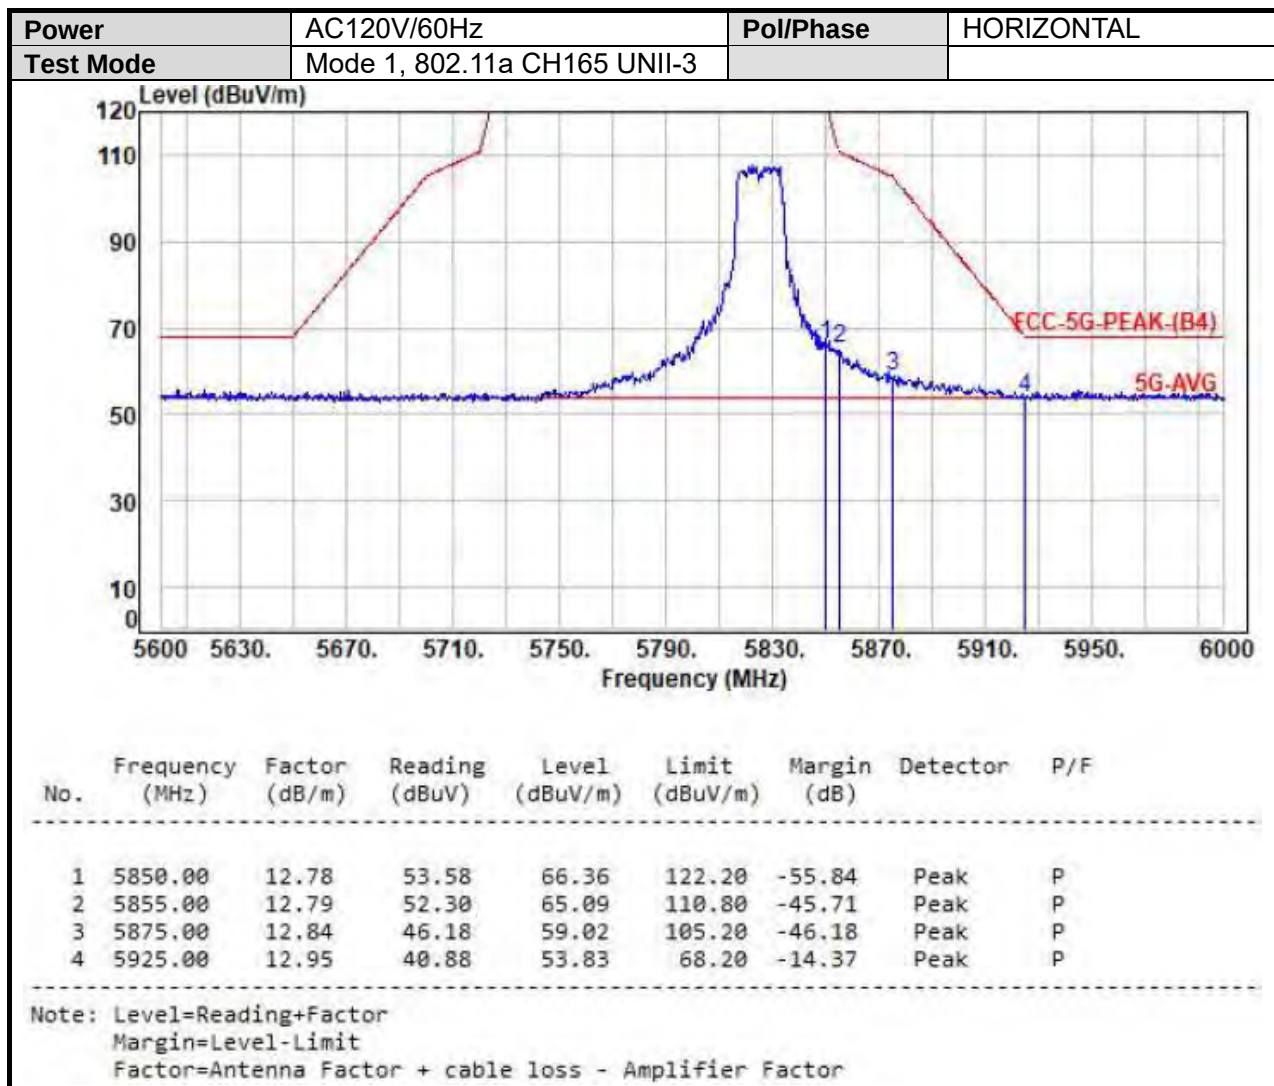


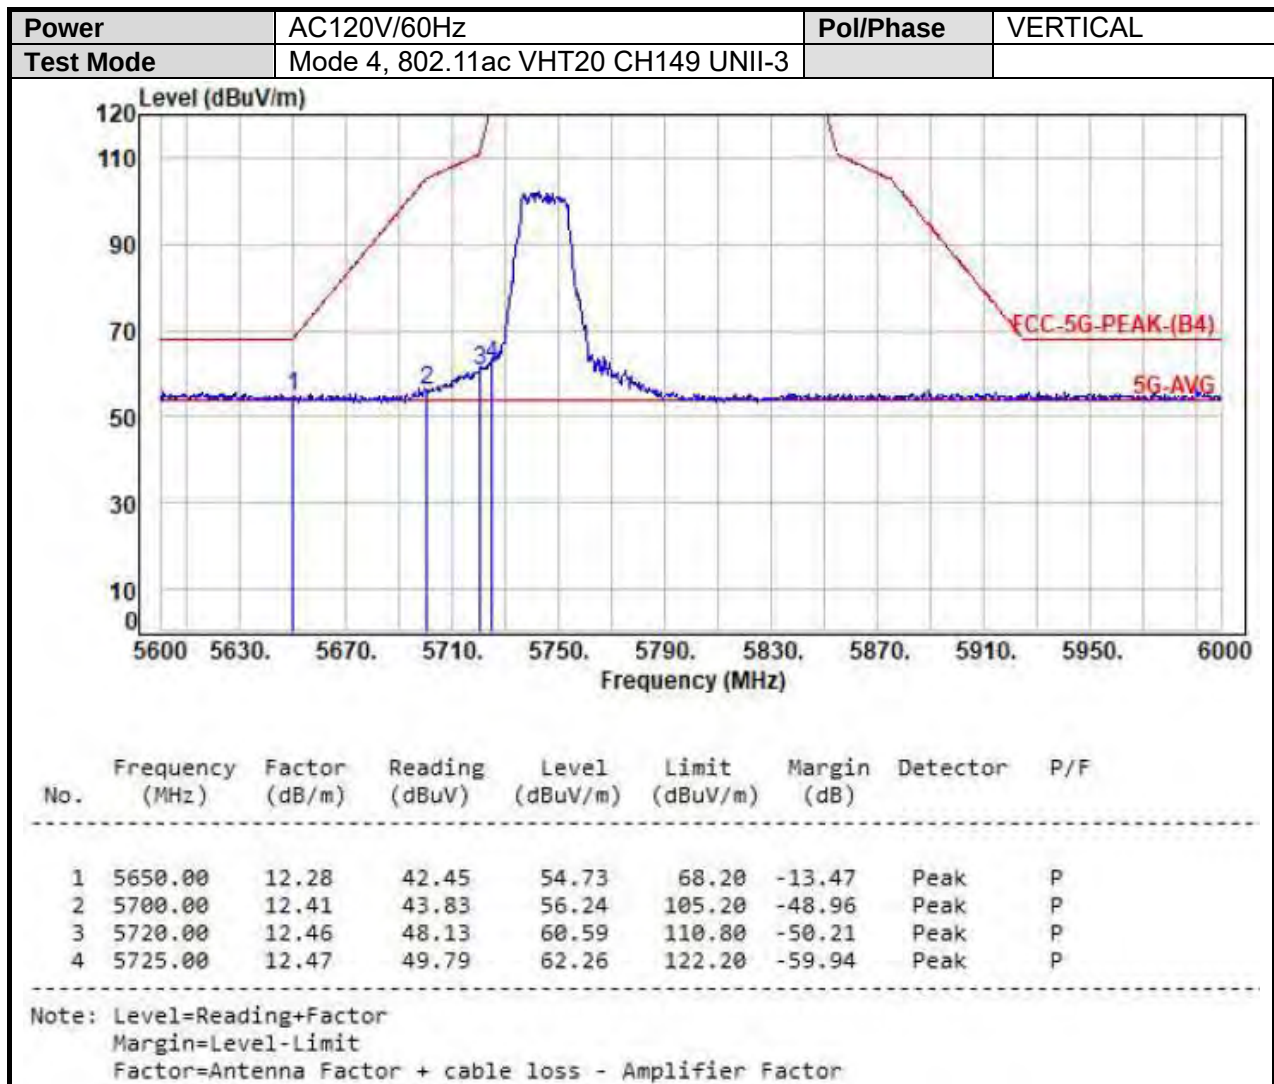


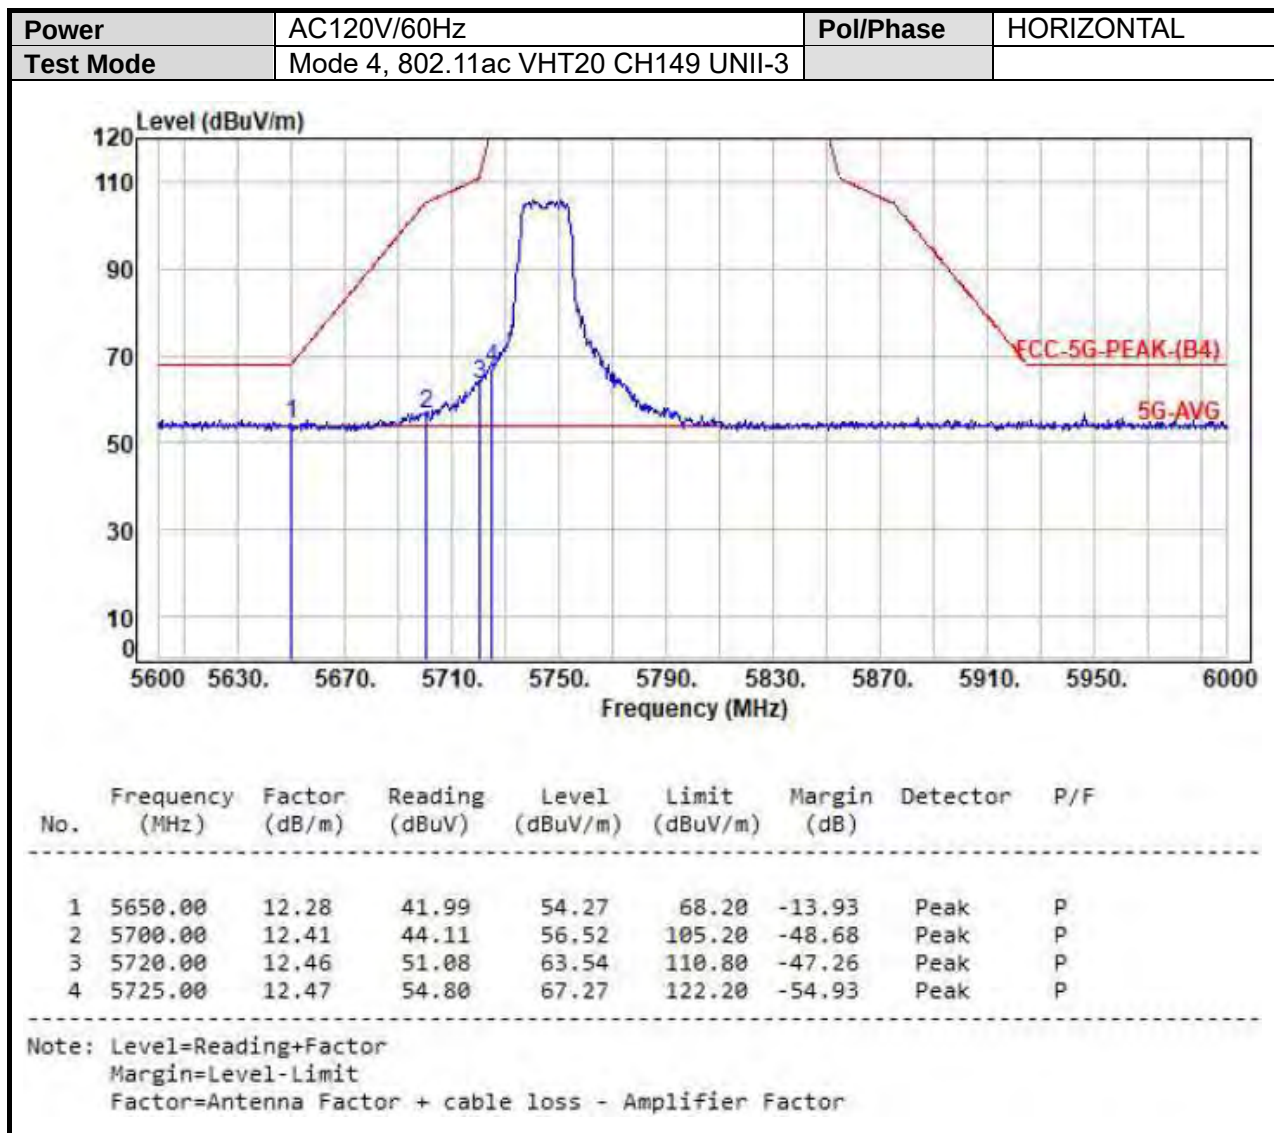


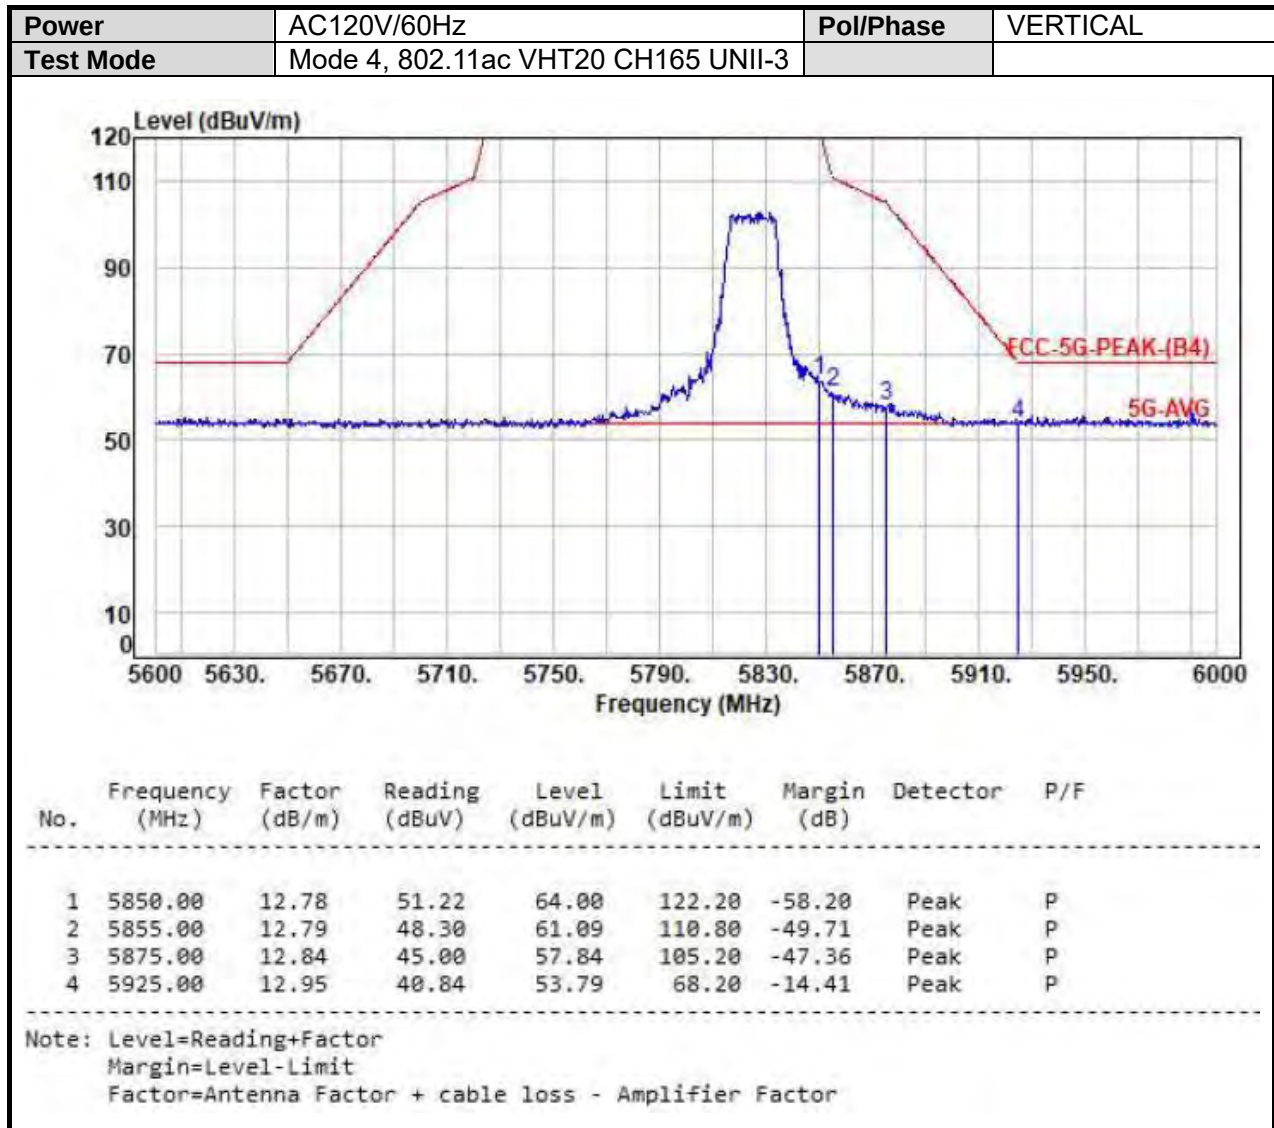


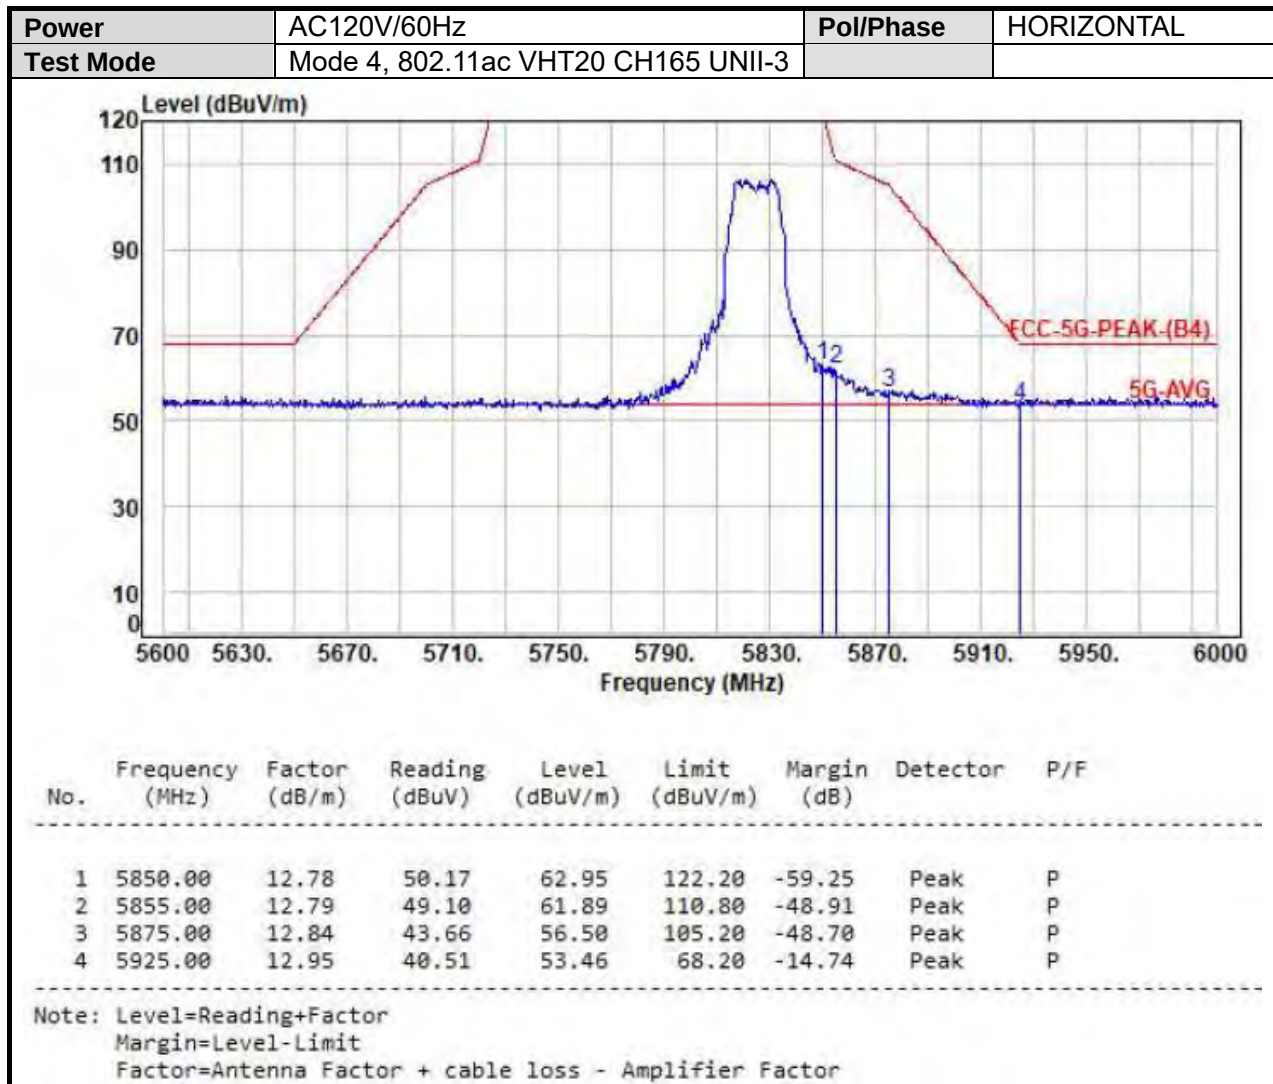


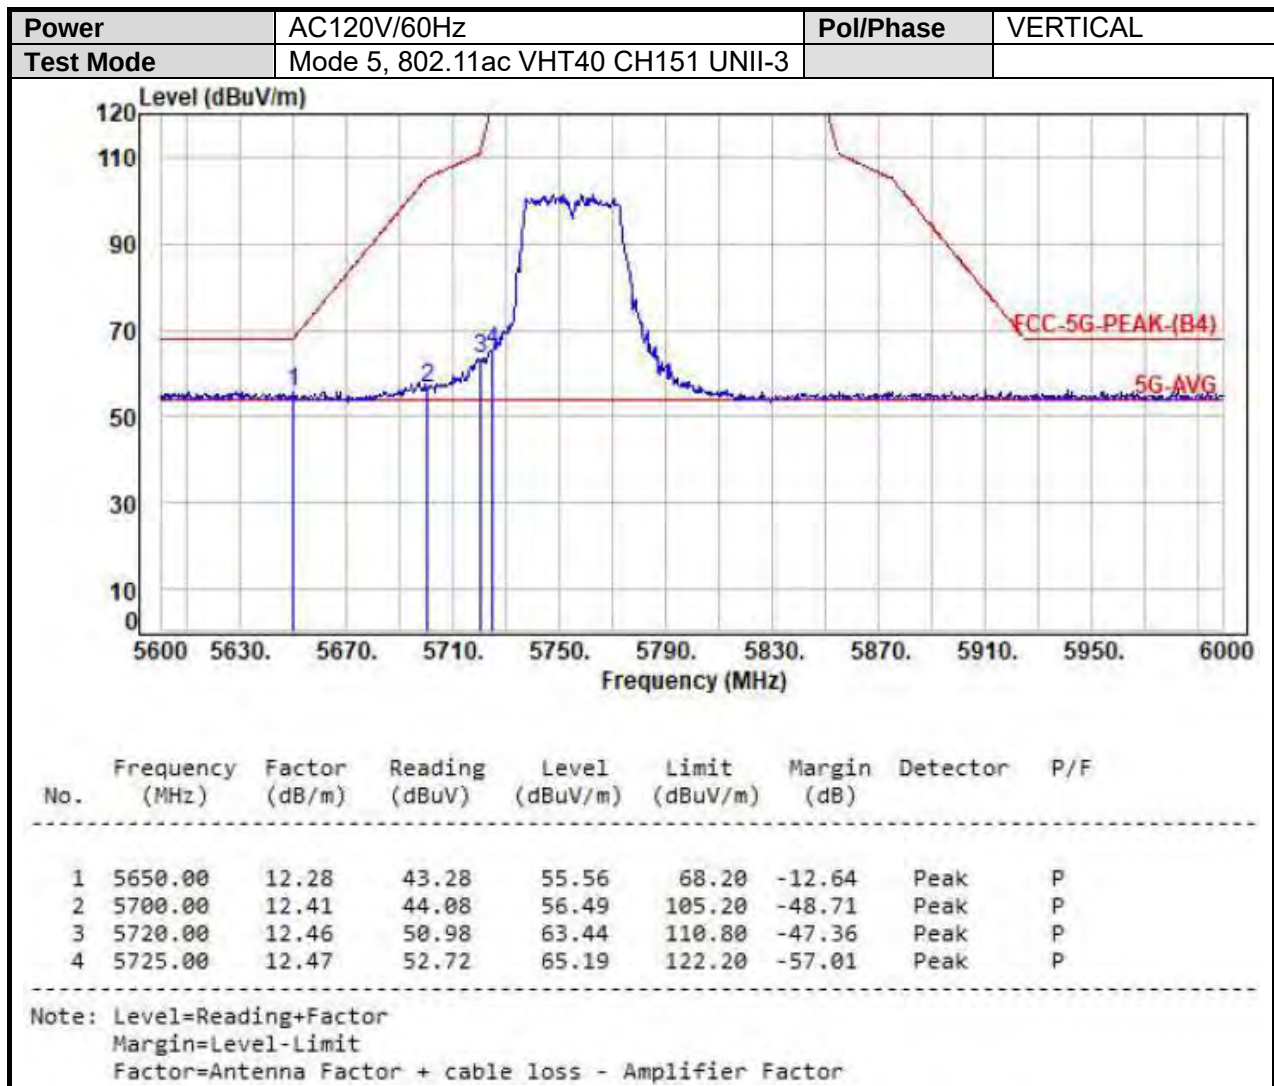


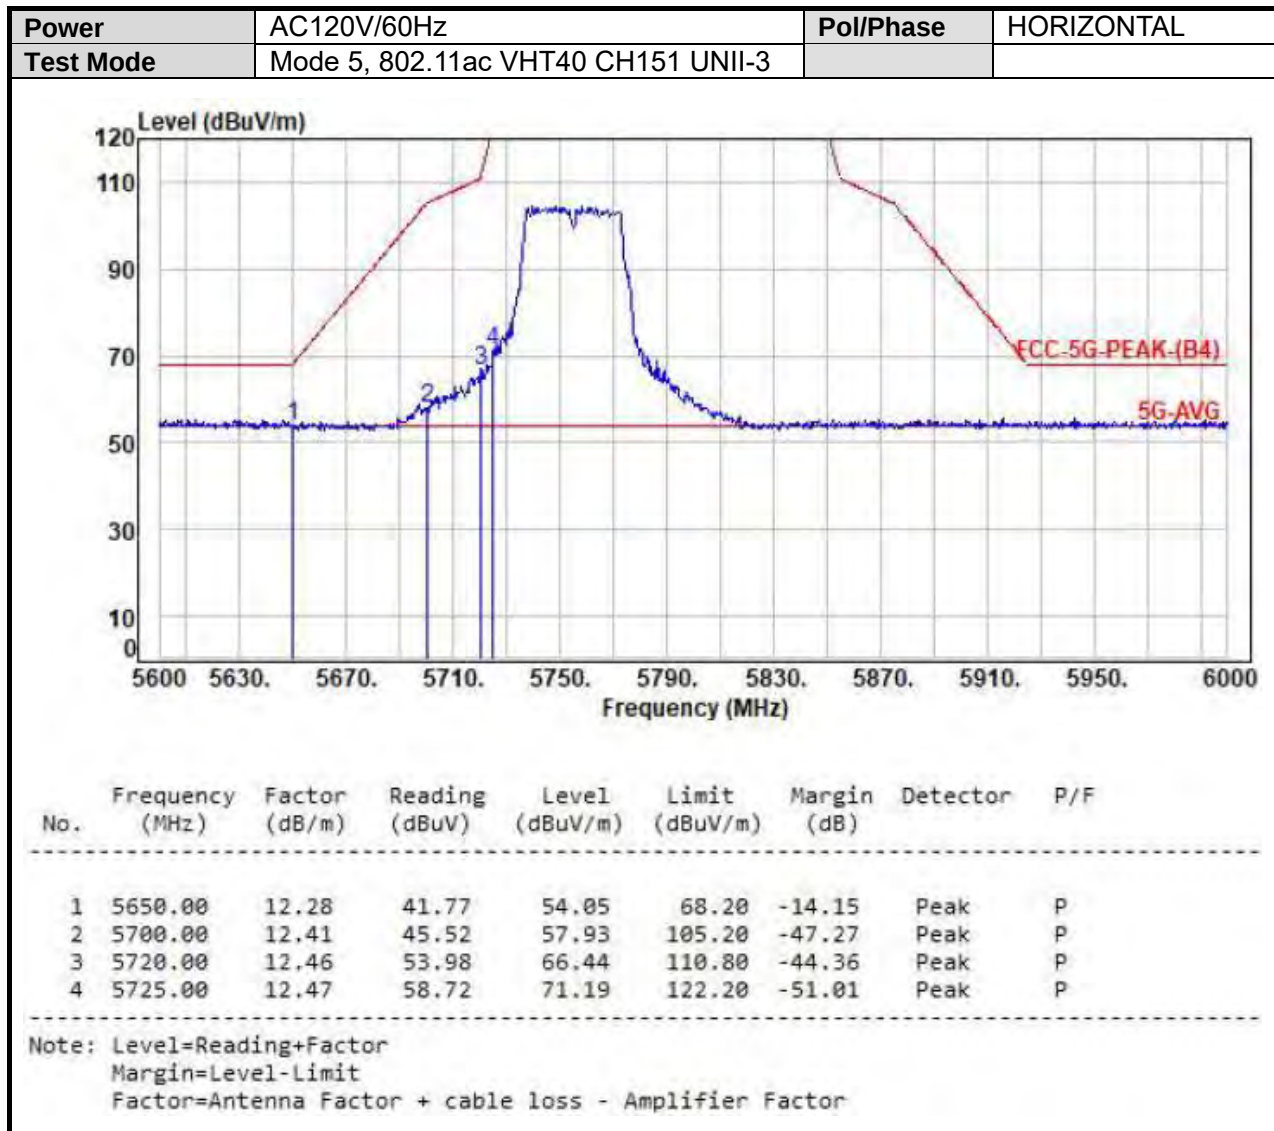


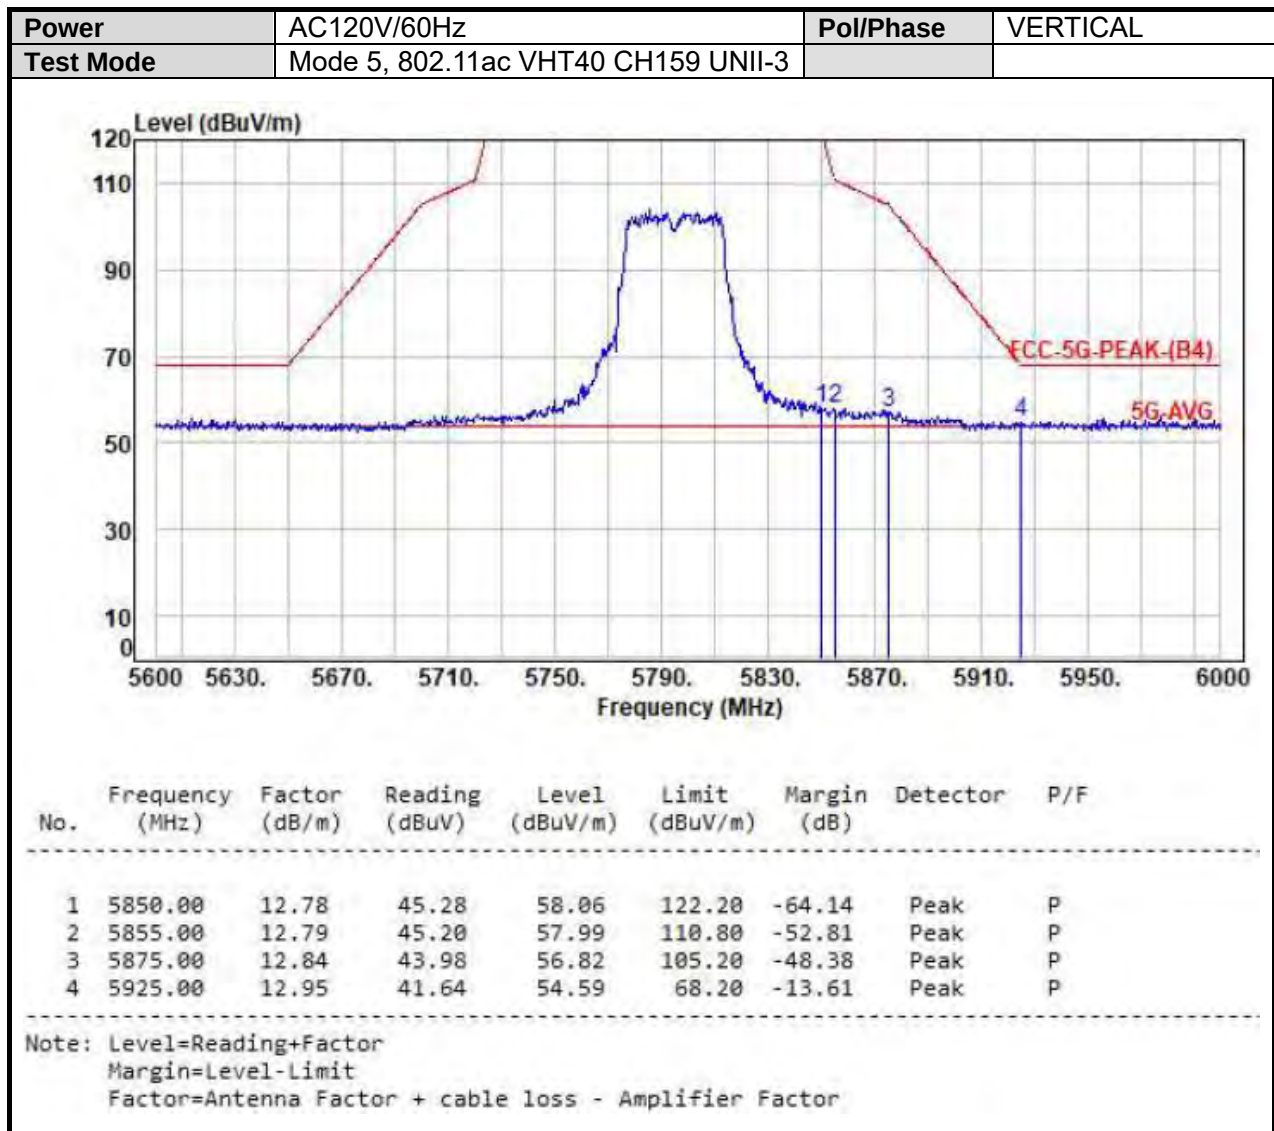


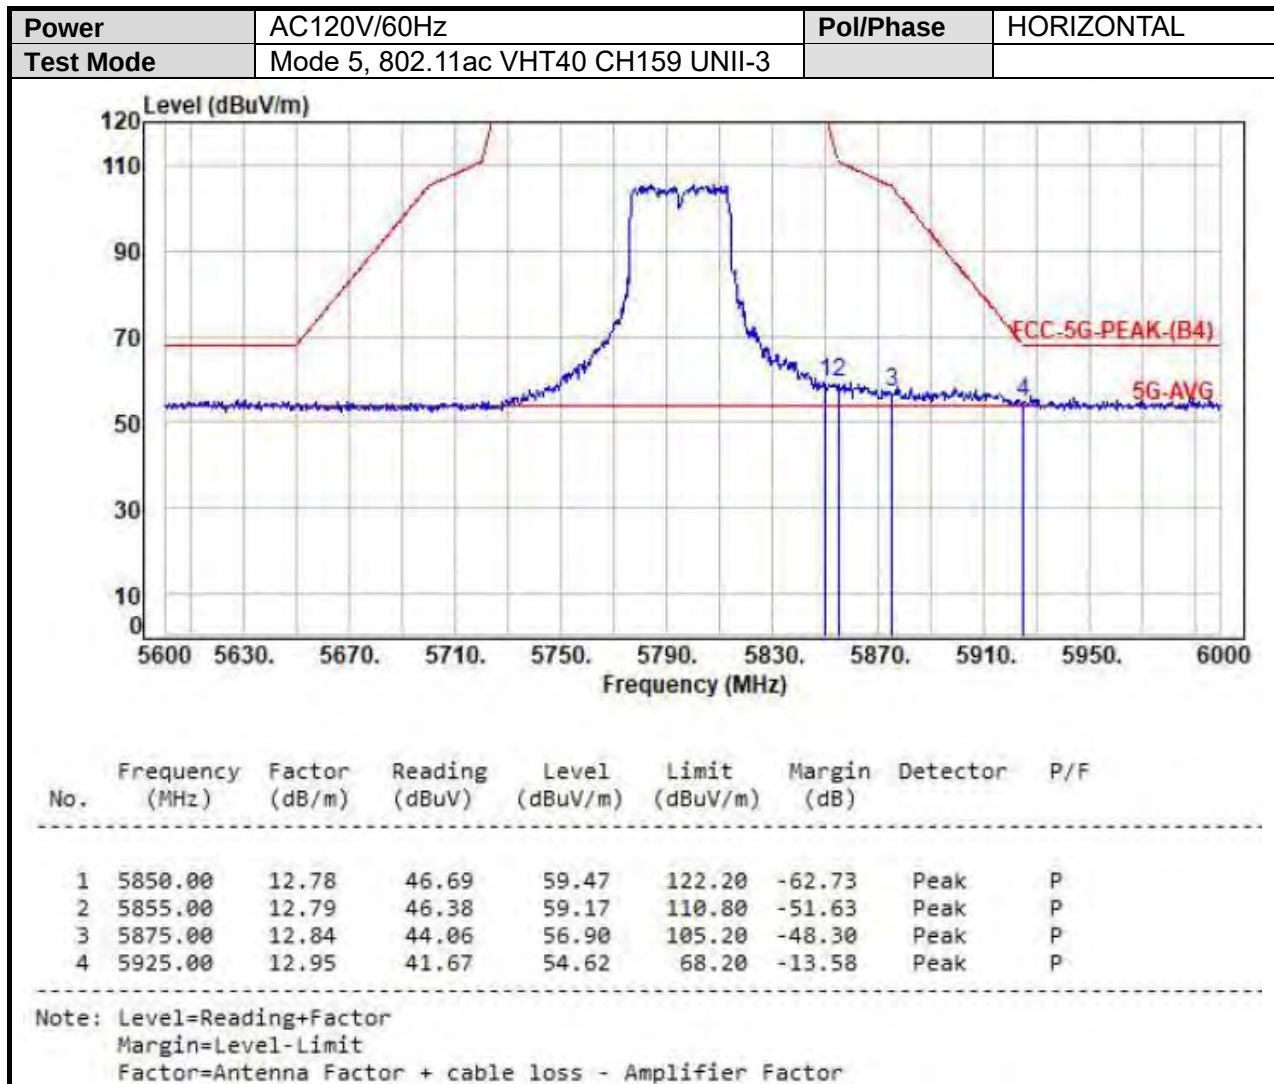


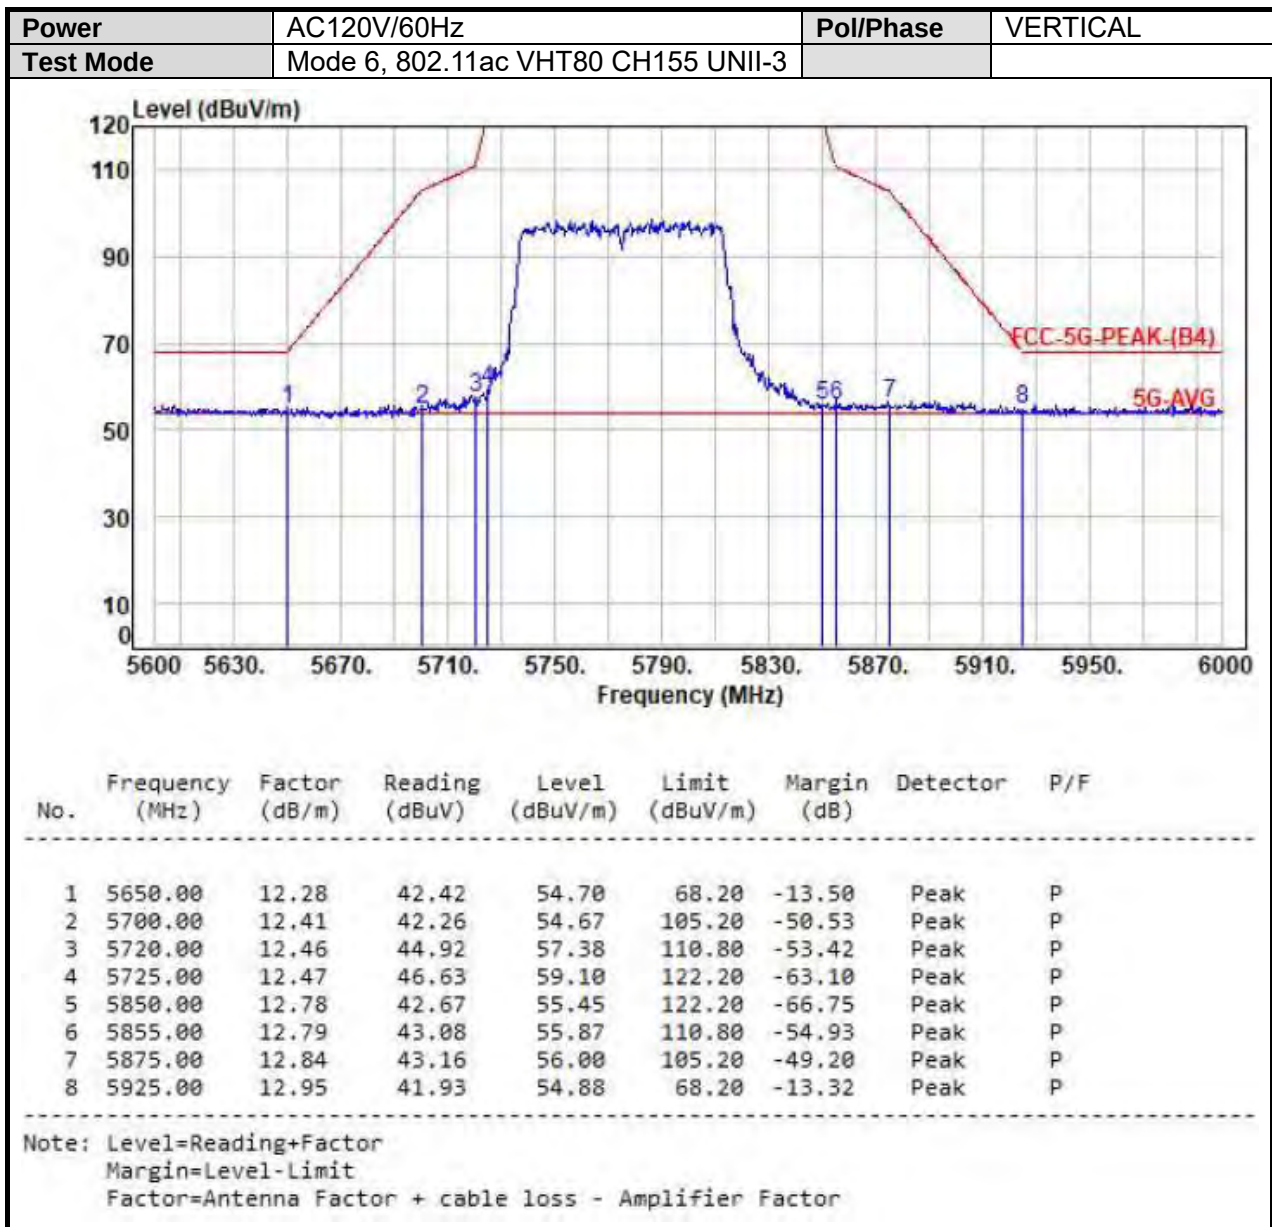


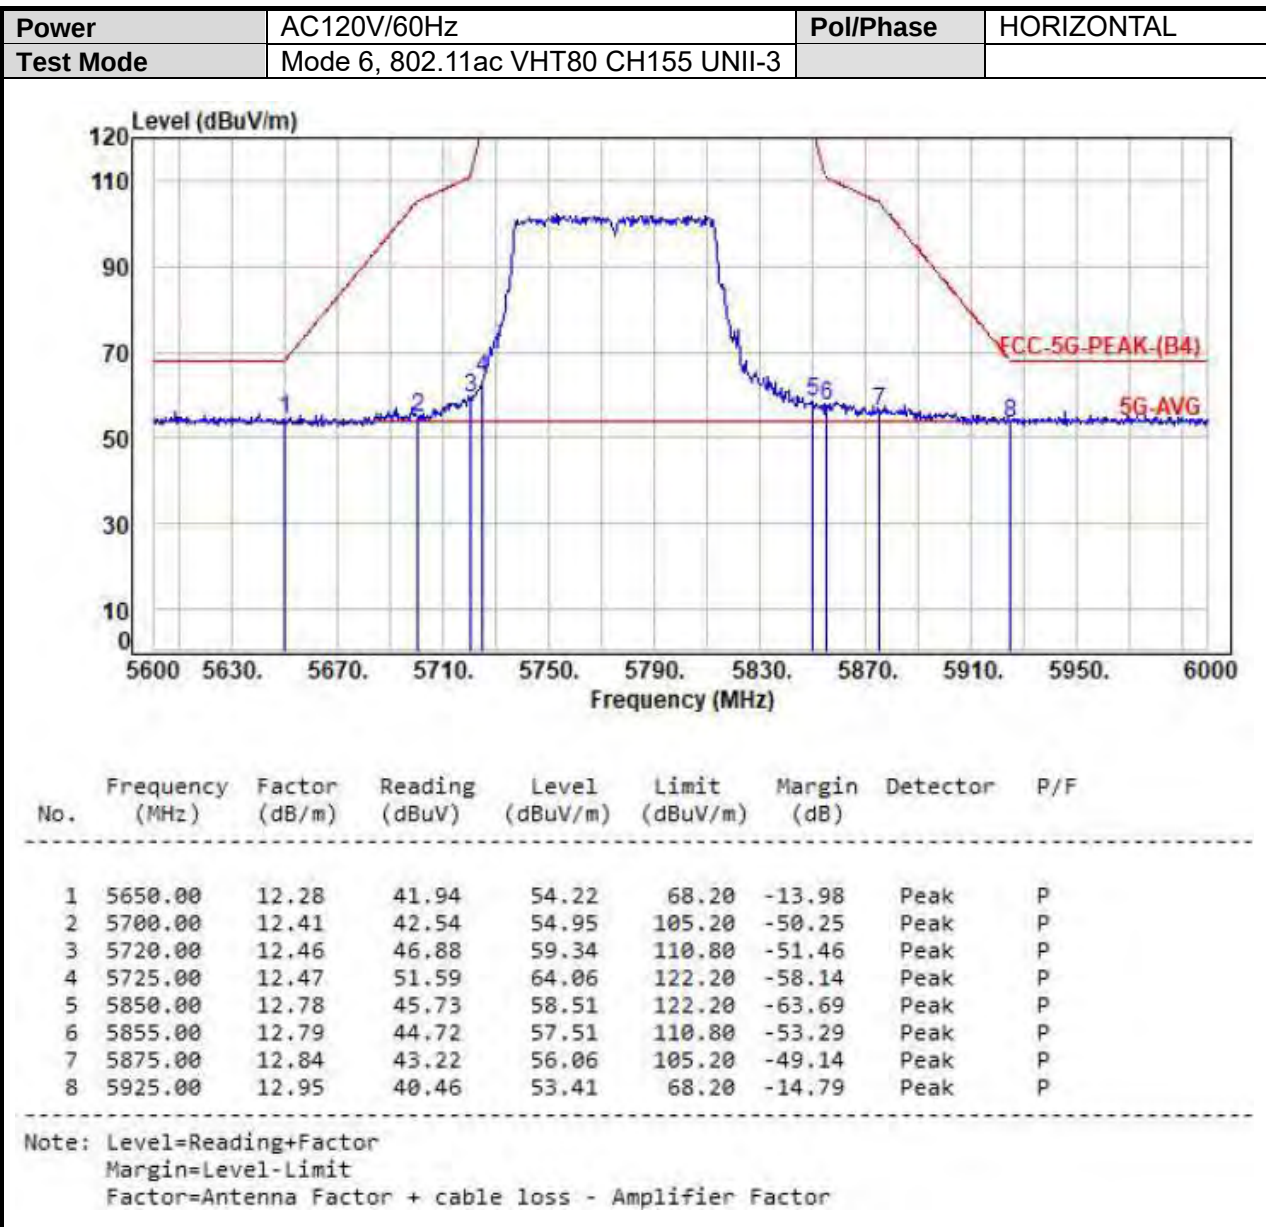


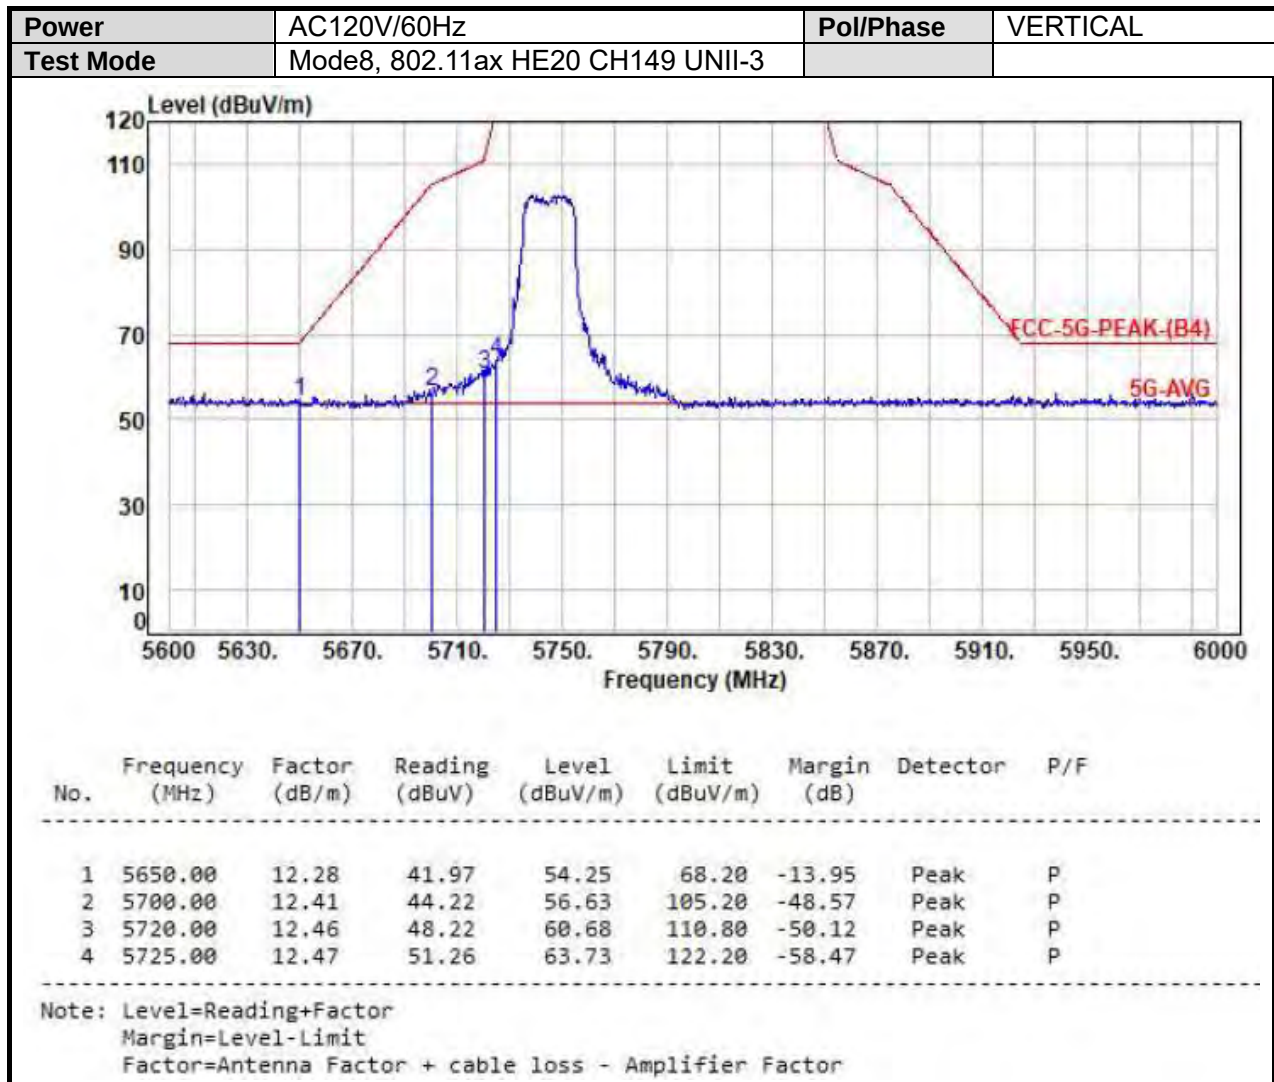


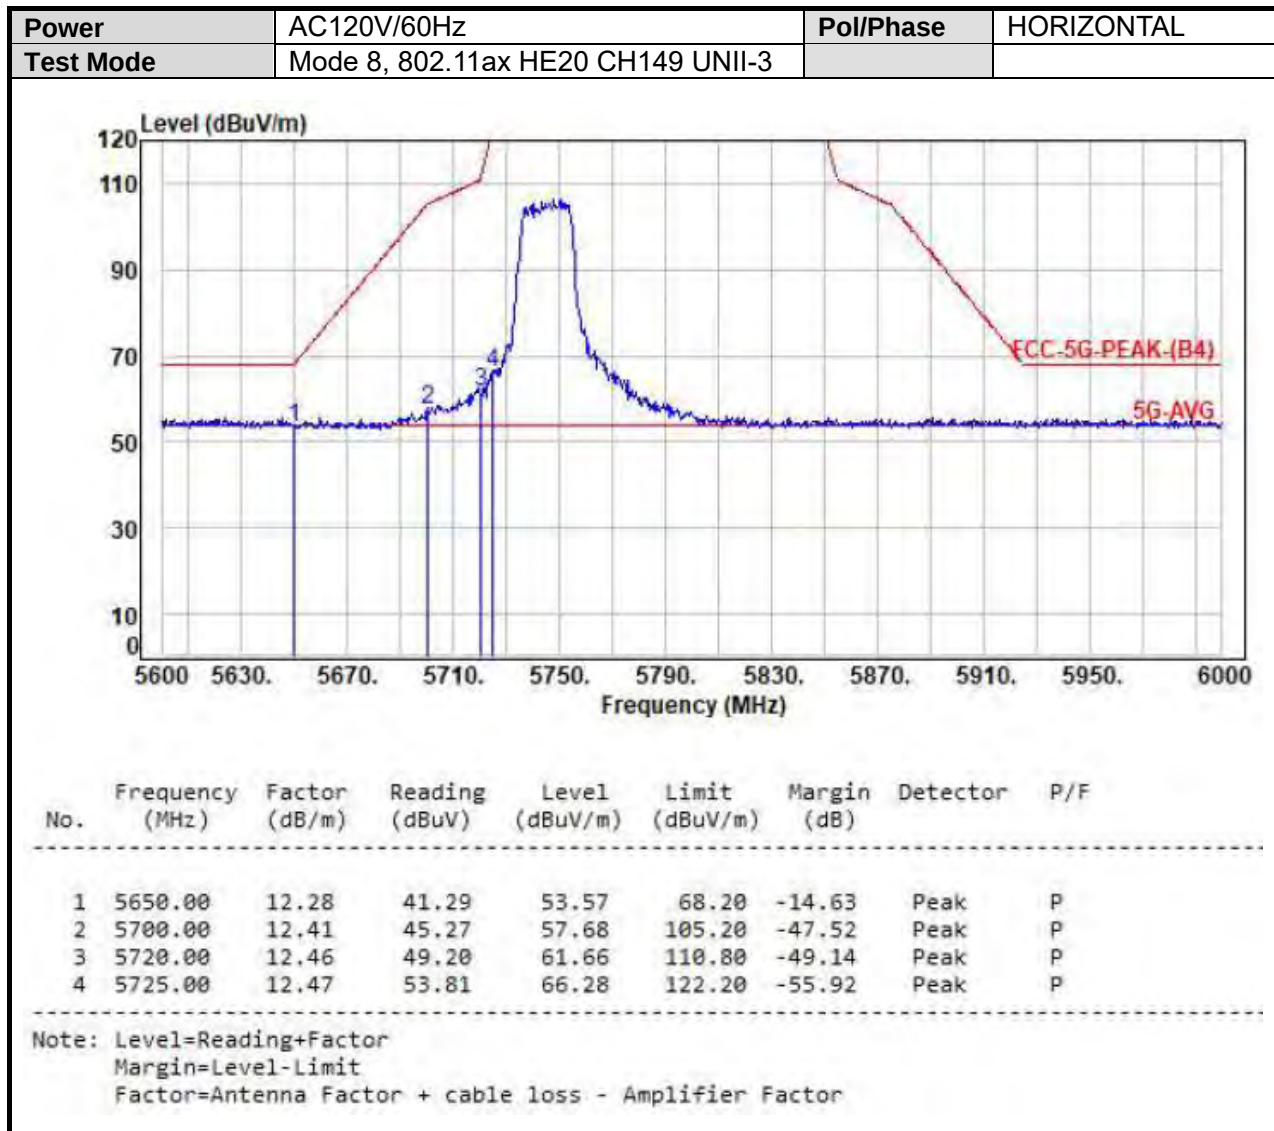


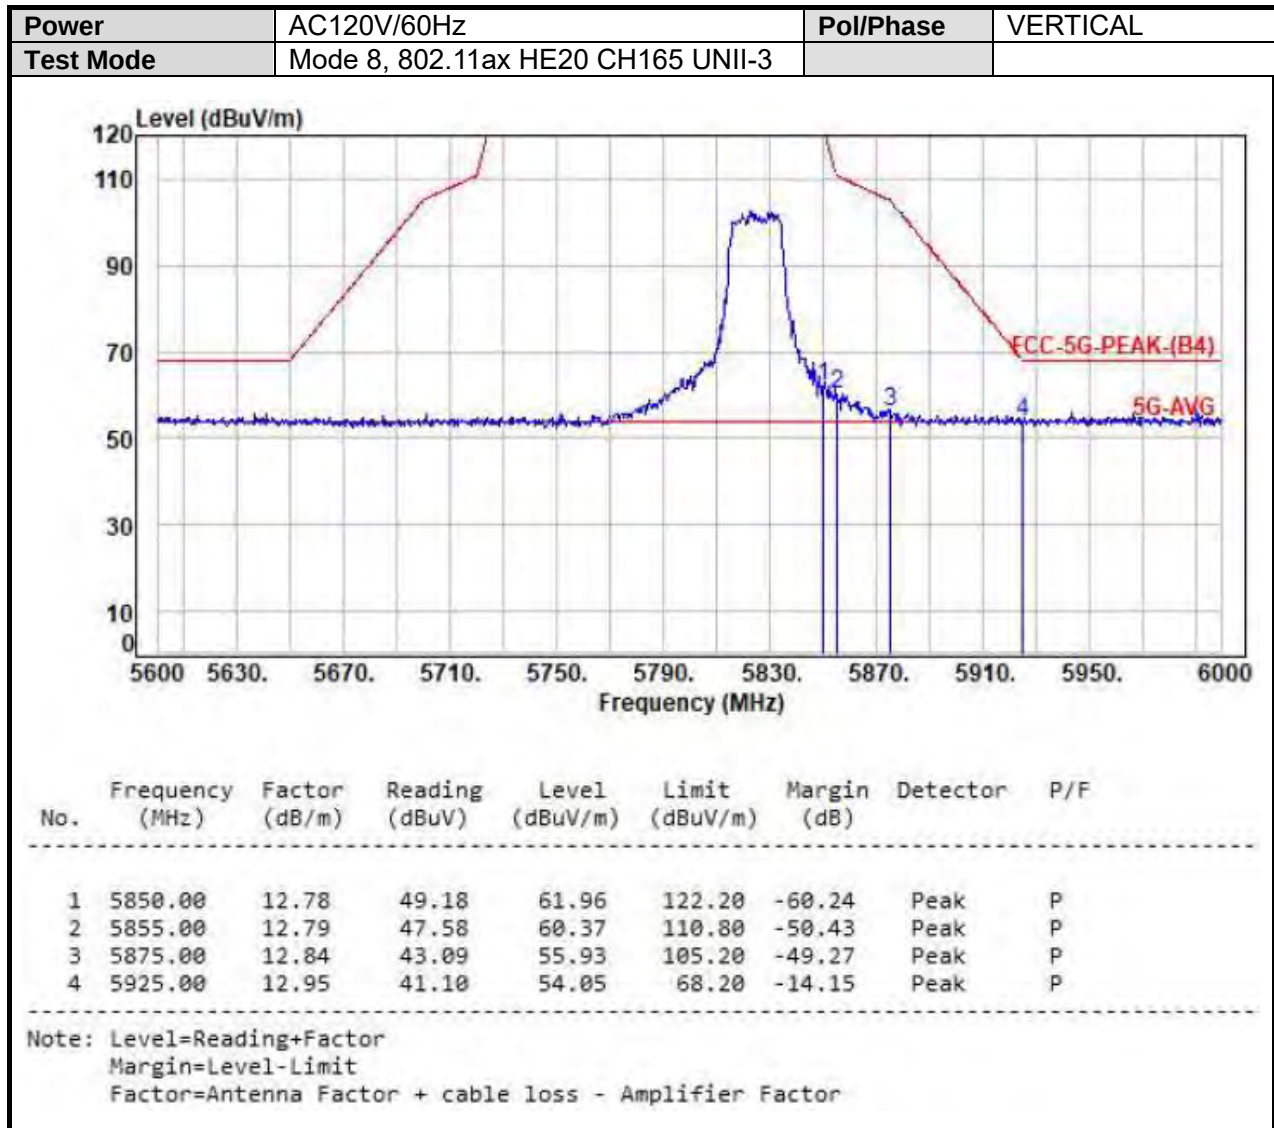


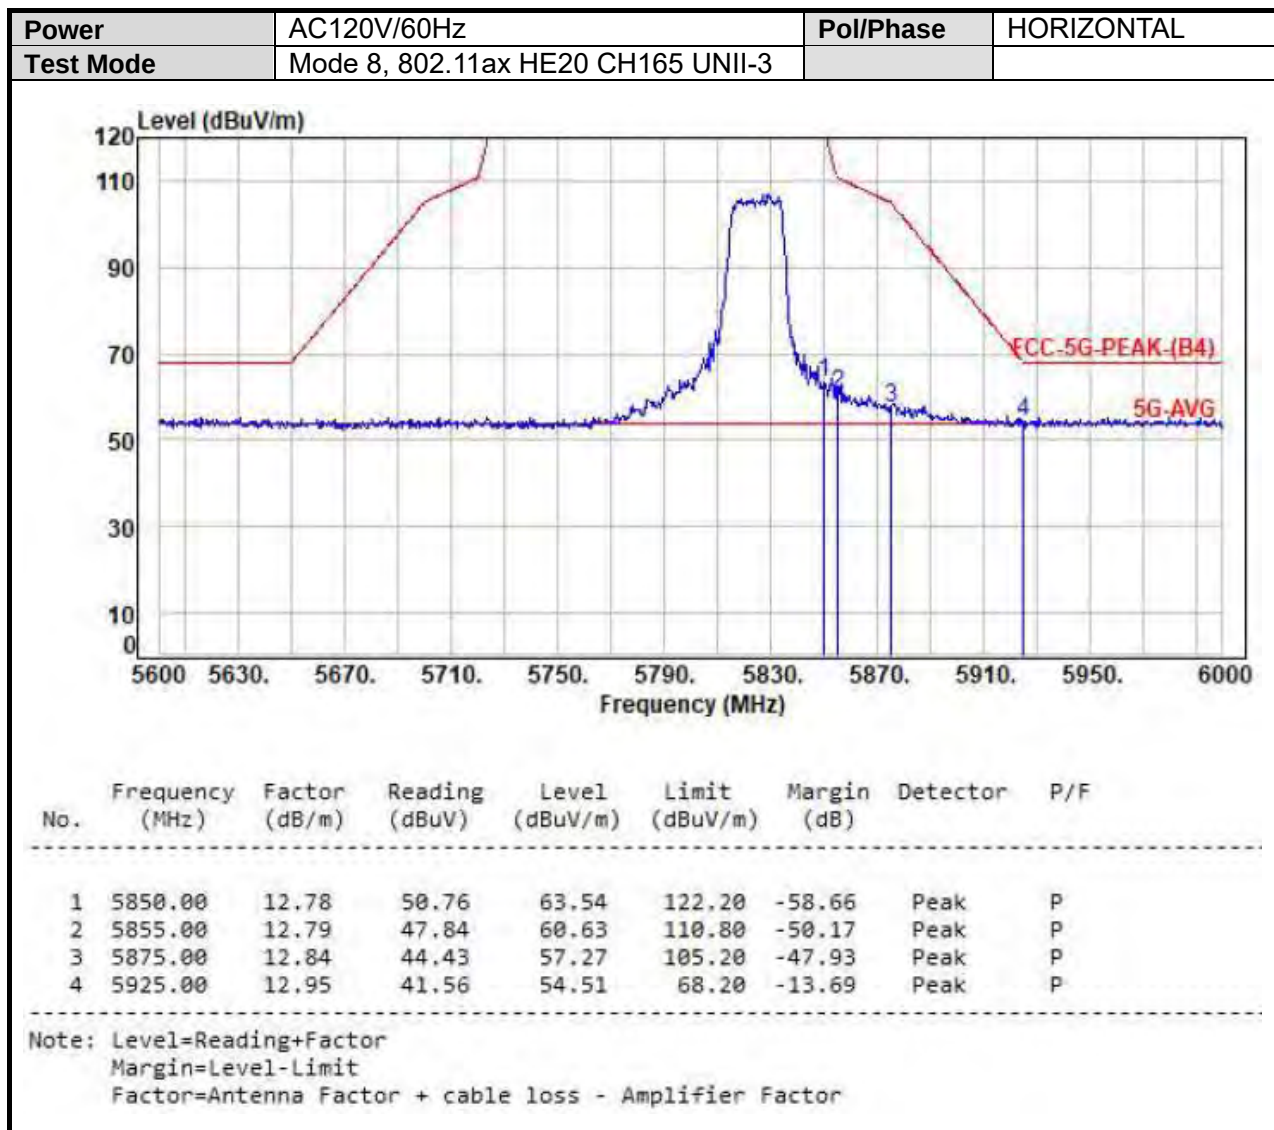

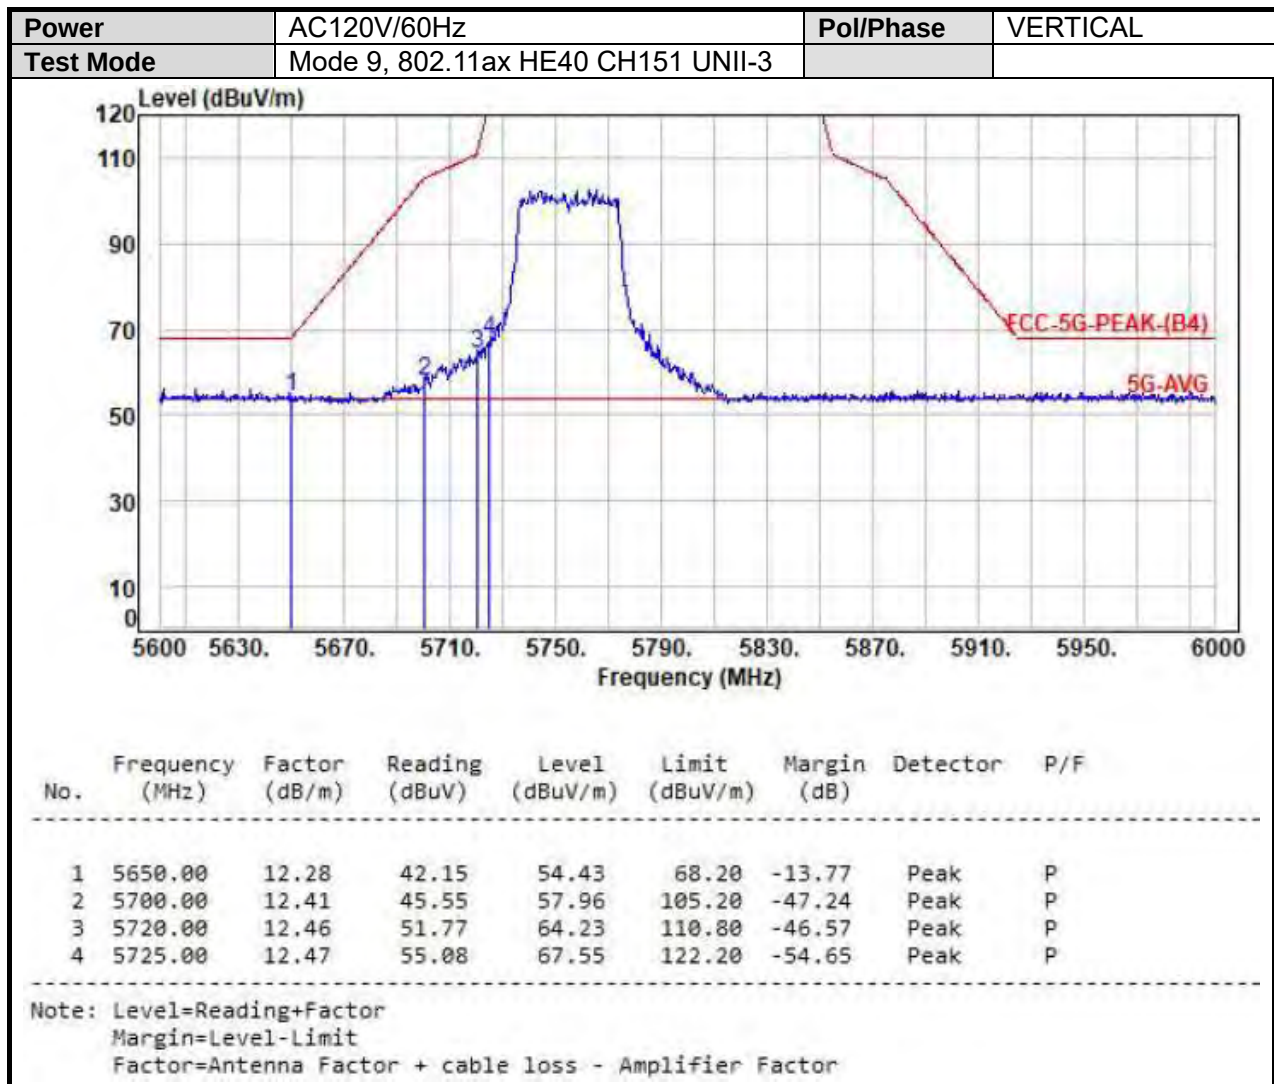

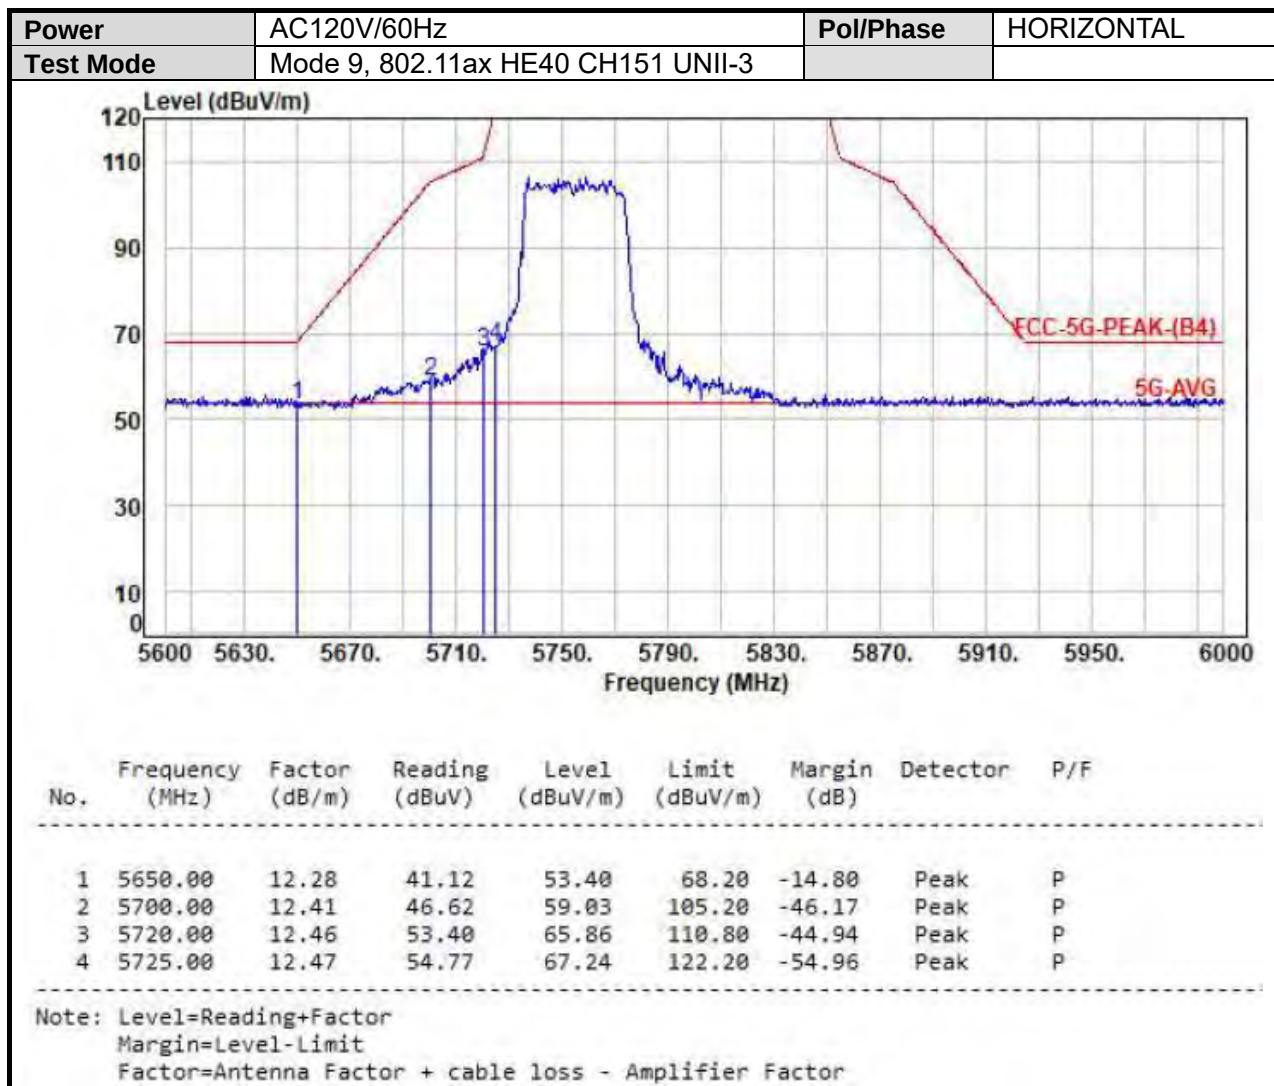


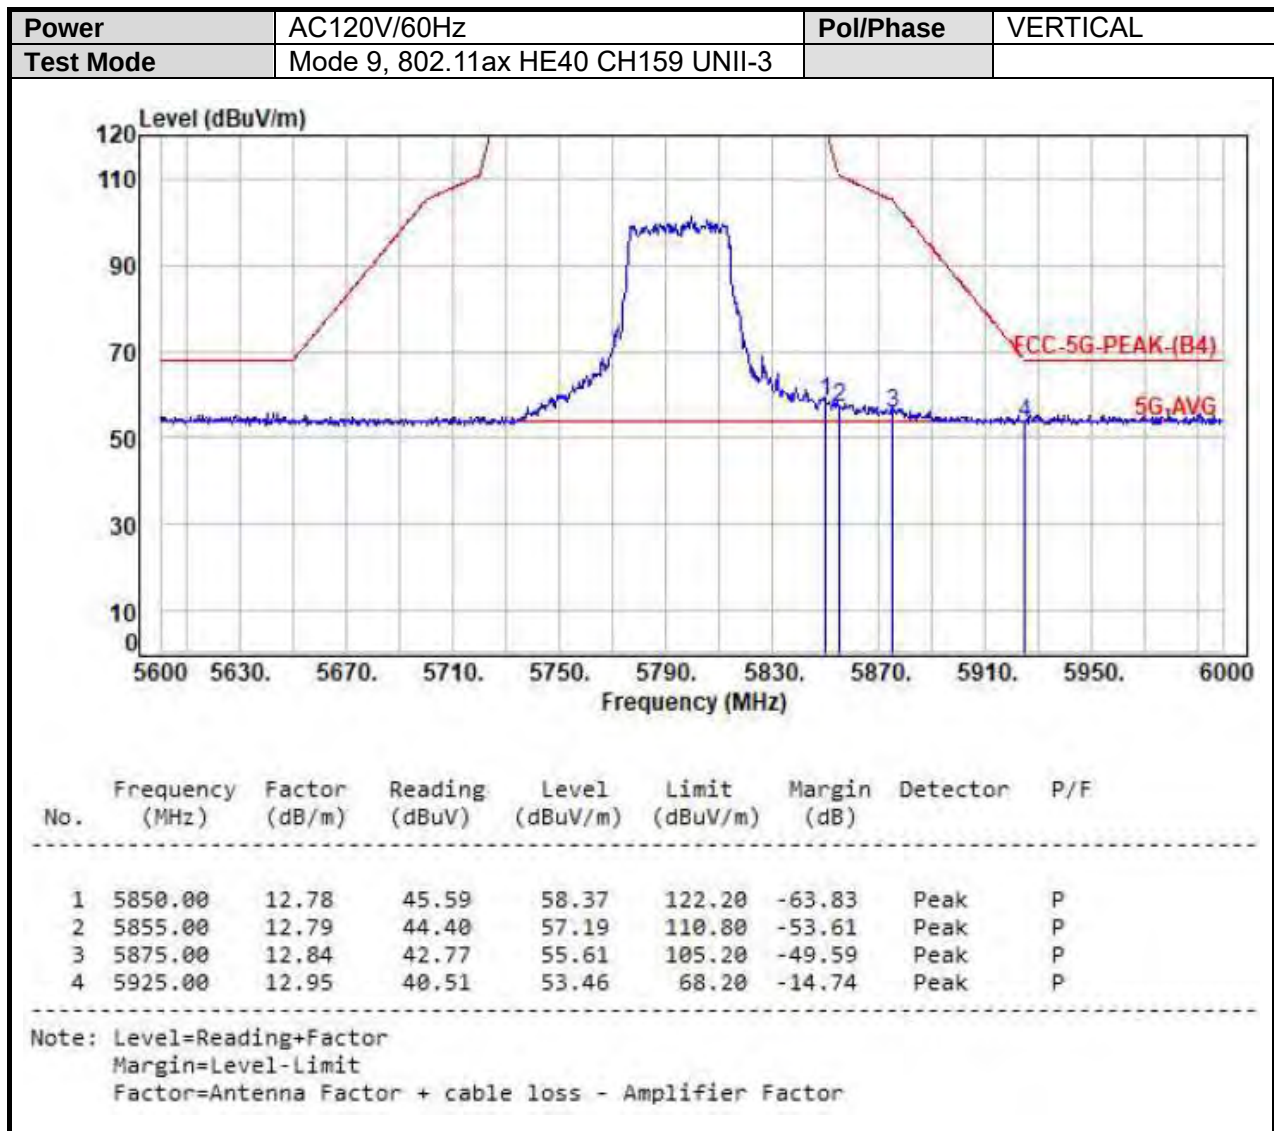

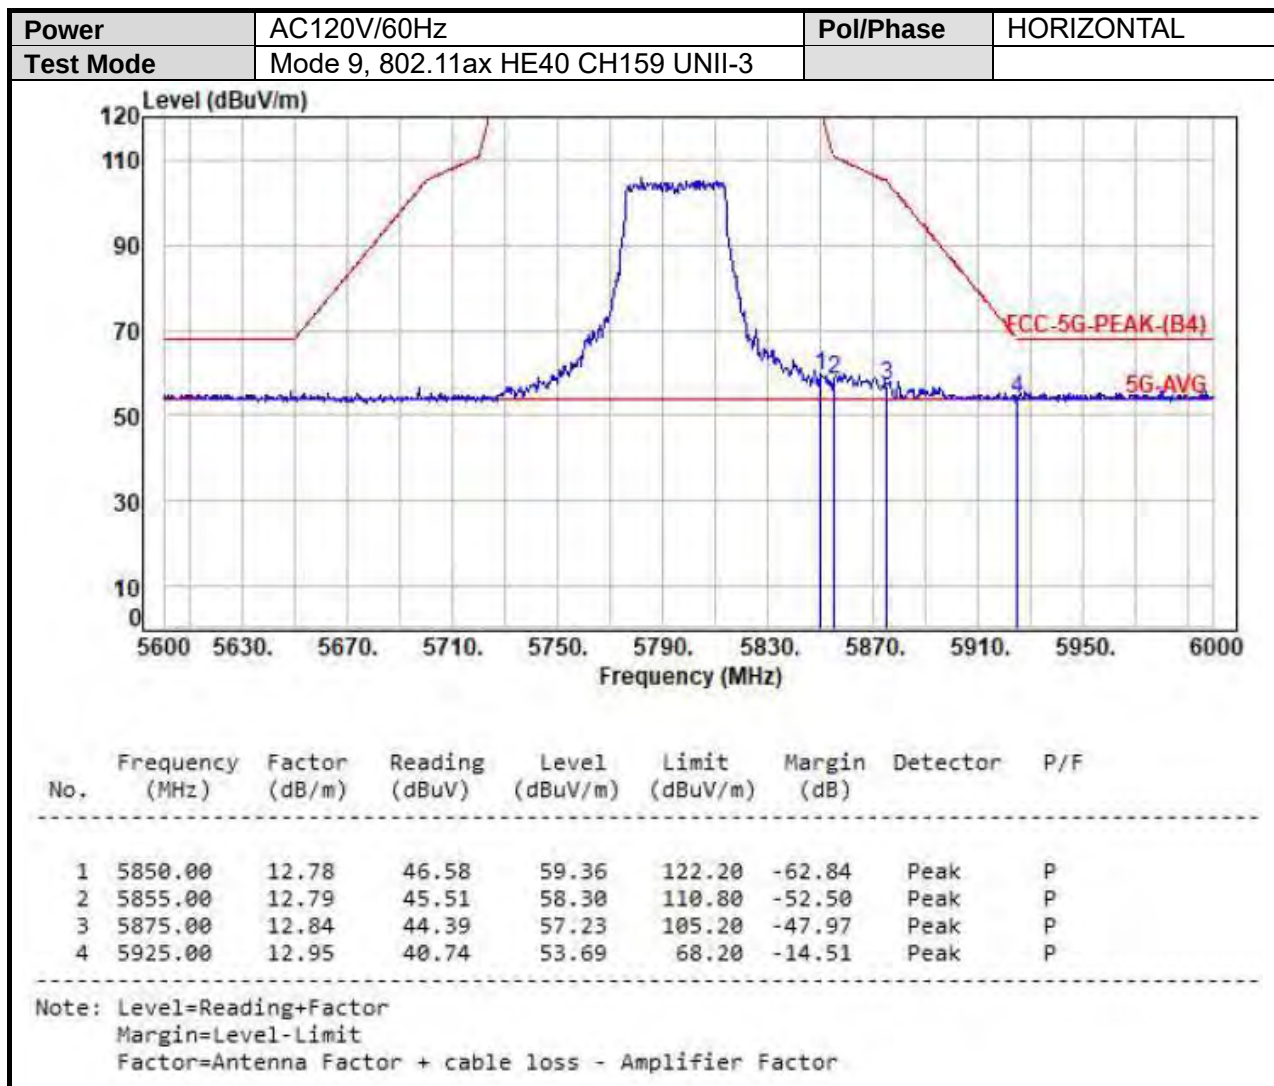



Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 10, 802.11ax HE80 CH155 UNII-3		

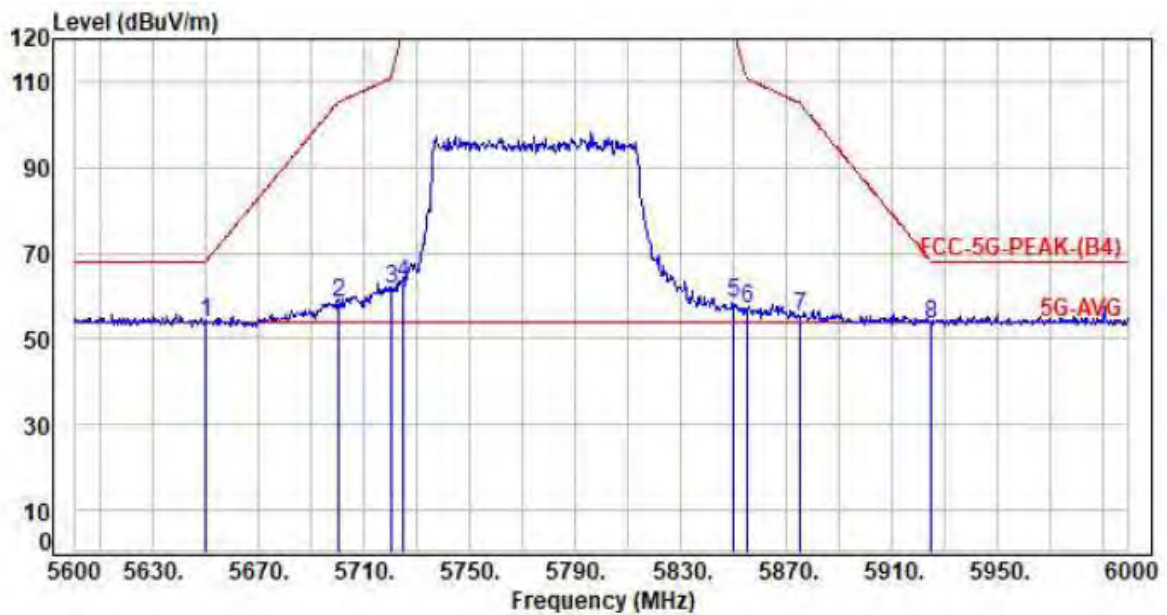


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	P/F
1	5650.00	12.28	41.77	54.05	68.20	-14.15	Peak	P
2	5700.00	12.41	45.83	58.24	105.20	-46.96	Peak	P
3	5720.00	12.46	49.22	61.68	110.80	-49.12	Peak	P
4	5725.00	12.47	50.67	63.14	122.20	-59.06	Peak	P
5	5850.00	12.78	45.53	58.31	122.20	-63.89	Peak	P
6	5855.00	12.79	44.41	57.20	110.80	-53.60	Peak	P
7	5875.00	12.84	42.57	55.41	105.20	-49.79	Peak	P
8	5925.00	12.95	40.63	53.58	68.20	-14.62	Peak	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

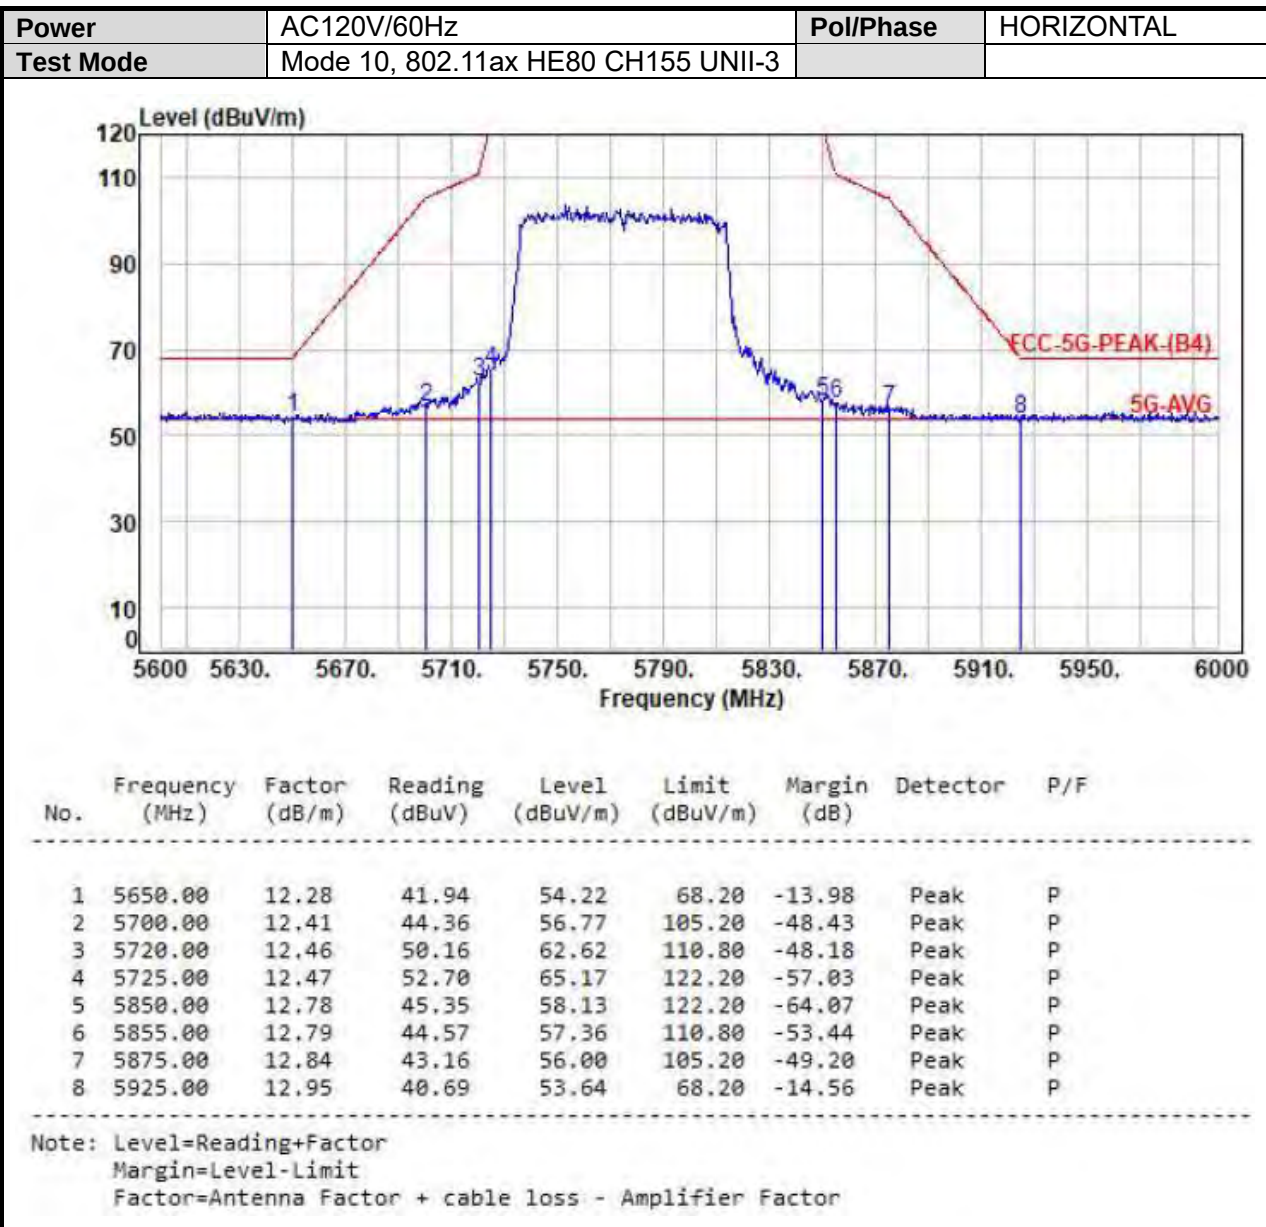

MIMO
UNII-1

Power	AC120V/60Hz	Pol/Phase	VERTICAL
Test Mode	Mode 3, 802.11ac VHT20 CH36 UNII-1		

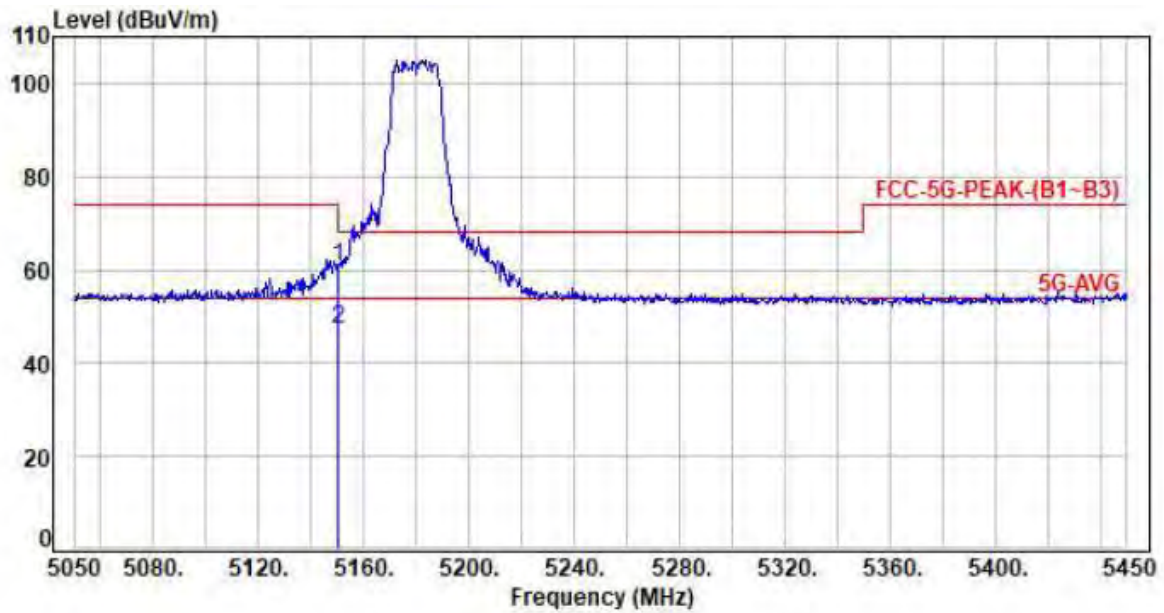



No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5150.00	11.32	49.41	60.73	74.00	-13.27	Peak	P
2	5150.00	11.32	35.78	47.10	54.00	-6.90	Average	P


Note: Level=Reading+Factor


Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor

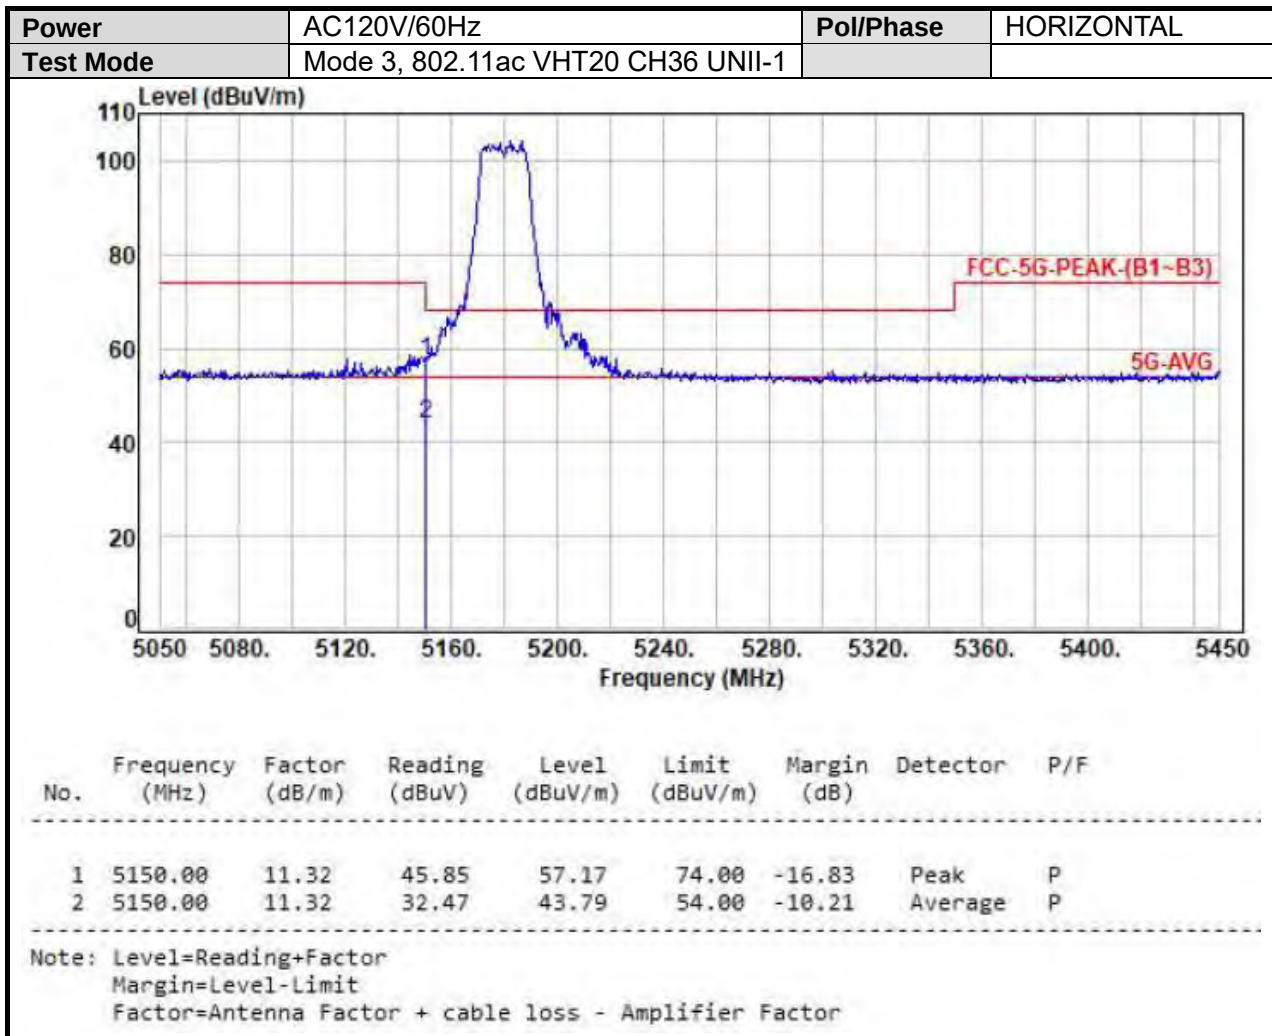


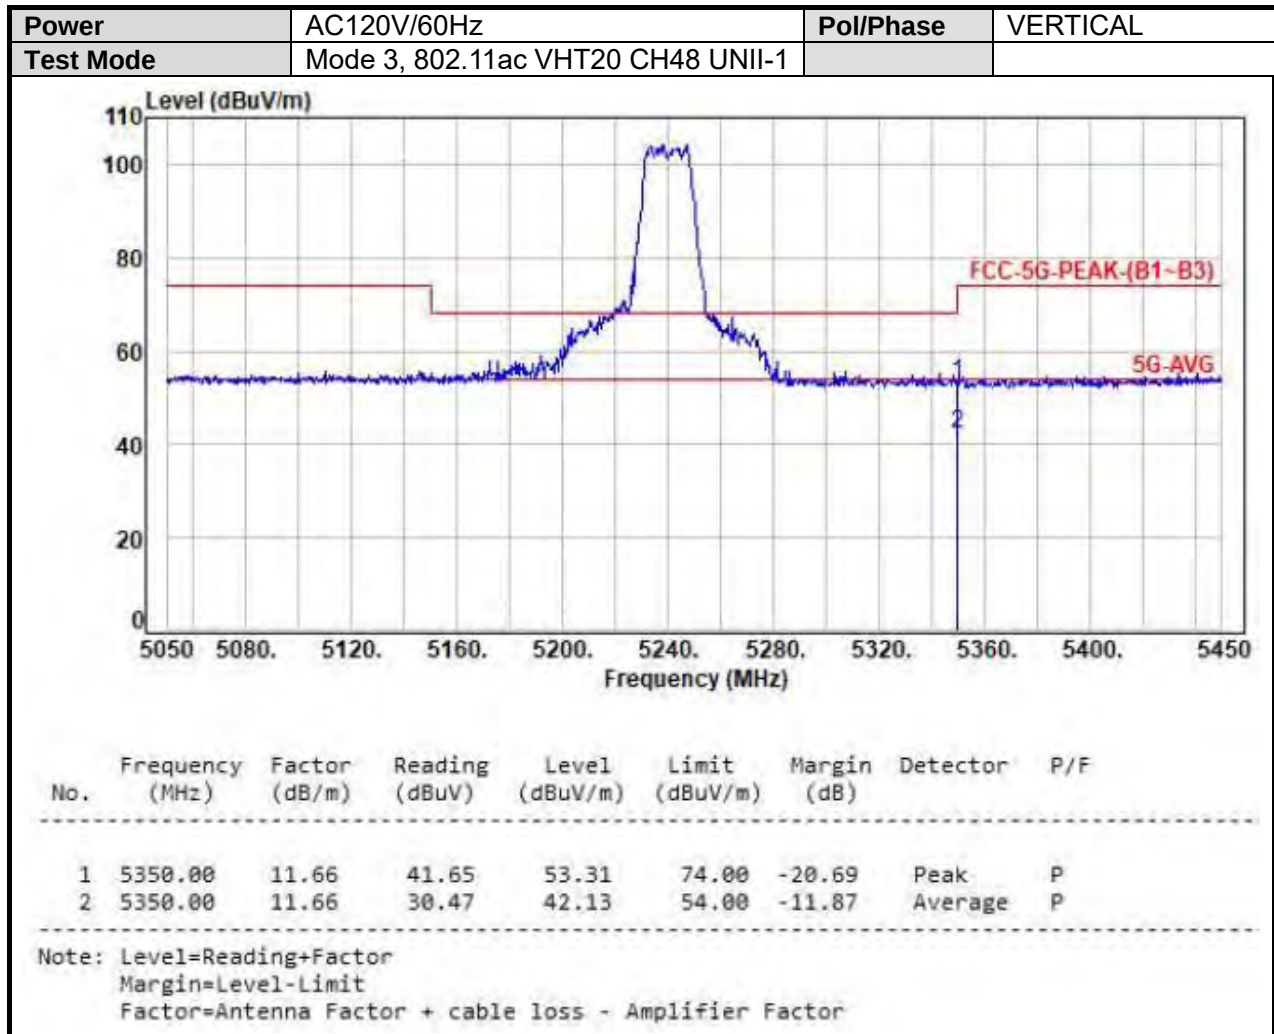


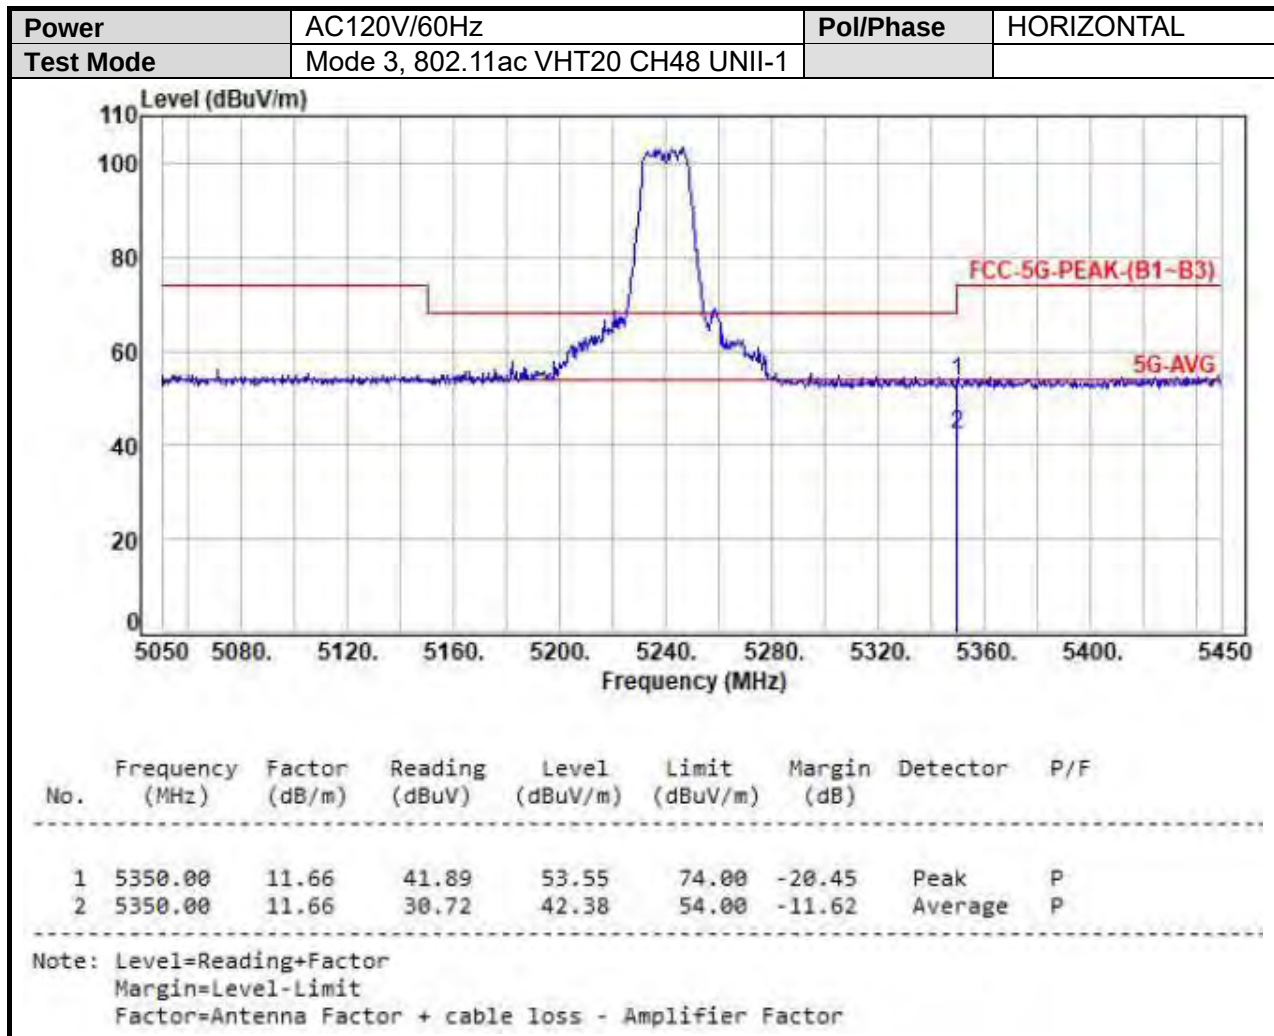


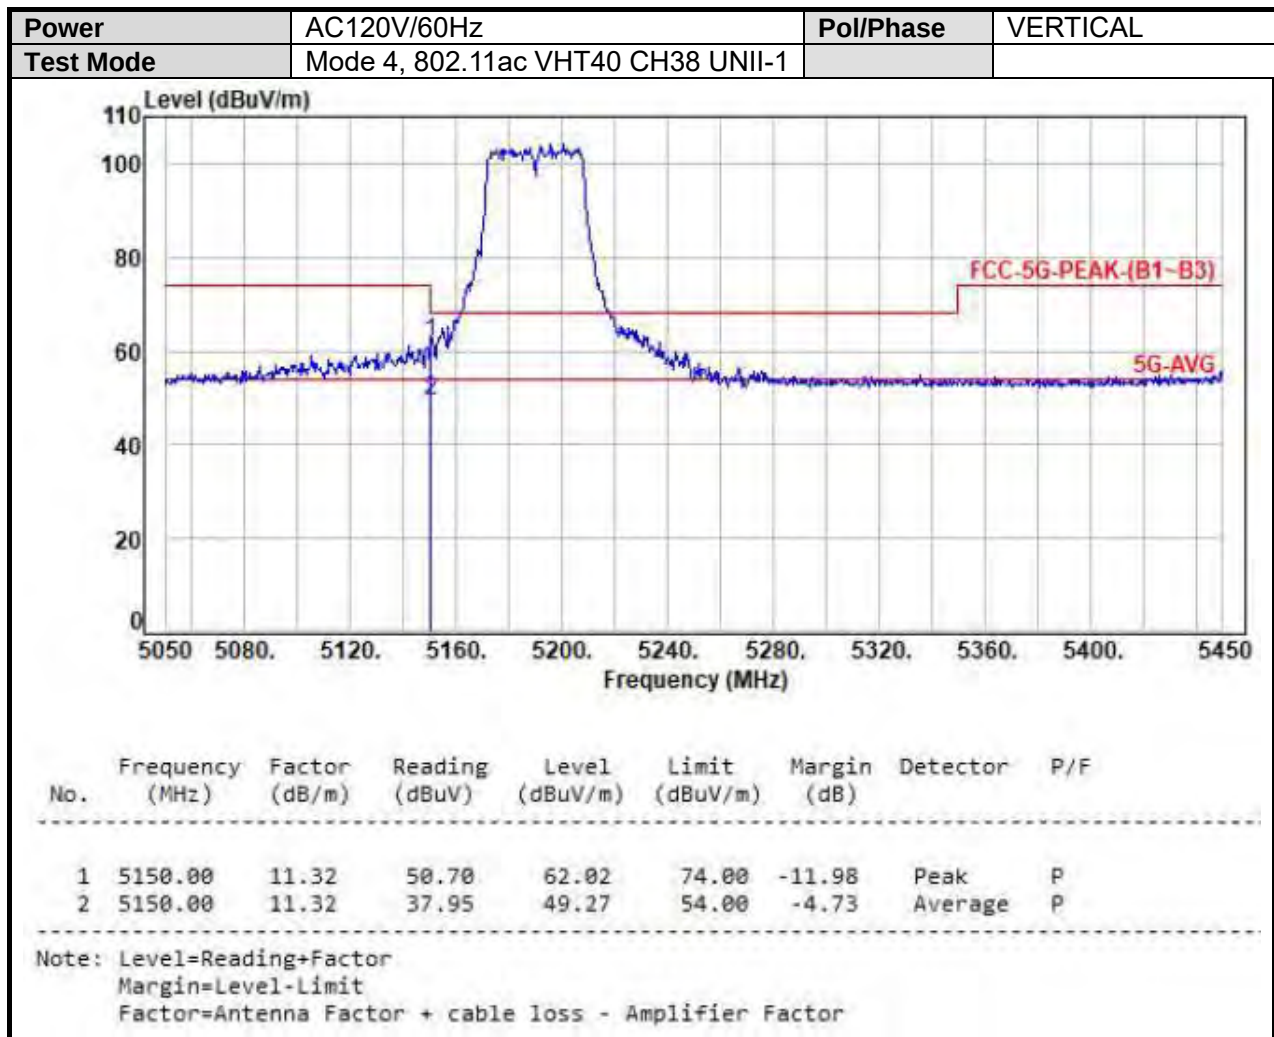


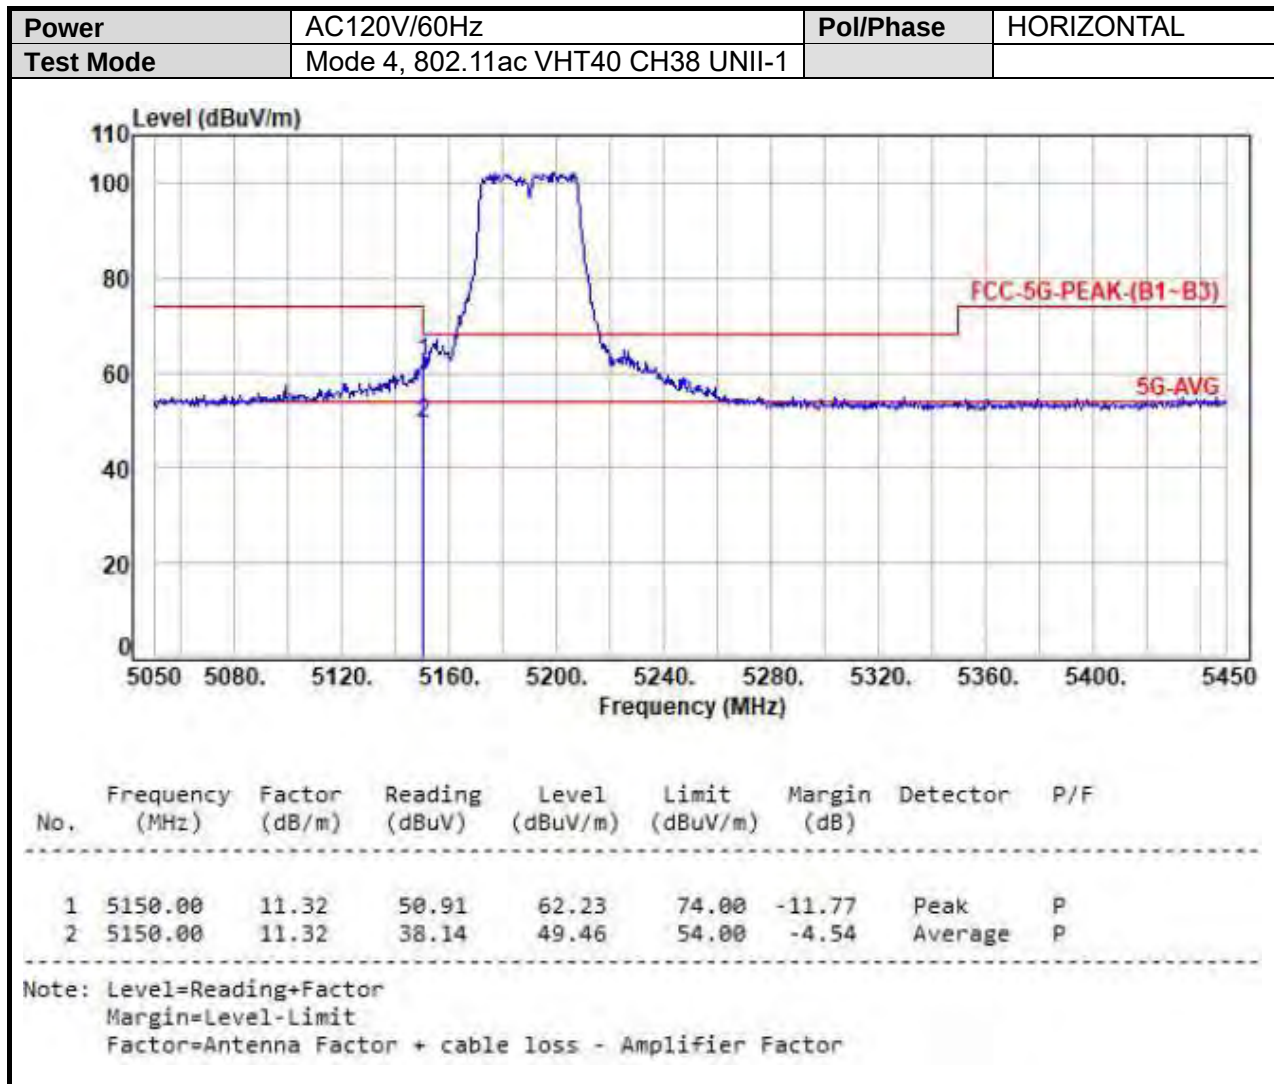


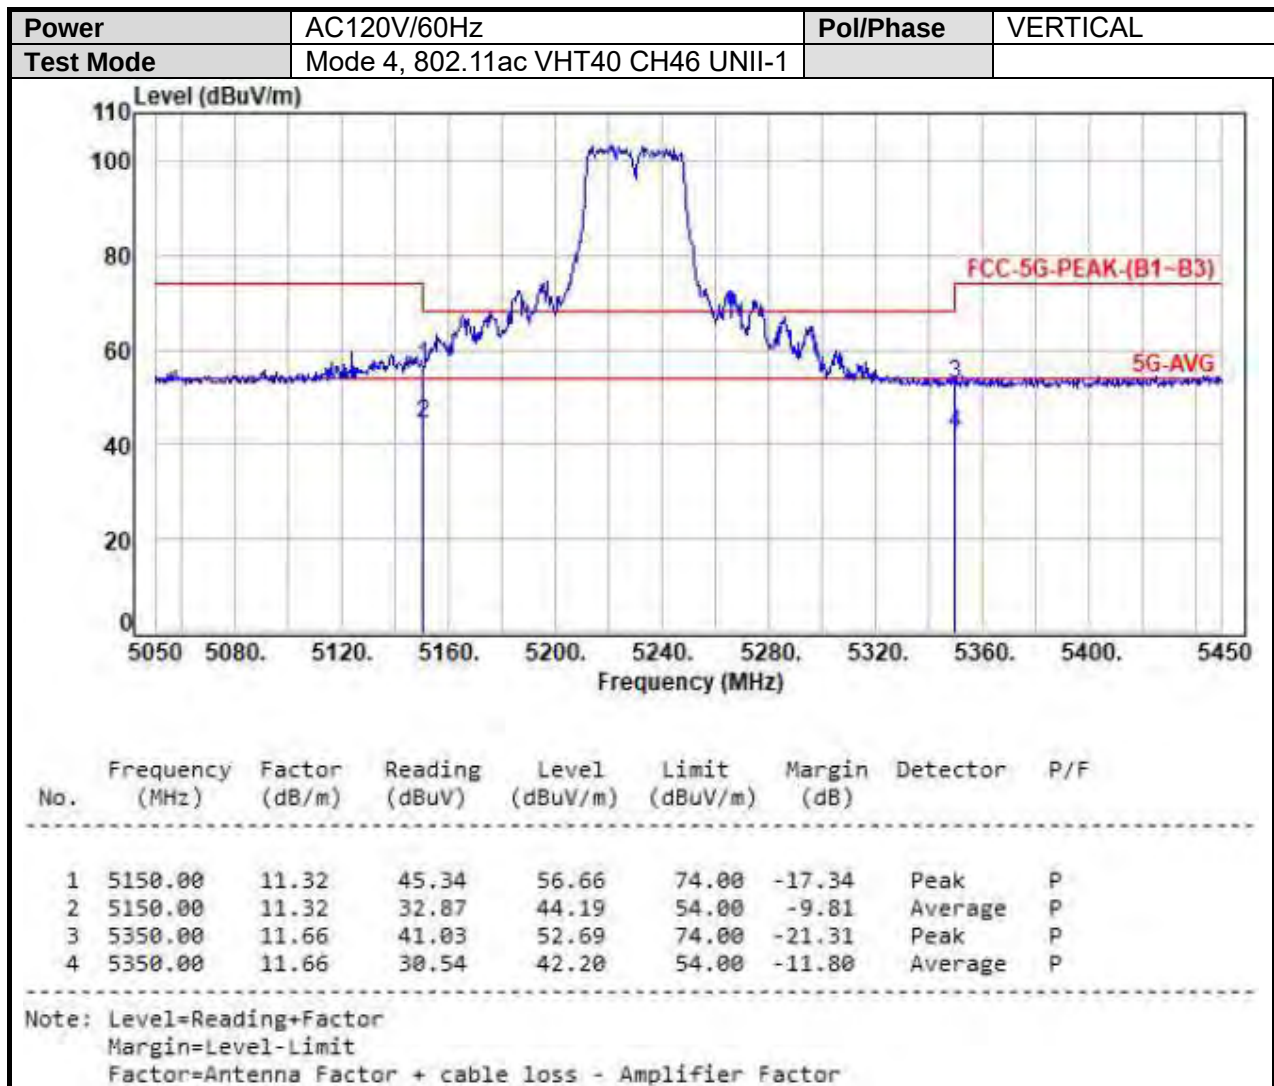


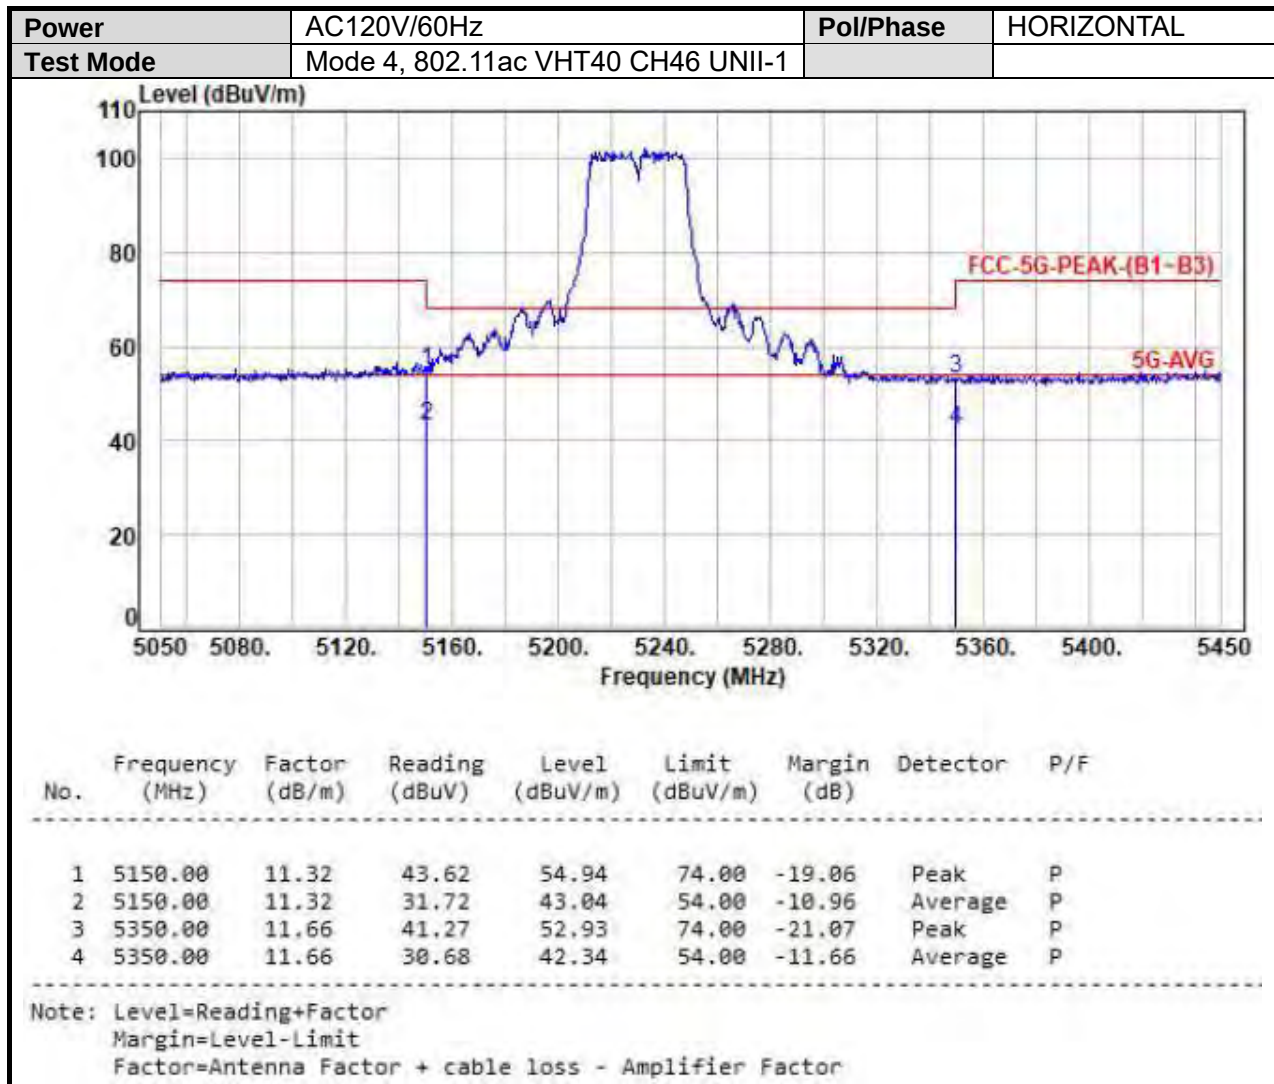


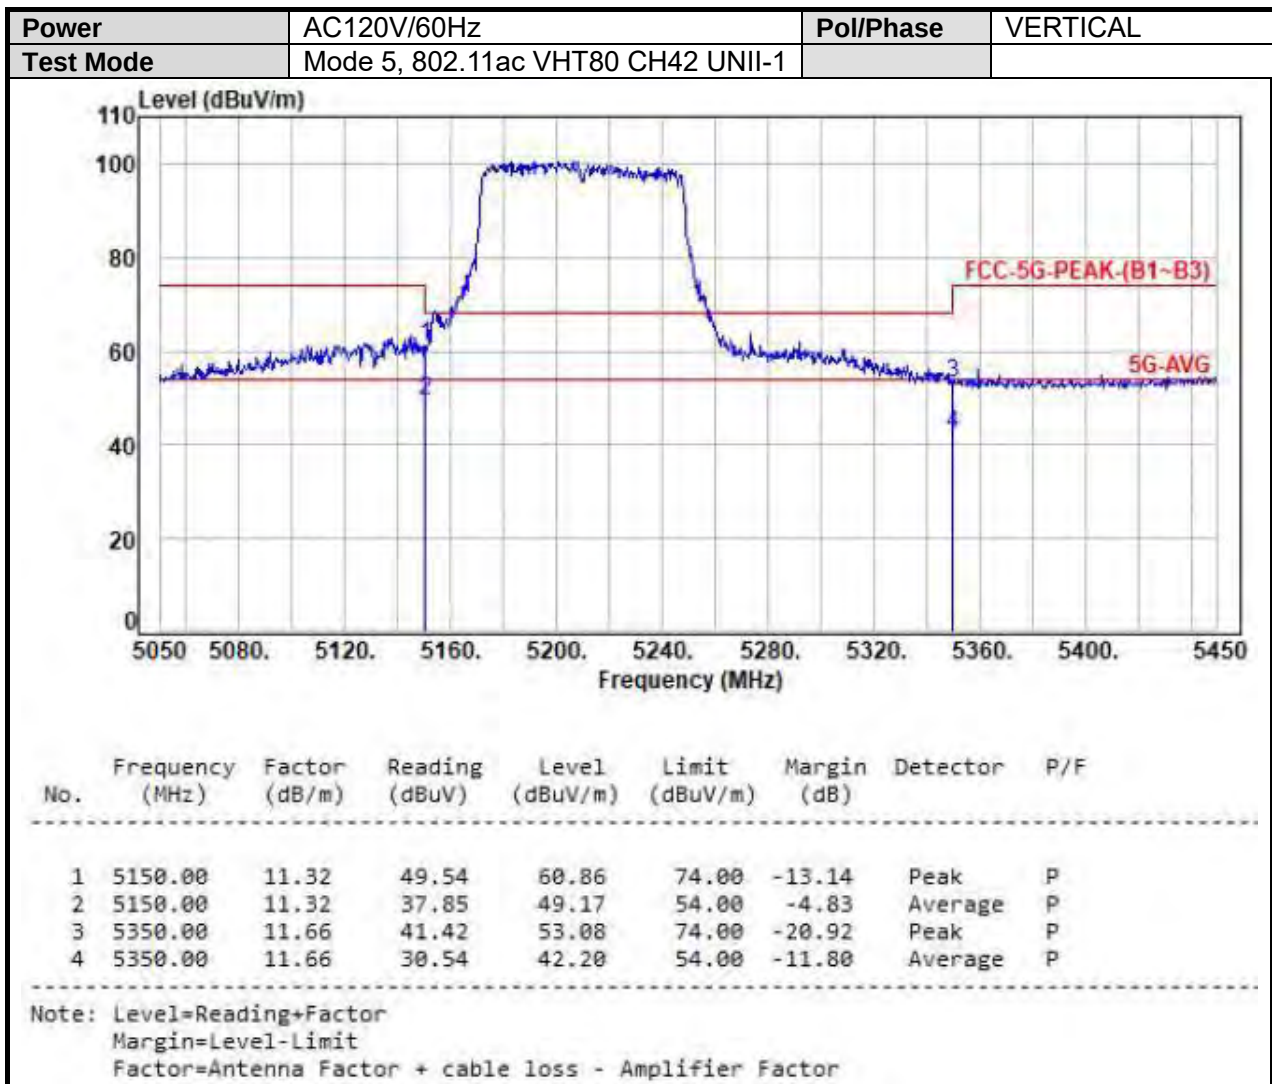


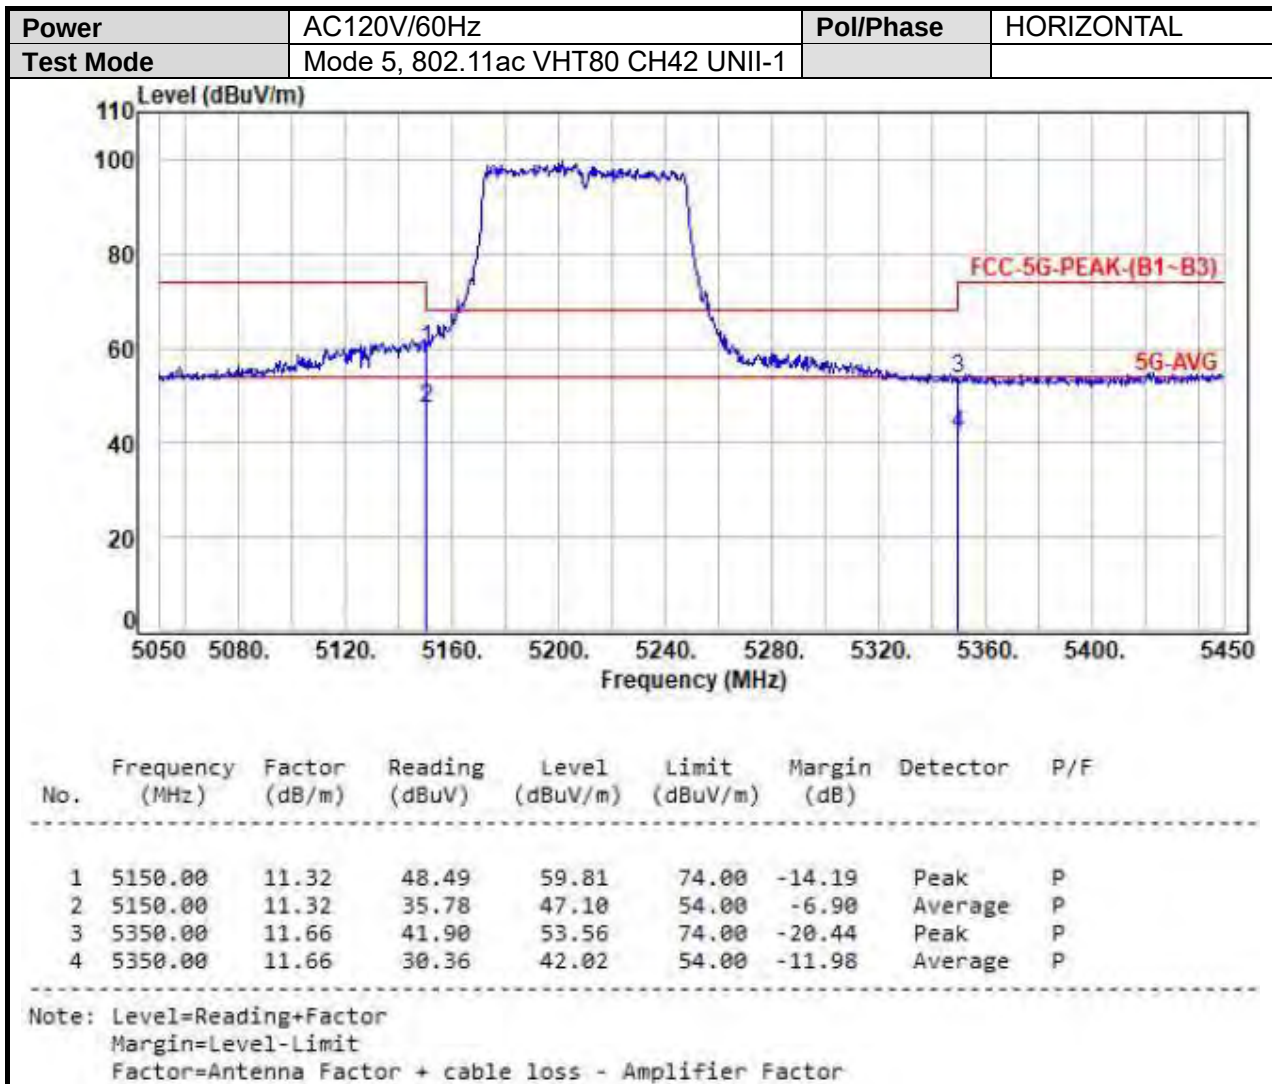


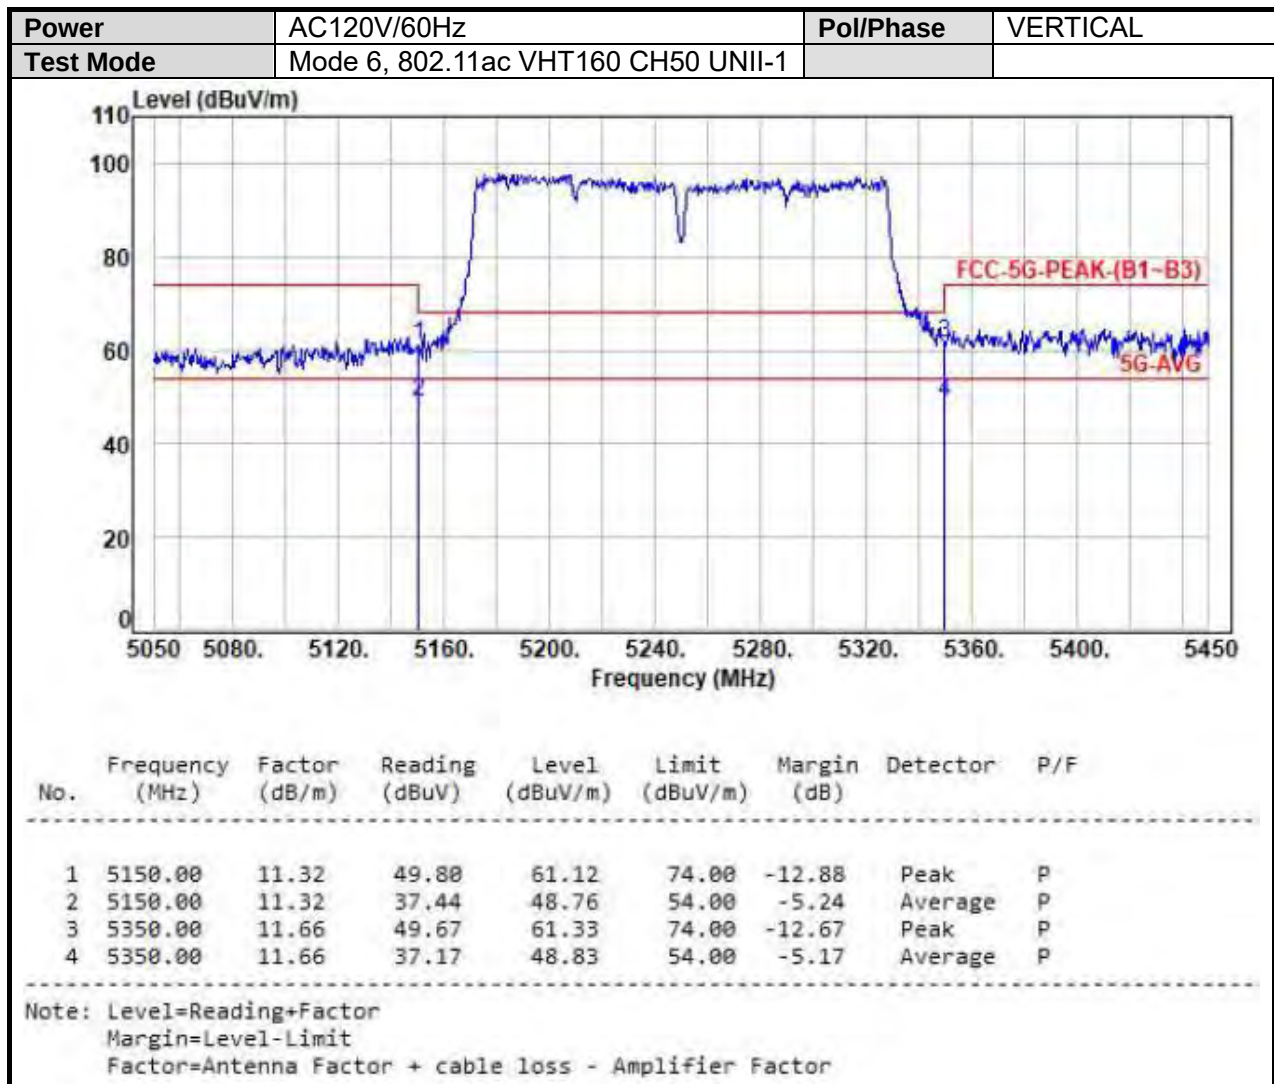


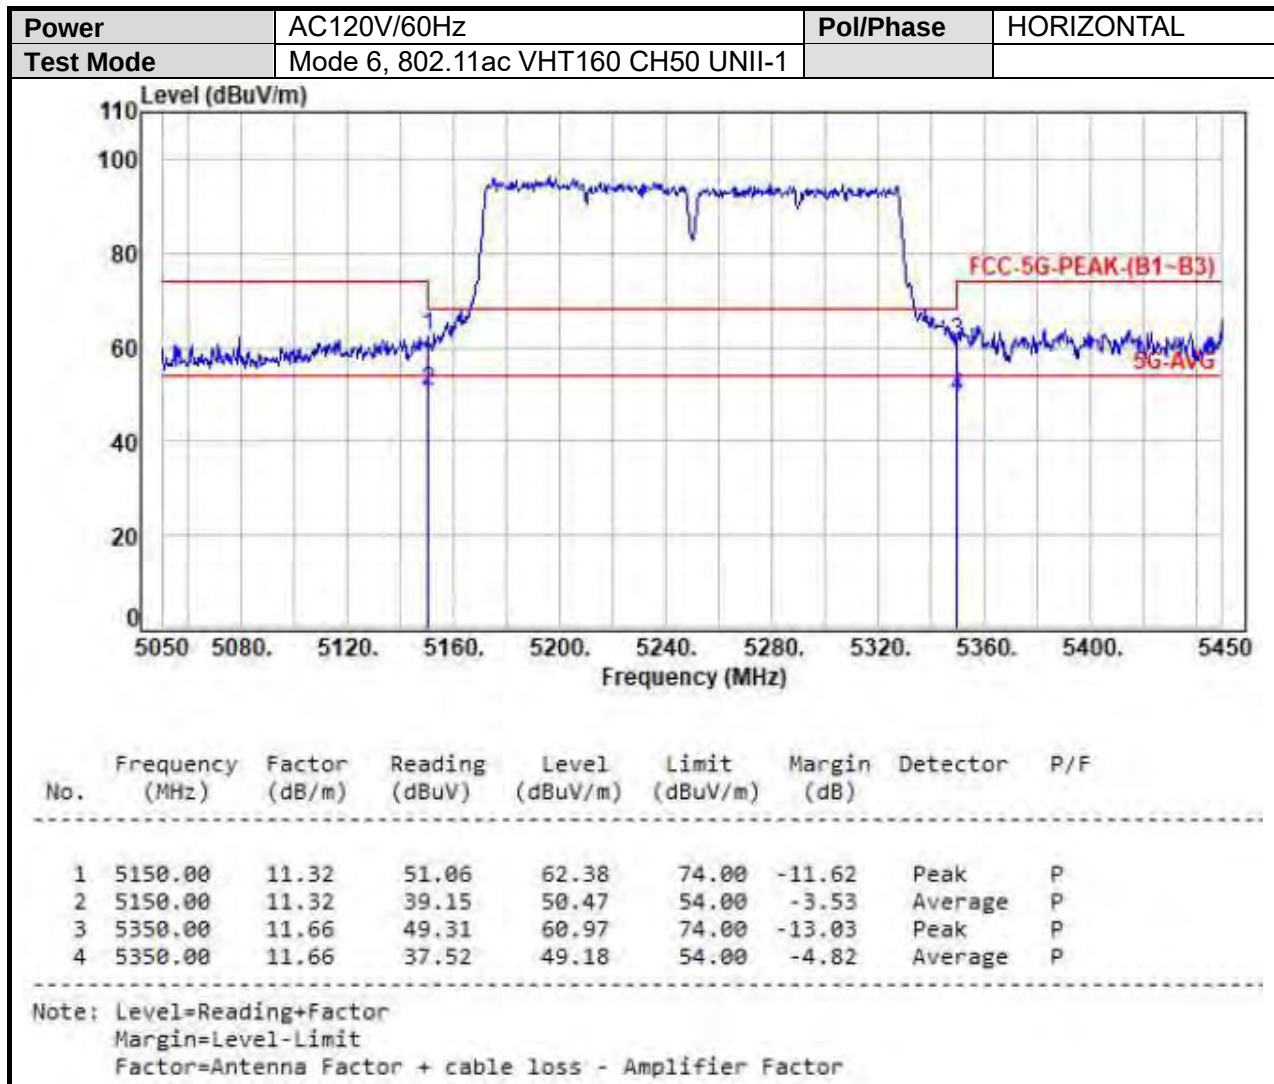


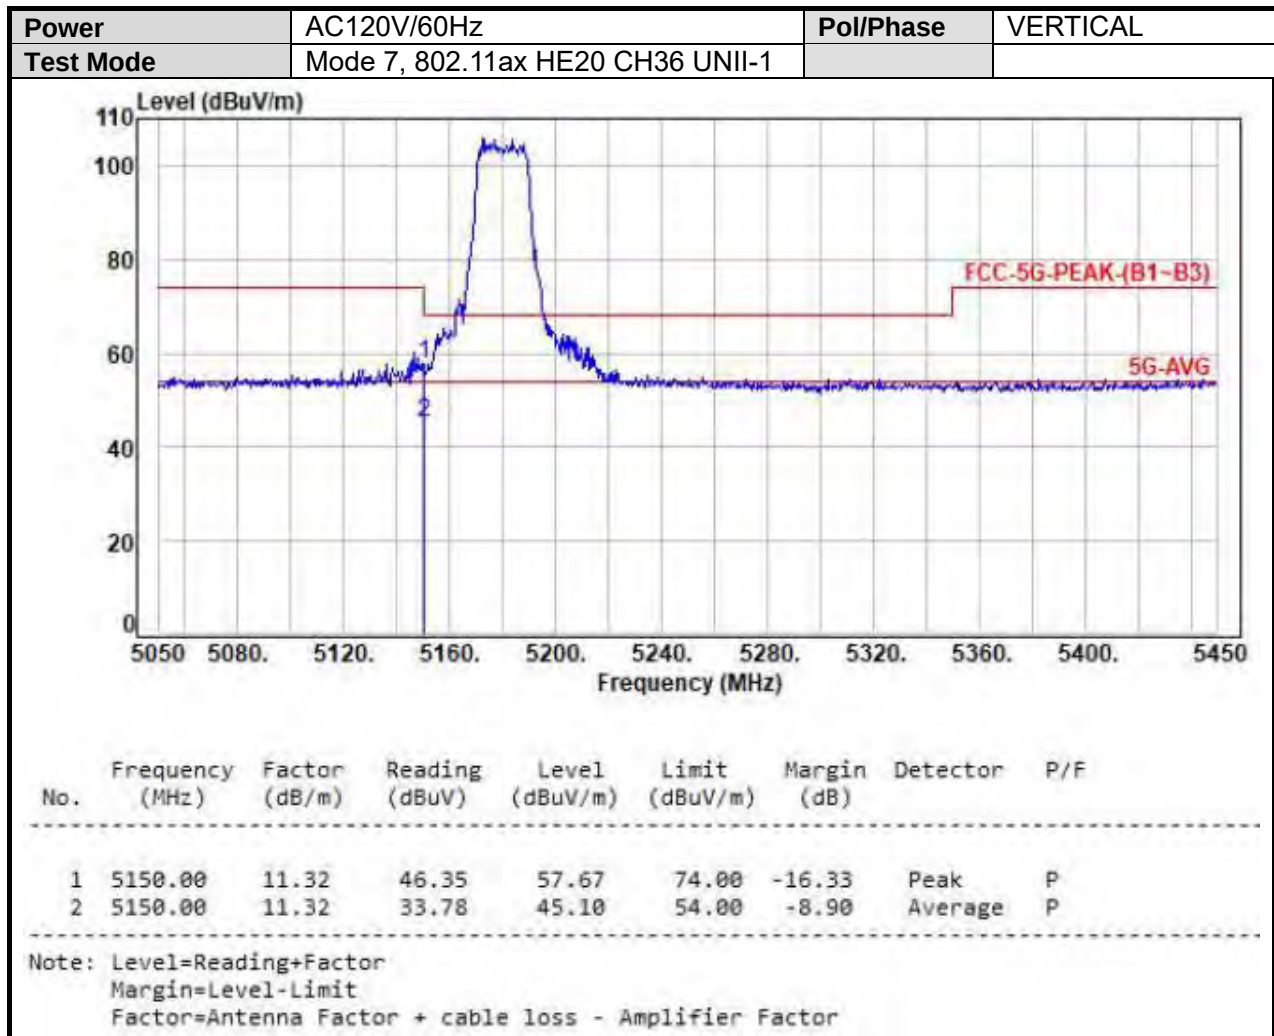


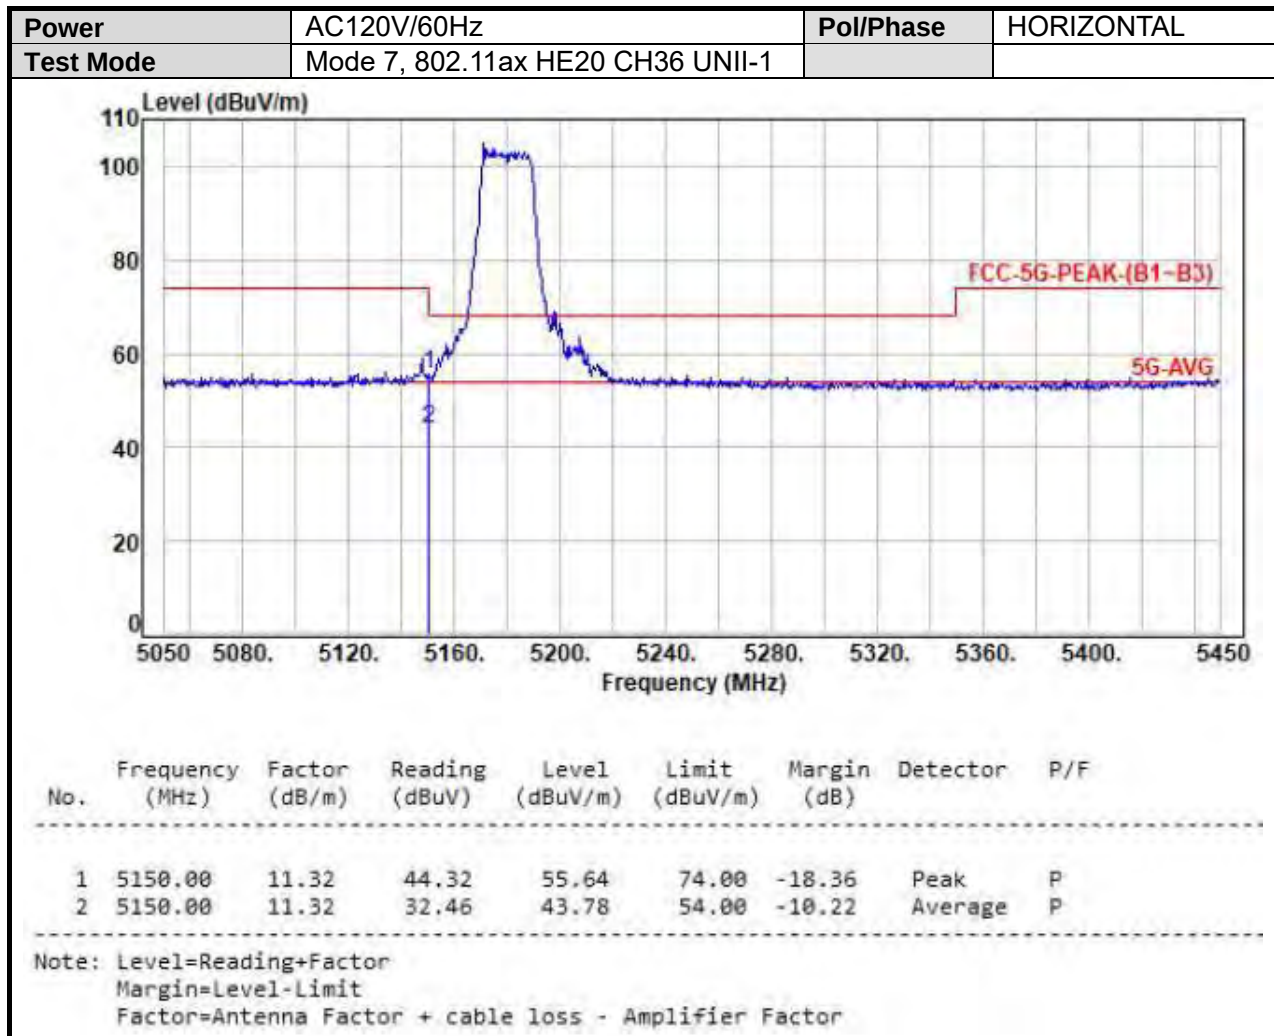


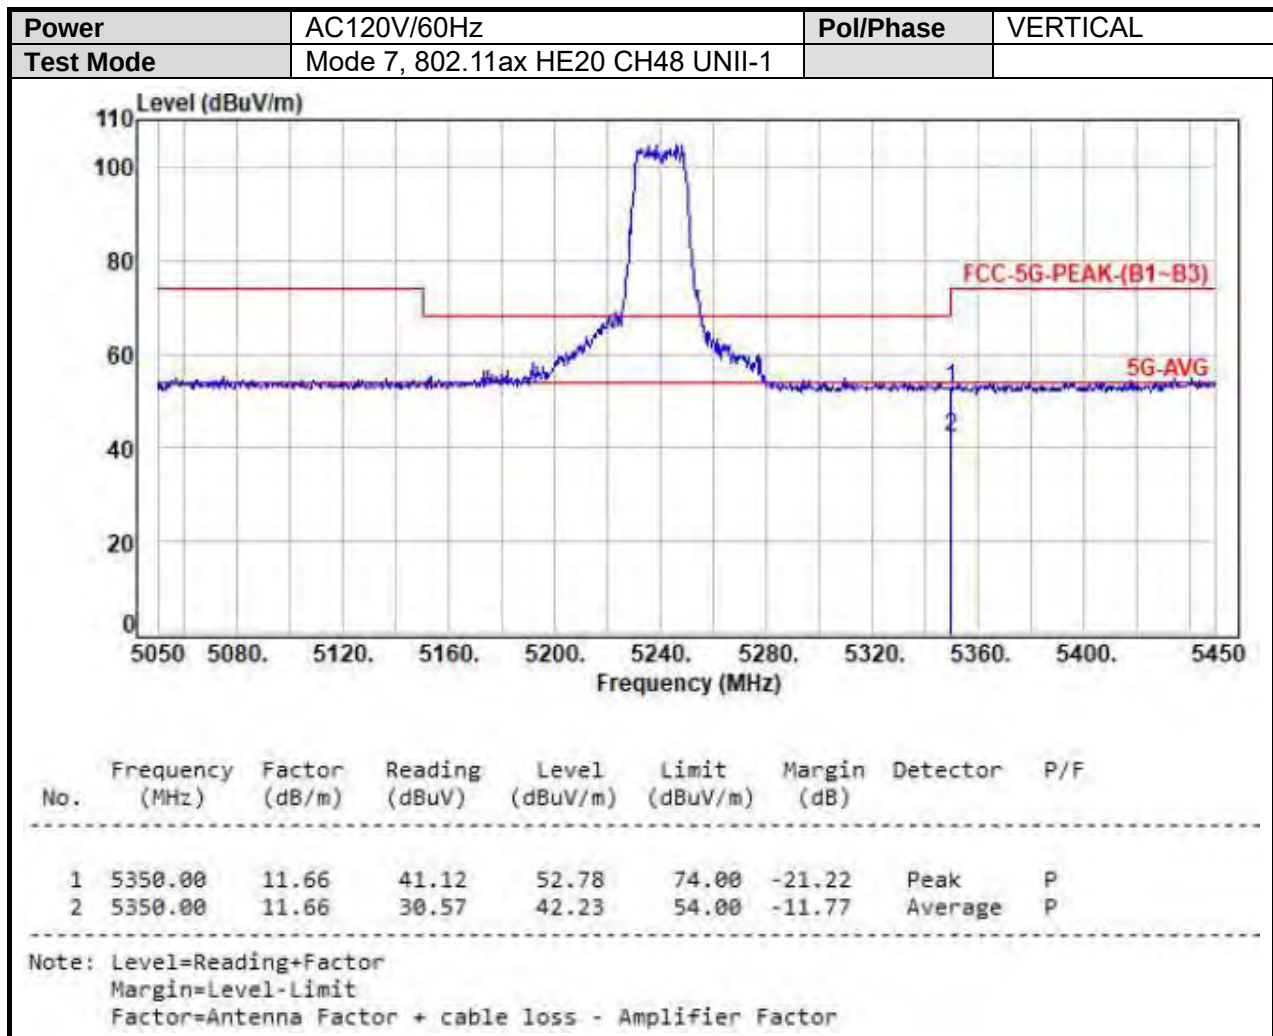


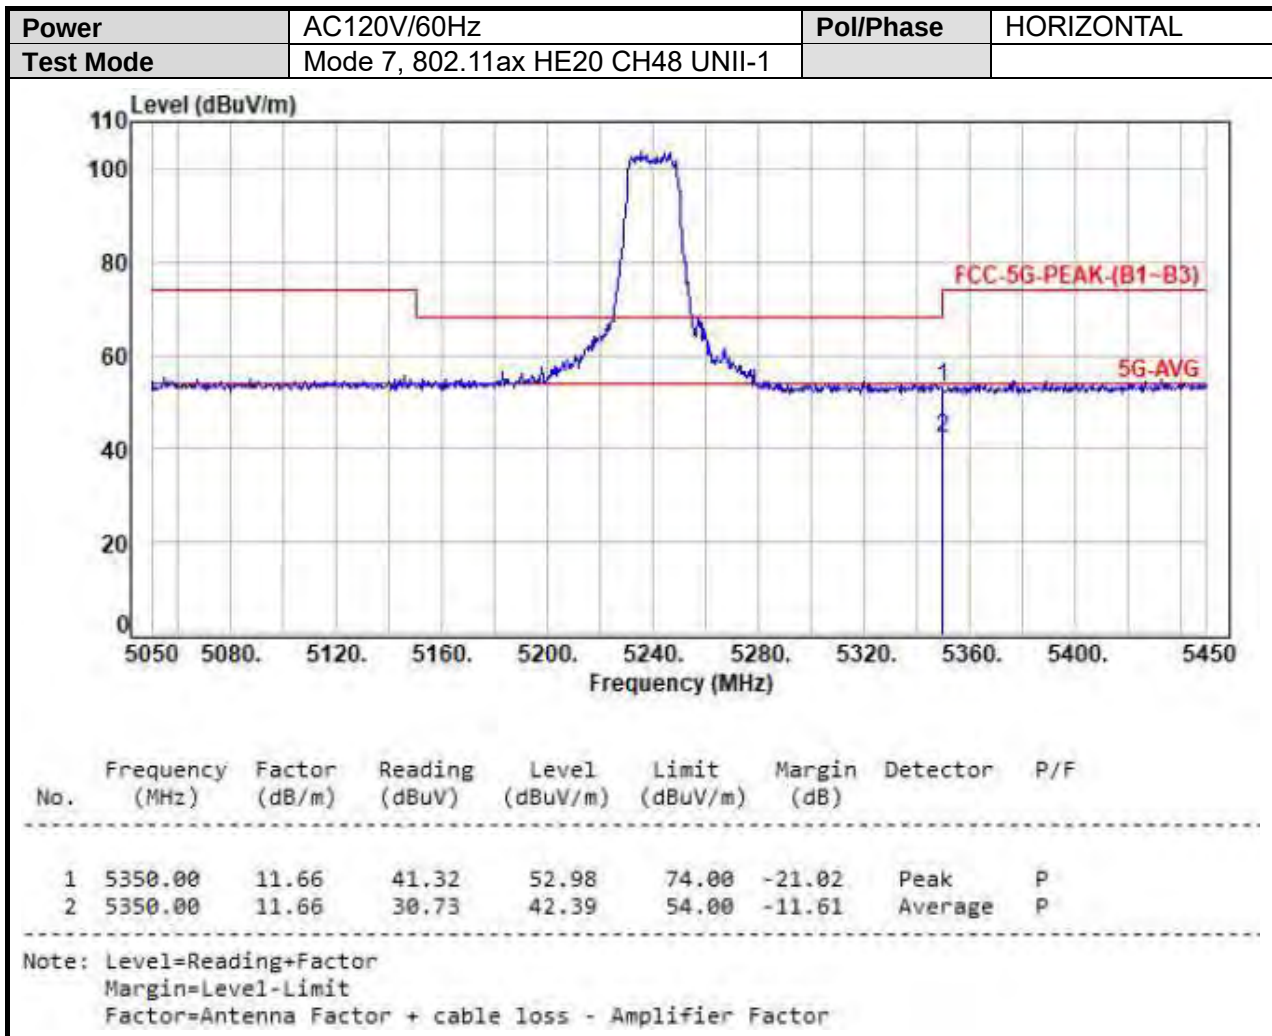


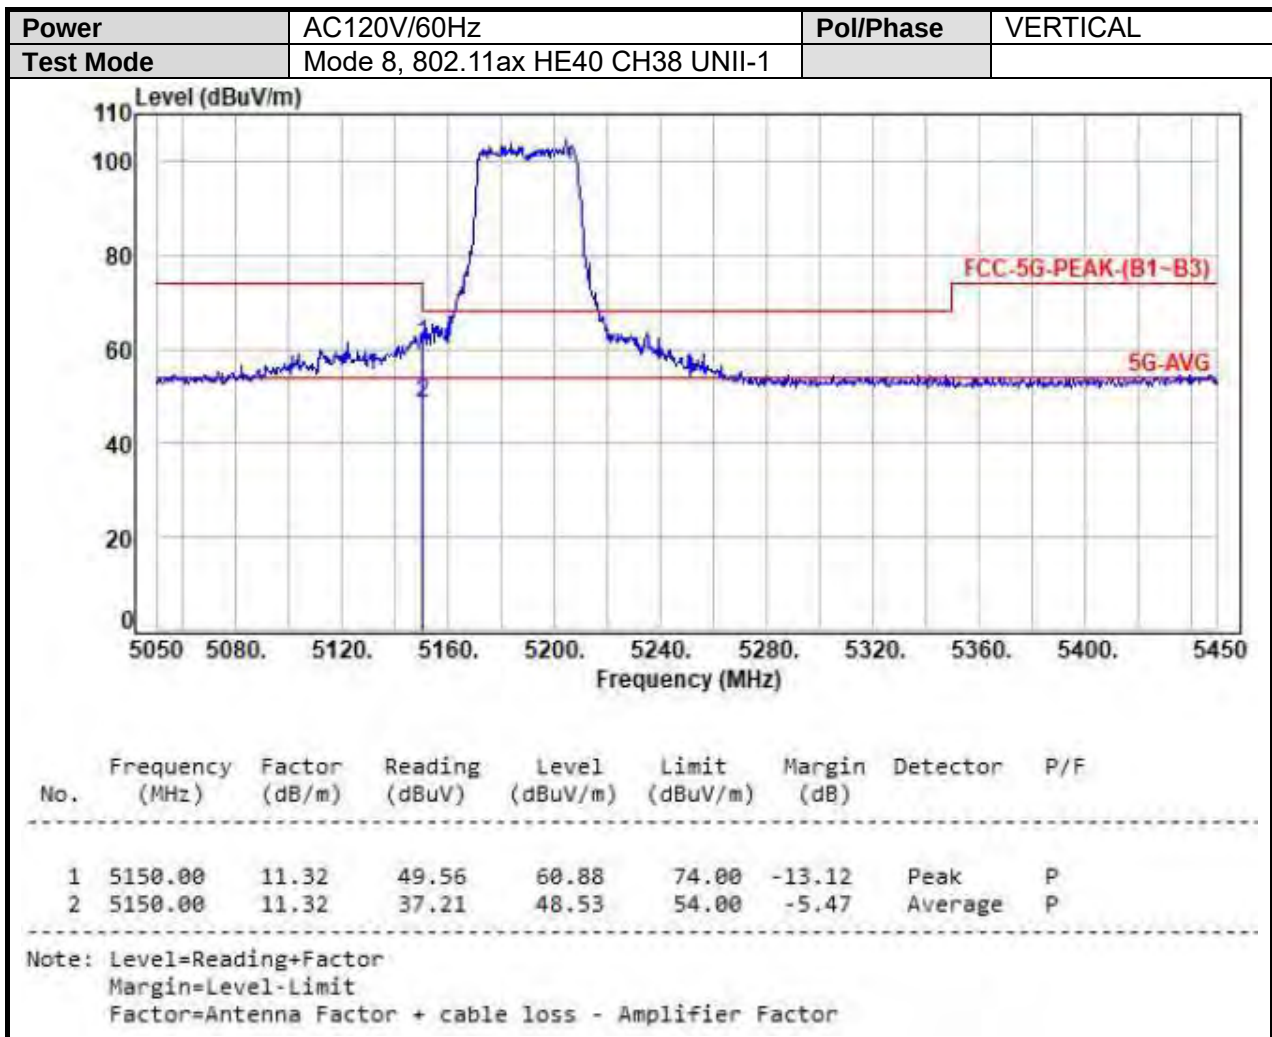


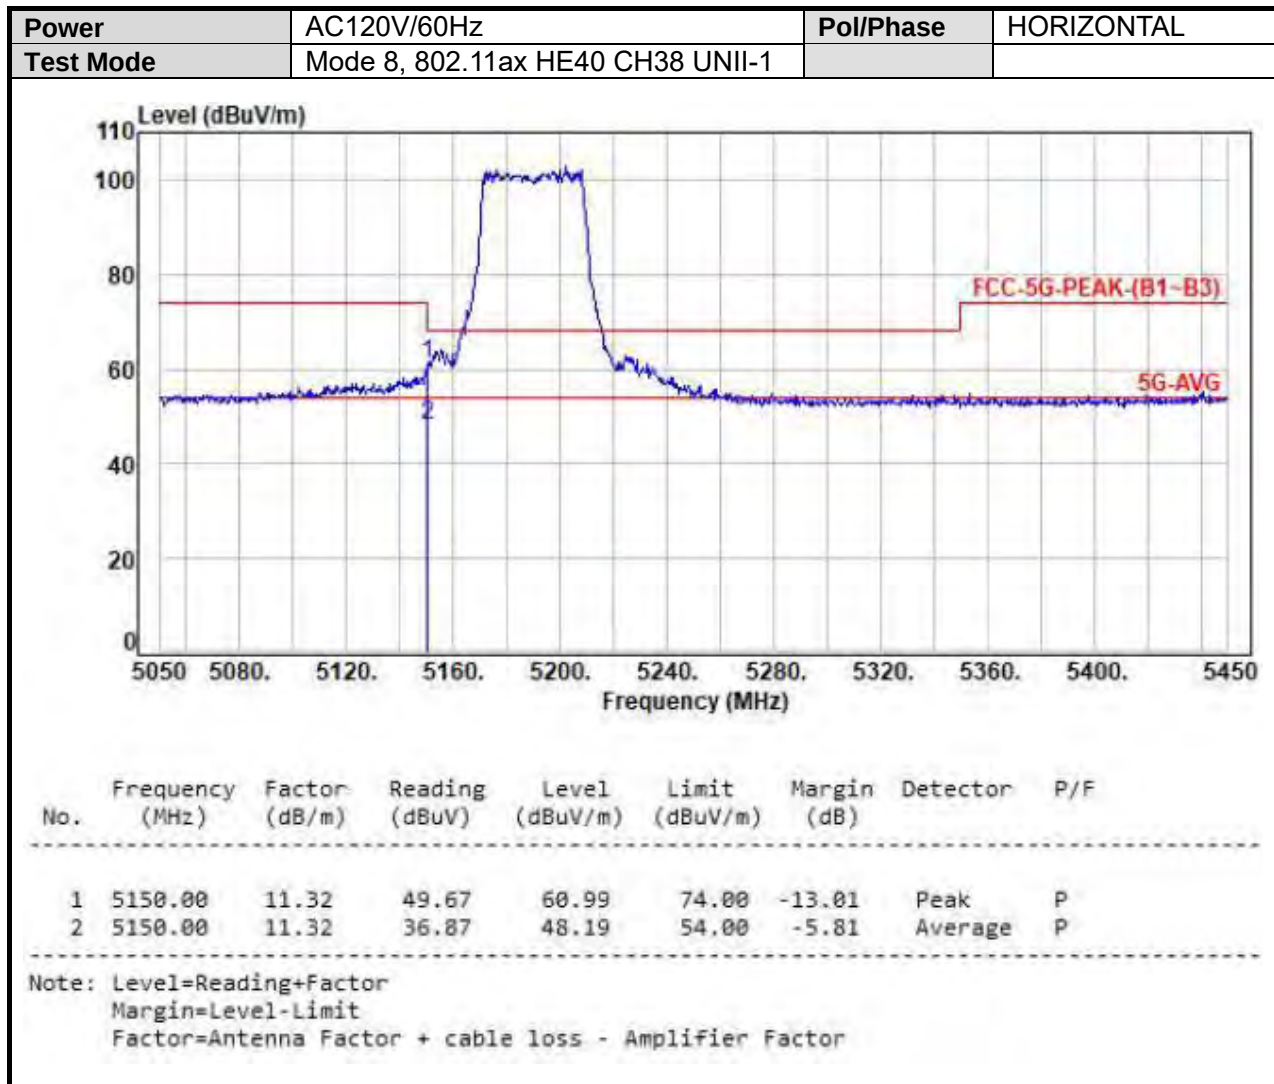


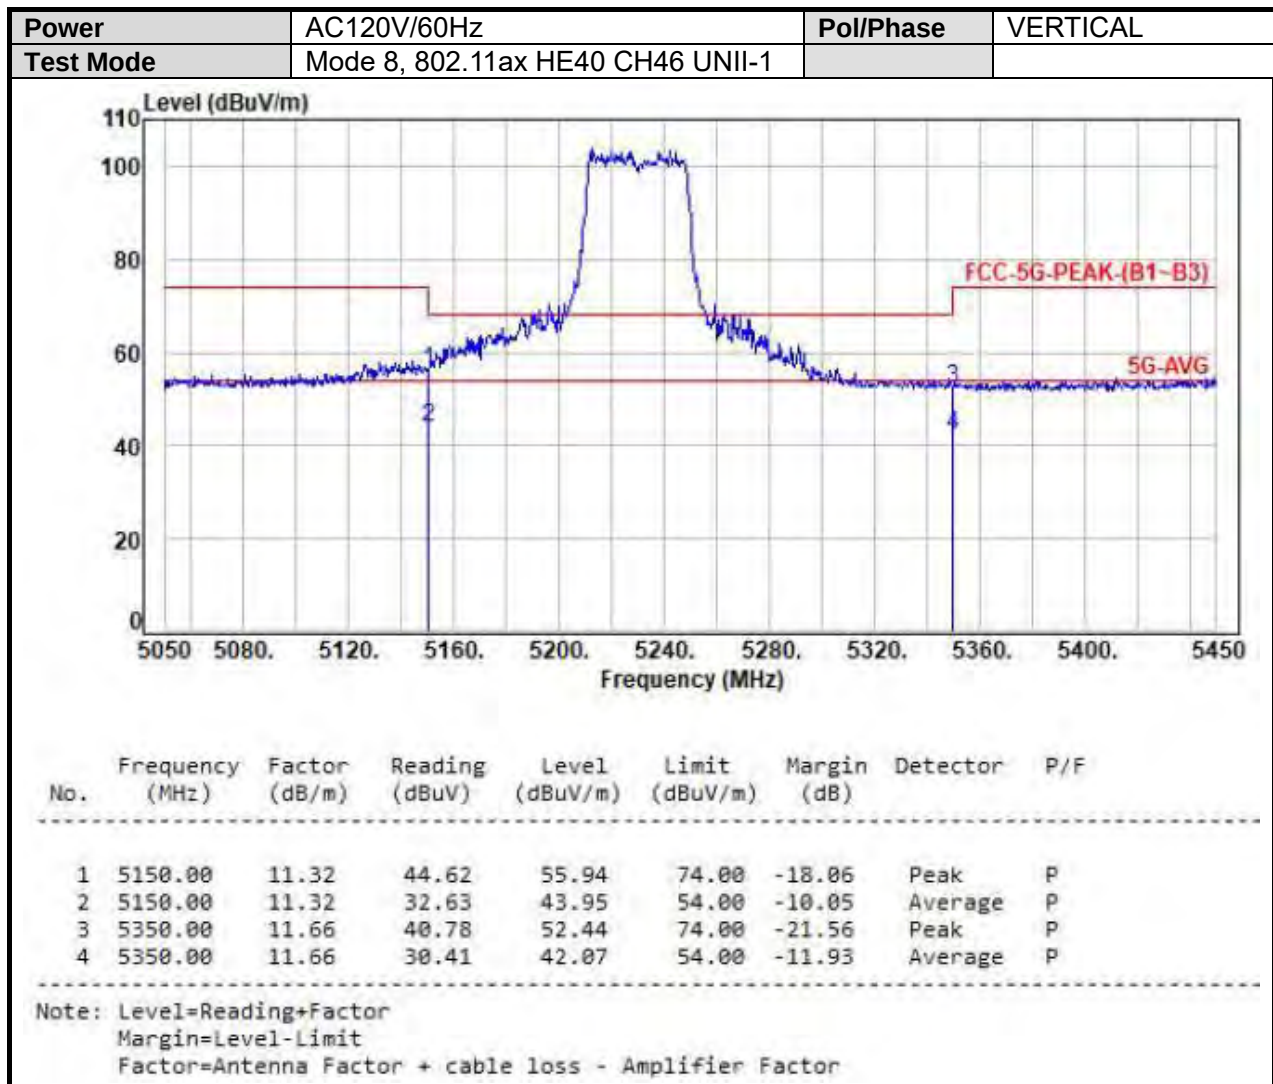


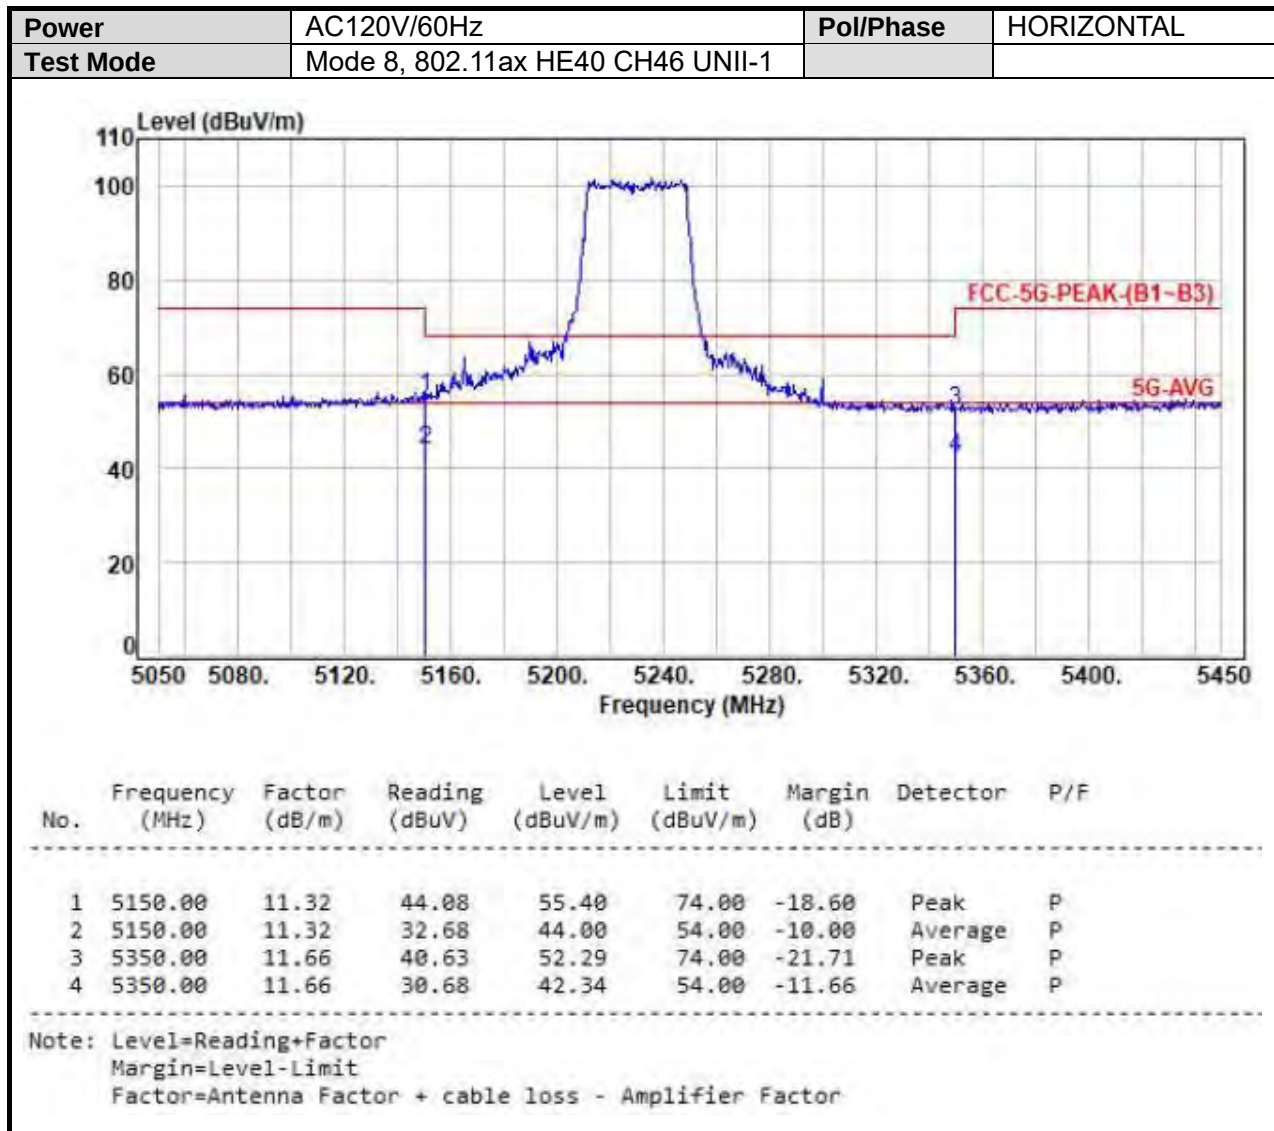

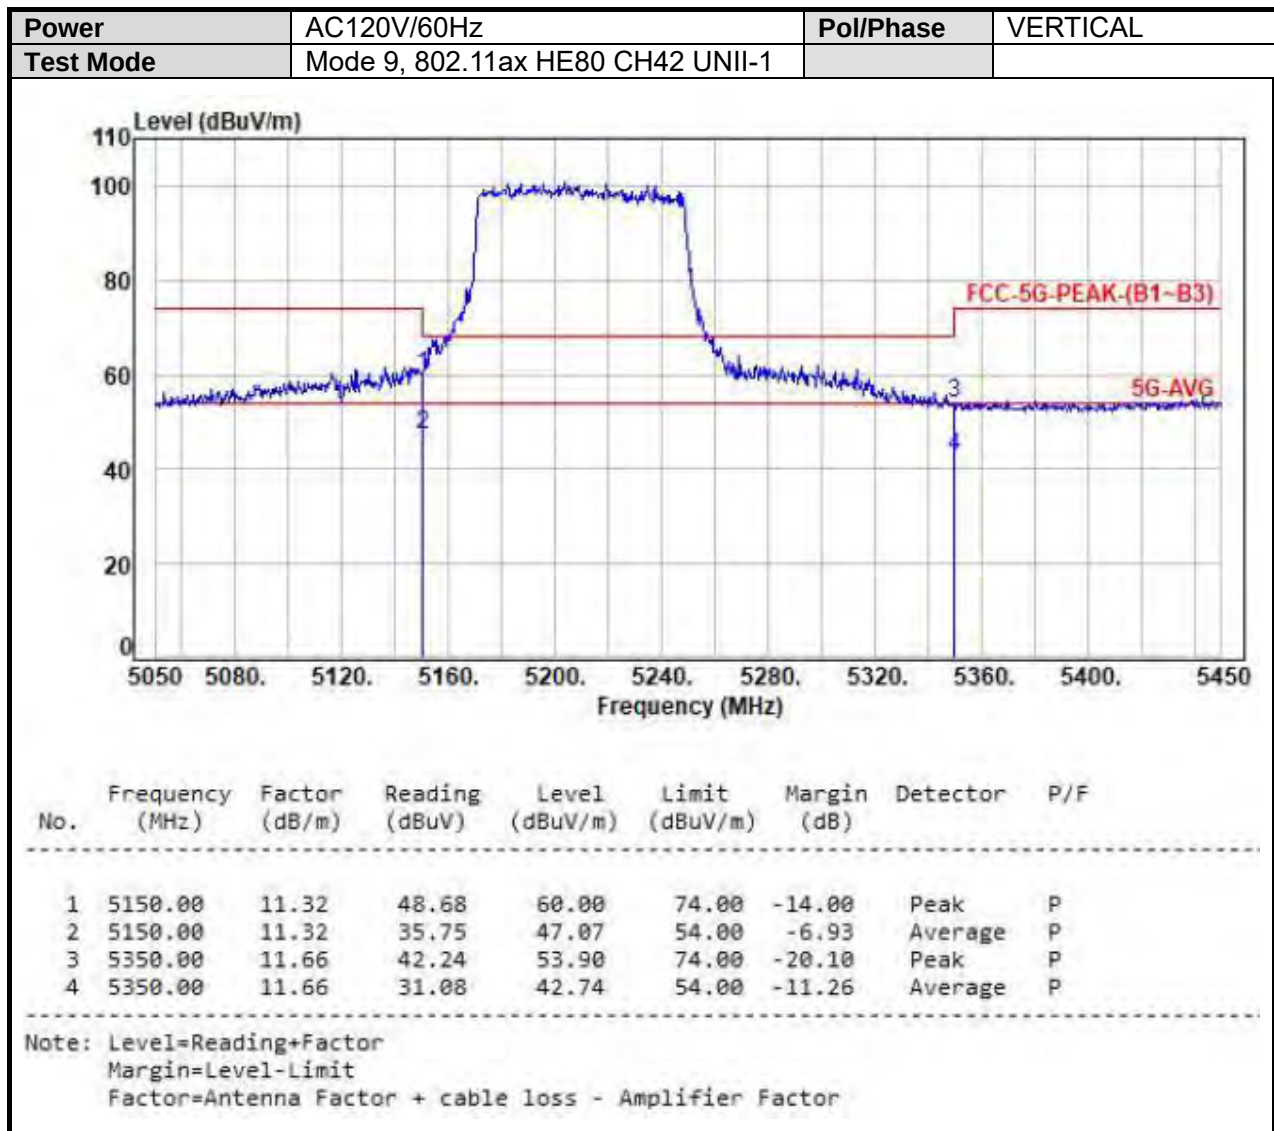

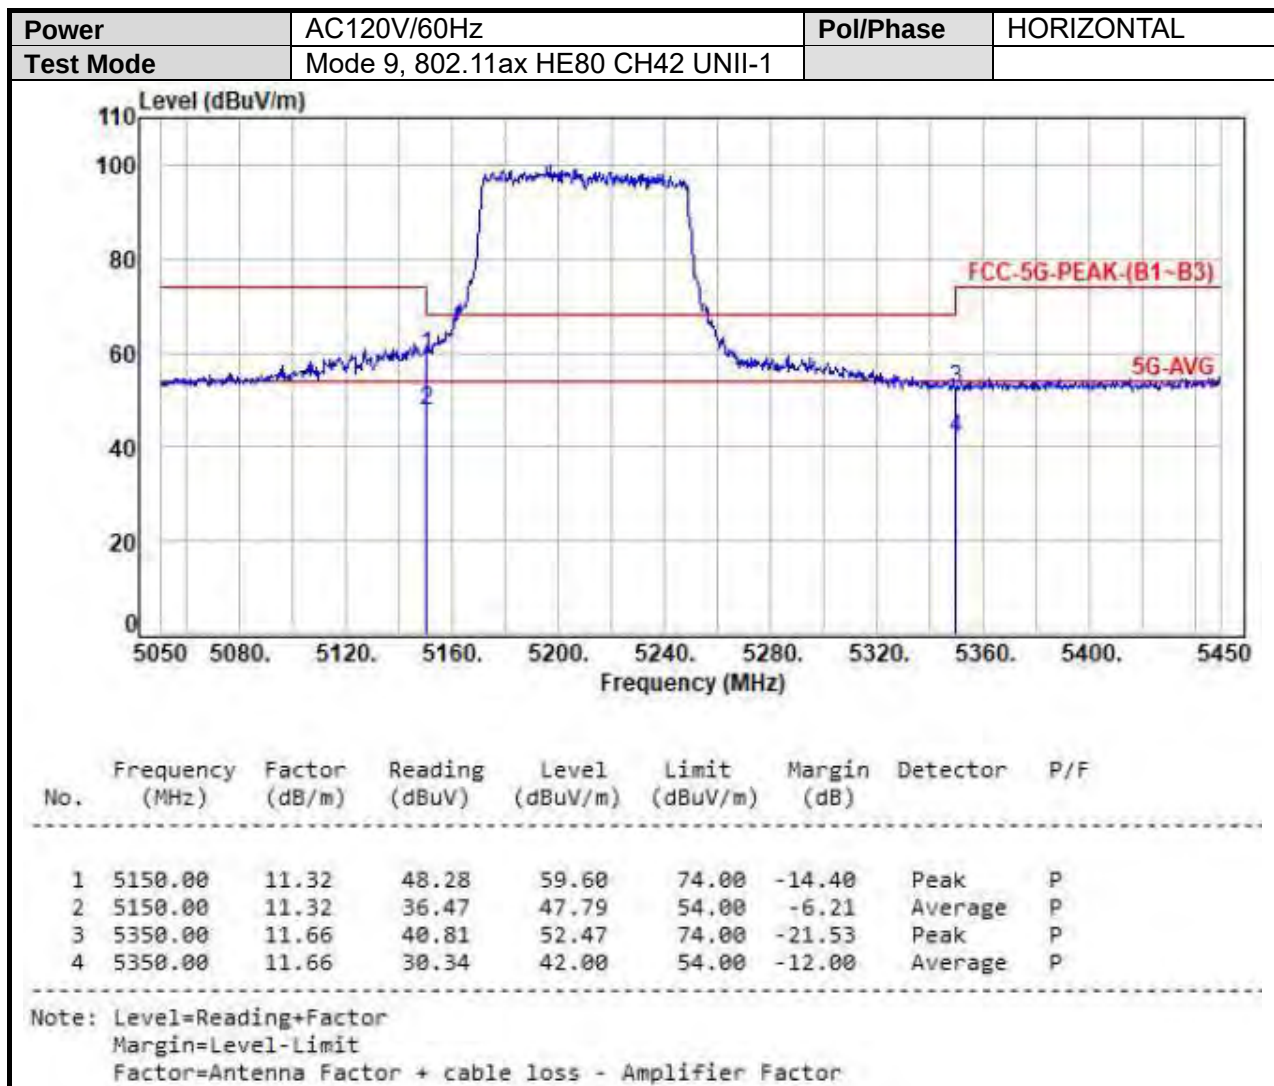

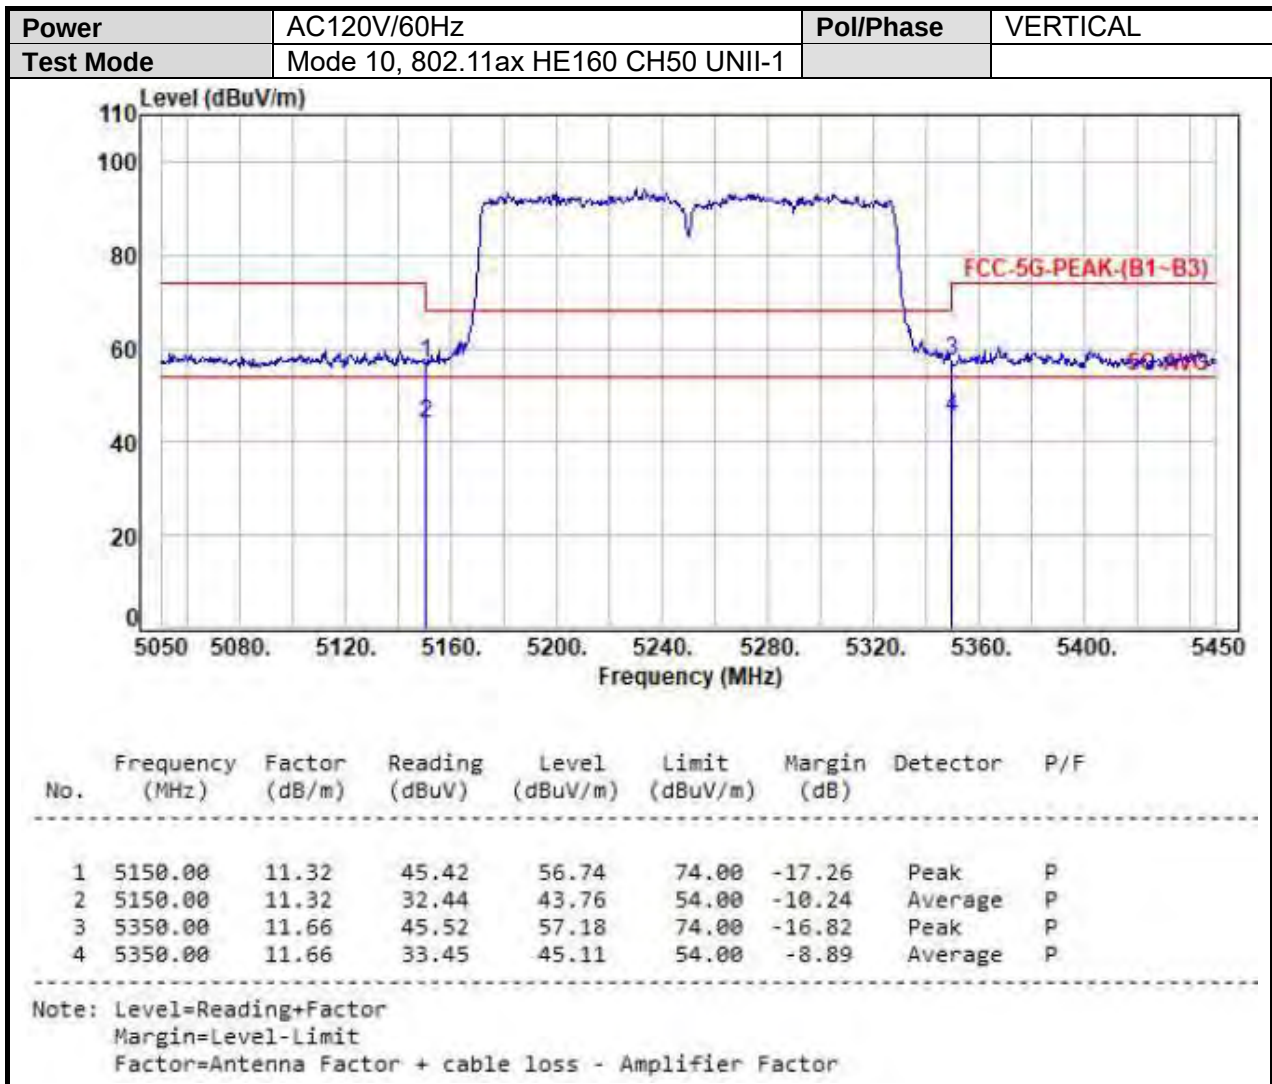

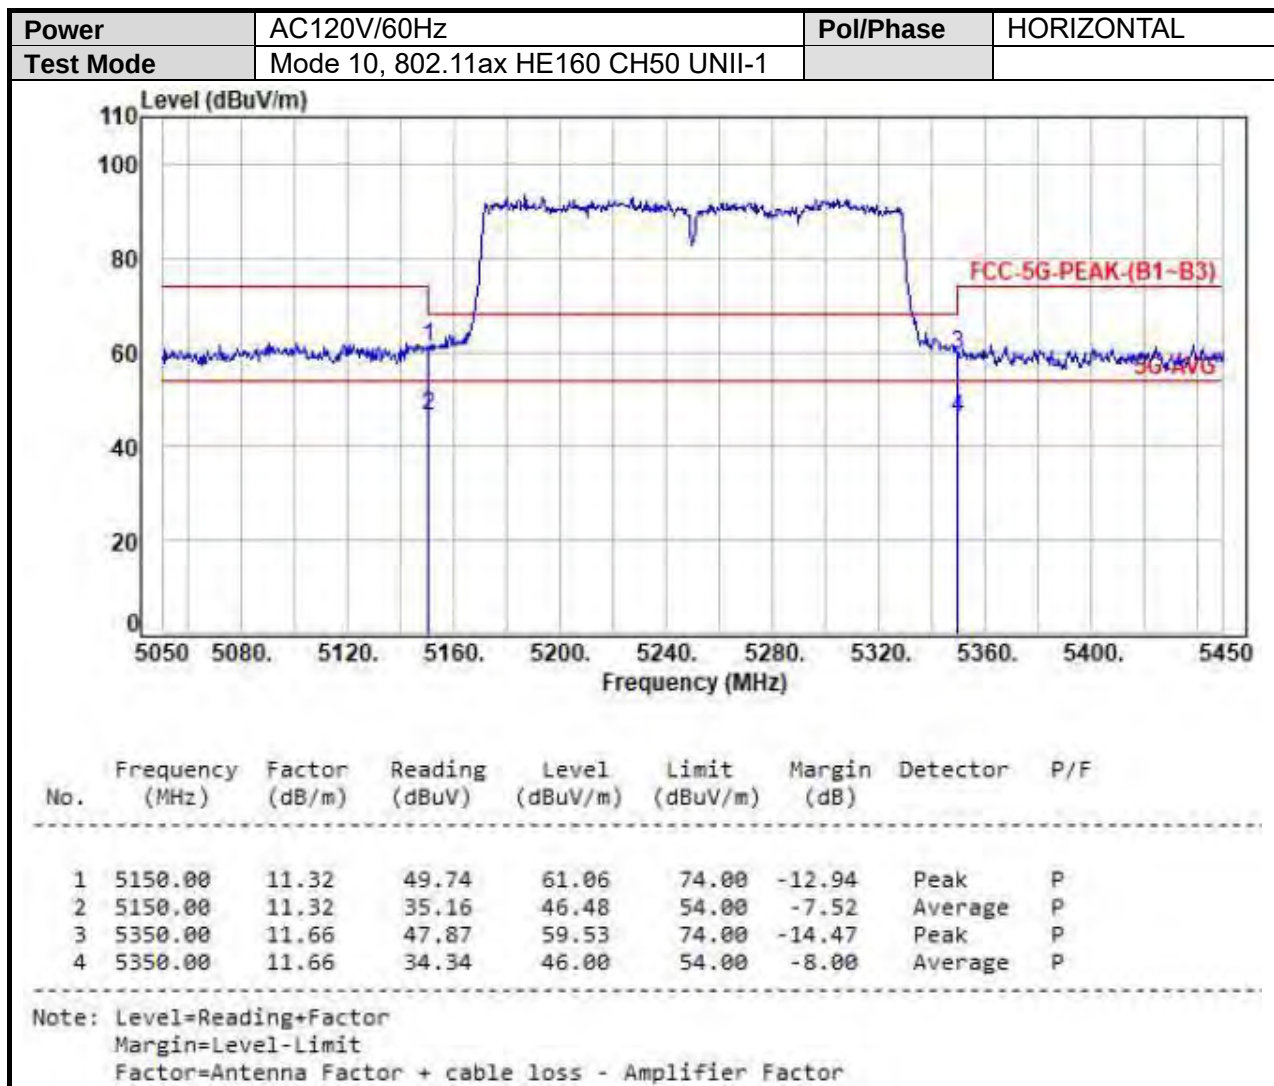



UNII-2A

