

# TEST REPORT

Product Name: Boston MBTA LED Circuit Board Map  
FCC ID: 2BDVP-MBTA9  
Trademark: N/A  
Model Number: MBTA9  
Prepared For: Traintrackr LLC  
Address: 50 Sims Ave, Unit 108, Providence, RI, 02909  
Manufacturer: Traintrackr LLC  
Address: 50 Sims Ave, Unit 108, Providence, RI, 02909  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Oct. 14, 2024  
Sample tested Date: Oct. 14, 2024 to Oct. 23, 2024  
Issue Date: Oct. 23, 2024  
Report No.: CTB24101404301RF02  
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

	Page
Test Report Declaration	
<b>1. VERSION</b> .....	<b>4</b>
<b>2. TEST SUMMARY</b> .....	<b>5</b>
<b>3. MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	<b>7</b>
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	<b>9</b>
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	<b>12</b>
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 Test Result .....	14
<b>7. RADIATED SPURIOUS EMISSION</b> .....	<b>16</b>
7.1 Block Diagram Of Test Setup .....	16
7.2 Limit .....	16
7.3 Test procedure .....	17
7.4 Test Result .....	18
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>27</b>
8.1 Block Diagram Of Test Setup .....	27
8.2 Limit .....	27
8.3 Test procedure .....	27
8.4 Test Result .....	28
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	<b>35</b>
9.1 Block Diagram Of Test Setup .....	35
9.2 Limit .....	35
9.3 Test procedure .....	35
9.4 Test Result .....	35
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	<b>39</b>
10.1 Block Diagram Of Test Setup .....	39
10.2 Limit .....	39
10.3 Test procedure .....	39
10.4 Test Result .....	39
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	<b>43</b>
11.1 Block Diagram Of Test Setup .....	43
11.2 Limit .....	43
11.3 Test procedure .....	43
11.4 Test Result .....	43
<b>12. HOPPING CHANNEL NUMBER</b> .....	<b>47</b>
12.1 Block Diagram Of Test Setup .....	47
12.2 Limit .....	47
12.3 Test procedure .....	47
12.4 Test Result .....	47

<b>13. DWELL TIME</b>	<b>49</b>
13.1 Block Diagram Of Test Setup	49
13.2 Limit	49
13.3 Test procedure	49
13.4 Test Result	49
<b>14. PSEUDORANDOM FREQUENCY</b>	<b>53</b>
14.1 Limit	53
14.2 Test procedure	53
14.3 Test Result	53
<b>15. ANTENNA REQUIREMENT</b>	<b>54</b>
<b>16. EUT TEST SETUP PHOTOGRAPHS</b>	<b>55</b>

*(Note: N/A means not applicable)*





1. VERSION

Report No.	Issue Date	Description	Approved
CTB24101404301RF02	Oct. 23, 2024	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB



#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	MBTA9
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 2.944dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: PCB antenna
Antenna Gain:	Bluetooth: 3.28dBi
Ratings:	DC 5V 2A

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature( $^{\circ}$ C)	23
Low Temperature( $^{\circ}$ C)	0
High Temperature( $^{\circ}$ C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

#### Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

#### Radiated emission(No.2 Chamber)

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2024/11/27
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2024/11/27
10	Coaxial cable	Times	2m	/	/	2024/11/27




11	Coaxial cable	Times	2m	/	/	2024/11/27
12	Coaxial cable	Times	1m	/	/	2024/11/27
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28



## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

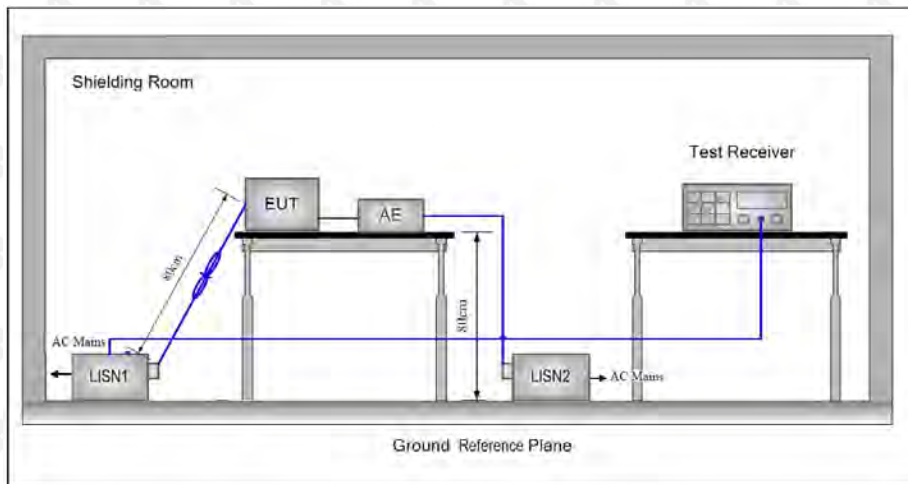

### 6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.



6.4 Test Result

L: Worst case-GFSK(low channel)

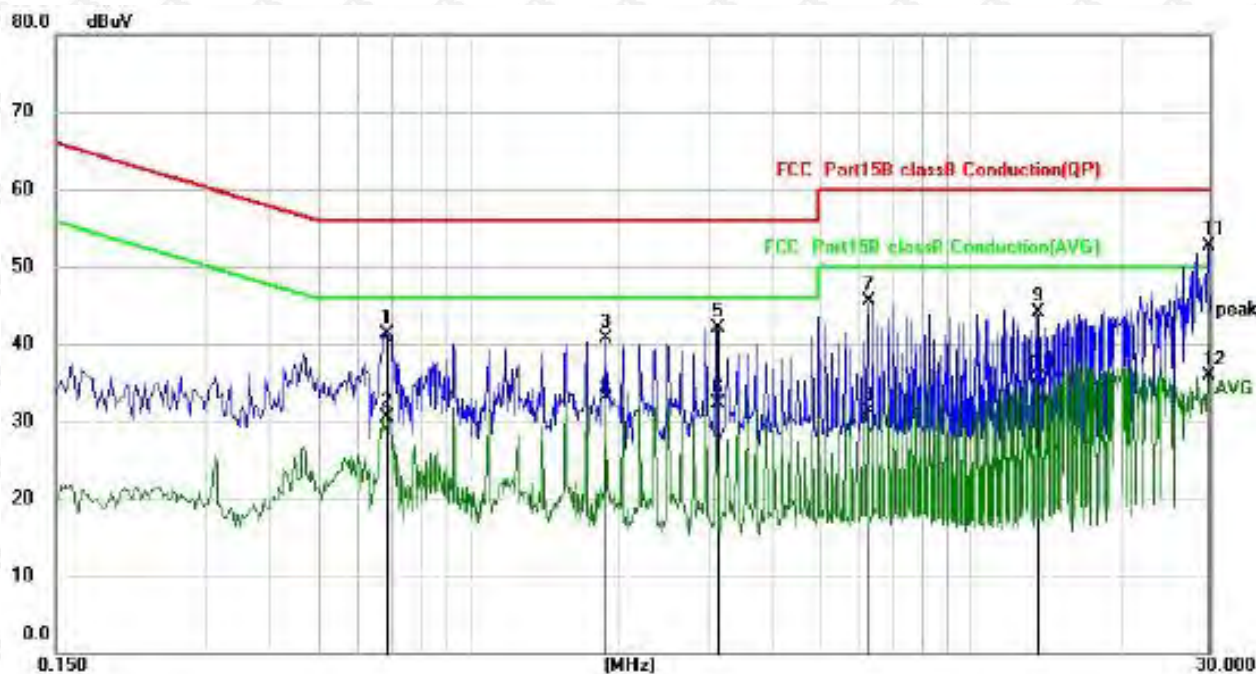


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.6860	30.66	10.71	41.37	56.00	-14.63	QP
2		0.6860	19.73	10.71	30.44	46.00	-15.56	AVG
3		1.8740	29.18	11.50	40.68	56.00	-15.32	QP
4		1.8740	21.59	11.50	33.09	46.00	-12.91	AVG
5		3.1259	30.25	11.83	42.08	56.00	-13.92	QP
6		3.1259	20.48	11.83	32.31	46.00	-13.69	AVG
7		6.2500	32.84	12.68	45.52	60.00	-14.48	QP
8		6.2500	18.71	12.68	31.39	50.00	-18.61	AVG
9		13.5937	30.75	13.31	44.06	60.00	-15.94	QP
10		13.5937	22.10	13.31	35.41	50.00	-14.59	AVG
11	*	29.6859	38.24	14.46	52.70	60.00	-7.30	QP
12		29.6859	21.46	14.46	35.92	50.00	-14.08	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



N: Worst case-GFSK(low channel)

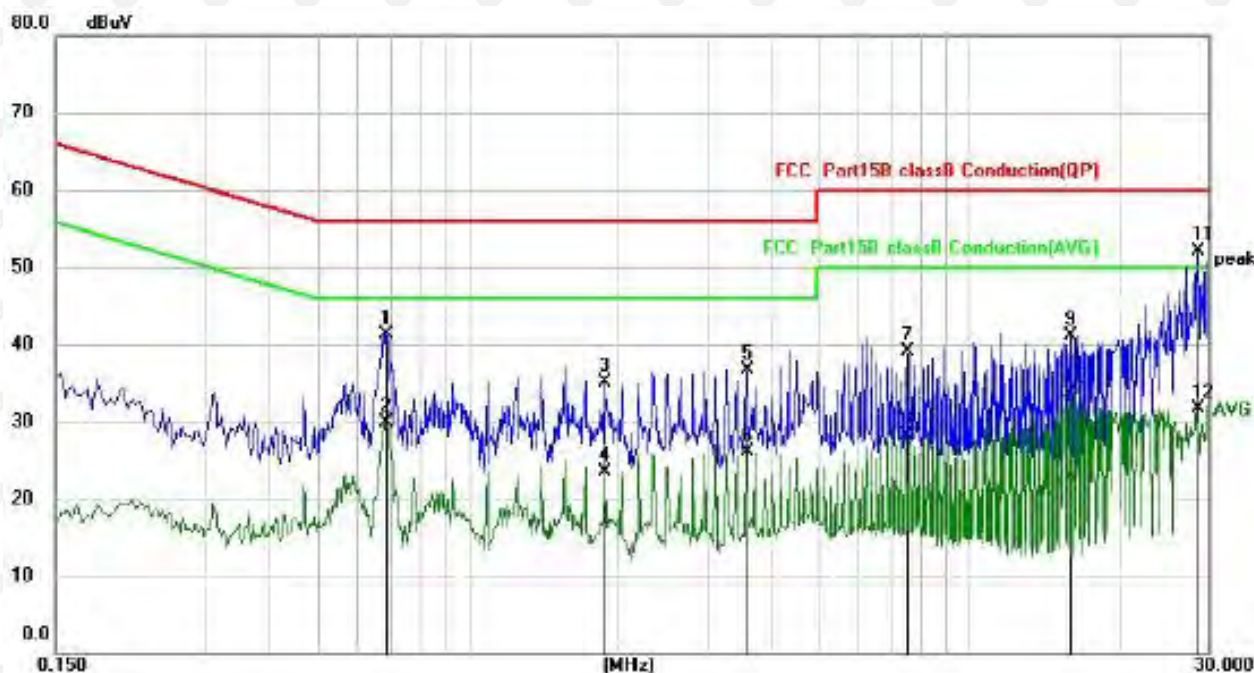

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.6860	30.68	10.70	41.38	56.00	-14.62	QP
2		0.6860	19.12	10.70	29.82	46.00	-16.18	AVG
3		1.8740	23.68	11.50	35.18	56.00	-20.82	QP
4		1.8740	11.97	11.50	23.47	46.00	-22.53	AVG
5		3.5939	24.75	11.93	36.68	56.00	-19.32	QP
6		3.5939	14.27	11.93	26.20	46.00	-19.80	AVG
7		7.5019	26.04	12.99	39.03	60.00	-20.97	QP
8		7.5019	15.24	12.99	28.23	50.00	-21.77	AVG
9		15.9379	27.72	13.39	41.11	60.00	-18.89	QP
10		15.9379	20.39	13.39	33.78	50.00	-16.22	AVG
11	*	28.5940	37.73	14.36	52.09	60.00	-7.91	QP
12		28.5940	17.41	14.36	31.77	50.00	-18.23	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

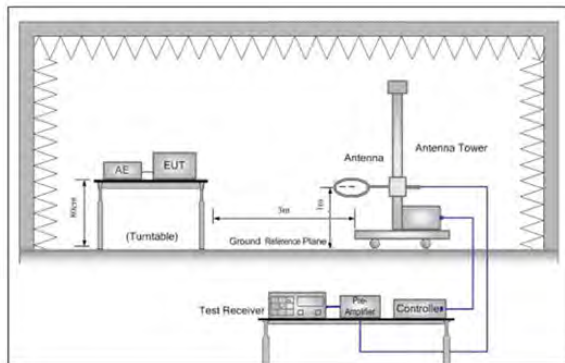


Figure 1. Below 30MHz

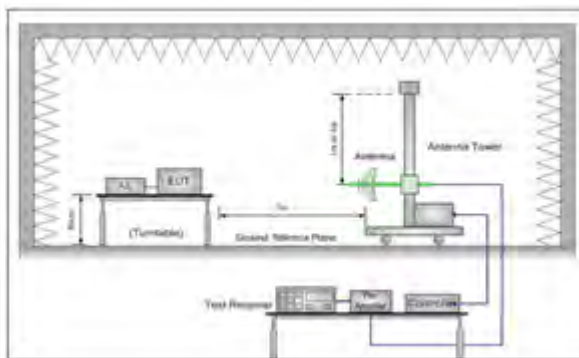


Figure 2. 30MHz to 1GHz

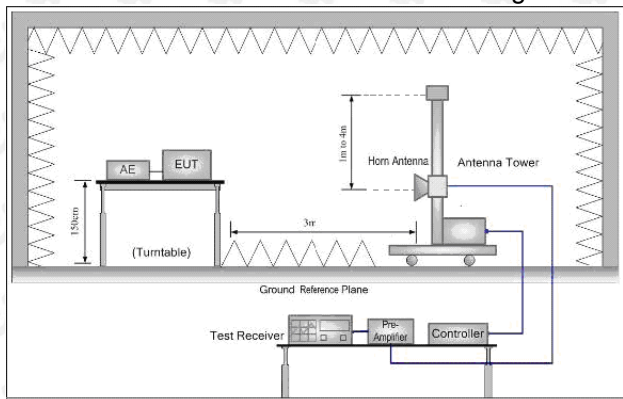


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average



### 7.4 Test Result


Below 1GHz Test Results:  
 Antenna polarity: H  
 Worst case-GFSK(low channel)

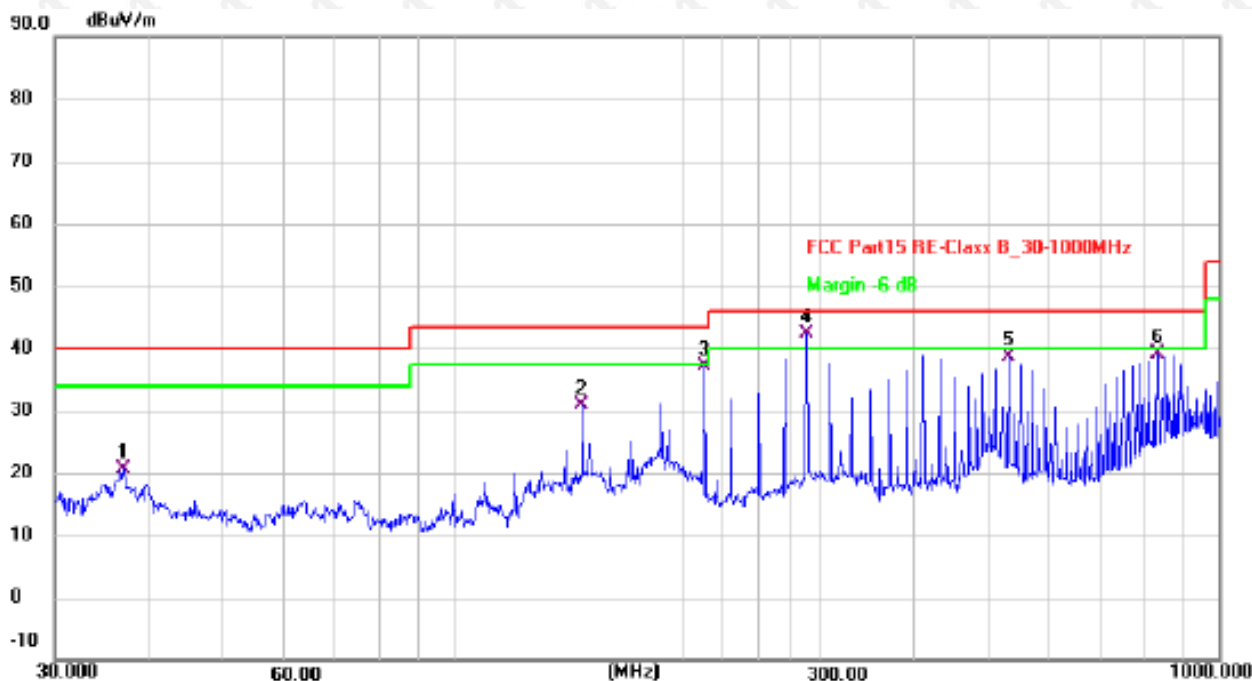

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.8952	33.54	-12.97	20.57	40.00	-19.43	QP
2	146.8874	44.29	-13.51	30.78	43.50	-12.72	QP
3	212.2692	53.92	-16.89	37.03	43.50	-6.47	QP
4 *	289.0020	56.77	-14.36	42.41	46.00	-3.59	QP
5	530.1013	47.10	-8.43	38.67	46.00	-7.33	QP
6	830.4000	41.22	-1.99	39.23	46.00	-6.77	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V  
Worst case-GFSK(low channel)

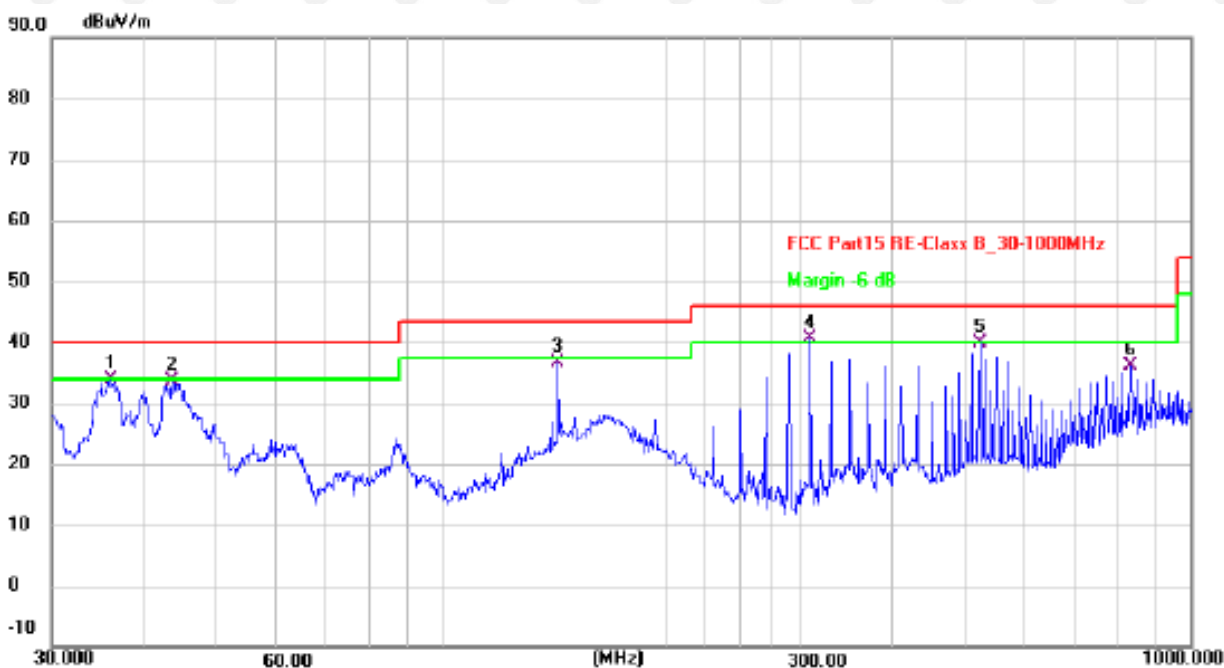

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.0007	46.86	-13.08	33.78	40.00	-6.22	QP
2	43.5056	46.83	-13.30	33.53	40.00	-6.47	QP
3	142.8240	50.57	-14.00	36.57	43.50	-6.93	QP
4 *	309.9977	54.39	-13.64	40.75	46.00	-5.25	QP
5	522.7180	48.51	-8.64	39.87	46.00	-6.13	QP
6	830.4000	38.01	-1.99	36.02	46.00	-9.98	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

## Above 1 GHz Test Results:

 CH Low (2402MHz)  
 Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	58.46	-3.65	54.81	74.00	-19.19	peak
4804	48.32	-3.65	44.67	54.00	-9.33	AVG
7206	59.11	-0.95	58.16	74.00	-15.84	peak
7206	42.93	-0.95	41.98	54.00	-12.02	AVG

 Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
 Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	58.75	-3.65	55.10	74.00	-18.90	peak
4804	50.13	-3.65	46.48	54.00	-7.52	AVG
7206	60.91	-0.95	59.96	74.00	-14.04	peak
7206	40.64	-0.95	39.69	54.00	-14.31	AVG

 Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
 Margin = Emission level - Limits



CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	60.17	-3.54	56.63	74.00	-17.37	peak
4882.00	47.58	-3.54	44.04	54.00	-9.96	AVG
7323.00	57.57	-0.81	56.76	74.00	-17.24	peak
7323.00	42.72	-0.81	41.91	54.00	-12.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	58.98	-3.54	55.44	74.00	-18.56	peak
4882.00	50.47	-3.54	46.93	54.00	-7.07	AVG
7323.00	56.51	-0.81	55.70	74.00	-18.30	peak
7323.00	42.91	-0.81	42.10	54.00	-11.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)  
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.66	-3.43	53.23	74.00	-20.77	peak
4960	48.37	-3.44	44.93	54.00	-9.07	AVG
7440	58.81	-0.77	58.04	74.00	-15.96	peak
7440	39.63	-0.77	38.86	54.00	-15.14	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.52	-3.43	53.09	74.00	-20.91	peak
4960	48.78	-3.44	45.34	54.00	-8.66	AVG
7440	59.88	-0.77	59.11	74.00	-14.89	peak
7440	40.22	-0.77	39.45	54.00	-14.55	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

**Restricted bands around fundamental frequency (Radiated)**

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	56.34	-5.81	50.53	74.00	-23.47	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.86	-5.84	49.02	74.00	-24.98	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.58	-5.81	49.77	74.00	-24.23	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.36	-5.84	49.52	74.00	-24.48	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	54.89	-5.81	49.08	74.00	-24.92	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.61	-6.06	48.55	74.00	-25.45	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	56.83	-5.81	51.02	74.00	-22.98	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.92	-6.06	48.86	74.00	-25.14	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	56.82	-5.81	51.01	74.00	-22.99	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.53	-5.84	48.69	74.00	-25.31	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	55.90	-5.81	50.09	74.00	-23.91	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.42	-5.84	47.58	74.00	-26.42	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	57.63	-5.81	51.82	74.00	-22.18	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.54	-6.06	50.48	74.00	-23.52	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.92	-5.81	50.11	74.00	-23.89	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.99	-6.06	47.93	74.00	-26.07	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits


Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.



## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

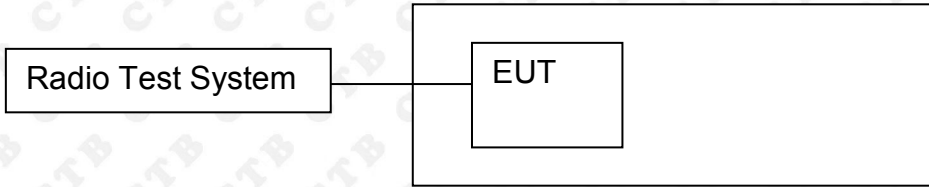


### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold

## 8.4 Test Result

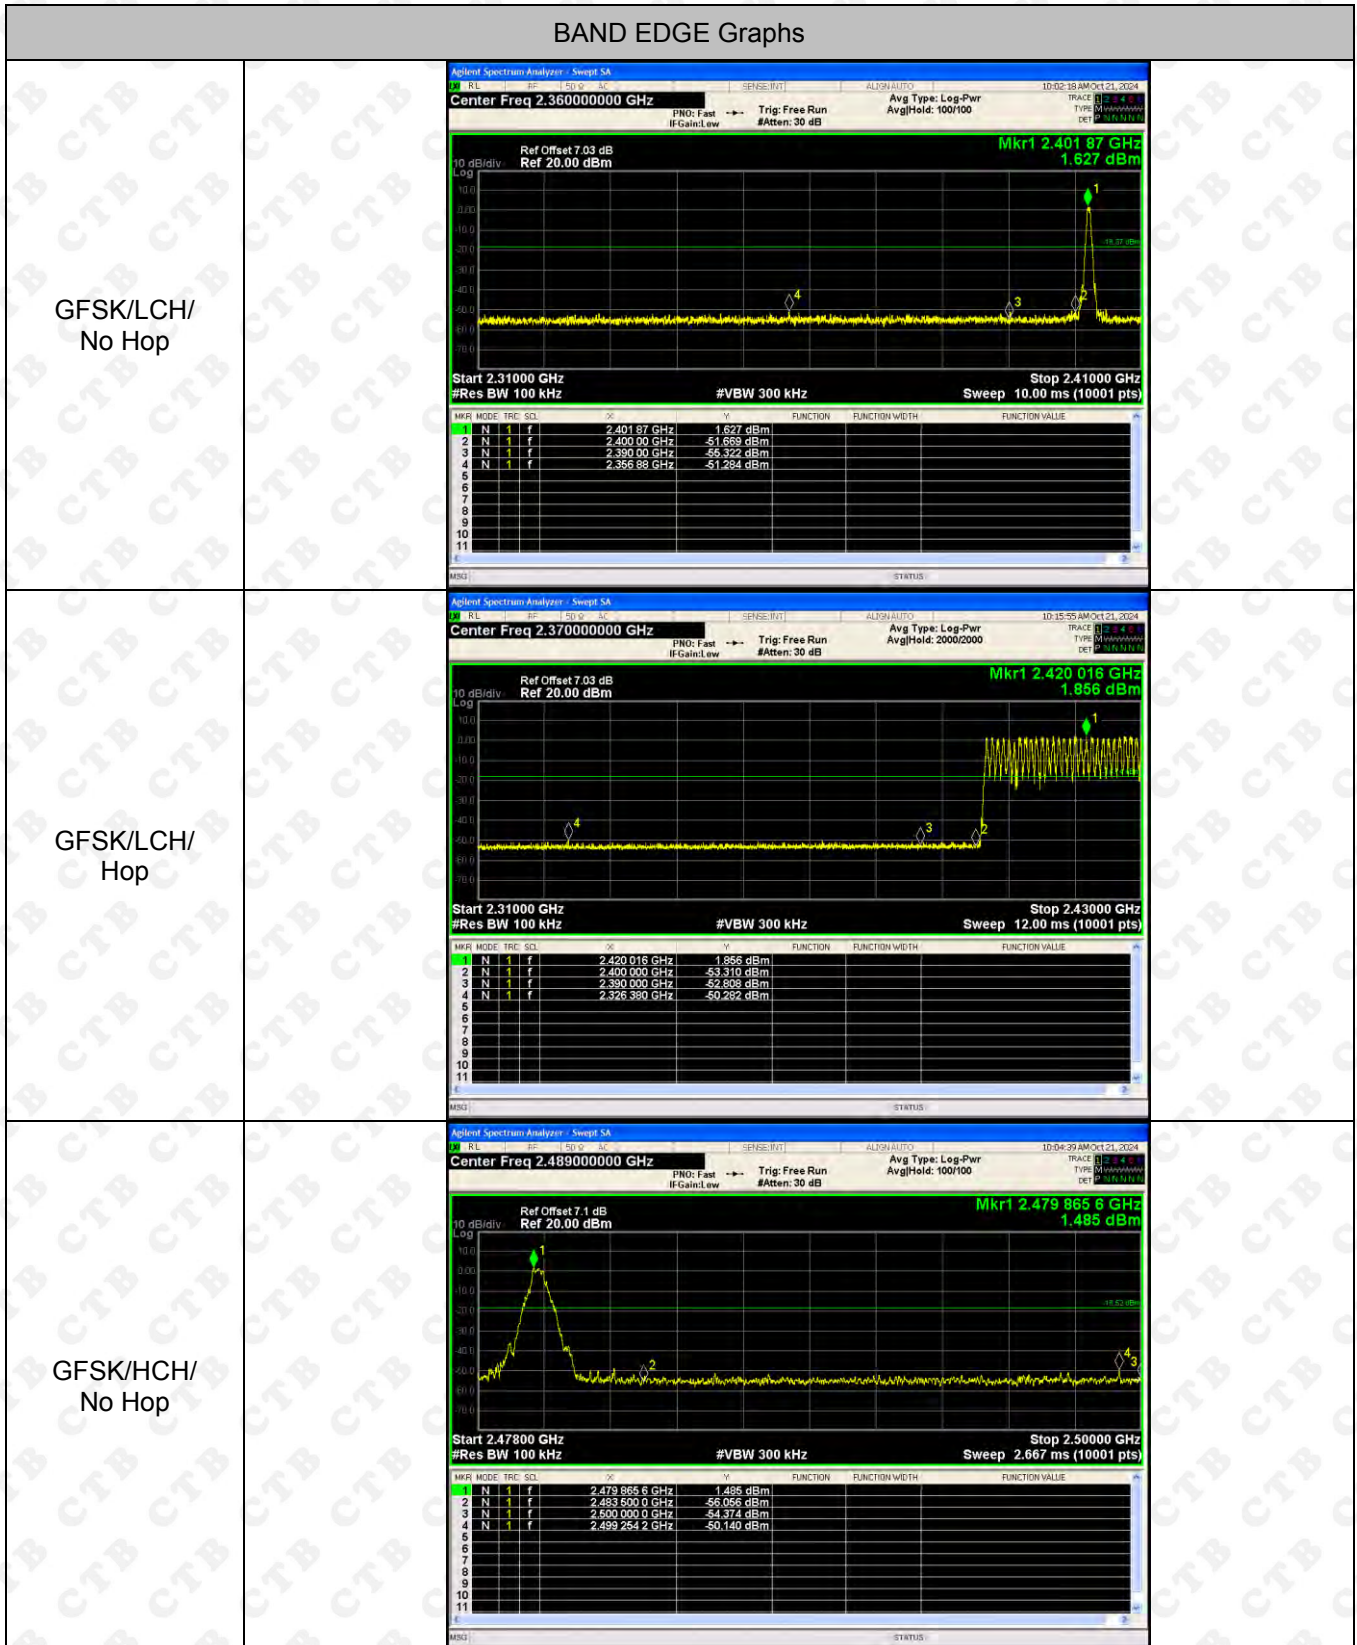



<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>Mkr1 2.46386875 GHz 1.923 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.46386875 GHz</td> <td>1.923 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48350000 GHz</td> <td>-51.733 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.49000000 GHz</td> <td>-53.416 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.49977500 GHz</td> <td>-50.629 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.46386875 GHz	1.923 dBm				2	N	1	f	2.48350000 GHz	-51.733 dBm				3	N	1	f	2.49000000 GHz	-53.416 dBm				4	N	1	f	2.49977500 GHz	-50.629 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.46386875 GHz	1.923 dBm																																									
2	N	1	f	2.48350000 GHz	-51.733 dBm																																									
3	N	1	f	2.49000000 GHz	-53.416 dBm																																									
4	N	1	f	2.49977500 GHz	-50.629 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.360000000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Mkr1 2.40187 GHz 1.401 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.41000 GHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40187 GHz</td> <td>1.401 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-53.897 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-53.869 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.34234 GHz</td> <td>-51.482 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40187 GHz	1.401 dBm				2	N	1	f	2.40000 GHz	-53.897 dBm				3	N	1	f	2.39000 GHz	-53.869 dBm				4	N	1	f	2.34234 GHz	-51.482 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40187 GHz	1.401 dBm																																									
2	N	1	f	2.40000 GHz	-53.897 dBm																																									
3	N	1	f	2.39000 GHz	-53.869 dBm																																									
4	N	1	f	2.34234 GHz	-51.482 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Mkr1 2.412012 GHz 1.806 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.412012 GHz</td> <td>1.806 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-53.213 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-52.784 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.378864 GHz</td> <td>-50.416 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412012 GHz	1.806 dBm				2	N	1	f	2.40000 GHz	-53.213 dBm				3	N	1	f	2.39000 GHz	-52.784 dBm				4	N	1	f	2.378864 GHz	-50.416 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.412012 GHz	1.806 dBm																																									
2	N	1	f	2.40000 GHz	-53.213 dBm																																									
3	N	1	f	2.39000 GHz	-52.784 dBm																																									
4	N	1	f	2.378864 GHz	-50.416 dBm																																									




<p><math>\pi/4</math>DQPSK/HCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 024 0 GHz</td> <td>1.254 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-55.891 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 0 GHz</td> <td>-55.815 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.498 229 0 GHz</td> <td>-51.179 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 024 0 GHz	1.254 dBm				2	N	1	f	2.483 500 0 GHz	-55.891 dBm				3	N	1	f	2.490 000 0 GHz	-55.815 dBm				4	N	1	f	2.498 229 0 GHz	-51.179 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.480 024 0 GHz	1.254 dBm																																										
2	N	1	f	2.483 500 0 GHz	-55.891 dBm																																										
3	N	1	f	2.490 000 0 GHz	-55.815 dBm																																										
4	N	1	f	2.498 229 0 GHz	-51.179 dBm																																										
<p><math>\pi/4</math>DQPSK/HCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 018 75 GHz</td> <td>1.872 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 500 00 GHz</td> <td>-52.309 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-52.241 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.498 981 25 GHz</td> <td>-49.504 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 018 75 GHz	1.872 dBm				2	N	1	f	2.463 500 00 GHz	-52.309 dBm				3	N	1	f	2.500 000 00 GHz	-52.241 dBm				4	N	1	f	2.498 981 25 GHz	-49.504 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.441 018 75 GHz	1.872 dBm																																										
2	N	1	f	2.463 500 00 GHz	-52.309 dBm																																										
3	N	1	f	2.500 000 00 GHz	-52.241 dBm																																										
4	N	1	f	2.498 981 25 GHz	-49.504 dBm																																										
<p>8DPSK/LCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 03 GHz</td> <td>0.417 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-51.495 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-54.555 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.362 05 GHz</td> <td>-50.855 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 03 GHz	0.417 dBm				2	N	1	f	2.400 00 GHz	-51.495 dBm				3	N	1	f	2.390 00 GHz	-54.555 dBm				4	N	1	f	2.362 05 GHz	-50.855 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.402 03 GHz	0.417 dBm																																										
2	N	1	f	2.400 00 GHz	-51.495 dBm																																										
3	N	1	f	2.390 00 GHz	-54.555 dBm																																										
4	N	1	f	2.362 05 GHz	-50.855 dBm																																										

<p>8DPSK /LCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.370000000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Mkr1 2.422 008 GHz 1.865 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.422 008 GHz</td> <td>1.865 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-52.339 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-51.048 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.389 890 GHz</td> <td>-50.176 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.422 008 GHz	1.865 dBm				2	N	1	f	2.400 000 GHz	-52.339 dBm				3	N	1	f	2.390 000 GHz	-51.048 dBm				4	N	1	f	2.389 890 GHz	-50.176 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.422 008 GHz	1.865 dBm																																									
2	N	1	f	2.400 000 GHz	-52.339 dBm																																									
3	N	1	f	2.390 000 GHz	-51.048 dBm																																									
4	N	1	f	2.389 890 GHz	-50.176 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.489000000 GHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>Mkr1 2.480 191 2 GHz 1.217 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 191 2 GHz</td> <td>1.217 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.668 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 0 GHz</td> <td>-55.350 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 628 8 GHz</td> <td>-50.406 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 191 2 GHz	1.217 dBm				2	N	1	f	2.483 500 0 GHz	-54.668 dBm				3	N	1	f	2.490 000 0 GHz	-55.350 dBm				4	N	1	f	2.493 628 8 GHz	-50.406 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 191 2 GHz	1.217 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.668 dBm																																									
3	N	1	f	2.490 000 0 GHz	-55.350 dBm																																									
4	N	1	f	2.493 628 8 GHz	-50.406 dBm																																									
<p>8DPSK /HCH/Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>Mkr1 2.450 193 75 GHz 1.742 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.450 193 75 GHz</td> <td>1.742 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 00 GHz</td> <td>-52.980 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.503 000 00 GHz</td> <td>-</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.491 637 50 GHz</td> <td>-50.168 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.450 193 75 GHz	1.742 dBm				2	N	1	f	2.483 500 00 GHz	-52.980 dBm				3	N	1	f	2.503 000 00 GHz	-				4	N	1	f	2.491 637 50 GHz	-50.168 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.450 193 75 GHz	1.742 dBm																																									
2	N	1	f	2.483 500 00 GHz	-52.980 dBm																																									
3	N	1	f	2.503 000 00 GHz	-																																									
4	N	1	f	2.491 637 50 GHz	-50.168 dBm																																									




RF Conducted Spurious Emissions Graphs


GFSK/LCH

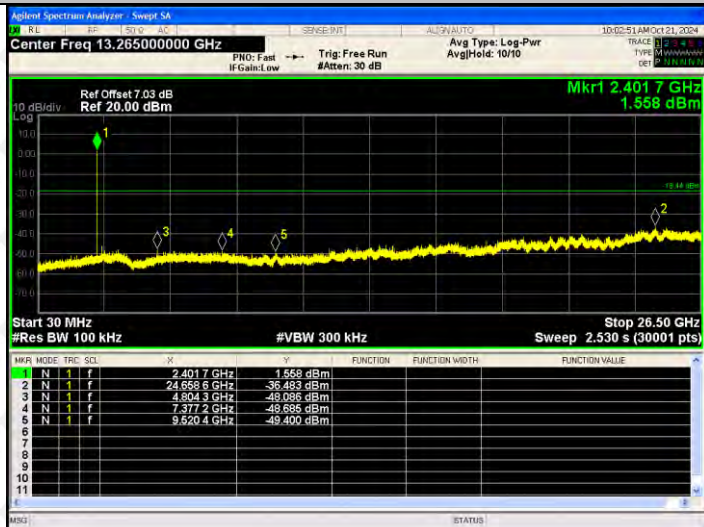


GFSK/MCH

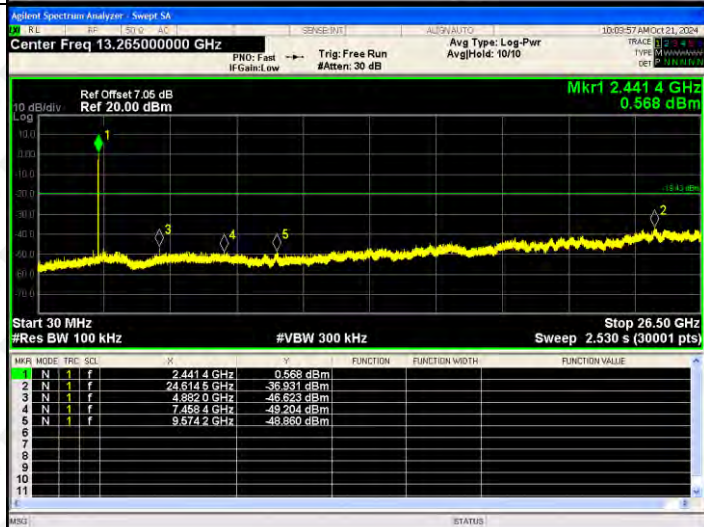


GFSK/HCH

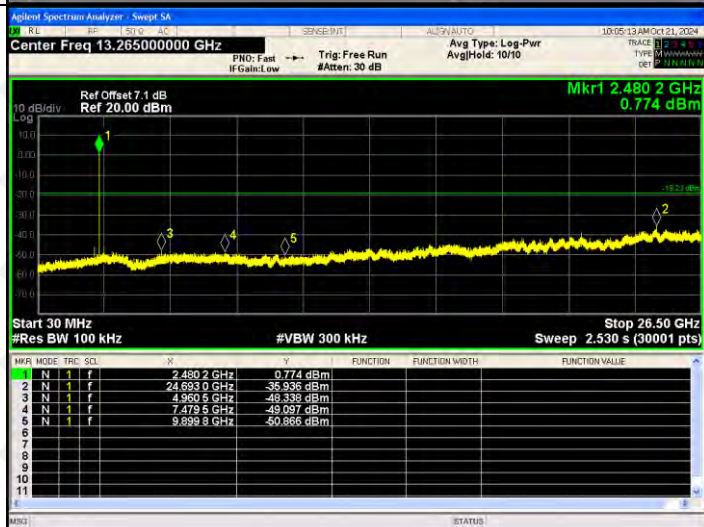

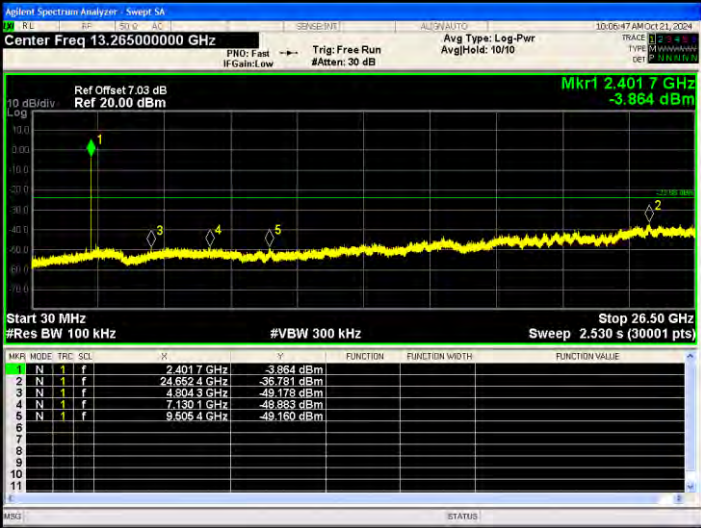


<p><math>\pi/4</math>DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-3.884 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6524 GHz</td> <td>-35.731 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.5023 GHz</td> <td>-49.119 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1301 GHz</td> <td>-49.883 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5054 GHz</td> <td>-49.160 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4017 GHz	-3.884 dBm				2	N	1	f	24.6524 GHz	-35.731 dBm				3	N	1	f	4.5023 GHz	-49.119 dBm				4	N	1	f	7.1301 GHz	-49.883 dBm				5	N	1	f	9.5054 GHz	-49.160 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4017 GHz	-3.884 dBm																																																		
2	N	1	f	24.6524 GHz	-35.731 dBm																																																		
3	N	1	f	4.5023 GHz	-49.119 dBm																																																		
4	N	1	f	7.1301 GHz	-49.883 dBm																																																		
5	N	1	f	9.5054 GHz	-49.160 dBm																																																		
<p><math>\pi/4</math>DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4405 GHz</td> <td>1.284 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6503 GHz</td> <td>-34.749 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7992 GHz</td> <td>-49.347 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3375 GHz</td> <td>-49.117 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5760 GHz</td> <td>-50.284 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4405 GHz	1.284 dBm				2	N	1	f	24.6503 GHz	-34.749 dBm				3	N	1	f	4.7992 GHz	-49.347 dBm				4	N	1	f	7.3375 GHz	-49.117 dBm				5	N	1	f	9.5760 GHz	-50.284 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4405 GHz	1.284 dBm																																																		
2	N	1	f	24.6503 GHz	-34.749 dBm																																																		
3	N	1	f	4.7992 GHz	-49.347 dBm																																																		
4	N	1	f	7.3375 GHz	-49.117 dBm																																																		
5	N	1	f	9.5760 GHz	-50.284 dBm																																																		
<p><math>\pi/4</math>DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>Mkr</th> <th>Mode</th> <th>Trig</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-0.194 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6568 GHz</td> <td>-36.516 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0955 GHz</td> <td>-49.056 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3634 GHz</td> <td>-49.209 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.0692 GHz</td> <td>-49.854 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value	1	N	1	f	2.4802 GHz	-0.194 dBm				2	N	1	f	24.6568 GHz	-36.516 dBm				3	N	1	f	5.0955 GHz	-49.056 dBm				4	N	1	f	7.3634 GHz	-49.209 dBm				5	N	1	f	10.0692 GHz	-49.854 dBm			
Mkr	Mode	Trig	SQL	X	Y	Function	Function Width	Function Value																																															
1	N	1	f	2.4802 GHz	-0.194 dBm																																																		
2	N	1	f	24.6568 GHz	-36.516 dBm																																																		
3	N	1	f	5.0955 GHz	-49.056 dBm																																																		
4	N	1	f	7.3634 GHz	-49.209 dBm																																																		
5	N	1	f	10.0692 GHz	-49.854 dBm																																																		
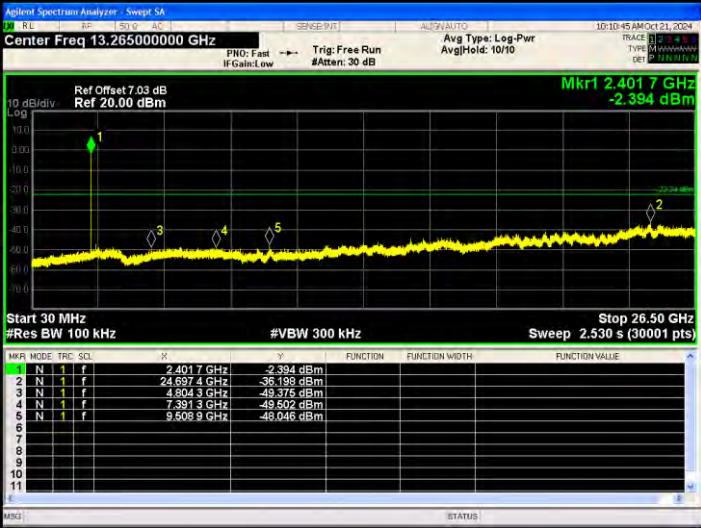
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 7 GHz</td> <td>-2.394 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.697 4 GHz</td> <td>-36.198 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.804 3 GHz</td> <td>-49.375 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.391 3 GHz</td> <td>-49.502 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.608 9 GHz</td> <td>-49.046 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 7 GHz	-2.394 dBm				2	N	1	f	24.697 4 GHz	-36.198 dBm				3	N	1	f	4.804 3 GHz	-49.375 dBm				4	N	1	f	7.391 3 GHz	-49.502 dBm				5	N	1	f	9.608 9 GHz	-49.046 dBm			
MNR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 7 GHz	-2.394 dBm																																																		
2	N	1	f	24.697 4 GHz	-36.198 dBm																																																		
3	N	1	f	4.804 3 GHz	-49.375 dBm																																																		
4	N	1	f	7.391 3 GHz	-49.502 dBm																																																		
5	N	1	f	9.608 9 GHz	-49.046 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 4 GHz</td> <td>-2.658 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.676 2 GHz</td> <td>-36.379 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.899 0 GHz</td> <td>-49.399 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.141 6 GHz</td> <td>-49.489 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.600 7 GHz</td> <td>-49.670 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	-2.658 dBm				2	N	1	f	24.676 2 GHz	-36.379 dBm				3	N	1	f	4.899 0 GHz	-49.399 dBm				4	N	1	f	7.141 6 GHz	-49.489 dBm				5	N	1	f	9.600 7 GHz	-49.670 dBm			
MNR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.441 4 GHz	-2.658 dBm																																																		
2	N	1	f	24.676 2 GHz	-36.379 dBm																																																		
3	N	1	f	4.899 0 GHz	-49.399 dBm																																																		
4	N	1	f	7.141 6 GHz	-49.489 dBm																																																		
5	N	1	f	9.600 7 GHz	-49.670 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 2 GHz</td> <td>-2.710 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.089 1 GHz</td> <td>-36.784 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.960 5 GHz</td> <td>-49.371 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.933 1 GHz</td> <td>-49.239 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.939 5 GHz</td> <td>-50.190 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-2.710 dBm				2	N	1	f	26.089 1 GHz	-36.784 dBm				3	N	1	f	4.960 5 GHz	-49.371 dBm				4	N	1	f	7.933 1 GHz	-49.239 dBm				5	N	1	f	9.939 5 GHz	-50.190 dBm			
MNR	MODE	TRIG	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.480 2 GHz	-2.710 dBm																																																		
2	N	1	f	26.089 1 GHz	-36.784 dBm																																																		
3	N	1	f	4.960 5 GHz	-49.371 dBm																																																		
4	N	1	f	7.933 1 GHz	-49.239 dBm																																																		
5	N	1	f	9.939 5 GHz	-50.190 dBm																																																		



## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

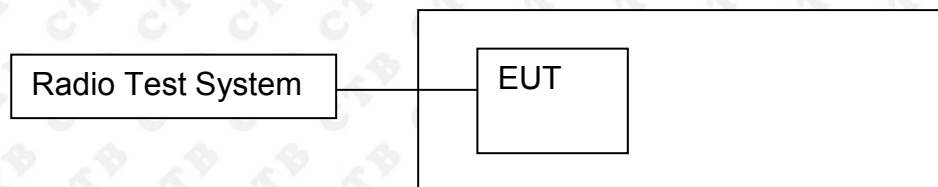

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




### 9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	1.744	20.97	PASS
	MCH	1.967	20.97	PASS
	HCH	1.587	20.97	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	2.532	20.97	PASS
	MCH	2.64	20.97	PASS
	HCH	2.206	20.97	PASS
EDR mode (8DPSK)	LCH	2.725	20.97	PASS
	MCH	2.944	20.97	PASS
	HCH	2.454	20.97	PASS


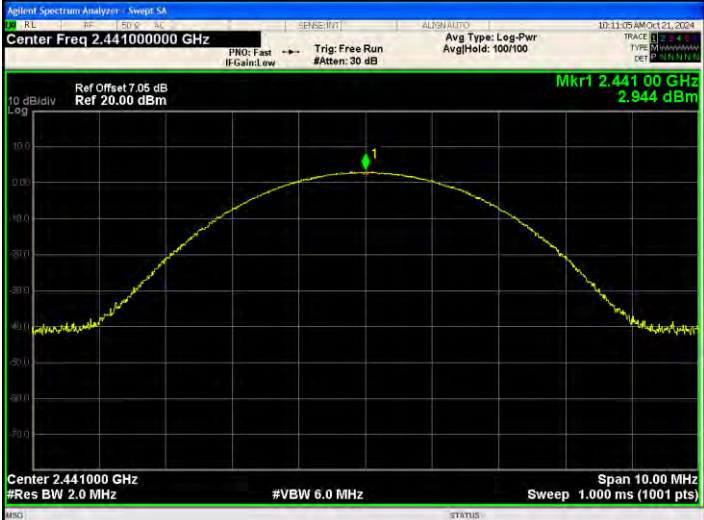



Test Graph:

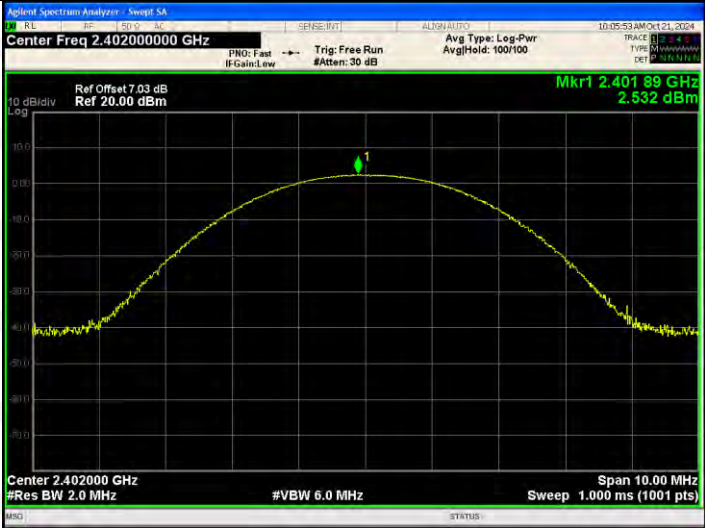Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 7.03 dB          Ref 20.00 dBm          Mkr1 2.402 21 GHz          1.744 dBm          Center 2.402000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.441000000 GHz          Ref Offset 7.05 dB          Ref 20.00 dBm          Mkr1 2.441 11 GHz          1.967 dBm          Center 2.441000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.480000000 GHz          Ref Offset 7.1 dB          Ref 20.00 dBm          Mkr1 2.479 96 GHz          1.587 dBm          Center 2.480000 GHz          #Res BW 2.0 MHz          #VBW 6.0 MHz          Span 10.00 MHz          Sweep 1.000 ms (1001 pts)</p>

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	




<p>8DPSK/LCH</p>	
<p>8DPSK /MCH</p>	
<p>8DPSK /HCH</p>	



## 10. 20DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

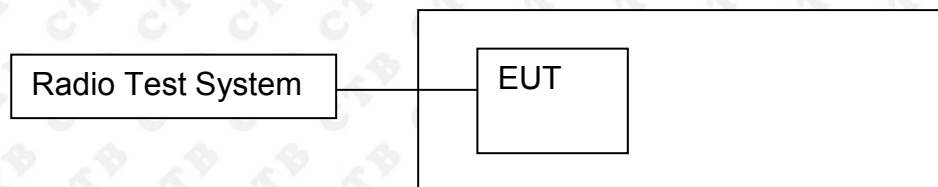

### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.88	<b>PASS</b>
	Mid channel	0.857	<b>PASS</b>
	High channel	0.918	<b>PASS</b>
$\pi/4$ DQPSK	Low channel	1.259	<b>PASS</b>
	Mid channel	1.346	<b>PASS</b>
	High channel	1.288	<b>PASS</b>
8DPSK	Low channel	1.296	<b>PASS</b>
	Mid channel	1.292	<b>PASS</b>
	High channel	1.313	<b>PASS</b>

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>GFSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Stid: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.03 dB</p> <p>Ref 27.03 dBm</p> <p>Mkr3 2.402454 GHz</p> <p>-21.028 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 827.64 kHz</p> <p>Total Power 8.15 dBm</p> <p>Transmit Freq Error 14.163 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 879.9 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Stid: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.05 dB</p> <p>Ref 27.05 dBm</p> <p>Mkr3 2.441443 GHz</p> <p>-20.365 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 825.42 kHz</p> <p>Total Power 8.44 dBm</p> <p>Transmit Freq Error 14.320 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 857.3 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Stid: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.1 dB</p> <p>Ref 27.10 dBm</p> <p>Mkr3 2.480466 GHz</p> <p>-22.260 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 857.94 kHz</p> <p>Total Power 7.46 dBm</p> <p>Transmit Freq Error 6.909 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 917.7 kHz</p> <p>x dB -20.00 dB</p>




<p><math>\pi/4</math>-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm Mkr3: 2.402654 GHz -18.183 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.96 dBm</td> </tr> <tr> <td>1.1827 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>24.144 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.259 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.96 dBm	1.1827 MHz			Transmit Freq Error	OBW Power	99.00 %	24.144 kHz	x dB	-20.00 dB	x dB Bandwidth			1.259 MHz		
Occupied Bandwidth	Total Power	7.96 dBm																	
1.1827 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
24.144 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.259 MHz																			
<p><math>\pi/4</math>-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.05 dB Ref: 27.05 dBm Mkr3: 2.441691 GHz -22.655 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.43 dBm</td> </tr> <tr> <td>1.1957 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>18.406 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.346 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.43 dBm	1.1957 MHz			Transmit Freq Error	OBW Power	99.00 %	18.406 kHz	x dB	-20.00 dB	x dB Bandwidth			1.346 MHz		
Occupied Bandwidth	Total Power	7.43 dBm																	
1.1957 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
18.406 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.346 MHz																			
<p><math>\pi/4</math>-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.1 dB Ref: 27.10 dBm Mkr3: 2.480664 GHz -19.035 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.70 dBm</td> </tr> <tr> <td>1.1956 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>20.216 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.288 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.70 dBm	1.1956 MHz			Transmit Freq Error	OBW Power	99.00 %	20.216 kHz	x dB	-20.00 dB	x dB Bandwidth			1.288 MHz		
Occupied Bandwidth	Total Power	7.70 dBm																	
1.1956 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
20.216 kHz	x dB	-20.00 dB																	
x dB Bandwidth																			
1.288 MHz																			



<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.402669 GHz</p> <p>-21.609 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1812 MHz</p> <p>Total Power 7.92 dBm</p> <p>Transmit Freq Error 20.912 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.296 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB</p> <p>Ref: 27.05 dBm</p> <p>Mkr3 2.441662 GHz</p> <p>-22.129 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.2035 MHz</p> <p>Total Power 7.70 dBm</p> <p>Transmit Freq Error 15.791 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.292 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB</p> <p>Ref: 27.10 dBm</p> <p>Mkr3 2.480672 GHz</p> <p>-20.649 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.2087 MHz</p> <p>Total Power 7.66 dBm</p> <p>Transmit Freq Error 15.840 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.313 MHz</p> <p>x dB -20.00 dB</p>

## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

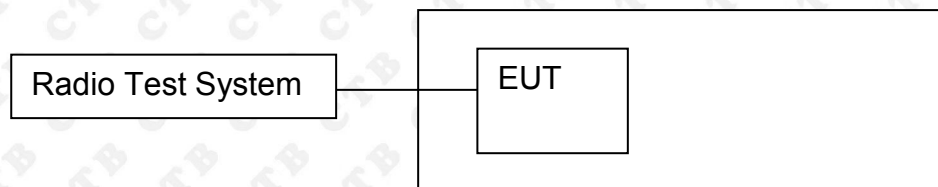

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.004	0.587	PASS
GFSK	MCH	0.998	0.571	PASS
GFSK	HCH	0.998	0.612	PASS
$\pi/4$ DQPSK	LCH	1.000	0.839	PASS
$\pi/4$ DQPSK	MCH	1.002	0.897	PASS
$\pi/4$ DQPSK	HCH	1.000	0.859	PASS
8DPSK	LCH	1.004	0.864	PASS
8DPSK	MCH	1.000	0.861	PASS
8DPSK	HCH	1.000	0.875	PASS





Test Graph

Graphs																												
GFSK/LCH	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.004 MHz (Δ)</td> <td></td> <td></td> <td>0.306 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401854 GHz</td> <td></td> <td></td> <td>-1.190 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.004 MHz (Δ)			0.306 dB	2	F	1	f		2.401854 GHz			-1.190 dBm
MNR	MODE	TRF	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	1.004 MHz (Δ)			0.306 dB																				
2	F	1	f		2.401854 GHz			-1.190 dBm																				
GFSK/MCH	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>998 kHz (Δ)</td> <td></td> <td></td> <td>-0.187 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440854 GHz</td> <td></td> <td></td> <td>-0.488 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	998 kHz (Δ)			-0.187 dB	2	F	1	f		2.440854 GHz			-0.488 dBm
MNR	MODE	TRF	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	998 kHz (Δ)			-0.187 dB																				
2	F	1	f		2.440854 GHz			-0.488 dBm																				
GFSK/HCH	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>998 kHz (Δ)</td> <td></td> <td></td> <td>0.794 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478850 GHz</td> <td></td> <td></td> <td>-1.476 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	998 kHz (Δ)			0.794 dB	2	F	1	f		2.478850 GHz			-1.476 dBm
MNR	MODE	TRF	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(Δ)	998 kHz (Δ)			0.794 dB																				
2	F	1	f		2.478850 GHz			-1.476 dBm																				


<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz -0.048 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>-0.048 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402182 GHz</td> <td></td> <td></td> <td>-5.021 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.048 dB	2	F	1	f		2.402182 GHz			-5.021 dBm	
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		-0.048 dB																					
2	F	1	f		2.402182 GHz			-5.021 dBm																					
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.002000000 MHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.002 MHz 0.096 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.002 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.096 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441012 GHz</td> <td></td> <td></td> <td>-1.471 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		0.096 dB	2	F	1	f		2.441012 GHz			-1.471 dBm	
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.002 MHz	( $\Delta$ )		0.096 dB																					
2	F	1	f		2.441012 GHz			-1.471 dBm																					
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p><math>\Delta</math>Mkr1 1.000 MHz 0.199 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>2</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.000 MHz</td> <td>(<math>\Delta</math>)</td> <td></td> <td>0.199 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479020 GHz</td> <td></td> <td></td> <td>-2.082 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		0.199 dB	2	F	1	f		2.479020 GHz			-2.082 dBm	
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	$\Delta$ 2	1	f	( $\Delta$ )	1.000 MHz	( $\Delta$ )		0.199 dB																					
2	F	1	f		2.479020 GHz			-2.082 dBm																					



<p>8DPSK/LCH</p>	 <table border="1" data-bbox="592 607 1299 763"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.004 MHz</td> <td>(Δ)</td> <td></td> <td>-0.094 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 008 GHz</td> <td></td> <td></td> <td>-2.293 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.004 MHz	(Δ)		-0.094 dB	2	F	1	f		2.402 008 GHz			-2.293 dBm
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	1.004 MHz	(Δ)		-0.094 dB																				
2	F	1	f		2.402 008 GHz			-2.293 dBm																				
<p>8DPSK /MCH</p>	 <table border="1" data-bbox="592 1133 1299 1290"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>0.874 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 018 GHz</td> <td></td> <td></td> <td>-2.206 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.000 MHz	(Δ)		0.874 dB	2	F	1	f		2.441 018 GHz			-2.206 dBm
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	1.000 MHz	(Δ)		0.874 dB																				
2	F	1	f		2.441 018 GHz			-2.206 dBm																				
<p>8DPSK /HCH</p>	 <table border="1" data-bbox="592 1659 1299 1816"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>0.069 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 016 GHz</td> <td></td> <td></td> <td>-1.861 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.000 MHz	(Δ)		0.069 dB	2	F	1	f		2.479 016 GHz			-1.861 dBm
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	1.000 MHz	(Δ)		0.069 dB																				
2	F	1	f		2.479 016 GHz			-1.861 dBm																				

## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

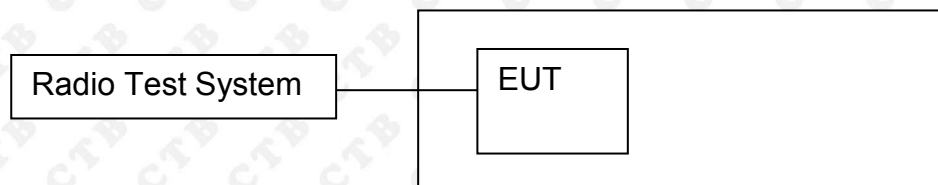

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

### 12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	$\geq 15$	PASS
$\pi/4$ DQPSK	Hop	79	$\geq 15$	PASS
8DPSK	Hop	79	$\geq 15$	PASS




Test Graph

Graphs																									
GFSK/Hop	<p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Mkr1 2.4018370 GHz 1.610 dBm</p> <p>Start 2.400000 GHz #Res BW 100 kHz</p> <p>Stop 2.48350 GHz #VBW 300 kHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td></td> <td></td> <td>1.610 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4799095 GHz</td> <td></td> <td></td> <td>1.430 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz			1.610 dBm	2	N	1	f	2.4799095 GHz			1.430 dBm
MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	N	1	f	2.4018370 GHz			1.610 dBm																		
2	N	1	f	2.4799095 GHz			1.430 dBm																		
$\pi/4$ DQPSK/Hop	<p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Mkr1 2.4018370 GHz 1.429 dBm</p> <p>Start 2.400000 GHz #Res BW 100 kHz</p> <p>Stop 2.48350 GHz #VBW 300 kHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td></td> <td></td> <td>1.429 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4803270 GHz</td> <td></td> <td></td> <td>-2.841 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz			1.429 dBm	2	N	1	f	2.4803270 GHz			-2.841 dBm
MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	N	1	f	2.4018370 GHz			1.429 dBm																		
2	N	1	f	2.4803270 GHz			-2.841 dBm																		
8DPSK/Hop	<p>Center Freq 2.441750000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Mkr1 2.4018370 GHz 0.717 dBm</p> <p>Start 2.400000 GHz #Res BW 100 kHz</p> <p>Stop 2.48350 GHz #VBW 300 kHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td></td> <td></td> <td>0.717 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4804105 GHz</td> <td></td> <td></td> <td>-2.731 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz			0.717 dBm	2	N	1	f	2.4804105 GHz			-2.731 dBm
MNR	MODE	TRC	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	N	1	f	2.4018370 GHz			0.717 dBm																		
2	N	1	f	2.4804105 GHz			-2.731 dBm																		

### 13. DWELL TIME

#### 13.1 Block Diagram Of Test Setup

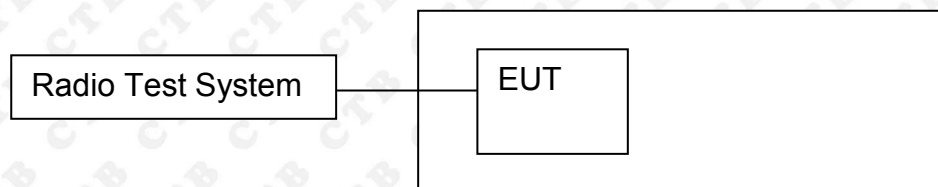

#### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

#### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

#### 13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.382	122.24	400	PASS
	DH1	HCH	0.382	122.24	400	PASS
	DH3	LCH	1.637	261.92	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5:  $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3:  $1600/79/4*0.4*79*(MkrDelta)/1000$

DH1:  $1600/79/2*0.4*79*(MkrDelta)/1000$


Remark: Mkr Delta is once pulse time.




## Test Graph

### Graphs


GFSK\_DH1/LCH

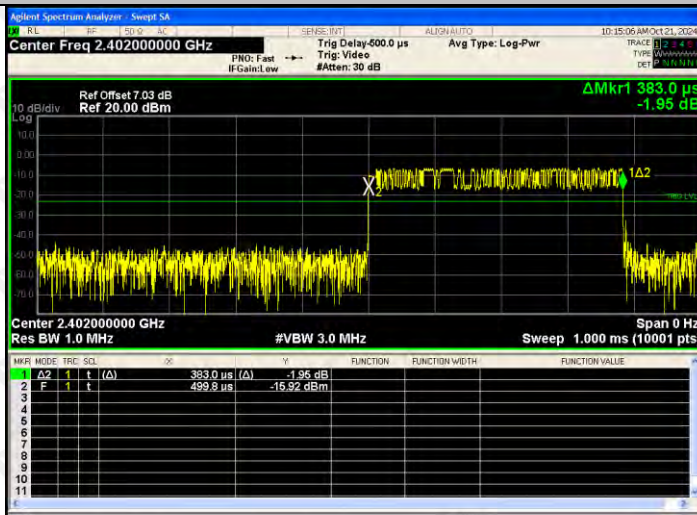

GFSK\_DH1/MCH

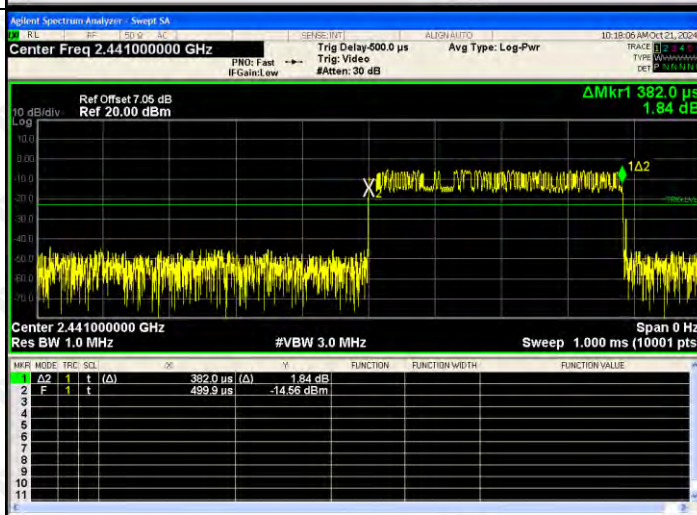



GFSK\_DH1/HCH

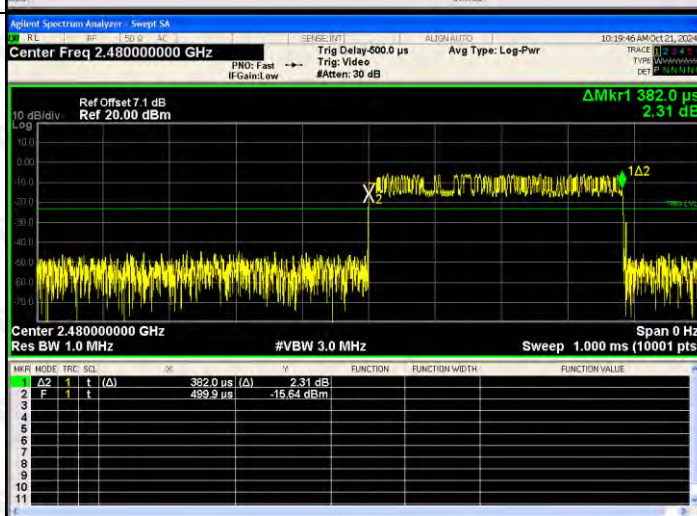

<p>GFSK_DH3/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.637 ms -5.77 dB</p> <p>Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms Span 0 Hz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.637 ms (Δ)</td> <td>-5.77 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 μs</td> <td>-12.93 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.637 ms (Δ)	-5.77 dB			2	F	1	t		500.1 μs	-12.93 dBm		
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.637 ms (Δ)	-5.77 dB																						
2	F	1	t		500.1 μs	-12.93 dBm																						
<p>GFSK_DH3/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.644 ms 1.34 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms Span 0 Hz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.644 ms (Δ)</td> <td>1.34 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 μs</td> <td>-6.70 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.644 ms (Δ)	1.34 dB			2	F	1	t		500.1 μs	-6.70 dBm		
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.644 ms (Δ)	1.34 dB																						
2	F	1	t		500.1 μs	-6.70 dBm																						
<p>GFSK_DH3/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.644 ms -3.24 dB</p> <p>Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms Span 0 Hz</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.644 ms (Δ)</td> <td>-3.24 dB</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 μs</td> <td>-13.48 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.644 ms (Δ)	-3.24 dB			2	F	1	t		499.8 μs	-13.48 dBm		
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.644 ms (Δ)	-3.24 dB																						
2	F	1	t		499.8 μs	-13.48 dBm																						

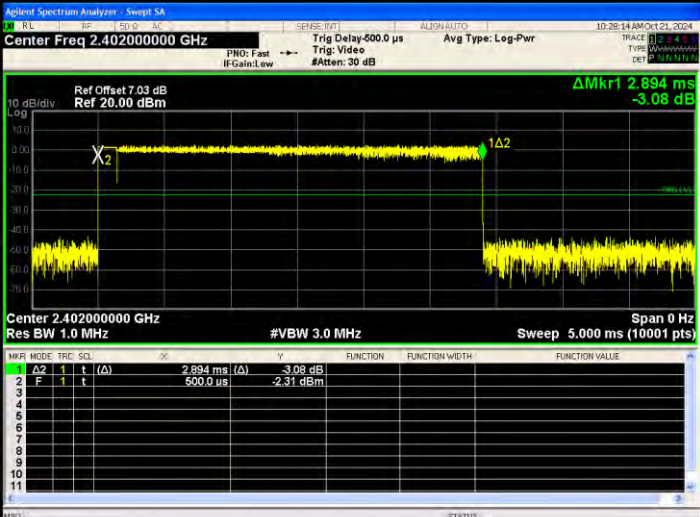

<p>GFSK_DH5/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Delta Mkr1 2.894 ms -3.08 dB</p> <p>Center 2.40200000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.894 ms</td> <td>(Δ)</td> <td></td> <td>-3.08 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 us</td> <td></td> <td></td> <td>-2.31 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.894 ms	(Δ)		-3.08 dB	2	F	1	t		500.0 us			-2.31 dBm
MKR	MODE	TRC	SOL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.894 ms	(Δ)		-3.08 dB																				
2	F	1	t		500.0 us			-2.31 dBm																				
<p>GFSK_DH5/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44100000 GHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>Delta Mkr1 2.894 ms -4.33 dB</p> <p>Center 2.44100000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.894 ms</td> <td>(Δ)</td> <td></td> <td>-4.33 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 us</td> <td></td> <td></td> <td>-1.55 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.894 ms	(Δ)		-4.33 dB	2	F	1	t		500.0 us			-1.55 dBm
MKR	MODE	TRC	SOL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.894 ms	(Δ)		-4.33 dB																				
2	F	1	t		500.0 us			-1.55 dBm																				
<p>GFSK_DH5/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>Delta Mkr1 2.894 ms -3.67 dB</p> <p>Center 2.48000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>2.894 ms</td> <td>(Δ)</td> <td></td> <td>-3.67 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 us</td> <td></td> <td></td> <td>-12.60 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.894 ms	(Δ)		-3.67 dB	2	F	1	t		500.0 us			-12.60 dBm
MKR	MODE	TRC	SOL	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.894 ms	(Δ)		-3.67 dB																				
2	F	1	t		500.0 us			-12.60 dBm																				

## 14. PSEUDORANDOM FREQUENCY

### 14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

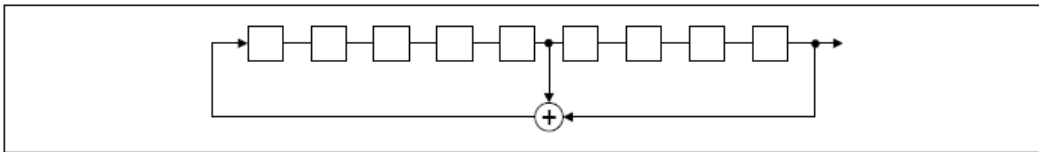

An example of Pseudorandom Frequency Hopping Sequence as follow:

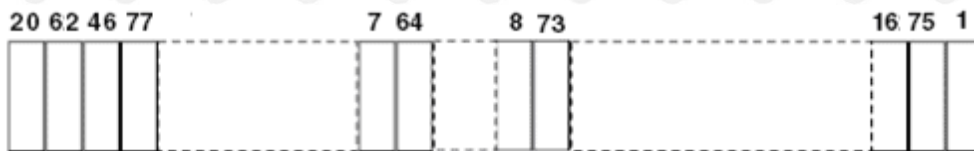

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.



## 15. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is 3.28dBi.

## 16. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

Below 1G

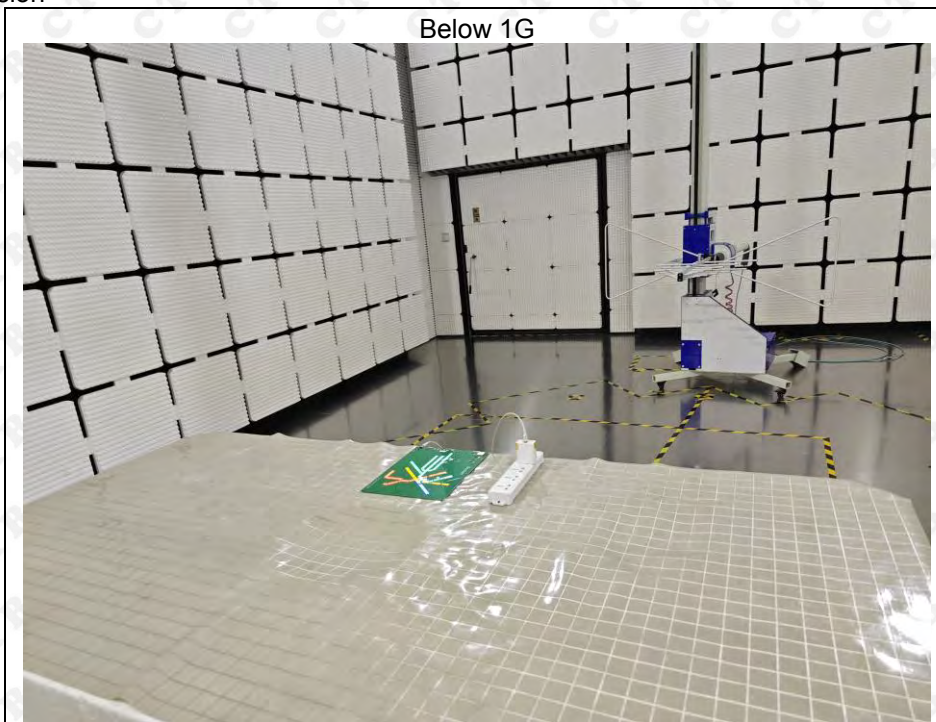

Above 1G





## Conducted emissions



※※※※ END OF REPORT ※※※※