

11B\_Ant2\_2437




11B\_Ant1\_2462




11B\_Ant2\_2462




## 11G Ant1\_2412

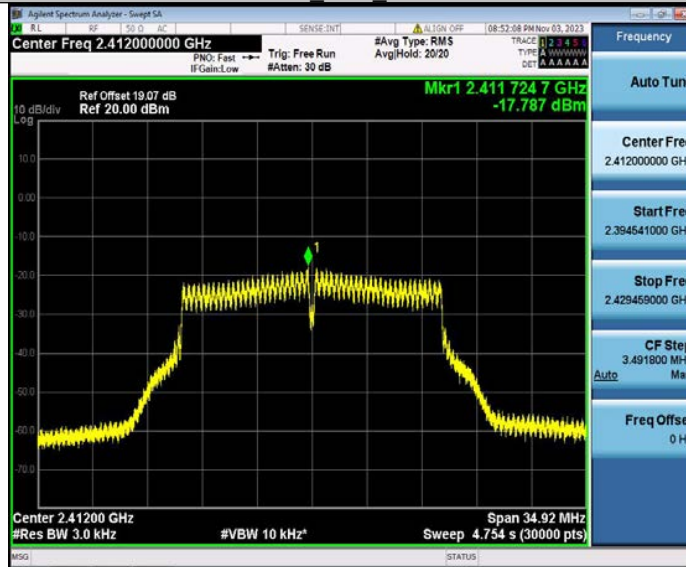


## 11G Ant2\_2412

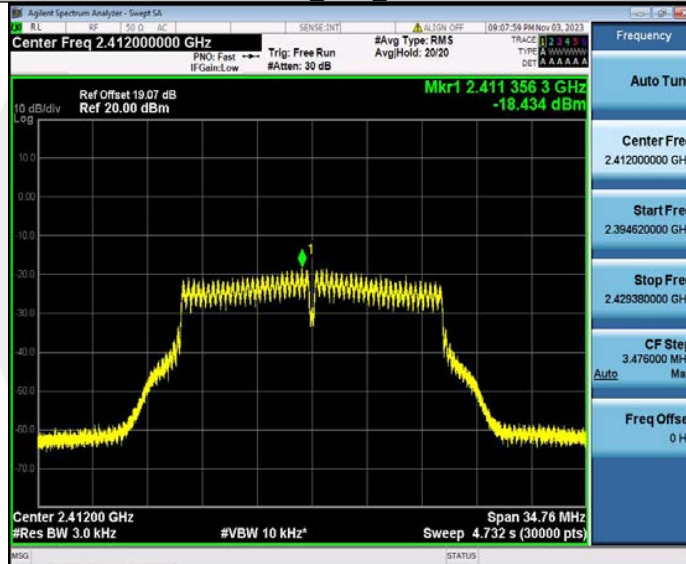


## 11G Ant1\_2437

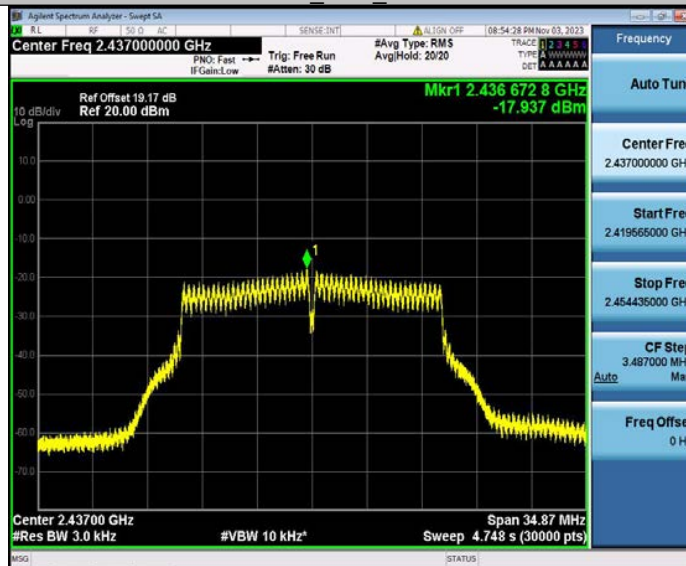


## 11G Ant2\_2437

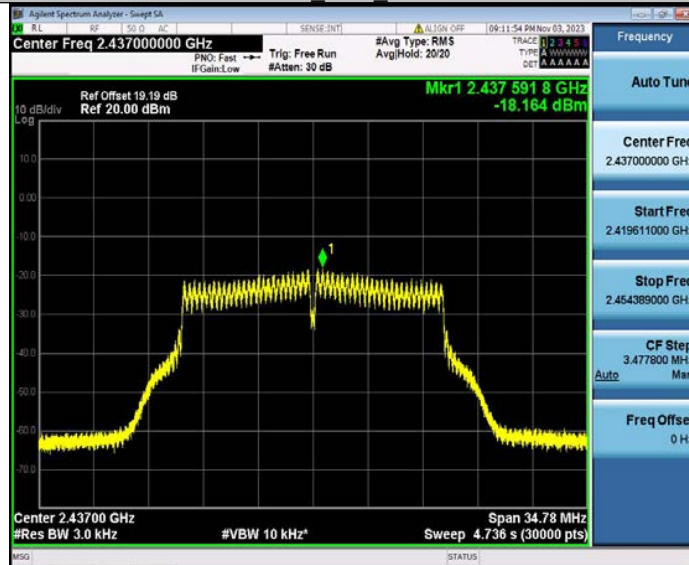


## 11G Ant1\_2462

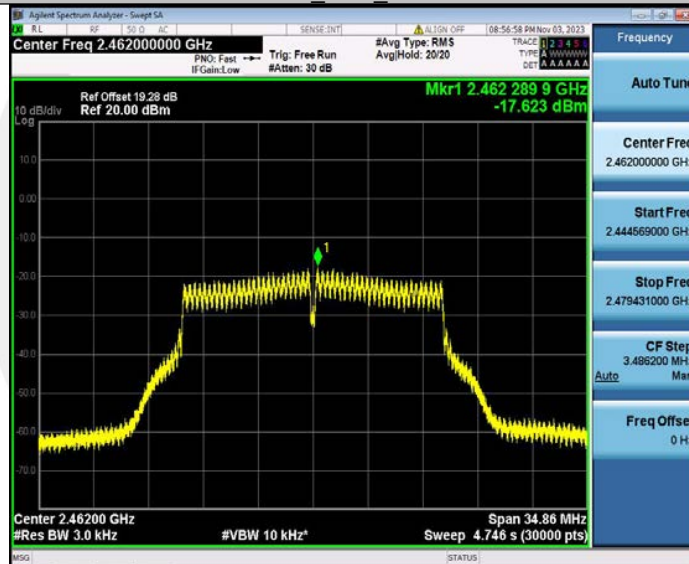


## 11G Ant2\_2462

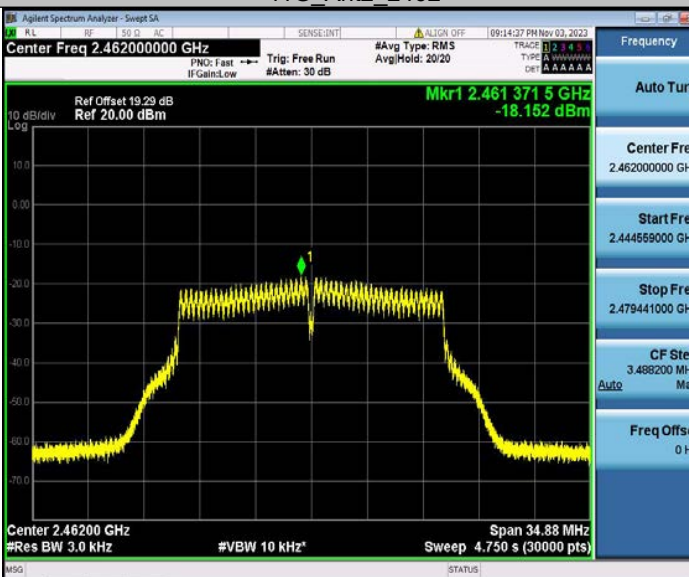


## 11N20MIMO\_Ant1\_2412

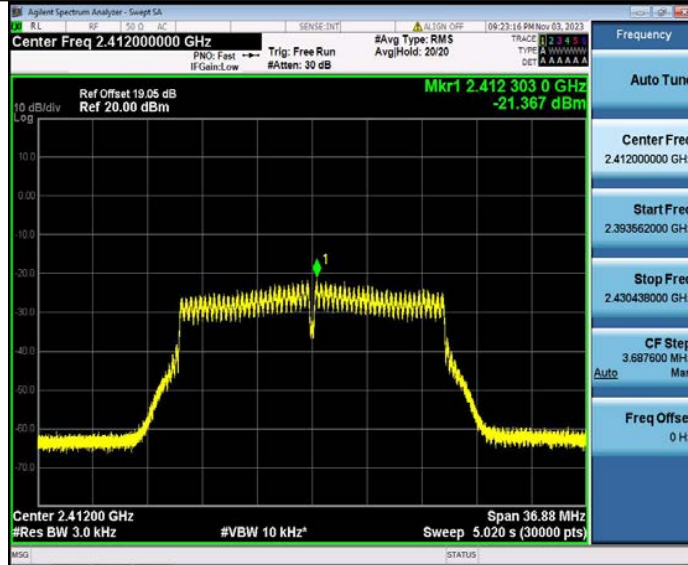


## 11N20MIMO\_Ant2\_2412

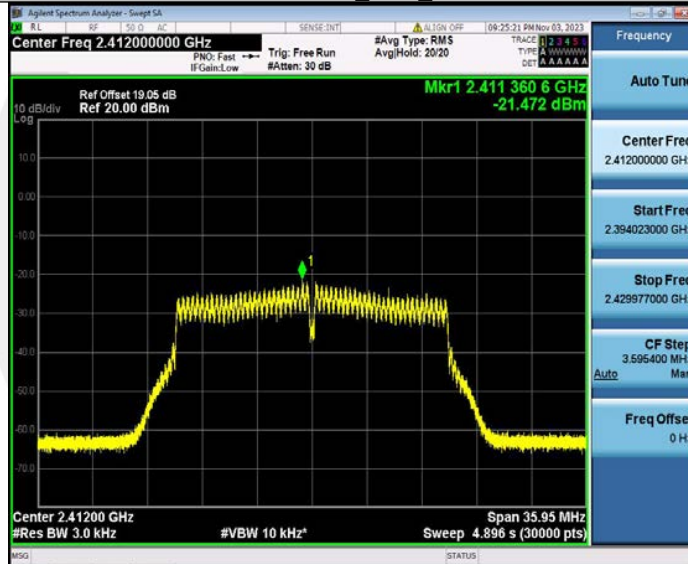


## 11N20MIMO\_Ant1\_2437

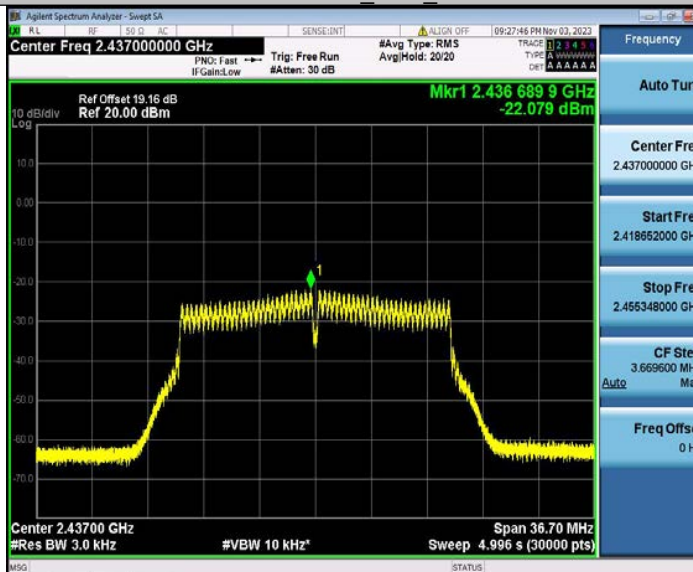


## 11N20MIMO\_Ant2\_2437

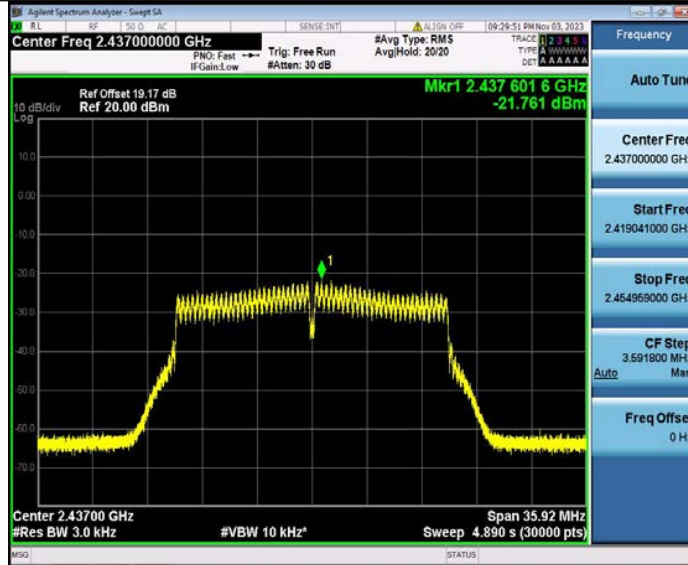


## 11N20MIMO\_Ant1\_2462

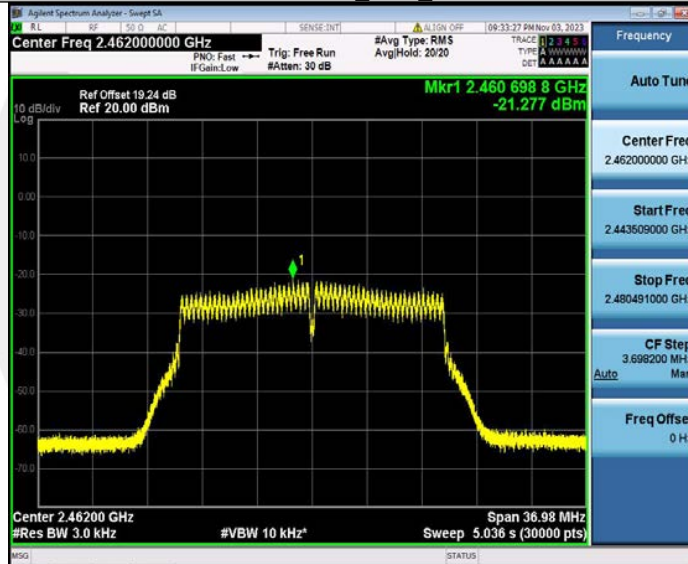


## 11N20MIMO\_Ant2\_2462

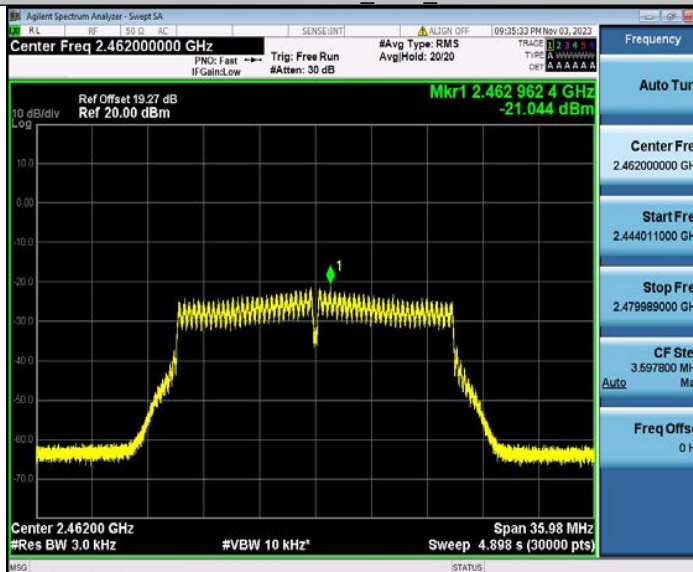


## 11AX20MIMO\_Ant1\_2412

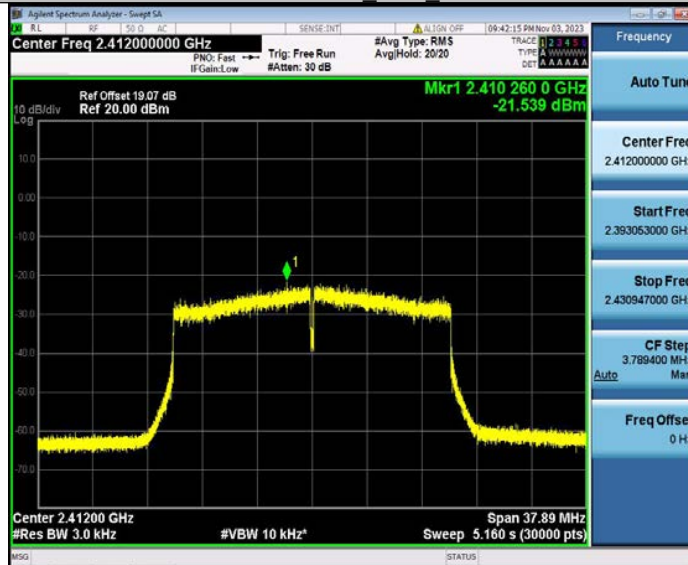


## 11AX20MIMO\_Ant2\_2412

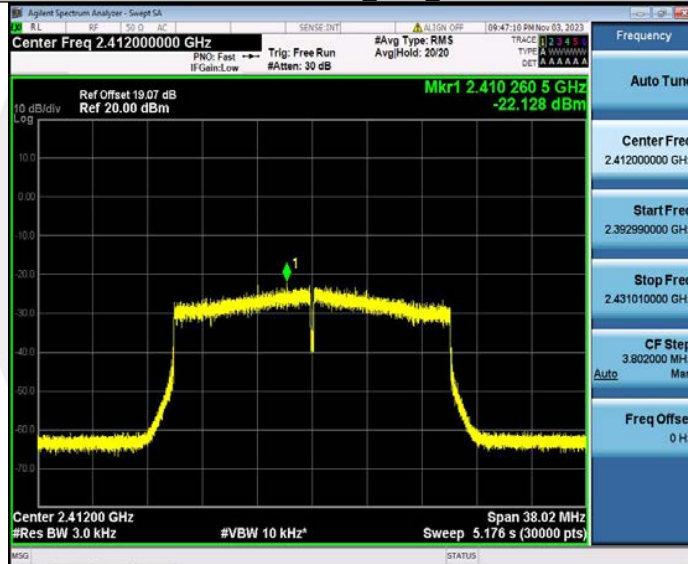


## 11AX20MIMO\_Ant1\_2437

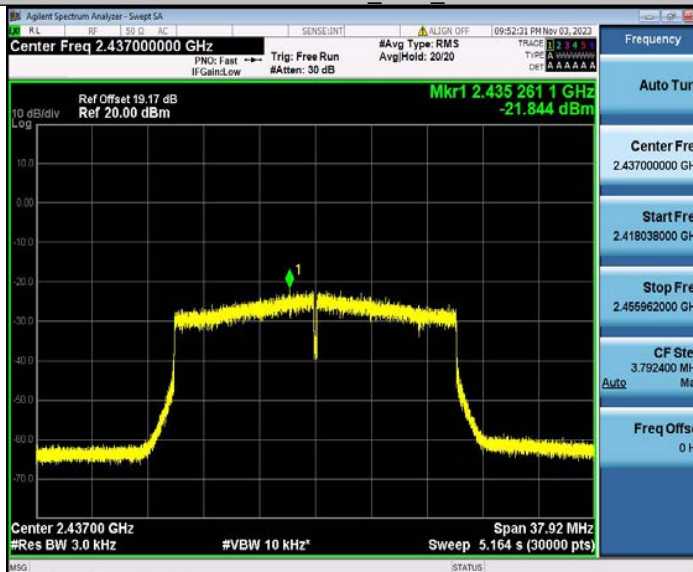


## 11AX20MIMO Ant2 2437

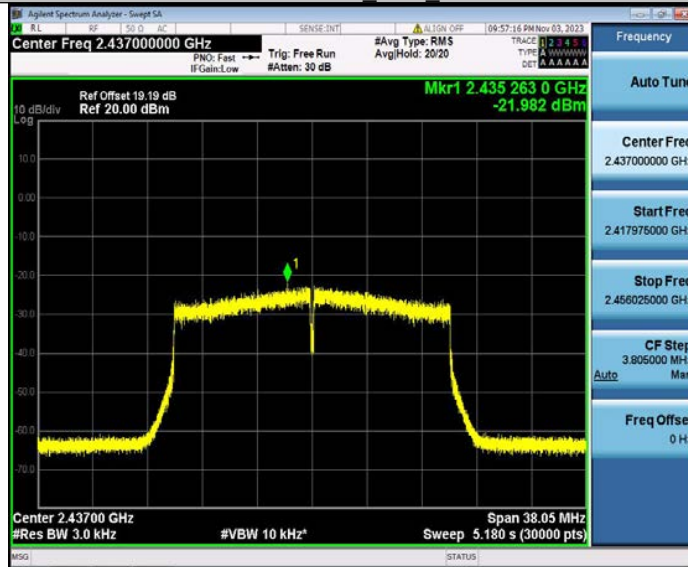

## 11AX20MIMO Ant1 2462

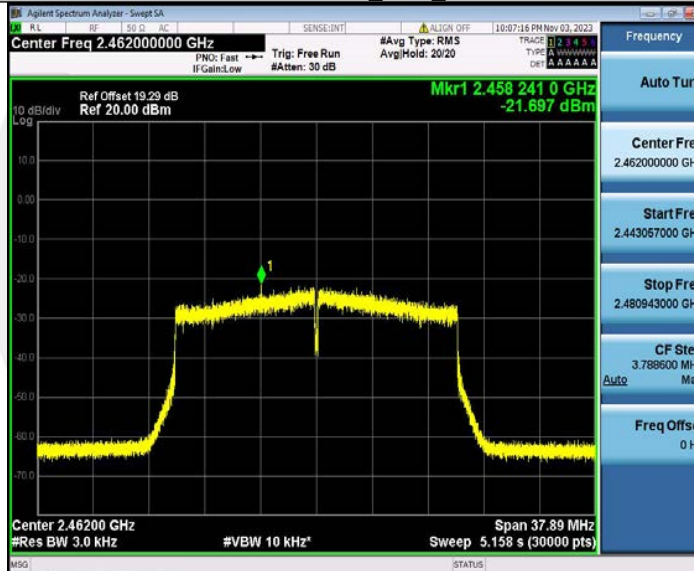

## 11AX20MIMO Ant2 2462

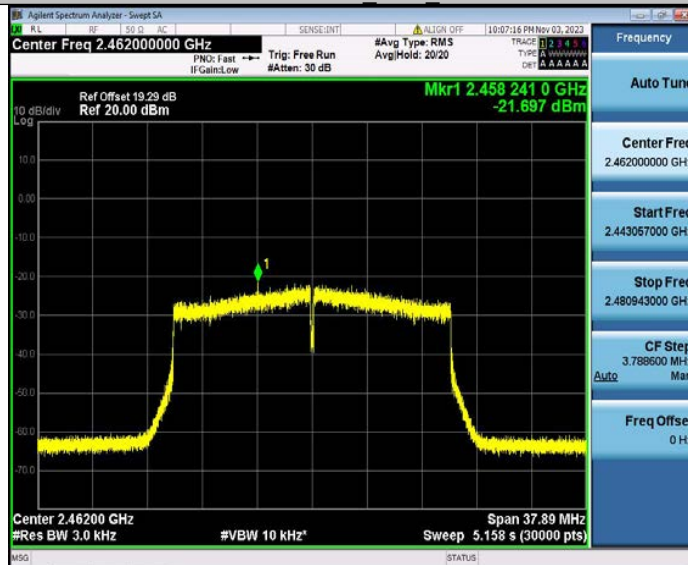

## 8.5 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

### 8.5.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

According to RSS-247, 5.5

### 8.5.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 8.5.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

### 8.5.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### ■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq 1\%$  of the span=100kHz Set VBW  $\geq 3 \times$  RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

#### ■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.



### 8.5.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

All the antenna(Antenna 1&2) and modes(802.11b/g/n) have been tested and the worst(Antenna 1,802.11b) result recorded was report as below:

#### Band edge measurements

TestMode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	6.51	-34.39	≤-23.49	PASS
	Ant2	Low	2412	6.12	-32.1	≤-23.88	PASS
	Ant1	High	2462	7.28	-36.42	≤-22.72	PASS
	Ant2	High	2462	6.55	-36.13	≤-23.46	PASS
11G	Ant1	Low	2412	1.90	-32.97	≤-28.1	PASS
	Ant2	Low	2412	1.22	-31.67	≤-28.78	PASS
	Ant1	High	2462	1.60	-36.74	≤-28.4	PASS
	Ant2	High	2462	1.91	-36.57	≤-28.09	PASS
11N20MIMO	Ant1	Low	2412	-1.30	-36.37	≤-31.3	PASS
	Ant2	Low	2412	-2.17	-36.51	≤-32.17	PASS
	Ant1	High	2462	-1.24	-36.78	≤-31.24	PASS
	Ant2	High	2462	-0.86	-36.14	≤-30.86	PASS
11AX20MIMO	Ant1	Low	2412	-1.15	-36.93	≤-31.15	PASS
	Ant2	Low	2412	-1.67	-37.02	≤-31.67	PASS
	Ant1	High	2462	-1.44	-36.96	≤-31.44	PASS
	Ant2	High	2462	-1.69	-37.63	≤-31.69	PASS

#### Conducted Spurious Emission

TestMode	Antenna	Frequency [MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict	
11B	Ant1	2412	Reference	6.45	6.45	---	PASS	
			30~1000	6.45	-68.87	≤-23.55	PASS	
			1000~26500	6.45	-52.9	≤-23.55	PASS	
	Ant2	2412	Reference	5.90	5.90	---	PASS	
			30~1000	5.90	-68.62	≤-24.1	PASS	
			1000~26500	5.90	-53.33	≤-24.1	PASS	
	Ant1	2437	Reference	6.96	6.96	---	PASS	
			30~1000	6.96	-68.68	≤-23.04	PASS	
			1000~26500	6.96	-53.19	≤-23.04	PASS	
	Ant2	2437	Reference	6.58	6.58	---	PASS	
			30~1000	6.58	-68.89	≤-23.42	PASS	
			1000~26500	6.58	-52.89	≤-23.42	PASS	
	Ant1	2462	Reference	7.17	7.17	---	PASS	
			30~1000	7.17	-68.93	≤-22.83	PASS	
			1000~26500	7.17	-53.63	≤-22.83	PASS	
	Ant2	2462	Reference	6.93	6.93	---	PASS	
			30~1000	6.93	-68.72	≤-23.07	PASS	
			1000~26500	6.93	-51.31	≤-23.07	PASS	
	11G	Ant1	2412	Reference	1.56	1.56	---	PASS
				30~1000	1.56	-68.44	≤-28.44	PASS

	Ant2	2412	1000~26500	1.56	-53.7	≤-28.44	PASS
			Reference	1.26	1.26	---	PASS
			30~1000	1.26	-68.99	≤-28.74	PASS
	Ant1	2437	1000~26500	1.26	-53.17	≤-28.74	PASS
			Reference	1.74	1.74	---	PASS
			30~1000	1.74	-69.19	≤-28.26	PASS
	Ant2	2437	1000~26500	1.74	-53.2	≤-28.26	PASS
			Reference	1.59	1.59	---	PASS
			30~1000	1.59	-68.41	≤-28.41	PASS
	Ant1	2462	1000~26500	1.59	-53.26	≤-28.41	PASS
			Reference	1.87	1.87	---	PASS
			30~1000	1.87	-68.45	≤-28.13	PASS
Ant2	2462	1000~26500	1.87	-53.43	≤-28.13	PASS	
		Reference	1.71	1.71	---	PASS	
		30~1000	1.71	-68.81	≤-28.29	PASS	
11N20MIMO	Ant1	2412	1000~26500	1.71	-53.4	≤-28.29	PASS
			Reference	-1.32	-1.32	---	PASS
			30~1000	-1.32	-69.12	≤-31.32	PASS
	Ant2	2412	1000~26500	-1.32	-53.64	≤-31.32	PASS
			Reference	-2.23	-2.23	---	PASS
			30~1000	-2.23	-69.14	≤-32.23	PASS
	Ant1	2437	1000~26500	-2.23	-53.64	≤-32.23	PASS
			Reference	-1.14	-1.14	---	PASS
			30~1000	-1.14	-69	≤-31.14	PASS
	Ant2	2437	1000~26500	-1.14	-53.25	≤-31.14	PASS
			Reference	-1.59	-1.59	---	PASS
			30~1000	-1.59	-68.71	≤-31.59	PASS
Ant1	2462	1000~26500	-1.59	-51.92	≤-31.59	PASS	
		Reference	-1.38	-1.38	---	PASS	
		30~1000	-1.38	-68.81	≤-31.38	PASS	
Ant2	2462	1000~26500	-1.38	-53.01	≤-31.38	PASS	
		Reference	-0.80	-0.80	---	PASS	
		30~1000	-0.80	-68.72	≤-30.8	PASS	
11AX20MIMO	Ant1	2412	1000~26500	-0.80	-52.49	≤-30.8	PASS
			Reference	-2.10	-2.10	---	PASS
			30~1000	-2.10	-69.16	≤-32.1	PASS
	Ant2	2412	1000~26500	-2.10	-53.55	≤-32.1	PASS
			Reference	-2.07	-2.07	---	PASS
			30~1000	-2.07	-69.47	≤-32.07	PASS
	Ant1	2437	1000~26500	-2.07	-53.57	≤-32.07	PASS
			Reference	-1.78	-1.78	---	PASS
			30~1000	-1.78	-69.47	≤-31.78	PASS
	Ant2	2437	1000~26500	-1.78	-53.53	≤-31.78	PASS
			Reference	-2.48	-2.48	---	PASS
			30~1000	-2.48	-69.12	≤-32.48	PASS
Ant1	2462	1000~26500	-2.48	-53.31	≤-32.48	PASS	
		Reference	-2.41	-2.41	---	PASS	
		30~1000	-2.41	-69.68	≤-32.41	PASS	
Ant2	2462	1000~26500	-2.41	-53.29	≤-32.41	PASS	
		Reference	-2.07	-2.07	---	PASS	
		30~1000	-2.07	-69	≤-32.07	PASS	
			1000~26500	-2.07	-53.06	≤-32.07	PASS

### Band edge measurements

11B Ant1 Low 2412




11B Ant2 Low 2412



11B Ant1 High 2462



11B Ant2 High 2462

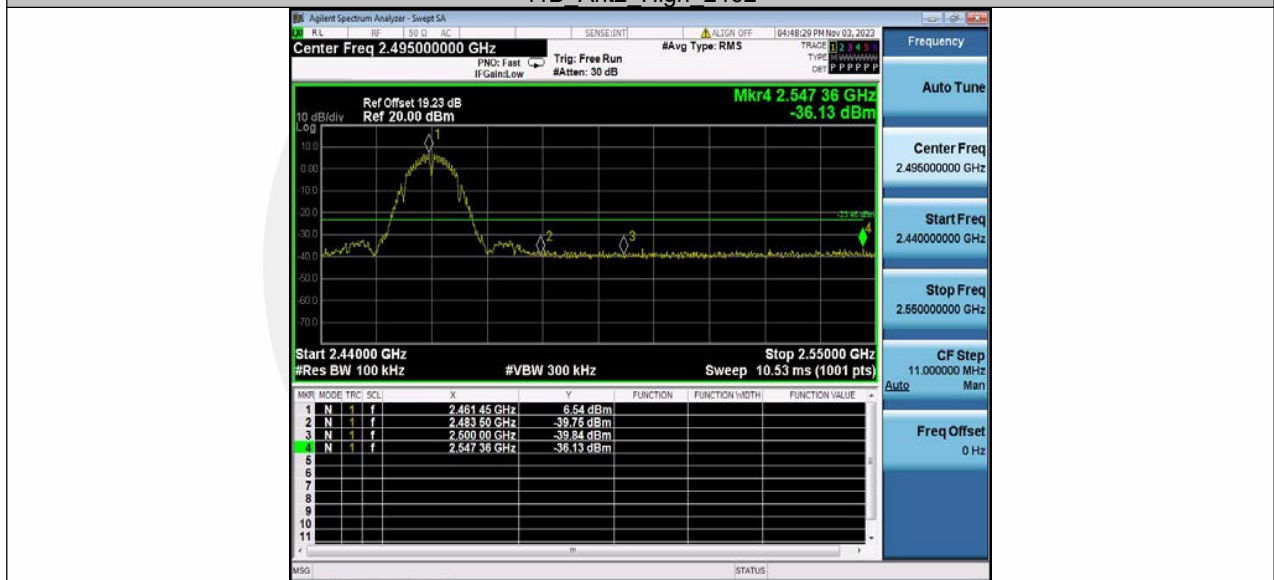

11G Ant1 Low 2412




## 11G\_Ant2\_Low\_2412




## 11G\_Ant1\_High\_2462



## 11G\_Ant2\_High\_2462

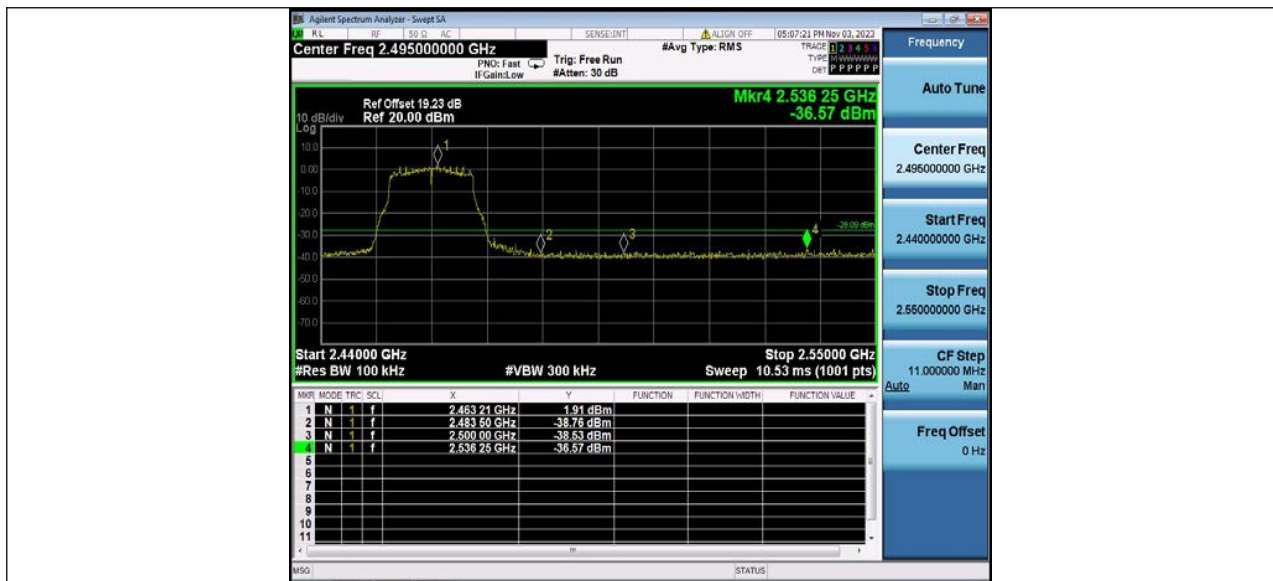


11N20MIMO Ant1 Low 2412

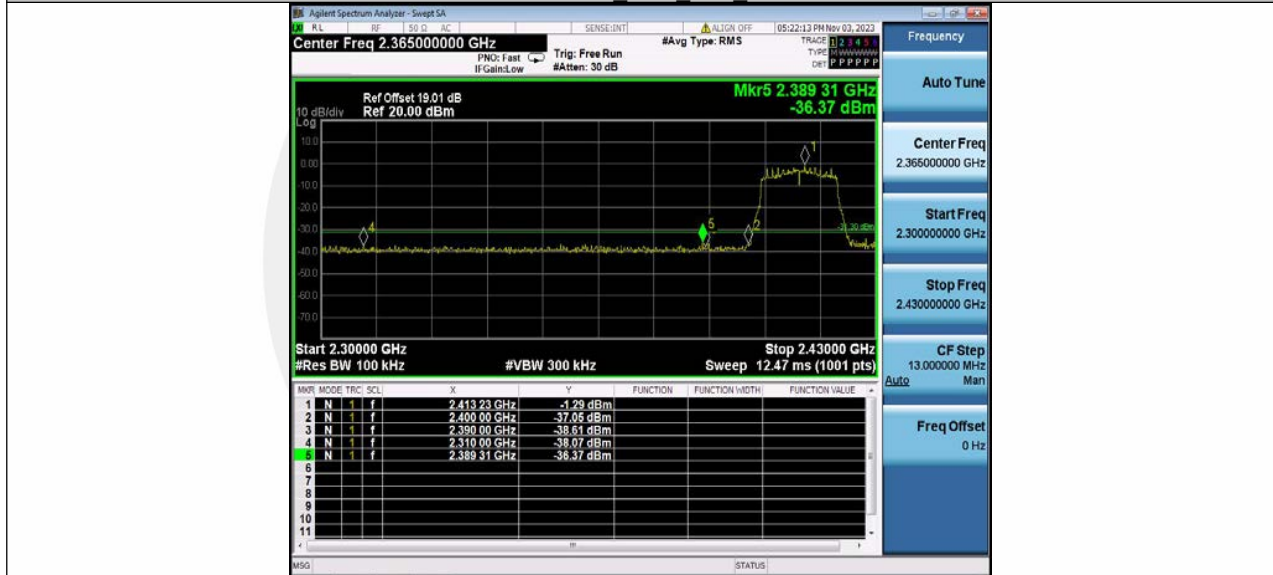


11N20MIMO Ant2 Low 2412



## 11N20MIMO\_Ant1\_High\_2462

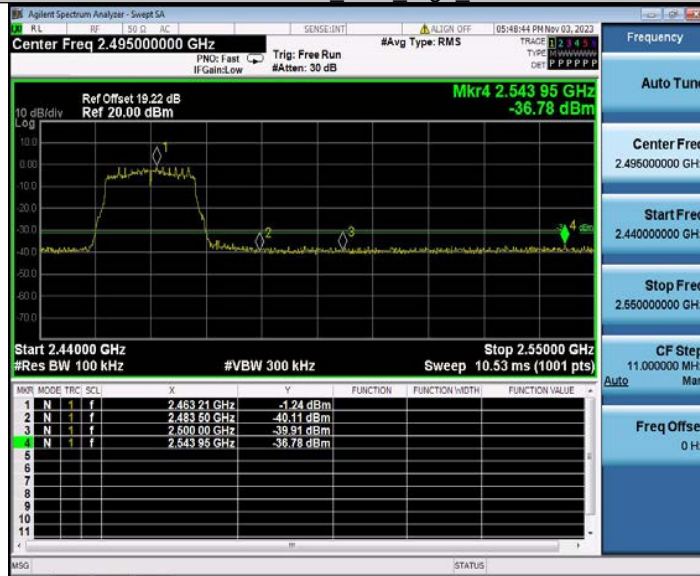

## 11N20MIMO\_Ant2\_High\_2462

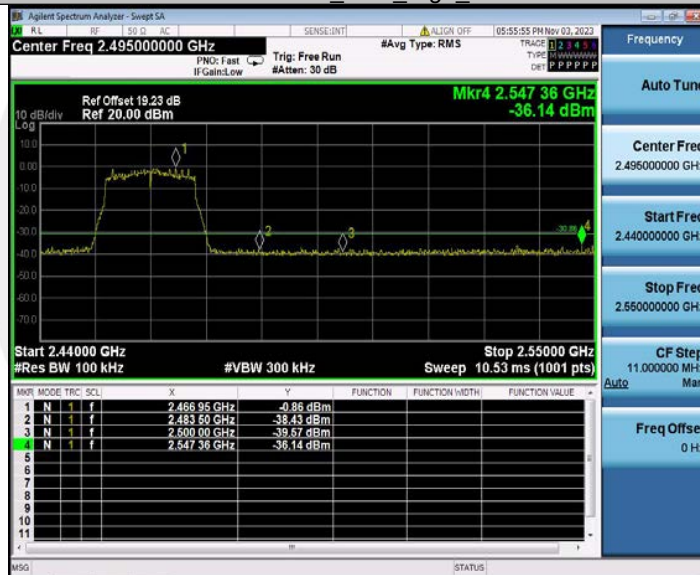

## 11AX20MIMO\_Ant1\_Low\_2412




11AX20MIMO Ant2 Low 2412




11AX20MIMO Ant1 High 2462





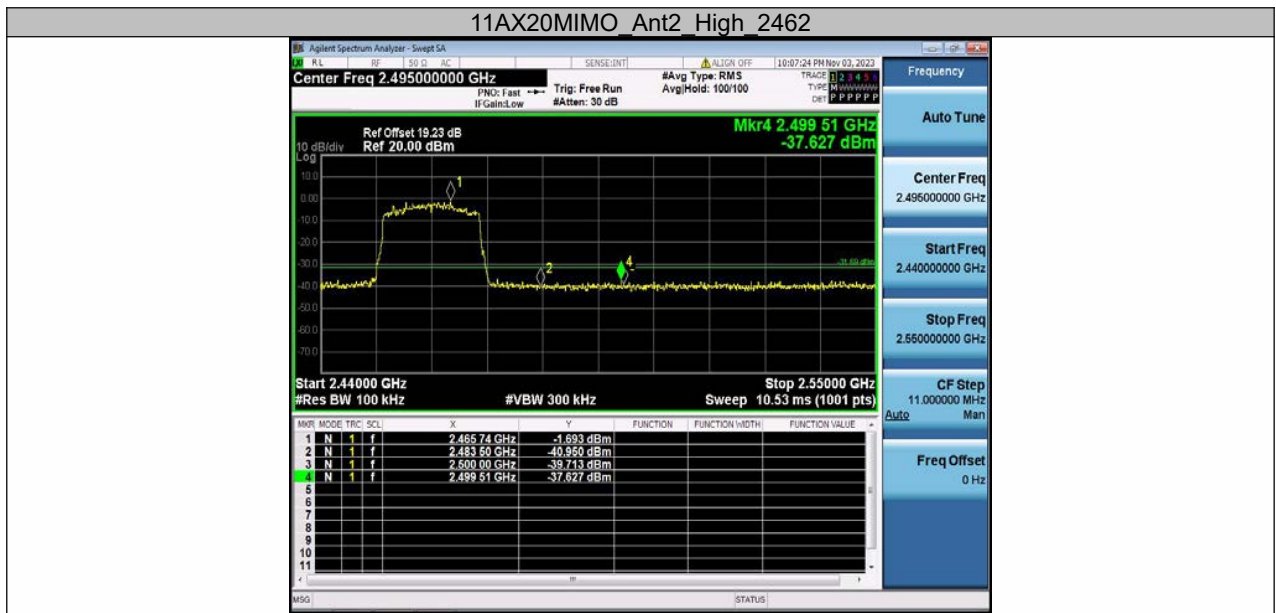


### Conducted Spurious Emission

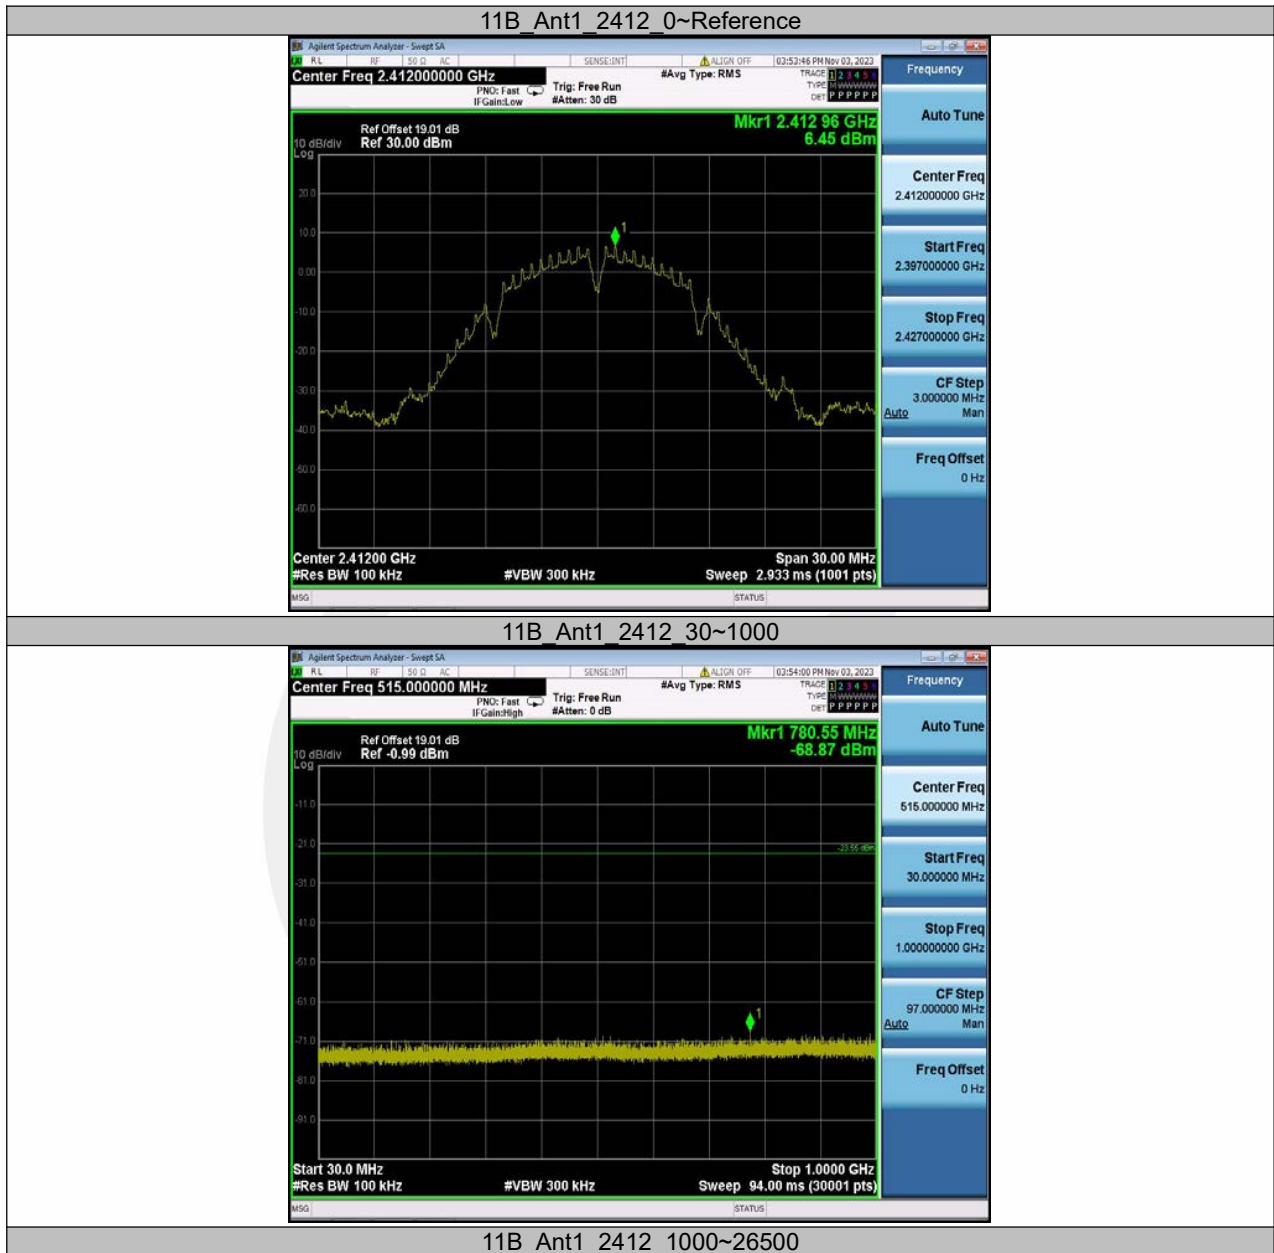





11B\_Ant2\_2412\_0~Reference

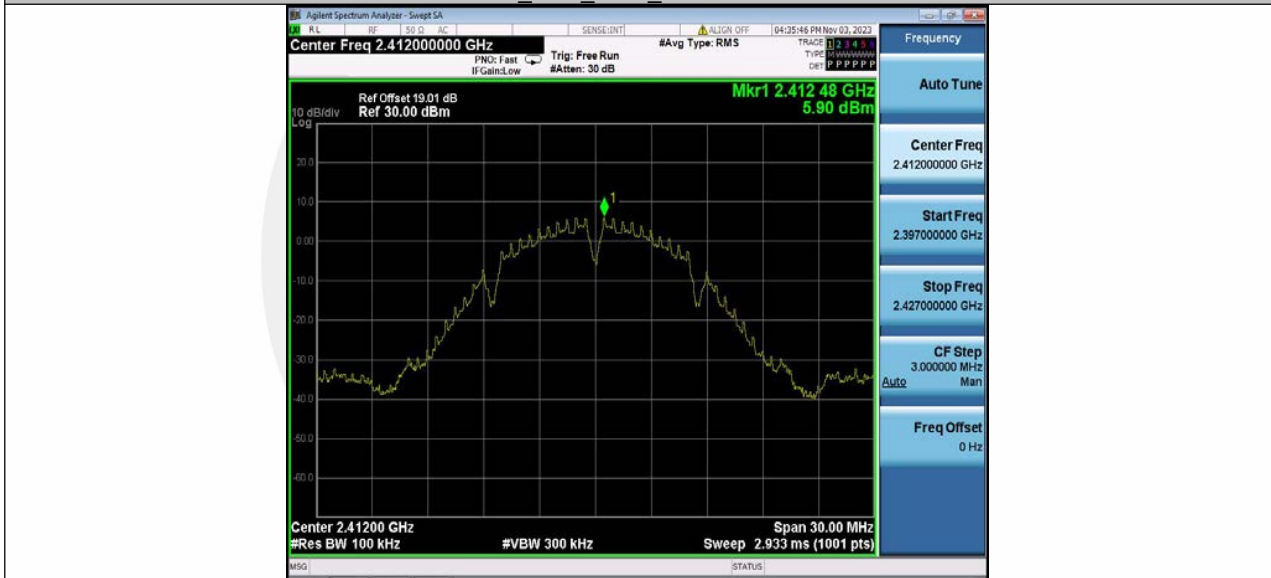

11B\_Ant2\_2412\_30~1000

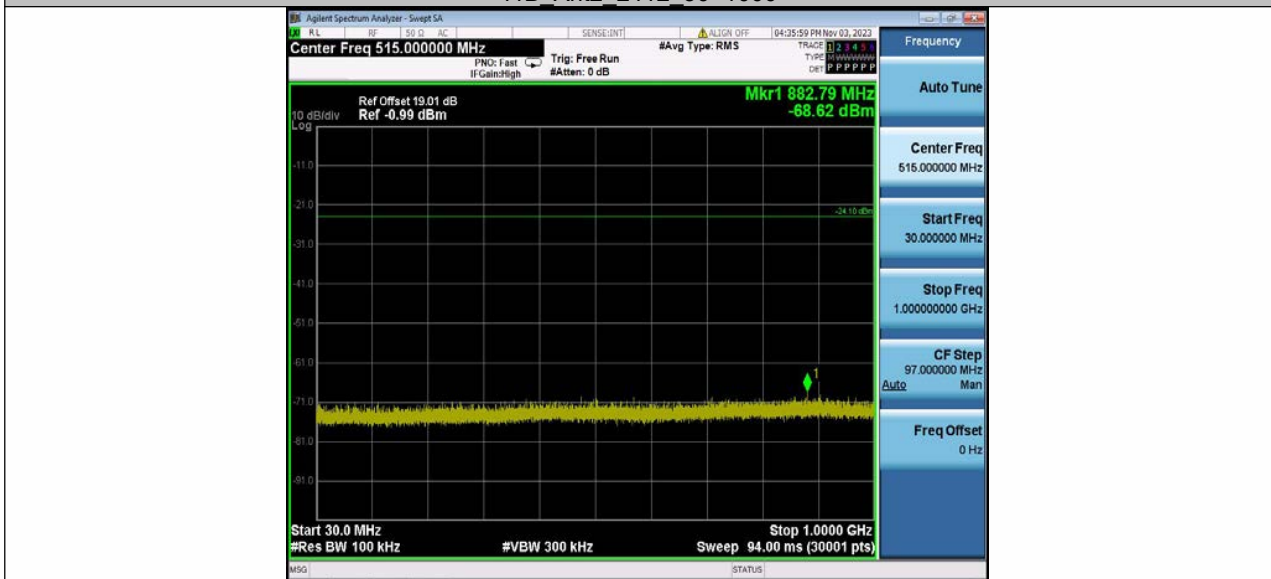


## 11B Ant2 2412 1000~26500

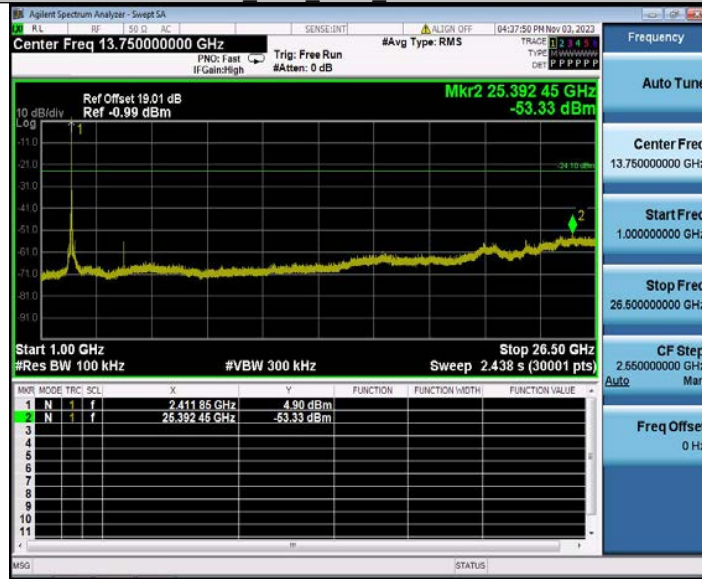


## 11B Ant1 2437 0~Reference



## 11B Ant1 2437 30~1000

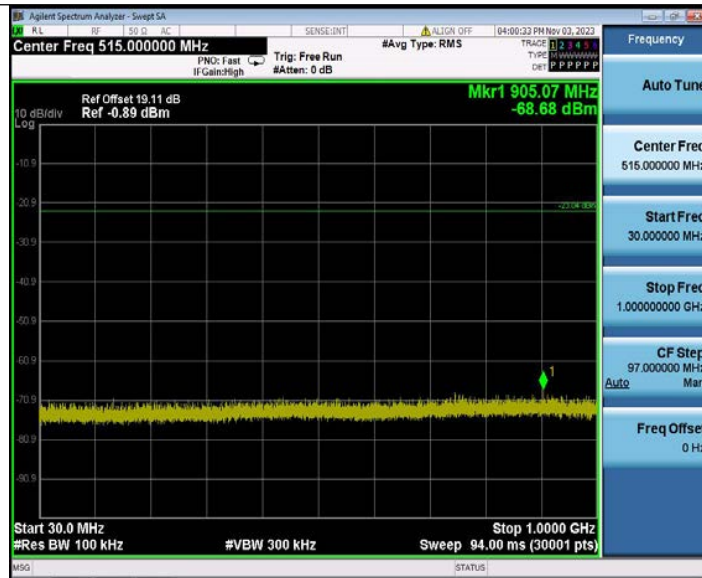


11B Ant1 2437 1000~26500

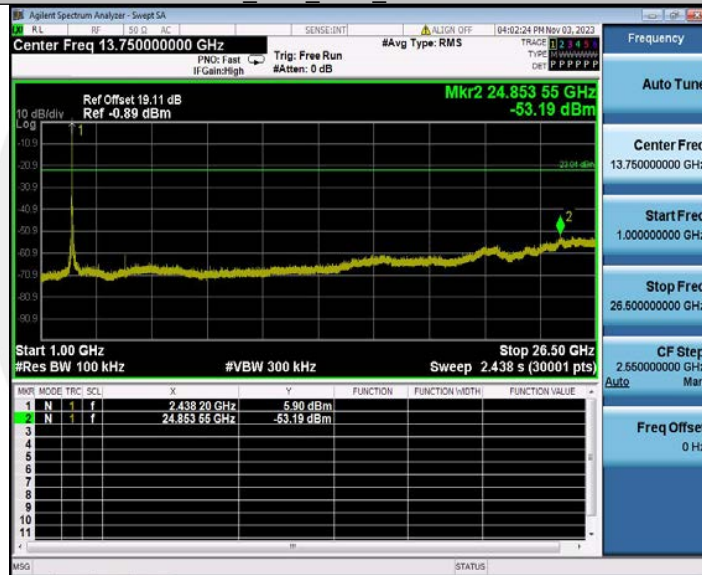


11B Ant2 2437 0~Reference



11B\_Ant2\_2437\_30~1000

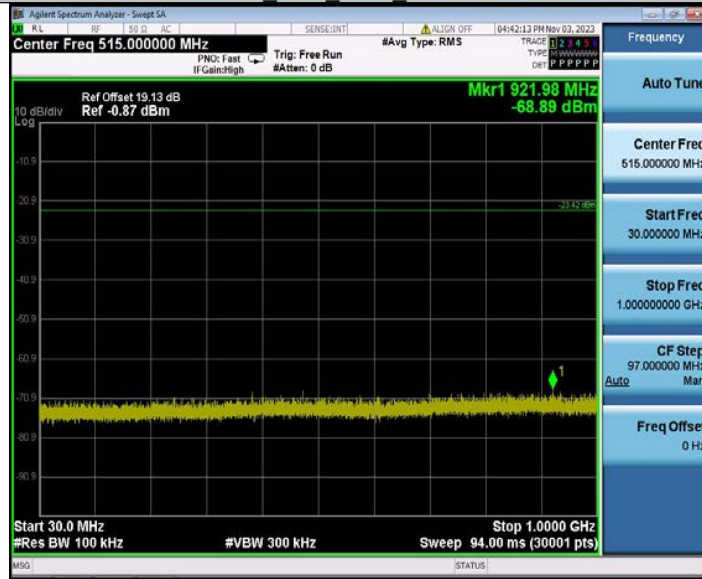


11B\_Ant2\_2437\_1000~26500

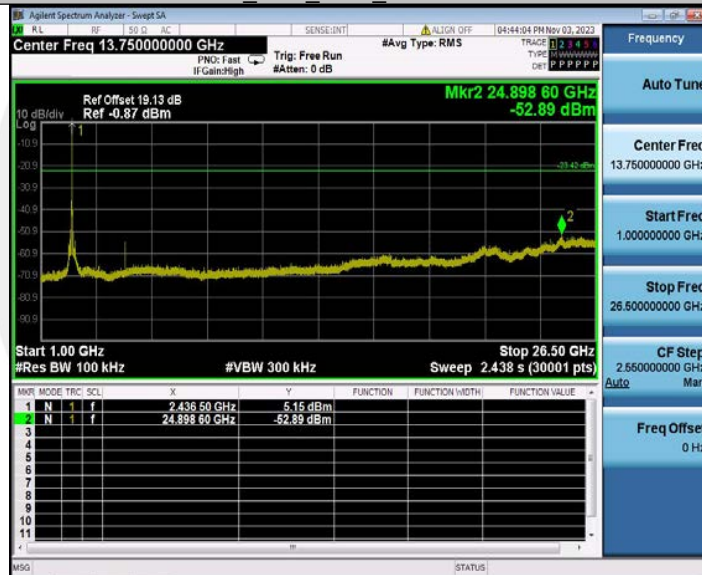


11B\_Ant1\_2462\_0~Reference



11B Ant1 2462 30~1000

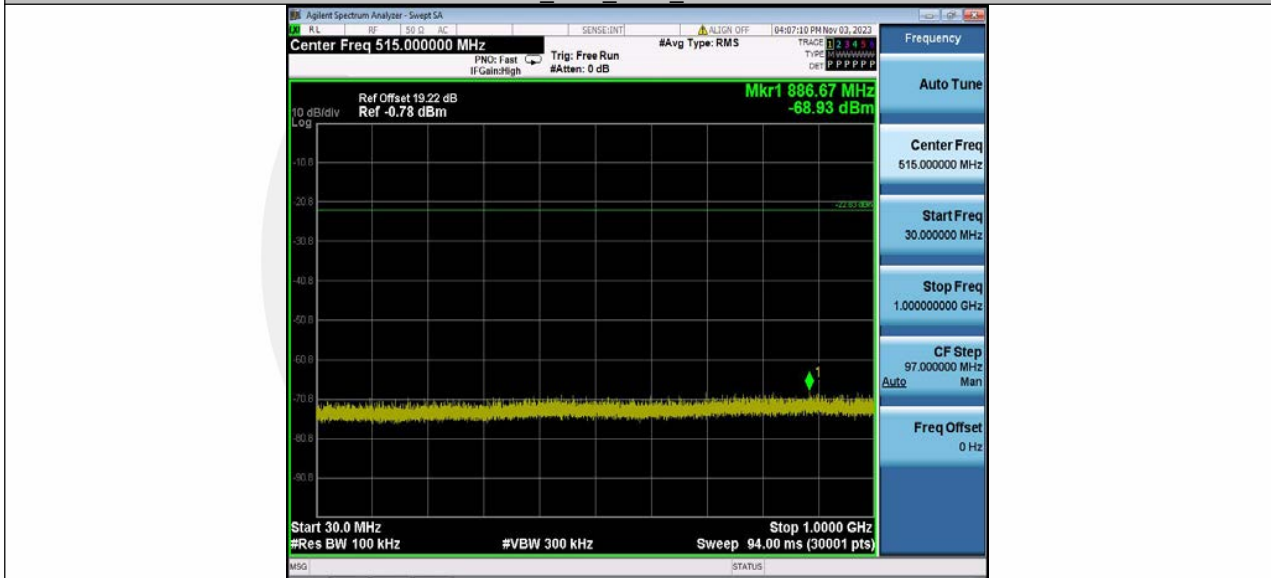


11B Ant1 2462 1000~26500

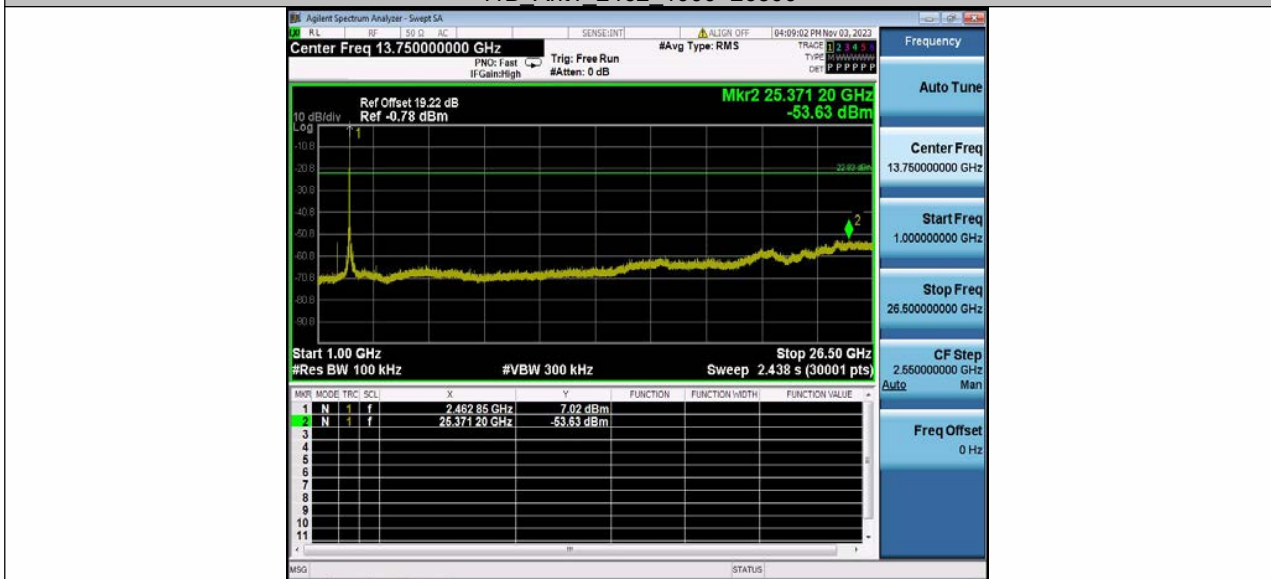

## 11B\_Ant2\_2462\_0~Reference



## 11B\_Ant2\_2462\_30~1000

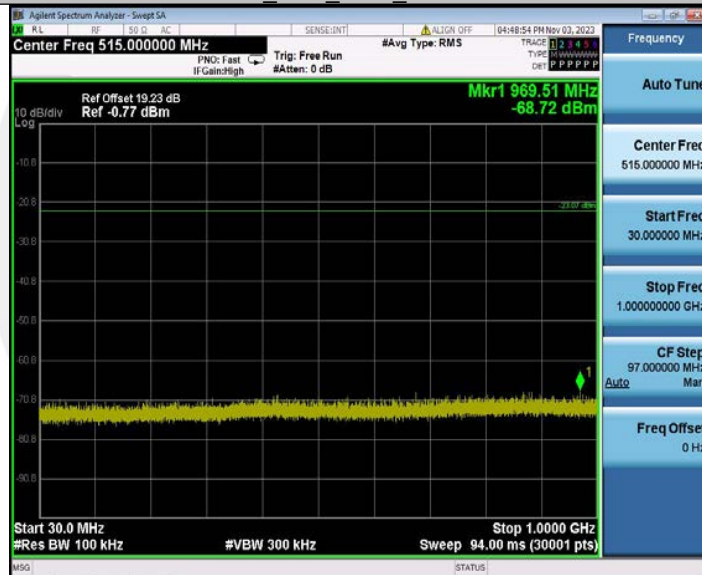

## 11B\_Ant2\_2462\_1000~26500






11G\_Ant1\_2412\_0~Reference



11G\_Ant1\_2412\_30~1000




## 11G Ant1 2412 1000~26500

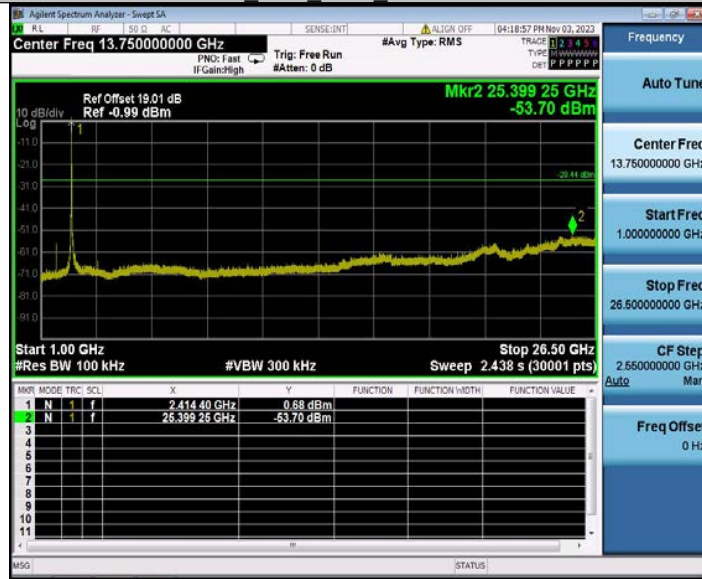


## 11G Ant2 2412 0~Reference



## 11G Ant2 2412 30~1000

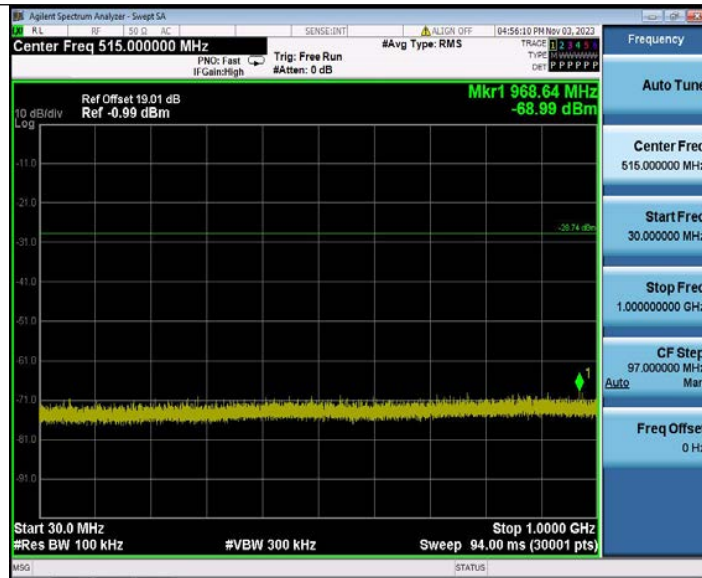


11G Ant2 2412 1000~26500

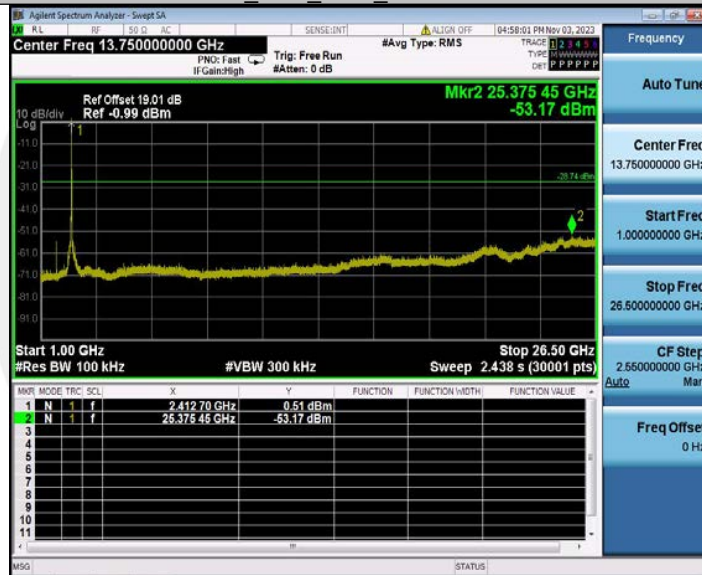


11G Ant1 2437 0~Reference



## 11G Ant1 2437 30~1000

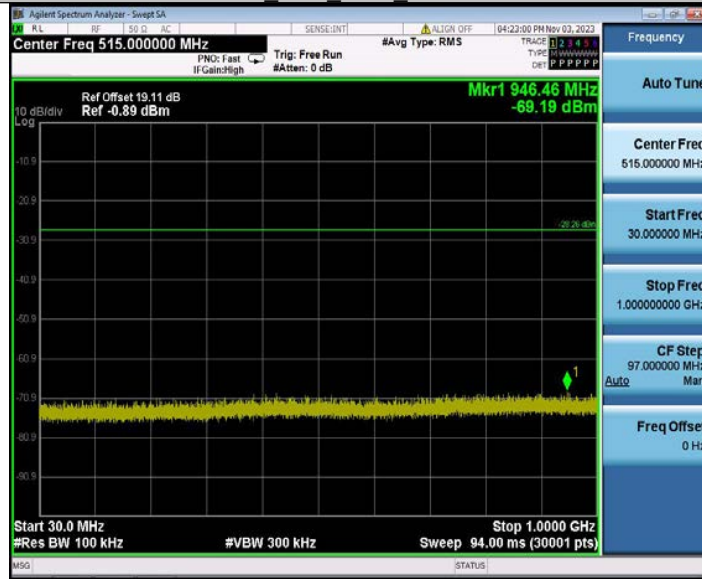


## 11G Ant1 2437 1000~26500

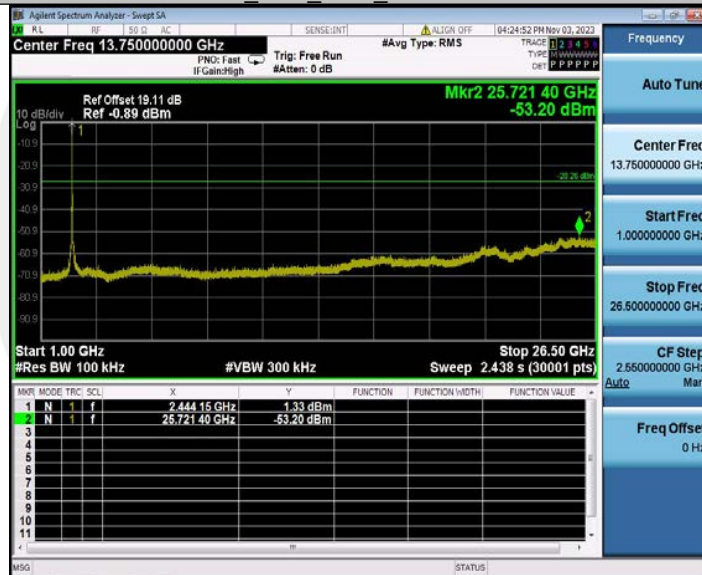

## 11G Ant2 2437 0~Reference



11G\_Ant2\_2437\_30~1000

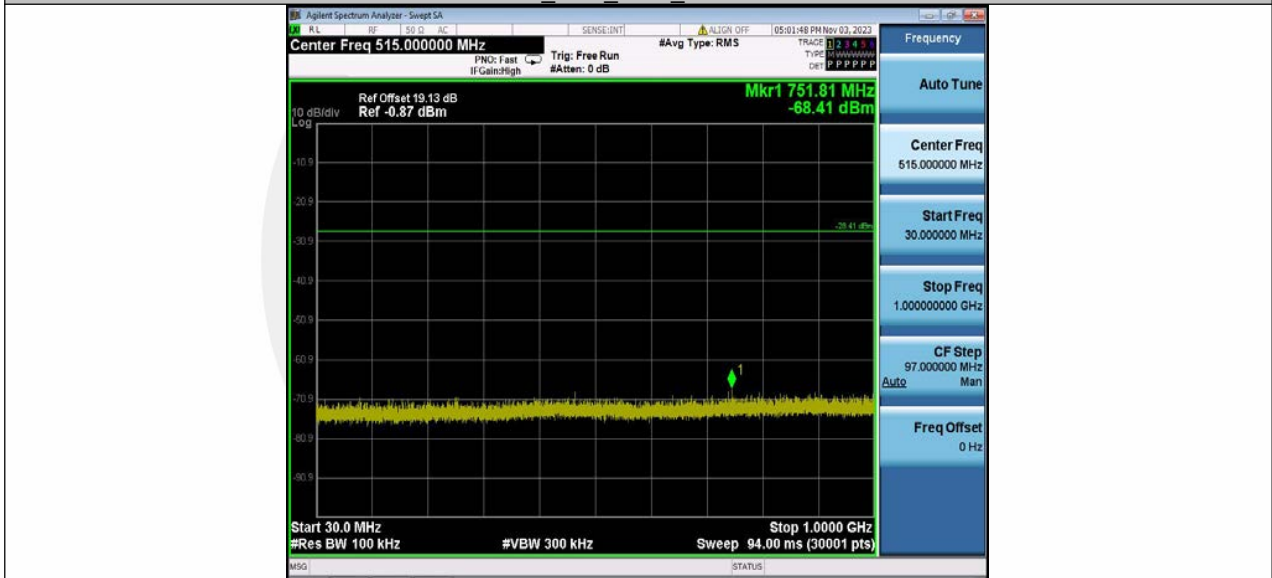


11G\_Ant2\_2437\_1000~26500



## 11G Ant1\_2462\_0~Reference



## 11G Ant1\_2462\_30~1000

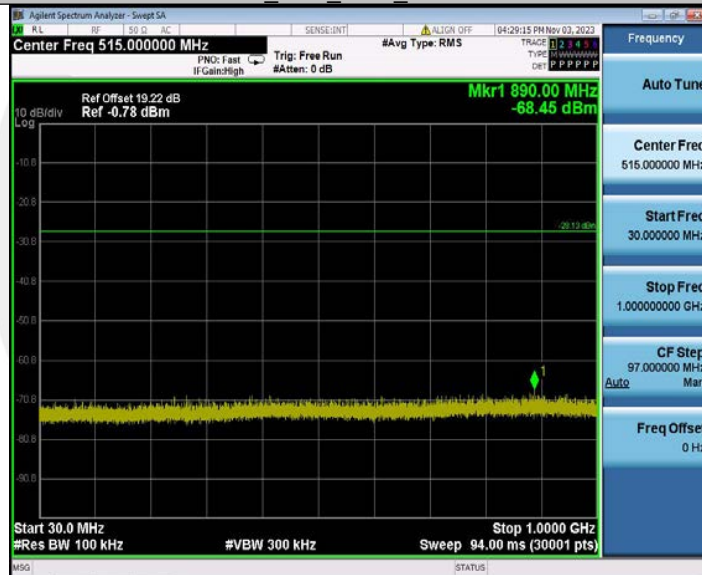


## 11G Ant1\_2462\_1000~26500




11G\_Ant2\_2462\_0~Reference



11G\_Ant2\_2462\_30~1000

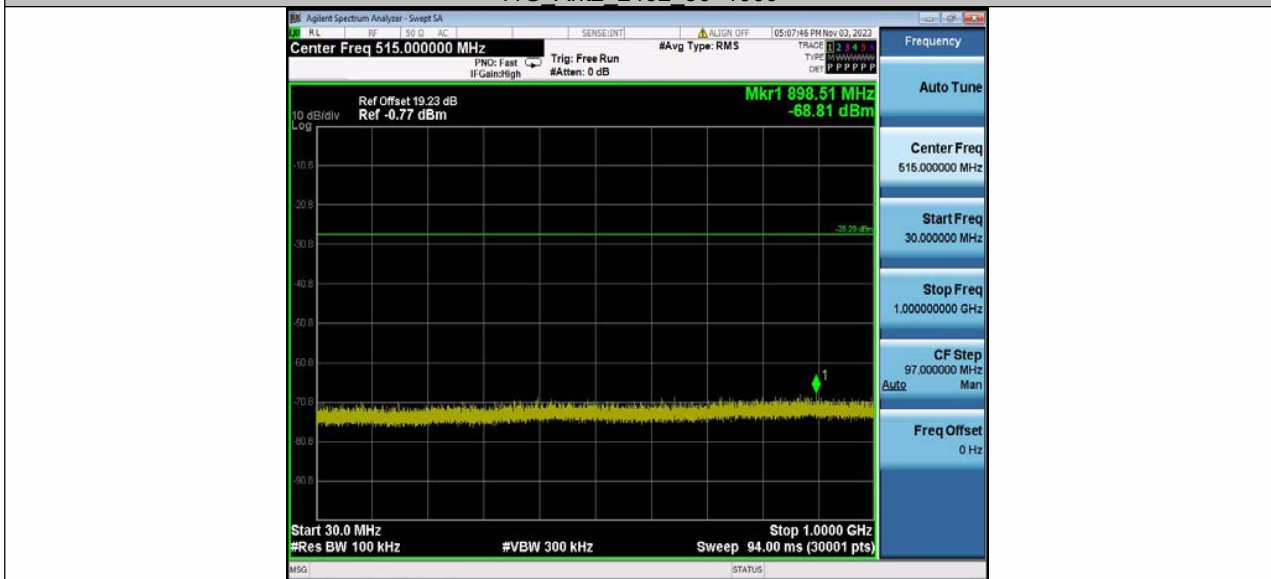

## 11G Ant2\_2462\_1000~26500

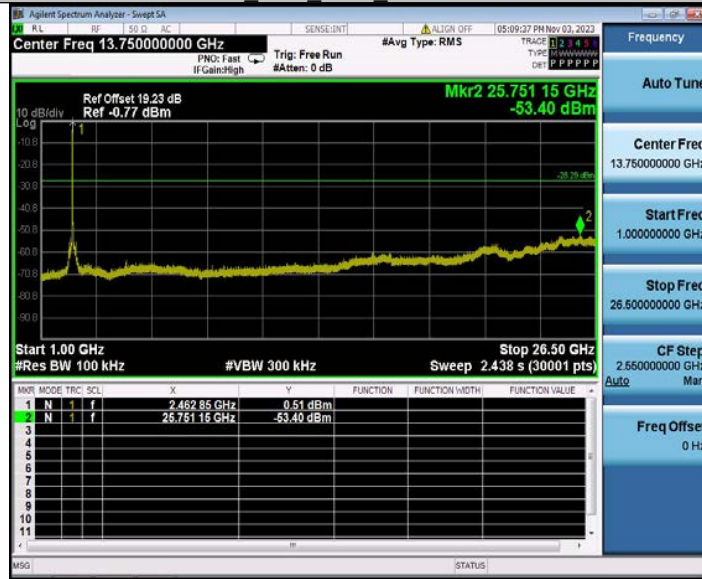


## 11N20MIMO\_Ant1\_2412\_0~Reference



## 11N20MIMO Ant1 2412\_30~1000



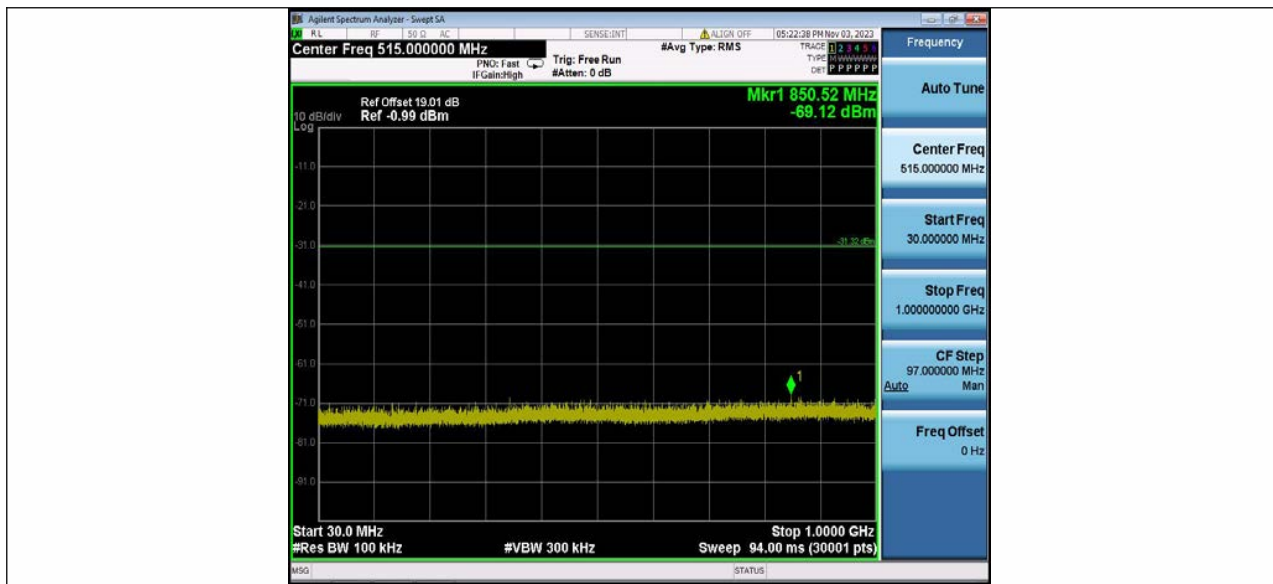


11N20MIMO\_Ant1 2412 1000~26500




11N20MIMO\_Ant2 2412 0~Reference



## 11N20MIMO Ant2 2412 30~1000

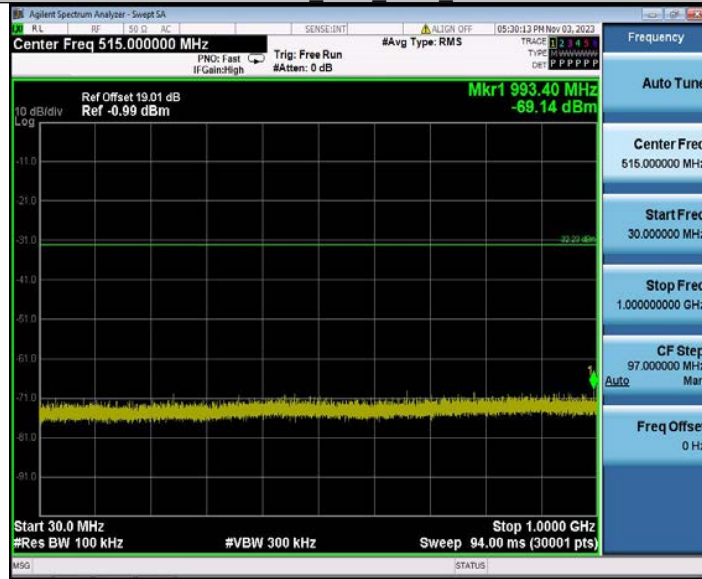


## 11N20MIMO Ant2 2412 1000~26500

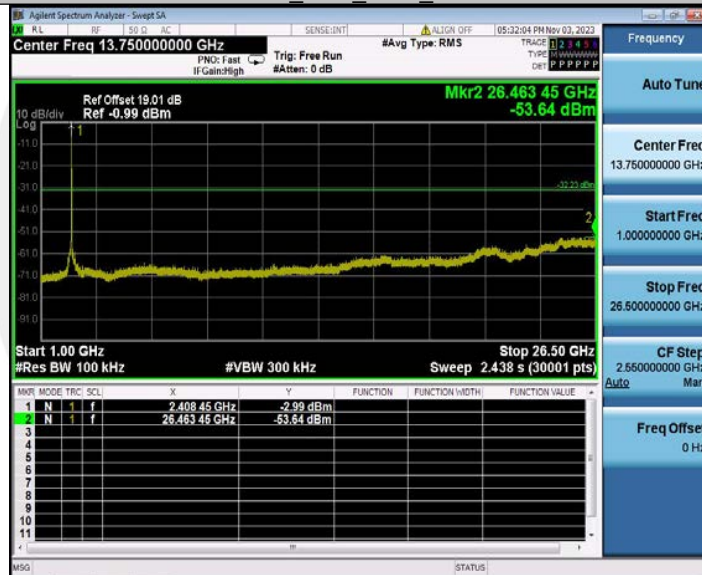


## 11N20MIMO Ant1 2437 0~Reference




11N20MIMO Ant1 2437 30~1000

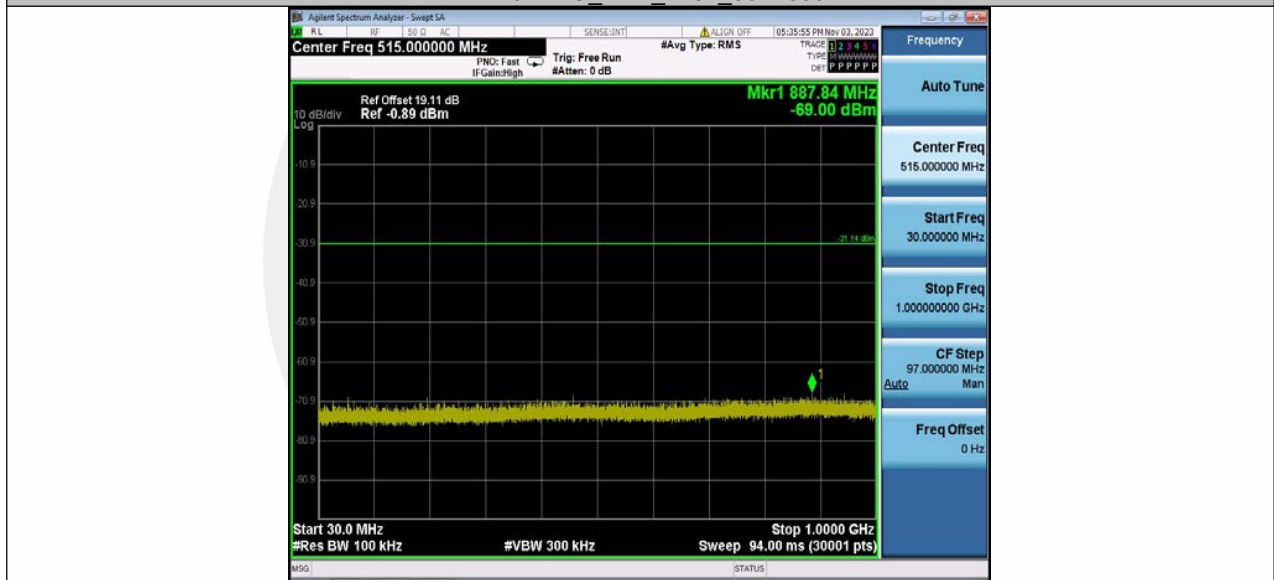


11N20MIMO Ant1 2437 1000~26500

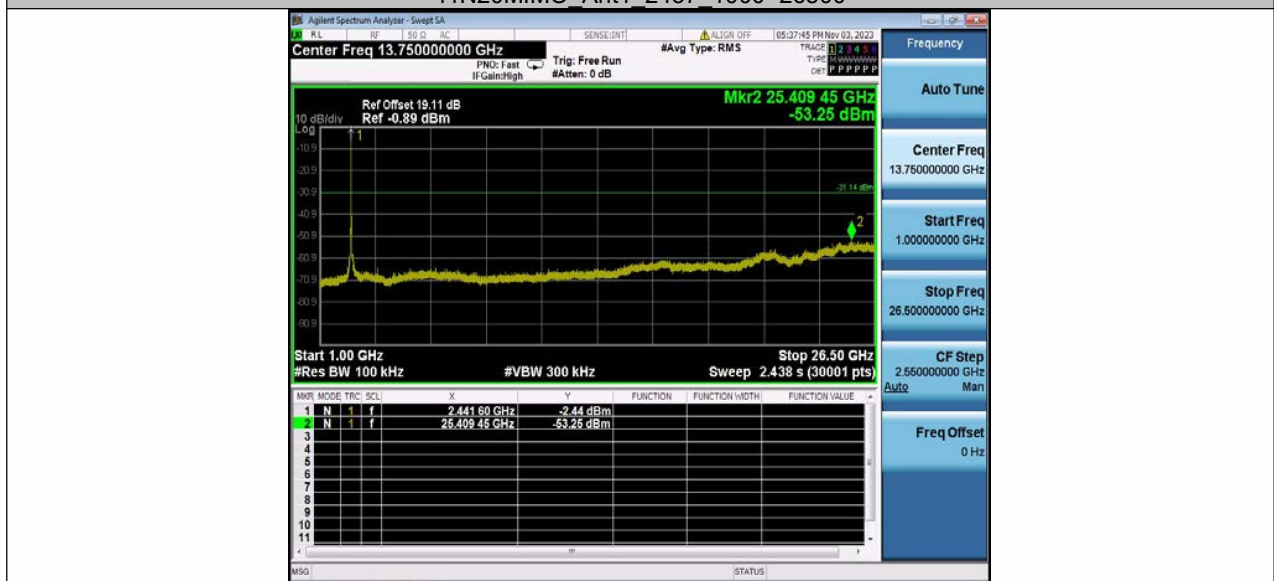

## 11N20MIMO\_Ant2\_2437\_0~Reference

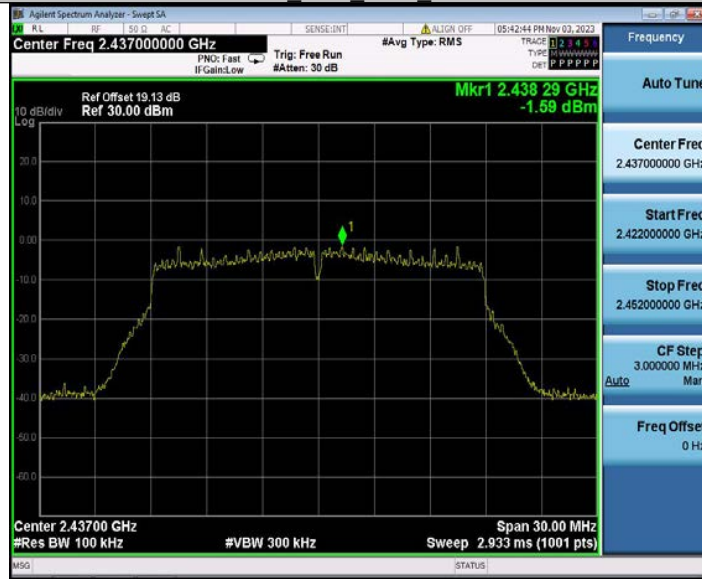

## 11N20MIMO\_Ant2\_2437\_30~1000

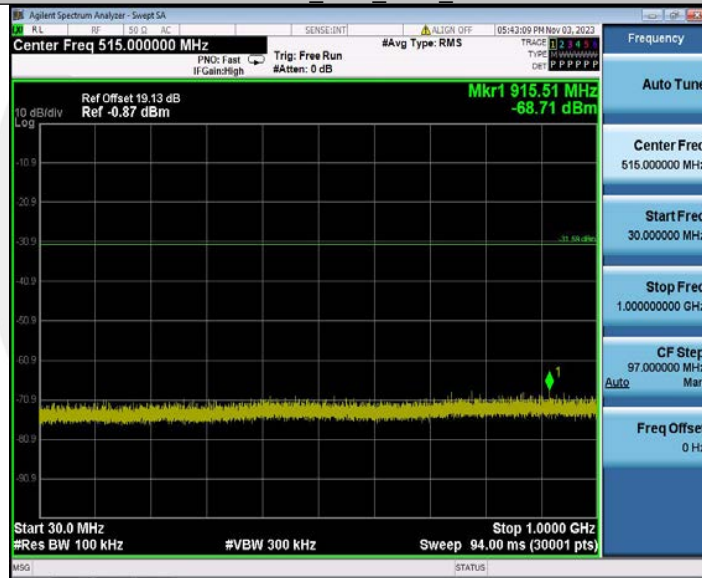


## 11N20MIMO\_Ant2\_2437\_1000~26500




11N20MIMO\_Ant1\_2462\_0~Reference




11N20MIMO\_Ant1\_2462\_30~1000

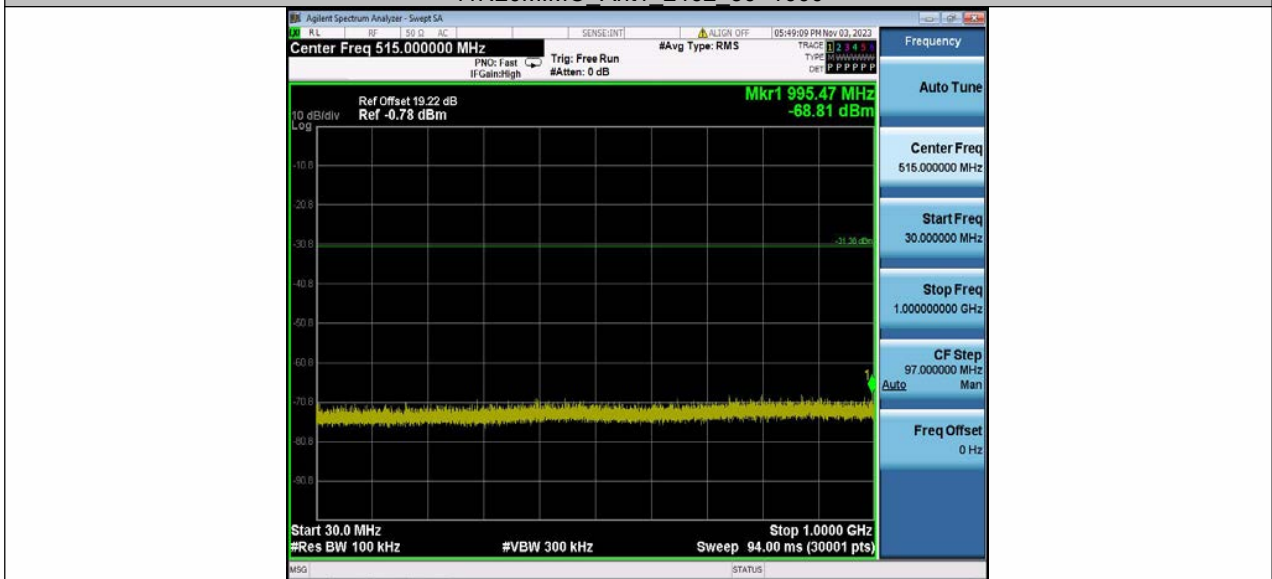


## 11N20MIMO\_Ant1\_2462\_1000~26500

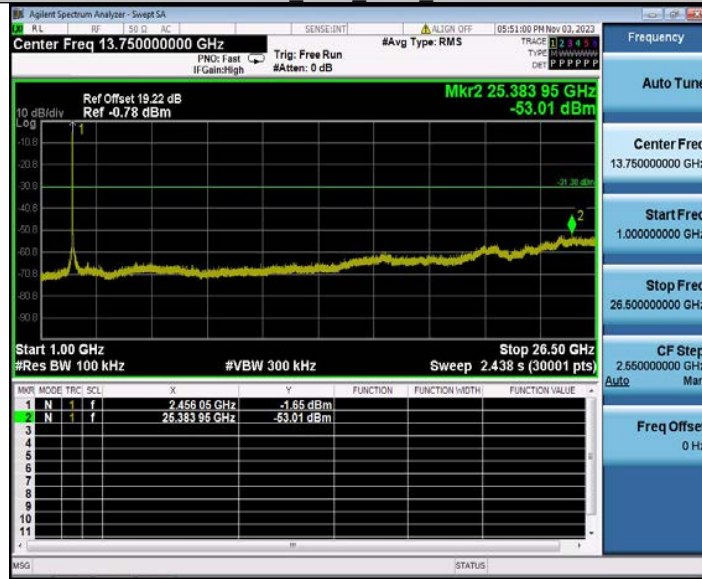

## 11N20MIMO\_Ant2\_2462\_0~Reference

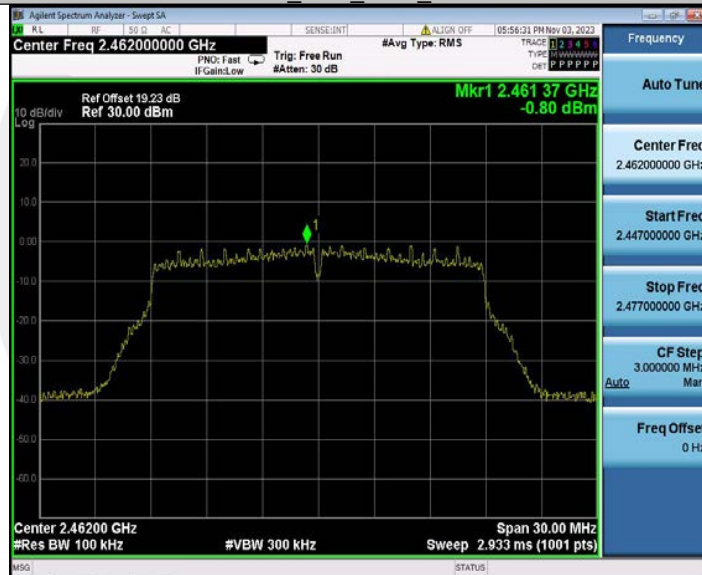

## 11N20MIMO\_Ant2\_2462\_30~1000

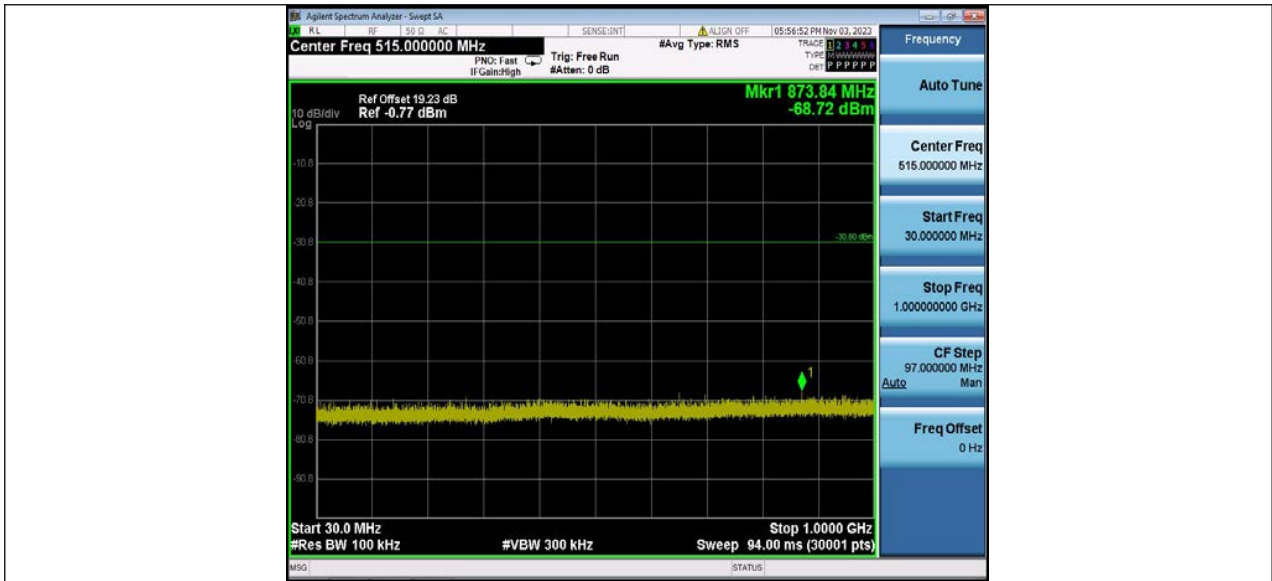


11N20MIMO\_Ant2\_2462\_1000~26500




11AX20MIMO\_Ant1\_2412\_0~Reference



## 11AX20MIMO\_Ant1\_2412\_30~1000

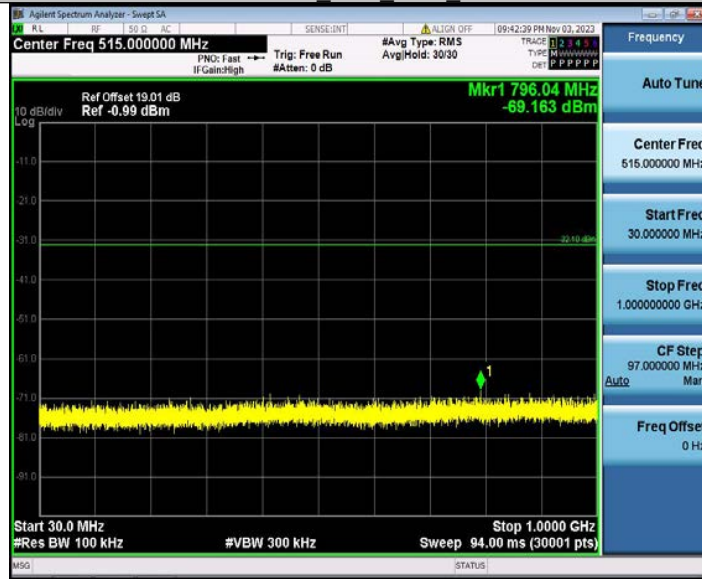

## 11AX20MIMO\_Ant1\_2412\_1000~26500

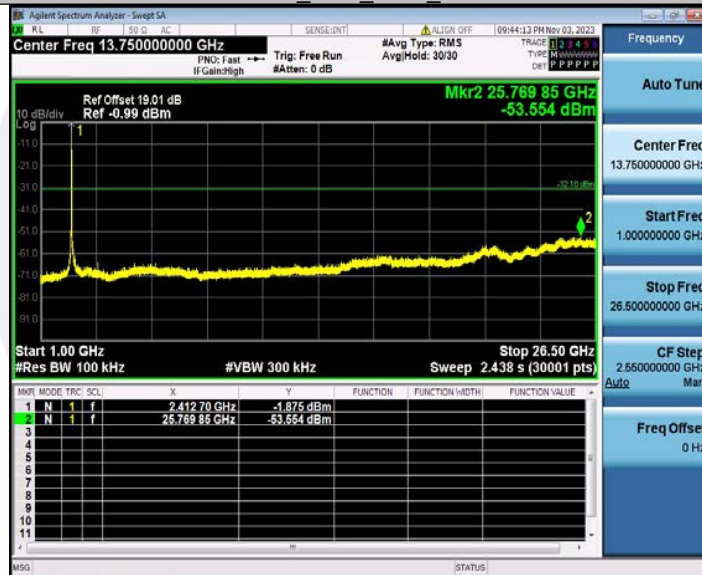


## 11AX20MIMO\_Ant2\_2412\_0~Reference





11AX20MIMO\_Ant2\_2412\_30~1000

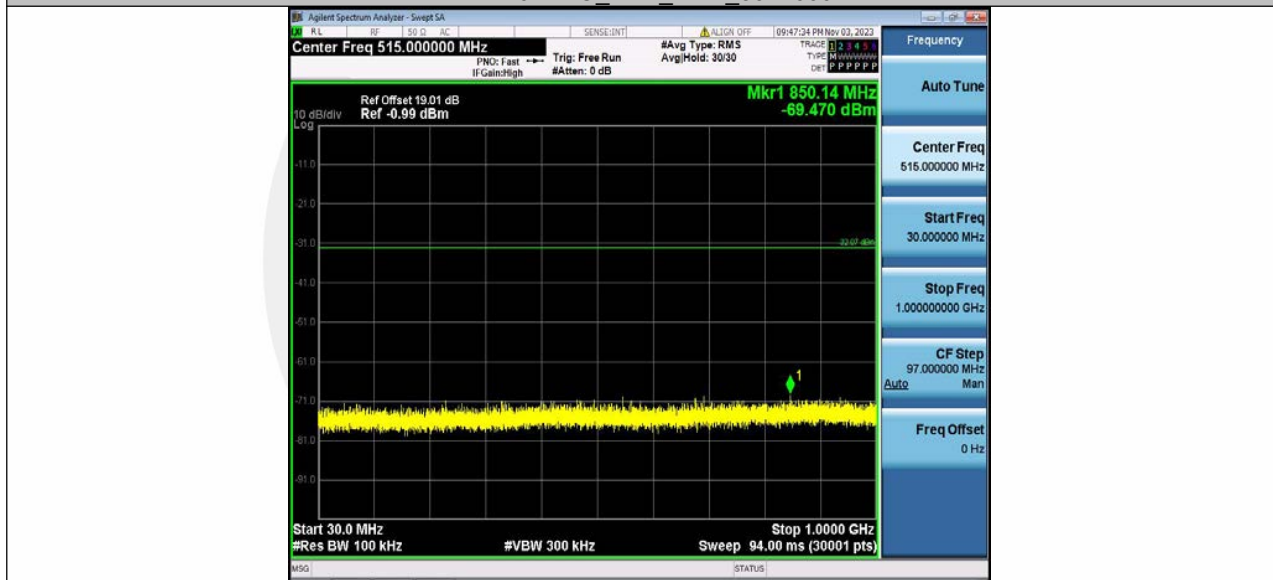

11AX20MIMO\_Ant2\_2412\_1000~26500



## 11AX20MIMO\_Ant1\_2437\_0~Reference



## 11AX20MIMO\_Ant1\_2437\_30~1000




## 11AX20MIMO\_Ant1\_2437\_1000~26500




11AX20MIMO Ant2 2437 0~Reference



11AX20MIMO Ant2 2437 30~1000

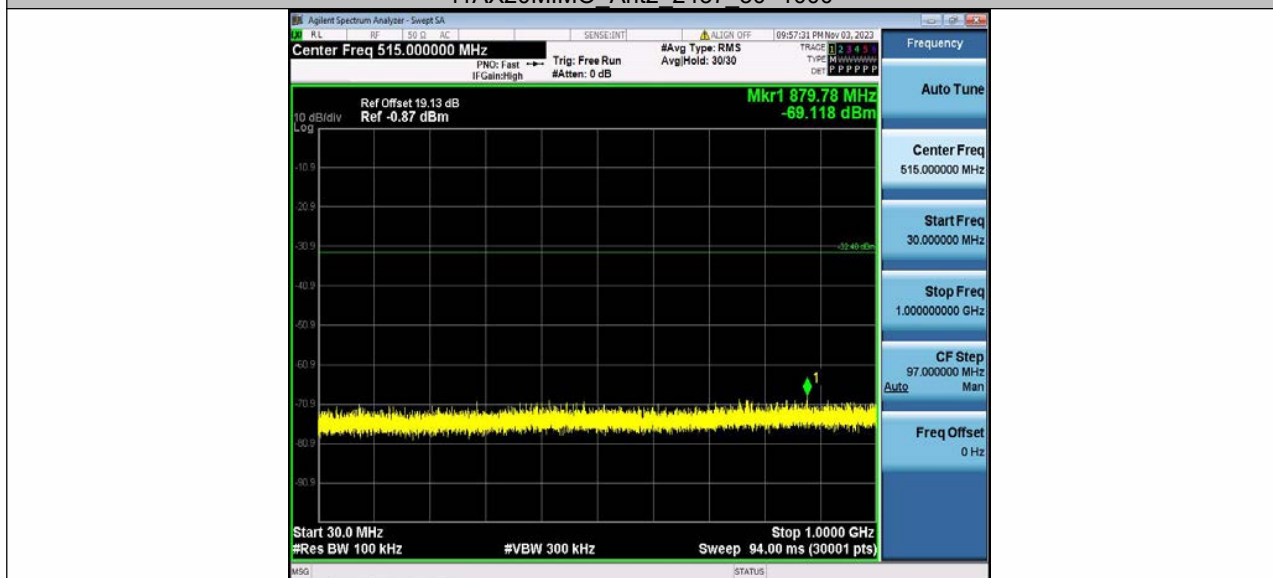


## 11AX20MIMO\_Ant2\_2437\_1000~26500

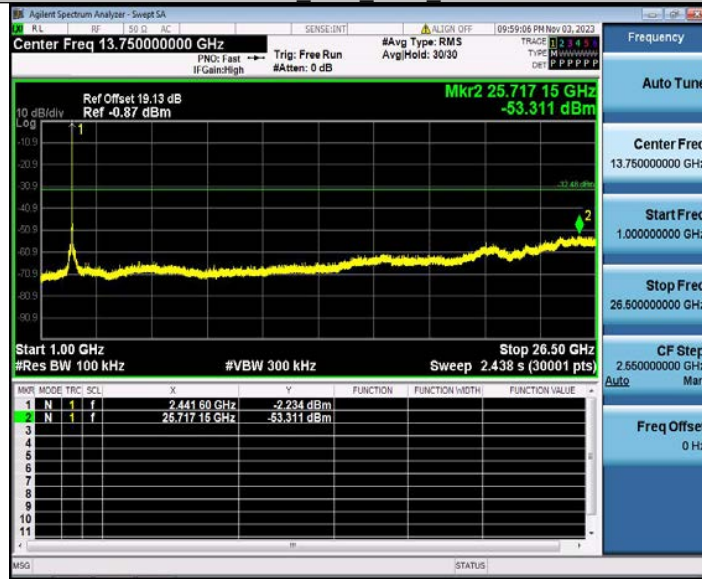

## 11AX20MIMO\_Ant1\_2462\_0~Reference



## 11AX20MIMO\_Ant1\_2462\_30~1000

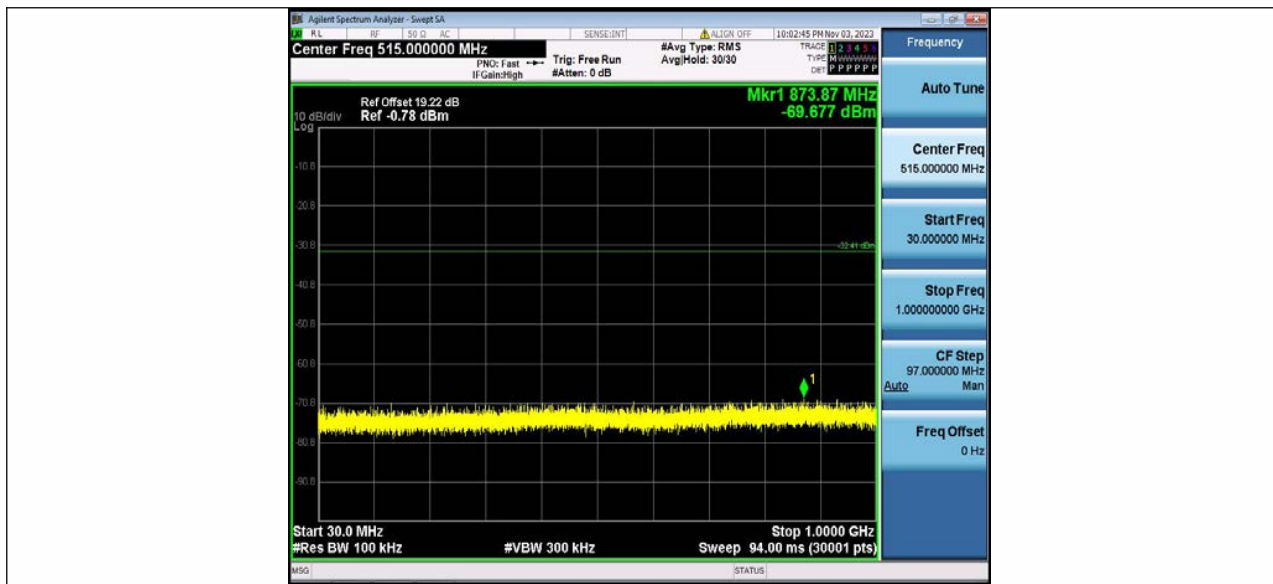

11AX20MIMO\_Ant1\_2462\_1000~26500



11AX20MIMO\_Ant2\_2462\_0~Reference

