



TEST REPORT

Applicant Name : EZTECH DIGITAL INC.
 Address : 251 Little Falls Drive Wilmington Delaware 19808 United States
 Report Number : RA230321-13736E-RF-00A
 FCC ID: 2A4AS-2212A

Test Standard (s)

FCC PART 15.231

Sample Description

Product Type: IP Camera
 Model No.: Reolink TrackMix LTE Plus
 Trade Mark: **reolink**
 Date Received: 2023-03-21
 Date of Test: 2023-04-21 to 2023-06-02
 Report Date: 2023-06-03

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bob. Liao

Bob.Liao
EMC Engineer

Approved By:

Candy. Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*".
 Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.
 This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
 Tel: +86 755-26503290 Fax: +86 755-26503290 Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST AND DETAILS	9
FCC §1.1307 (B) & §2.1093 – RF EXPOSURE.....	10
APPLICABLE STANDARD	10
TEST RESULT:	10
FCC §15.203 - ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.205, §15.209, §15.231 (E) - RADIATED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.231(E) - DEACTIVATION TESTING	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA	19
FCC §15.231(C) – 20 DB EMISSION BANDWIDTH TESTING	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA	22

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RA230321-13736E-RF-00A	Original Report	2023-06-03

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	IP Camera
Tested Model	Reolink TrackMix LTE Plus
Frequency Range	433.92MHz
E-field strength	60.66dBuV/m@3m
Modulation Technique	FSK
Antenna Specification*	Integral Antenna (It is provided by the applicant)
Voltage Range	DC10.8V from battery
Sample serial number	RA230321-13736E-RF-S1 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

All the test measurements were performed according to the measurement procedure described in ANSI C63.10 - 2013.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10 - 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters. Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.71dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	5.08dB
	1GHz - 18GHz	4.96dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 30241.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing by manufacturer.

Operating frequency: 433.92MHz

EUT Exercise Software

No software was used during testing and the power level was default*.

Special Accessories

No special accessories was used

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
REOLINK INNOVATION LIMITED	Rechargeable Li-ion Battery	Battery-Li12	C493A122JHB0323
Unknown	SD Card	Unknown	Unknown


External I/O Cable

Cable Description	Length (m)	From / Port	To
Unshielded Un-detachable DC cable	1.0	EUT	Rechargeable Li-ion Battery


Block Diagram of Test Setup

For Radiated Emission

Below 1G

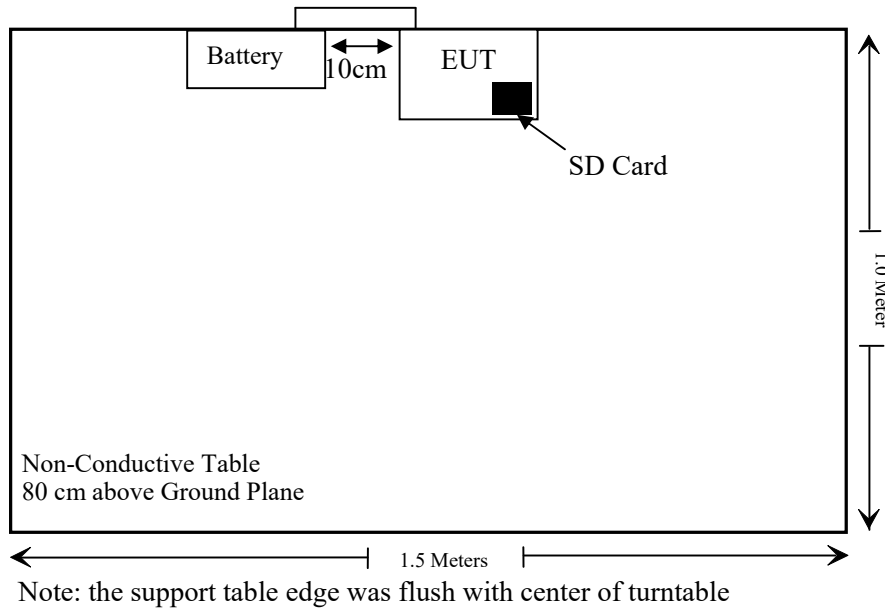

Above 1G

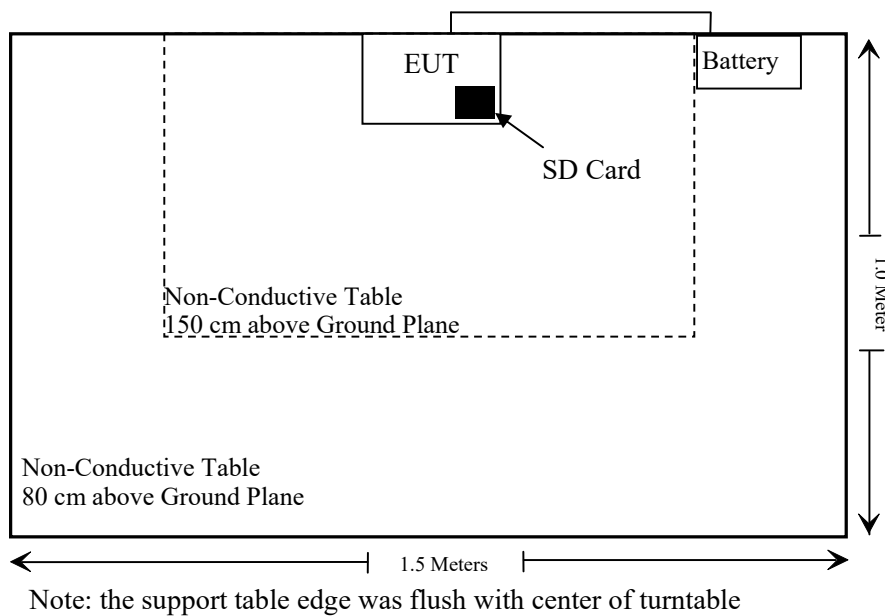

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§ 1.1307 (b) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Not Applicable
§ 15.205, §15.209, §15.231(e)	Radiated Emissions	Compliant
§15.231 (c)	20dB Emission Bandwidth	Compliant
§ 15.231 (e)	Deactivation	Compliant

Note: Not Applicable: The EUT is powered by battery.

TEST EQUIPMENT LIST AND DETAILS

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Test Receiver	ESR	102725	2022/11/25	2023/11/24
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2022/11/25	2023/11/24
SONOMA INSTRUMENT	Amplifier	310 N	186131	2022/11/08	2023/11/07
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2022/11/08	2023/11/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2023/02/14	2026/02/13
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	RF Coaxial Cable	No.10	N050	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.11	N1000	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.12	N040	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.13	N300	2022/11/25	2023/11/24
Unknown	RF Coaxial Cable	No.14	N800	2022/11/25	2023/11/24
Radiated Emission Test Software:e3 191218 (V9)					

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307 (b) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.2 - 1-mW test Exemption:

Per § 1.1307(b)(3)(i)(A), a single RF source is exempt RF device (from the requirement to show data demonstrating compliance to RF exposure limits, as previously mentioned) if the available maximum time-averaged power is no more than 1 mW, regardless of separation distance.

This exemption applies to all operating configurations and exposure conditions, for the frequency range 100 kHz to 100 GHz, regardless of fixed, mobile, or portable device exposure conditions. This is a standalone exemption, and it cannot be applied in conjunction with any other test exemption.

Test Result:

For worst case:

Mode	Frequency	Turn up Power(ERP)		1-mW test Exemption
	(MHz)	(dBm)	(mW)	
SRD	433.92	-36	0.0003	Yes

Note: The highest E-field strength is 60.66dBuV/m@3
 $E(\text{dBuV/m}) = \text{EIRP}(\text{dBm}) - 95.2$ for distance 3m
 so the $\text{EIRP} = 60.66\text{dBuV/m} - 95.2 = -34.54\text{dBm}$

$\text{ERP} = \text{EIRP} - 2.15$, so the $\text{ERP} = -36.69\text{dBm}$

The turn up ERP is -36dBm

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached.; fulfill the requirement of this section. Please refer to EUT photos.

Result: Compliant.

FCC §15.205, §15.209, §15.231 (e) - RADIATED EMISSIONS

Applicable Standard

FCC §15.205, §15.209, §15.231 (e)

According to FCC §15.231(e), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	1000	100
70-130	500	50
130-174	500 to 1500*	50 to 150*
174-260	1500	150
260-470	1500 to 5000*	150 to 500*
Above 470	5000	500


*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

EUT Setup

Below 1 GHz:

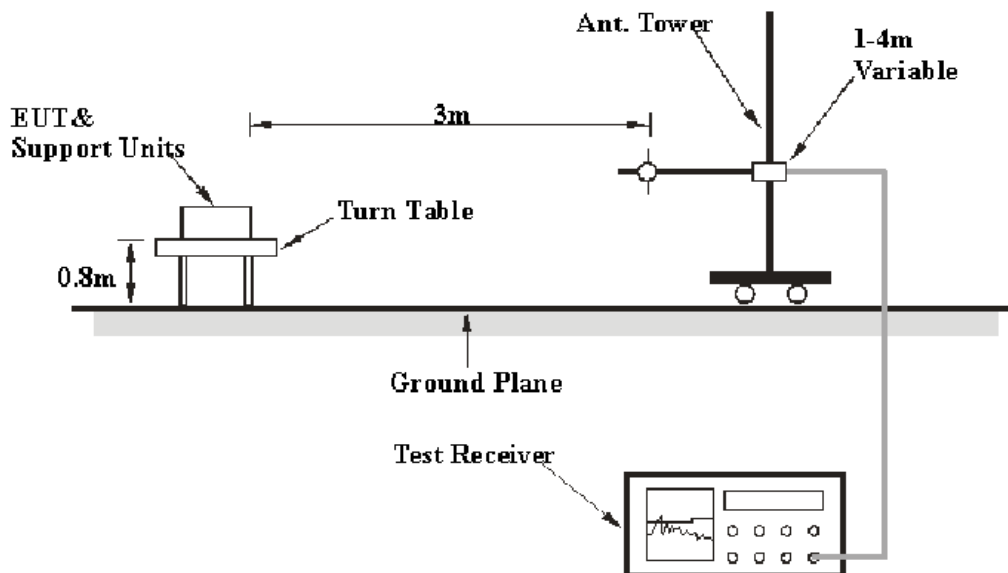

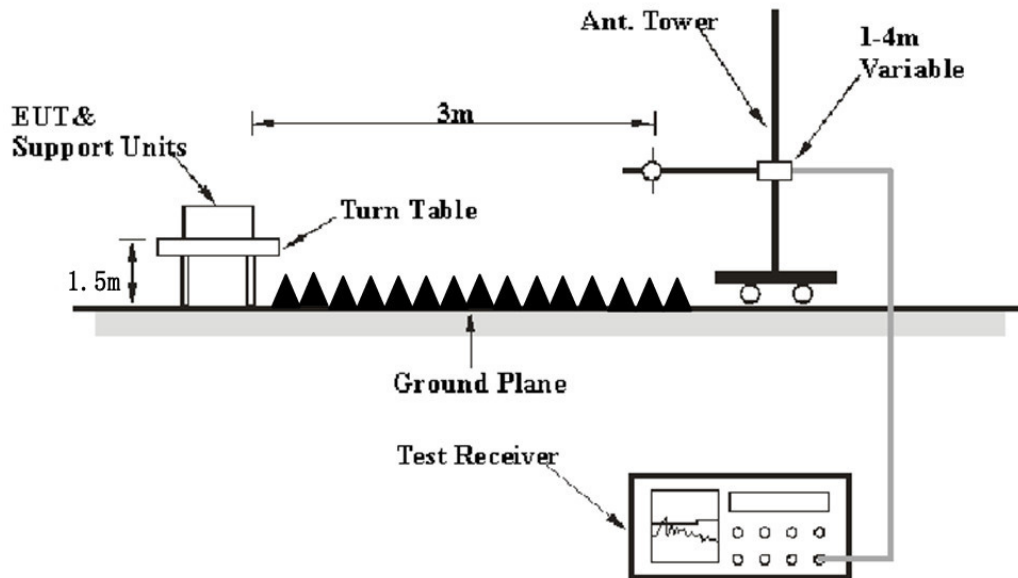Above 1 GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10 - 2013. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	PK
Above 1 GHz	1 MHz	3 MHz	/	PK

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1 GHz.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform QP/Average measurement.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin/Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin/over limit of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Margin / Over Limit} &= \text{Result / Absolute Level} - \text{Limit} \\ \text{Result / Absolute Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.205, §15.209, §15.231 (e).

Test Data

Environmental Conditions

Temperature:	23°C
Relative Humidity:	52-53 %
ATM Pressure:	101.0 kPa


The Below 1G testing was performed by Jason Liu on 2023-05-24.

The Above 1G testing was performed by Jimmy Zheng on 2023-05-25.

Test mode: Transmitting (Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded)

30MHz – 1 GHz:


Horizontal

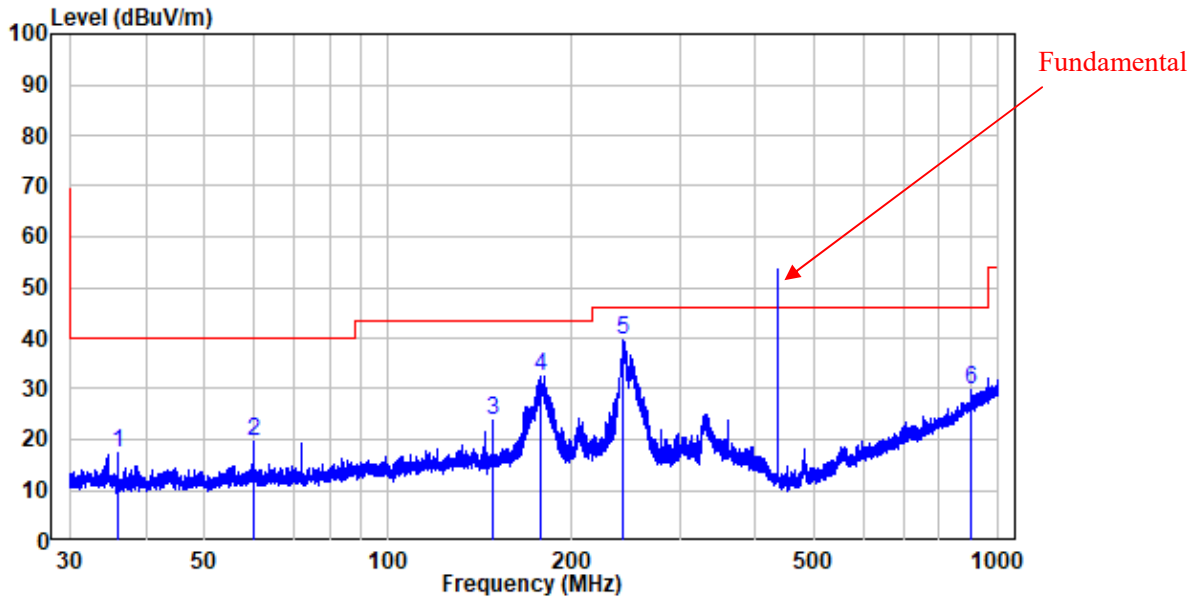

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : RA230321-13736E-RF
 Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	36.001	-11.20	28.47	17.27	40.00	-22.73	Peak
2	59.990	-10.62	30.09	19.47	40.00	-20.53	Peak
3	148.506	-15.35	39.07	23.72	43.50	-19.78	Peak
4	177.587	-12.99	45.53	32.54	43.50	-10.96	Peak
5	242.525	-10.75	50.49	39.74	46.00	-6.26	Peak
6	904.102	1.64	28.10	29.74	46.00	-16.26	Peak

Vertical

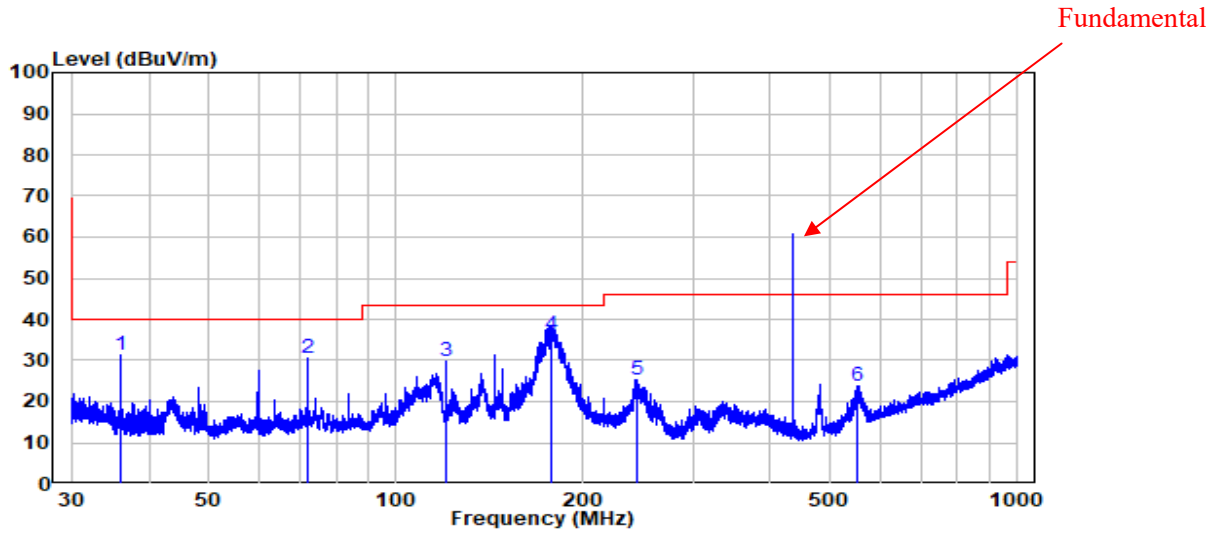

Site : chamber
 Condition: 3m VERTICAL
 Job No. : RA230321-13736E-RF
 Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	35.985	-11.20	42.52	31.32	40.00	-8.68	Peak
2	71.990	-15.62	46.14	30.52	40.00	-9.48	Peak
3	120.013	-13.53	43.32	29.79	43.50	-13.71	Peak
4	177.665	-12.99	49.12	36.13	43.50	-7.37	QP
5	244.339	-10.62	36.00	25.38	46.00	-20.62	Peak
6	551.915	-4.07	27.76	23.69	46.00	-22.31	Peak

Fundamental:

Frequency (MHz)	Receiver		Turn-Table Angle Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.231(e)	
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
433.92MHz									
433.92	59.42	PK	220	1.7	H	-5.73	53.69	72.87	-19.18
433.92	66.39	PK	174	2.1	V	-5.73	60.66	72.87	-12.21

Harmonic and 1-5GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15.231(e)	
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
433.92MHz									
867.84	24.44	PK	171	1.4	H	0.85	25.29	52.87	-27.58
867.84	24.21	PK	193	1.9	V	0.85	25.06	52.87	-27.81
1301.76	53.23	PK	132	1.7	H	-13.98	39.25	54	-14.75
1301.76	52.37	PK	149	1.6	V	-13.98	38.49	54	-15.51

Note:

The peak value can meet the limit of the average value.

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected Amplitude – Limit


The other spurious emission which is 20dB below the limit or in the noise floor level was not recorded.

Above 1 GHz: (Pre-scan plots)

Horizontal

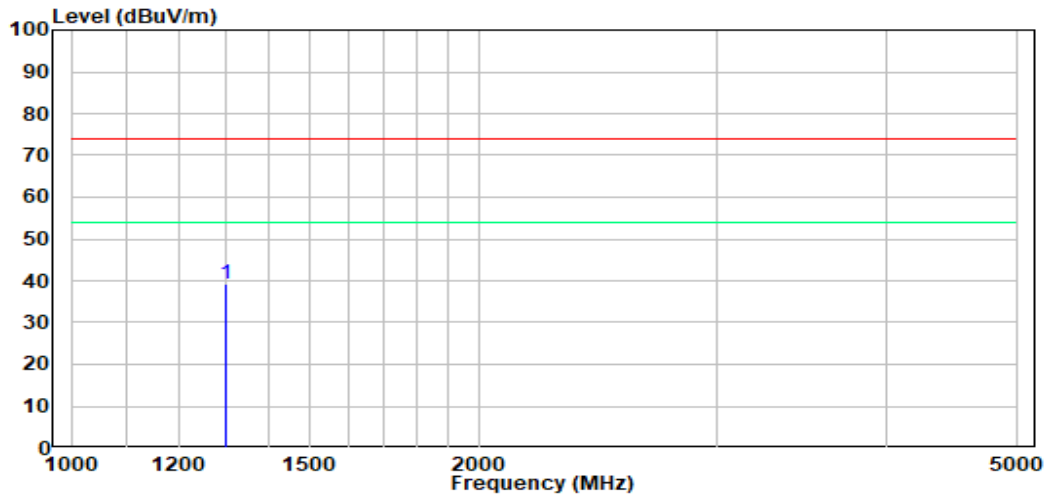

Vertical

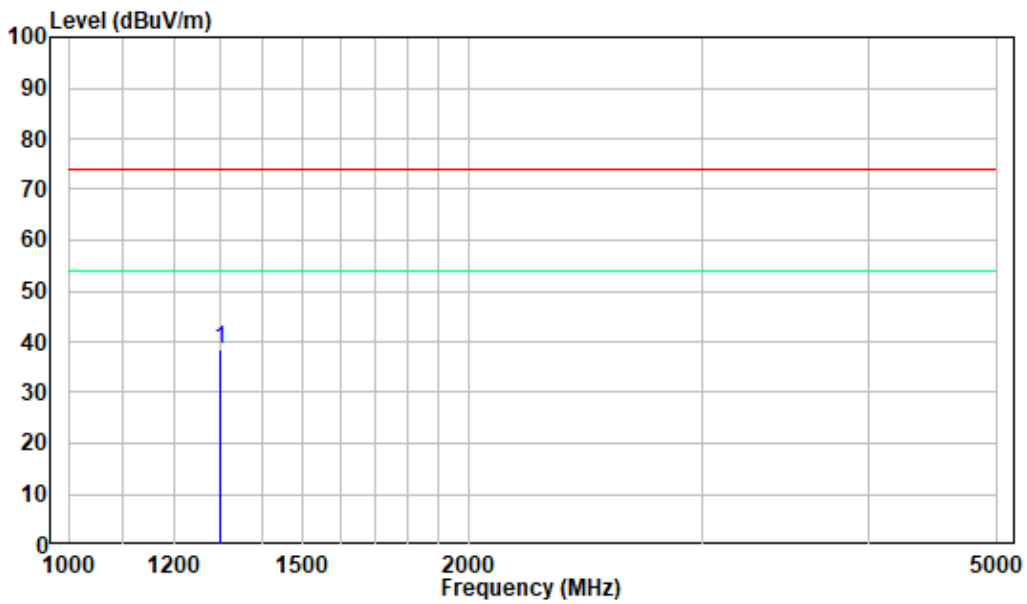

Note: All spurious emissions are compliant to the limit.


FCC §15.231(e) - DEACTIVATION TESTING

Applicable Standard

Per 15.231(e), devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

Test Procedure

1. Set center frequency of spectrum analyzer=operating frequency.
2. Set the spectrum analyzer as RBW=100kHz/ VBW=300kHz/ Span=0Hz.
3. Repeat above procedures until all frequency measured was complete.

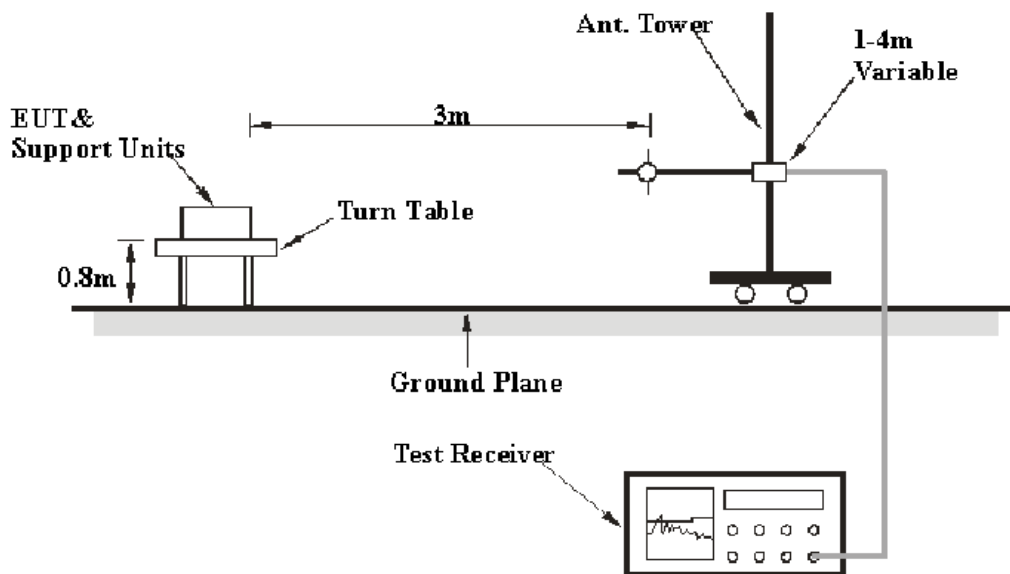

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	56%
ATM Pressure:	101.0kPa

The testing was performed by Matt Liang on 2023-04-21.

Test mode: Transmitting

Test Result: Compliant. Please refer to following tables and plots.

Transmission period

Transmission period (s)	Limit (s)	Result (s)
0.68696	< 1	Pass

Silent period


Silent period (s)	Limit (s)	Result (s)
1252.17	>20.6088	Pass

Note:


The silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

The duration time of transmission is 0.68696s, $0.68696 \times 30 = 20.6088$ s.

Silent period

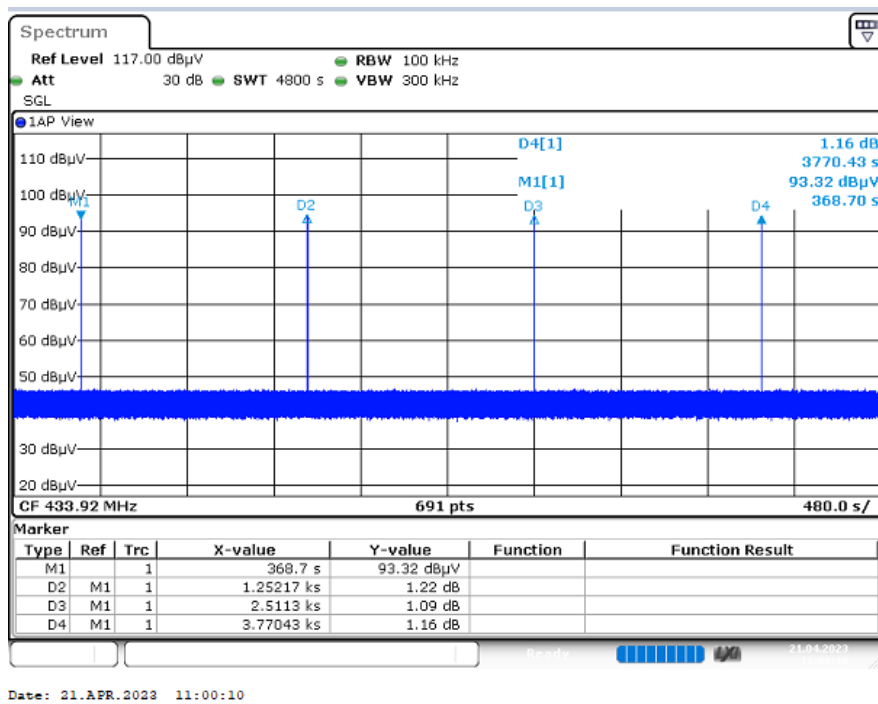

Duration time

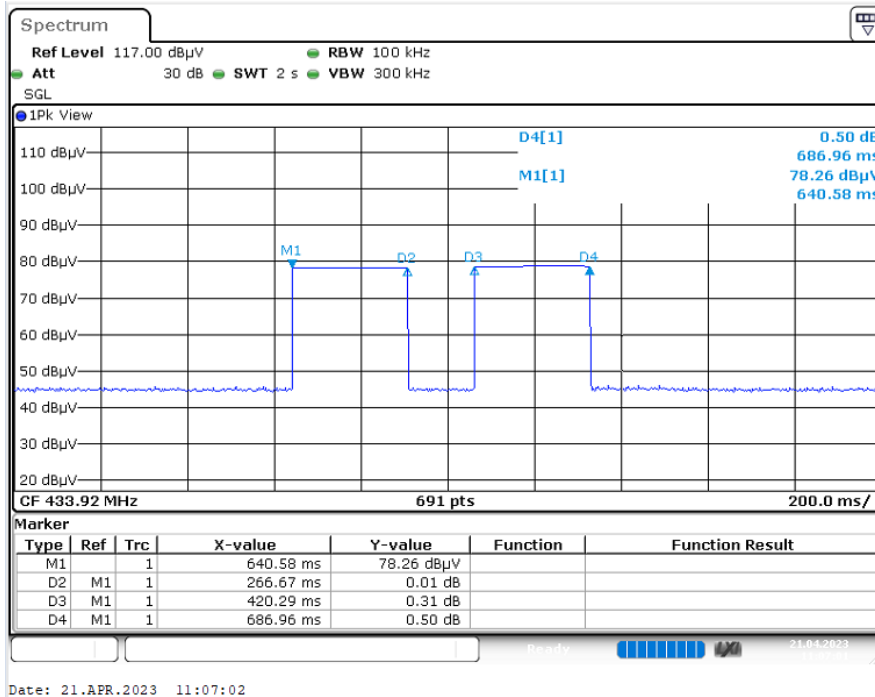


FCC §15.231(c) – 20 dB EMISSION BANDWIDTH TESTING

Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Procedure

The EUT is setting to the transmit mode, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

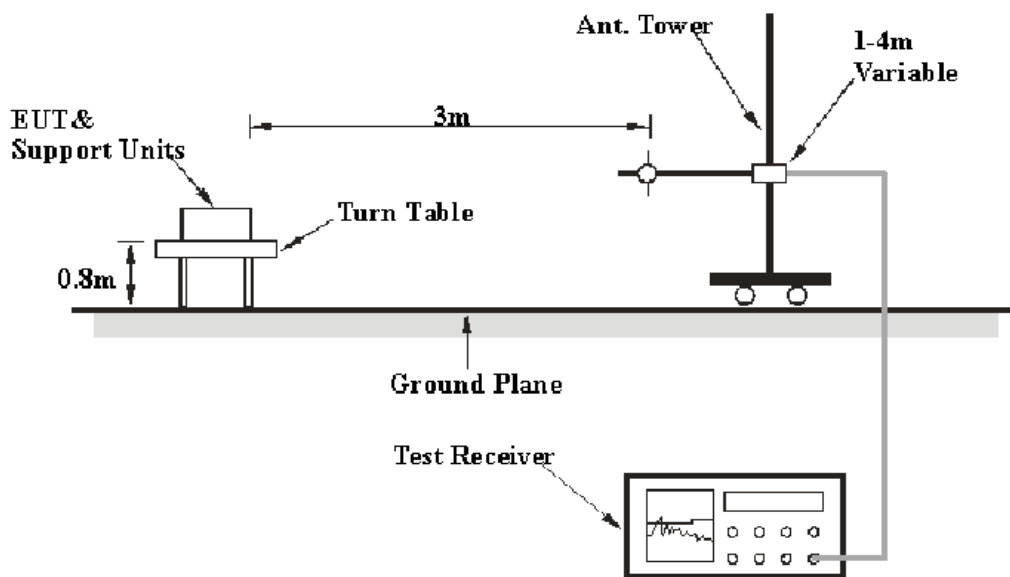

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	58%
ATM Pressure:	101.0kPa


The testing was performed by Matt Liang on 2023-06-02.

Test Mode: Transmitting

Test Result: Compliant. Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Emission Bandwidth (kHz)	Limit (kHz)	Result
433.92	35.31	<1084.8	Pass

20 dB Emission Bandwidth

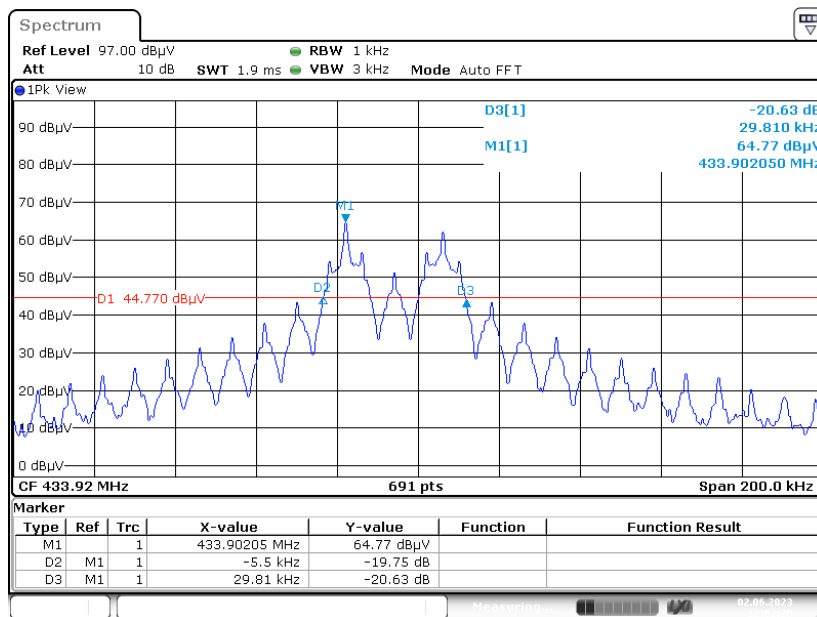

Date: 2 JUN 2023 12:02:20

***** END OF REPORT *****