

FCC PART 15.247 TEST REPORT

On Behalf of

CLICKWIN LLC.

530 S. Los Angeles St. Unit 2, Los Angeles, CA 90013. United States

FCC ID: 2BEF7-KB-BC80

Model: KB-BC80

March 29, 2024

This Report Concerns:		Equipment Type: Speaker
Test Engineer:	LBi Li /	
Report Number:	QCT24CR-1	1329E-02
Test Date:	March 5~21	, 2024 ^C ⁽¹⁾
Reviewed By:	Gordon Tan	1 Crondin. Tan
Approved By:	Kendy Wang	g1 ken up
Prepared By:	East of 1/F., Shuiku Road	

Report No.: QCT24CR-1329E-02

Page 1 of 35



Table of Contents

	NERAL INFORMATION	5
° 1.1.	Product Description for Equipment under Test (EUT)	5
1.2	System Test Configuration	
1.3	Test Facility	
1.4	Measurement Uncertainty	
2. SUI	MMARY OF TEST RESULTS	
	T OF TEST AND MEASUREMENT INSTRUMENTS	
3.1 c	Conducted Emission Test	S
3.2	Radiated Emission Test	9
3.3	RF Conducted test	
4. AN	FENNA REQUIREMENT	11
5 00	NDUCTED EMISSIONS	12
		OF AN AN G
5.1	Applicable Standard	
5.2	Limit	
5.3		
5.4	EMI Test Receiver Setup Test procedure	
5.5		
5.6	NDUCTED PEAK OUTPUT POWER	S O A A
6. CO		
6.1	Applicable Standard	,15
6.2		S 15
6.3	Test setup	
6.4	Test Data	
8 18	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH	
8 18	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH	AN G G A
7. CH	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard	
7. CH	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup	
7. CH 7.1 7.2	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup Test Procedure	
7. CH 7.1 7.2 7.3	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup	
7. CHA 7.1 7.2 7.3 7.4 7.5	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup Test Procedure	
7. CHA 7.1 7.2 7.3 7.4 7.5	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup Test Procedure Test Data WER SPECTRAL DENSITY	
7. CHA 7.1 7.2 7.3 7.4 7.5 8. POV	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup Test Procedure Test Data VER SPECTRAL DENSITY Applicable Standard Limit	
7. CHA 7.1 7.2 7.3 7.4 7.5 8. POV 8.1	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup Test Procedure Test Data VER SPECTRAL DENSITY Applicable Standard Limit Test setup	
7. CHA 7.1 7.2 7.3 7.4 7.5 8. POV 8.1 8.2	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup Test Procedure Test Data VER SPECTRAL DENSITY Applicable Standard Limit Test setup	
7. CHA 7.1 7.2 7.3 7.4 7.5 8. POV 8.1 8.2 8.3	ANNEL BANDWIDTH & 99% OCCUPIED BANDWIDTH Applicable Standard Limit Test setup Test Procedure Test Data VER SPECTRAL DENSITY Applicable Standard Limit Test setup Test setup Test Procedure	



- 9.1 Conducted Emission Method......27

Report No.: QCT24CR-1329E-02

Report Number	Description	Issued Date
QCT24CR-1329E-02	Initial Issue	2024 - 3-29
o children and chi	A C A C A C A C A C A C A C A C A C A C	o of the termine
A C C C C C C C C C C C C C C C C C C C		In the second second
E LE LE MARCE C LE LE LE MARCE C	STELLET AS STELLET AS STATES	of the the time of the
C C C C C C C C C C C C C C C C C C C		No of the the state of the stat
The second secon	ATT A C AT A THE C A C AT A THE A C A A A A A A A A A A A A A A A A A	STIM BO OCTOTION
the period of th	Contraction of the state of the	
AC CONTRACTOR STATES		AND OF THE STRATE STRATE
	EST O CONTRACTOR OF CHERNEL OF CONTRACTOR OF	
Shirtshirts of Shirtshirts		Contesting of Contesting
p c , the two c , the training of the training		AC OC THE STING
ST AND CONTRACTIONS OF A	THE STREET STREE	STITUS CONTEREST
Statistic Charles Charles Charles	E HE HE C E HE HE C E HE HE	ocher testing of
No of the structure of	A C C L L L L C C L L L C C C L L L C C C L L C	ING OCIETESTING
ETT THE CONTENT OF CONTENTS	C STR C C THE STREET C C THE STREET C	LESTING CONTRACTOR
S CHE STREET STREET	S C LE LE C C LE LE C C LE LE C	o chertente de construire de
	HILL CONTRACTOR C	STAR SCITTE
resting of the state of the sta	All share of the share of the share of	All the sector of the sector o
	a chi the state of the state of a state of the state of t	Contention of the second
	ET A C C C C C C C C C C C C C C C C C C	AND CONTRACTOR

Revision History of This Test Report

Report No.: QCT24CR-1329E-02

Page 4 of 35

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Description	Speaker S S S S S S S S S S S S S S S S S S S
Model No.	KB-BC80 children of the childr
Tested Model	KB-BC80
Sample(s) Status	Engineer sample
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	40 c chi ght c c chi ght ac c chi ght a c c chi ght a c c c c c c c c c c c c c c c c c c
Channel separation:	2MHz of the start
Modulation type:	GFSK of the state
Antenna Type:	PCB Antenna
Antenna gain*1:	-0.68dBi
Power supply:	DC 5V(Powered by adapter) DC 3.7V(Powered by battery)
Trade Mark:	KB KBOD
Applicant	CLICKWIN LLC.
Address	530 S. Los Angeles St. Unit 2, Los Angeles, CA 90013. United States
Manufacturer	GUANGDONG YILIAN INDUSTRIAL CO., LTD
Address	No.319, Shipai Section, Dongyuan Avenue, Shipai Town, Dongguan City, Guangdong Province
Sample No.	Y24C1329E01LY

Note: *¹This information provided by Manufacturer, SZ QC Lab is not responsible for the accuracy of this information.

1.2 System Test Configuration

1.2.1 Channel List

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	× 110 ×	2422 MHz	21	2442 MHz	31	2462 MHz
· 2 P	2404 MHz	12	2424 MHz	22	2444 MHz	× 320°	2464 MHz
* 3° ¢*	2406 MHz	13 0	2426 MHz	o 23 🖉	2446 MHz	33	2466 MHz
5 4 6	2408 MHz	6 14 J	2428 MHz	24 0	2448 MHz	34	2468 MHz
18° 5.11°	2410 MHz	15	2430 MHz	25	2450 MHz	° 35° si	2470 MHz
6	2412 MHz	16 °	2432 MHz	26	2452 MHz	36	2472 MHz
\$ 1 K	2414 MHz	^ر 17 °	2434 MHz	27	2454 MHz	37 0	2474 MHz
1 8° 2	2416 MHz	18 0	2436 MHz	ی 28	2456 MHz	× 38 °	2476 MHz
ST 9.0	2418 MHz	6 19° x	2438 MHz	29 0	2458 MHz	39	2478 MHz
2 × 10 × 10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

1.2.2 EUT Exercise Software

" FCC_assist_1.0.2.2 " software was used to test, The power level is default. The software and power level was provided by the applicant.

1.2.3 Support Equipment

~	Manufacturer	Description	Model	Serial Number
6	MDY S	Adapter	Input: 100-240V~ 50/60Hz Output: 5V 1A	A A A A A A A A A A A A A A A A A A A

1.2.4 Test mode

Transmitting mode: Keep the EUT in continuously transmitting.

1.3 Test Facility

Test Firm : Shenzhen QC Testing Laboratory Co., Ltd.

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS - Registration No.: L8464

The EMC Laboratory has been accredited by CNAS, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

A2LA Certificate Number: 6759.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 561109

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 29628

CAB identifier: CN0141

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.4 Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	±1.42 x10 ⁻⁴ %
RF output power, conducted	±1.06dB
Power Spectral Density, conducted	±1.06dB
Unwanted Emissions, conducted	+2.51dB
AC Power Line Conducted Emission	±1.80dB
Radiated Spurious Emission test (9kHz-30MHz)	±2.66dB
Radiated Spurious Emission test (30MHz-1000MHz)	2 5 ±4.04dB
Radiated Spurious Emission test (1000MHz-18000MHz)	6 6 +4.70 dB 6 6
Radiated Spurious Emission test (18GHz-40GHz)	±4.80dB
Temperature	±0.8°C
Humidity of stars of stars of stars	±3.2%
DC and low frequency voltages	±0.1%
Time? It a strate of a land a strate	±5%
Duty cycle	5% S ±5%

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

Report No.: QCT24CR-1329E-02

2. Summary of Test Results

Test Item	Section	Result	
Antenna Requirement	FCC part 15.203/15.247 (c)	Pass	
AC Power Line Conducted Emission	FCC part 15.207	Pass	
Conducted Peak Output Power	FCC part 15.247 (b)(3)	Pass	
Channel Bandwidth & 99% Occupied Bandwidth	FCC part 15.247 (a)(2)	Pass	
Power Spectral Density	FCC part 15.247 (e)	Pass	
Band Edge	FCC part 15.247(d)	Pass	
Spurious Emissions	FCC part 15.205/15.209	Pass	

Note: 1. Pass: The EUT complies with the essential requirements in the standard.

2.Test according to ANSI C63.10:2013

3.. All indications of Pass/Fail in this report are opinions expressed by Shenzhen QC Testing Laboratory Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

3. List of Test and Measurement Instruments

3.1 Conducted Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
EMI Test Receiver	STAR R&S	ESIB 7	2277573376	2024.03.14	2025.03.13
Artificial Mains Network	SCHWARZBECK	NSLK8126	8126200	2024.03.14	2025.03.13
PULSE LIMITER	R&S AM	ESH3-Z2	100058	2024.03.14	2025.03.13
EMITEST RECEIVER	ROHDE & SCHWARZ	ESCS30	834115/014	2024.03.14	2025.03.13
	EMI Test Receiver Artificial Mains Network PULSE LIMITER EMITEST RECEIVER	EMI Test Receiver R&S Artificial Mains Network SCHWARZBECK PULSE LIMITER R&S EMITEST RECEIVER ROHDE &	EMI Test ReceiverR&SESIB 7Artificial Mains NetworkSCHWARZBECKNSLK8126PULSE LIMITERR&SESH3-Z2EMITEST RECEIVERROHDE & SCHWARZESCS30	EMI Test ReceiverR&SESIB 72277573376Artificial Mains NetworkSCHWARZBECKNSLK81268126200PULSE LIMITERR&SESH3-Z2100058EMITEST RECEIVERROHDE & SCHWARZESCS30834115/014	EMI Test ReceiverR&SESIB 722775733762024.03.14Artificial Mains NetworkSCHWARZBECKNSLK812681262002024.03.14PULSE LIMITERR&SESH3-Z21000582024.03.14EMITEST RECEIVERROHDE & SCHWARZESCS30834115/0142024.03.14

ltem	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1. A	Spectrum Analyzer	ROHDE&SCHWARZ	FSV 40	101458	2023.04.12	2024.04.11
2. و	Loop Antenna	EMCO	6502	2133	2022.07.23	2024.07.22
3.	Logarithmic compound broadband Antenna	SCKWARZBECK	VULB9168	VULB9168-1-588	2023.04.01	2025.03.31
4.6	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	2277573376	2023.04.12	2024.04.11
5.00	EMI Test Receiver	R&S	ESPI	101131	2024.03.14	2025.03.13
6.	Horn Antenna	SCHWARZBECK	BBHA9120D	02069	2023.04.01	2025.03.31
7.	Horn Antenna	COM-MW	ZLB7-18-40G -950	12221225	2023.01.12	2025.01.09
۵. o	Amplifier	R&S STRANG	BBV9721	9721-031	2024.03.14	2025.03.13
9	Amplifier	AP STREHPXS STREET	BP-01G-18G	210902	2024.03.14	2025.03.13
10,	Pre-amplifier	COM-MW	DLAN-18000 -40000-02	10229104	2024.03.14	2025.03.13
11.00	966 Chamber	ZhongYu Electron	9*6*6	of the the start the solo	2022.07.25	2025.07.24

Report No.: QCT24CR-1329E-02

Page 9 of 35

ltem	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.0°	Wideband Radio Communication Tester	Rohde & Schwarz	CW500	151583	2023.03.21	2024.03.20
2.	Spectrum Analyzer	ROHDE& SCHWARZ	FSV 40	101458	2023.04.12	2024.04.11
3.	Signal Generator	Agilent	N5182A	MY50141563	2023.03.21	2024.03.20
4.	RF Automatic Test System	STATIS MW STATIST	MW100-RFCB/ MW100-PSB	MW2007004	2023.03.21	2024.03.20

3.3 RF Conducted test

Report No.: QCT24CR-1329E-02

4. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

EUT Antenna: The Ant is PCB Antenna, the best case gain of the antenna is -0.68dBi, reference to the Internal photo for details.

Report No.: QCT24CR-1329E-02

5. Conducted Emissions

5.1 Applicable Standard


FCC Part15 C Section 15.207

5.2 Limit

	Limit (dBµV)
Frequency range (MHz)	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
6 5 0.5-5 6 A	56	46
5-30	60 A 60	50 50

Note *: The level decreases linearly with the logarithm of the frequency.

5.3 Test setup

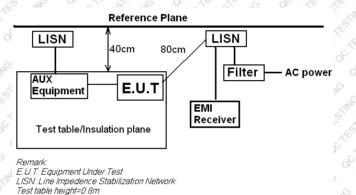

5.4 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz. RBW=9 kHz, VBW=30 kHz, Sweep time=auto

5.5 Test procedure

- 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
- The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
- 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 5.6 Test Data

Ł	Temperature	25.4°C	Humidity	62%
00	ATM Pressure	101.1kPa	Antenna Gain	-0.68dBi
ç	Test by	LBilli	Test result	PASS of A Strange

Test voltage: AC 120V/60Hz


Report No.: QCT24CR-1329E-02

Page 12 of 35

Measurement data:

Pre-scan all test modes, found worst case at BLE 1M 2402MHz, and so only show the test result of BLE 1M 2402MHz.



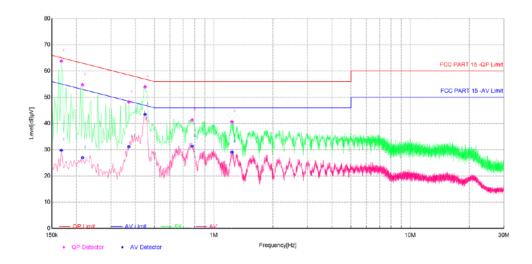


CM.	Final Data List										
S.C.	NO.	Freq. [MHz]	Factor[dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Phase	Verdict
Ş	1	0.1675	10.09	63.79	65.08	1.29	29.78	55.08	25.30	L	PASS
	2	0.215	10.31	54.69	63.01	8.32	26.99	53.01	26.02	L	PASS
2	3	0.37	10.18	48.17	58.50	10.33	31.19	48.50	17.31	L	PASS
N.	4	0.4475	10.15	53.97	56.92	2.95	43.47	46.92	3.45	L	PASS
20	5	0.7775	10.17	41.31	56.00	14.69	31.36	46.00	14.64	L	PASS
4	6	1.2375	10.05	40.65	56.00	15.35	29.11	46.00	16.89	L	PASS

Report No.: QCT24CR-1329E-02



Neutral:

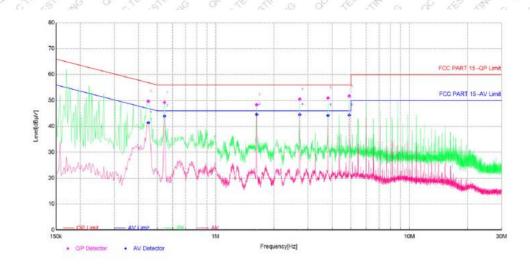

Final Data List										
NO.	Freq. [MHz]	Factor[dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	A∨ Margin [dB]	Phase	Verdict
1	0.45	10.36	49. <mark>6</mark> 0	56.88	7.28	41.41	46.88	5.47	N	PASS
2	0.545	10.28	49.21	56.00	6.79	43.98	46.00	2.02	N	PASS
3	1.6325	10.10	48.30	56.00	7.70	44.60	46.00	1.40	N	PASS
4	2.72	10.26	50.45	56.00	5.55	44.54	46.00	1.46	N	PASS
5	3.81	10.34	50.91	56.00	5.09	44.21	46.00	1.79	N	PASS
6	4.9	10.39	51.66	56.00	4.34	44.34	46.00	1.66	N	PASS

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.

Report No.: QCT24CR-1329E-02

6. Conducted Peak Output Power

6.1 Applicable Standard


FCC Part15 C Section 15.247 (b)(3)

6.2 Limit

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

6.3 Test setup

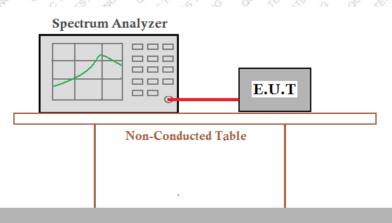

Ground Reference Plane

6.4 Test Data

11 11	Temperature	23.5 °C	Humidity	50 %
N.	ATM Pressure	101.1kPa	Antenna Gain	-0.68dBi
0	Test by	LBiLi	Test result	PASS CONTRACTOR


Please refer to following table and plots.

Report No.: QCT24CR-1329E-02

Page 15 of 35



Ou	tput Power:	S S A LE LE S		a cher still and	of the stime of
S. M. S.	Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
ç, x	ET THE G	Lowest	0.95	offer stilling of	the stime of the
00	BLE 1M	Middle	1.22 (, m ,)	30	Pass
AND IN	a la la	Highest	۵ [.] 2 [.] 2.96 م [.] 2.9 م		OC CTES ESTIMATING

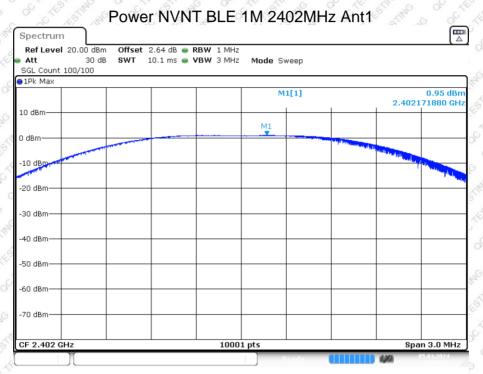


Date: 5.MAR.2024 09:06:54

Report No.: QCT24CR-1329E-02

Page 16 of 35



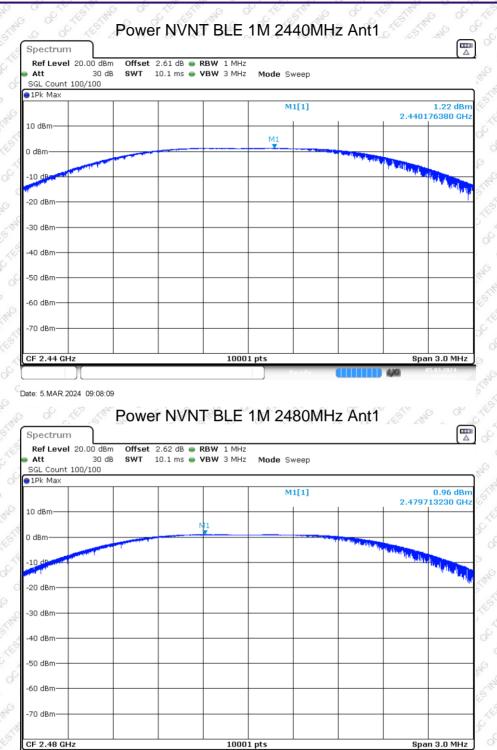

Date: 5.MAR.2024 09:09:25


Page 17 of 35

7. Channel Bandwidth & 99% Occupied Bandwidth

- 7.1 Applicable Standard FCC Part15 C Section 15.247 (a)(2)
- 7.2 Limit

The minimum 6 dB bandwidth shall be 500 kHz.

7.3 Test setup



Ground Reference Plane

7.4 Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth: • The transmitter shall be operated at its maximum carrier power measured under normal test

conditions.

• The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

 The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.

• The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

7.5 Test Data

Temperature	23.5 °C	Humidity	50 %
ATM Pressure	101.1kPa	Antenna Gain	-0.68dBi
Test by	LERI LI COLLEGA	Test result	PASS

Please refer to following table and plots.

Report No.: QCT24CR-1329E-02

Page 18 of 35

DTS Bandwidth:

	A O OF AV			61 13
Mode	Test channel	DTS Bandwidth (MHz)	Limit (MHz)	Verdict
THE COLLEGE AND COL	Lowest	0.507	0.5	PASS
BLE 1M	Middle	0.519	0.5	PASS
and the state of the second	Highest	0.523	0.5	PASS


99% Occupied Bandwidth:

j.	Mode	Test channel	99% Occupied Bandwidth (MHz)	Verdict
	the state of the the	Lowest	۲۰ ۲۵ 1.079 ۲۰ ۲۵ ۵۰ ۲۵ ۲۰ ۲۵ ۲۰	PASS
Ó	BLE 1M	Middle S	1.125 ST 2 1	PASS
Ş	a the strong of the	Highest	5	PASS


Report No.: QCT24CR-1329E-02



DTS Bandwidth:

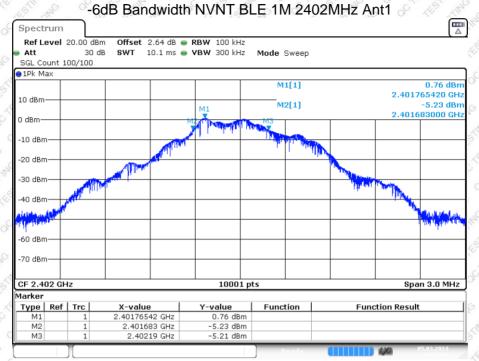

Date: 5.MAR.2024 09:07:06

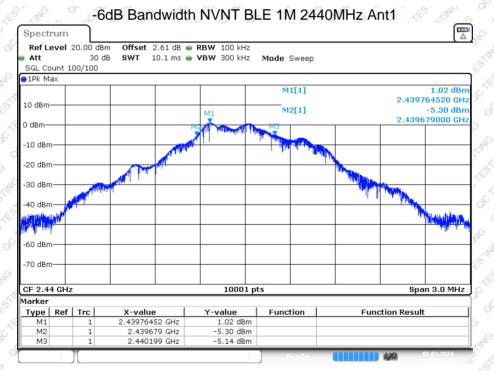


5.MAR.2024 09:08:20

Report No.: QCT24CR-1329E-02

Page 20 of 35



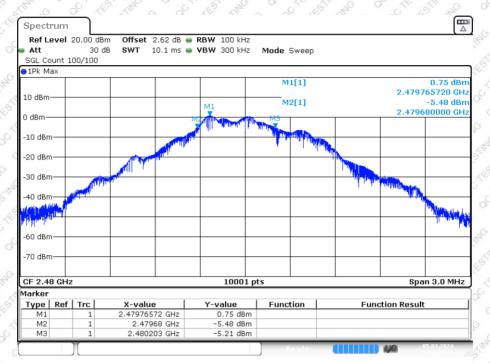

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

Date: 5.MAR.2024 09:09:37


Report No.: QCT24CR-1329E-02



99% Occupied Bandwidth:



Date: 5.MAR.2024 09:07:00

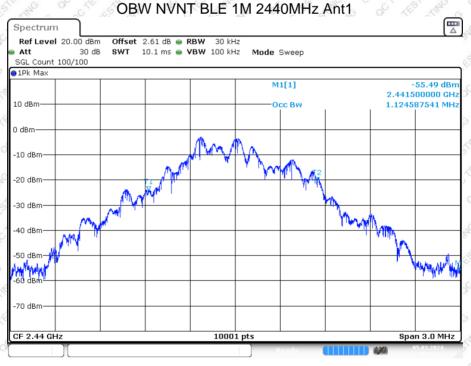


Date: 5.MAR.2024 09:08:14

Report No.: QCT24CR-1329E-02

Page 22 of 35



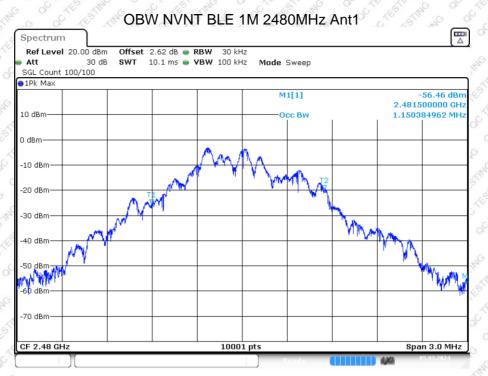

Date: 5.MAR.2024 09:09:31

Report No.: QCT24CR-1329E-02

8. Power Spectral Density


8.1 Applicable Standard

FCC Part15 C Section 15.247 (e)

8.2 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density

8.3 Test setup

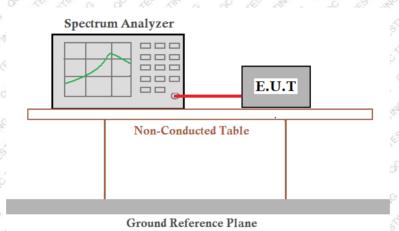

8.4 Test Procedure

Refer to KDB558074 D01 15.247 Meas Guidance v05r02

8.5 Test Data

Temperature	23.5 °C	Humidity	50 %
ATM Pressure	101.1kPa	Antenna Gain	-0.68dBi
Test by	LBi Li Contra chi and	Test result	PASS


Please refer to following table and plots.

Mode	Test channel	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Result
Child In the S	Lowest	, 19.11 M & Stra		No. Co.
BLE 1M	Middle	6 6 19.07 5 m o	8.00	Pass
	Highest	2 C	and the stand of a	LES MA

Report No.: QCT24CR-1329E-02

Page 24 of 35



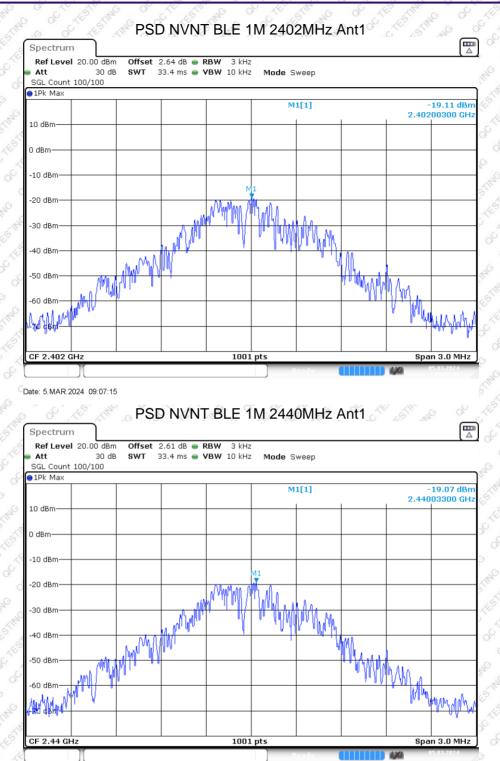


Date: 5.MAR.2024 09:08:30

Report No.: QCT24CR-1329E-02

Page 25 of 35



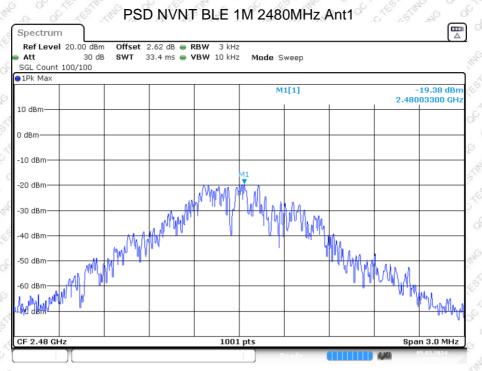

Date: 5.MAR.2024 09:09:47


Report No.: QCT24CR-1329E-02

9. Spurious Emission in Non-restricted & restricted Bands

- 9.1 Conducted Emission Method
 - 9.1.1 Applicable Standard
 - FCC Part15 C Section 15.247 (d)
 - 9.1.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

9.1.3 Test setup

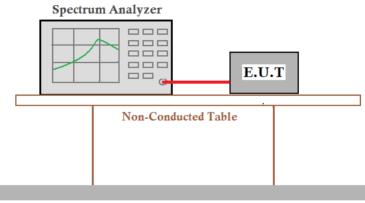

Ground Reference Plane

9.1.4 Test Procedure

 Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.

- Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- Repeat above procedures until all measured frequencies were complete.

9.1.5 16	t Data	All a chi shi wa a		
Tempe	rature	23.5 °C	Humidity	50 %
ATM P	ressure	101.1kPa	Antenna Gain	-0.68dBi
Fest by		LBKLI STALE OF A	Test result	PASS

Please refer to following plots.


Report No.: QCT24CR-1329E-02

Page 27 of 35



Ref L	evel	20.00 d 30			_	V 100 k⊢ V 300 k⊢		Mode	Sweep					
SGL Co		00/100												
								М	1[1]					58 dB
10 dBm	\rightarrow						<u> </u>					2.	4017751	
								M	2[1]				-50.8 4000000	
) dBm—									1		1	1 2.0	+000000	DUG
10 dBr	-													-
-20 dBn		1 -19.2	41_dBm		_									#
30 dBn	ד-י													71
40 dBm	η						<u> </u>					_		\rightarrow
													N	12
50 dBri	ד-י										M4	M3	المتحد المراجع	1
and and the state	Hoolit die doute a se	n bilen teant. Tealaiste comb		at hand has	dan ah	allah araanta Marati		A. H. H. Linger			and a state of the		Marki, Appela	
				[` `										
70 dBri	י+-י													
Start 2	.306	GHZ				3000	1 pts	,				8	top 2.40	6 GH
larker Type	Pof	Trc	X-value		v	value	1	Func	tion	1	E.,	nction R	o cult	
M1	Ker	1	2.40177			0.58 dB	m	i unc	cion		Fu	ICCIOILK	esuit	
M2		1		2.4 GHz	-	50.84 dB								
MЗ		1		39 GHz		58.59 dB								
M4		1	2.381886	67 GHz	-	54.30 dB	m							

Date: 5.MAR.2024 09:07:28

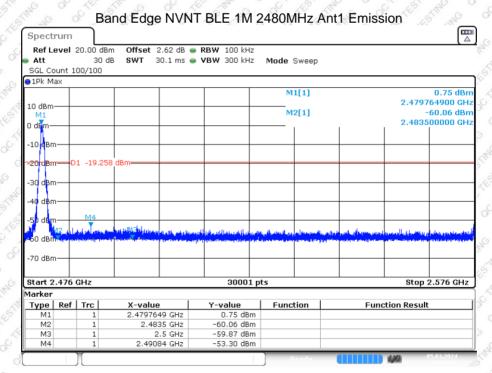


Date: 5.MAR.2024 09:10:00


Report No.: QCT24CR-1329E-02

Page 28 of 35



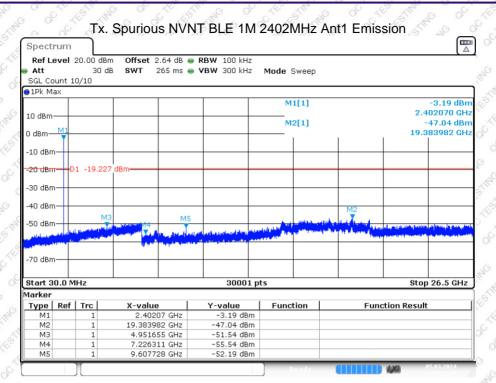

Date: 5.MAR.2024 09:07:48

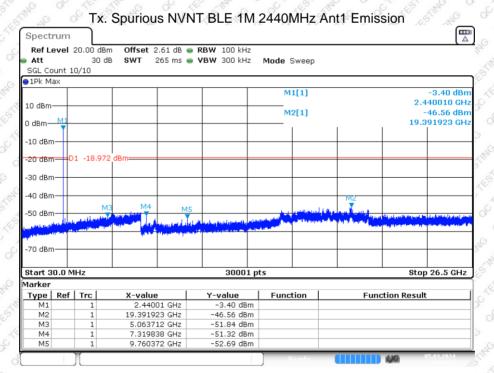

Date: 5.MAR.2024 09:08:50

£ _0 /2


Date: J. WAR. 2024 09:08:50

Page 29 of 35

Address: East of 1/F., Building E, Xinghong Science Park, No.111, Shuiku Road, Fenghuanggang, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23008269 Fax: 0755-23726780 www.qctest.com.cn

Report No.: QCT24CR-1329E-02



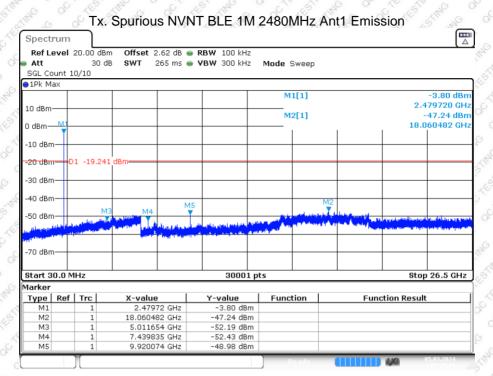

Date: 5.MAR.2024 09:10:21

Report No.: QCT24CR-1329E-02

- 9.2 Radiated Emission Method
 - 9.2.1 Applicable Standard

FCC Part15 C Section 15.209 and 15.205


9.2.2 Limit

●C


Frequency	Field Strengths Limits (µV/m at 3 m)	Field Strengths Limits (dBµV/m at 3 m)	Remark
30 - 88	ິ _ເ ຄັ້ (ຂ ຳ 00 ⁰ ຼີ ເຄັ	40.0	Quasi-peak
88 – 216	150 ¹	43.5	Quasi-peak
216 – 960	51 ¹¹⁰ 200 (10 51 ¹⁰⁰)	46.0	Quasi-peak
Above 960	12 Jan 500 an 12	54.0	Quasi-peak
Above 1GHz		54.0	Peak
ADOVE IGHZ	o of the time of	74.0	Average

Note: dBµV/m =20log(µV/m)

9.2.3 Test setup

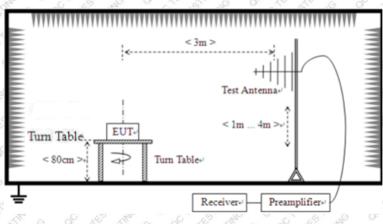

For radiated emissions from 30MHz to1GHz

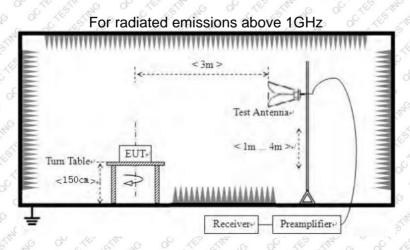

Report No.: QCT24CR-1329E-02

Page 31 of 35



9.2.4 EMI Test Receiver Setup

Frequency	RBW	VBW	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QB STORE
Above 1 GHz	1 MHz	3 MHz	the le te te	Peak
ADOVE 1 GHZ	1 MHz	🖉 10 Hz 📣	2 M GI & R	Average

9.2.5 Test procedure

The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

9.2.6 Test Data

Temperature	25 °C	Humidity	49 %
ATM Pressure	101.1kPa	Antenna Gain	-0.68dBi
Test by	Charlie He	Test result	PASS O A A

Test voltage: AC 120V/60Hz


Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

2. The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Below 1GHz

Pre-scan all test modes, found worst case at BLE 1M 2402MHz, and so only show the test result of BLE 1M 2402MHz.

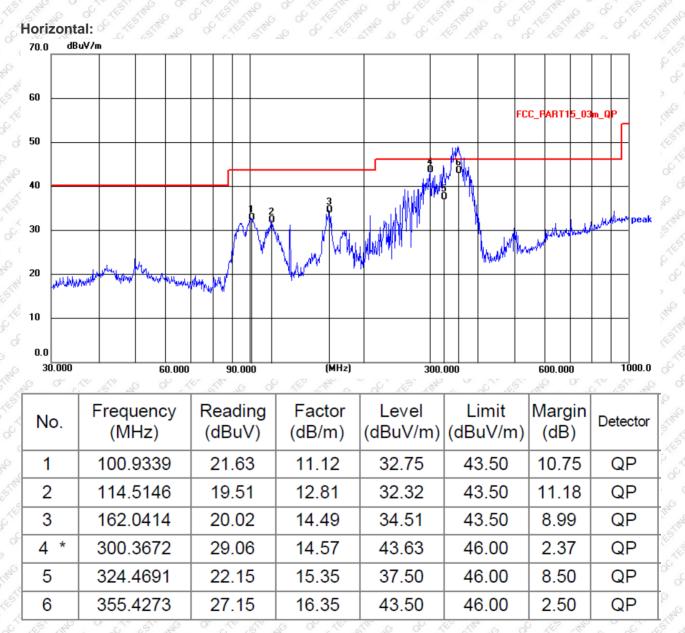

Report No.: QCT24CR-1329E-02

Page 33 of 35

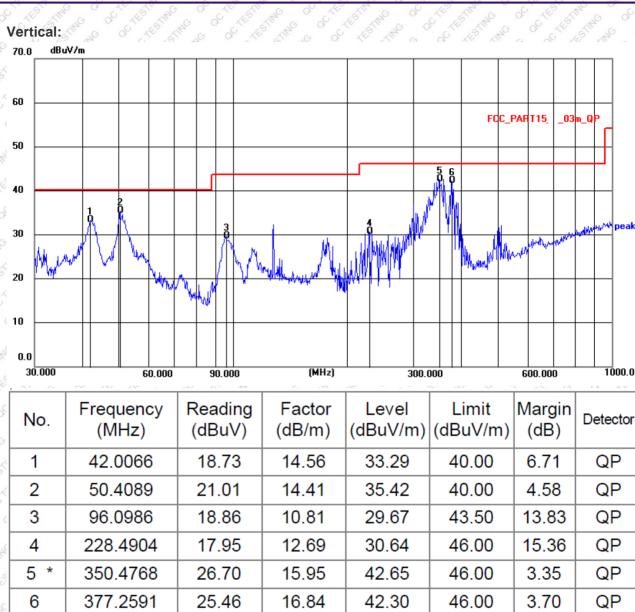

Report No.: QCT24CR-1329E-02

Above 1GHz

Pre-scan all test modes, found worst case at BLE 1M Mode, and so only show the test result of BLE 1M Mode.

Frequency (MHz)	Read Level (dBµV)	polarization	Factor (dB/m)	Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector
2310 🖉	51.62	Strange Conce	-11.14	40.48	× 74°	33.52	peak
2310	56.65	CAR STRANG	-11.16	45.49	5 74	28.51	peak
2390	51.31	° H ST	o -10.9	40.41	74	33.59	peak
2390	56.24	NO V (P)	-10.96	45.28	74	28.72	peak
4804	51.01	Stine H of	-4.37	46.64	^م 74 م ⁴	27.36	peak
4804	ِي 51.88 ⁽¹⁾	C A A A A A A A A A A A A A A A A A A A	-4.51	47.37	5 74 0	26.63	peak

Test channel: Lowest channel

Test channel: Middle channel

Frequency (MHz)	Read Level (dBµV)	polarization	Factor (dB/m)	Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector
4880	50.64	A LAN	^د _4.1	46.54	74	27.46	peak
4880	50.2	° V St	-4.23	45.97	74	28.03	peak

Frequency (MHz)	Read Level (dBµV)	polarization	Factor (dB/m)	Level (dBµV/m)	Limit Line (dBµV/m)	Margin (dB)	Detector
2483.5	56.53	° H° Sin	-10.61	45.92	^م ر 74 م	28.08	peak
2483.5	52.95	S V R	-10.71	42.24	74	31.76	peak
2500	52.91	STILL H	-10.57	42.34	× 74 ×	31.66	peak
2500	49.98		-10.67	39.31	74	34.69	peak
4960	50.44	O AH SHI	-3.82	46.62	74	27.38	peak
4960	52.76	No X N	-3.93	48.83	74	25.17	peak

Remarks:

1. Level =Receiver Read level + Factor

2. The emission levels of other frequencies are very lower than the limit and not show in test report.

END OF TEST REPORT

Report No.: QCT24CR-1329E-02

Page 35 of 35