



Shenzhen Qianmu Communication Technology Co., Ltd.

Focus on antenna
solutions, design and
production

client: DOOGEE

Project: D16

date: 2023.11.05

versions: A1

Radio frequency: QIU ZHI
YUAN




Table of Contents

1. testing environment
2. Description of previous debugging records
3. Matching circuit specification
4. Active test data
5. Conduction test data
6. Call current acoustic simulation test
7. Environmental treatment specification
8. GPS/WIFI/BT passive parameter
9. GPS/WIFI/BT measured effect
10. summary



Test environment

	Test items	equipment
1. S parameter (S-parameter)	1. Return loss (Return Loss) 2. VSWR (VSWR)	Network analyzers: Agilent E5071B HP 8753D
2. Active testing (Active)	1. Transmit Power (TRP) 2. Receive Sensitivity (TIS) 3. Frequency error 4. The screen is off and on	1. dark room: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. Comprehensive Tester: Agilent 8960 E5515B × 2 StarPoint SP6011
3. Passive testing (Passive)	1. (Gain) 2. (Efficiency)	1. dark room: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. Network analyzers: Agilent E5071B HP 8753D

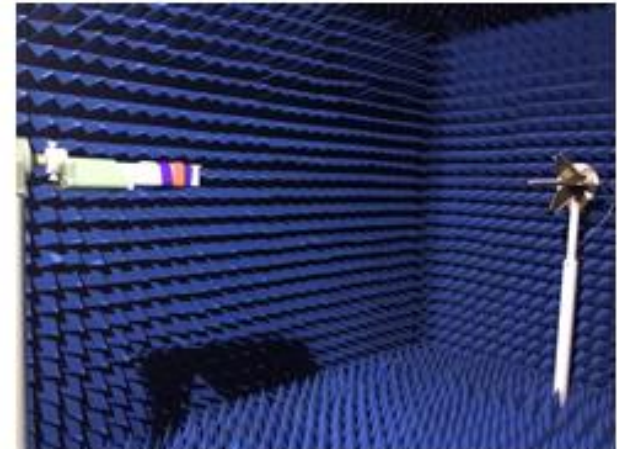



Description of previous debugging records

date	versions	Debug record description
2023-11-02	T:A	FPC sample, test prototype




Debugging instruction of the whole machine

type	Bluetooth watch						
Plate type	mainboard						
Antenna profile		Antenna state		Antenna state	Antenna form	Design area	Matching change
	Bluetooth antenna	BT	2.4GHz~2.5GHz	FPC sample	Monopole	holder	not have
Prototype status	Debugging machine			Environmental treatment			



Matching circuit -BT antenna

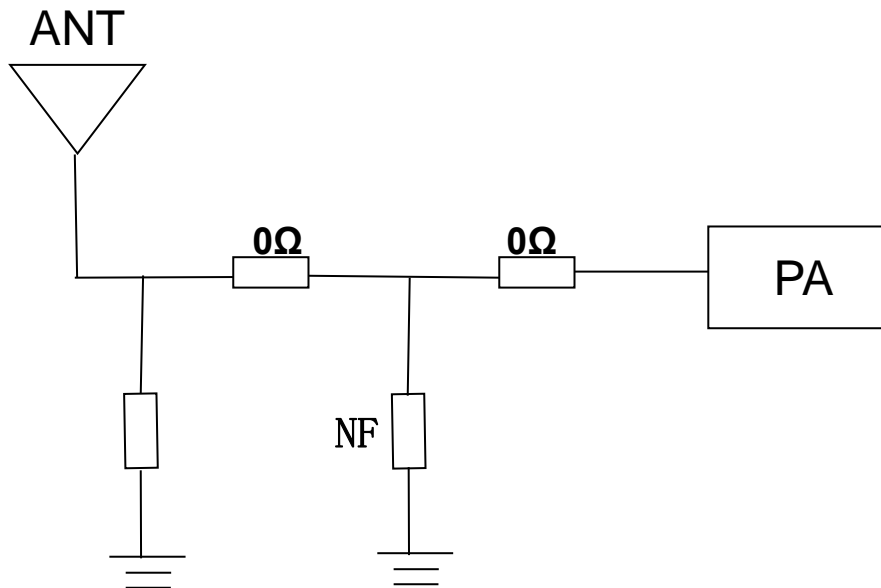

The original match was not changed



Bluetooth antenna efficiency

FEITUKEJI											
Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Point Values											
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-9.64	-9.72	-9.68	-9.50	-9.48	-9.18	-9.25	-9.46	-9.43	-9.29	-9.22
Peak EIRP (dBm)	-4.84	-4.91	-4.94	-4.91	-4.91	-4.65	-4.82	-5.13	-5.11	-4.81	-4.66
Directivity (dBi)	4.80	4.81	4.74	4.59	4.56	4.52	4.44	4.33	4.32	4.47	4.56
Efficiency (dB)	-9.64	-9.72	-9.68	-9.50	-9.48	-9.18	-9.25	-9.46	-9.43	-9.29	-9.22
Efficiency (%)	10.90	10.70	10.80	11.20	11.30	12.10	11.90	11.30	11.40	11.80	12.00
Gain (dBi)	-4.84	-4.91	-4.94	-4.91	-4.91	-4.65	-4.82	-5.13	-5.11	-4.81	-4.66
NHPRP \pm Pi/4 (dBm)	-11.35	-11.42	-11.40	-11.23	-11.20	-10.88	-10.92	-11.09	-11.03	-10.85	-10.76
NHPRP \pm Pi/6 (dBm)	-12.97	-13.04	-13.02	-12.85	-12.82	-12.50	-12.56	-12.75	-12.71	-12.54	-12.43
NHPRP \pm Pi/8 (dBm)	-14.13	-14.20	-14.19	-14.01	-13.99	-13.67	-13.74	-13.93	-13.90	-13.72	-13.60
Upper Hem. PRP (dBm)	-13.41	-13.47	-13.46	-13.32	-13.33	-13.06	-13.16	-13.39	-13.39	-13.28	-13.24
Lower Hem. PRP (dBm)	-12.01	-12.10	-12.05	-11.83	-11.78	-11.46	-11.52	-11.71	-11.67	-11.50	-11.42
Upper Hem. PRP (%)	4.56	4.50	4.51	4.66	4.65	4.94	4.83	4.58	4.58	4.70	4.75
Lower Hem. PRP (%)	6.29	6.17	6.24	6.55	6.63	7.15	7.05	6.75	6.81	7.09	7.21





Matching circuit -BT antenna:





Test: Use APP to find the actual test of the bracelet

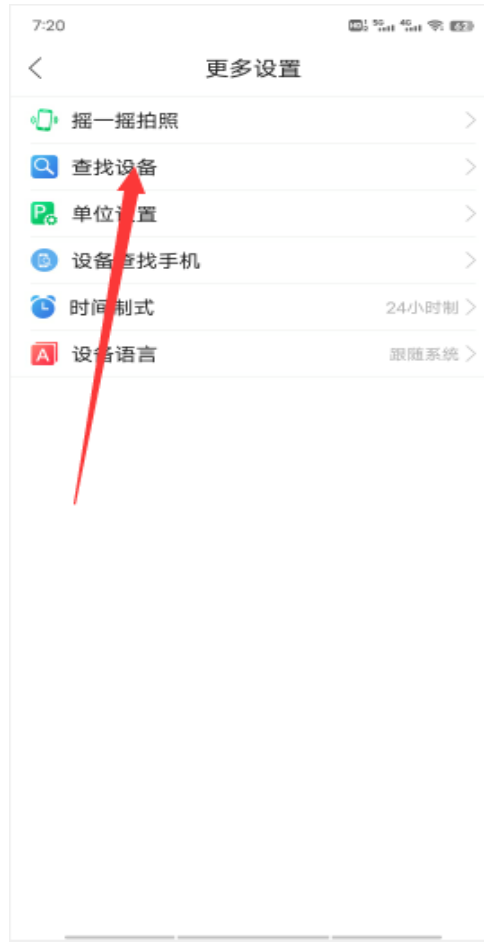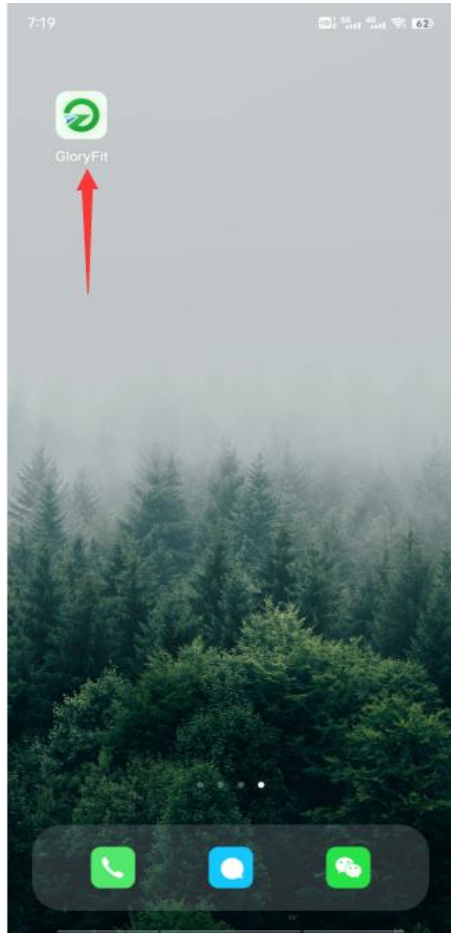



Indoor test: APP search bracelet
straight line test 40m



Prompt note

Hint:

- I. This data only refers to the data generated by the prototype provided by the customer, and does not represent the final mass production status of the customer;
2. Please carefully confirm the description of matching circuit modification and environmental treatment in our report;
- iii. Please provide trial production prototype to our company for secondary verification before mass production; Please inform us in advance of material replacement, software update and environmental treatment.
- Iv. If the customer needs the third party to retest, or send the customer to test, please come to our company for verification before sending the prototype; To prevent the difference between the machine and the test machine;
- V: Our company does not accept the machine data other than our debugging and other dark room test data, but you can refer to it, except the certification dark room. If there is any difference in data, all the reasons will be based on the commissioning machine.



Thank you!

All information contained in this report is copyrighted by our company and should not be distributed to third parties without our permission

Shenzhen Qianmu Communication Technology Co.,Ltd.