



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: Bluetooth Headset

Test Model: S30

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Taylor Hu
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.1 -20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.925	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.839	N/A	Pass
NVNT	1-DH5	2480	Ant1	0.844	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.278	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.279	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.274	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.263	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.28	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.254	N/A	Pass






Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

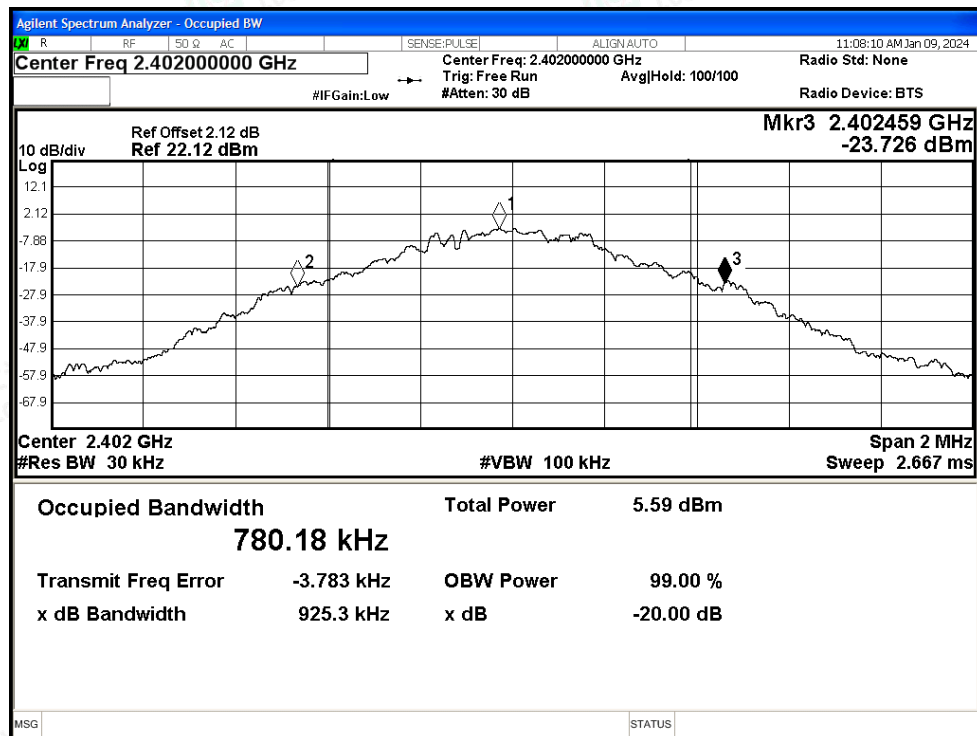


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

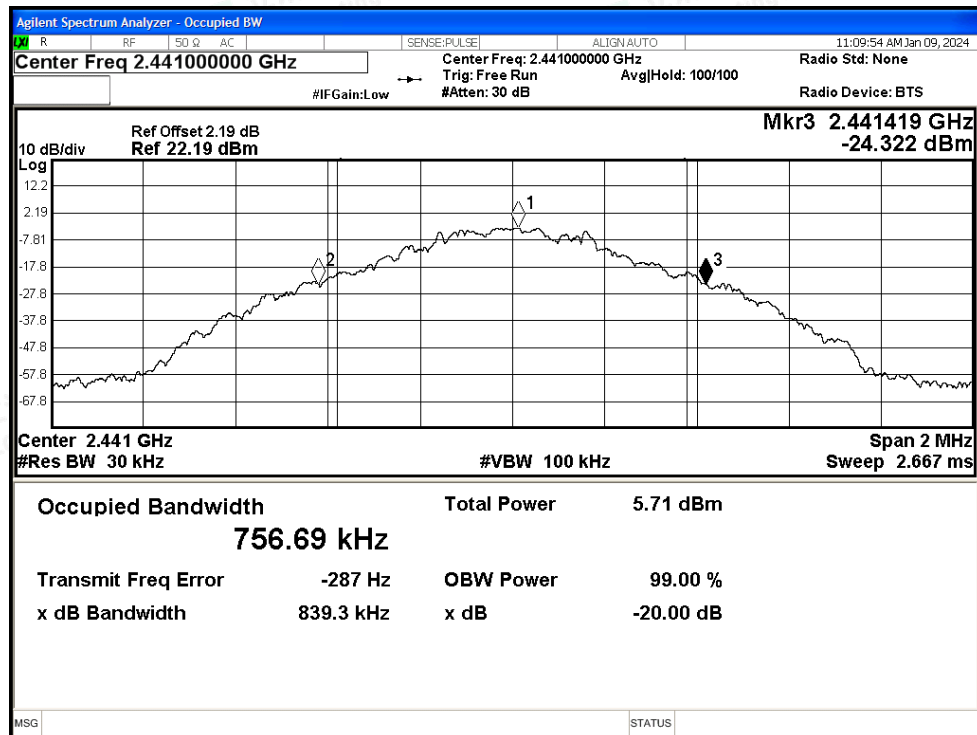




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

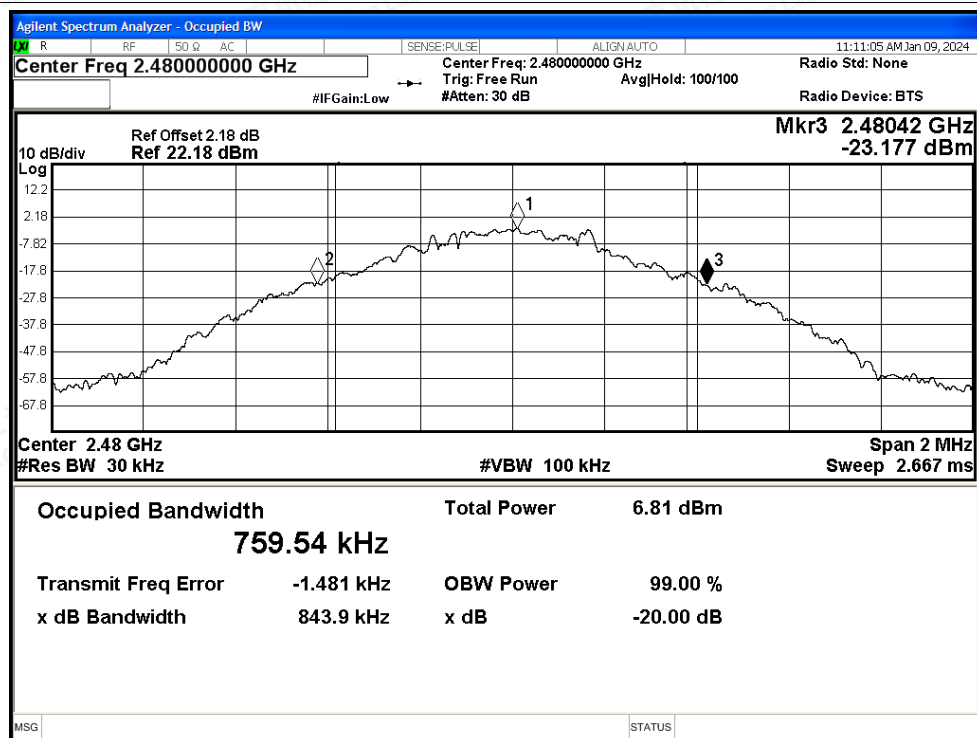


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

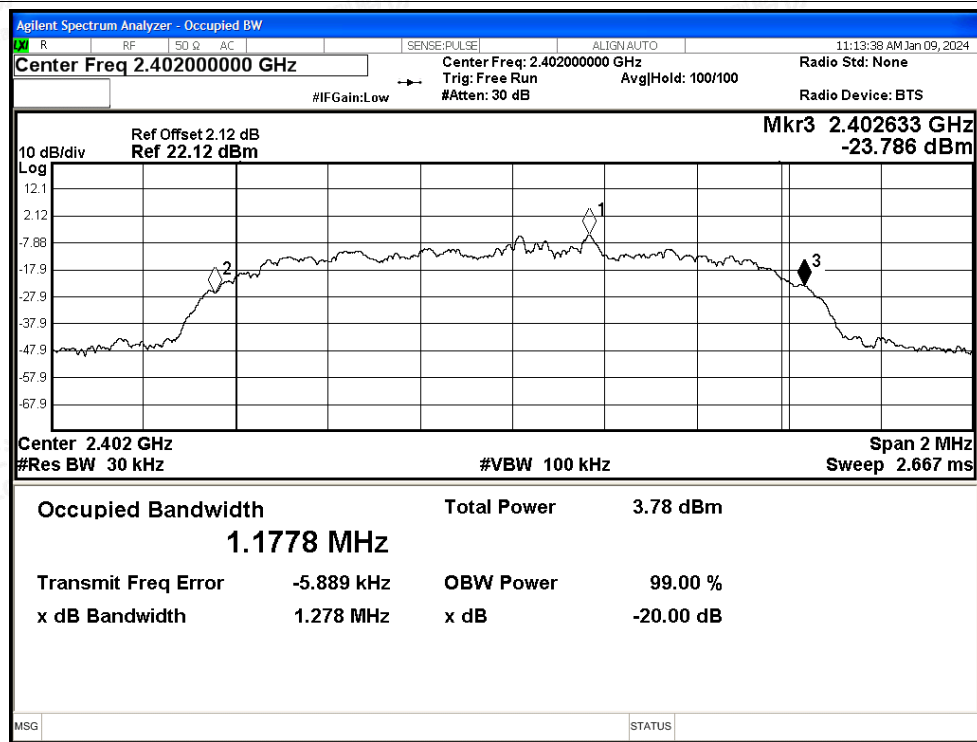




-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

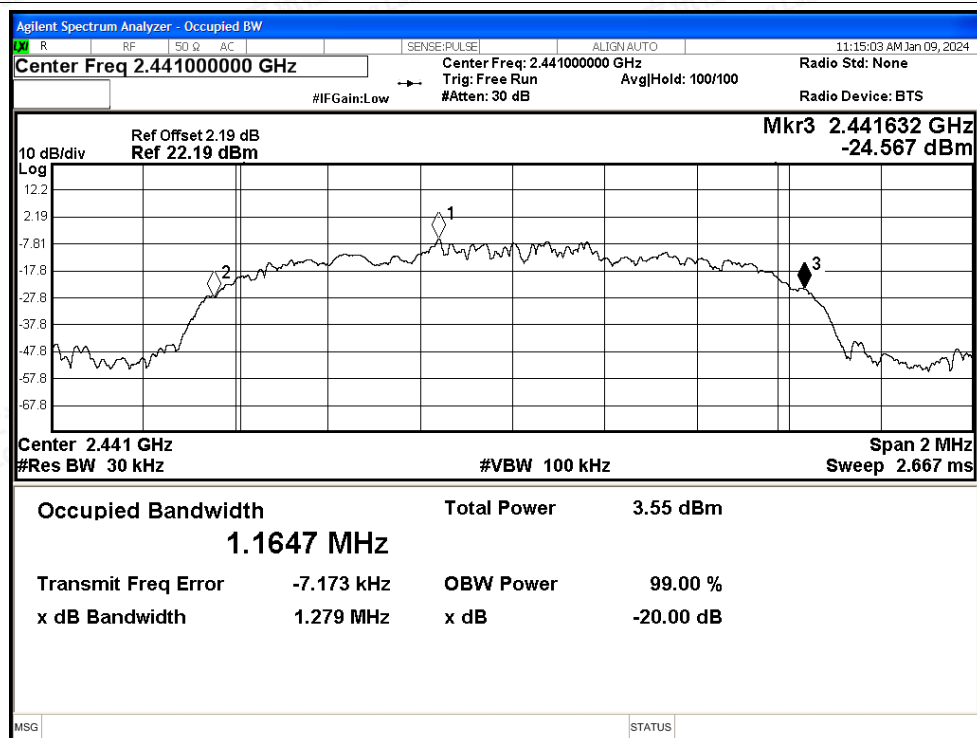


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

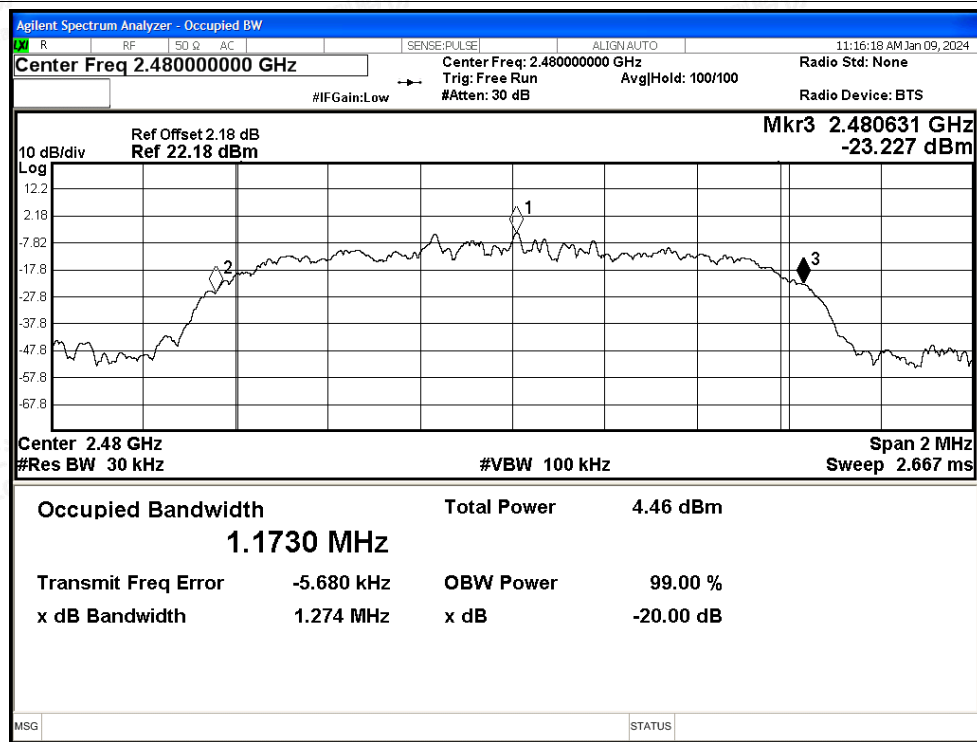




-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

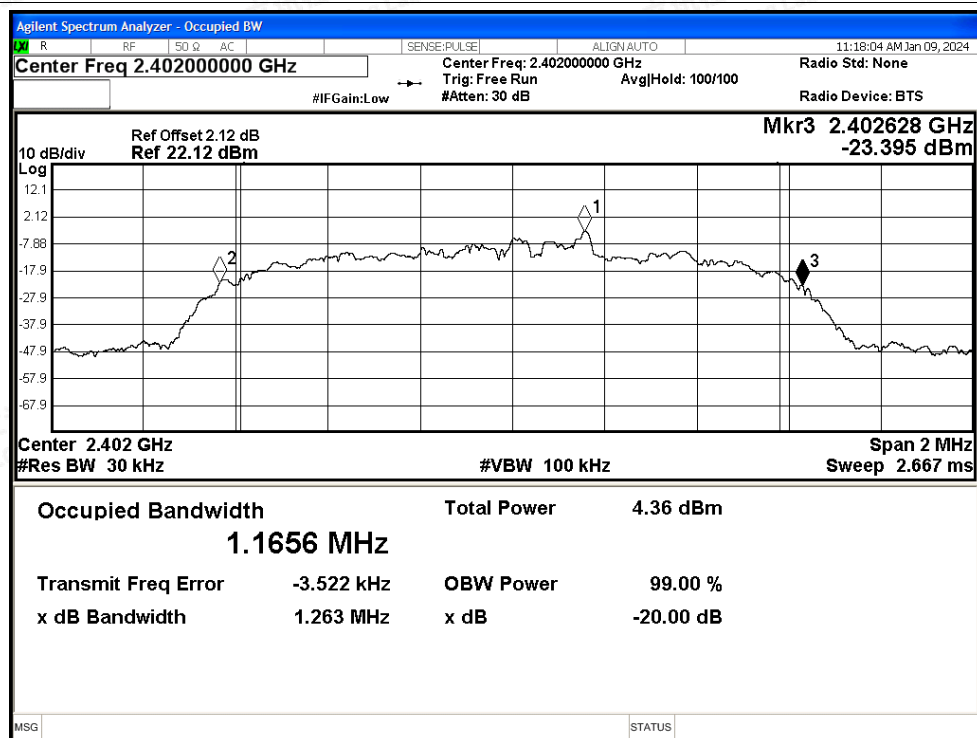


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

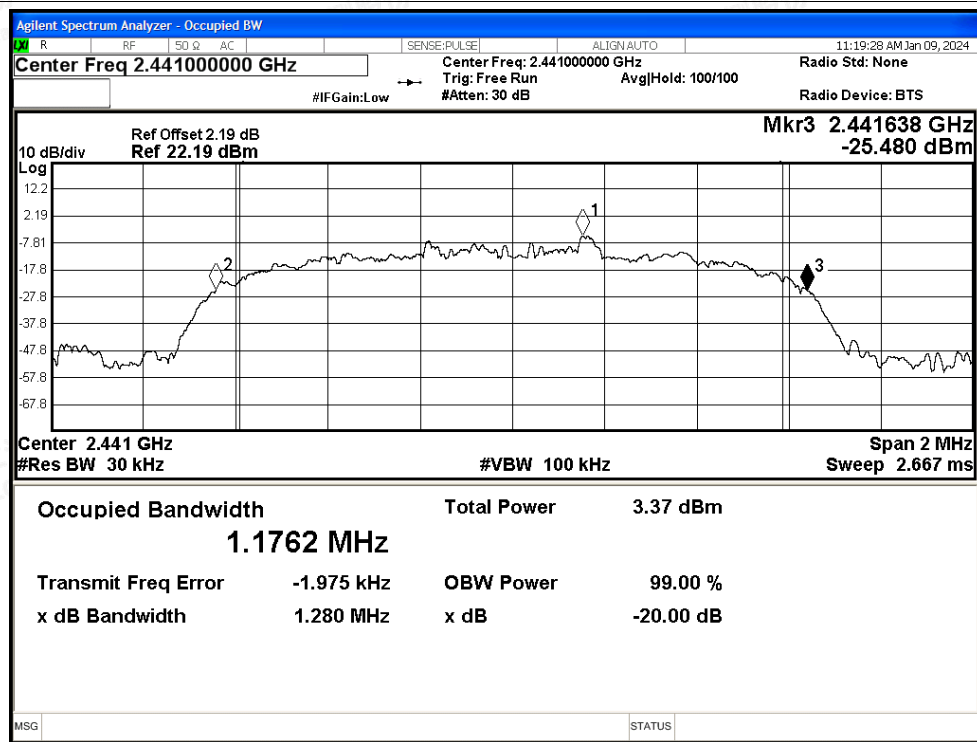



-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

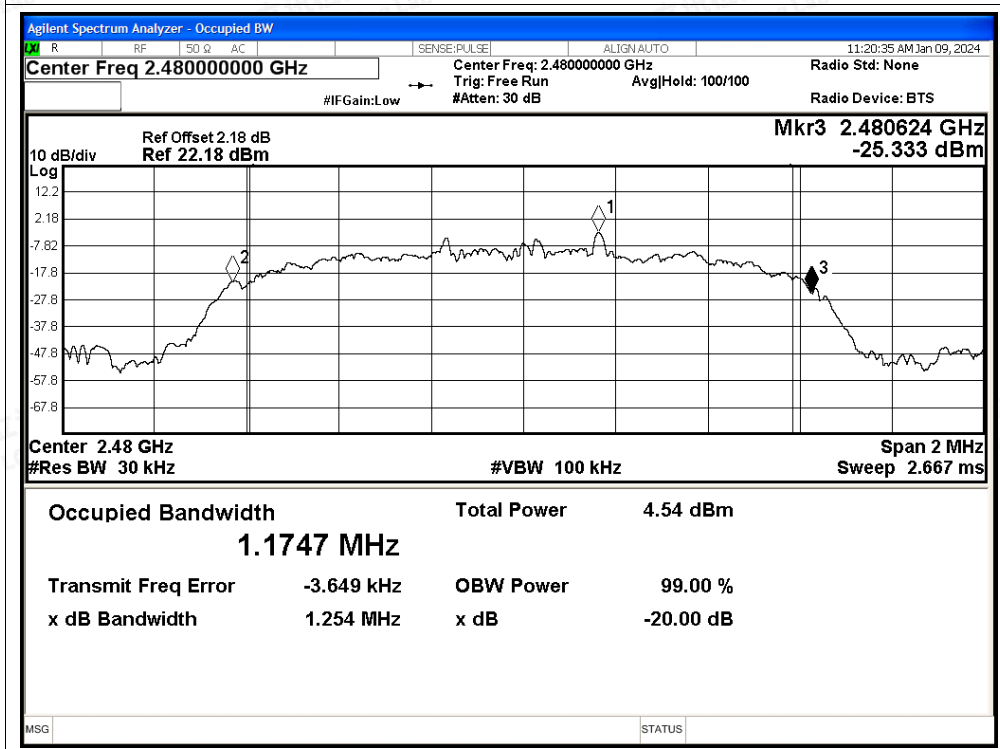



A.2 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-0.06	21	Pass
NVNT	1-DH5	2441	Ant1	-0.49	21	Pass
NVNT	1-DH5	2480	Ant1	0.74	21	Pass
NVNT	2-DH5	2402	Ant1	-0.65	21	Pass
NVNT	2-DH5	2441	Ant1	-1.19	21	Pass
NVNT	2-DH5	2480	Ant1	-0.07	21	Pass
NVNT	3-DH5	2402	Ant1	-0.71	21	Pass
NVNT	3-DH5	2441	Ant1	-1.23	21	Pass
NVNT	3-DH5	2480	Ant1	-0.06	21	Pass






Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

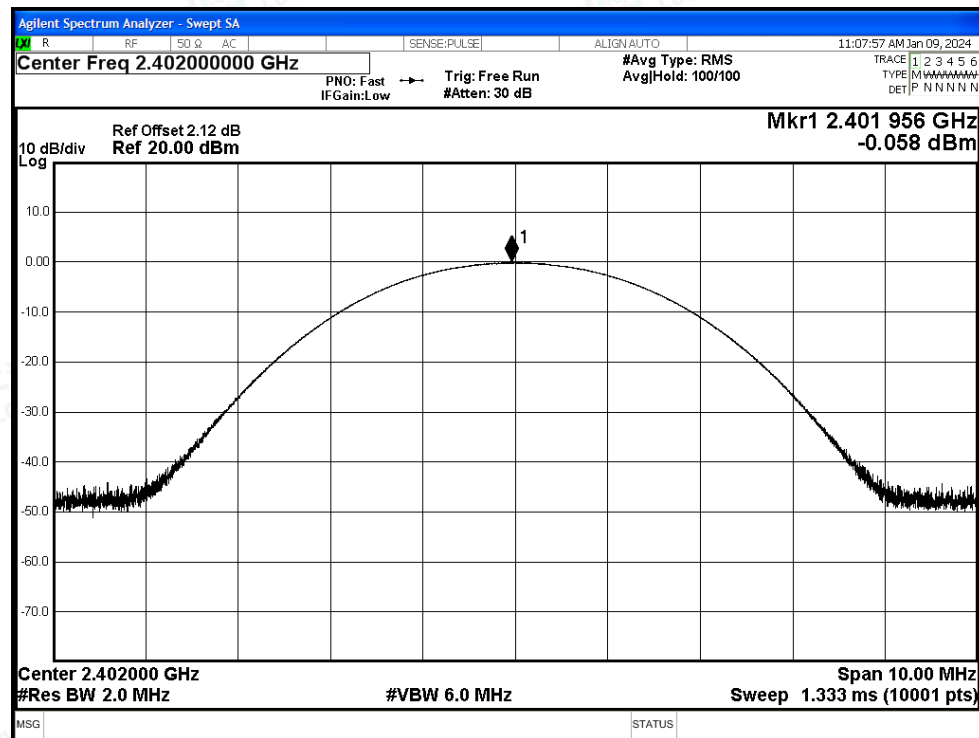


Power NVNT 1-DH5 2441MHz Ant1

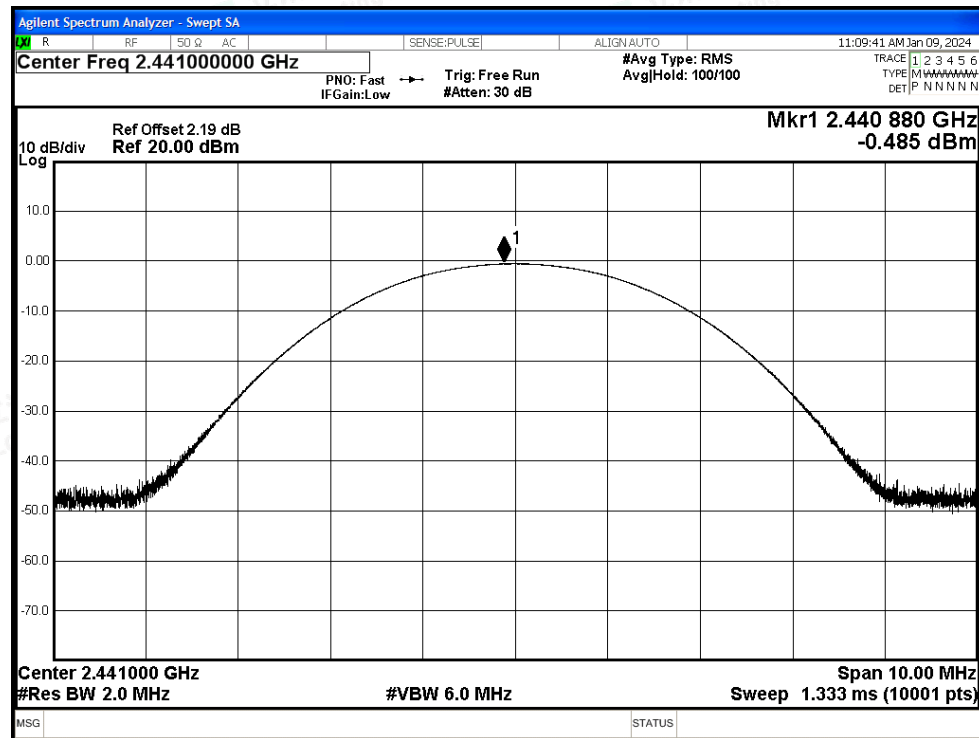




Power NVNT 1-DH5 2480MHz Ant1

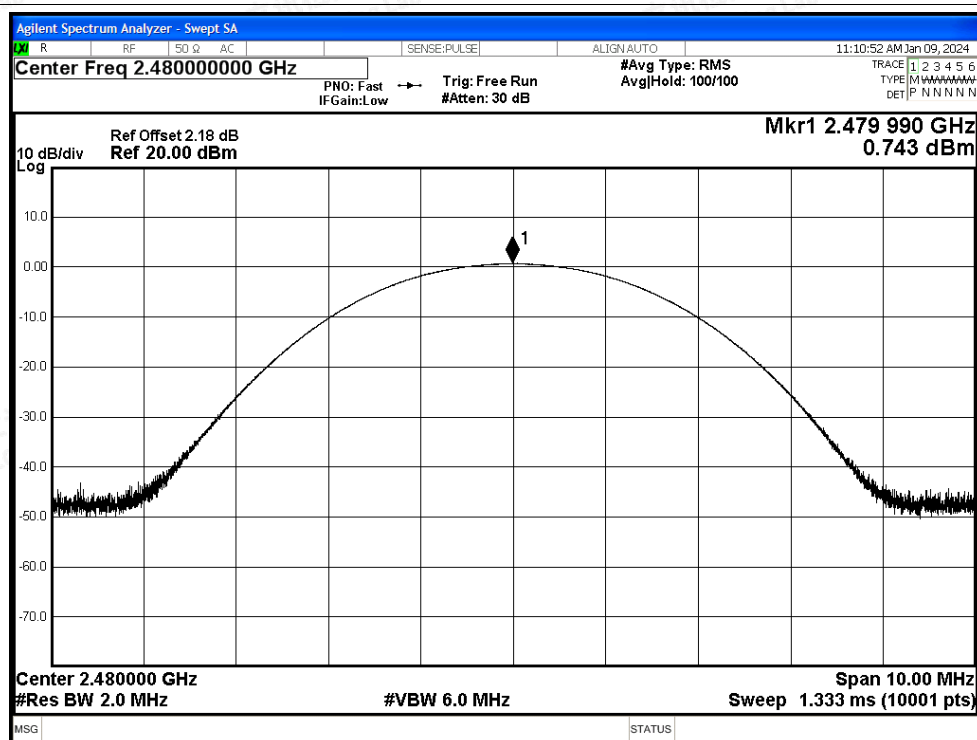


Power NVNT 2-DH5 2402MHz Ant1

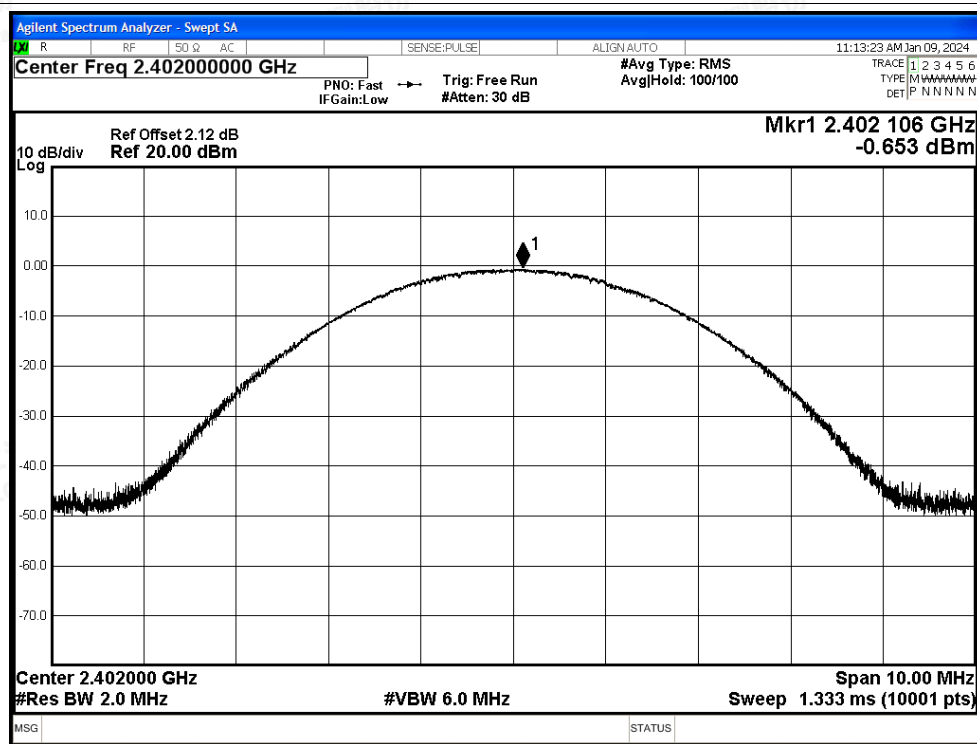




Power NVNT 2-DH5 2441MHz Ant1

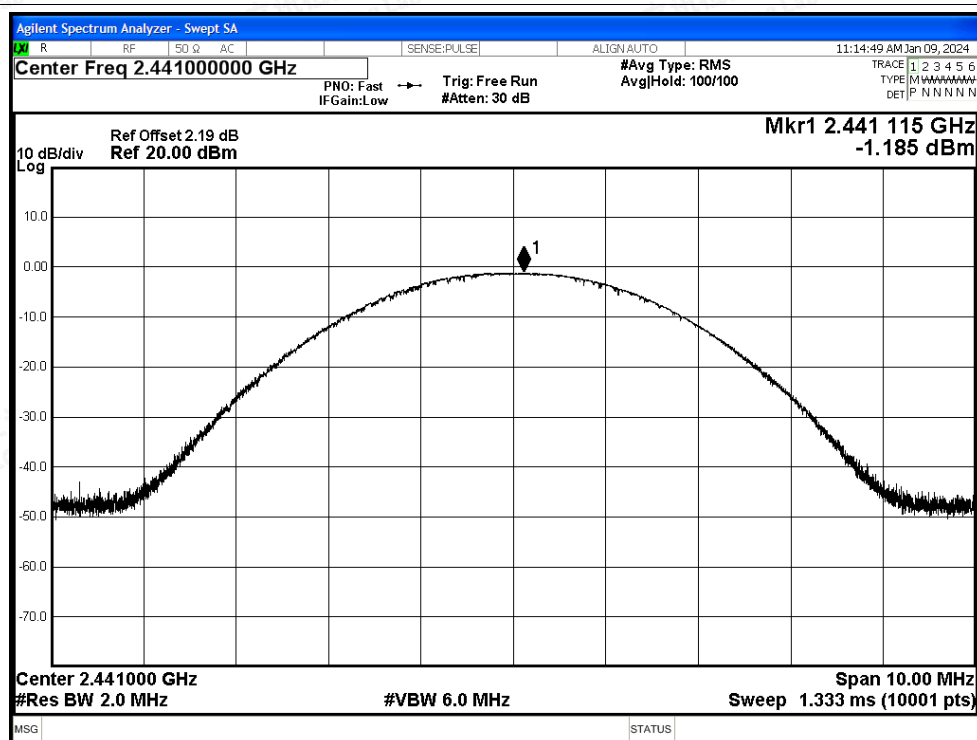


Power NVNT 2-DH5 2480MHz Ant1

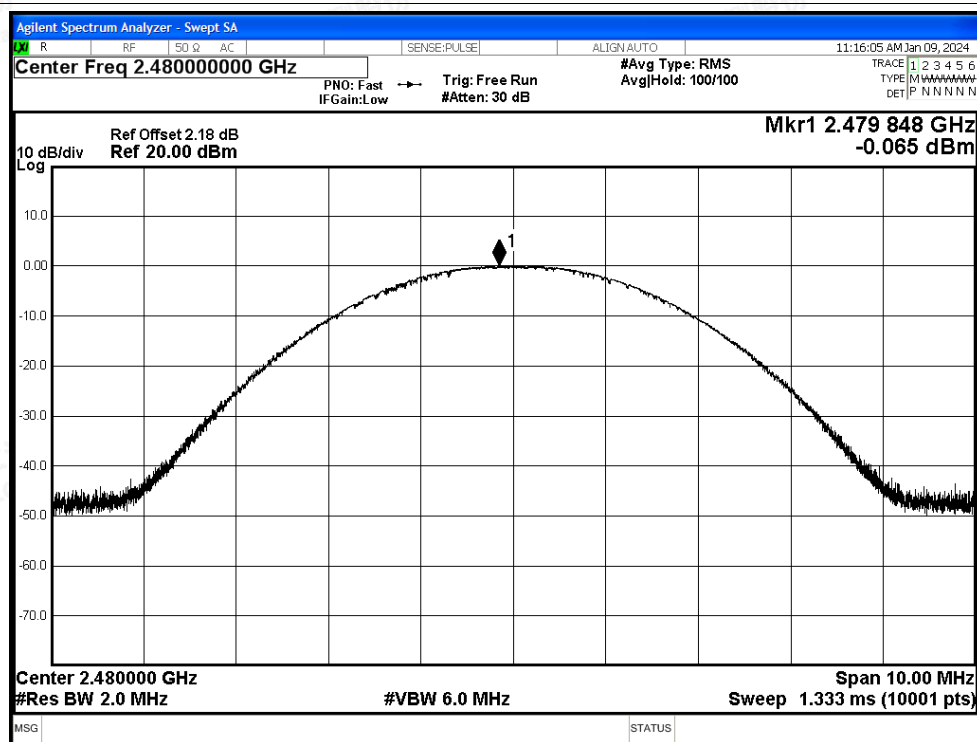





Power NVNT 3-DH5 2402MHz Ant1

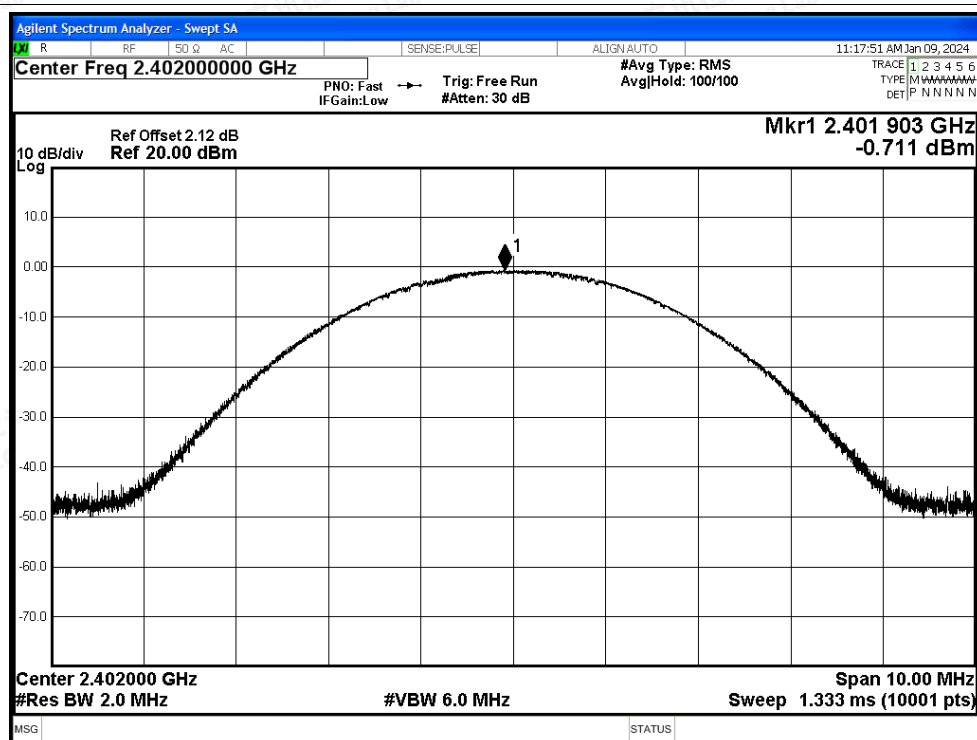

Power NVNT 3-DH5 2441MHz Ant1

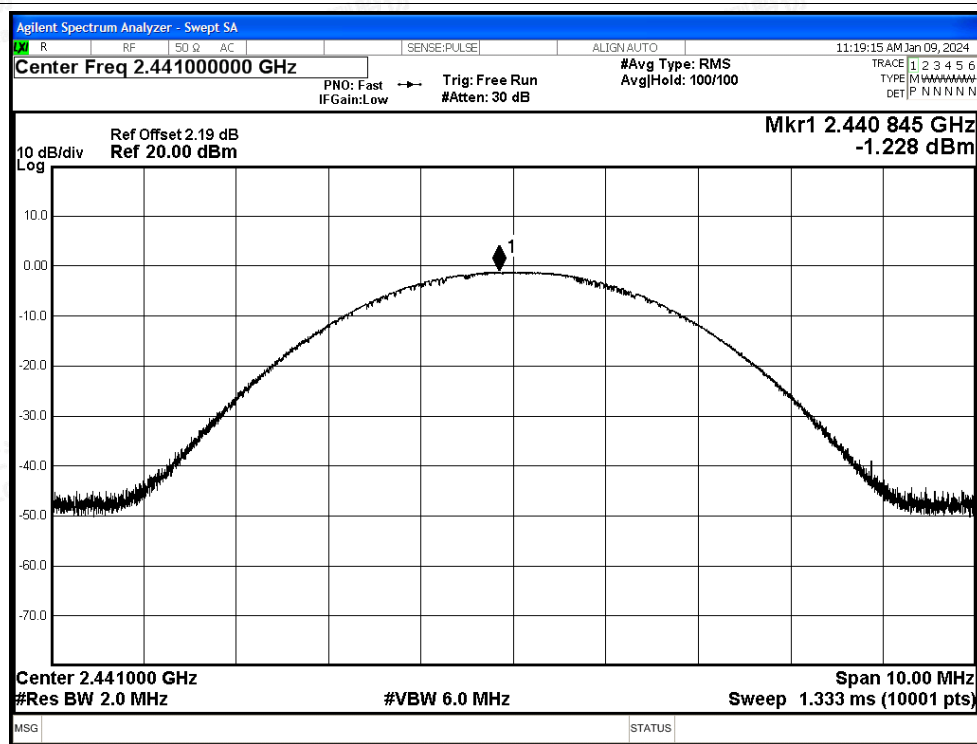

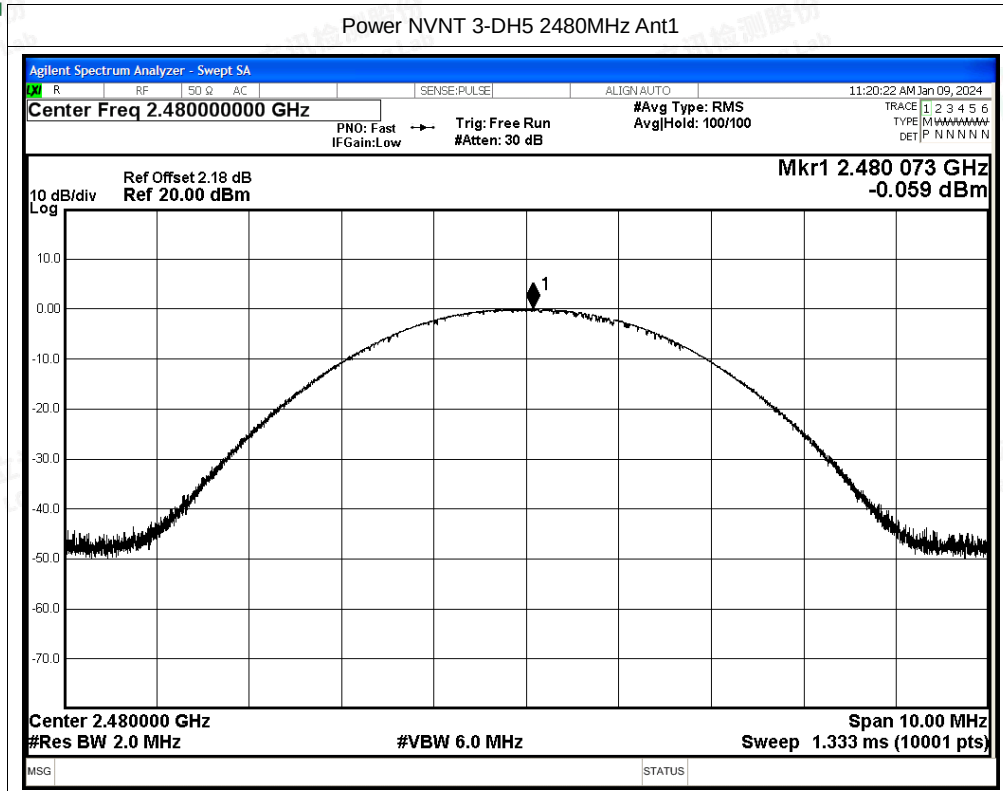



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.158	2402.984	0.826	0.635	Pass
NVNT	2-DH5	Ant1	2402.16	2403.16	1	0.853	Pass
NVNT	3-DH5	Ant1	2401.952	2403.03	1.078	0.853	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

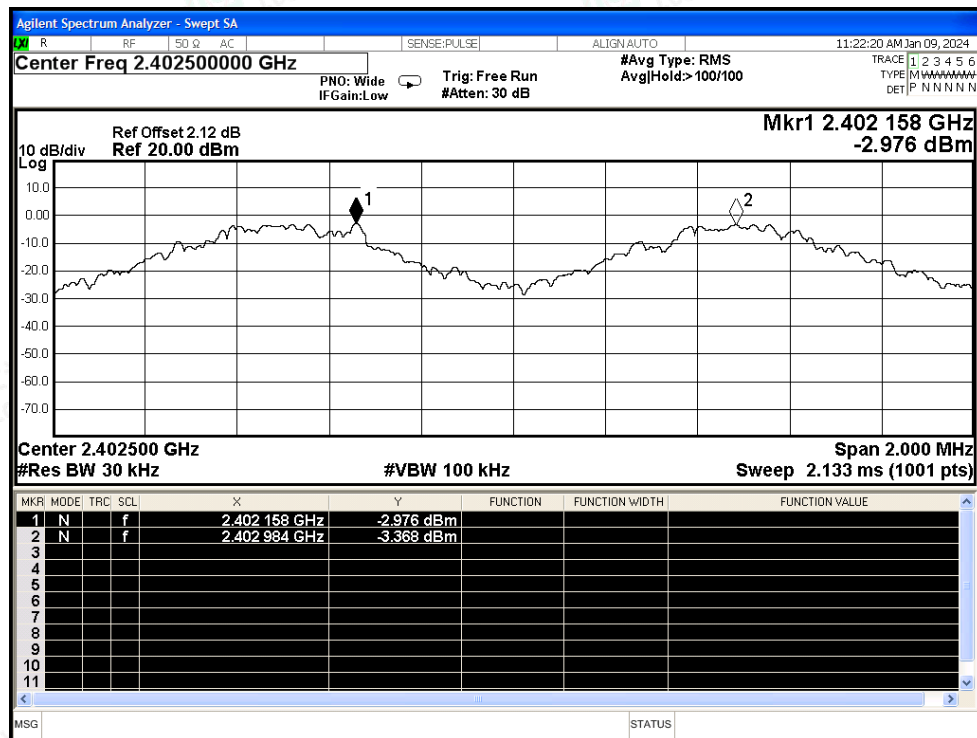


CFS NVNT 2-DH5 2402MHz Ant1

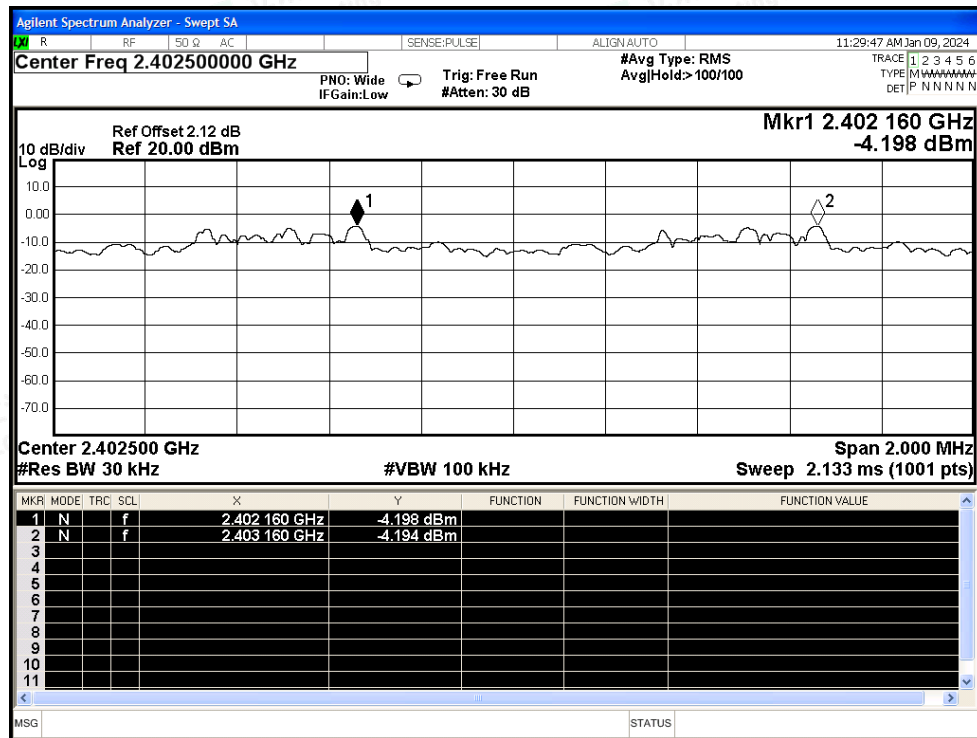



CFS NVNT 3-DH5 2402MHz Ant1

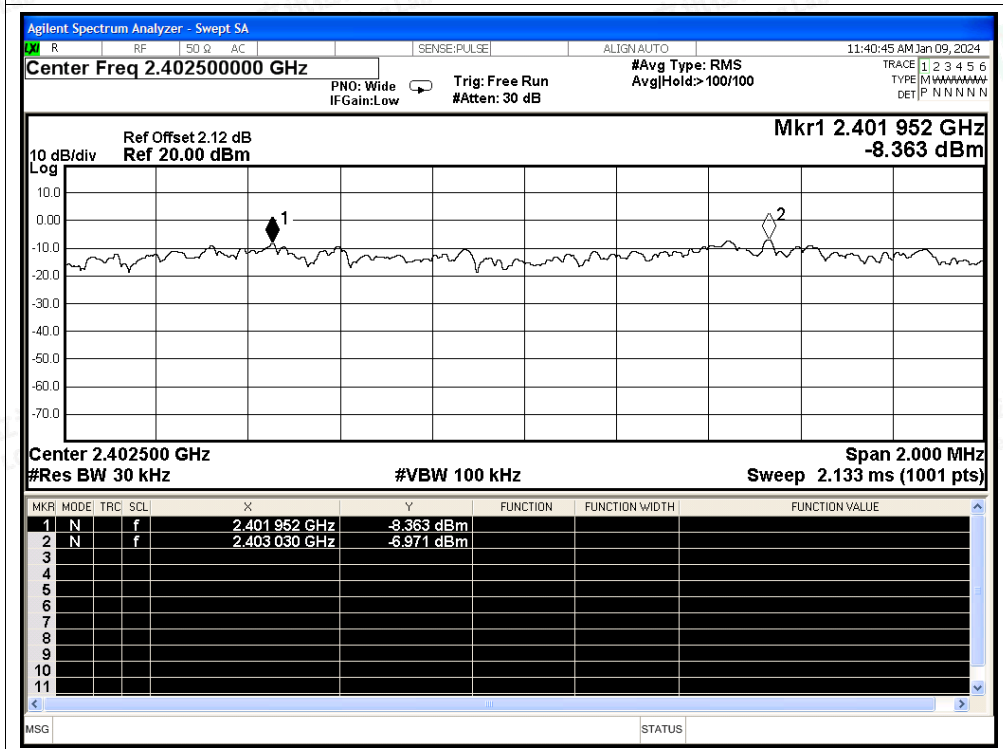

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.881	319.791	111	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.885	250.995	87	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.888	311.904	108	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

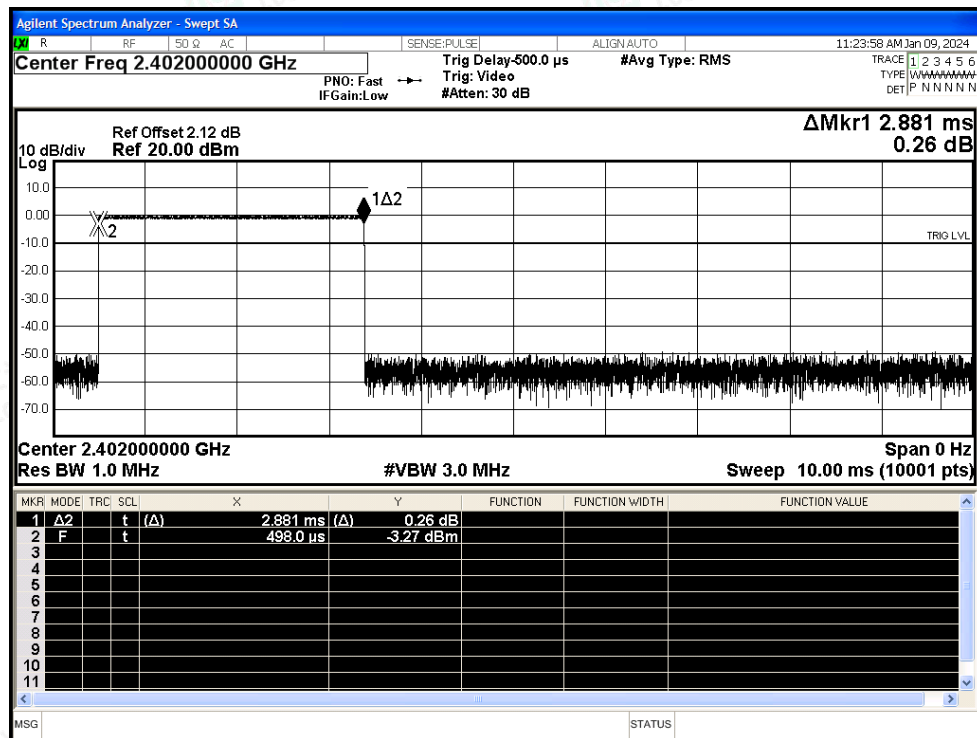

Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

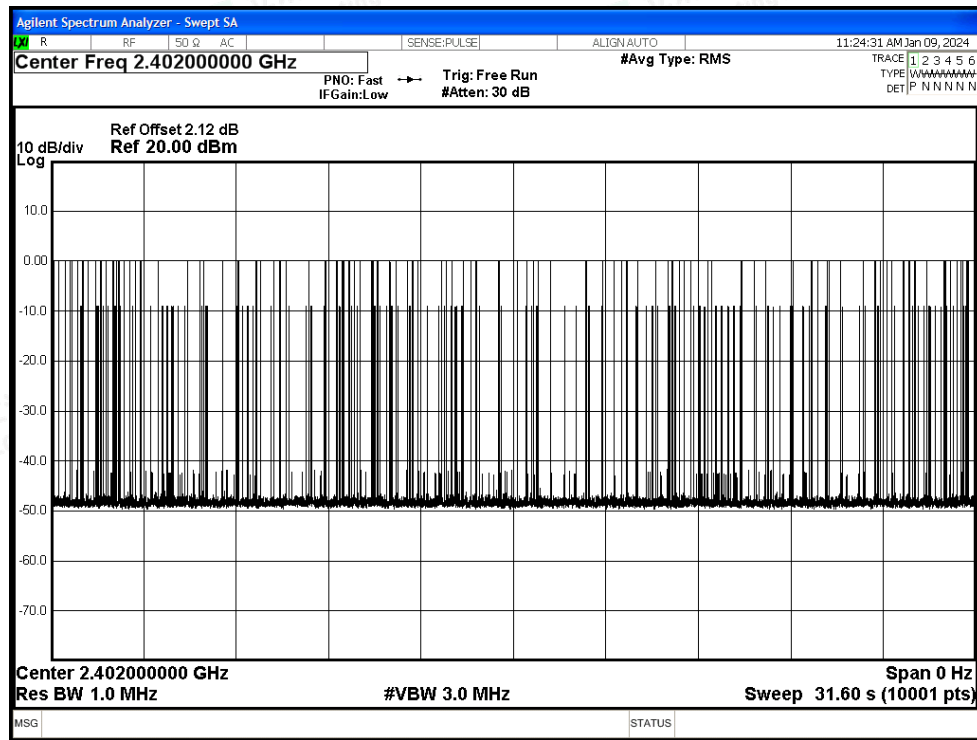

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

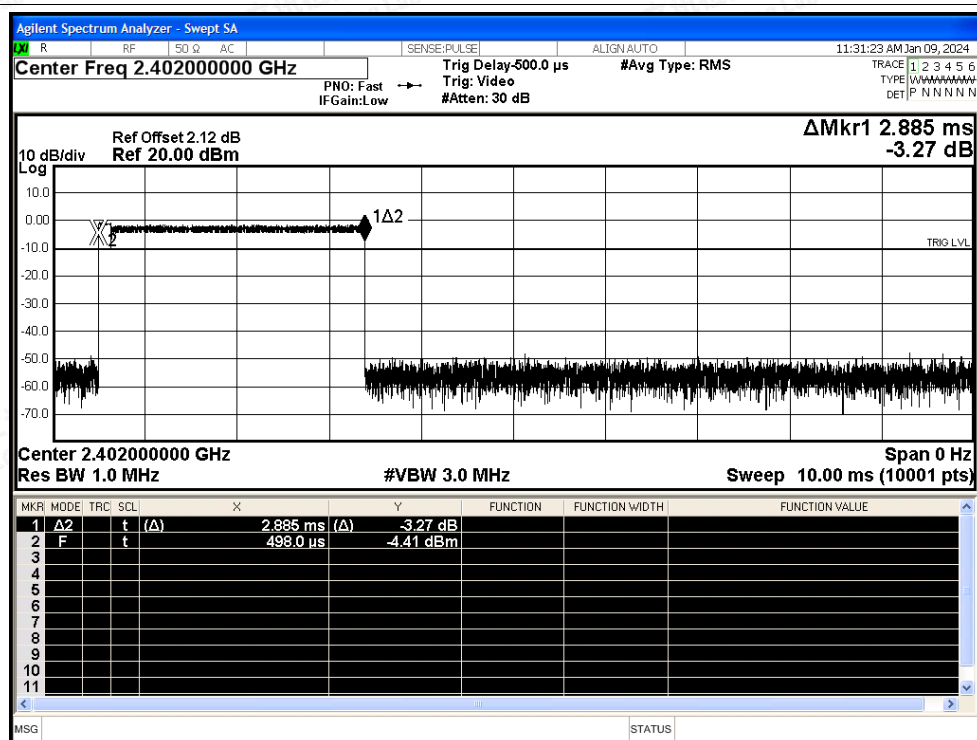


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

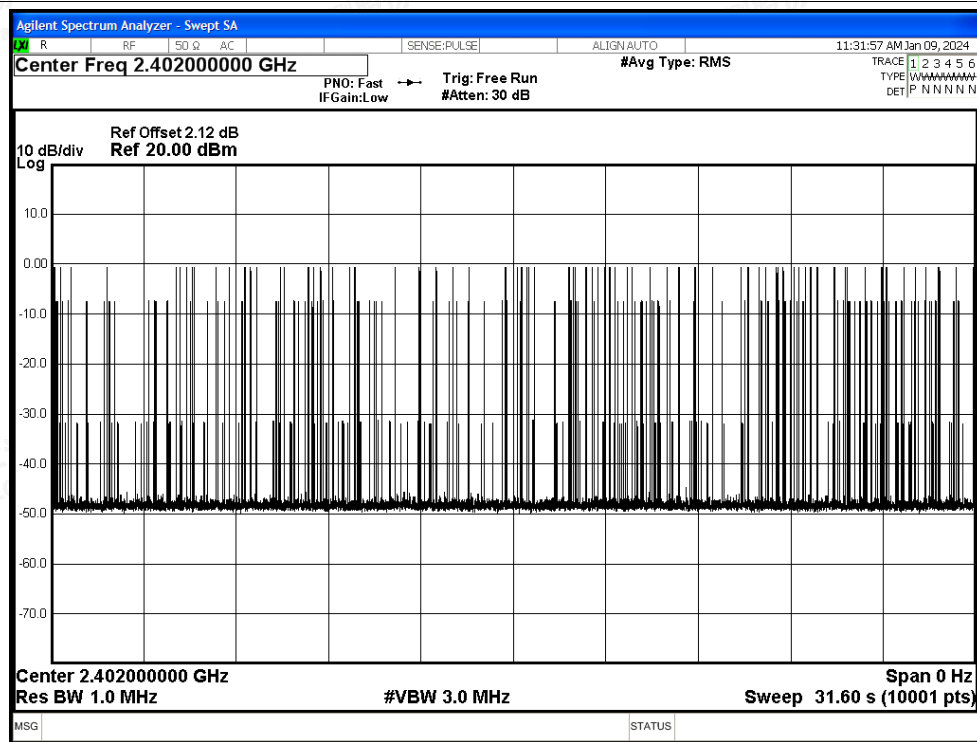




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

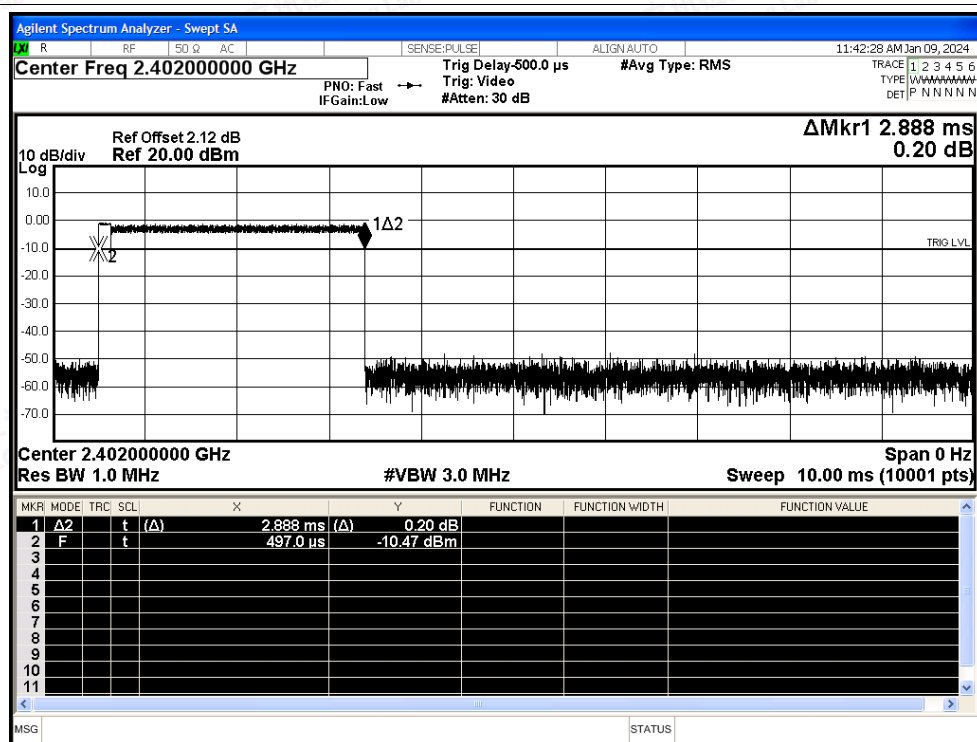

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

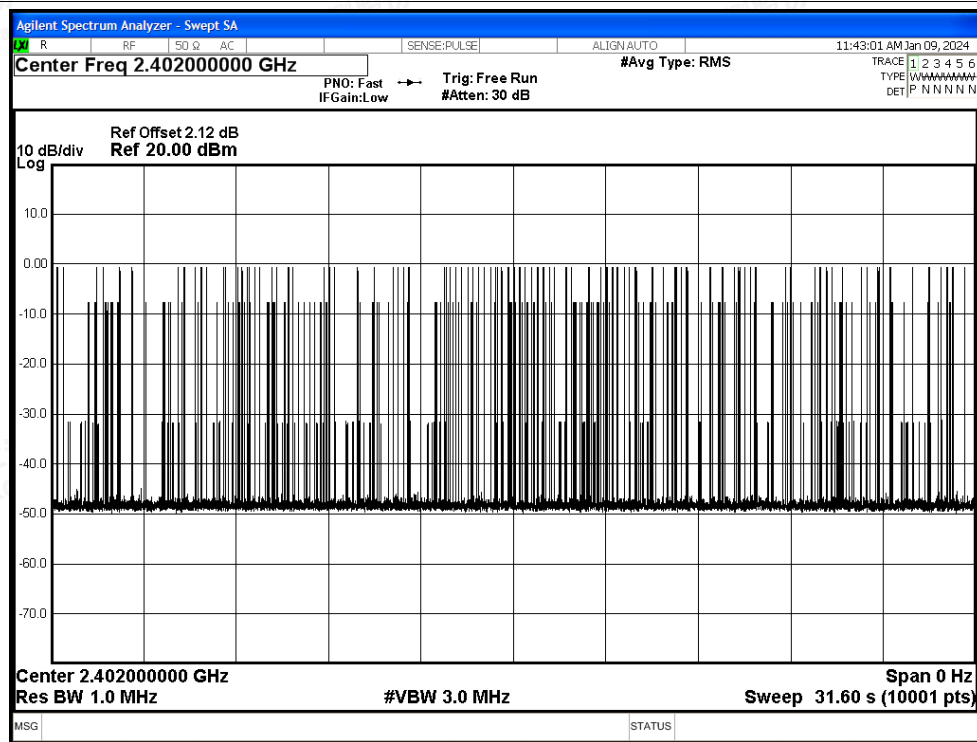



A.5 Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass






Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

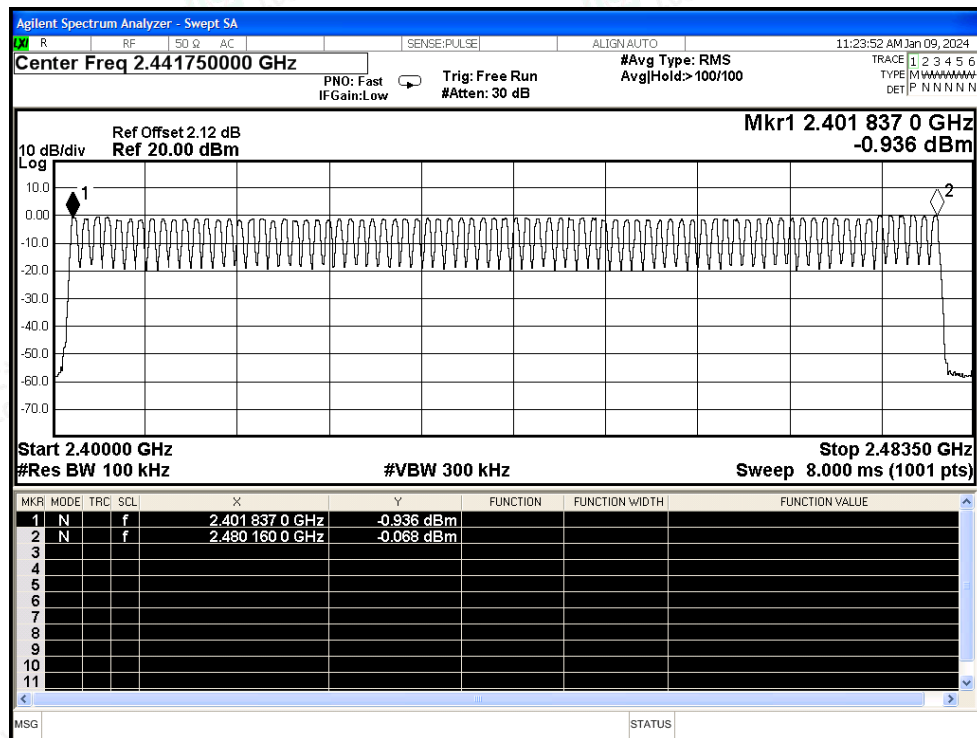


Hopping No. NVNT 2-DH5 2402MHz Ant1

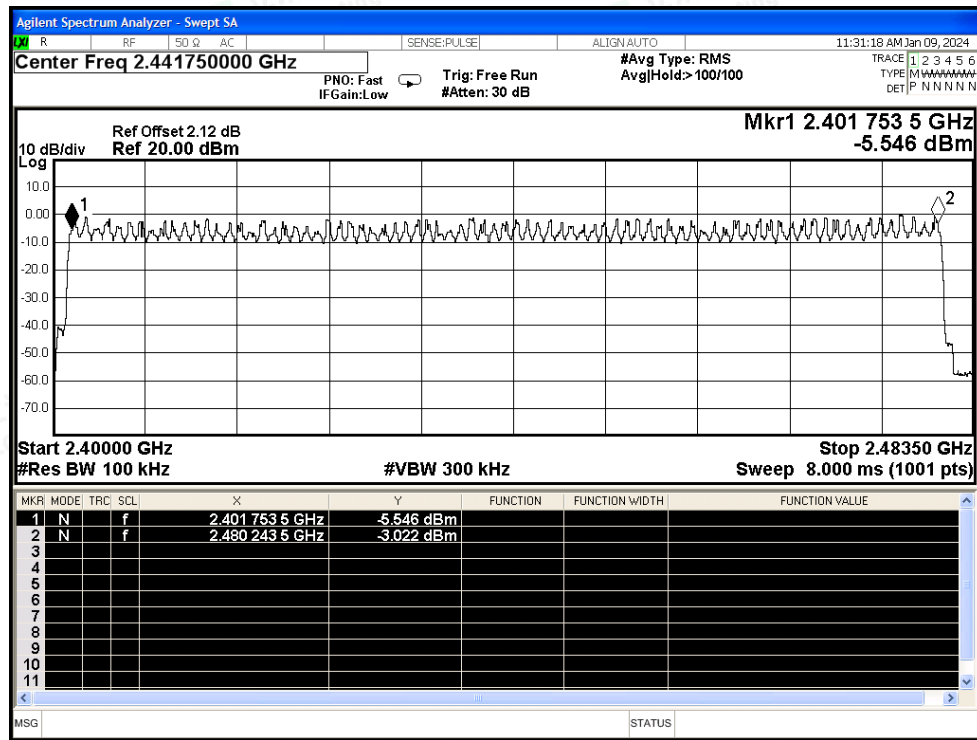



Hopping No. NVNT 3-DH5 2402MHz Ant1

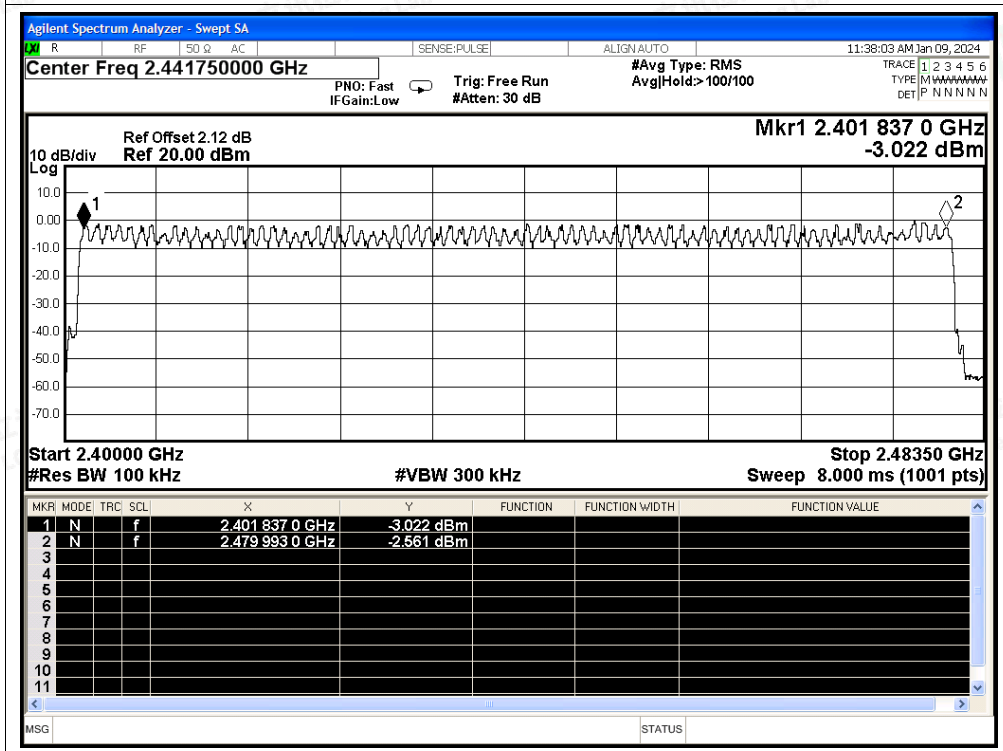



A.6 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-56.06	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-57.03	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-54.19	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-54.3	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-54.37	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-57.07	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

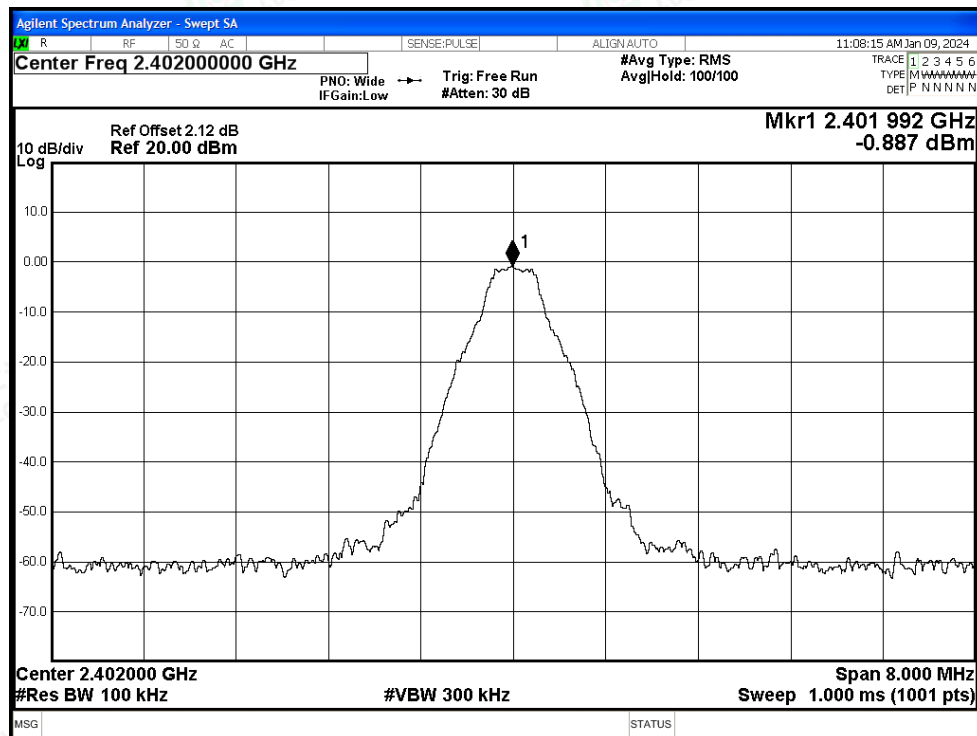


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

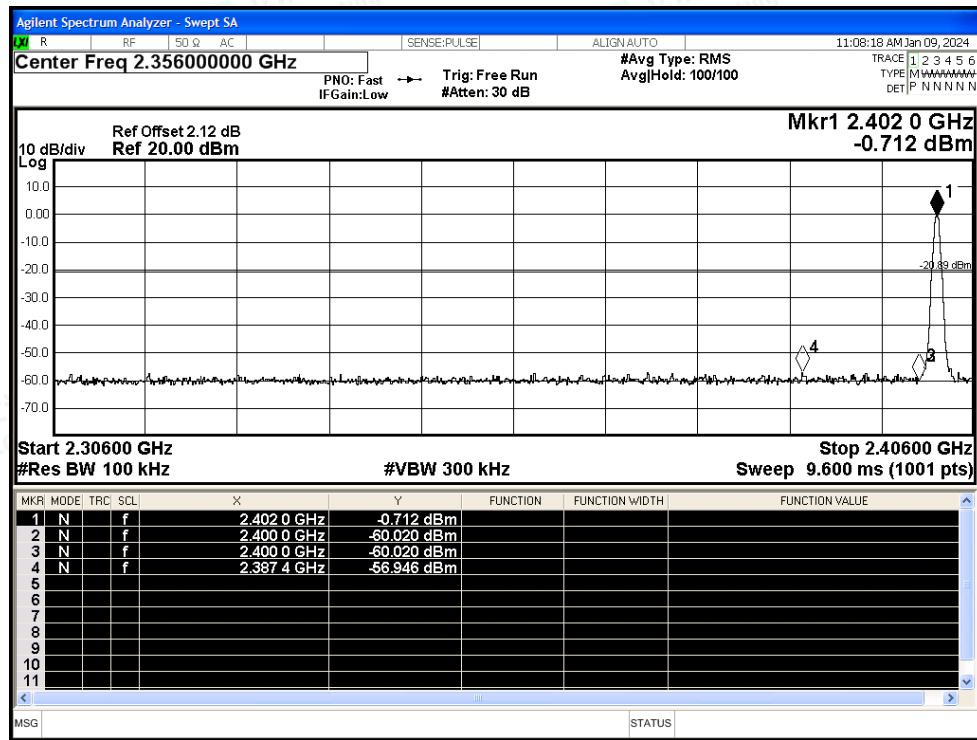




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

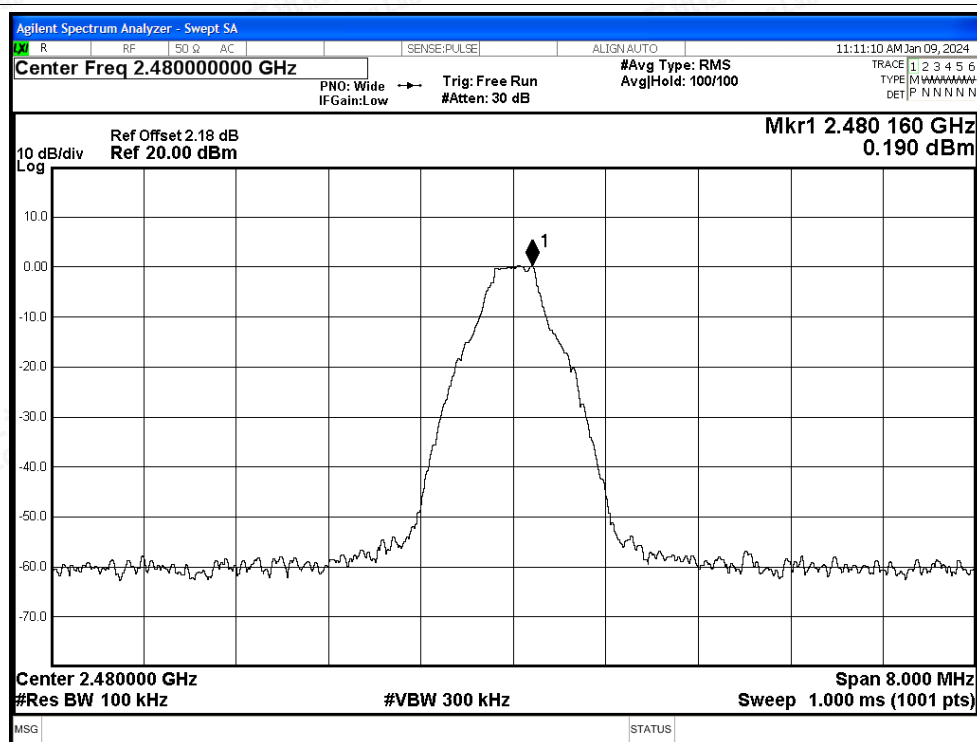


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

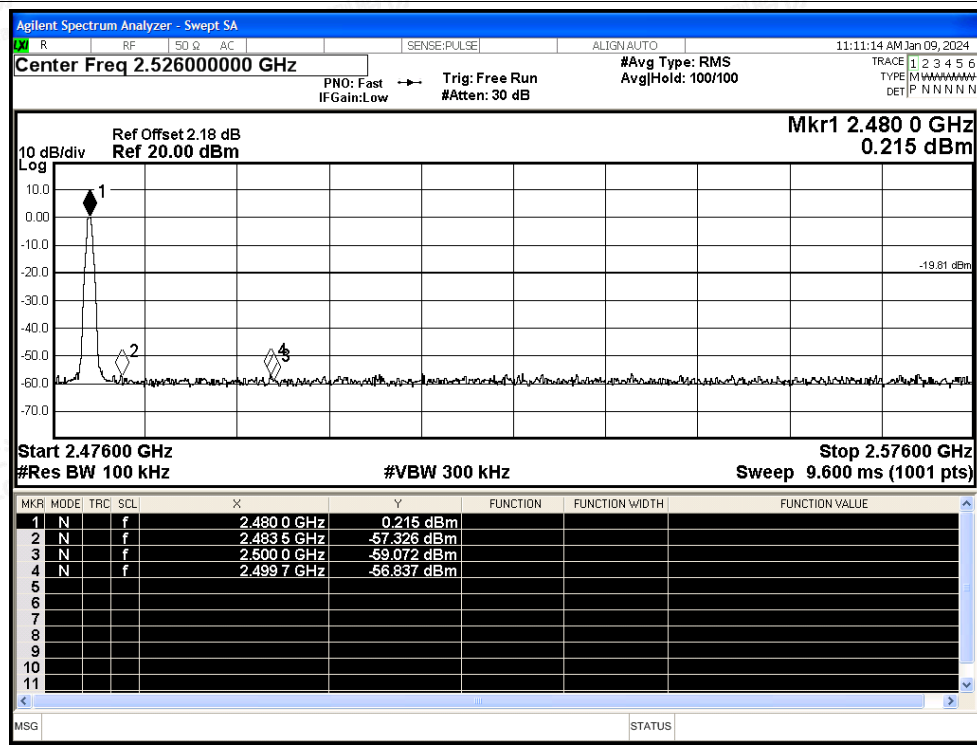




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

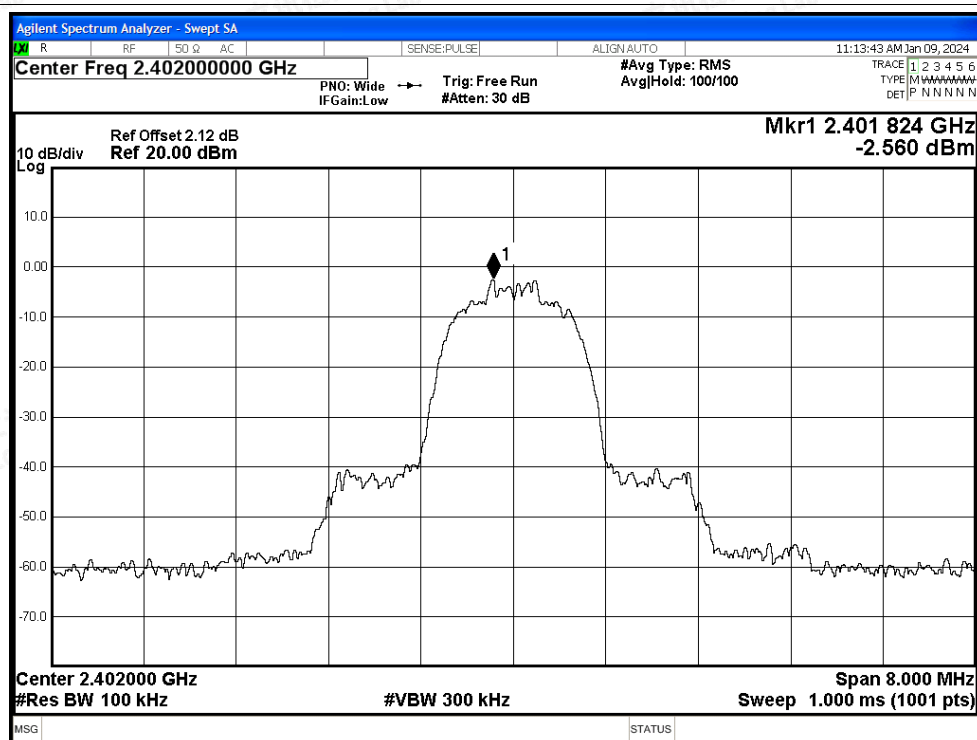


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

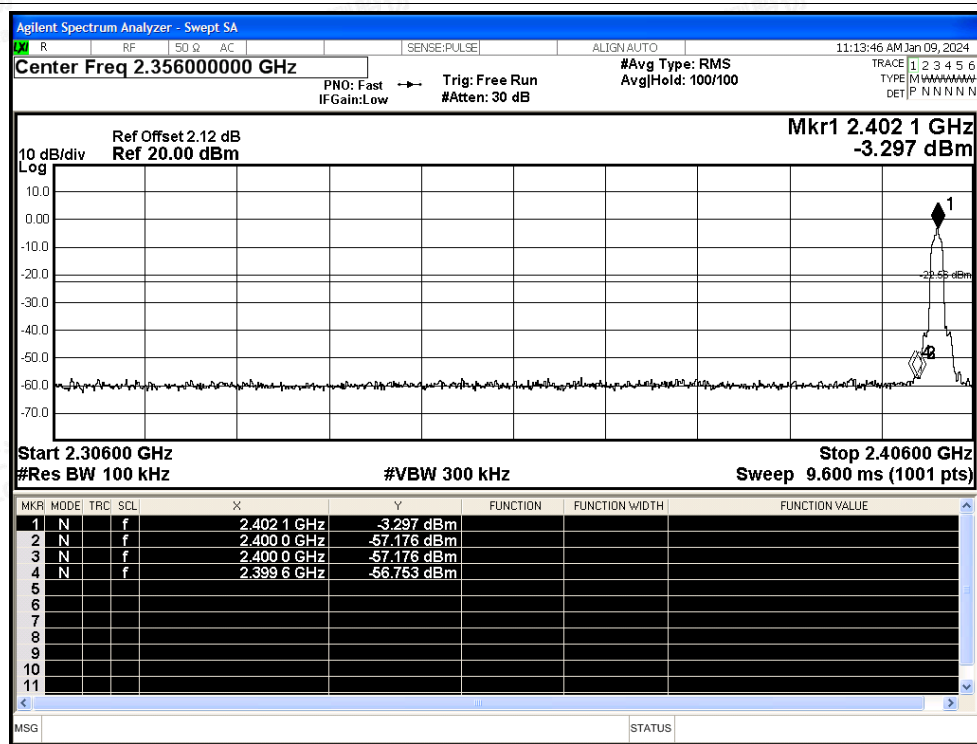




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

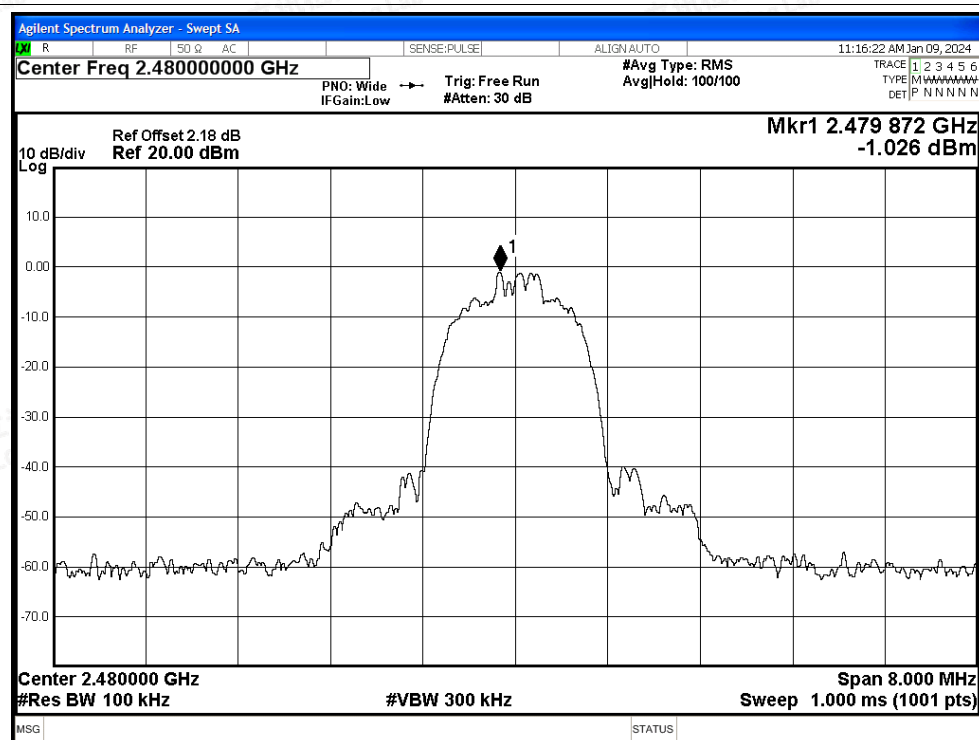


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

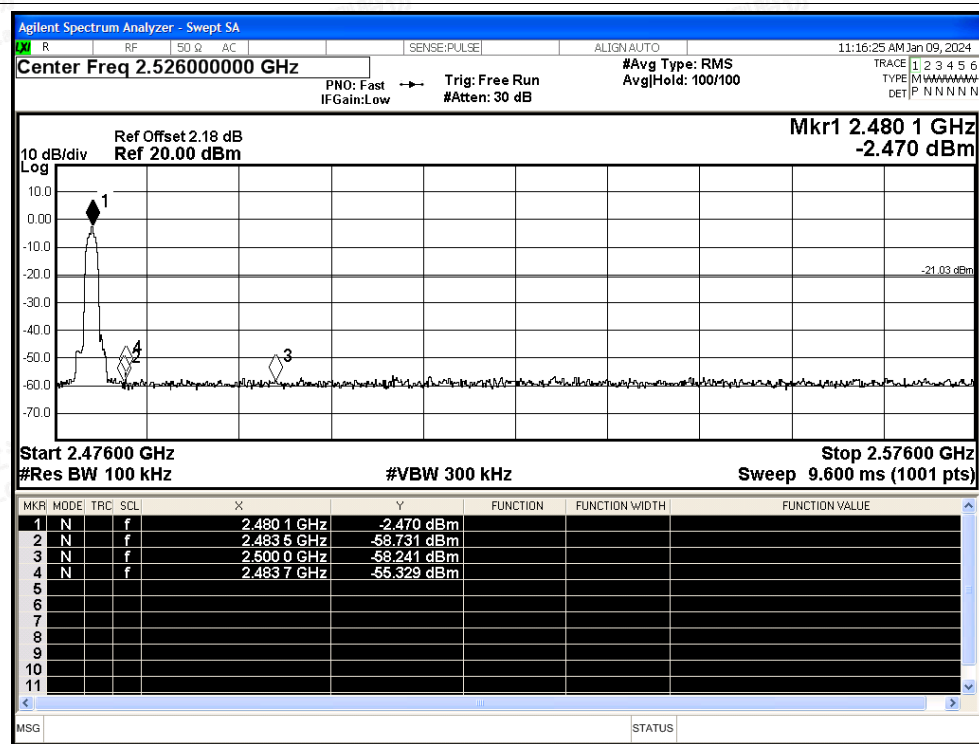




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

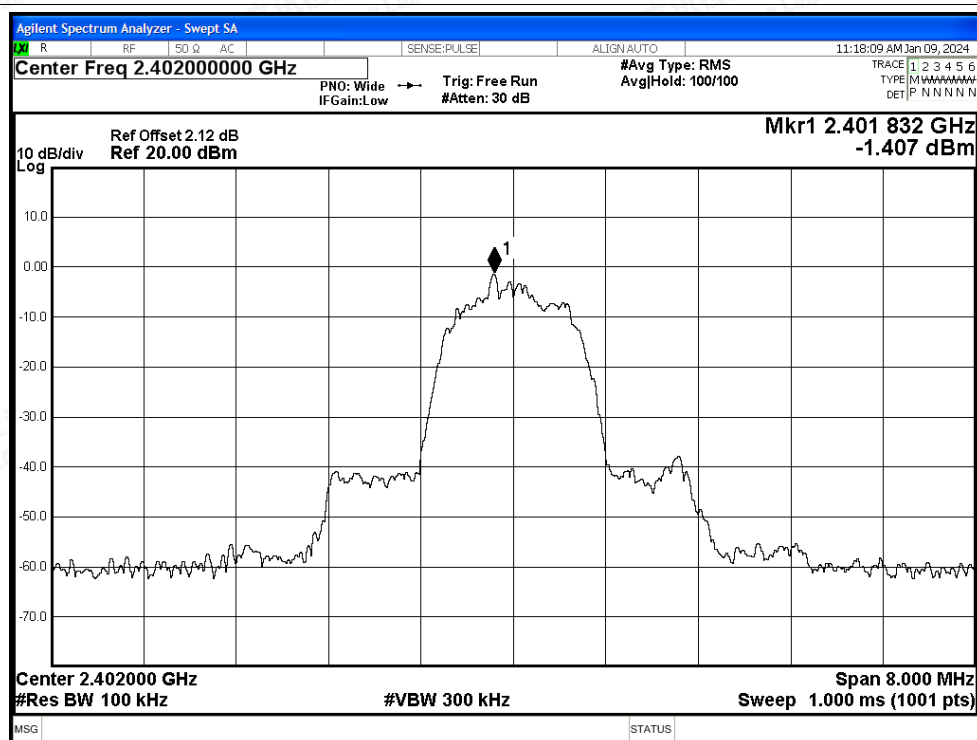


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

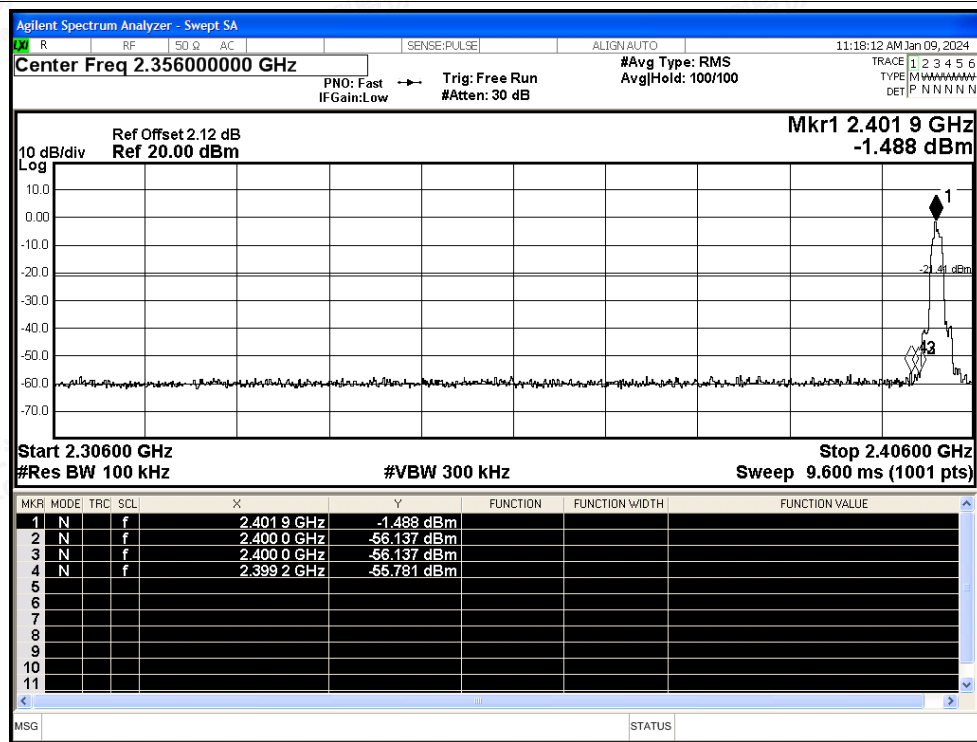




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

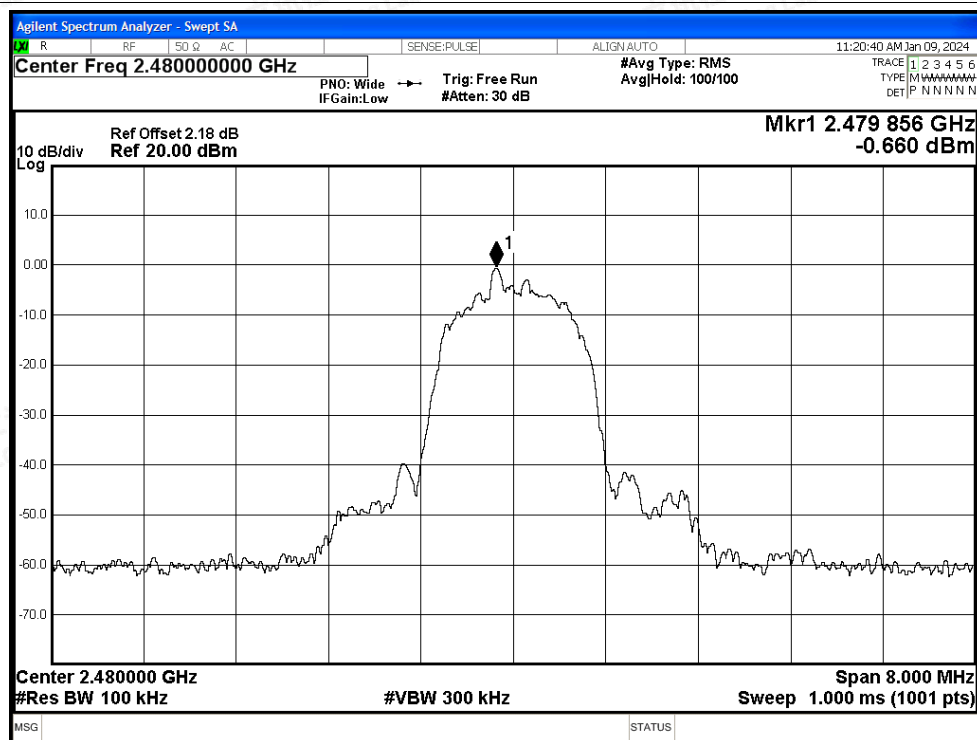

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

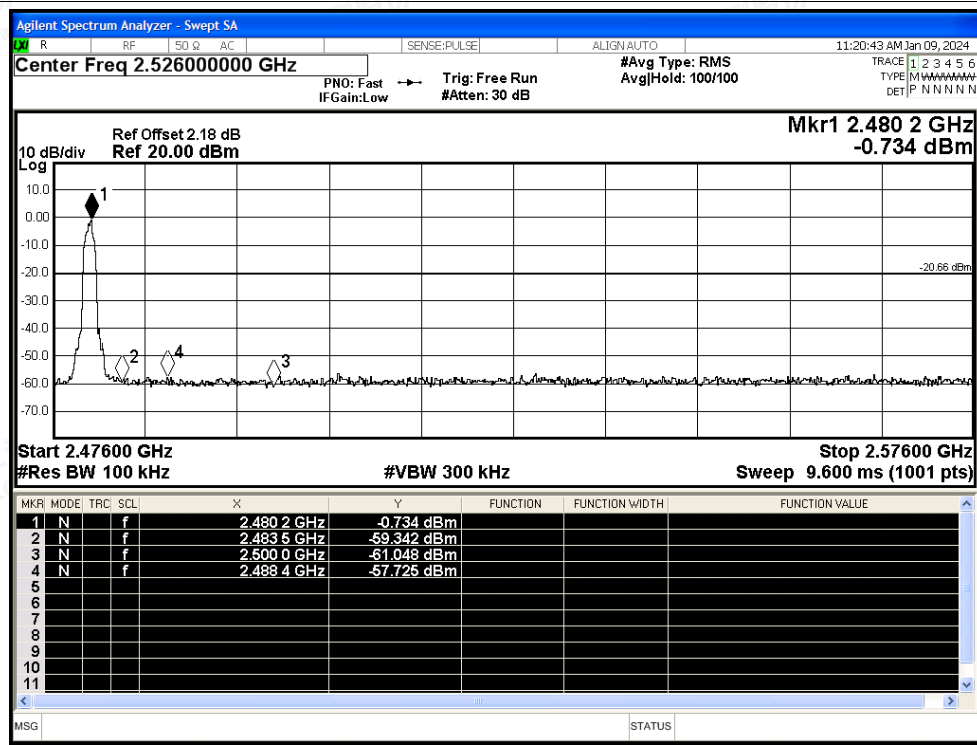

**(Hopping)**

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-55.14	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-56.63	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-50.74	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-54.87	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-54.27	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.83	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen,
518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

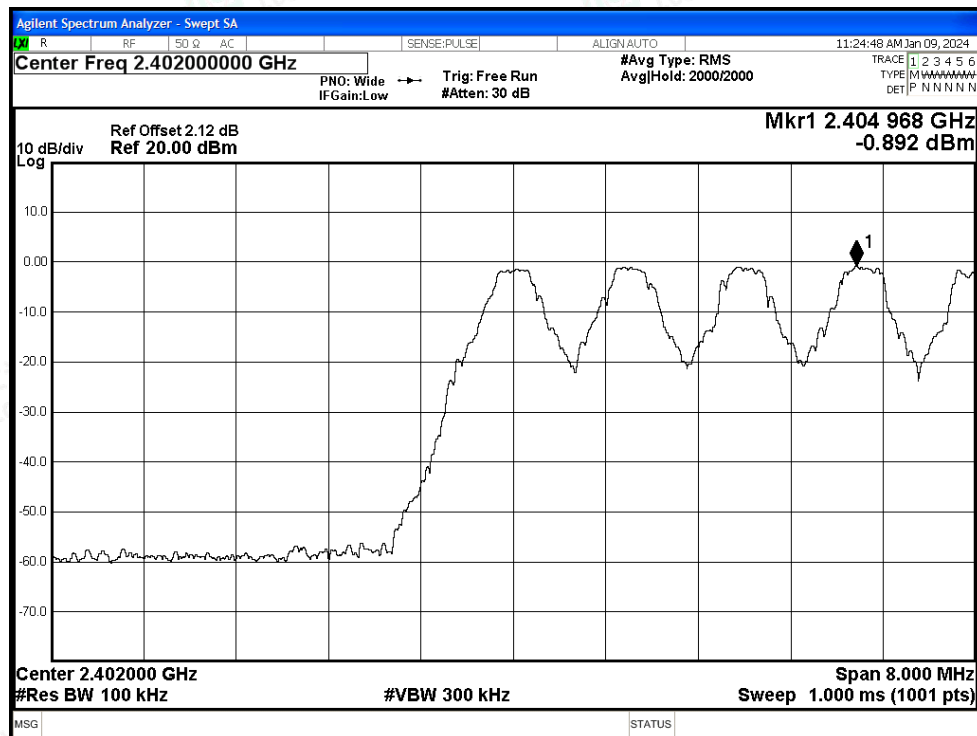


Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

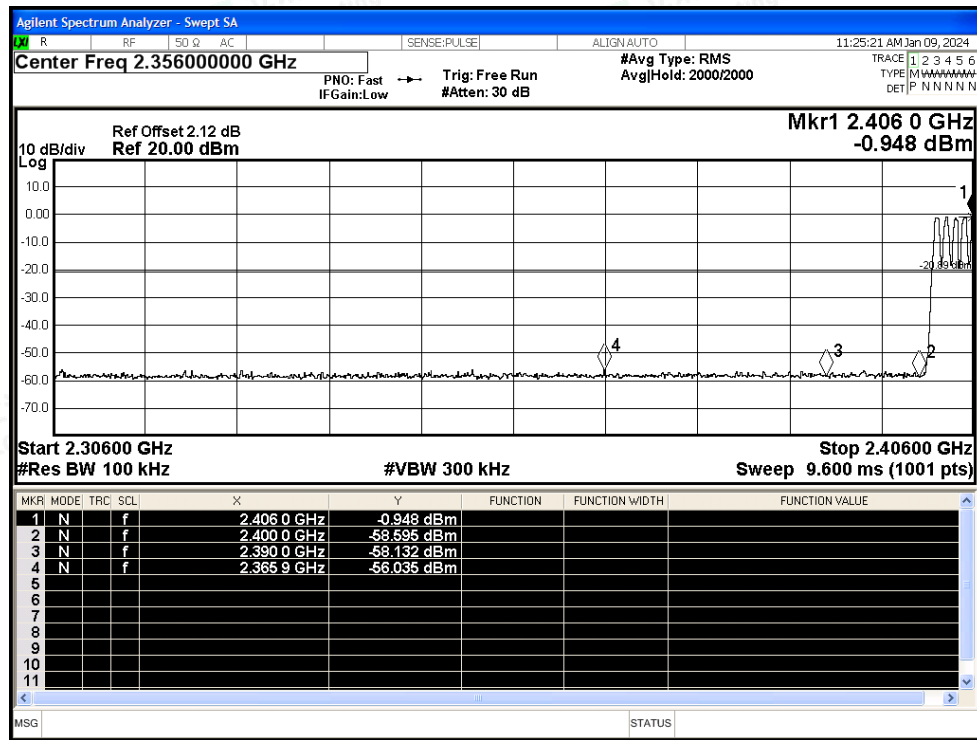




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

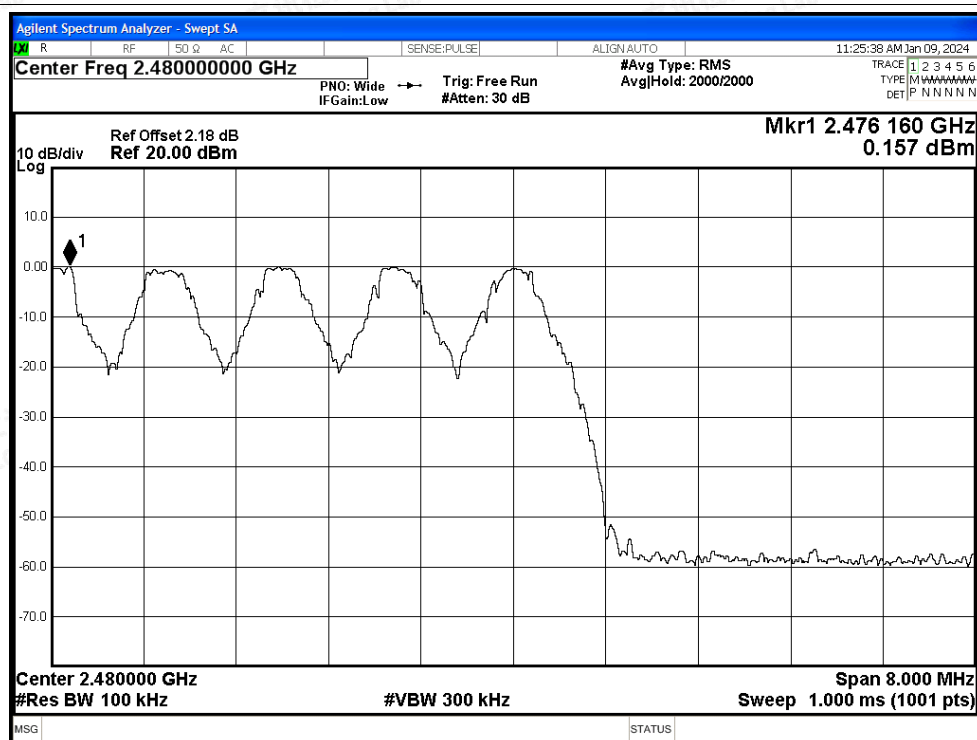


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

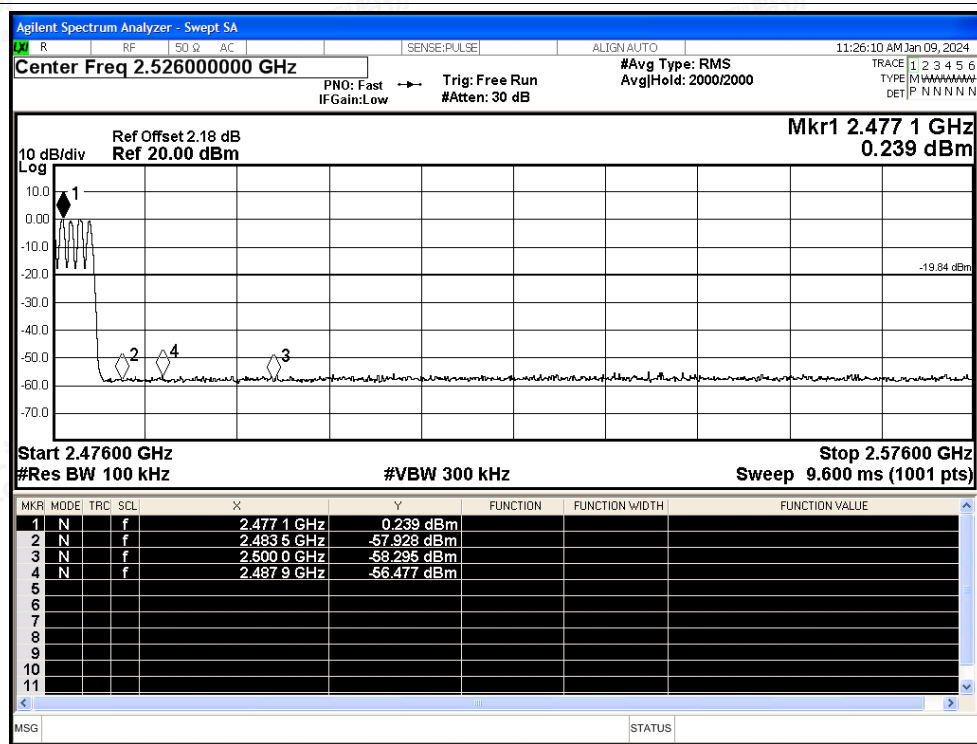




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

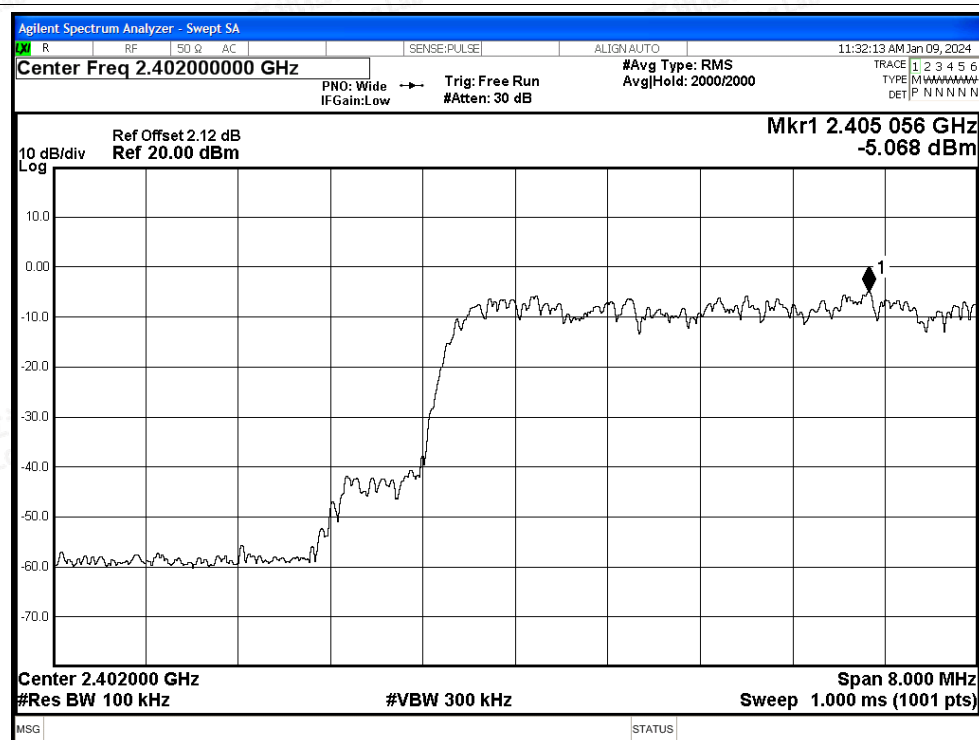


Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

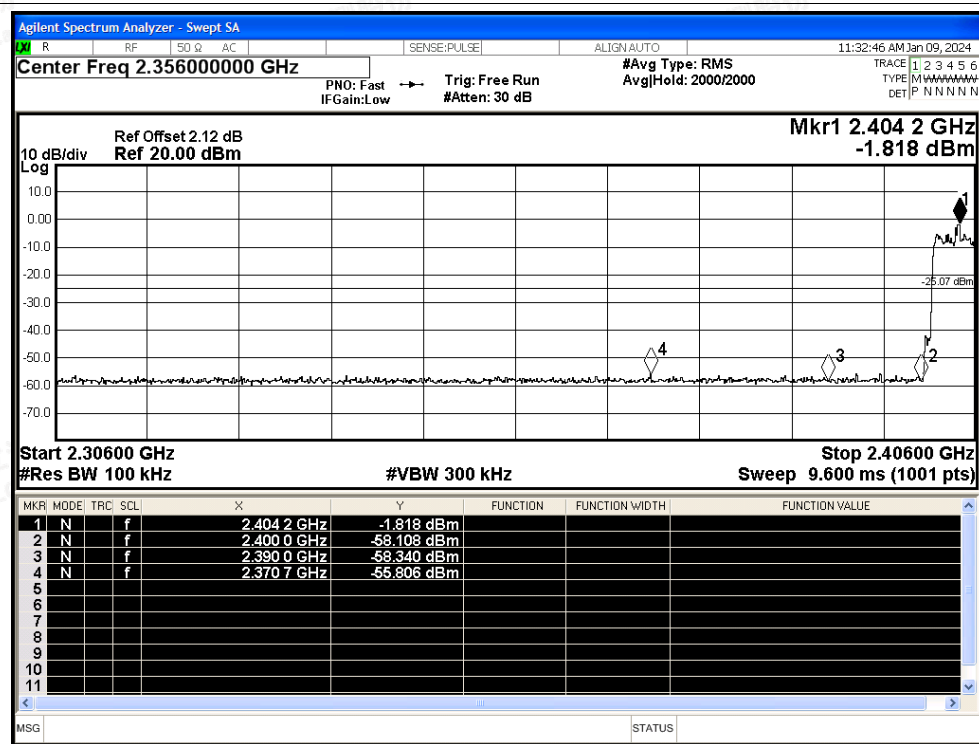




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

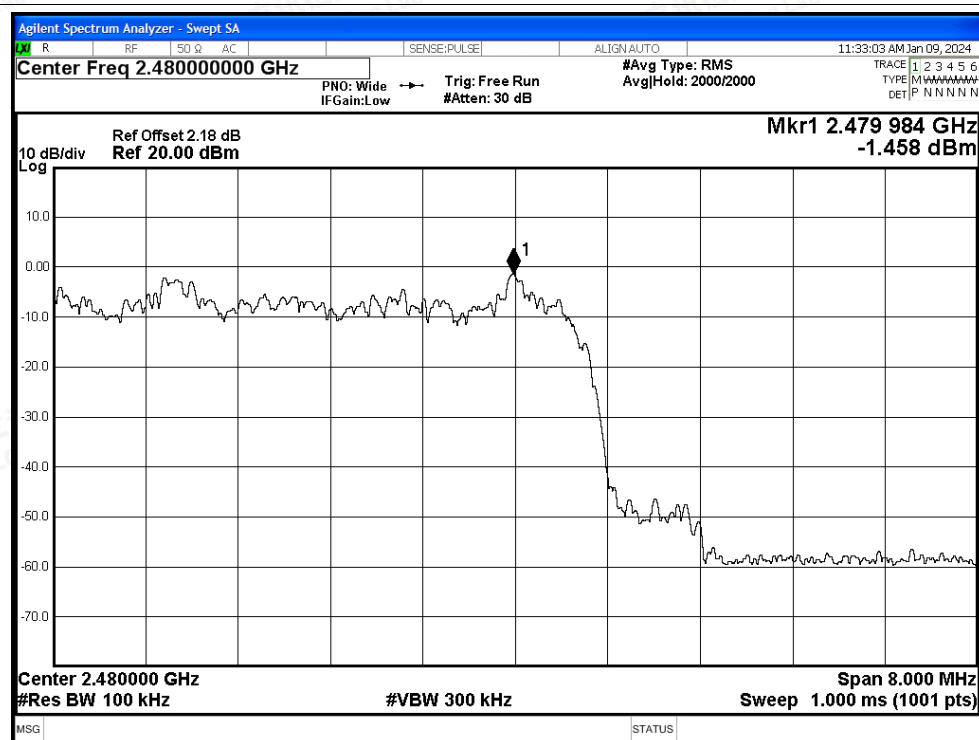

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

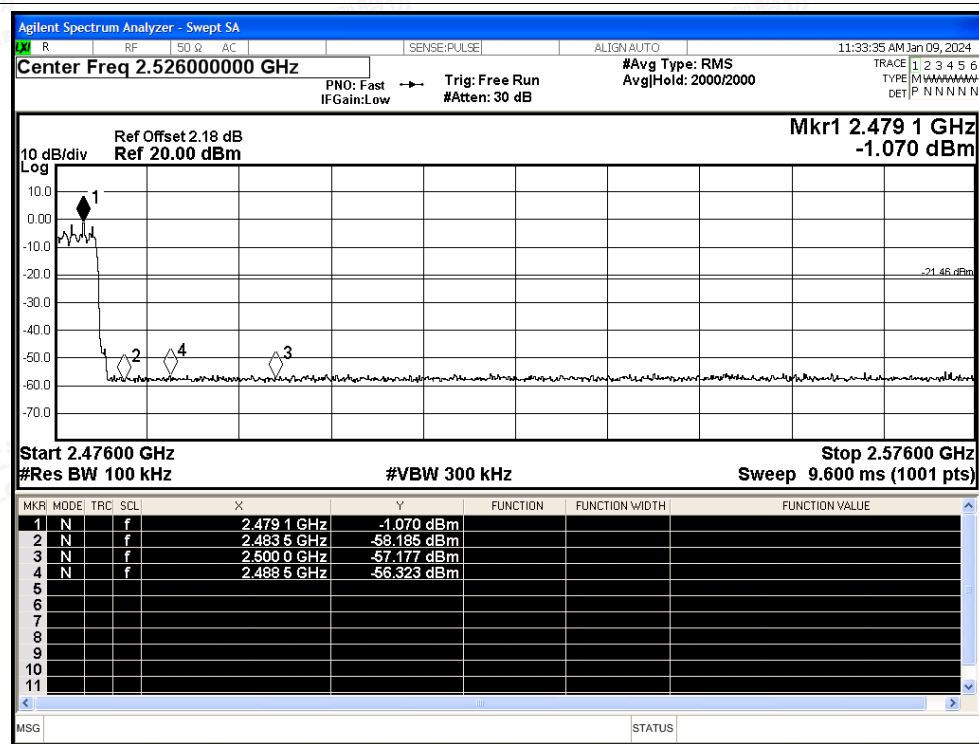




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

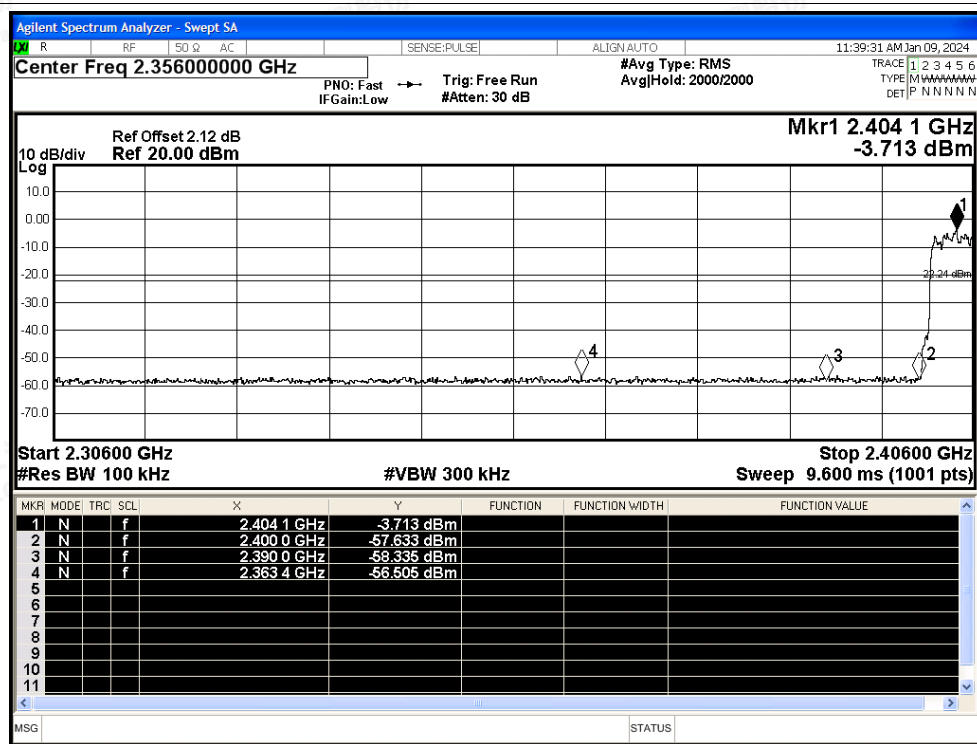

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

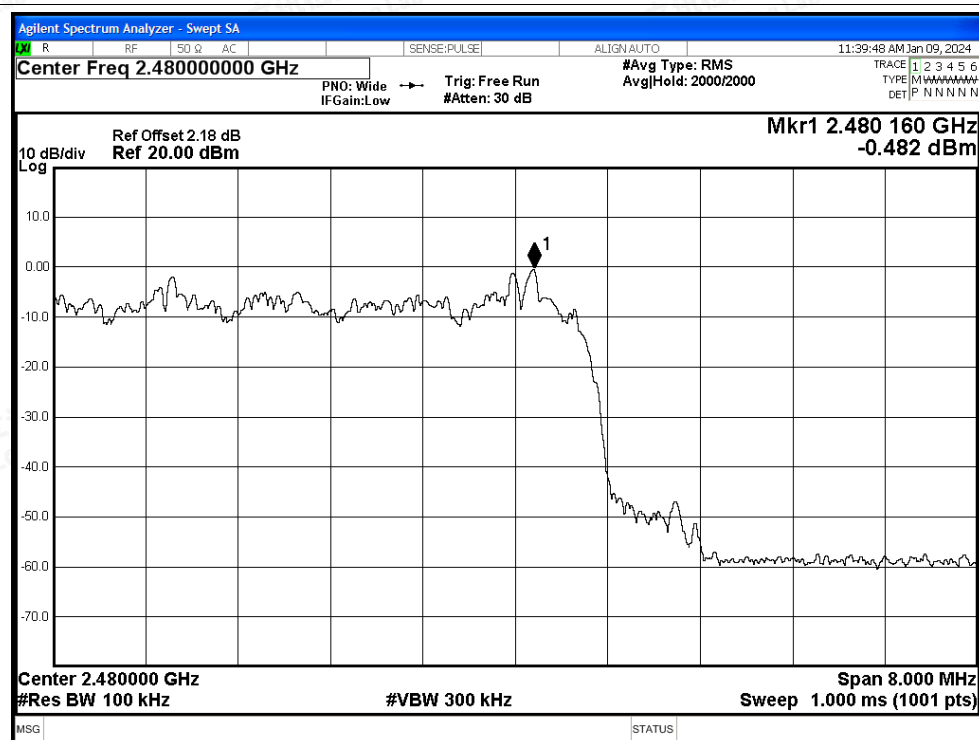

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

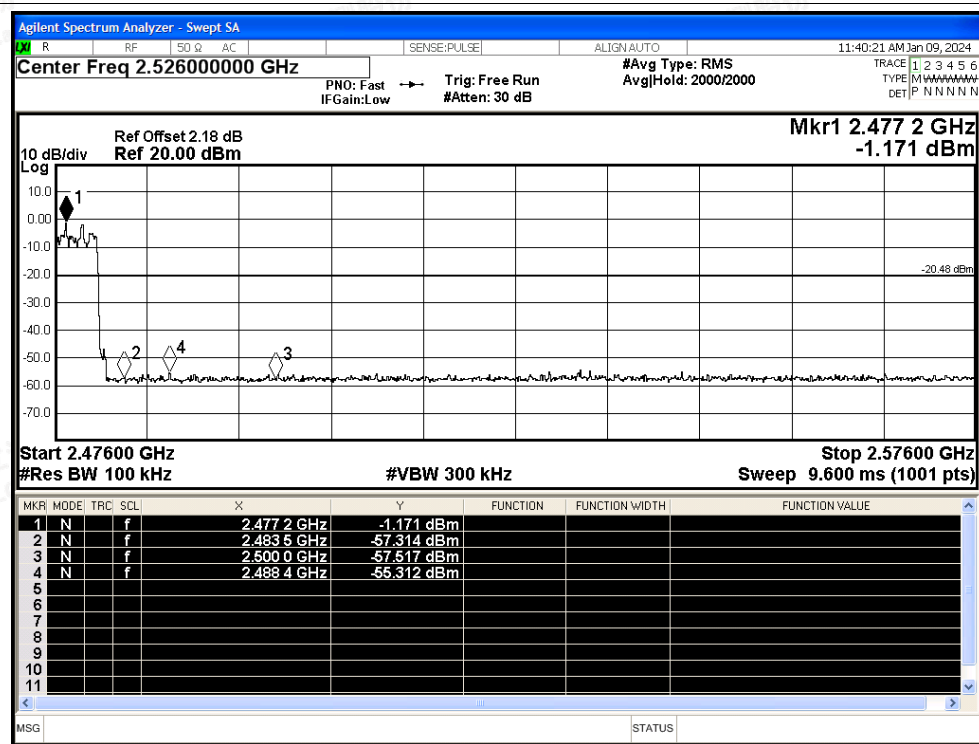



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-54.51	-20	Pass
NVNT	1-DH5	2441	Ant1	-54.57	-20	Pass
NVNT	1-DH5	2480	Ant1	-55.07	-20	Pass
NVNT	2-DH5	2402	Ant1	-54.08	-20	Pass
NVNT	2-DH5	2441	Ant1	-53.55	-20	Pass
NVNT	2-DH5	2480	Ant1	-53.81	-20	Pass
NVNT	3-DH5	2402	Ant1	-54.12	-20	Pass
NVNT	3-DH5	2441	Ant1	-53.95	-20	Pass
NVNT	3-DH5	2480	Ant1	-54.08	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

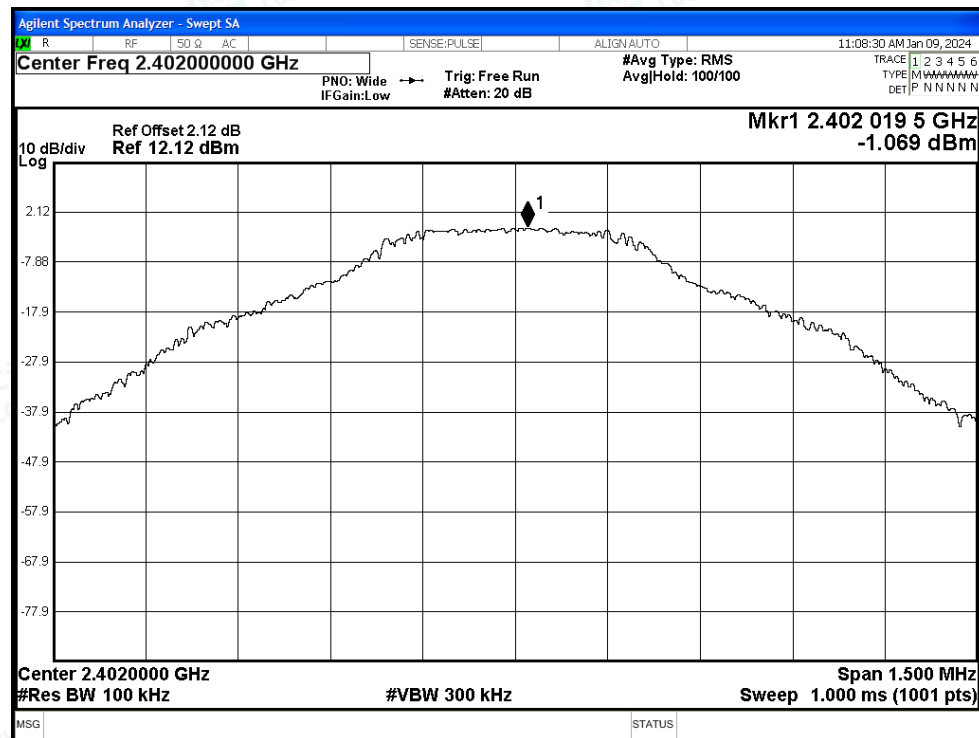


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

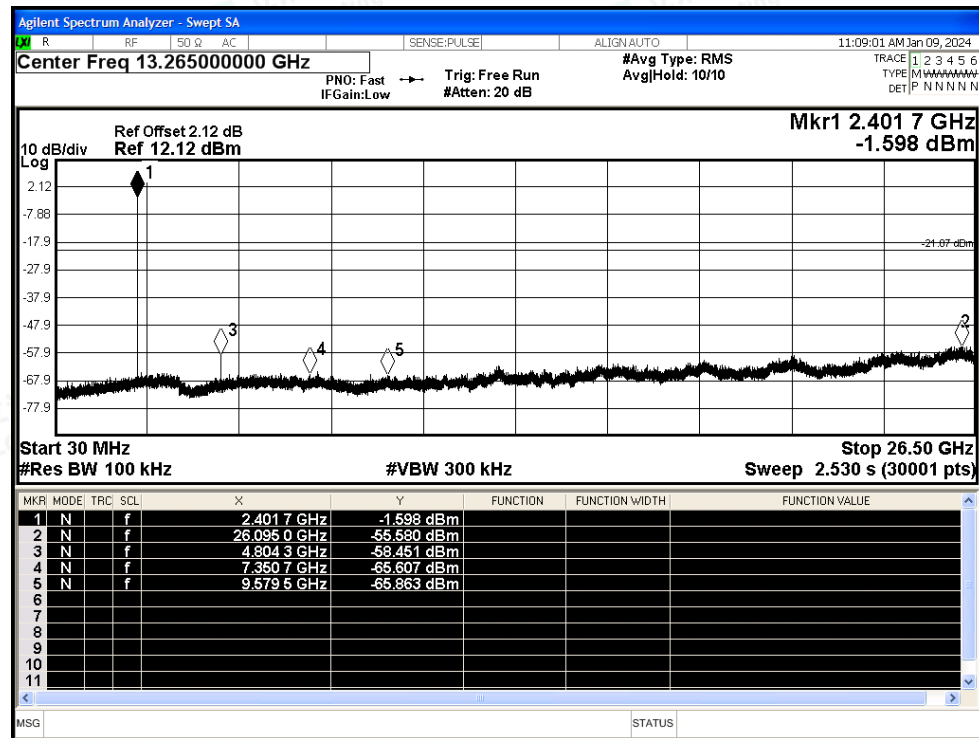




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

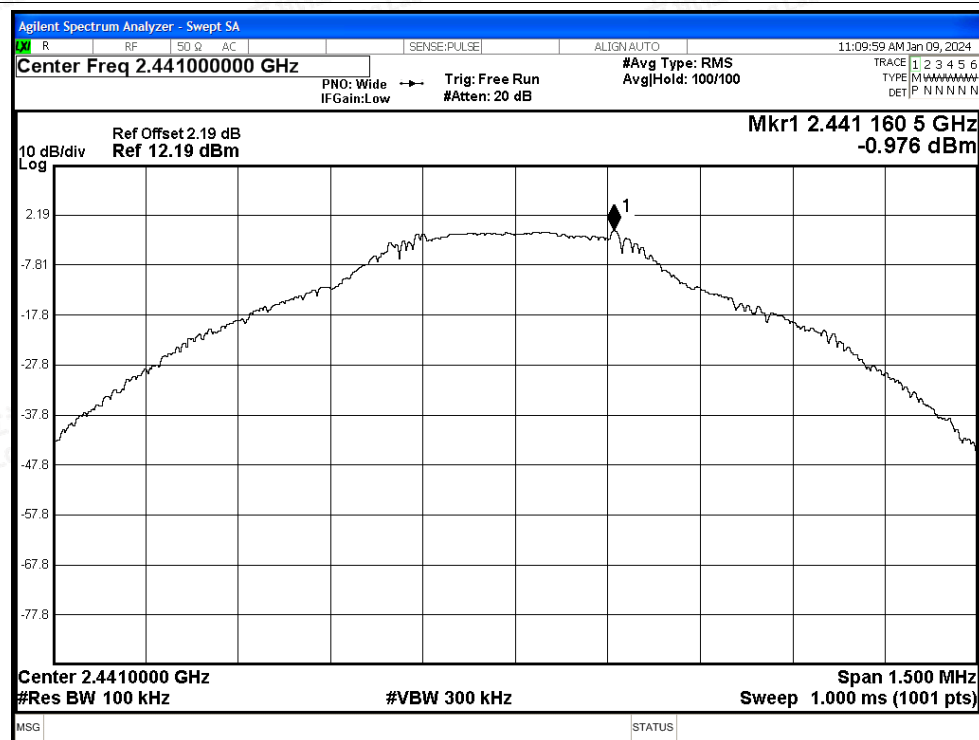


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

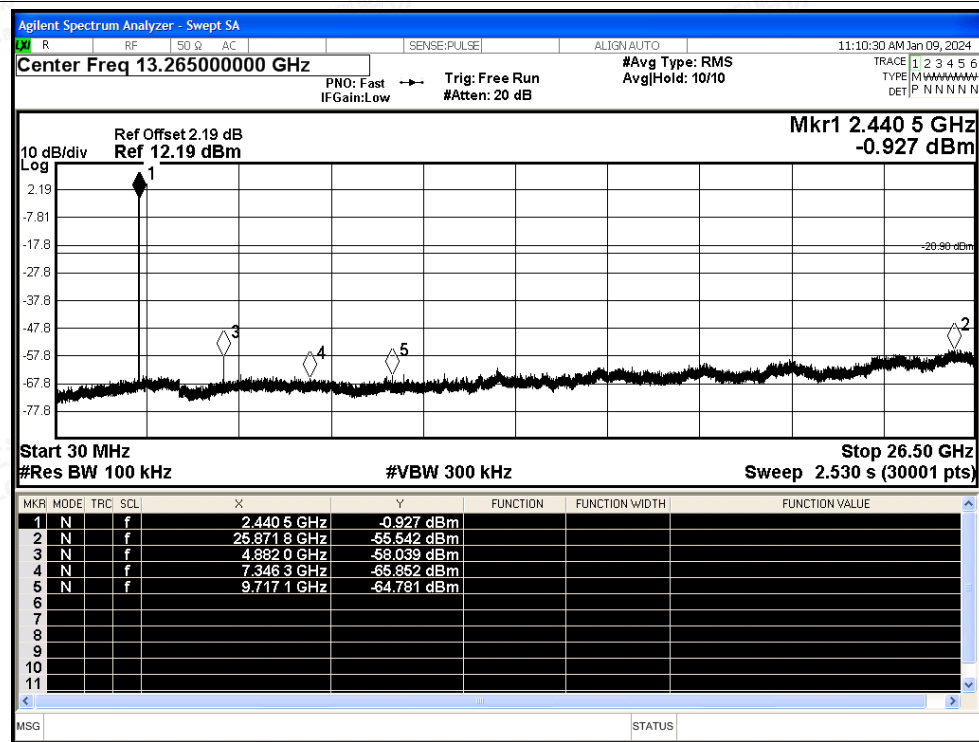




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

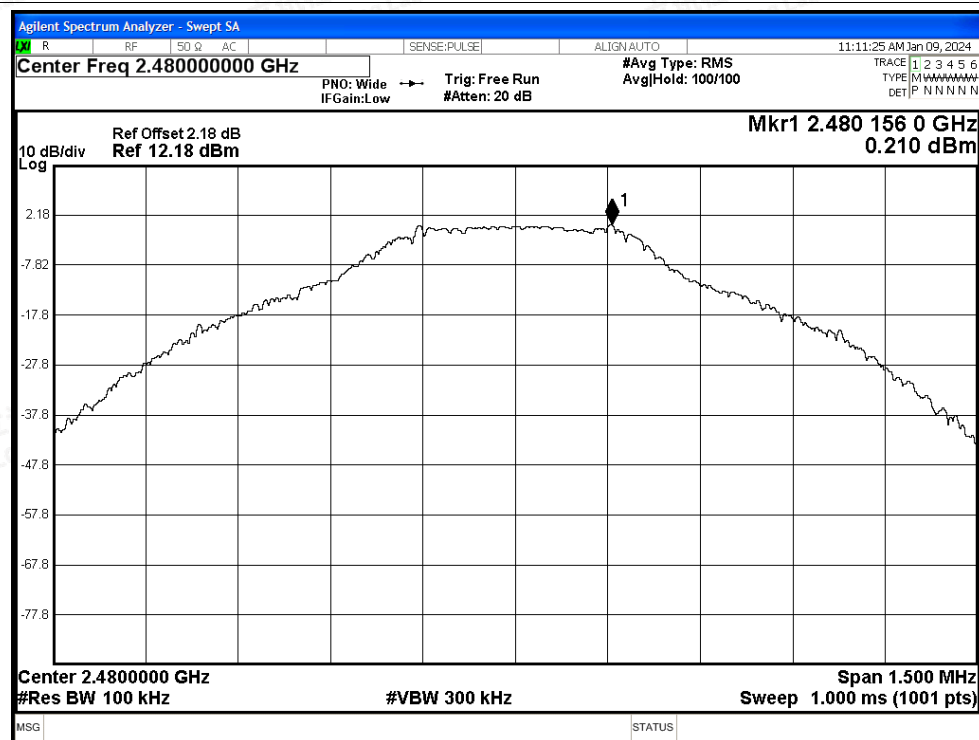


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

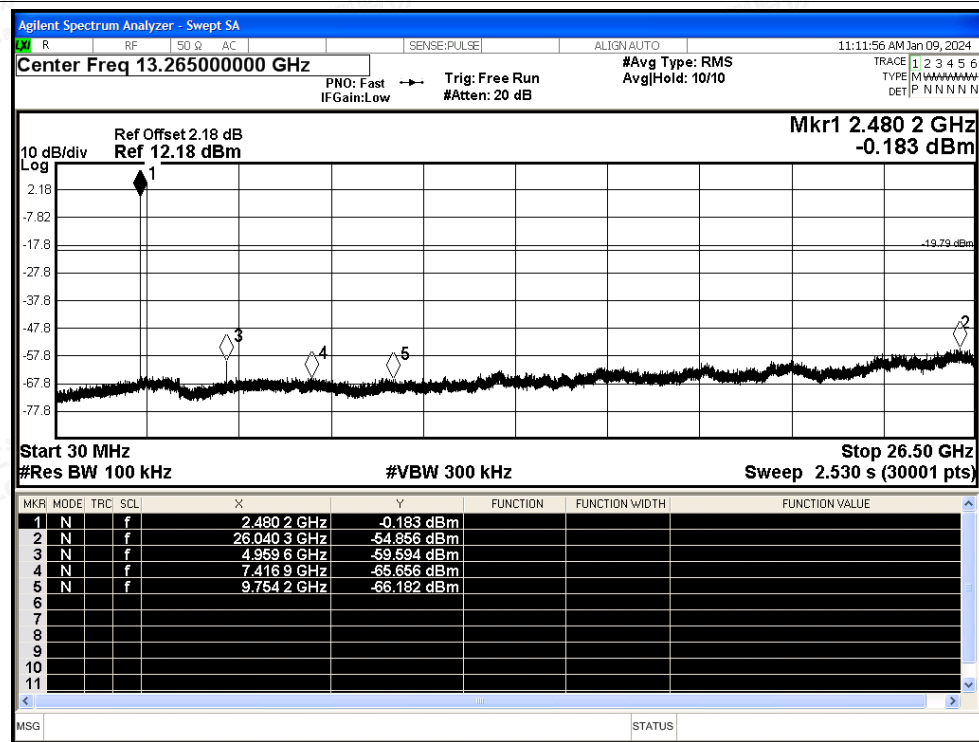




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

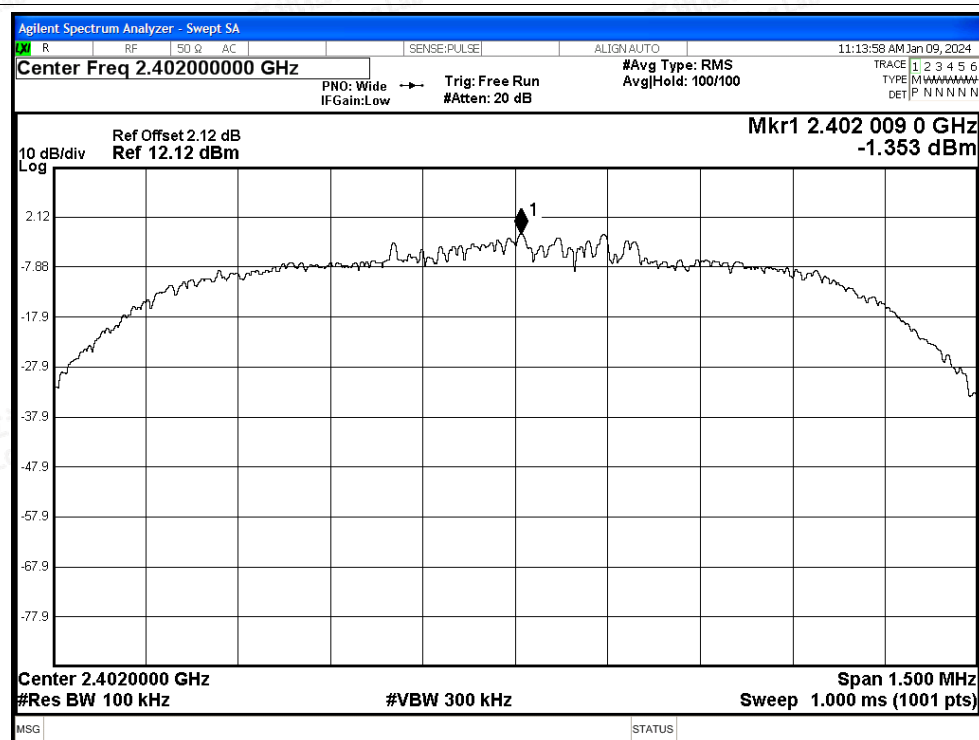


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

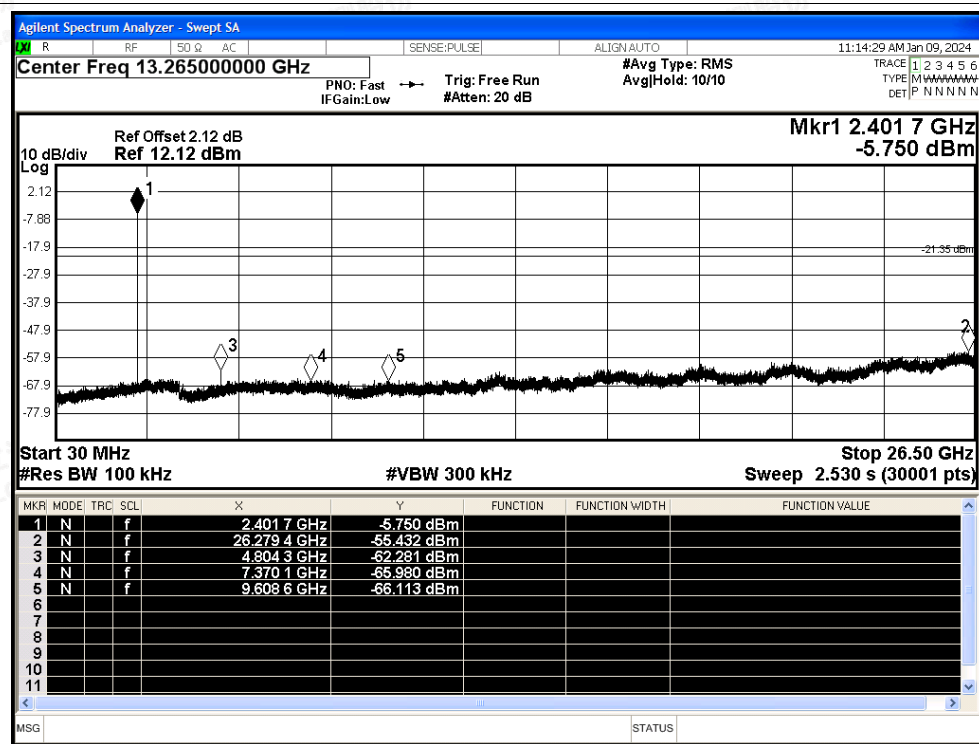




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

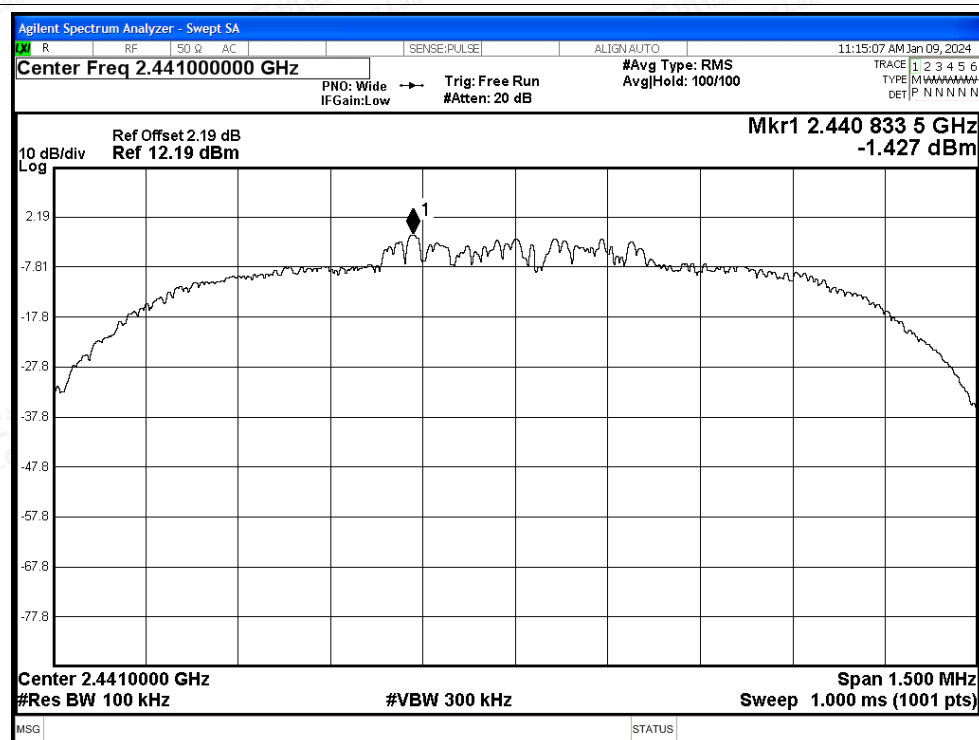


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

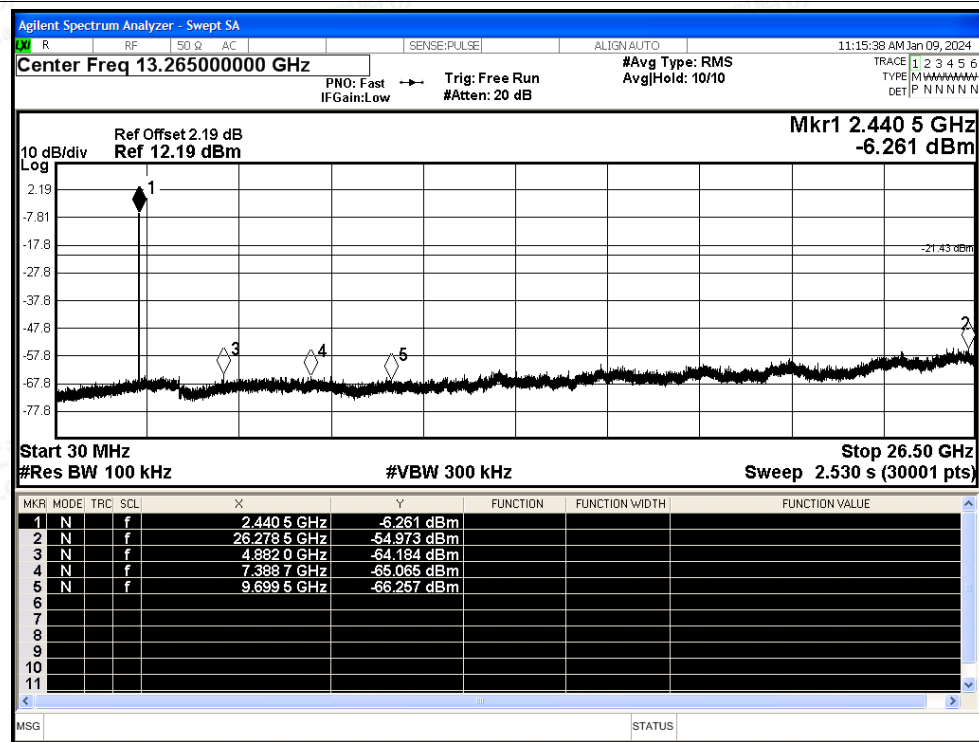




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

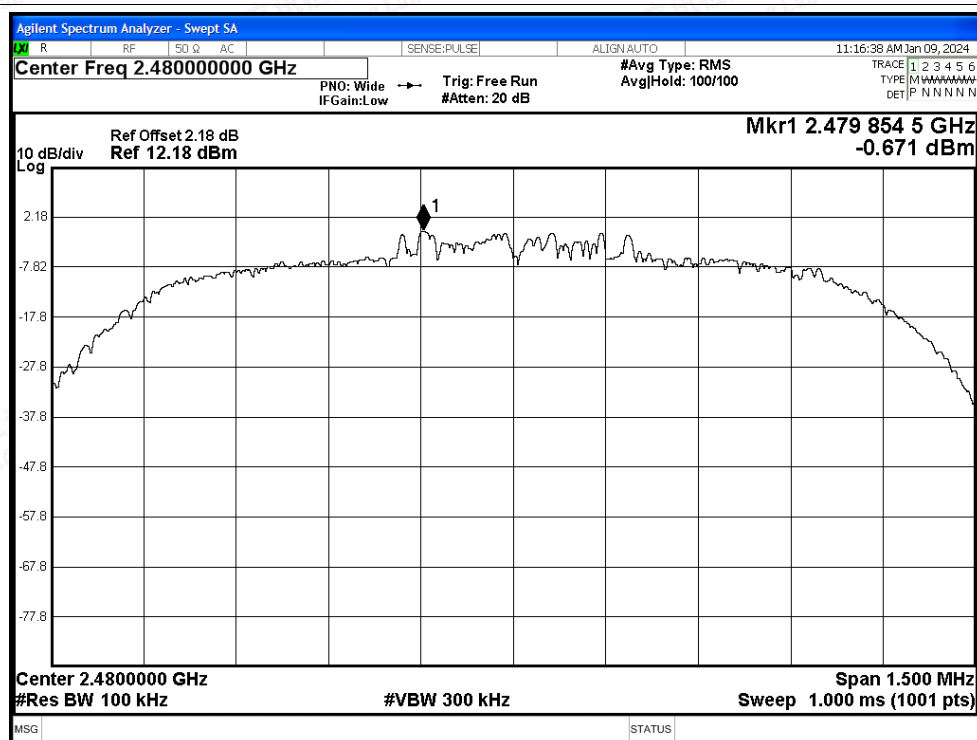


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

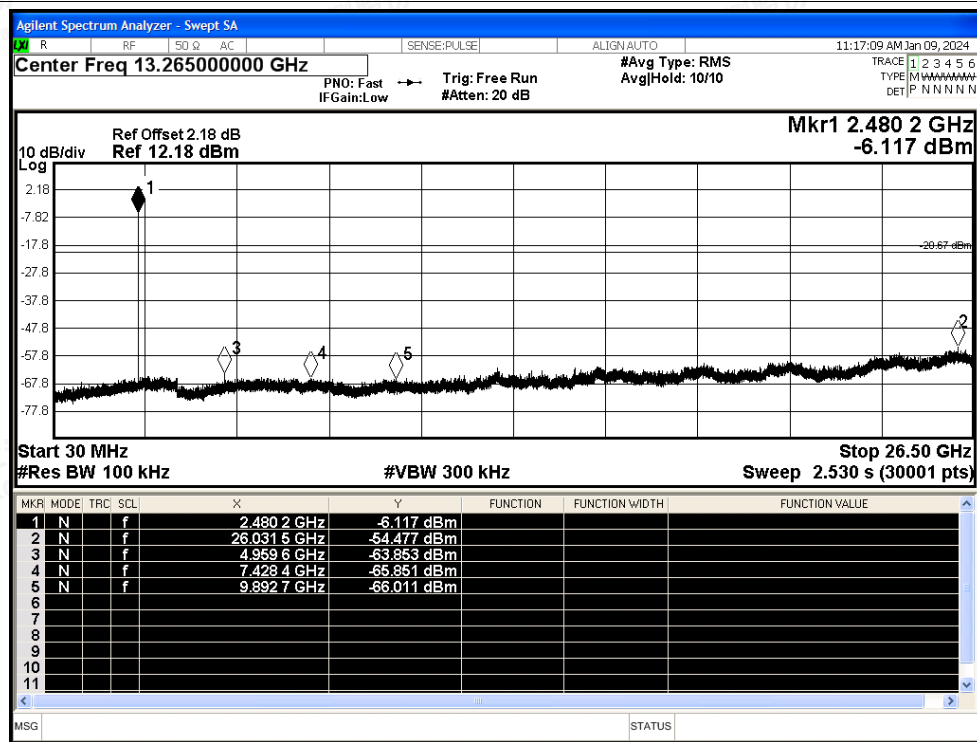




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

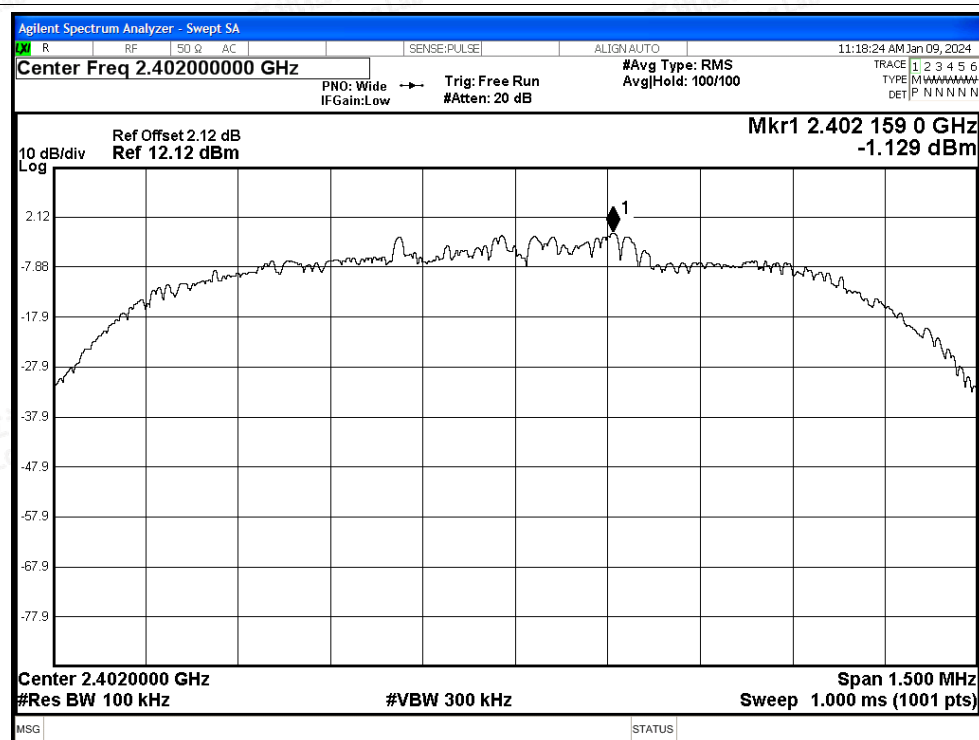


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

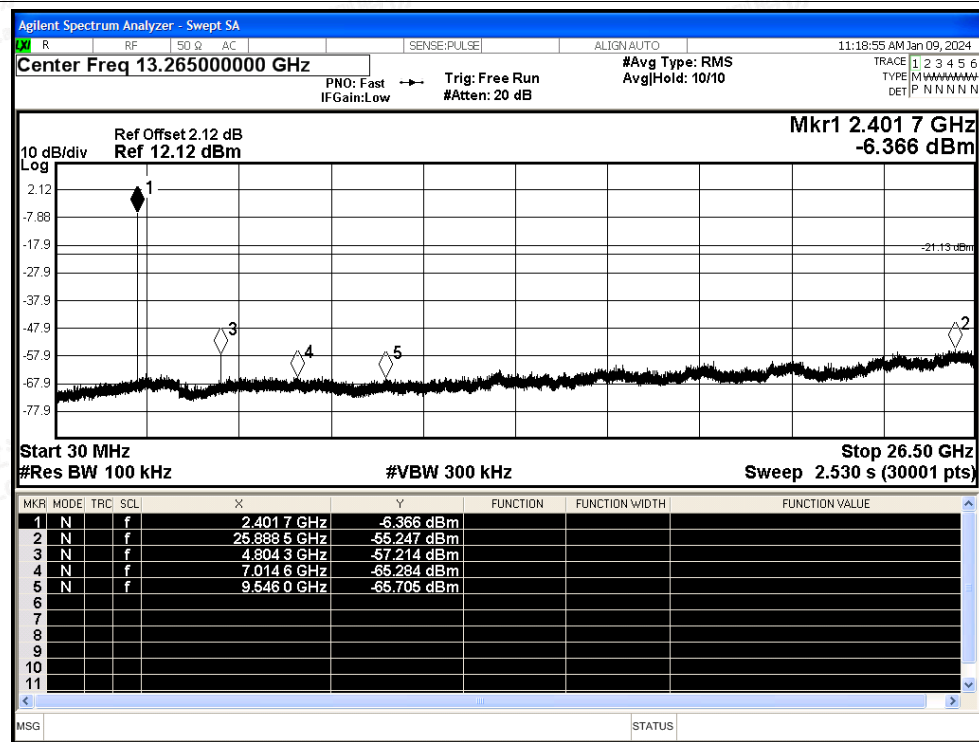




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

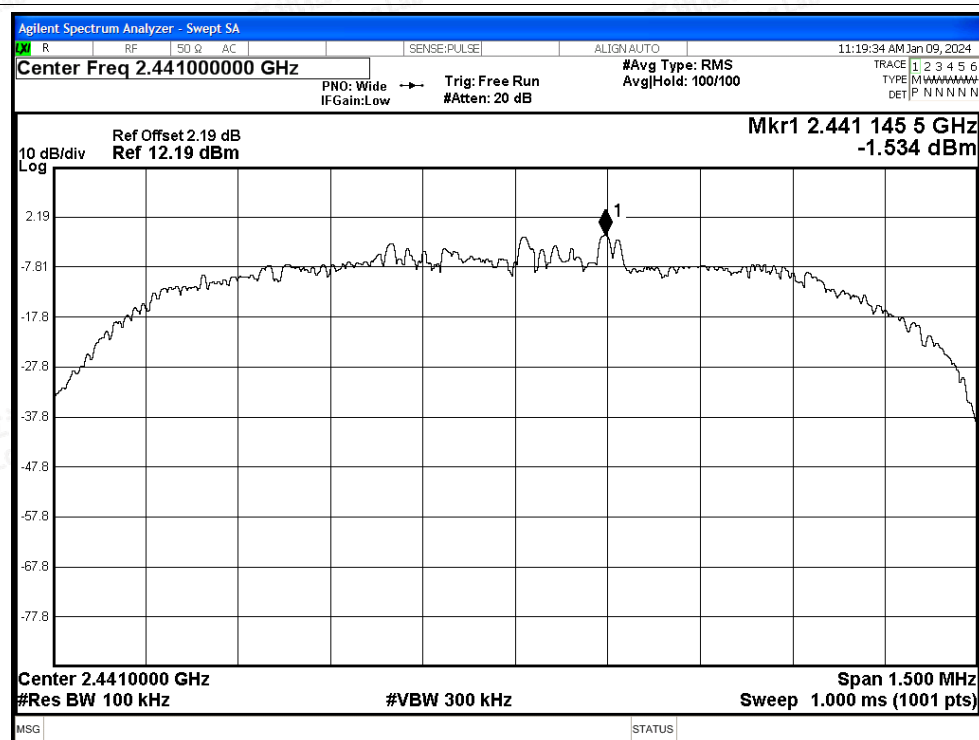


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

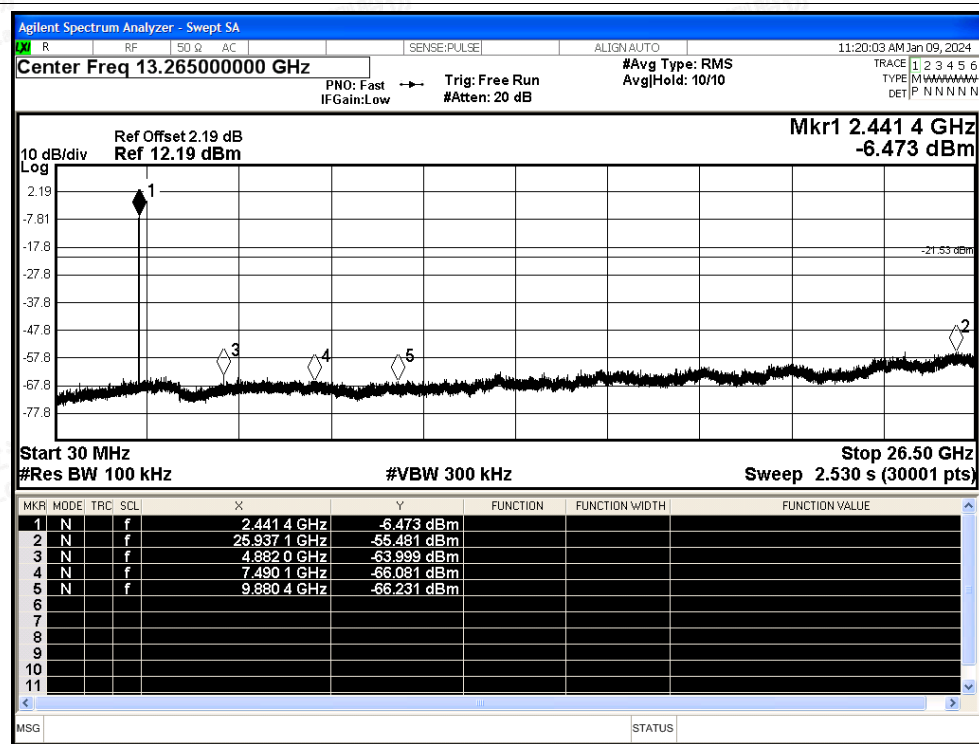




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

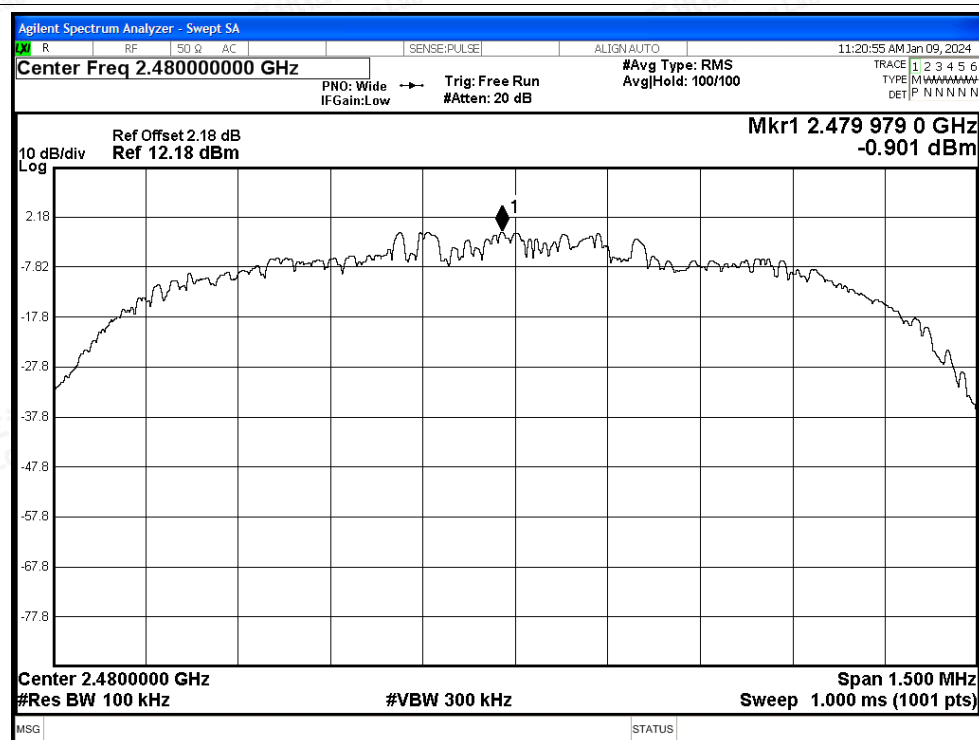

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

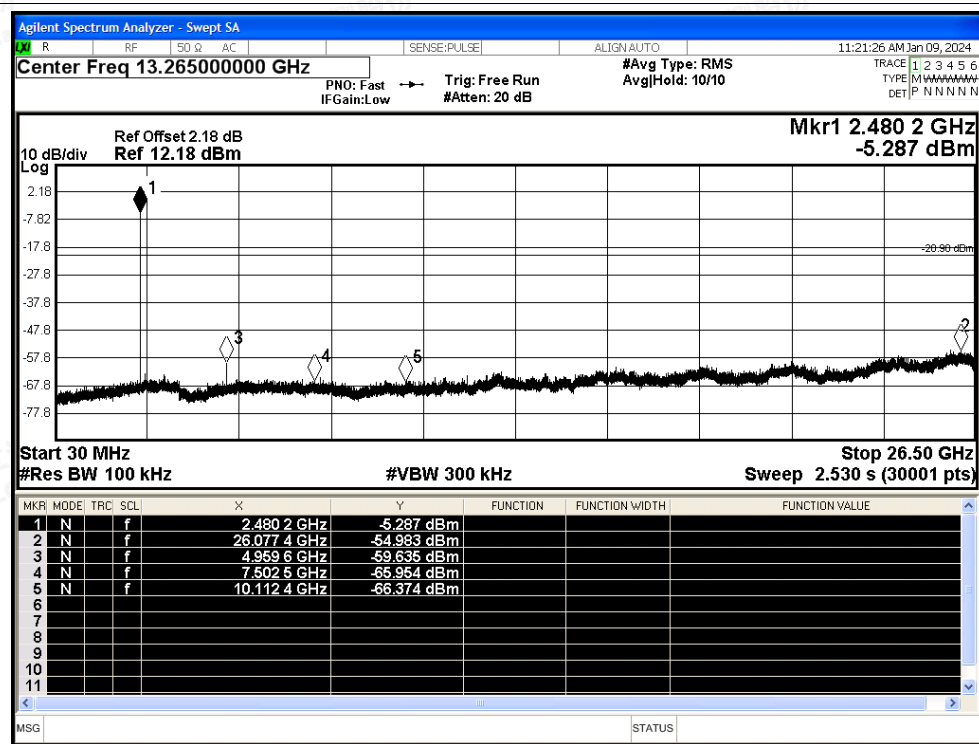



A.8 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	76.88	1.14	0.35
NVNT	1-DH5	2441	Ant1	76.88	1.14	0.35
NVNT	1-DH5	2480	Ant1	76.91	1.14	0.35
NVNT	2-DH5	2402	Ant1	76.96	1.14	0.35
NVNT	2-DH5	2441	Ant1	76.96	1.14	0.35
NVNT	2-DH5	2480	Ant1	76.96	1.14	0.35
NVNT	3-DH5	2402	Ant1	77.04	1.13	0.35
NVNT	3-DH5	2441	Ant1	77.01	1.13	0.35
NVNT	3-DH5	2480	Ant1	77.01	1.13	0.35




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Duty Cycle NVNT 1-DH5 2402MHz Ant1

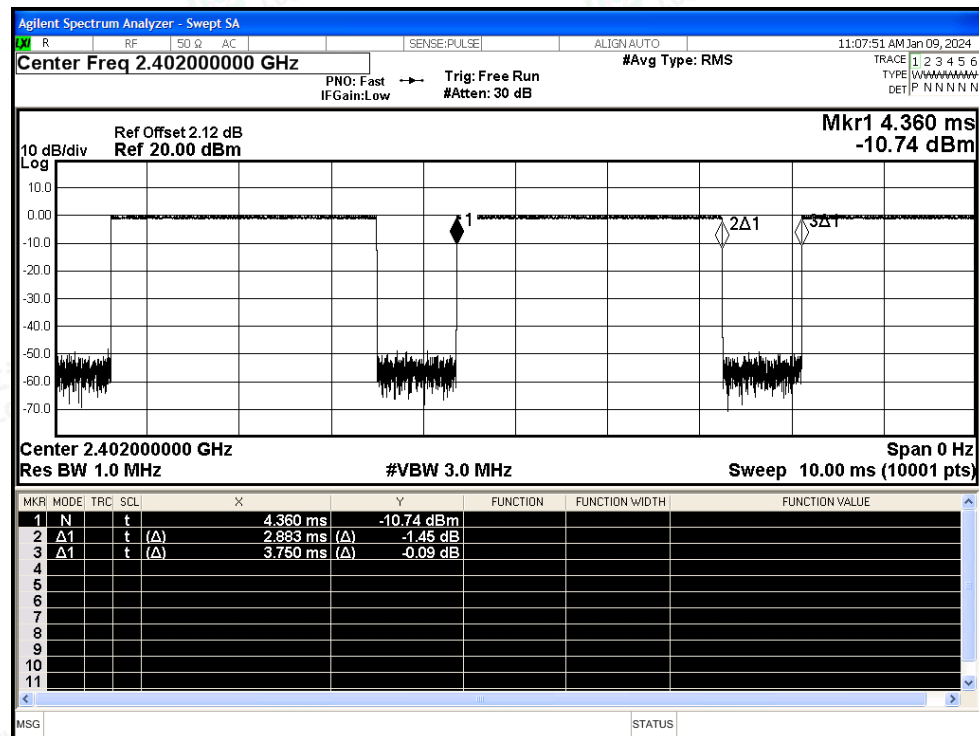


Duty Cycle NVNT 1-DH5 2441MHz Ant1

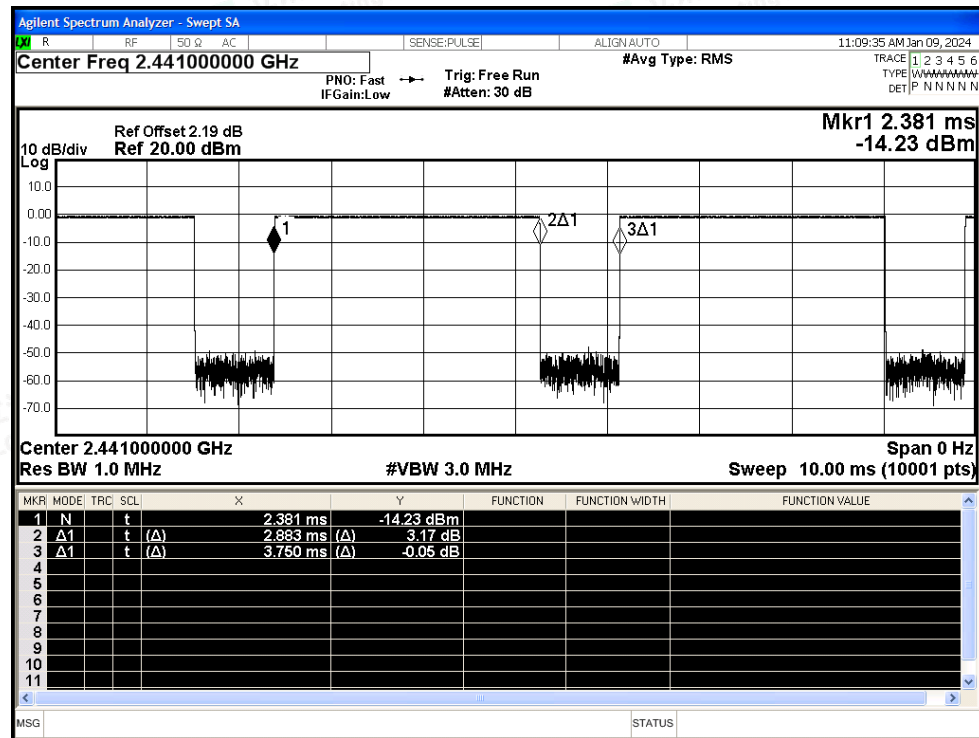




Duty Cycle NVNT 1-DH5 2480MHz Ant1

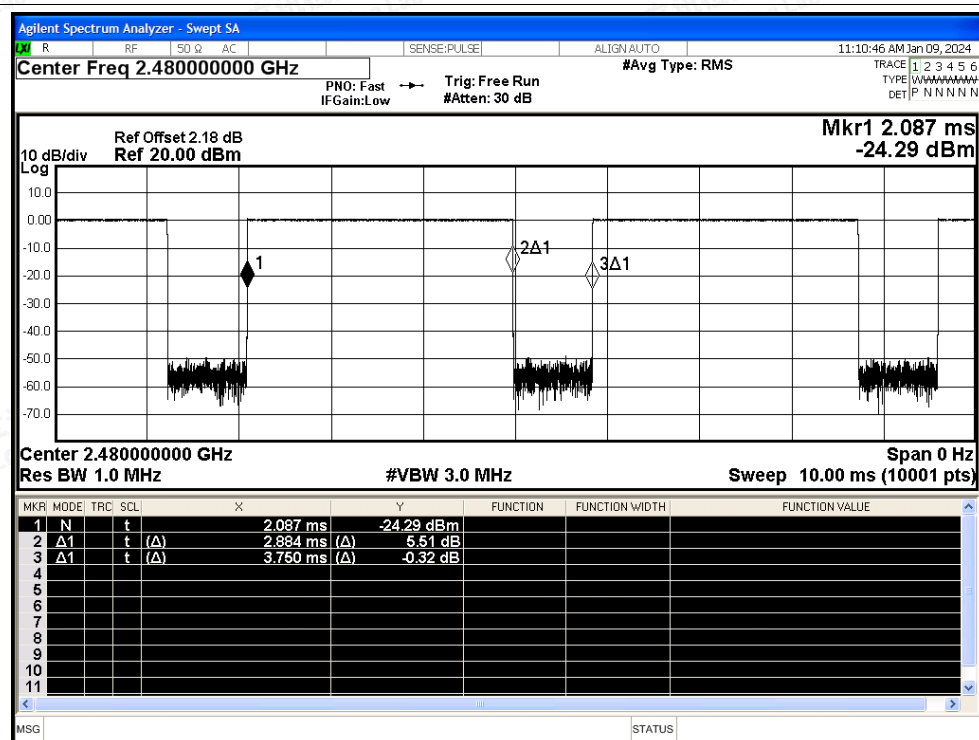

Duty Cycle NVNT 2-DH5 2402MHz Ant1

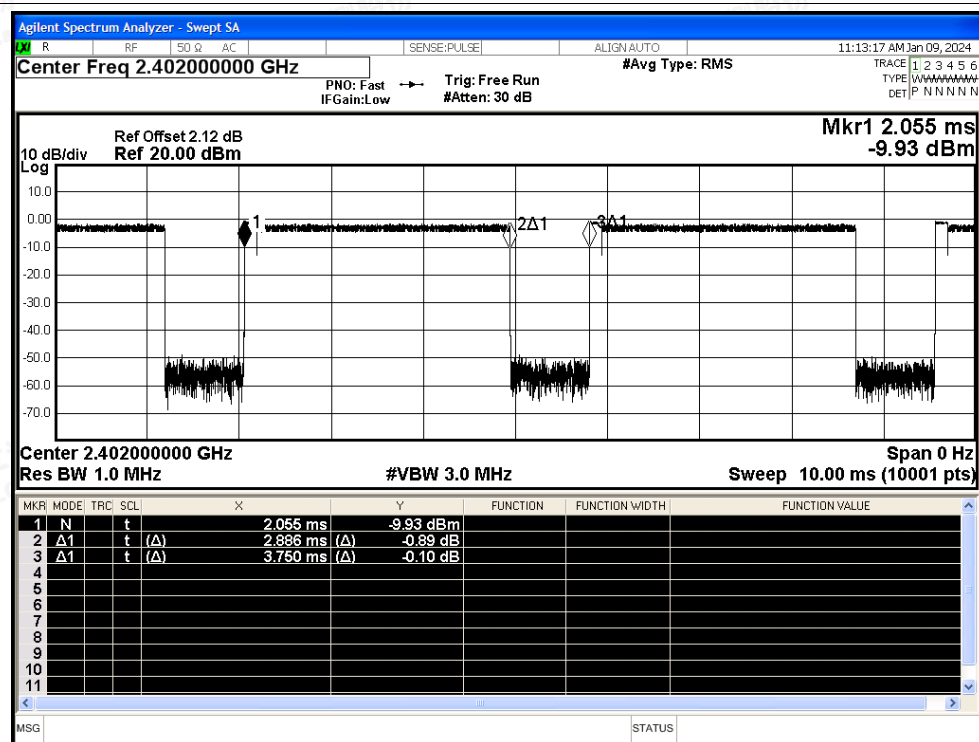

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Duty Cycle NVNT 2-DH5 2441MHz Ant1

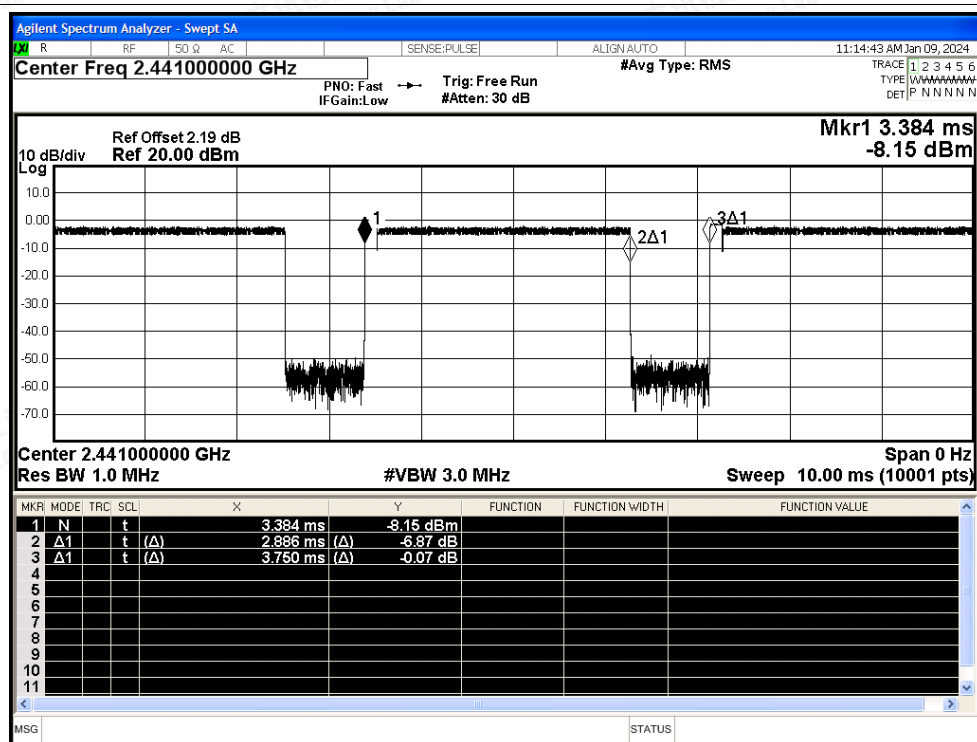


Duty Cycle NVNT 2-DH5 2480MHz Ant1

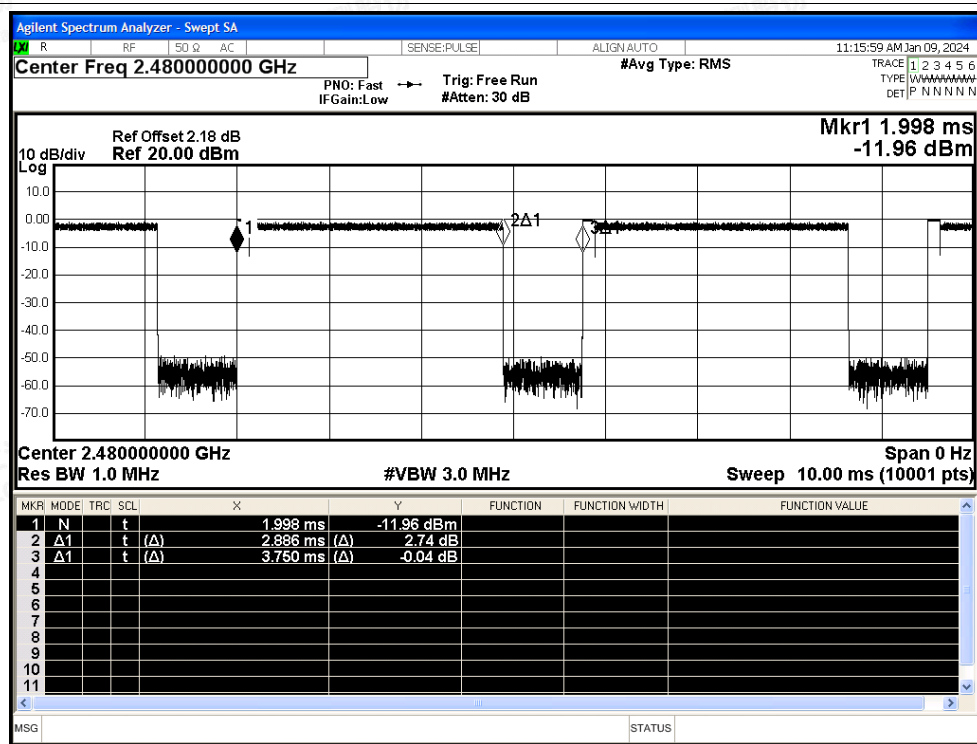




Duty Cycle NVNT 3-DH5 2402MHz Ant1

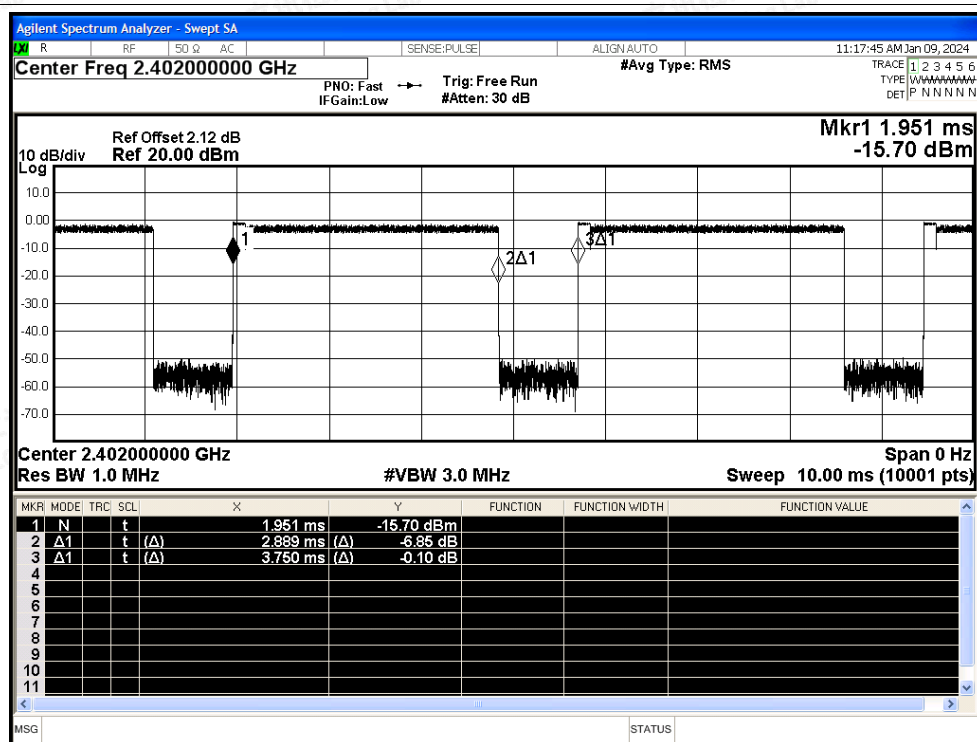


Duty Cycle NVNT 3-DH5 2441MHz Ant1

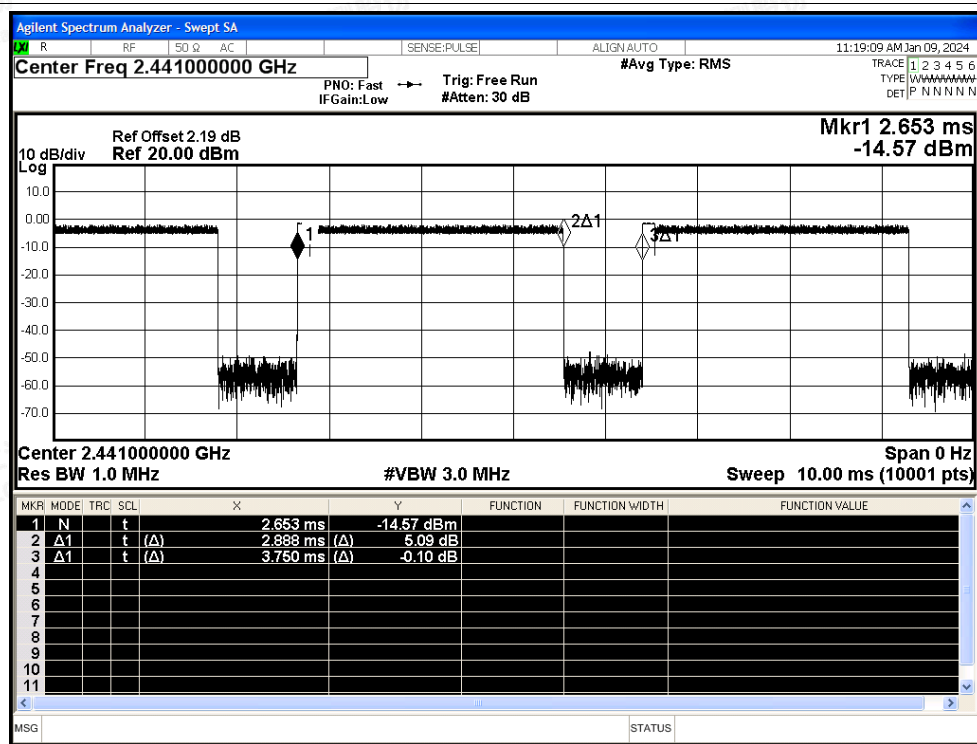



Duty Cycle NVNT 3-DH5 2480MHz Ant1

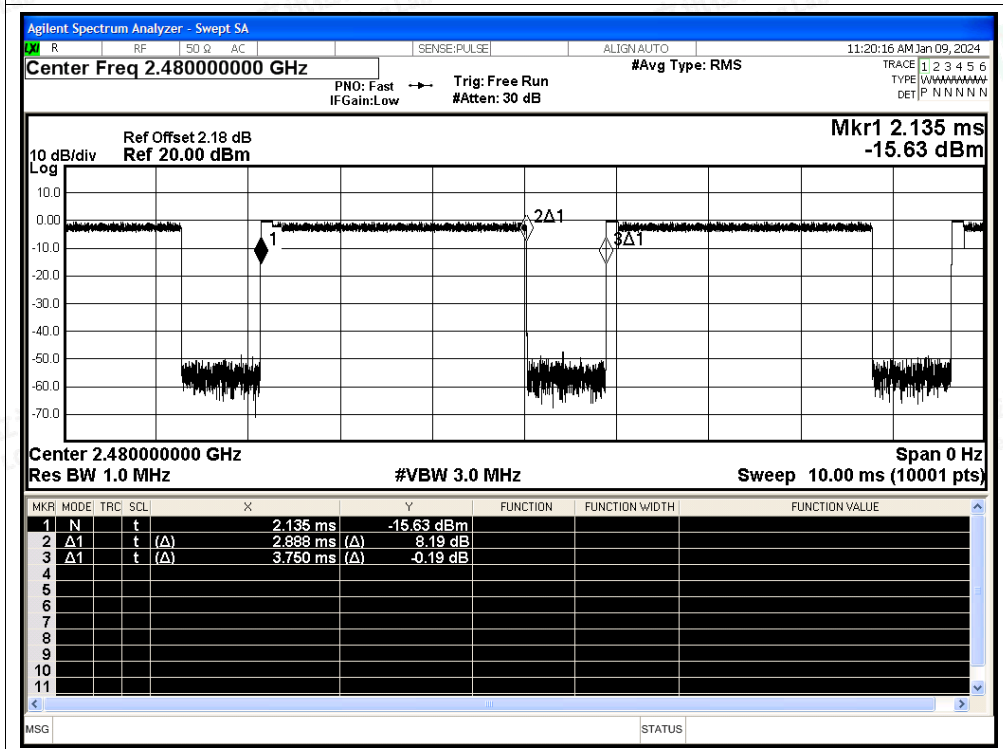



A.9 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-49.28	3.0	-	48.98	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-58.9	3.0	1.14	39.36	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2311.536	-47.28	3.0	-	50.98	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2383.344	-57.53	3.0	1.14	40.73	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-48.92	3.0	-	49.34	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-58.54	3.0	1.14	39.72	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-49.15	3.0	-	49.11	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-57.45	3.0	1.14	40.81	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2498.8	-46.56	3.0	-	51.70	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2498.176	-56.88	3.0	1.14	41.38	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-49.79	3.0	-	48.47	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-57.53	3.0	1.14	40.73	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-49.35	3.0	-	48.91	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-58.6	3.0	1.14	39.66	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2341.104	-47.02	3.0	-	51.24	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2384.112	-57.46	3.0	1.14	40.80	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-50.43	3.0	-	47.83	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-57.98	3.0	1.14	40.28	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-49.91	3.0	-	48.35	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-57.72	3.0	1.14	40.54	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2495.08	-46.64	3.0	-	51.62	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2499.808	-56.99	3.0	1.14	41.27	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-50.58	3.0	-	47.68	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-57.44	3.0	1.14	40.82	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-48.11	3.0	-	50.15	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-58.86	3.0	1.13	39.40	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2382.384	-47.56	3.0	-	50.70	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2324.88	-57.57	3.0	1.13	40.69	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-49.73	3.0	-	48.53	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-58.38	3.0	1.13	39.88	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-49.5	3.0	-	48.76	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-57.82	3.0	1.13	40.44	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2488.624	-47.35	3.0	-	50.91	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2499.544	-56.92	3.0	1.13	41.34	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-49.21	3.0	-	49.05	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-57.6	3.0	1.13	40.66	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

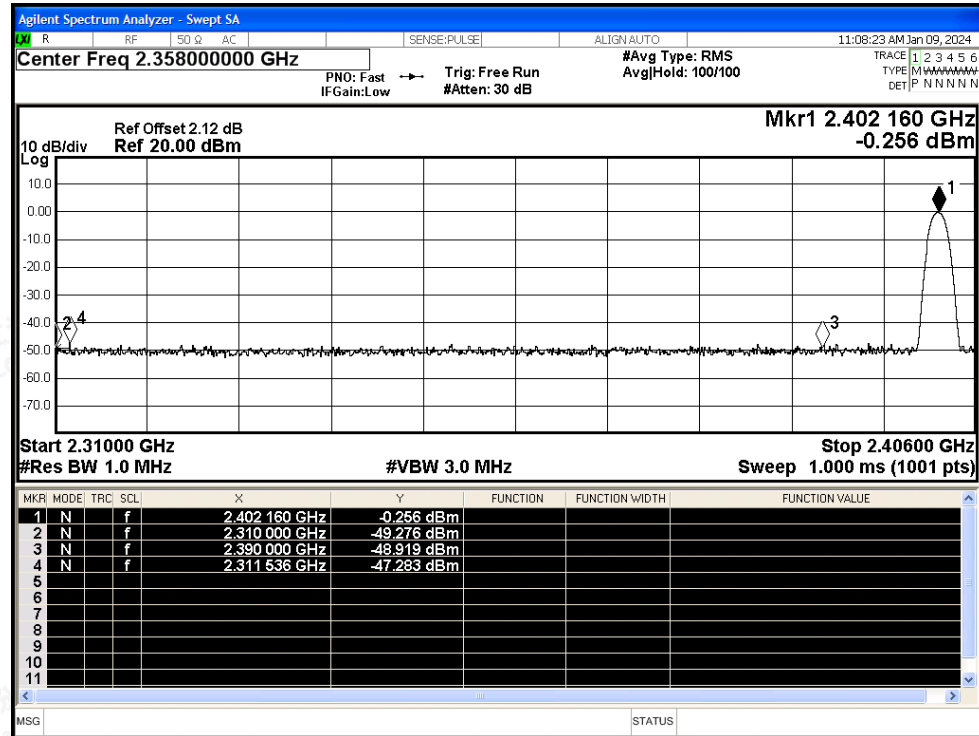


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

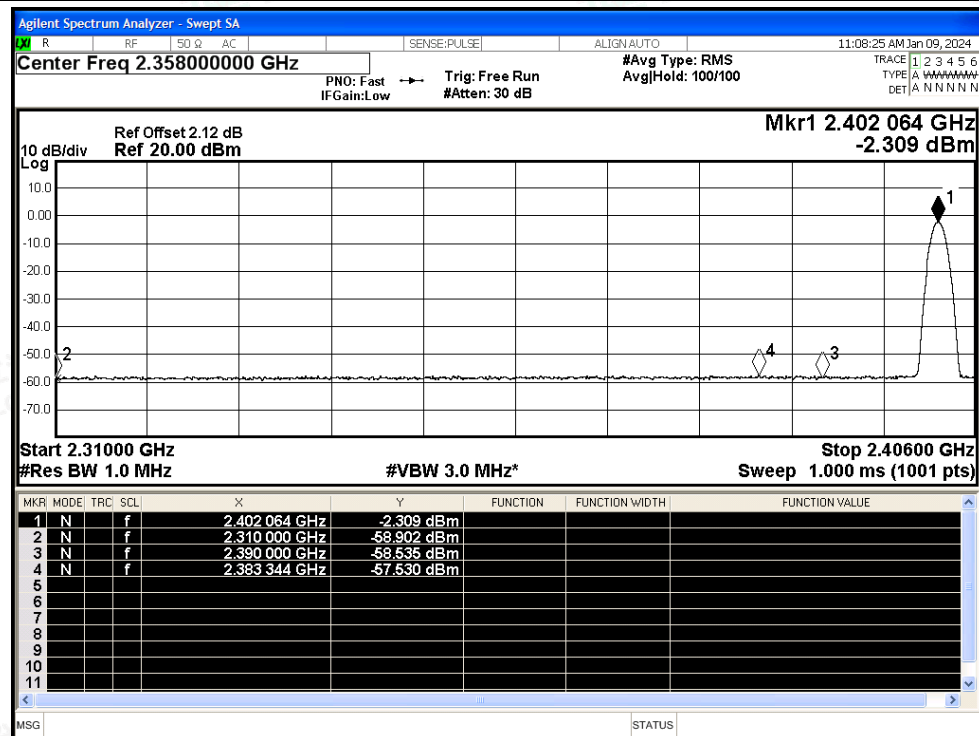




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

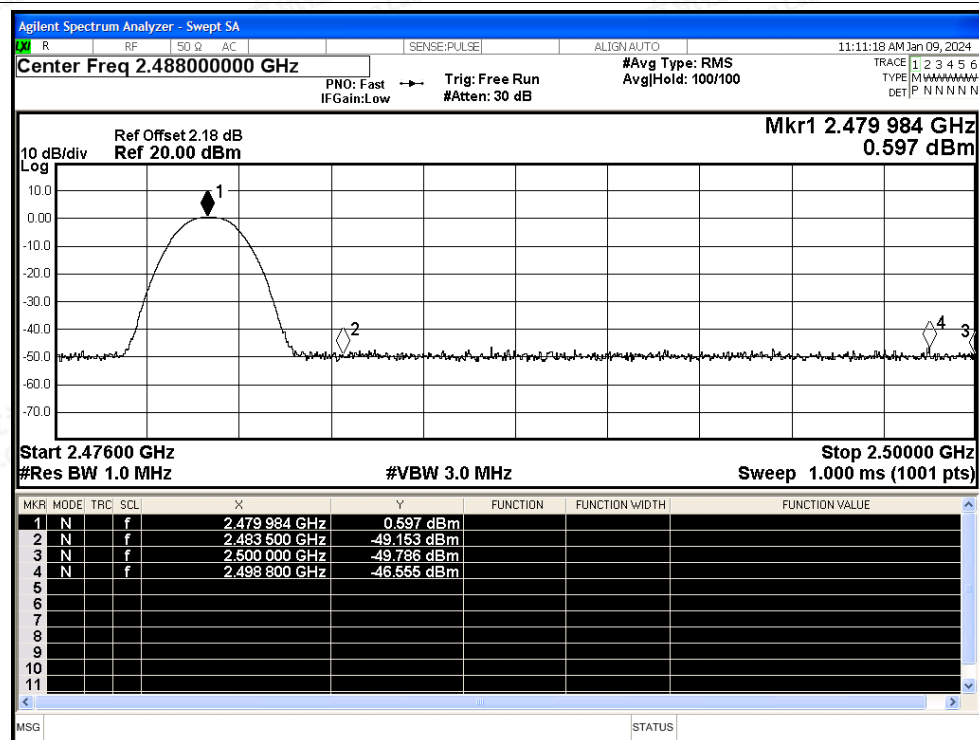


Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

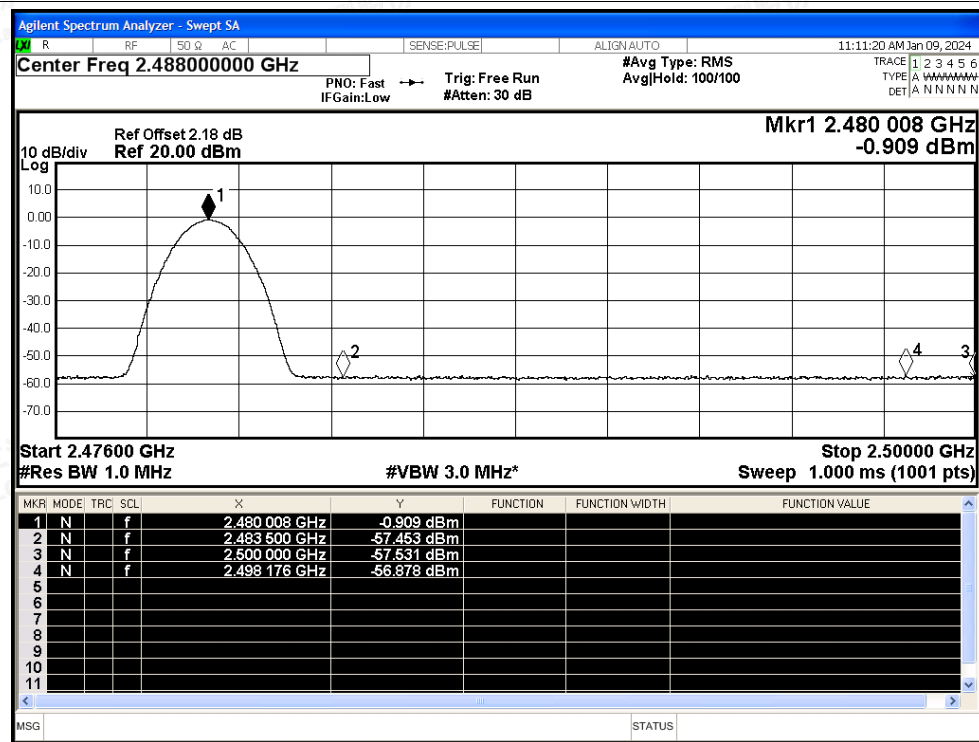




Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

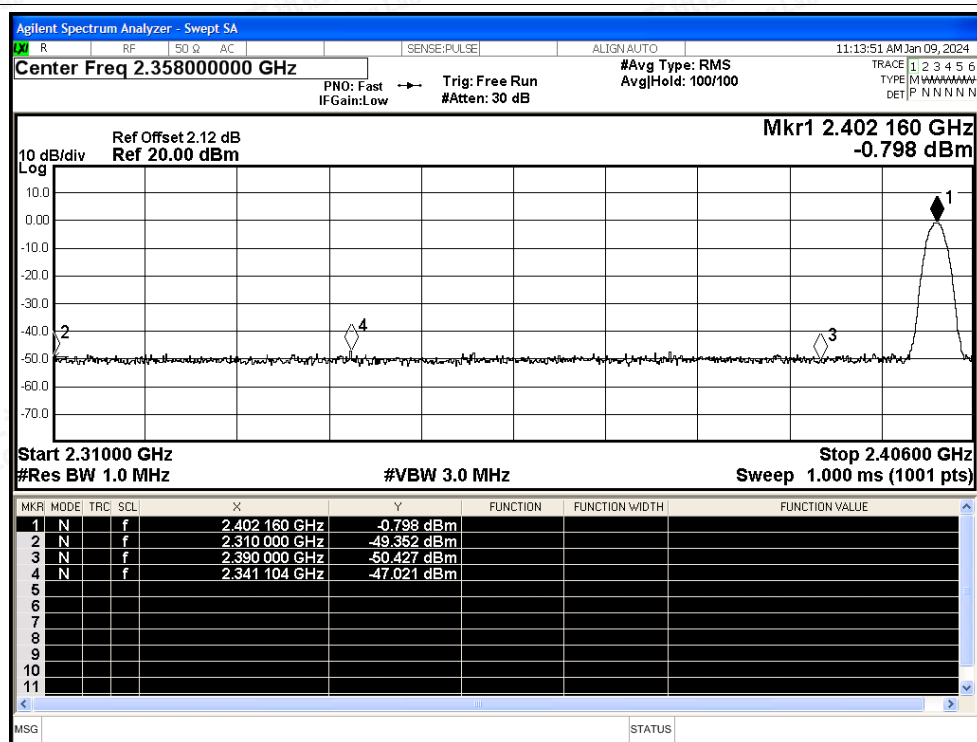


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

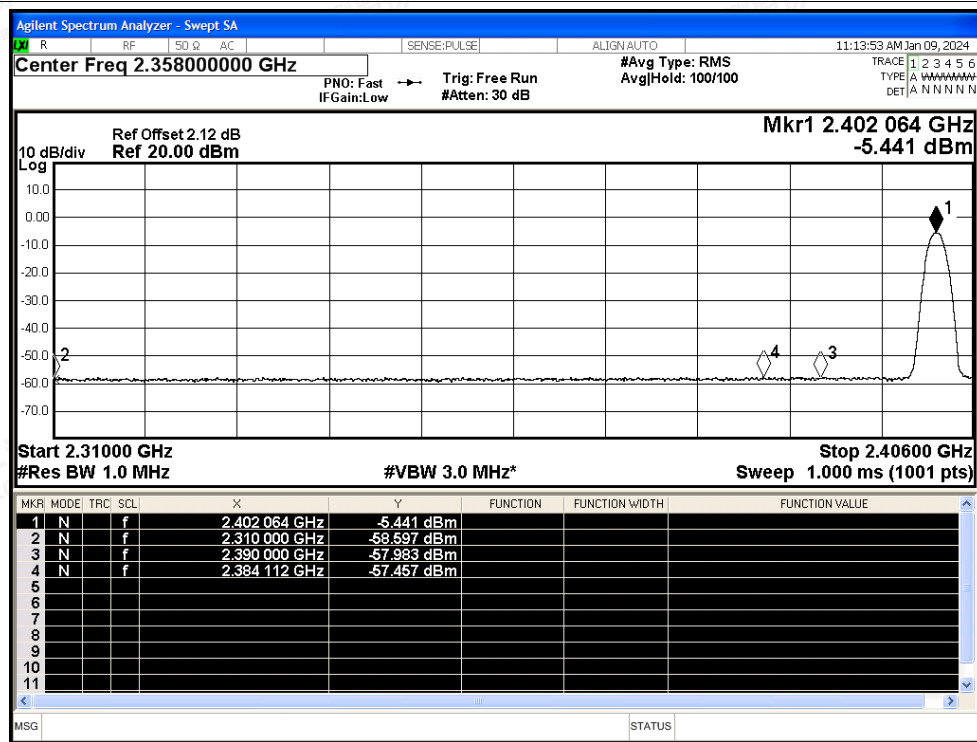




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

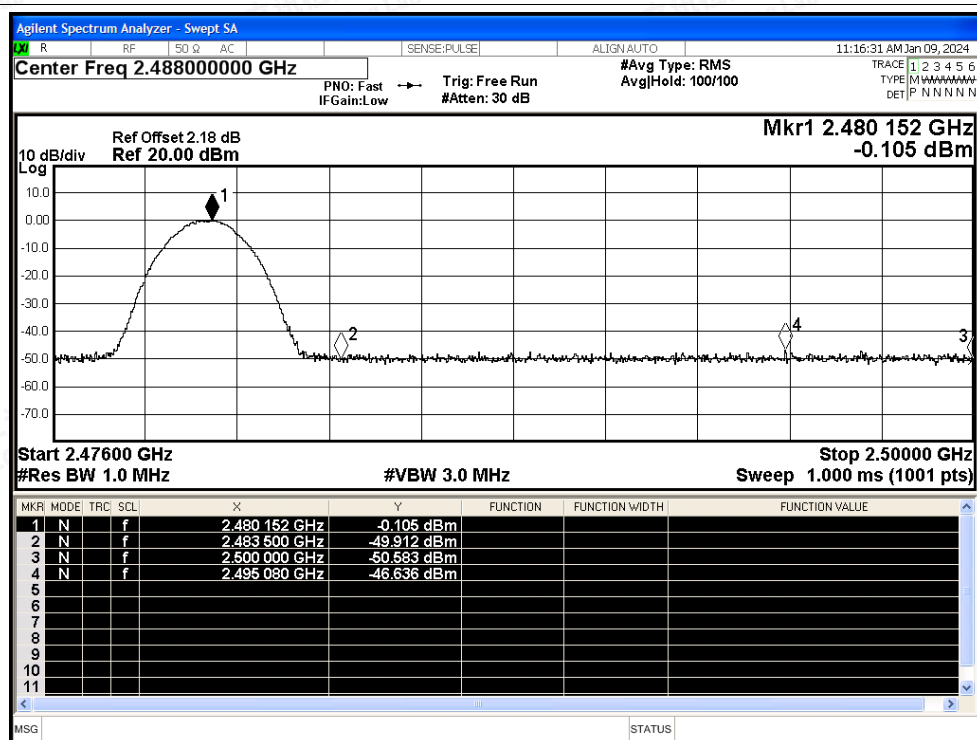


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

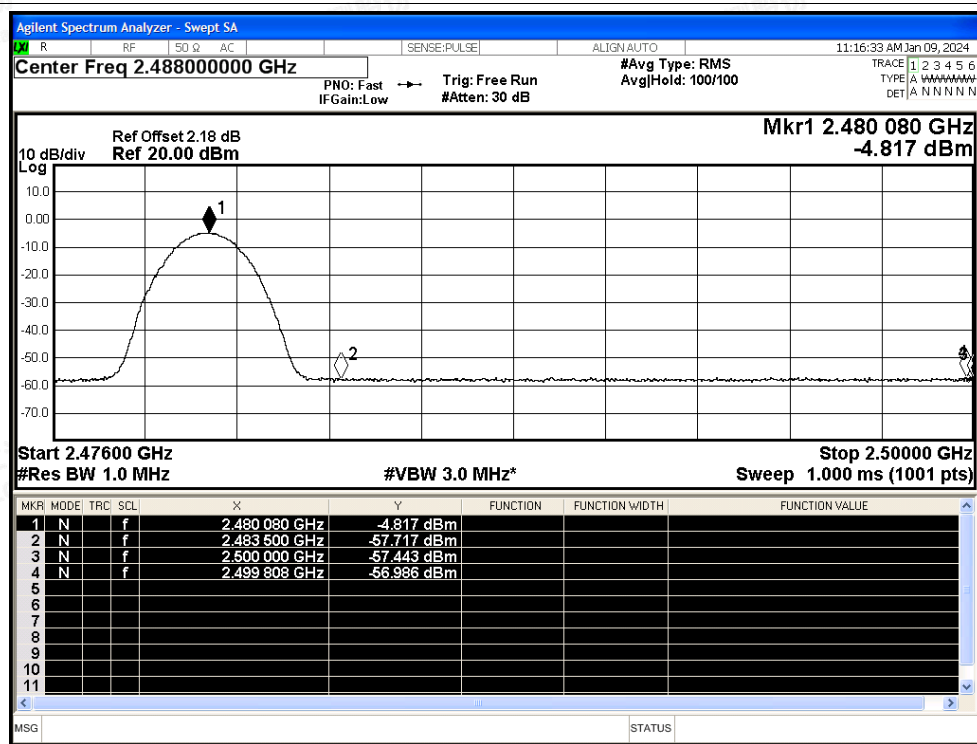




Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

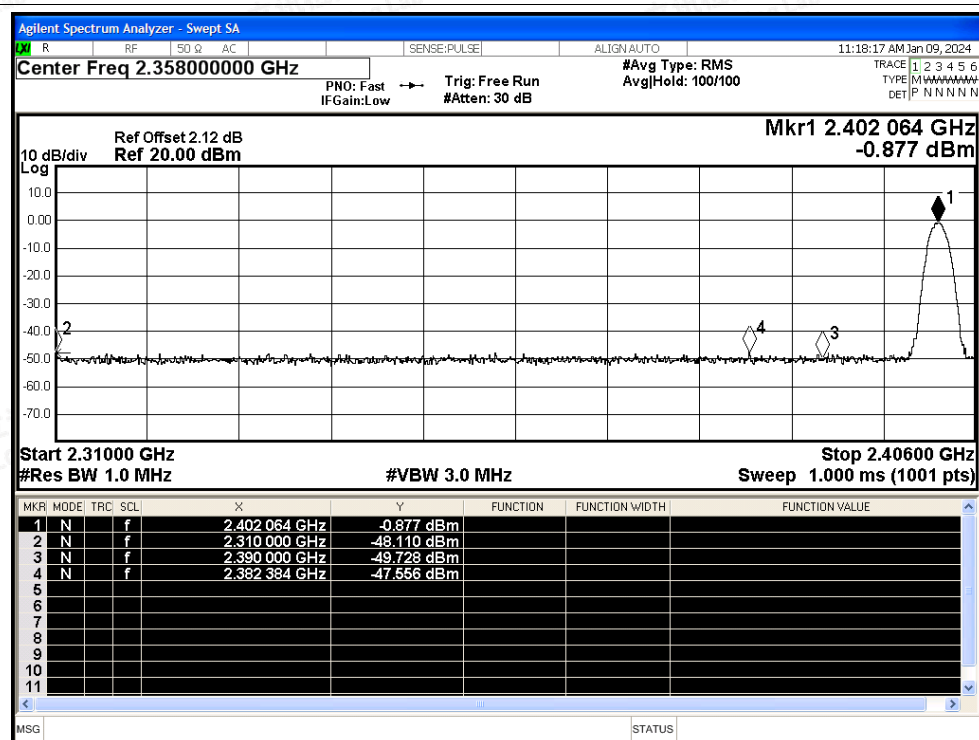

Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

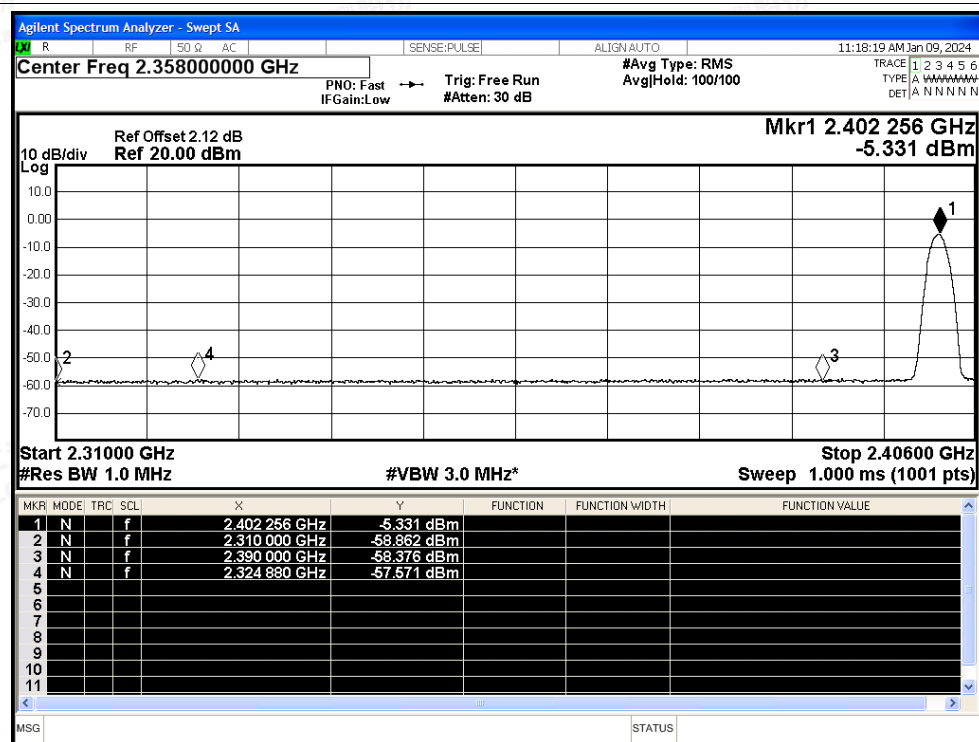

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

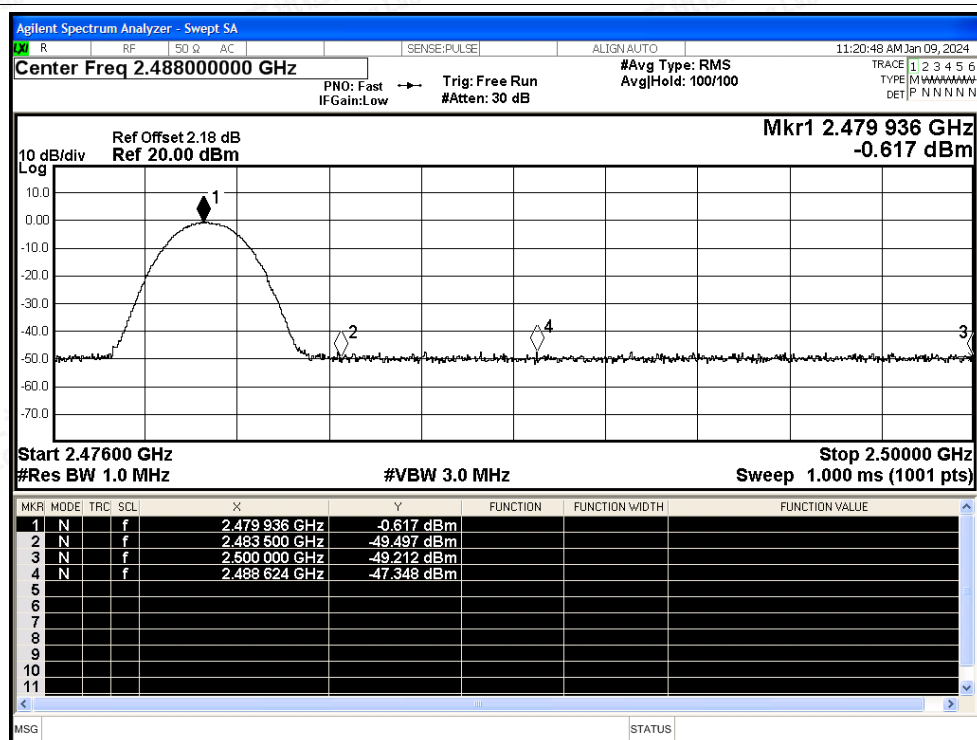

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

