

WH-200


User Documentation



1、Parameter

Model	WH-200	Type	Headset
wireless	V5.3+EDR	Protocol	A2DP、AVRCP、HSP、HFP
Frequency range	2.4-2.4835G	TX power	Class B
CVCTMDSP	Support	Effective	10Meter
FM Radio		Frequency	87-108MHz
Mico SD/TF Card	Support	Max support	32G
Speaker material	NsFeB	Specification	40mm
Sensistance	105±3dB	Distortion	≤1%At1KHz
Power To Bear	30mW	Frequency	20-20KHz
Resistance	32Ω	Recognition	Capacitance
Microphone	Support	Frequency	30-16KHz
Sensitivity	58±3dB	Recognition	Capacitance
Life time	12-15 hours	Charge port	USB
		Charge time	about 4hours
Standby	0.5-0.6mA		
Battery type	Lithium	Charge voltage	5V
Battery capacity	400 mA·H	Temperature	15° C to 35° C

2.Button,interface,switch

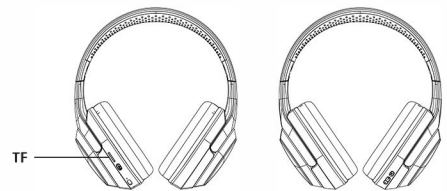

Search pairing name: **WH-200**

- Turn on key/pause key/make a call (short press to answer and end, long press to reject)
- Long press previous/short press to decrease volume
- Long press/short press to increase volume
- Short press the mode key to switch between Bluetooth, TF card, and FM mode (short press the power button to search for channels)

Red light on when charging
blue light on when fully charged

Be careful.

(Do not charge with a charging head exceeding 1.5A)

3. wireless

⊙ Switch, Hold down the, The ⊙ headset will then start. Light blue light and

green light flashing in each other. Headset wireless is on, Waiting for connection

state. wireless headset has place at this time in the state can be found.

2) Click on the wireless Settings in the phone Settings, select "open". This is opened Mobile phone wireless function.

3) Open the phone's bluetooth option, to find, search to wait for matching success Bluetooth, shown on the list of equipment available for WH-200 click WH-200 connection, at this time Headphones light flashing, says it has the connection is successful. Note: the part of the mobile phone connection, instructions Need to enter the password (0000).

3.1. TF Card Play

Insert TF to headphones in the card slot, long press the M key switch to the card read mode, indicator light flashing. System automatically decoded audio format file, at this point your favorite melodious songs Gently.

3.2. Switch on/hang up

Short by answering the telephone, long press for 3 seconds to hang up the phone.

4. Charging

Before charging, the headset off, to make the charging line headset with computer USB connection, The headset indicator light is red, the headset is charging.

The built-in battery capacity test and fire protection. Don't have to worry about charging time of the battery impact. Light automatically extinguished, said charging has been completed.

Low—power low battery automatically shut down, please charge as soon as possible, so as to meet the bluetooth requirements.

Note: please don't open the headset in the process of charging, otherwise damage the headset battery hardware life.

5. Matters needing attention

1) this headset is not waterproof, please pay attention to waterproof and moisture proof, to ensure that the system can be positive use.

2) it is the main support computer USB charging, don't change or connect it to the outside charging power supply.

3) headset can not be placed for a long time, please charge and discharge once a week, so as to extend the electricity The pool of life.

6. To record the line connection phone listening to music, please turn off the power supply, lest cause noise.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Statement: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.