

TEST REPORT

Product Name: bluetooth headset
FCC ID: 2BEUR-LJT07
Trademark: 音义炫
Model Number: LJ-T07, LJ-T02, LJ-T03, LJ-T04, LJ-T05, LJ-T09, LJ-T10, LJ-T11, LJ-T12, LJ-T13, LJ-T15, Y03, Y04, Y05, Y06, Y07, Y01, Y02, BT ROVER, BT MAX, BT PRIME, BT JAZZ
Prepared For: Maoming Lanjun Technology Co. , Ltd.
Address: Dianbai district, Maoming city electric town Haimao village committee Dongfeng Road Yang Guohui Housing
Manufacturer: Maoming Lanjun Technology Co. , Ltd.
Address: Dianbai district, Maoming city electric town Haimao village committee Dongfeng Road Yang Guohui Housing
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinxhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 18, 2024
Sample tested Date: Jan. 18, 2024 to Jan. 30, 2024
Issue Date: Jan. 30, 2024
Report No.: CTB240126070RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	35
8.1 Block Diagram Of Test Setup	35
8.2 Limit	35
8.3 Test procedure	35
8.4 Test Result	36
9. CONDUCTED PEAK OUTPUT POWER	50
9.1 Block Diagram Of Test Setup	50
9.2 Limit	50
9.3 Test procedure	50
9.4 Test Result	51
10. 20DB OCCUPIED BANDWIDTH	58
10.1 Block Diagram Of Test Setup	58
10.2 Limit	58
10.3 Test procedure	58
10.4 Test Result	58
11. CARRIER FREQUENCIES SEPARATION	65
11.1 Block Diagram Of Test Setup	65
11.2 Limit	65
11.3 Test procedure	65
11.4 Test Result	65
12. HOPPING CHANNEL NUMBER	72
12.1 Block Diagram Of Test Setup	72
12.2 Limit	72
12.3 Test procedure	72
12.4 Test Result	72

13. DWELL TIME	75
13.1 Block Diagram Of Test Setup	75
13.2 Limit	75
13.3 Test procedure	75
13.4 Test Result	76
14. PSEUDORANDOM FREQUENCY	83
14.1 Limit	83
14.2 Test procedure	83
14.3 Test Result	84
15. ANTENNA REQUIREMENT	85
16. EUT TEST SETUP PHOTOGRAPHS	86

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240126070RFX	Jan. 30, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): LJ-T07, LJ-T02, LJ-T03, LJ-T04, LJ-T05, LJ-T09, LJ-T10, LJ-T11, LJ-T12, LJ-T13, LJ-T15, Y03, Y04, Y05, Y06, Y07, Y01, Y02, BT ROVER, BT MAX, BT PRIME, BT JAZZ

Model Description: All the model are the same circuit and RF module, only for model name.
Test sample model: LJ-T07

Bluetooth Version: Bluetooth 5.1

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz

Max. RF output power: Bluetooth: 4.677dBm

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna installation: Bluetooth: Ceramic antenna

Antenna Gain: Bluetooth: 2.48dBi

Ratings: DC 5V charging from adapter
DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

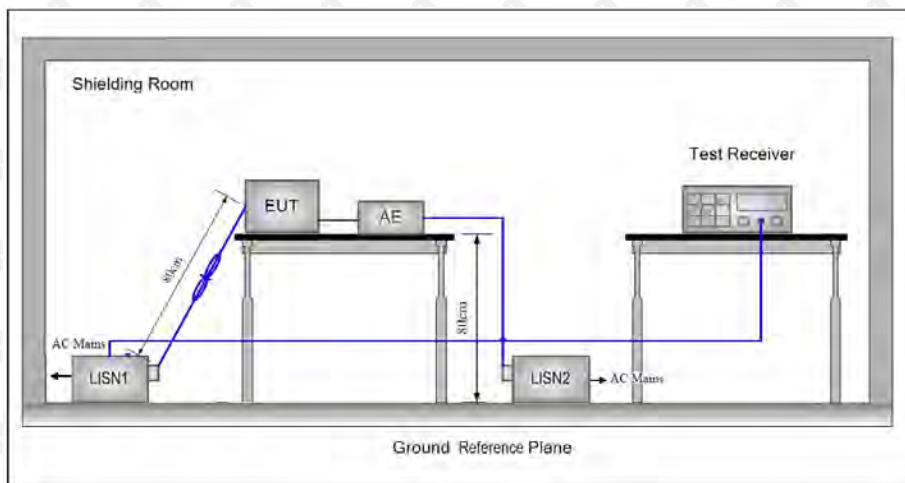

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

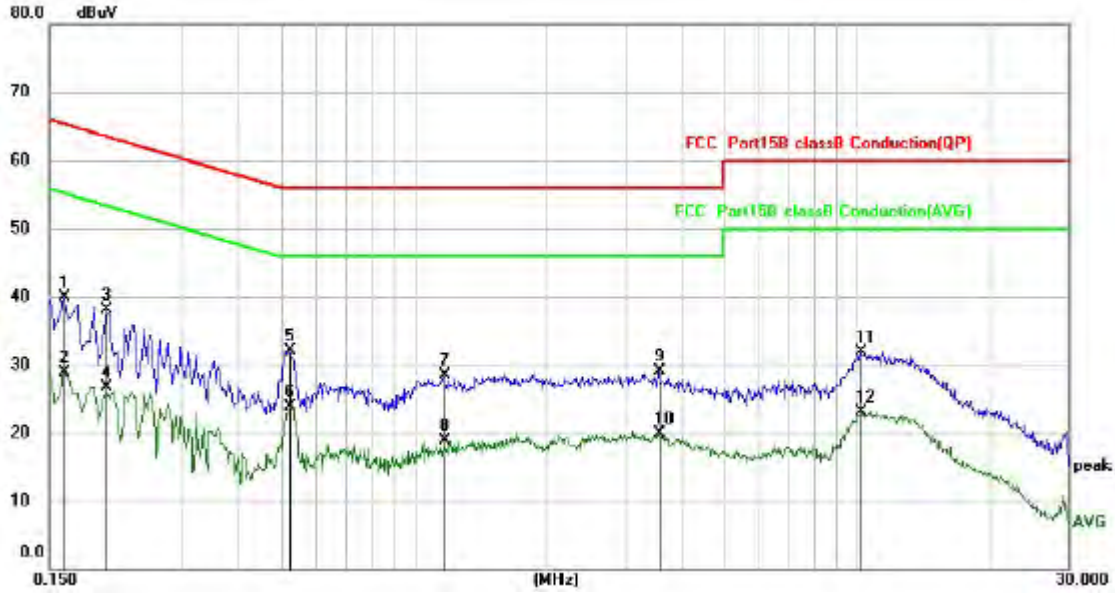


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	29.87	9.95	39.82	65.36	-25.54	QP
2		0.1620	18.99	9.95	28.94	55.36	-26.42	AVG
3		0.2020	28.24	9.95	38.19	63.53	-25.34	QP
4		0.2020	16.77	9.95	26.72	53.53	-26.81	AVG
5		0.5220	22.04	9.99	32.03	56.00	-23.97	QP
6	*	0.5220	14.00	9.99	23.99	46.00	-22.01	AVG
7		1.1780	18.46	10.02	28.48	56.00	-27.52	QP
8		1.1780	8.94	10.02	18.96	46.00	-27.04	AVG
9		3.5740	18.87	10.24	29.11	56.00	-26.89	QP
10		3.5740	9.60	10.24	19.84	46.00	-26.16	AVG
11		10.1740	21.34	10.59	31.93	60.00	-28.07	QP
12		10.1740	12.58	10.59	23.17	50.00	-26.83	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

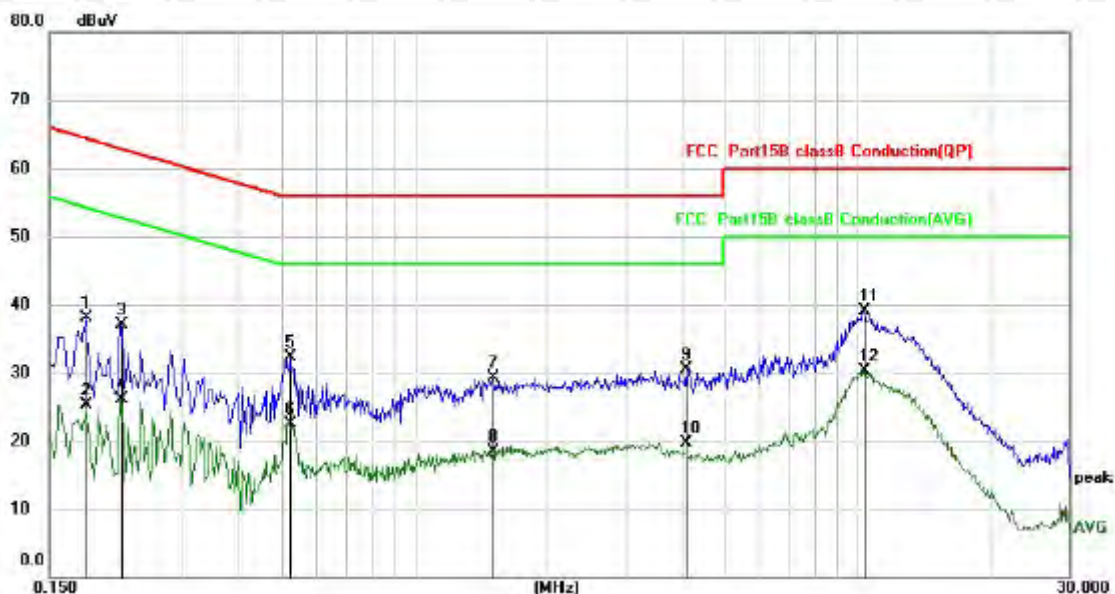

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1819	28.07	9.95	38.02	64.40	-26.38	QP
2		0.1819	15.41	9.95	25.36	54.40	-29.04	AVG
3		0.2180	27.21	9.95	37.16	62.89	-25.73	QP
4		0.2180	16.22	9.95	26.17	52.89	-26.72	AVG
5		0.5260	22.24	9.99	32.23	56.00	-23.77	QP
6		0.5260	12.60	9.99	22.59	46.00	-23.41	AVG
7		1.4980	19.24	10.05	29.29	56.00	-26.71	QP
8		1.4980	8.46	10.05	18.51	46.00	-27.49	AVG
9		4.1019	20.14	10.29	30.43	56.00	-25.57	QP
10		4.1019	9.39	10.29	19.68	46.00	-26.32	AVG
11		10.3100	28.57	10.59	39.16	60.00	-20.84	QP
12	*	10.3100	19.75	10.59	30.34	50.00	-19.66	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

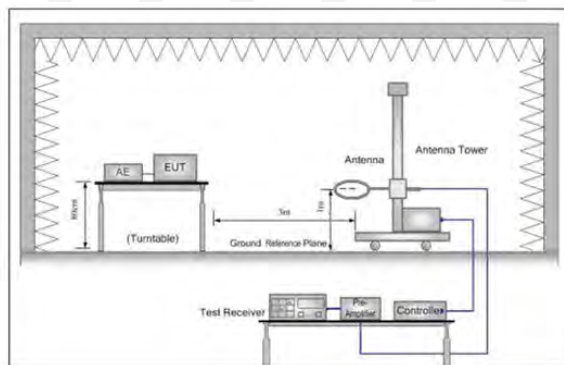


Figure 1. Below 30MHz

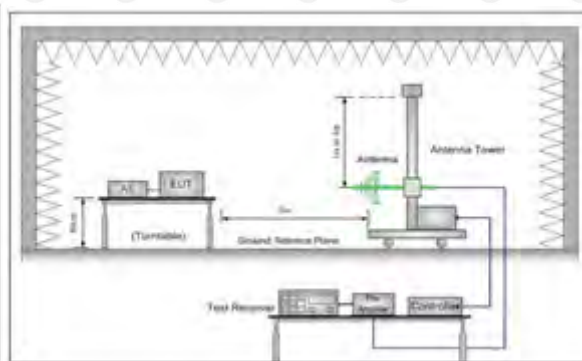


Figure 2. 30MHz to 1GHz

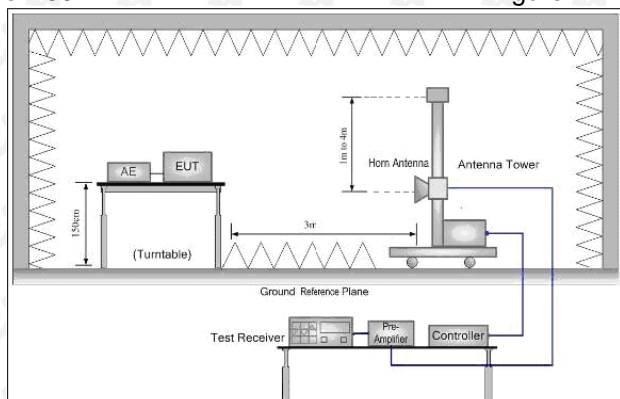


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Left ear:

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		40.0644	26.79	-4.78	22.01	40.00	-17.99	QP
2		58.9217	26.98	-6.72	20.26	40.00	-19.74	QP
3		155.9101	26.95	-3.38	23.57	43.50	-19.93	QP
4		287.9904	27.66	-5.26	22.40	46.00	-23.60	QP
5		500.3011	26.68	0.05	26.73	46.00	-19.27	QP
6	*	908.0731	26.36	6.95	33.31	46.00	-12.69	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Antenna polarity: V
Worst case-GFSK(low channel)

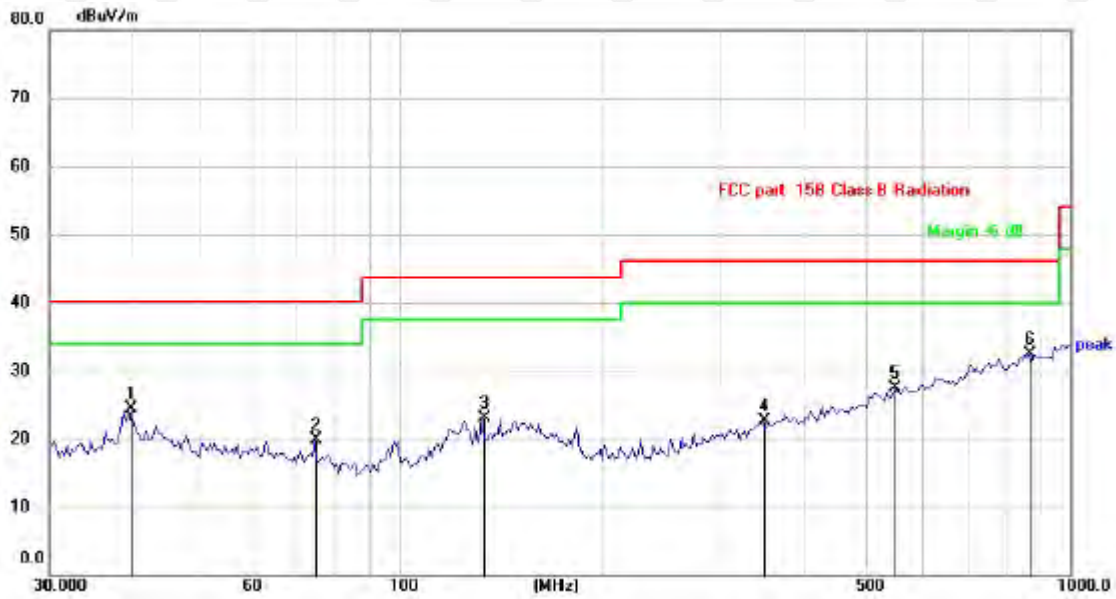

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.3681	29.46	-4.94	24.52	40.00	-15.48	QP
2		74.6569	28.46	-8.53	19.93	40.00	-20.07	QP
3		133.1511	27.88	-4.68	23.20	43.50	-20.30	QP
4		349.2500	26.14	-3.46	22.68	46.00	-23.32	QP
5		550.9480	26.19	1.36	27.55	46.00	-18.45	QP
6	*	869.1302	25.79	6.73	32.52	46.00	-13.48	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit


Right ear:
 Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)

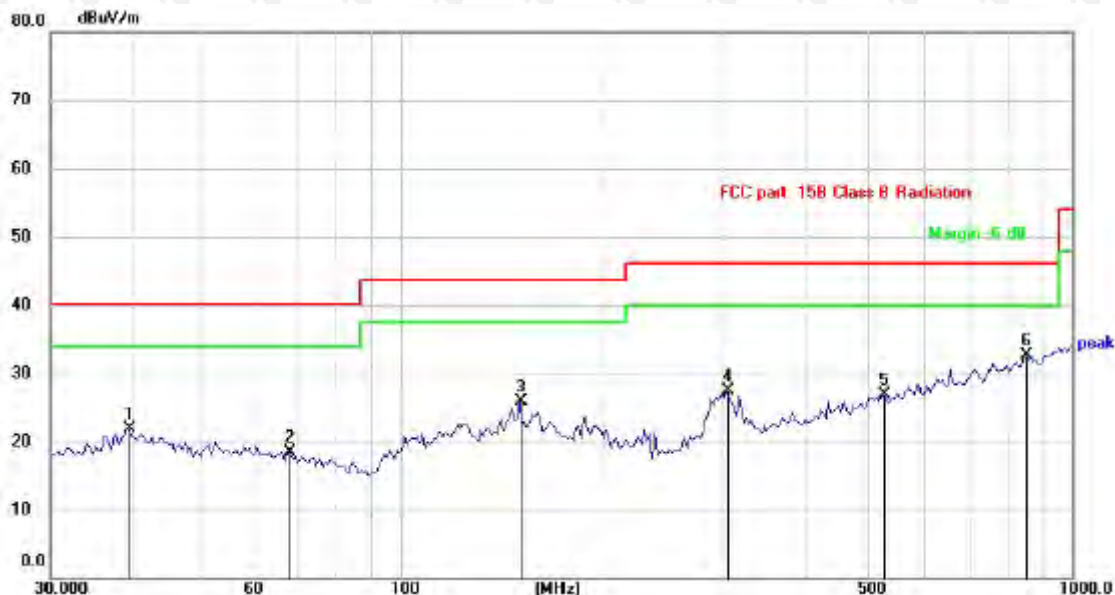

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.0245	26.86	-5.03	21.83	40.00	-18.17	QP
2		68.3908	26.42	-7.84	18.58	40.00	-21.42	QP
3		150.5378	29.06	-3.19	25.87	43.50	-17.63	QP
4		306.2164	32.06	-4.58	27.48	46.00	-18.52	QP
5		522.7180	26.20	0.63	26.83	46.00	-19.17	QP
6	*	846.5708	26.02	6.63	32.65	46.00	-13.35	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
 Worst case-GFSK(low channel)

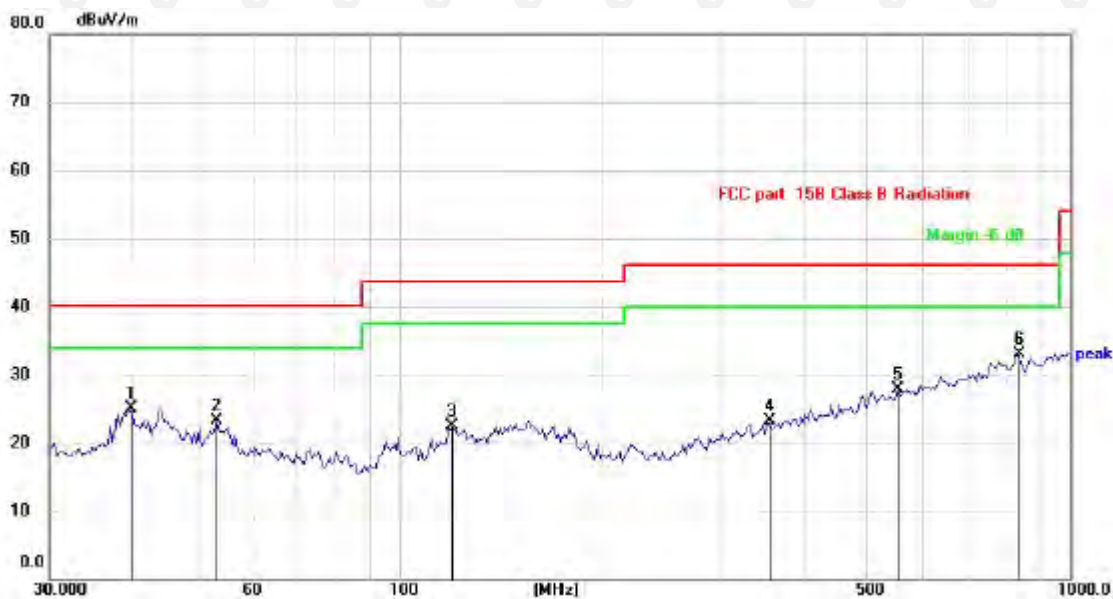

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		39.3681	30.13	-4.94	25.19	40.00	-14.81	QP
2		53.5052	29.93	-6.67	23.26	40.00	-16.74	QP
3		118.8095	28.03	-5.47	22.56	43.50	-20.94	QP
4		355.4273	26.51	-3.30	23.21	46.00	-22.79	QP
5		555.7990	26.36	1.49	27.85	46.00	-18.15	QP
6	*	831.8574	26.50	6.56	33.06	46.00	-12.94	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Left ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804	56.89	-3.65	53.24	74.00	-20.76	peak
4804	49.17	-3.65	45.52	54.00	-8.48	AVG
7206	60.29	-0.95	59.34	74.00	-14.66	peak
7206	40.06	-0.95	39.11	54.00	-14.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4804	58.95	-3.65	55.30	74.00	-18.70	peak
4804	50.09	-3.65	46.44	54.00	-7.56	AVG
7206	60.93	-0.95	59.98	74.00	-14.02	peak
7206	41.82	-0.95	40.87	54.00	-13.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	60.15	-3.54	56.61	74.00	-17.39	peak
4882.00	46.90	-3.54	43.36	54.00	-10.64	AVG
7323.00	56.46	-0.81	55.65	74.00	-18.35	peak
7323.00	42.13	-0.81	41.32	54.00	-12.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	59.10	-3.54	55.56	74.00	-18.44	peak
4882.00	48.93	-3.54	45.39	54.00	-8.61	AVG
7323.00	56.20	-0.81	55.39	74.00	-18.61	peak
7323.00	41.62	-0.81	40.81	54.00	-13.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.64	-3.43	55.21	74.00	-18.79	peak
4960	47.53	-3.44	44.09	54.00	-9.91	AVG
7440	61.28	-0.77	60.51	74.00	-13.49	peak
7440	42.34	-0.77	41.57	54.00	-12.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	57.06	-3.43	53.63	74.00	-20.37	peak
4960	48.79	-3.44	45.35	54.00	-8.65	AVG
7440	58.91	-0.77	58.14	74.00	-15.86	peak
7440	39.87	-0.77	39.10	54.00	-14.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.94	-5.81	52.13	74.00	-21.87	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.41	-5.84	50.57	74.00	-23.43	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.50	-5.81	51.69	74.00	-22.31	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.90	-5.84	50.06	74.00	-23.94	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.70	-5.81	49.89	74.00	-24.11	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.56	-6.06	47.50	74.00	-26.50	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.84	-5.81	51.03	74.00	-22.97	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.90	-6.06	48.84	74.00	-25.16	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.64	-5.81	48.83	74.00	-25.17	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.18	-5.84	48.34	74.00	-25.66	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.79	-5.81	49.98	74.00	-24.02	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.94	-5.84	49.10	74.00	-24.90	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.91	-5.81	52.10	74.00	-21.90	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.93	-6.06	48.87	74.00	-25.13	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.72	-5.81	49.91	74.00	-24.09	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.86	-6.06	48.80	74.00	-25.20	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right ear:

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	58.62	-3.65	54.97	74.00	-19.03	peak
4804	48.92	-3.65	45.27	54.00	-8.73	AVG
7206	60.22	-0.95	59.27	74.00	-14.73	peak
7206	40.67	-0.95	39.72	54.00	-14.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	59.03	-3.65	55.38	74.00	-18.62	peak
4804	48.67	-3.65	45.02	54.00	-8.98	AVG
7206	60.46	-0.95	59.51	74.00	-14.49	peak
7206	40.29	-0.95	39.34	54.00	-14.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	60.09	-3.54	56.55	74.00	-17.45	peak
4882.00	49.20	-3.54	45.66	54.00	-8.34	AVG
7323.00	57.18	-0.81	56.37	74.00	-17.63	peak
7323.00	41.73	-0.81	40.92	54.00	-13.08	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	57.18	-3.54	53.64	74.00	-20.36	peak
4882.00	50.09	-3.54	46.55	54.00	-7.45	AVG
7323.00	56.28	-0.81	55.47	74.00	-18.53	peak
7323.00	41.83	-0.81	41.02	54.00	-12.98	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	57.88	-3.43	54.45	74.00	-19.55	peak
4960	47.92	-3.44	44.48	54.00	-9.52	AVG
7440	61.07	-0.77	60.30	74.00	-13.70	peak
7440	42.14	-0.77	41.37	54.00	-12.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.54	-3.43	55.11	74.00	-18.89	peak
4960	47.25	-3.44	43.81	54.00	-10.19	AVG
7440	60.67	-0.77	59.90	74.00	-14.10	peak
7440	42.05	-0.77	41.28	54.00	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.84	-5.81	52.03	74.00	-21.97	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.80	-5.84	48.96	74.00	-25.04	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.87	-5.81	50.06	74.00	-23.94	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.71	-5.84	50.87	74.00	-23.13	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.09	-5.81	48.28	74.00	-25.72	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.00	-6.06	47.94	74.00	-26.06	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.59	-5.81	51.78	74.00	-22.22	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.12	-6.06	49.06	74.00	-24.94	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.42	-5.81	49.61	74.00	-24.39	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.87	-5.84	48.03	74.00	-25.97	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	54.25	-5.81	48.44	74.00	-25.56	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.27	-5.84	48.43	74.00	-25.57	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.14	-5.81	51.33	74.00	-22.67	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.37	-6.06	50.31	74.00	-23.69	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.96	-5.81	50.15	74.00	-23.85	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.21	-6.06	48.15	74.00	-25.85	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

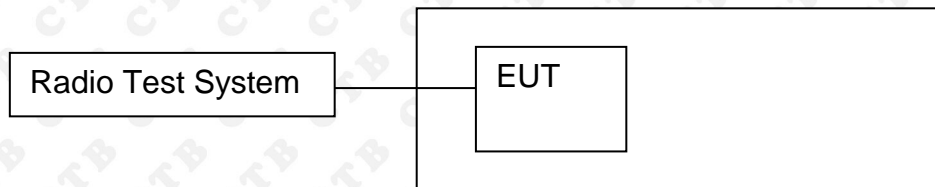

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:



RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold

8.4 Test Result

Left ear:

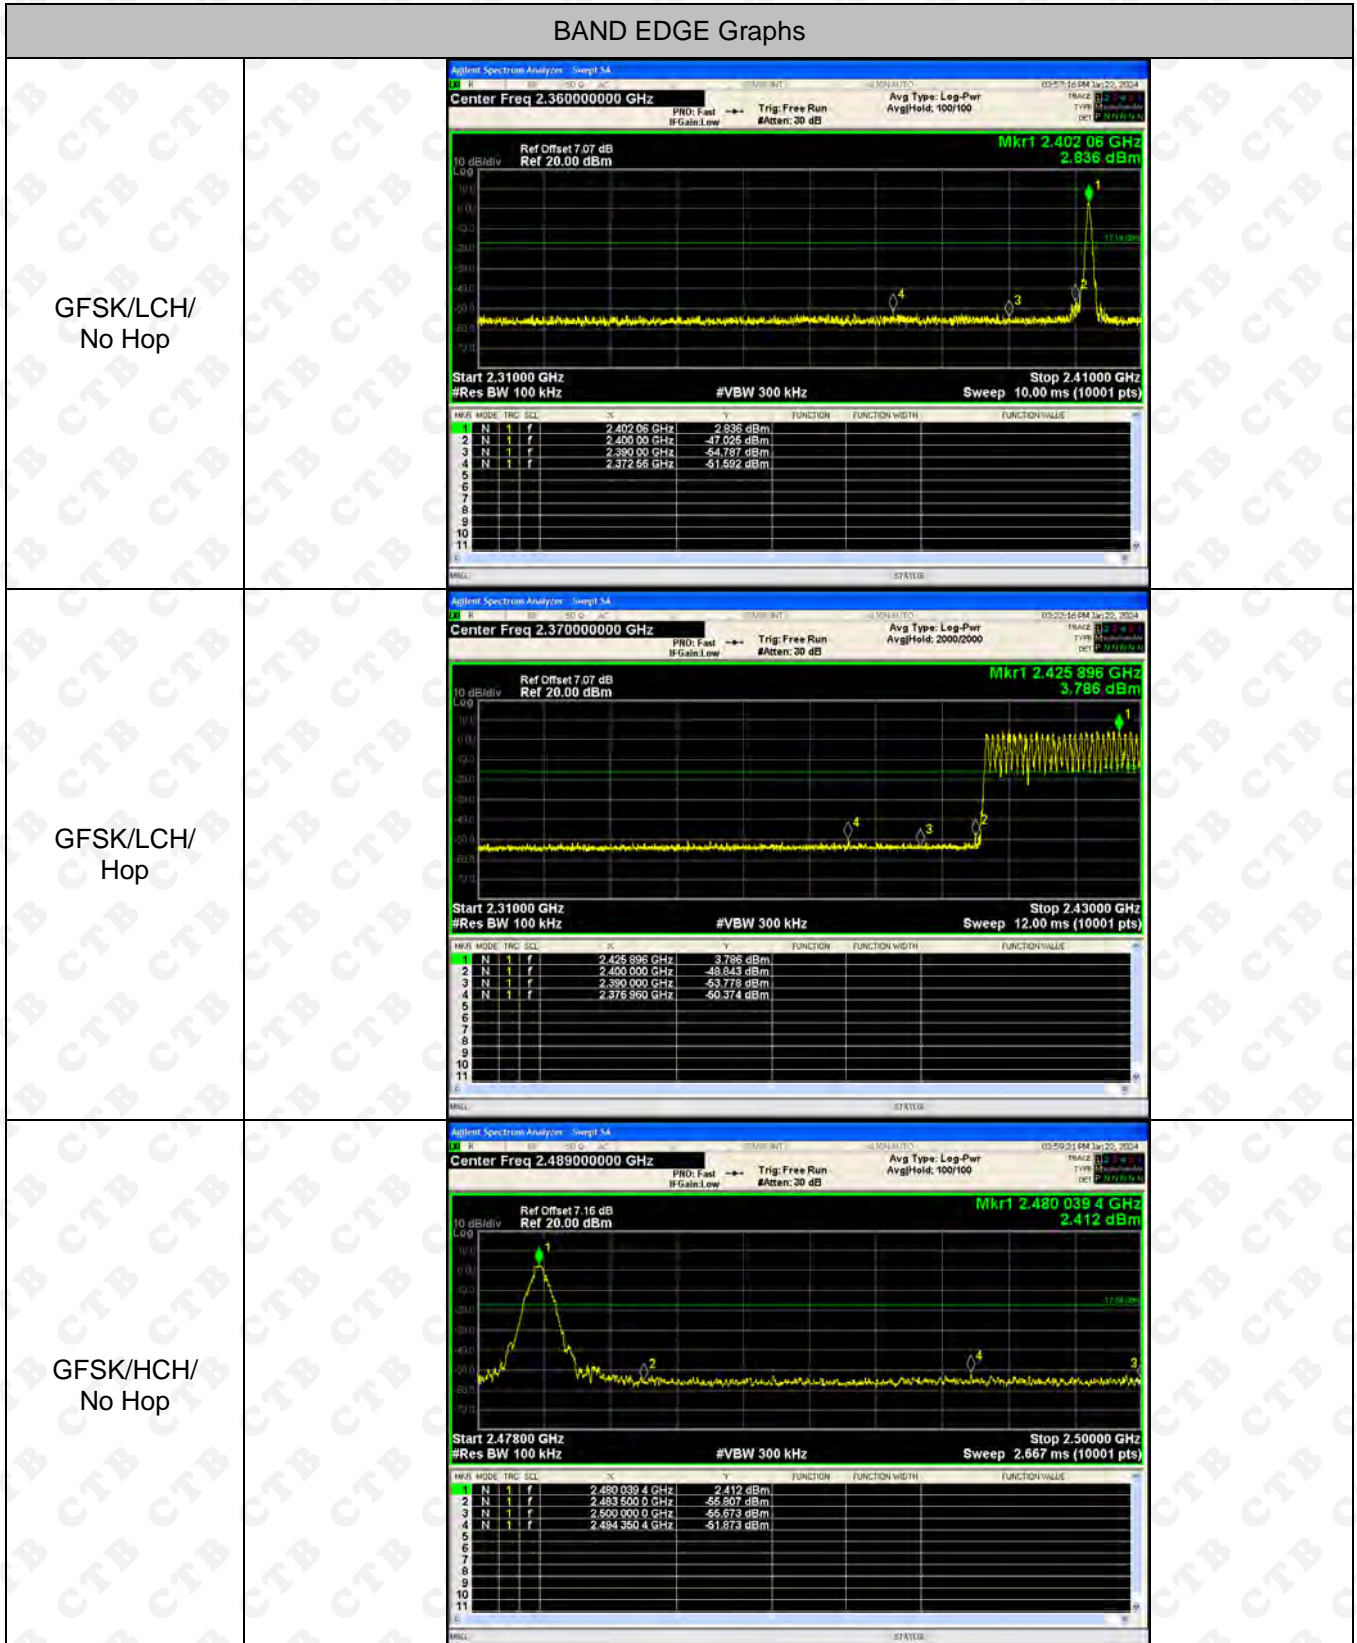

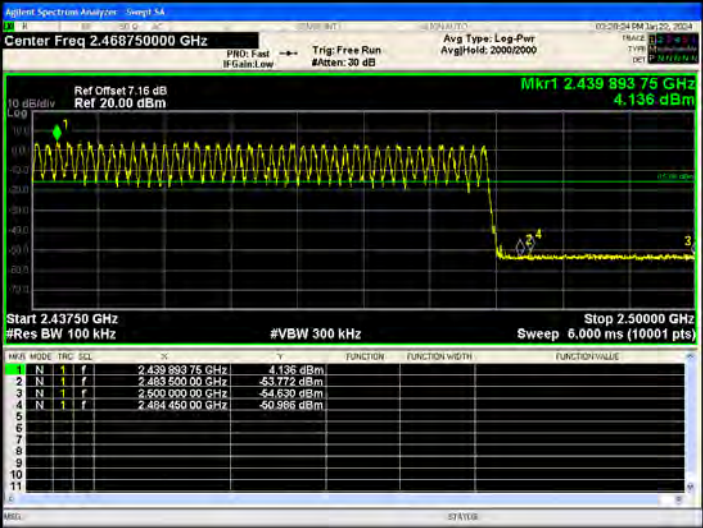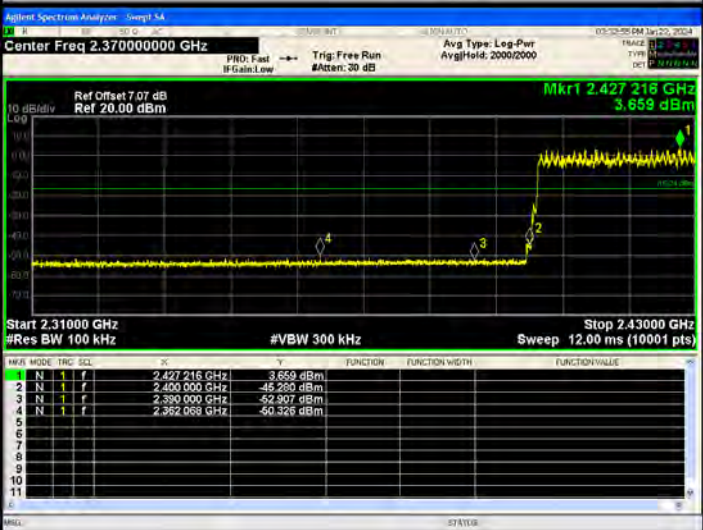
<p>GFSK/HCH/ Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.439 893 75 GHz</td> <td>4.136 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.468 500 00 GHz</td> <td>-53.772 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 00 GHz</td> <td>-54.639 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494 450 00 GHz</td> <td>-50.985 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 893 75 GHz	4.136 dBm				2	N	1	f	2.468 500 00 GHz	-53.772 dBm				3	N	1	f	2.490 000 00 GHz	-54.639 dBm				4	N	1	f	2.494 450 00 GHz	-50.985 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.439 893 75 GHz	4.136 dBm																																									
2	N	1	f	2.468 500 00 GHz	-53.772 dBm																																									
3	N	1	f	2.490 000 00 GHz	-54.639 dBm																																									
4	N	1	f	2.494 450 00 GHz	-50.985 dBm																																									
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 19 GHz</td> <td>2.563 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-42.378 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 00 GHz</td> <td>-55.216 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.367 16 GHz</td> <td>-51.401 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 19 GHz	2.563 dBm				2	N	1	f	2.400 00 GHz	-42.378 dBm				3	N	1	f	2.399 00 GHz	-55.216 dBm				4	N	1	f	2.367 16 GHz	-51.401 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 19 GHz	2.563 dBm																																									
2	N	1	f	2.400 00 GHz	-42.378 dBm																																									
3	N	1	f	2.399 00 GHz	-55.216 dBm																																									
4	N	1	f	2.367 16 GHz	-51.401 dBm																																									
<p>$\pi/4$DQPSK/LCH/ Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.427 216 GHz</td> <td>3.659 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-45.280 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-52.307 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.362 658 GHz</td> <td>-50.326 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.427 216 GHz	3.659 dBm				2	N	1	f	2.400 000 GHz	-45.280 dBm				3	N	1	f	2.390 000 GHz	-52.307 dBm				4	N	1	f	2.362 658 GHz	-50.326 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.427 216 GHz	3.659 dBm																																									
2	N	1	f	2.400 000 GHz	-45.280 dBm																																									
3	N	1	f	2.390 000 GHz	-52.307 dBm																																									
4	N	1	f	2.362 658 GHz	-50.326 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.489000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.480 204 4 GHz 2.688 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 204 4 GHz</td> <td>2.688 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.844 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 0 GHz</td> <td>-54.266 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 731 6 GHz</td> <td>-52.925 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 204 4 GHz	2.688 dBm				2	N	1	f	2.483 500 0 GHz	-54.844 dBm				3	N	1	f	2.490 000 0 GHz	-54.266 dBm				4	N	1	f	2.493 731 6 GHz	-52.925 dBm			
MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 204 4 GHz	2.688 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.844 dBm																																									
3	N	1	f	2.490 000 0 GHz	-54.266 dBm																																									
4	N	1	f	2.493 731 6 GHz	-52.925 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.468750000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.441 206 26 GHz 4.112 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 206 26 GHz</td> <td>4.112 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 500 00 GHz</td> <td>-53.563 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.460 000 00 GHz</td> <td>-54.284 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 750 00 GHz</td> <td>-50.895 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 206 26 GHz	4.112 dBm				2	N	1	f	2.463 500 00 GHz	-53.563 dBm				3	N	1	f	2.460 000 00 GHz	-54.284 dBm				4	N	1	f	2.489 750 00 GHz	-50.895 dBm			
MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.441 206 26 GHz	4.112 dBm																																									
2	N	1	f	2.463 500 00 GHz	-53.563 dBm																																									
3	N	1	f	2.460 000 00 GHz	-54.284 dBm																																									
4	N	1	f	2.489 750 00 GHz	-50.895 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.360000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 92 GHz 1.972 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 92 GHz</td> <td>1.972 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-41.821 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-55.215 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.369 32 GHz</td> <td>-51.959 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 92 GHz	1.972 dBm				2	N	1	f	2.400 00 GHz	-41.821 dBm				3	N	1	f	2.390 00 GHz	-55.215 dBm				4	N	1	f	2.369 32 GHz	-51.959 dBm			
MKR	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 92 GHz	1.972 dBm																																									
2	N	1	f	2.400 00 GHz	-41.821 dBm																																									
3	N	1	f	2.390 00 GHz	-55.215 dBm																																									
4	N	1	f	2.369 32 GHz	-51.959 dBm																																									


<p>8DPSK /LCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.424 888 GHz</td> <td>3.470 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-40.864 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-54.169 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.380 188 GHz</td> <td>-50.175 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.424 888 GHz	3.470 dBm				2	N	1	f	2.400 000 GHz	-40.864 dBm				3	N	1	f	2.390 000 GHz	-54.169 dBm				4	N	1	f	2.380 188 GHz	-50.175 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.424 888 GHz	3.470 dBm																																									
2	N	1	f	2.400 000 GHz	-40.864 dBm																																									
3	N	1	f	2.390 000 GHz	-54.169 dBm																																									
4	N	1	f	2.380 188 GHz	-50.175 dBm																																									
<p>8DPSK /HCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 072 4 GHz</td> <td>2.290 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-56.440 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-57.322 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 152 2 GHz</td> <td>-52.228 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 072 4 GHz	2.290 dBm				2	N	1	f	2.483 500 0 GHz	-56.440 dBm				3	N	1	f	2.500 000 0 GHz	-57.322 dBm				4	N	1	f	2.488 152 2 GHz	-52.228 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 072 4 GHz	2.290 dBm																																									
2	N	1	f	2.483 500 0 GHz	-56.440 dBm																																									
3	N	1	f	2.500 000 0 GHz	-57.322 dBm																																									
4	N	1	f	2.488 152 2 GHz	-52.228 dBm																																									
<p>8DPSK /HCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.442 206 25 GHz</td> <td>3.832 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.182 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-53.264 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 812 50 GHz</td> <td>-50.069 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.442 206 25 GHz	3.832 dBm				2	N	1	f	2.483 500 0 GHz	-54.182 dBm				3	N	1	f	2.500 000 0 GHz	-53.264 dBm				4	N	1	f	2.488 812 50 GHz	-50.069 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.442 206 25 GHz	3.832 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.182 dBm																																									
3	N	1	f	2.500 000 0 GHz	-53.264 dBm																																									
4	N	1	f	2.488 812 50 GHz	-50.069 dBm																																									

RF Conducted Spurious Emissions Graphs

GFSK/LCH

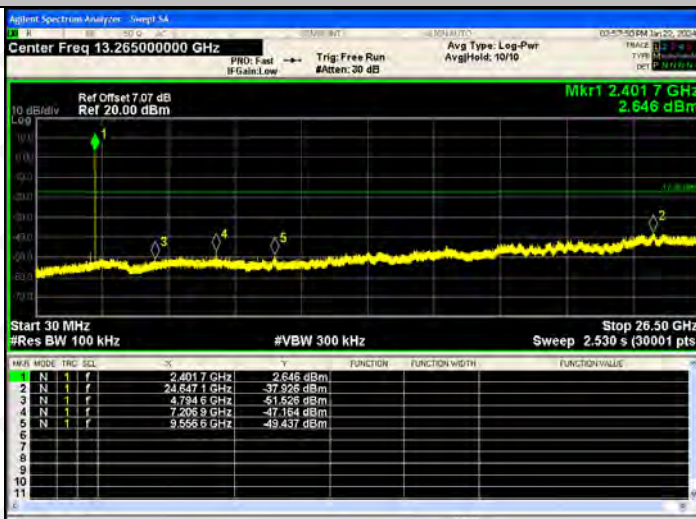


GFSK/MCH

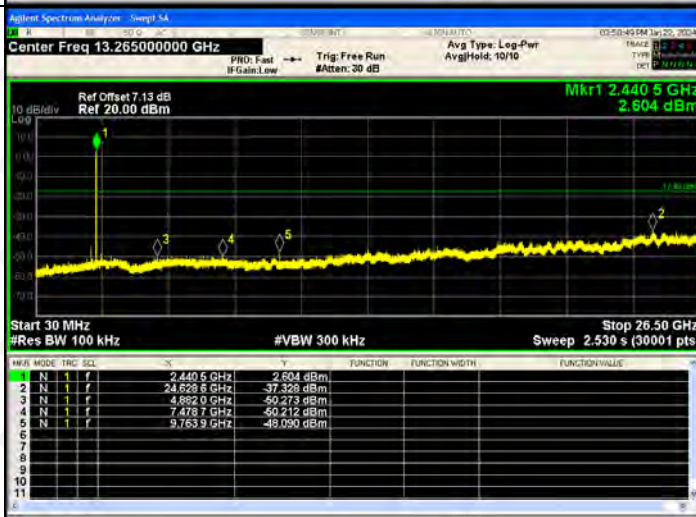

GFSK/HCH



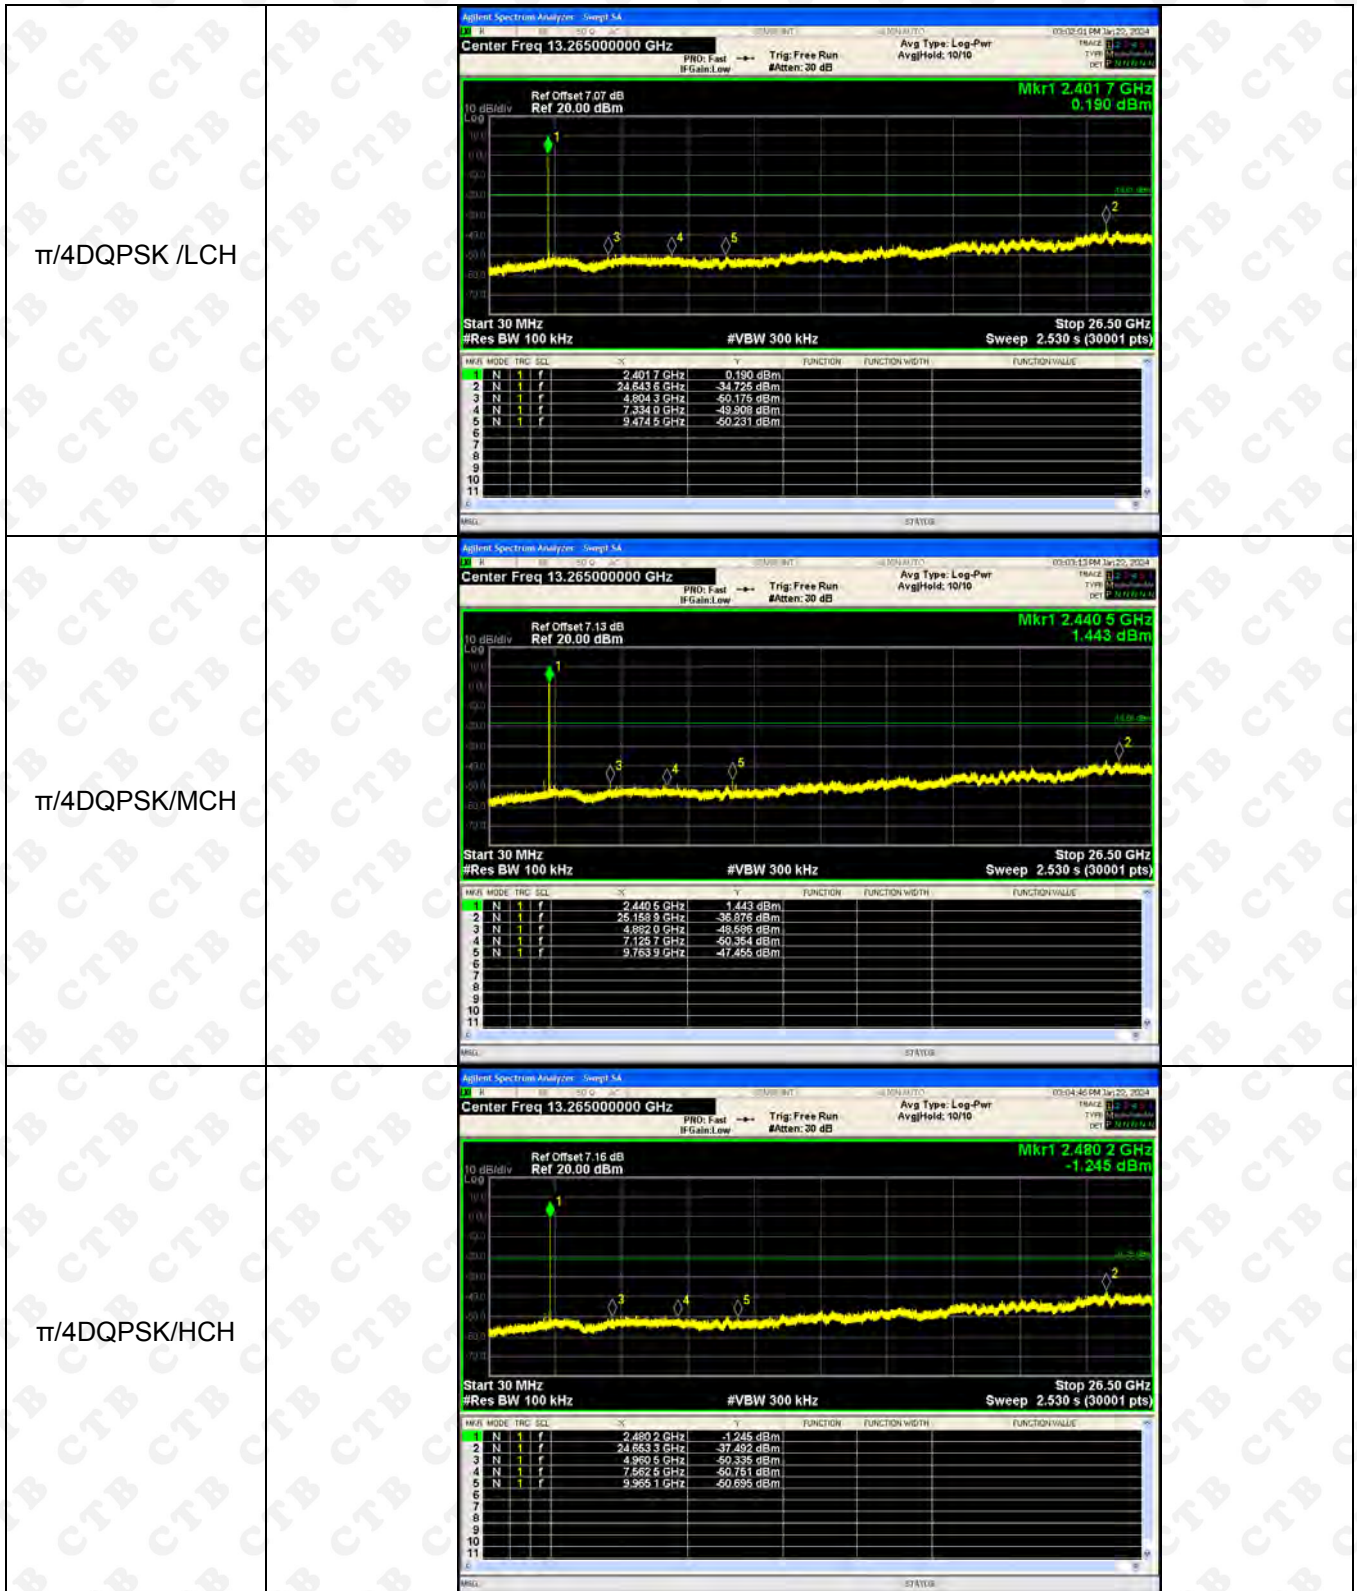


<p>8DPSK /LCH</p>	<table border="1"> <thead> <tr> <th>Mk#</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4026 GHz</td> <td>2.741 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6718 GHz</td> <td>-36.674 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8934 GHz</td> <td>-50.022 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2050 GHz</td> <td>-50.039 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.5989 GHz</td> <td>-49.521 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4026 GHz	2.741 dBm				2	N	1	f	24.6718 GHz	-36.674 dBm				3	N	1	f	4.8934 GHz	-50.022 dBm				4	N	1	f	7.2050 GHz	-50.039 dBm				5	N	1	f	9.5989 GHz	-49.521 dBm				
Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4026 GHz	2.741 dBm																																																			
2	N	1	f	24.6718 GHz	-36.674 dBm																																																			
3	N	1	f	4.8934 GHz	-50.022 dBm																																																			
4	N	1	f	7.2050 GHz	-50.039 dBm																																																			
5	N	1	f	9.5989 GHz	-49.521 dBm																																																			
<p>8DPSK /MCH</p>	<table border="1"> <thead> <tr> <th>Mk#</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>1.475 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.1333 GHz</td> <td>-37.374 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8992 GHz</td> <td>-47.274 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4551 GHz</td> <td>-50.653 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7539 GHz</td> <td>-47.834 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	1.475 dBm				2	N	1	f	25.1333 GHz	-37.374 dBm				3	N	1	f	4.8992 GHz	-47.274 dBm				4	N	1	f	7.4551 GHz	-50.653 dBm				5	N	1	f	9.7539 GHz	-47.834 dBm				
Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4414 GHz	1.475 dBm																																																			
2	N	1	f	25.1333 GHz	-37.374 dBm																																																			
3	N	1	f	4.8992 GHz	-47.274 dBm																																																			
4	N	1	f	7.4551 GHz	-50.653 dBm																																																			
5	N	1	f	9.7539 GHz	-47.834 dBm																																																			
<p>8DPSK /HCH</p>	<table border="1"> <thead> <tr> <th>Mk#</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>2.657 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6630 GHz</td> <td>-36.443 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9905 GHz</td> <td>-50.247 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5737 GHz</td> <td>-49.399 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9201 GHz</td> <td>-49.789 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	2.657 dBm				2	N	1	f	24.6630 GHz	-36.443 dBm				3	N	1	f	4.9905 GHz	-50.247 dBm				4	N	1	f	7.5737 GHz	-49.399 dBm				5	N	1	f	9.9201 GHz	-49.789 dBm				
Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4802 GHz	2.657 dBm																																																			
2	N	1	f	24.6630 GHz	-36.443 dBm																																																			
3	N	1	f	4.9905 GHz	-50.247 dBm																																																			
4	N	1	f	7.5737 GHz	-49.399 dBm																																																			
5	N	1	f	9.9201 GHz	-49.789 dBm																																																			


Right ear:

BAND EDGE Graphs


GFSK/LCH/
No Hop

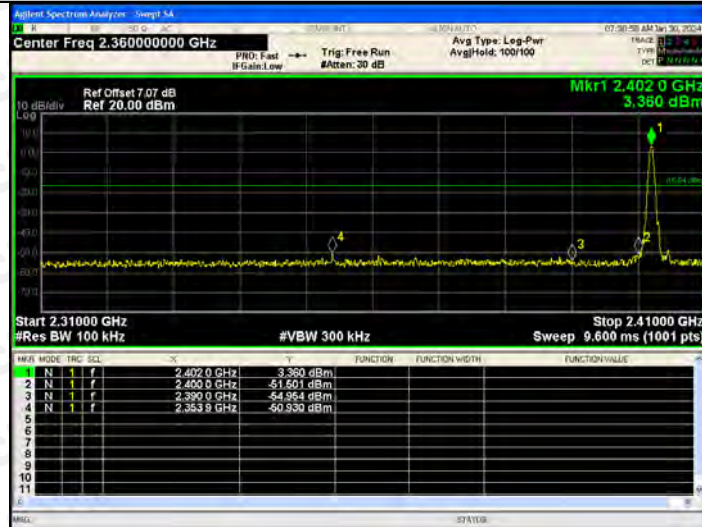

GFSK/LCH/
Hop


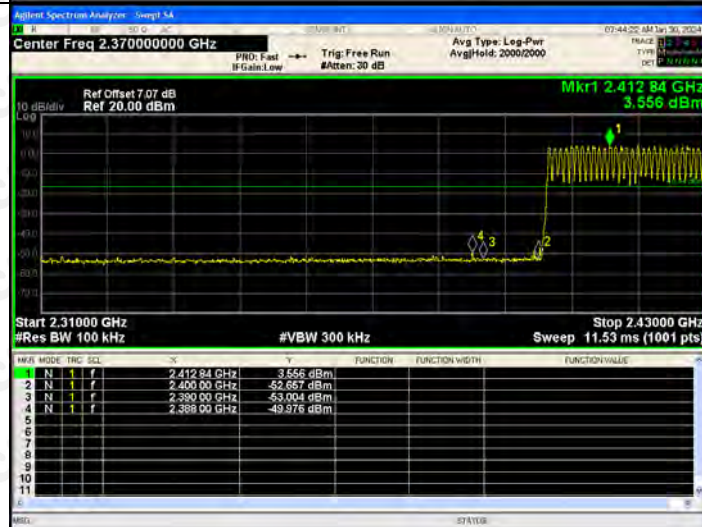


GFSK/HCH/
No Hop

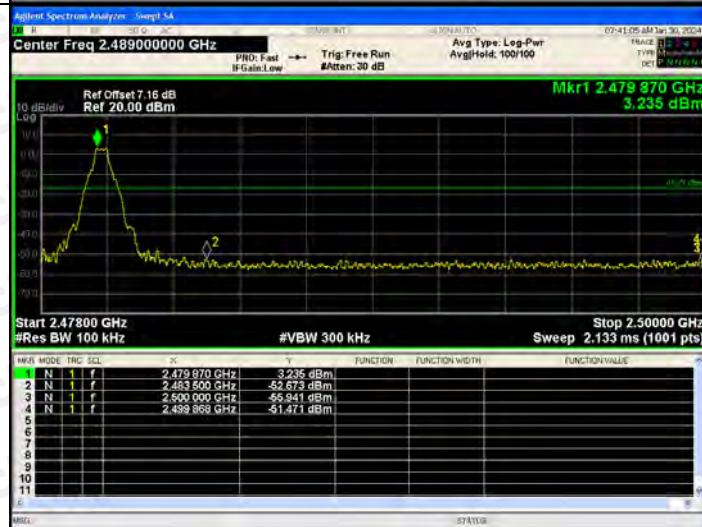


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.468750000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.4618750 GHz 3.580 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4618750 GHz</td> <td>3.580 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835000 GHz</td> <td>-53.241 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.5000000 GHz</td> <td>-52.879 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4918750 GHz</td> <td>-50.113 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4618750 GHz	3.580 dBm				2	N	1	f	2.4835000 GHz	-53.241 dBm				3	N	1	f	2.5000000 GHz	-52.879 dBm				4	N	1	f	2.4918750 GHz	-50.113 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4618750 GHz	3.580 dBm																																									
2	N	1	f	2.4835000 GHz	-53.241 dBm																																									
3	N	1	f	2.5000000 GHz	-52.879 dBm																																									
4	N	1	f	2.4918750 GHz	-50.113 dBm																																									
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.360000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4021 GHz 1.858 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4021 GHz</td> <td>1.858 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000 GHz</td> <td>-51.638 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3900 GHz</td> <td>-55.271 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3790 GHz</td> <td>-50.326 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4021 GHz	1.858 dBm				2	N	1	f	2.4000 GHz	-51.638 dBm				3	N	1	f	2.3900 GHz	-55.271 dBm				4	N	1	f	2.3790 GHz	-50.326 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4021 GHz	1.858 dBm																																									
2	N	1	f	2.4000 GHz	-51.638 dBm																																									
3	N	1	f	2.3900 GHz	-55.271 dBm																																									
4	N	1	f	2.3790 GHz	-50.326 dBm																																									
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.370000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.41284 GHz 3.455 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.41284 GHz</td> <td>3.455 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-52.388 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-52.244 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39794 GHz</td> <td>-50.168 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.41284 GHz	3.455 dBm				2	N	1	f	2.40000 GHz	-52.388 dBm				3	N	1	f	2.39000 GHz	-52.244 dBm				4	N	1	f	2.39794 GHz	-50.168 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.41284 GHz	3.455 dBm																																									
2	N	1	f	2.40000 GHz	-52.388 dBm																																									
3	N	1	f	2.39000 GHz	-52.244 dBm																																									
4	N	1	f	2.39794 GHz	-50.168 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 024 GHz</td> <td>1.724 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-55.139 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 GHz</td> <td>-55.957 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.495 225 GHz</td> <td>-52.461 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 024 GHz	1.724 dBm				2	N	1	f	2.483 500 GHz	-55.139 dBm				3	N	1	f	2.490 000 GHz	-55.957 dBm				4	N	1	f	2.495 225 GHz	-52.461 dBm				
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.480 024 GHz	1.724 dBm																																										
2	N	1	f	2.483 500 GHz	-55.139 dBm																																										
3	N	1	f	2.490 000 GHz	-55.957 dBm																																										
4	N	1	f	2.495 225 GHz	-52.461 dBm																																										
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.458 187 5 GHz</td> <td>3.518 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-52.821 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 0 GHz</td> <td>-52.395 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.497 592 5 GHz</td> <td>-50.482 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.458 187 5 GHz	3.518 dBm				2	N	1	f	2.483 500 0 GHz	-52.821 dBm				3	N	1	f	2.490 000 0 GHz	-52.395 dBm				4	N	1	f	2.497 592 5 GHz	-50.482 dBm				
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.458 187 5 GHz	3.518 dBm																																										
2	N	1	f	2.483 500 0 GHz	-52.821 dBm																																										
3	N	1	f	2.490 000 0 GHz	-52.395 dBm																																										
4	N	1	f	2.497 592 5 GHz	-50.482 dBm																																										
<p>8DPSK/LCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 1 GHz</td> <td>0.550 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 0 GHz</td> <td>-48.639 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 0 GHz</td> <td>-58.489 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.389 7 GHz</td> <td>-51.226 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 1 GHz	0.550 dBm				2	N	1	f	2.400 0 GHz	-48.639 dBm				3	N	1	f	2.390 0 GHz	-58.489 dBm				4	N	1	f	2.389 7 GHz	-51.226 dBm				
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.402 1 GHz	0.550 dBm																																										
2	N	1	f	2.400 0 GHz	-48.639 dBm																																										
3	N	1	f	2.390 0 GHz	-58.489 dBm																																										
4	N	1	f	2.389 7 GHz	-51.226 dBm																																										

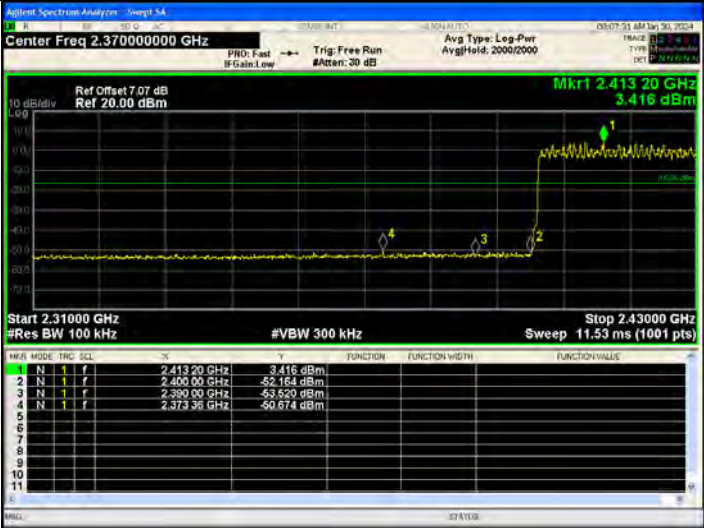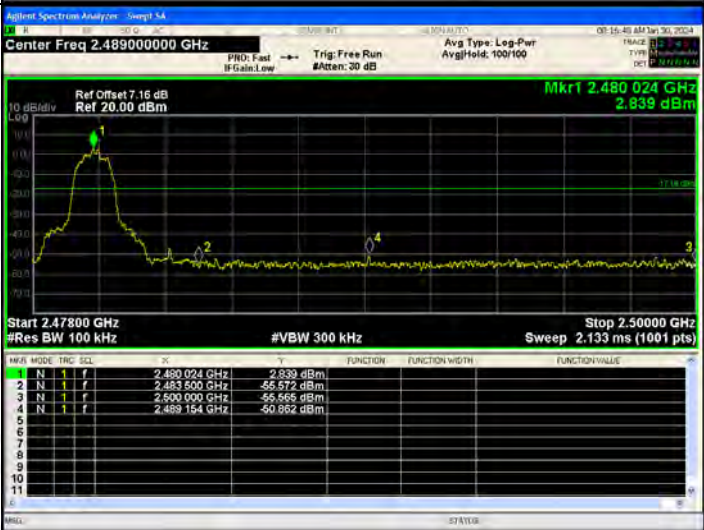
<p>8DPSK /LCH/Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.37000000 GHz</p> <p>Ref Offset 7.67 dB Ref 20.00 dBm</p> <p>Mkr1 2.413 20 GHz 3.416 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz</p> <p>Stop 2.43000 GHz #VBW 300 kHz Sweep 11.53 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.413 20 GHz</td> <td>3.416 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-52.164 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 00 GHz</td> <td>-53.520 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.373 36 GHz</td> <td>-50.674 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 20 GHz	3.416 dBm				2	N	1	f	2.400 00 GHz	-52.164 dBm				3	N	1	f	2.399 00 GHz	-53.520 dBm				4	N	1	f	2.373 36 GHz	-50.674 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.413 20 GHz	3.416 dBm																																									
2	N	1	f	2.400 00 GHz	-52.164 dBm																																									
3	N	1	f	2.399 00 GHz	-53.520 dBm																																									
4	N	1	f	2.373 36 GHz	-50.674 dBm																																									
<p>8DPSK /HCH/No Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.48900000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Mkr1 2.480 024 GHz 2.839 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 024 GHz</td> <td>2.839 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-55.572 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 000 GHz</td> <td>-55.565 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.489 154 GHz</td> <td>-50.892 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 024 GHz	2.839 dBm				2	N	1	f	2.483 500 GHz	-55.572 dBm				3	N	1	f	2.480 000 GHz	-55.565 dBm				4	N	1	f	2.489 154 GHz	-50.892 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 024 GHz	2.839 dBm																																									
2	N	1	f	2.483 500 GHz	-55.572 dBm																																									
3	N	1	f	2.480 000 GHz	-55.565 dBm																																									
4	N	1	f	2.489 154 GHz	-50.892 dBm																																									
<p>8DPSK /HCH/Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.468750000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Mkr1 2.459 187 5 GHz 3.158 dBm</p> <p>Start 2.43750 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 6.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.459 187 5 GHz</td> <td>3.158 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.509 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-52.545 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.458 992 5 GHz</td> <td>-50.138 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.459 187 5 GHz	3.158 dBm				2	N	1	f	2.483 500 0 GHz	-53.509 dBm				3	N	1	f	2.500 000 0 GHz	-52.545 dBm				4	N	1	f	2.458 992 5 GHz	-50.138 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.459 187 5 GHz	3.158 dBm																																									
2	N	1	f	2.483 500 0 GHz	-53.509 dBm																																									
3	N	1	f	2.500 000 0 GHz	-52.545 dBm																																									
4	N	1	f	2.458 992 5 GHz	-50.138 dBm																																									

RF Conducted Spurious Emissions Graphs


GFSK/LCH

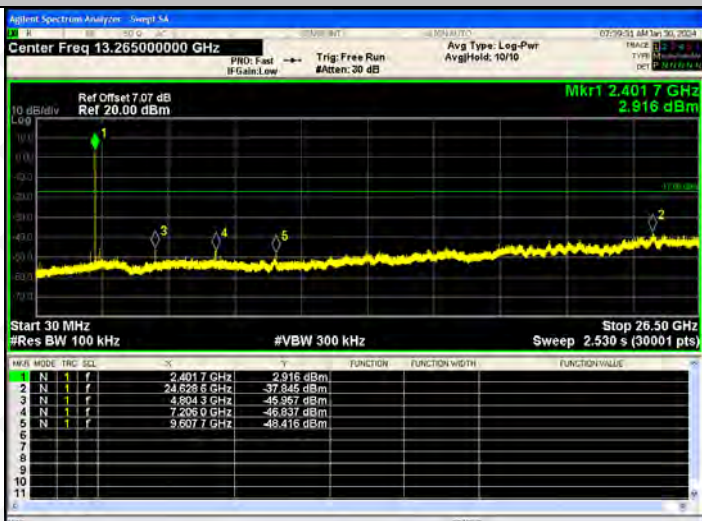


GFSK/MCH

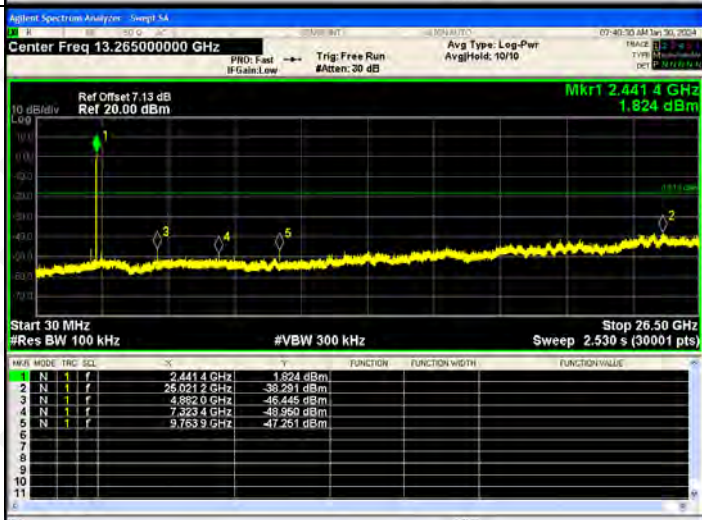

GFSK/HCH

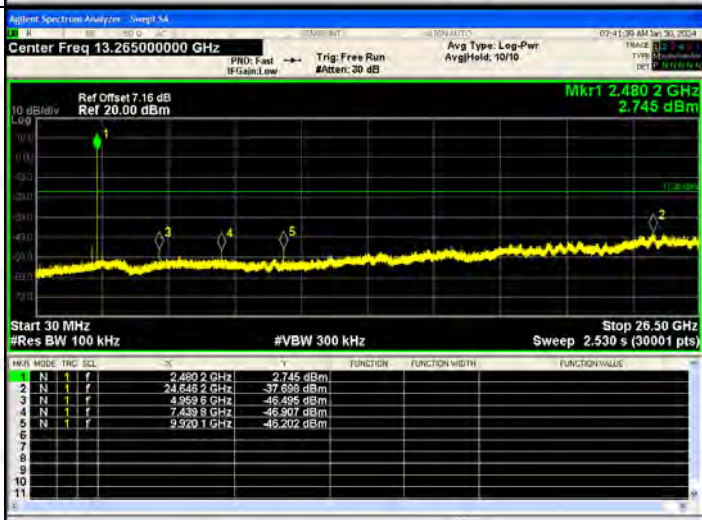

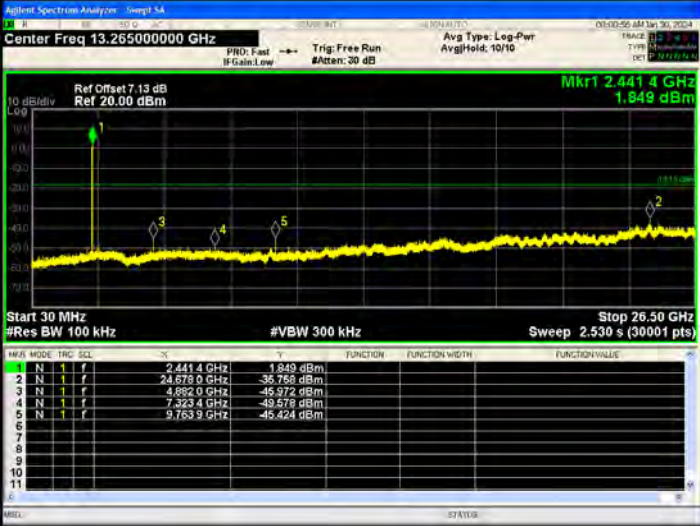
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MARK</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-0.276 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0309 GHz</td> <td>-37.364 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8943 GHz</td> <td>-45.095 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2050 GHz</td> <td>-49.610 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6077 GHz</td> <td>-46.085 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARK	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-0.276 dBm				2	N	1	f	26.0309 GHz	-37.364 dBm				3	N	1	f	4.8943 GHz	-45.095 dBm				4	N	1	f	7.2050 GHz	-49.610 dBm				5	N	1	f	9.6077 GHz	-46.085 dBm			
MARK	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-0.276 dBm																																																		
2	N	1	f	26.0309 GHz	-37.364 dBm																																																		
3	N	1	f	4.8943 GHz	-45.095 dBm																																																		
4	N	1	f	7.2050 GHz	-49.610 dBm																																																		
5	N	1	f	9.6077 GHz	-46.085 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MARK</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>1.849 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6780 GHz</td> <td>-36.758 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8920 GHz</td> <td>-45.972 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4324 GHz</td> <td>-49.579 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7539 GHz</td> <td>-45.424 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARK	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	1.849 dBm				2	N	1	f	24.6780 GHz	-36.758 dBm				3	N	1	f	4.8920 GHz	-45.972 dBm				4	N	1	f	7.4324 GHz	-49.579 dBm				5	N	1	f	9.7539 GHz	-45.424 dBm			
MARK	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	1.849 dBm																																																		
2	N	1	f	24.6780 GHz	-36.758 dBm																																																		
3	N	1	f	4.8920 GHz	-45.972 dBm																																																		
4	N	1	f	7.4324 GHz	-49.579 dBm																																																		
5	N	1	f	9.7539 GHz	-45.424 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MARK</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>1.750 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6392 GHz</td> <td>-37.267 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8905 GHz</td> <td>-47.055 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4339 GHz</td> <td>-47.890 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9201 GHz</td> <td>-46.219 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARK	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	1.750 dBm				2	N	1	f	24.6392 GHz	-37.267 dBm				3	N	1	f	4.8905 GHz	-47.055 dBm				4	N	1	f	7.4339 GHz	-47.890 dBm				5	N	1	f	9.9201 GHz	-46.219 dBm			
MARK	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	1.750 dBm																																																		
2	N	1	f	24.6392 GHz	-37.267 dBm																																																		
3	N	1	f	4.8905 GHz	-47.055 dBm																																																		
4	N	1	f	7.4339 GHz	-47.890 dBm																																																		
5	N	1	f	9.9201 GHz	-46.219 dBm																																																		

<p>8DPSK /LCH</p>	<table border="1"> <thead> <tr> <th>Mk#</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-0.401 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6333 GHz</td> <td>-35.959 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8924 GHz</td> <td>-43.692 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2050 GHz</td> <td>-49.836 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6077 GHz</td> <td>-45.062 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-0.401 dBm				2	N	1	f	24.6333 GHz	-35.959 dBm				3	N	1	f	4.8924 GHz	-43.692 dBm				4	N	1	f	7.2050 GHz	-49.836 dBm				5	N	1	f	9.6077 GHz	-45.062 dBm			
Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-0.401 dBm																																																		
2	N	1	f	24.6333 GHz	-35.959 dBm																																																		
3	N	1	f	4.8924 GHz	-43.692 dBm																																																		
4	N	1	f	7.2050 GHz	-49.836 dBm																																																		
5	N	1	f	9.6077 GHz	-45.062 dBm																																																		
<p>8DPSK /MCH</p>	<table border="1"> <thead> <tr> <th>Mk#</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>1.924 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.0758 GHz</td> <td>-37.254 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8920 GHz</td> <td>-47.516 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3234 GHz</td> <td>-49.037 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7539 GHz</td> <td>-44.981 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	1.924 dBm				2	N	1	f	25.0758 GHz	-37.254 dBm				3	N	1	f	4.8920 GHz	-47.516 dBm				4	N	1	f	7.3234 GHz	-49.037 dBm				5	N	1	f	9.7539 GHz	-44.981 dBm			
Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	1.924 dBm																																																		
2	N	1	f	25.0758 GHz	-37.254 dBm																																																		
3	N	1	f	4.8920 GHz	-47.516 dBm																																																		
4	N	1	f	7.3234 GHz	-49.037 dBm																																																		
5	N	1	f	9.7539 GHz	-44.981 dBm																																																		
<p>8DPSK /HCH</p>	<table border="1"> <thead> <tr> <th>Mk#</th> <th>MODE</th> <th>TRIG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-1.500 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.1183 GHz</td> <td>-37.859 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9905 GHz</td> <td>-45.924 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4338 GHz</td> <td>-47.293 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9201 GHz</td> <td>-45.347 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-1.500 dBm				2	N	1	f	25.1183 GHz	-37.859 dBm				3	N	1	f	4.9905 GHz	-45.924 dBm				4	N	1	f	7.4338 GHz	-47.293 dBm				5	N	1	f	9.9201 GHz	-45.347 dBm			
Mk#	MODE	TRIG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-1.500 dBm																																																		
2	N	1	f	25.1183 GHz	-37.859 dBm																																																		
3	N	1	f	4.9905 GHz	-45.924 dBm																																																		
4	N	1	f	7.4338 GHz	-47.293 dBm																																																		
5	N	1	f	9.9201 GHz	-45.347 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

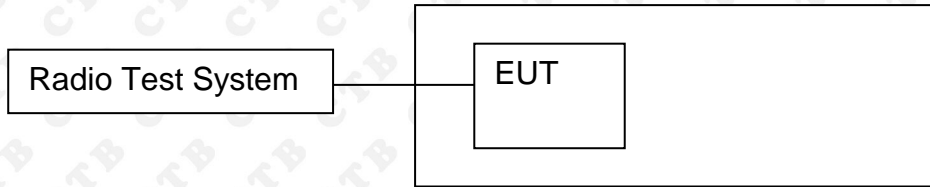

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Left ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	3.682	20.97	PASS
	MCH	4.277	20.97	PASS
	HCH	3.124	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	3.914	20.97	PASS
	MCH	4.377	20.97	PASS
	HCH	3.211	20.97	PASS
EDR mode (8DPSK)	LCH	3.915	20.97	PASS
	MCH	4.566	20.97	PASS
	HCH	3.388	20.97	PASS




Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	3.685	20.97	PASS
	MCH	3.494	20.97	PASS
	HCH	3.379	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	4.438	20.97	PASS
	MCH	4.117	20.97	PASS
	HCH	4.01	20.97	PASS
EDR mode (8DPSK)	LCH	4.677	20.97	PASS
	MCH	4.412	20.97	PASS
	HCH	4.277	20.97	PASS




Test Graph:
Left ear:

Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 07 GHz 3.682 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.440 98 GHz 4.277 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 85 GHz 3.124 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>




<p>$\pi/4$DQPSK/LCH</p>		
<p>$\pi/4$DQPSK/MCH</p>		
<p>$\pi/4$DQPSK/HCH</p>		

<p>8DPSK/LCH</p>	
<p>8DPSK /MCH</p>	
<p>8DPSK /HCH</p>	

Right ear:


Graphs	
GFSK/LCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.402 03 GHz 3.685 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 7.13 dB Ref 20.00 dBm Mkr1 2.440 92 GHz 3.494 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 81 GHz 3.379 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

<p>8DPSK/LCH</p>	
<p>8DPSK /MCH</p>	
<p>8DPSK /HCH</p>	

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

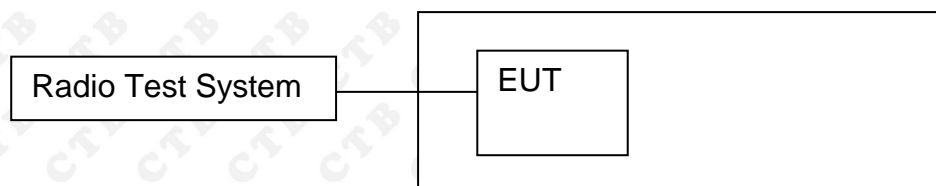

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Left ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.972	PASS
	Mid channel	0.937	PASS
	High channel	0.988	PASS
π/4DQPSK	Low channel	1.347	PASS
	Mid channel	1.331	PASS
	High channel	1.325	PASS
8DPSK	Low channel	1.343	PASS
	Mid channel	1.323	PASS
	High channel	1.321	PASS

Right ear:

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.867	PASS
	Mid channel	0.874	PASS
	High channel	0.854	PASS
π/4DQPSK	Low channel	1.322	PASS
	Mid channel	1.274	PASS
	High channel	1.289	PASS
8DPSK	Low channel	1.306	PASS
	Mid channel	1.304	PASS
	High channel	1.321	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:
Left ear:

<p>GFSK Low channel</p>		
<p>GFSK Mid channel</p>		
<p>GFSK High channel</p>		

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 7.07 dB Ref: 27.07 dBm</p> <p>Mkr:3 2.402712 GHz -18.739 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.79 dBm</td> </tr> <tr> <td>1.2847 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>38.131 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.347 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	9.79 dBm	1.2847 MHz			Transmit Freq Error	OBW Power	99.00 %	38.131 kHz	x dB	-20.00 dB	x dB Bandwidth			1.347 MHz			
Occupied Bandwidth	Total Power	9.79 dBm																		
1.2847 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
38.131 kHz	x dB	-20.00 dB																		
x dB Bandwidth																				
1.347 MHz																				
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 7.13 dB Ref: 27.13 dBm</p> <p>Mkr:3 2.44171 GHz -18.014 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.3 dBm</td> </tr> <tr> <td>1.2525 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>44.764 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.331 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	10.3 dBm	1.2525 MHz			Transmit Freq Error	OBW Power	99.00 %	44.764 kHz	x dB	-20.00 dB	x dB Bandwidth			1.331 MHz			
Occupied Bandwidth	Total Power	10.3 dBm																		
1.2525 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
44.764 kHz	x dB	-20.00 dB																		
x dB Bandwidth																				
1.331 MHz																				
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 7.16 dB Ref: 27.16 dBm</p> <p>Mkr:3 2.480708 GHz -19.888 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.15 dBm</td> </tr> <tr> <td>1.2449 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>45.209 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.325 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	9.15 dBm	1.2449 MHz			Transmit Freq Error	OBW Power	99.00 %	45.209 kHz	x dB	-20.00 dB	x dB Bandwidth			1.325 MHz			
Occupied Bandwidth	Total Power	9.15 dBm																		
1.2449 MHz																				
Transmit Freq Error	OBW Power	99.00 %																		
45.209 kHz	x dB	-20.00 dB																		
x dB Bandwidth																				
1.325 MHz																				

<p>8DPSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 7.07 dB Ref: 27.07 dBm</p> <p>Mkr13 2.402702 GHz -19.960 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.82 dBm</td> </tr> <tr> <td>1.2622 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>30.154 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.343 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	9.82 dBm	1.2622 MHz			Transmit Freq Error	OBW Power	99.00 %	30.154 kHz	x dB	-20.00 dB	x dB Bandwidth			1.343 MHz			
Occupied Bandwidth	Total Power	9.82 dBm																			
1.2622 MHz																					
Transmit Freq Error	OBW Power	99.00 %																			
30.154 kHz	x dB	-20.00 dB																			
x dB Bandwidth																					
1.343 MHz																					
<p>8DPSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 7.13 dB Ref: 27.13 dBm</p> <p>Mkr13 2.441596 GHz -18.368 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.3 dBm</td> </tr> <tr> <td>1.2446 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>34.079 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.323 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	10.3 dBm	1.2446 MHz			Transmit Freq Error	OBW Power	99.00 %	34.079 kHz	x dB	-20.00 dB	x dB Bandwidth			1.323 MHz			
Occupied Bandwidth	Total Power	10.3 dBm																			
1.2446 MHz																					
Transmit Freq Error	OBW Power	99.00 %																			
34.079 kHz	x dB	-20.00 dB																			
x dB Bandwidth																					
1.323 MHz																					
<p>8DPSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 7.16 dB Ref: 27.16 dBm</p> <p>Mkr13 2.480596 GHz -18.826 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.16 dBm</td> </tr> <tr> <td>1.2436 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>35.442 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>1.321 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	9.16 dBm	1.2436 MHz			Transmit Freq Error	OBW Power	99.00 %	35.442 kHz	x dB	-20.00 dB	x dB Bandwidth			1.321 MHz			
Occupied Bandwidth	Total Power	9.16 dBm																			
1.2436 MHz																					
Transmit Freq Error	OBW Power	99.00 %																			
35.442 kHz	x dB	-20.00 dB																			
x dB Bandwidth																					
1.321 MHz																					

Right ear:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Sts: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.07 dB</p> <p>Ref 27.07 dBm</p> <p>Mkr3 2.40245 GHz</p> <p>-19.563 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 834.69 kHz</p> <p>Total Power 9.99 dBm</p> <p>Transmit Freq Error 16.772 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 867.2 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Sts: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.13 dB</p> <p>Ref 27.13 dBm</p> <p>Mkr3 2.441456 GHz</p> <p>-17.911 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 840.83 kHz</p> <p>Total Power 9.87 dBm</p> <p>Transmit Freq Error 18.731 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 874.4 kHz</p> <p>x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Sts: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.16 dB</p> <p>Ref 27.16 dBm</p> <p>Mkr3 2.480442 GHz</p> <p>-19.395 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 823.06 kHz</p> <p>Total Power 9.95 dBm</p> <p>Transmit Freq Error 14.590 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 854.2 kHz</p> <p>x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 7.07 dB Ref: 27.07 dBm</p> <p>Occupied Bandwidth: 1.1862 MHz</p> <p>Total Power: 9.94 dBm</p> <p>Transmit Freq Error: 22.337 kHz</p> <p>x dB Bandwidth: 1.322 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 7.13 dB Ref: 27.13 dBm</p> <p>Occupied Bandwidth: 1.1886 MHz</p> <p>Total Power: 9.55 dBm</p> <p>Transmit Freq Error: 22.142 kHz</p> <p>x dB Bandwidth: 1.274 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 7.16 dB Ref: 27.16 dBm</p> <p>Occupied Bandwidth: 1.1972 MHz</p> <p>Total Power: 9.32 dBm</p> <p>Transmit Freq Error: 28.990 kHz</p> <p>x dB Bandwidth: 1.289 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -20.00 dB</p>

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.07 dB</p> <p>Ref: 27.07 dBm</p> <p>Mkr3: 2.402675 GHz</p> <p>-18.817 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1956 MHz</p> <p>Total Power: 9.61 dBm</p> <p>Transmit Freq Error: 21.713 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.306 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.13 dB</p> <p>Ref: 27.13 dBm</p> <p>Mkr3: 2.441674 GHz</p> <p>-18.720 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1986 MHz</p> <p>Total Power: 9.60 dBm</p> <p>Transmit Freq Error: 21.562 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.304 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.16 dB</p> <p>Ref: 27.16 dBm</p> <p>Mkr3: 2.480688 GHz</p> <p>-18.365 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2009 MHz</p> <p>Total Power: 9.44 dBm</p> <p>Transmit Freq Error: 20.811 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.294 MHz</p> <p>x dB: -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

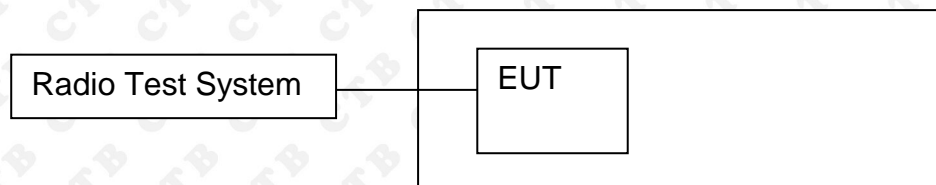

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Left ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.996	0.648	PASS
GFSK	MCH	1.002	0.625	PASS
GFSK	HCH	1.000	0.659	PASS
$\pi/4$ DQPSK	LCH	1.002	0.898	PASS
$\pi/4$ DQPSK	MCH	1.006	0.887	PASS
$\pi/4$ DQPSK	HCH	1.000	0.883	PASS
8DPSK	LCH	1.004	0.895	PASS
8DPSK	MCH	1.002	0.882	PASS
8DPSK	HCH	1.000	0.881	PASS

Right ear:

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.002	0.578	PASS
GFSK	MCH	0.994	0.583	PASS
GFSK	HCH	0.998	0.569	PASS
$\pi/4$ DQPSK	LCH	1.006	0.881	PASS
$\pi/4$ DQPSK	MCH	1.000	0.849	PASS
$\pi/4$ DQPSK	HCH	0.996	0.859	PASS
8DPSK	LCH	1.004	0.871	PASS
8DPSK	MCH	0.996	0.869	PASS
8DPSK	HCH	0.998	0.881	PASS

Left ear:
Test Graph

Graphs

GFSK/LCH




GFSK/MCH



GFSK/HCH



<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep 3A</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.019 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td>-0.019 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>2.402044 GHz</td> <td></td> <td></td> <td>-0.501 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)		-0.019 dB	2	F	1	f	(Δ)	2.402044 GHz			-0.501 dBm	
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)		-0.019 dB																					
2	F	1	f	(Δ)	2.402044 GHz			-0.501 dBm																					
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep 3A</p> <p>Marker 1 Δ 1.006000000 MHz</p> <p>Ref Offset 6.79 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.006 MHz 0.340 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.006 MHz</td> <td>(Δ)</td> <td></td> <td>0.340 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>2.441030 GHz</td> <td></td> <td></td> <td>-0.134 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.006 MHz	(Δ)		0.340 dB	2	F	1	f	(Δ)	2.441030 GHz			-0.134 dBm	
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ Z	1	f	(Δ)	1.006 MHz	(Δ)		0.340 dB																					
2	F	1	f	(Δ)	2.441030 GHz			-0.134 dBm																					
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep 3A</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 7.17 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz -0.107 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-0.107 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>2.479038 GHz</td> <td></td> <td></td> <td>-0.439 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.000 MHz	(Δ)		-0.107 dB	2	F	1	f	(Δ)	2.479038 GHz			-0.439 dBm	
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	Δ Z	1	f	(Δ)	1.000 MHz	(Δ)		-0.107 dB																					
2	F	1	f	(Δ)	2.479038 GHz			-0.439 dBm																					

<p>8DPSK/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.004000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MRK</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.004 MHz</td> <td>(Δ)</td> <td></td> <td>0.215 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>2.402032 GHz</td> <td></td> <td></td> <td>0.364 dBm</td> </tr> </tbody> </table>	MRK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.004 MHz	(Δ)		0.215 dB	2	F	1	f	(Δ)	2.402032 GHz			0.364 dBm
MRK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	1.004 MHz	(Δ)		0.215 dB																				
2	F	1	f	(Δ)	2.402032 GHz			0.364 dBm																				
<p>8DPSK /MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 6.79 dB Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MRK</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td>0.125 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>2.441032 GHz</td> <td></td> <td></td> <td>0.630 dBm</td> </tr> </tbody> </table>	MRK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.002 MHz	(Δ)		0.125 dB	2	F	1	f	(Δ)	2.441032 GHz			0.630 dBm
MRK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	1.002 MHz	(Δ)		0.125 dB																				
2	F	1	f	(Δ)	2.441032 GHz			0.630 dBm																				
<p>8DPSK /HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 7.17 dB Ref 20.00 dBm</p> <p>10 dB/div</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MRK</th> <th>MODE</th> <th>TRIG</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-0.429 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>2.478874 GHz</td> <td></td> <td></td> <td>-1.815 dBm</td> </tr> </tbody> </table>	MRK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.000 MHz	(Δ)		-0.429 dB	2	F	1	f	(Δ)	2.478874 GHz			-1.815 dBm
MRK	MODE	TRIG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	1.000 MHz	(Δ)		-0.429 dB																				
2	F	1	f	(Δ)	2.478874 GHz			-1.815 dBm																				

Right ear:
Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH




<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.004000000 MHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.004 MHz 0.773 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.004 MHz (A)</td> <td></td> <td></td> <td>0.773 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(A)</td> <td>2.402 010 GHz</td> <td></td> <td></td> <td>-0.706 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	1.004 MHz (A)			0.773 dB	2	F	1	f	(A)	2.402 010 GHz			-0.706 dBm	
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	AZ	1	f	(A)	1.004 MHz (A)			0.773 dB																					
2	F	1	f	(A)	2.402 010 GHz			-0.706 dBm																					
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 996.000000 kHz</p> <p>Ref Offset 7.13 dB Ref 20.00 dBm</p> <p>ΔMkr1 996 kHz -1.491 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>996 kHz (A)</td> <td></td> <td></td> <td>-1.491 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(A)</td> <td>2.441 014 GHz</td> <td></td> <td></td> <td>-0.190 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	996 kHz (A)			-1.491 dB	2	F	1	f	(A)	2.441 014 GHz			-0.190 dBm	
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	AZ	1	f	(A)	996 kHz (A)			-1.491 dB																					
2	F	1	f	(A)	2.441 014 GHz			-0.190 dBm																					
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 998.000000 kHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>ΔMkr1 998 kHz -0.170 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(A)</td> <td>998 kHz (A)</td> <td></td> <td></td> <td>-0.170 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td>(A)</td> <td>2.479 018 GHz</td> <td></td> <td></td> <td>0.000 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(A)	998 kHz (A)			-0.170 dB	2	F	1	f	(A)	2.479 018 GHz			0.000 dBm	
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	AZ	1	f	(A)	998 kHz (A)			-0.170 dB																					
2	F	1	f	(A)	2.479 018 GHz			0.000 dBm																					

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

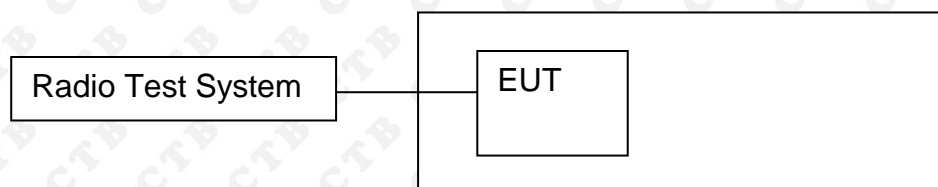

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result

Left ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Right ear:

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Left ear:
Test Graph

Graphs																												
GFSK/Hop	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4020040 GHz 2.885 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4020040 GHz</td> <td>2.885 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4800785 GHz</td> <td>2.496 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4020040 GHz	2.885 dBm				2	N	1	f	2.4800785 GHz	2.496 dBm			
MKR	MODE	TRG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4020040 GHz	2.885 dBm																							
2	N	1	f	2.4800785 GHz	2.496 dBm																							
$\pi/4$ DQPSK/Hop	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4018370 GHz 0.251 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td>0.251 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4800785 GHz</td> <td>2.302 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz	0.251 dBm				2	N	1	f	2.4800785 GHz	2.302 dBm			
MKR	MODE	TRG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4018370 GHz	0.251 dBm																							
2	N	1	f	2.4800785 GHz	2.302 dBm																							
8DPSK/Hop	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441750000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.4018370 GHz 2.706 dBm</p> <p>Start 2.40000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.48350 GHz Sweep 8.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td>2.706 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4804105 GHz</td> <td>2.381 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz	2.706 dBm				2	N	1	f	2.4804105 GHz	2.381 dBm			
MKR	MODE	TRG	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4018370 GHz	2.706 dBm																							
2	N	1	f	2.4804105 GHz	2.381 dBm																							


Right ear:
Test Graph

Graphs


GFSK/Hop

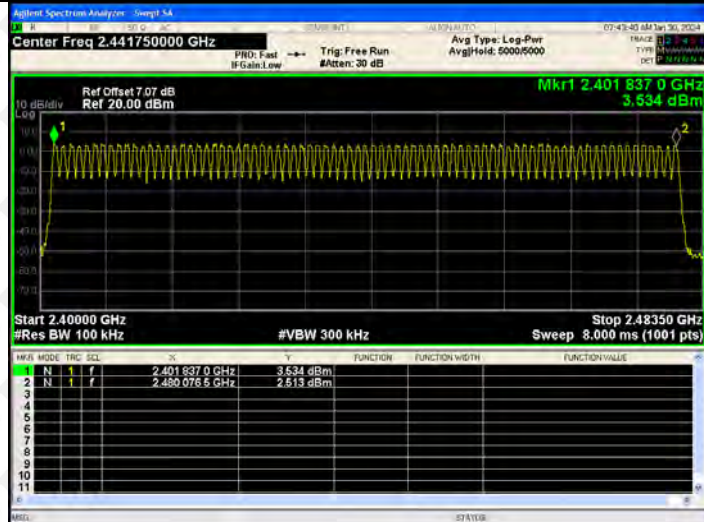

$\pi/4$ DQPSK/Hop

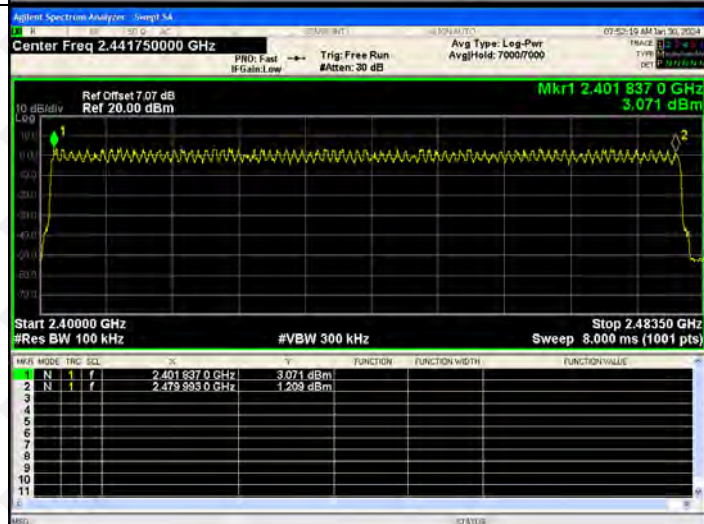


8DPSK/Hop

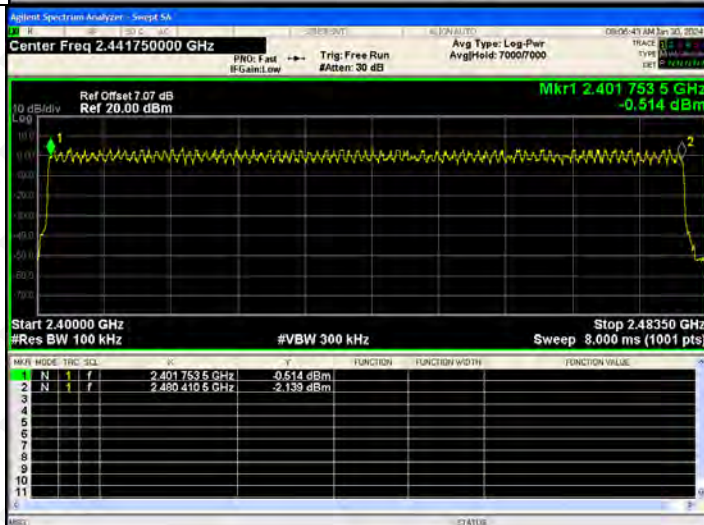

13. DWELL TIME

13.1 Block Diagram Of Test Setup

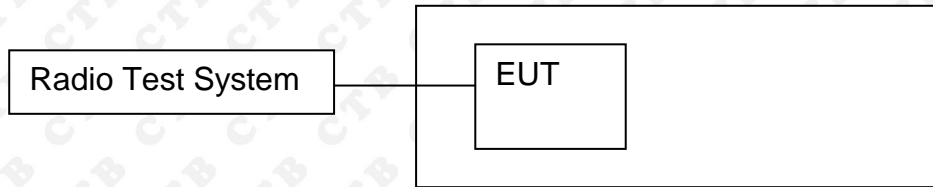

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Left ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.384	122.88	400	PASS
	DH1	MCH	0.384	122.88	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.637	261.92	400	PASS
	DH3	MCH	1.637	261.92	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.895	308.8	400	PASS

Right ear:

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.643	262.88	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$


DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.


Left ear:
Test Graph

Graphs


GFSK_DH1/LCH

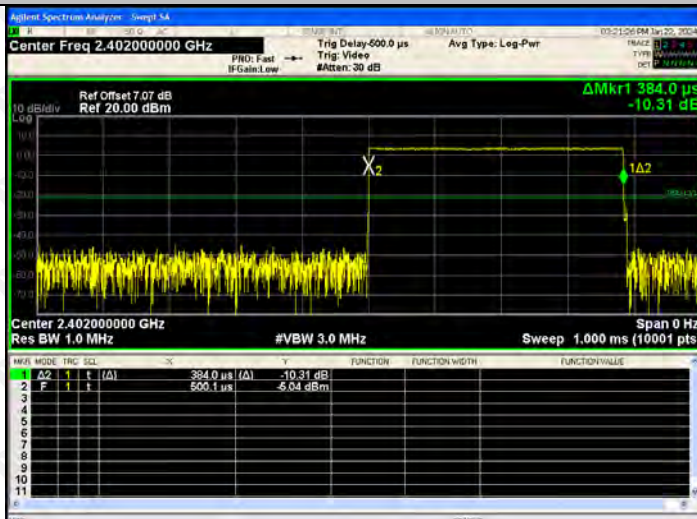


GFSK_DH1/MCH

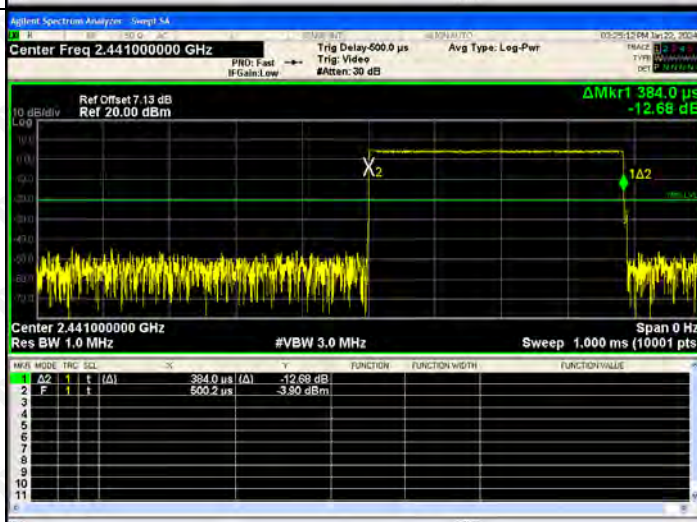

GFSK_DH1/HCH

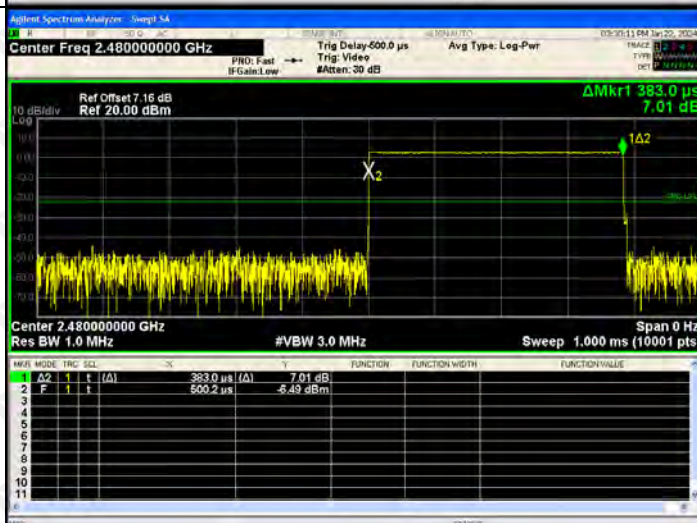

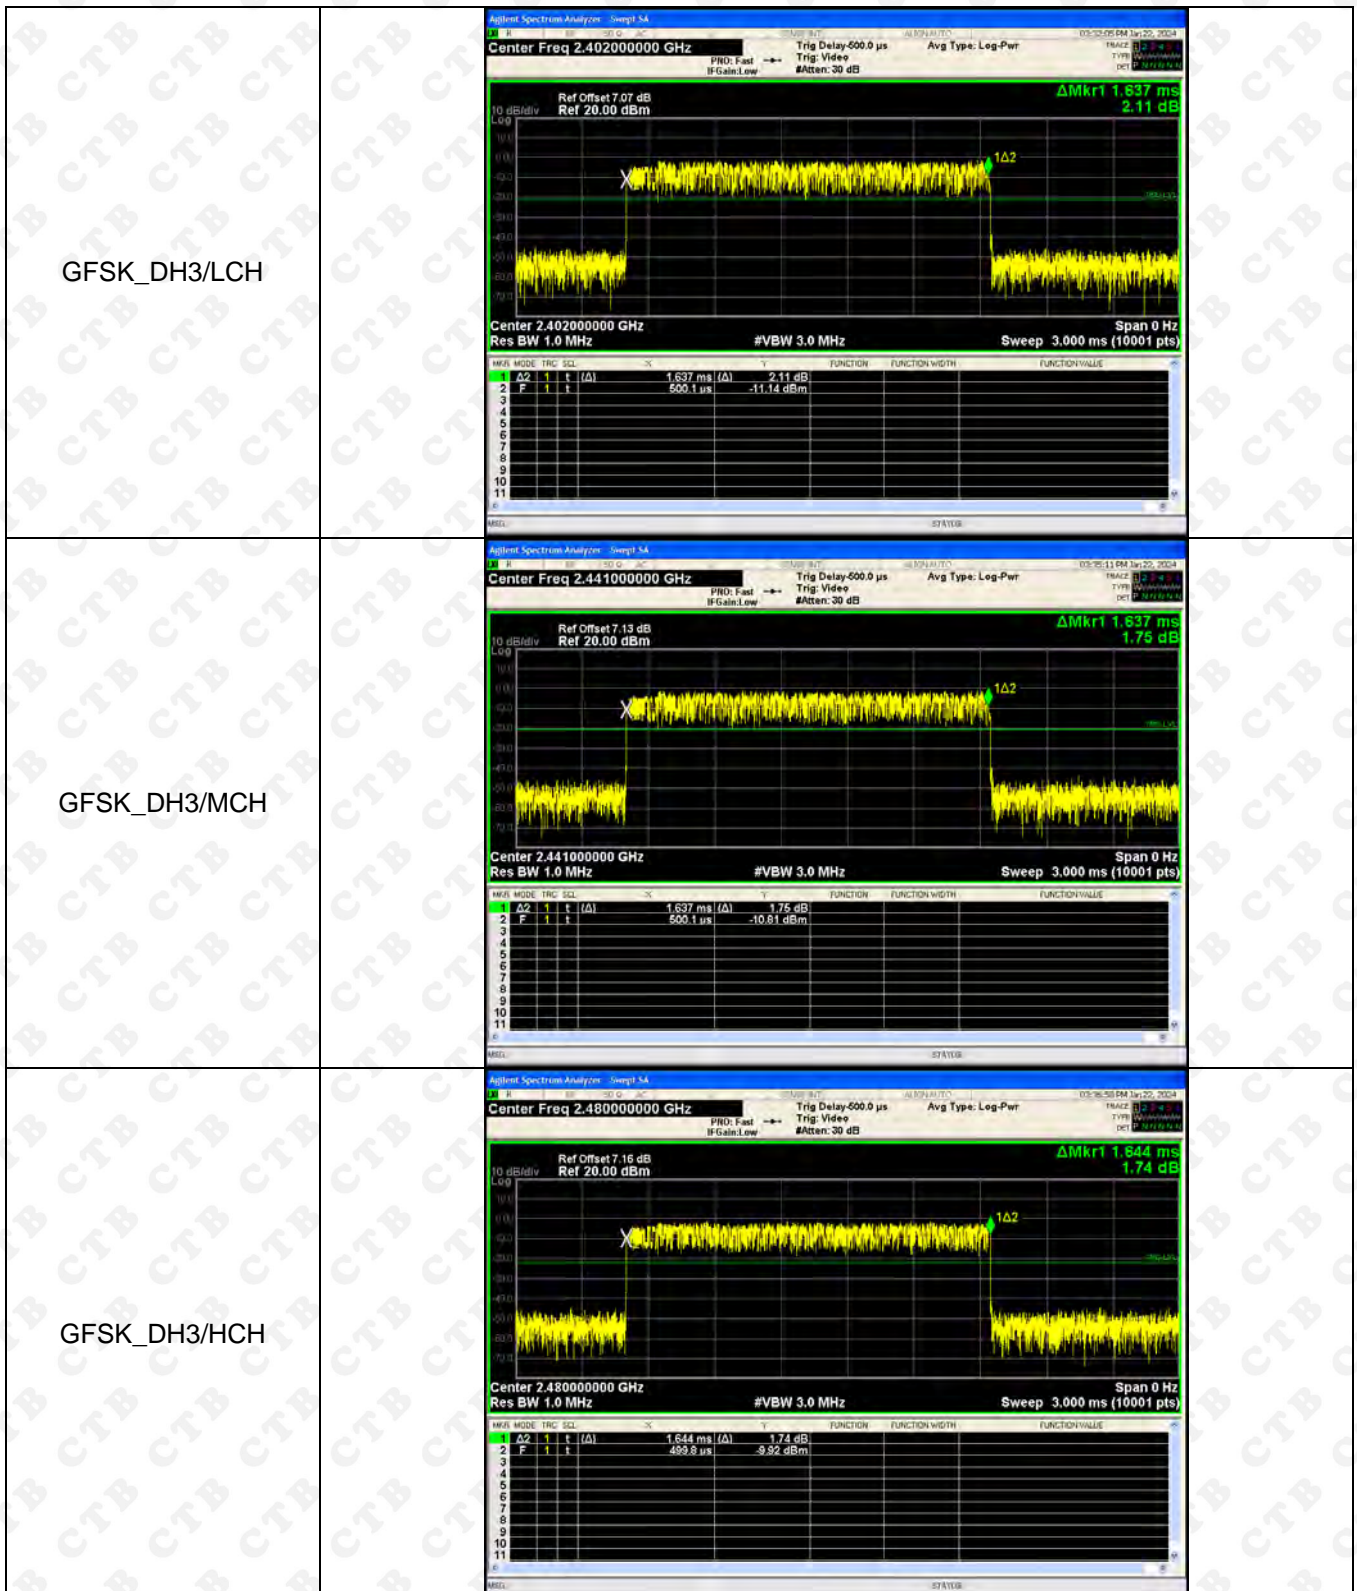


<p>GFSK_DH5/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.894 ms</td> <td>(A)</td> <td>-0.01 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td></td> <td>-10.92 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.894 ms	(A)	-0.01 dB	2	F	1	t		500.0 μ s		-10.92 dBm
MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	2.894 ms	(A)	-0.01 dB																		
2	F	1	t		500.0 μ s		-10.92 dBm																		
<p>GFSK_DH5/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.894 ms</td> <td>(A)</td> <td>-0.18 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td></td> <td>-10.17 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.894 ms	(A)	-0.18 dB	2	F	1	t		500.0 μ s		-10.17 dBm
MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	2.894 ms	(A)	-0.18 dB																		
2	F	1	t		500.0 μ s		-10.17 dBm																		
<p>GFSK_DH5/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.895 ms</td> <td>(A)</td> <td>-2.16 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td></td> <td>-3.47 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.895 ms	(A)	-2.16 dB	2	F	1	t		500.0 μ s		-3.47 dBm
MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	2.895 ms	(A)	-2.16 dB																		
2	F	1	t		500.0 μ s		-3.47 dBm																		


Right ear:
Test Graph

Graphs


GFSK_DH1/LCH



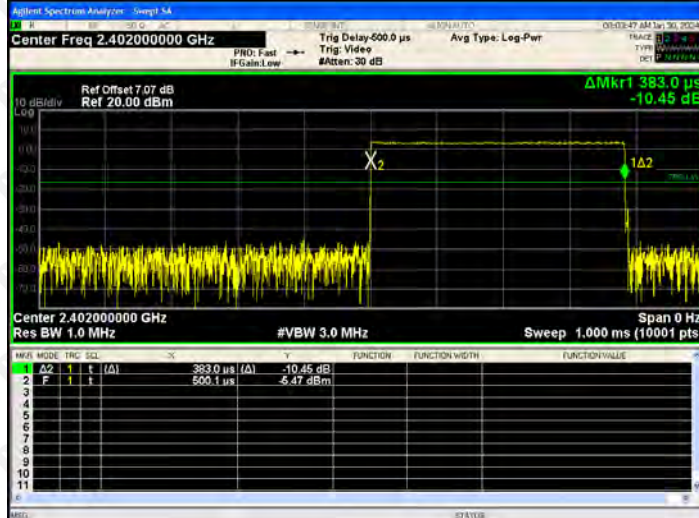


GFSK_DH1/MCH

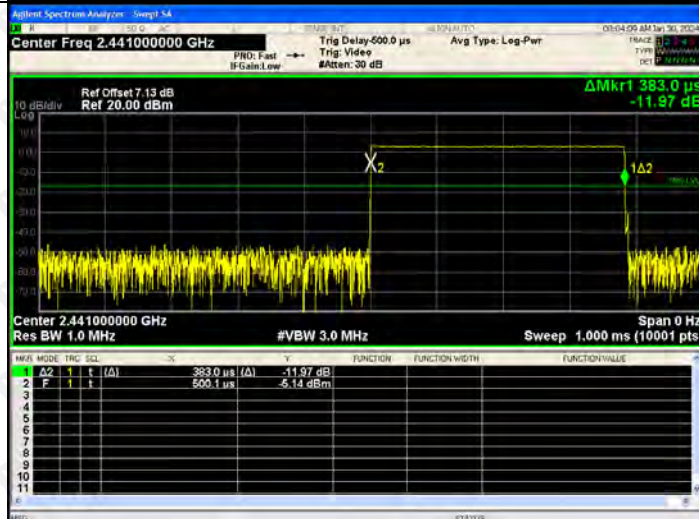

GFSK_DH1/HCH

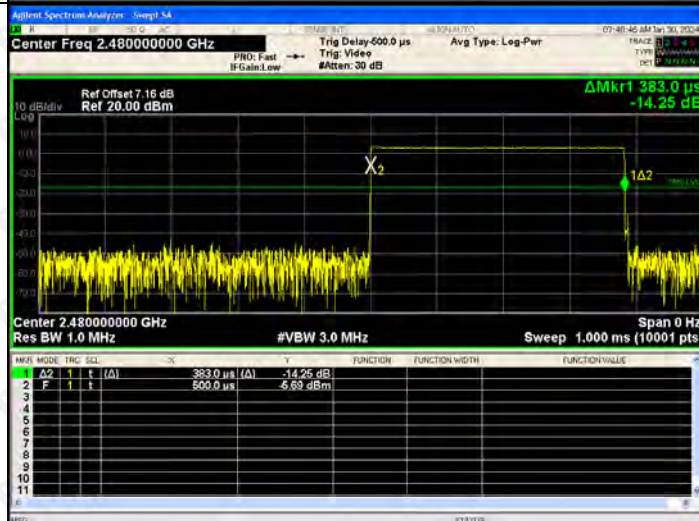
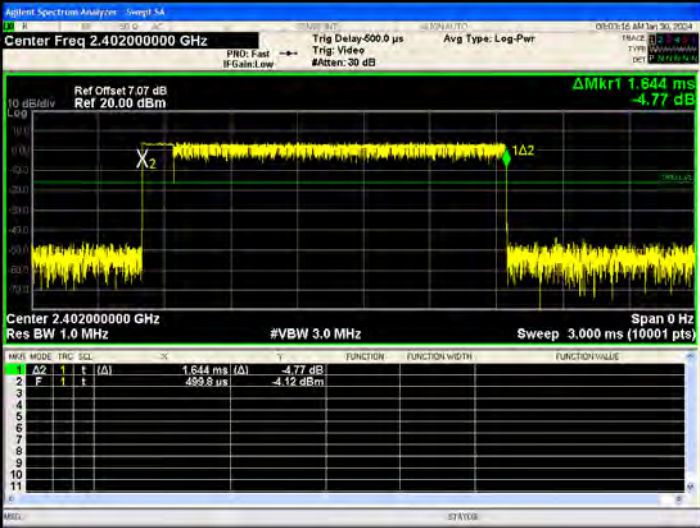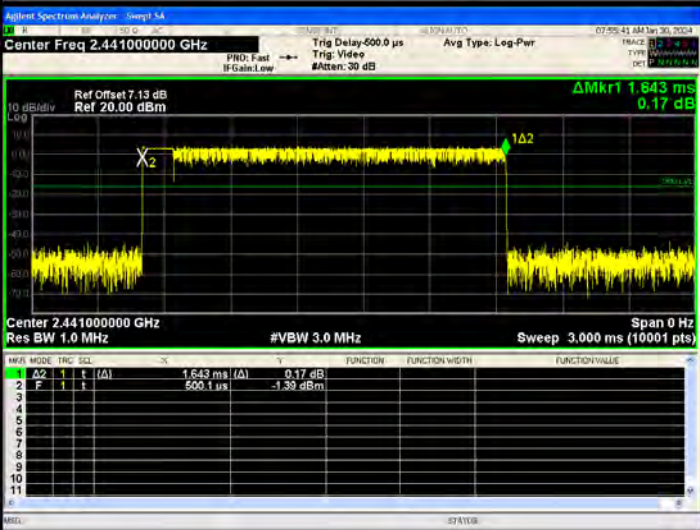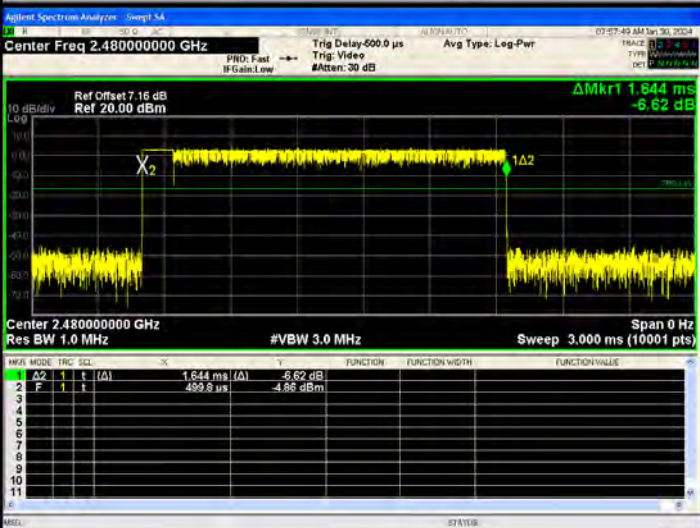
<p>GFSK_DH3/LCH</p>	 <table border="1" data-bbox="619 616 1321 772"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms</td> <td>(A)</td> <td>-4.77 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 μs</td> <td></td> <td>-4.12 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms	(A)	-4.77 dB	2	F	1	t		499.8 μ s		-4.12 dBm
MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	1.644 ms	(A)	-4.77 dB																		
2	F	1	t		499.8 μ s		-4.12 dBm																		
<p>GFSK_DH3/MCH</p>	 <table border="1" data-bbox="619 1131 1321 1288"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.643 ms</td> <td>(A)</td> <td>0.17 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 μs</td> <td></td> <td>-1.39 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.643 ms	(A)	0.17 dB	2	F	1	t		500.1 μ s		-1.39 dBm
MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	1.643 ms	(A)	0.17 dB																		
2	F	1	t		500.1 μ s		-1.39 dBm																		
<p>GFSK_DH3/HCH</p>	 <table border="1" data-bbox="619 1668 1321 1825"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.644 ms</td> <td>(A)</td> <td>-6.62 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 μs</td> <td></td> <td>-4.86 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.644 ms	(A)	-6.62 dB	2	F	1	t		499.8 μ s		-4.86 dBm
MNR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	1.644 ms	(A)	-6.62 dB																		
2	F	1	t		499.8 μ s		-4.86 dBm																		

<p>GFSK_DH5/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.402000000 GHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>Delta Mkr1 2.894 ms -6.89 dB</p> <p>Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.894 ms</td> <td>(A)</td> <td>-6.89 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-1.23 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.894 ms	(A)	-6.89 dB	2	F	1	t		499.6 μs		-1.23 dBm
MKR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	2.894 ms	(A)	-6.89 dB																		
2	F	1	t		499.6 μs		-1.23 dBm																		
<p>GFSK_DH5/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.441000000 GHz</p> <p>Ref Offset 7.13 dB Ref 20.00 dBm</p> <p>Delta Mkr1 2.894 ms 0.98 dB</p> <p>Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.894 ms</td> <td>(A)</td> <td>0.98 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.6 μs</td> <td></td> <td>-5.54 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.894 ms	(A)	0.98 dB	2	F	1	t		499.6 μs		-5.54 dBm
MKR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	2.894 ms	(A)	0.98 dB																		
2	F	1	t		499.6 μs		-5.54 dBm																		
<p>GFSK_DH5/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep 54</p> <p>Center Freq 2.480000000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Delta Mkr1 2.894 ms -2.52 dB</p> <p>Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 5.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRG</th> <th>SEL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>2.894 ms</td> <td>(A)</td> <td>-2.52 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.0 μs</td> <td></td> <td>-3.23 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	2.894 ms	(A)	-2.52 dB	2	F	1	t		500.0 μs		-3.23 dBm
MKR	MODE	TRG	SEL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	A2	1	t	(A)	2.894 ms	(A)	-2.52 dB																		
2	F	1	t		500.0 μs		-3.23 dBm																		

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

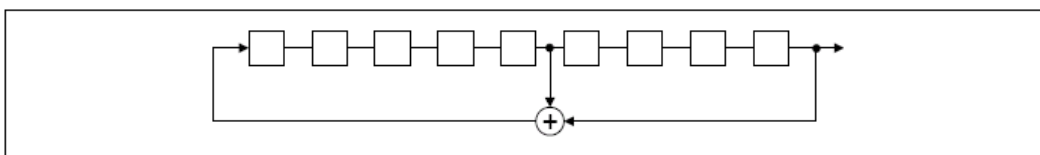

An example of Pseudorandom Frequency Hopping Sequence as follow:

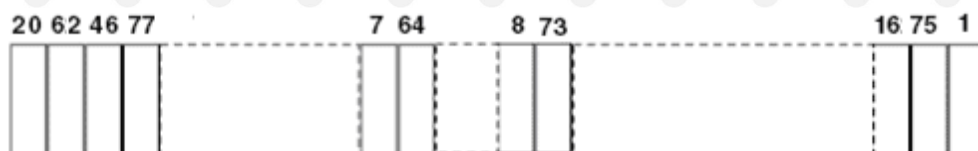

Each frequency used equally on the average by each transmitter.
The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Ceramic antenna. The best case gain of the antenna is 2.48 dBi.


16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

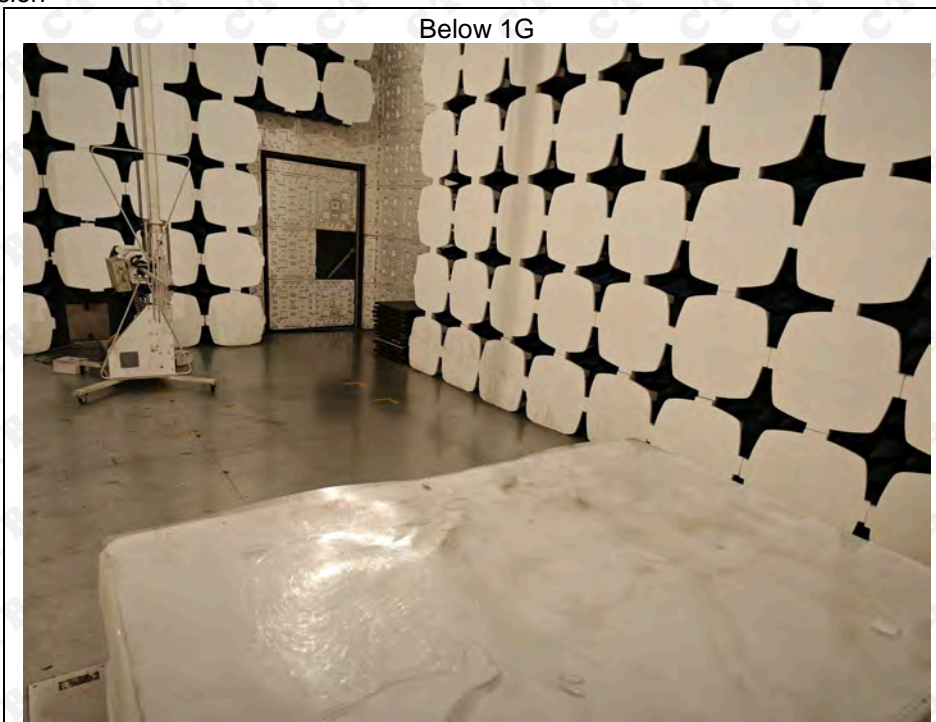

Above 1G

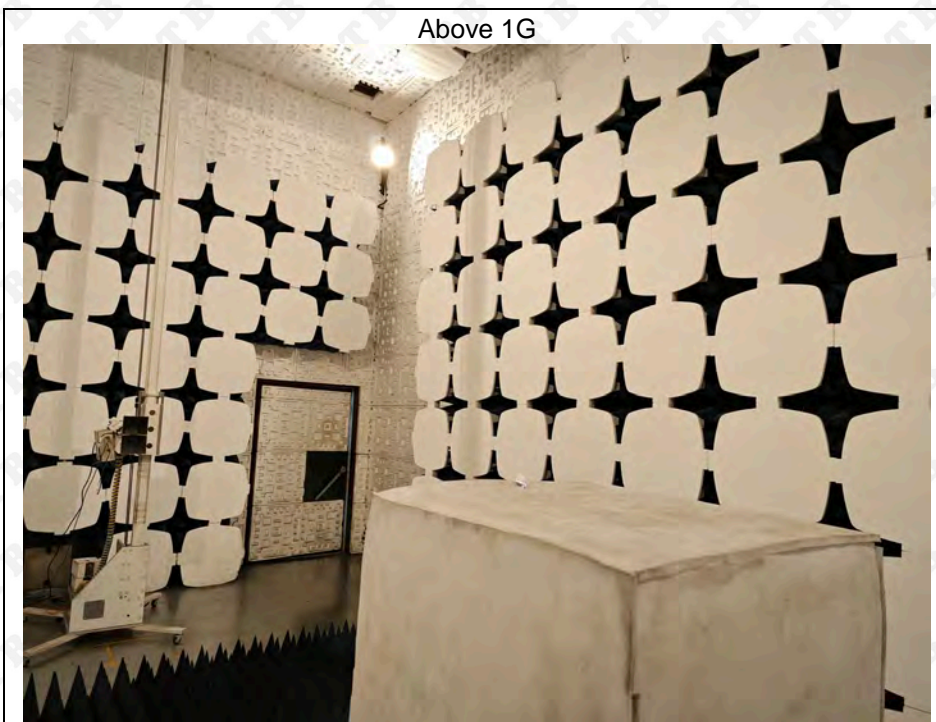

Conducted emissions



※※※※ END OF REPORT ※※※※