


# WiFi Door Open Sensor

## INSTRUCTION



# Product Configuration

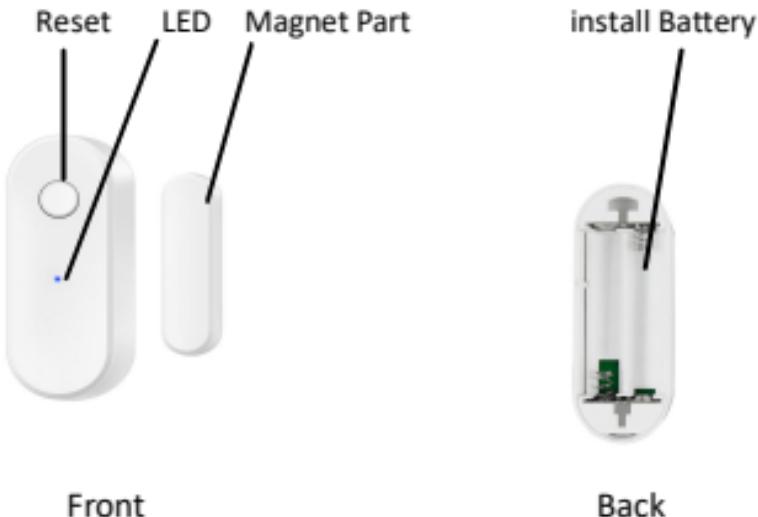

## Usage:

The wifi door detector is fixed in the door or in the window. When door or window is opened illegally, the magnet will be separated from the detector, and detector will connect to the wifi router and push an app alert.

## Specifications

Battery: AAA 1.5Vx2 (battery not include)

Standby Current: ≤50uA

Protocol: IEEE 802.11b/g/n

Operating Temperature: -10°C~40°C (14°F~104°F)

Operating Humidity: 20%~85%

Storage Temperature: -10°C~60°C (14°F~140°F)

Detection mode : Magnet separation induction.

Installation mode : Double-sided tape or screw

Storage Humidity: 0%~90%

WiFi Type: 2.4GHz WiFi

Standby Time: 4-6 months

Size: Device Part : 70x26.4x21.6mm

Magnet Part: 50.4x15x17.6mm



TuyaSmart / Smart Life

## Download App:

Search and download "Smart Life" in APP Store. Also you can scan below QR code directly to download the app.



## Run App:

1. Install "Smart life" in your smartphone
2. Register and login the app.

There are 2 methods to connect the device to wifi router, you can choose Smart wifi mode or AP mode. Recommended the Smart WiFi Mode.

### Connect to wifi (**Smart WiFi Mode**).


1. (MobilePhone) Please enable the bluetooth function of your phone.
2. (Device) Press and hold: "Setting Button" on the detector for 6 seconds, the LED indicator will blink

rapidly. The device will be in Smart Wi-Fi Mode.

3. (APP) Click "+". Choose: Add Device.


4. APP will discover the devices, then click "Add".

5. Click "Next". Then wait to connect successfully.(Only compatible 2.4G WiFi, please not 5G WiFi)

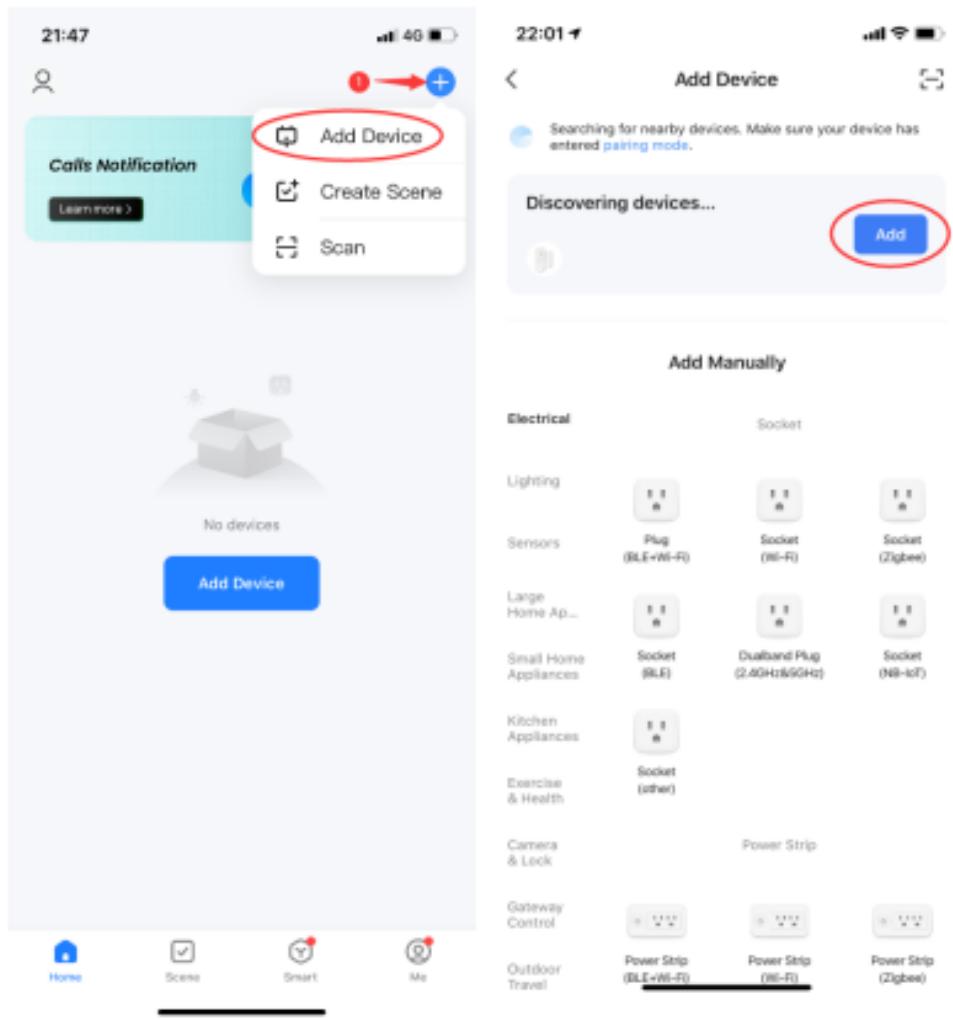

## Connect to wifi (AP Mode).

1. (Device) Press and hold: "Setting Button" on the detector for 6 seconds, the LED indicator will blink rapidly, and then press and hold: "Setting Button" on the detector for 6 seconds again, the LED indicator will blink slowly. The device will be in AP Mode.
2. (APP) Click "+". Choose: Add Device.
3. Choose: "Sensors", then choose: "Contact Sensor"

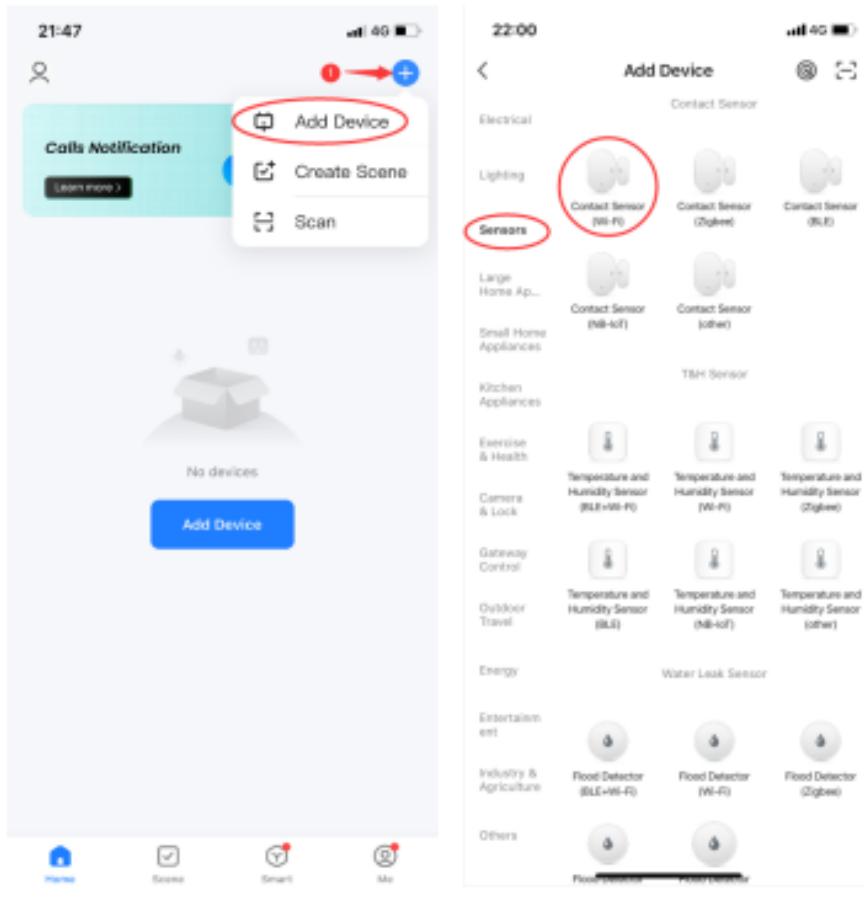

4. Input your wifi name and password. Click: "Next".
5. Click: "Confirm the indicator is blinking".
6. Choose: "Blink Slowly".
7. Connect your phone to WiFi: SmartLife-xxxx
8. Back to APP until connect wifi successfully.

22:45

22:45

22:45


22:45

X

X

Select 2.4 GHz Wi-Fi Network and enter password.

If your Wi-Fi is 5GHz, please set it to be 2.4GHz.  
[Common router setting method](#)

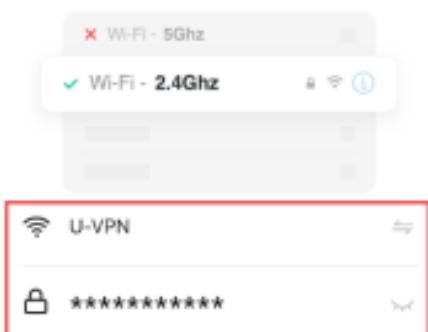

Reset the device




Press and hold the RESET button for 5 seconds until the indicator blinks (subject to the user manual).



Next

Confirm the indicator is blinking

Reset Device Step by Step

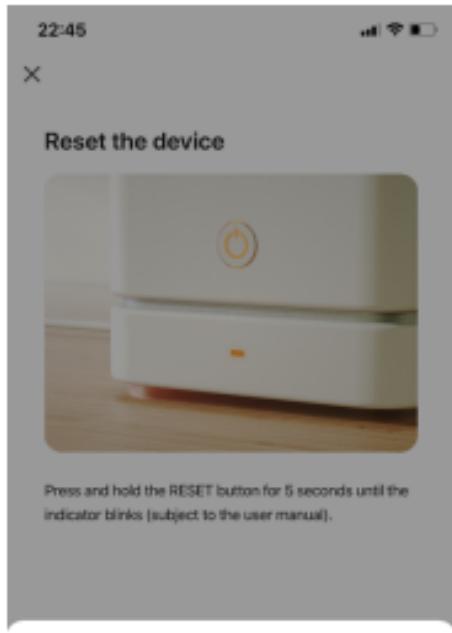

Select the status of the indicator light or hear the beep:

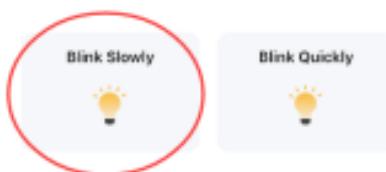

## How to test it?

Please move the magnet close and separate away from the detector, you can see the LED indicator light come on, and you will receive APP alert. If you can not receive the APP alert message, please make sure the triangle icons on the detector case and magnet case are in the same position, and make sure all the app notification permissions are enabled.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.