



Appendix C

RF Test Data for 5.2GWIFI(Conducted Measurement)

Product Name: fully automatic cat toilet

Test Model: HIP-C201L

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng





C.1 -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	22.901	---	Pass
NVNT	a	5200	Ant1	23.782	---	Pass
NVNT	a	5240	Ant1	21.123	---	Pass
NVNT	n20	5180	Ant1	24.722	---	Pass
NVNT	n20	5200	Ant1	24.902	---	Pass
NVNT	n20	5240	Ant1	25.038	---	Pass
NVNT	n40	5190	Ant1	39.492	---	Pass
NVNT	n40	5230	Ant1	41.705	---	Pass






Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

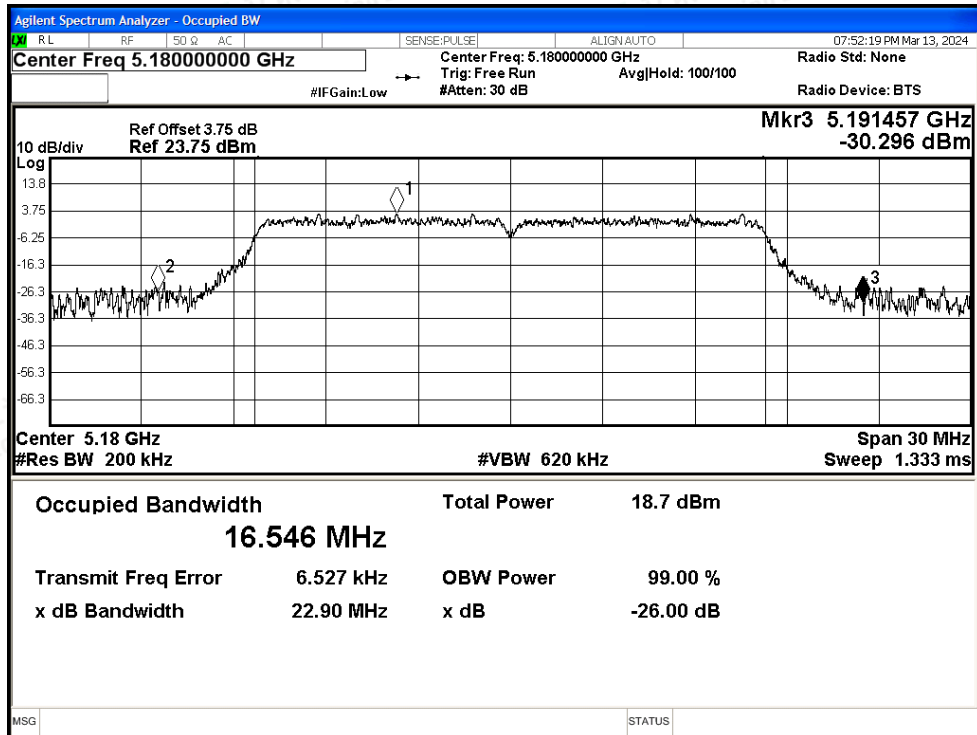


-26dB Bandwidth NVNT a 5200MHz Ant1

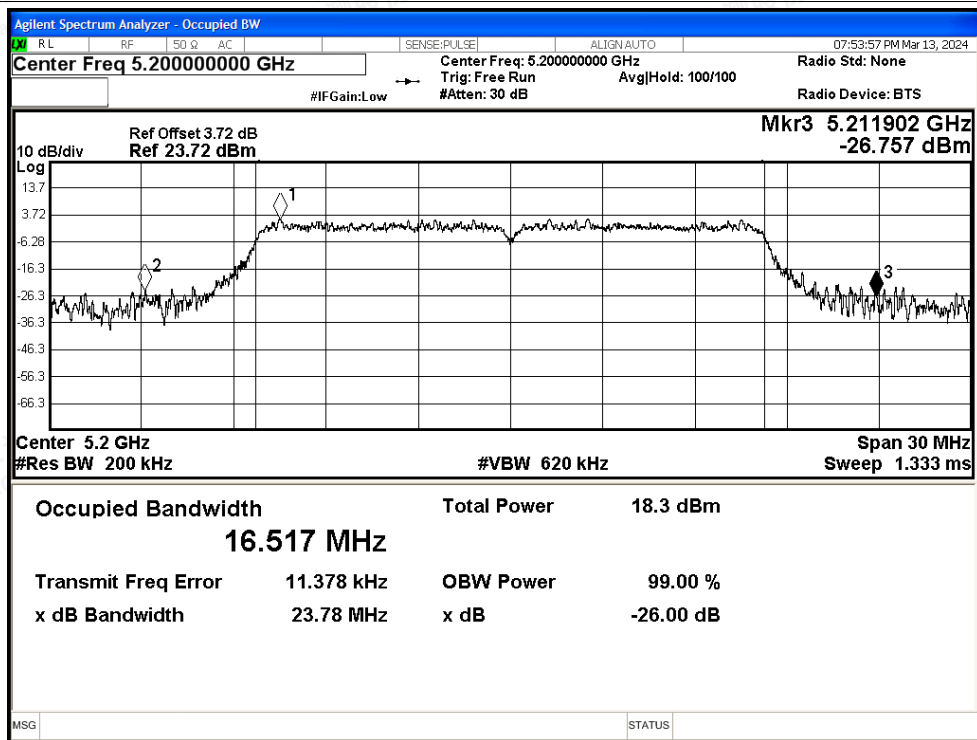




-26dB Bandwidth NVNT a 5240MHz Ant1

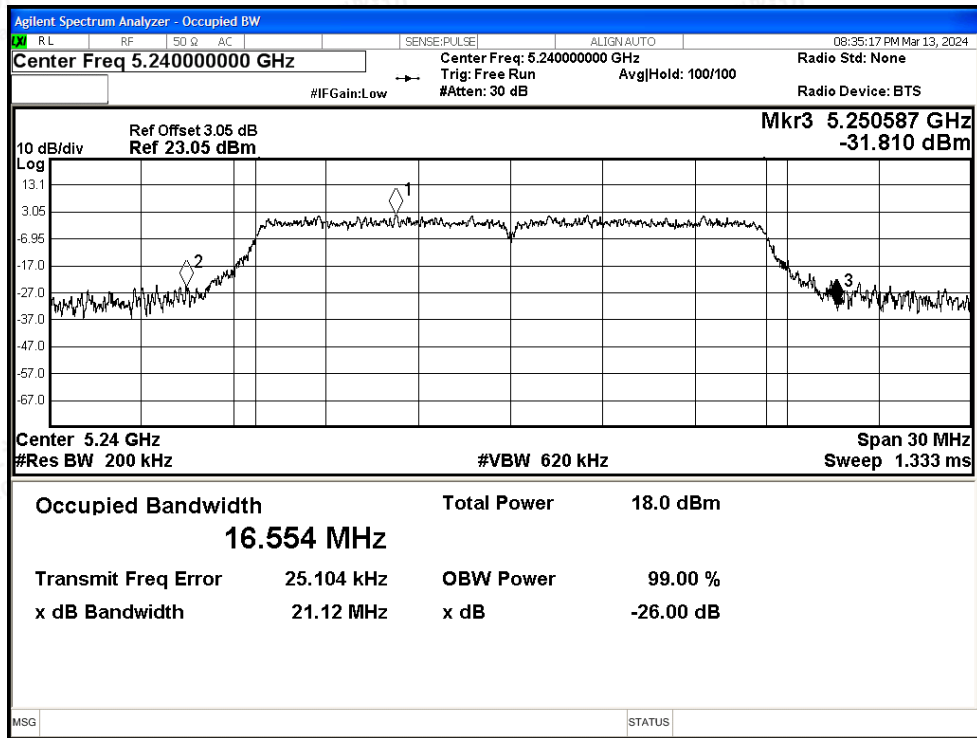


-26dB Bandwidth NVNT n20 5180MHz Ant1

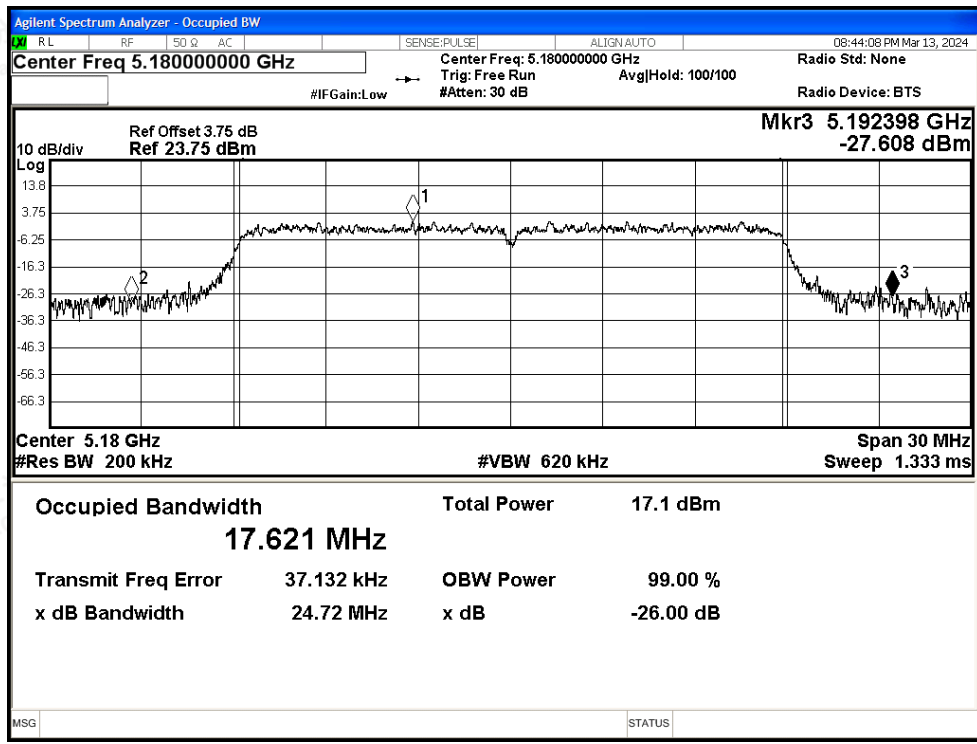




-26dB Bandwidth NVNT n20 5200MHz Ant1

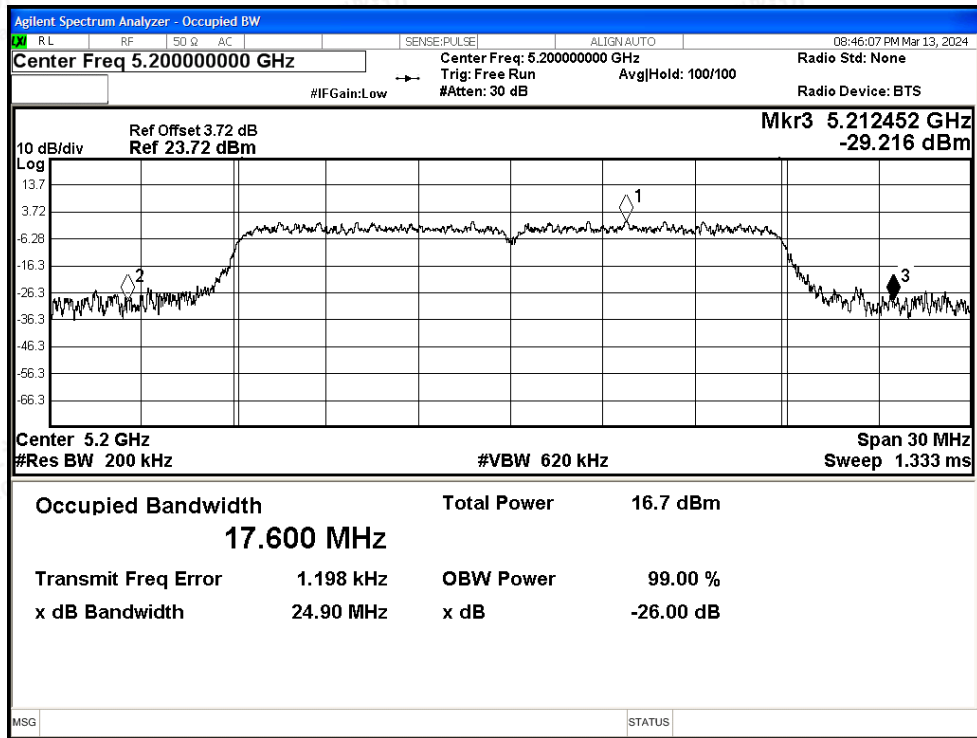


-26dB Bandwidth NVNT n20 5240MHz Ant1

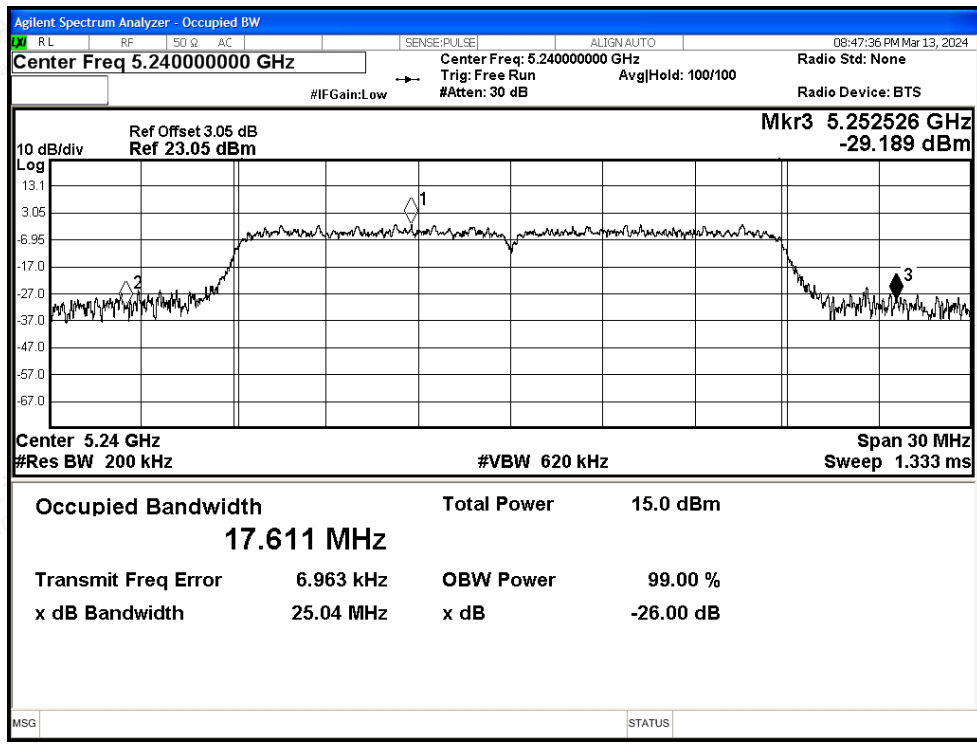




-26dB Bandwidth NVNT n40 5190MHz Ant1

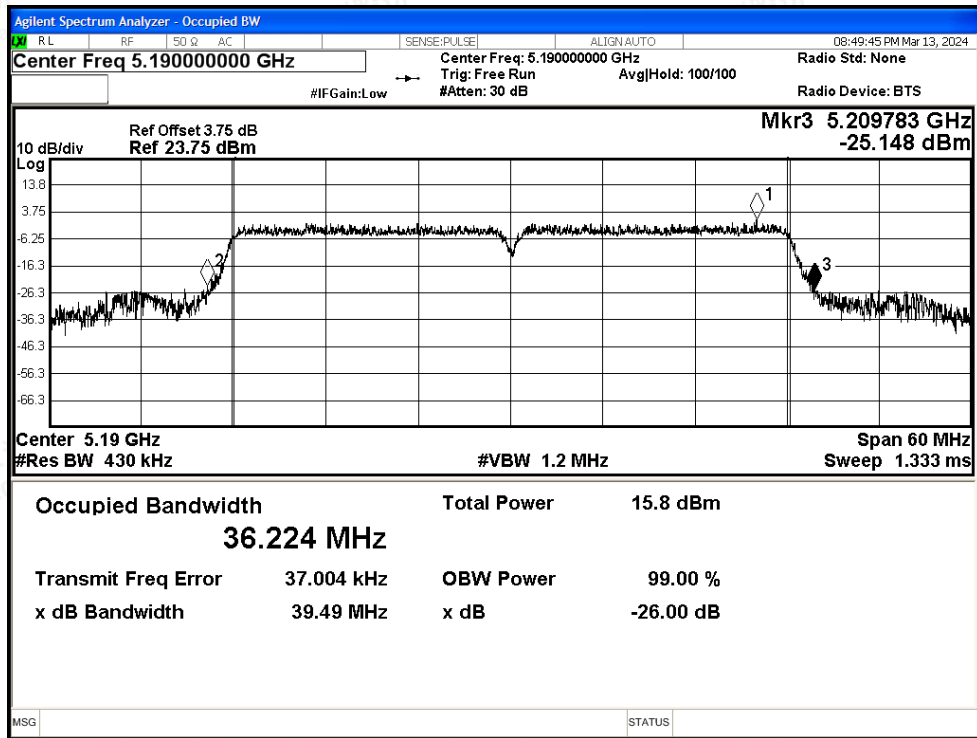

-26dB Bandwidth NVNT n40 5230MHz Ant1

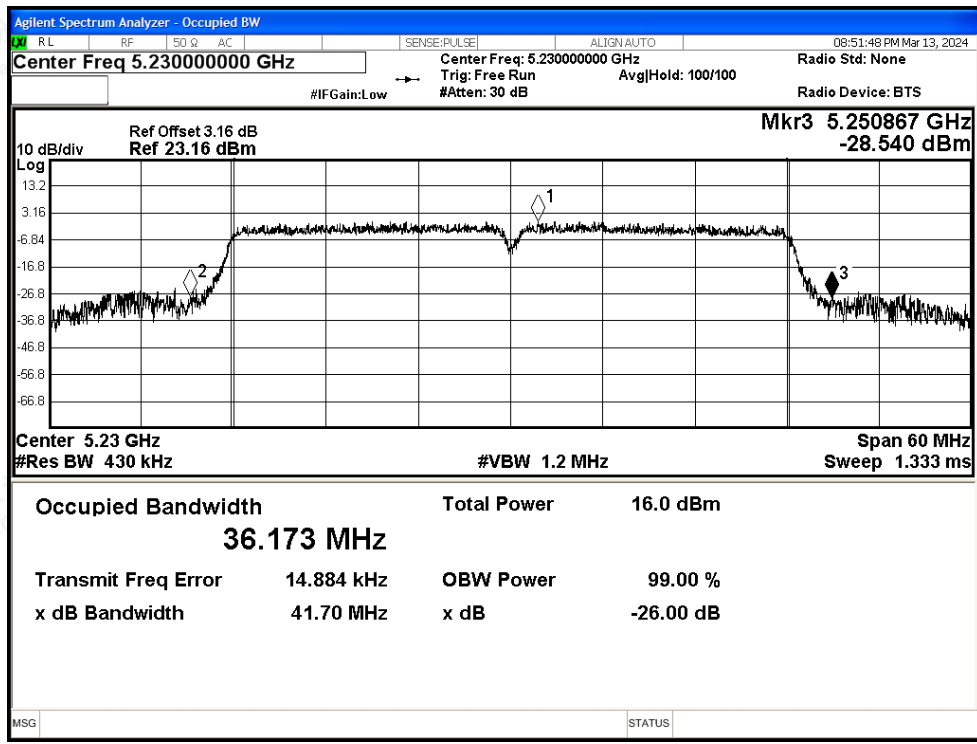



C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.82	0.37	13.19	24	Pass
NVNT	a	5200	Ant1	12.44	0.38	12.82	24	Pass
NVNT	a	5240	Ant1	11.67	0.37	12.04	24	Pass
NVNT	n20	5180	Ant1	10.99	0.43	11.42	24	Pass
NVNT	n20	5200	Ant1	10.73	0.43	11.16	24	Pass
NVNT	n20	5240	Ant1	10	0.43	10.43	24	Pass
NVNT	n40	5190	Ant1	9.6	0.79	10.39	24	Pass
NVNT	n40	5230	Ant1	9.72	0.79	10.51	24	Pass





C.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	2.15	0.37	2.52	11	Pass
NVNT	a	5200	Ant1	1.93	0.38	2.31	11	Pass
NVNT	a	5240	Ant1	1.39	0.37	1.76	11	Pass
NVNT	n20	5180	Ant1	0.3	0.43	0.73	11	Pass
NVNT	n20	5200	Ant1	0	0.43	0.43	11	Pass
NVNT	n20	5240	Ant1	-1.32	0.43	-0.89	11	Pass
NVNT	n40	5190	Ant1	-4.02	0.79	-3.23	11	Pass
NVNT	n40	5230	Ant1	-4.04	0.79	-3.25	11	Pass






Test Graphs

PSD NVNT a 5180MHz Ant1

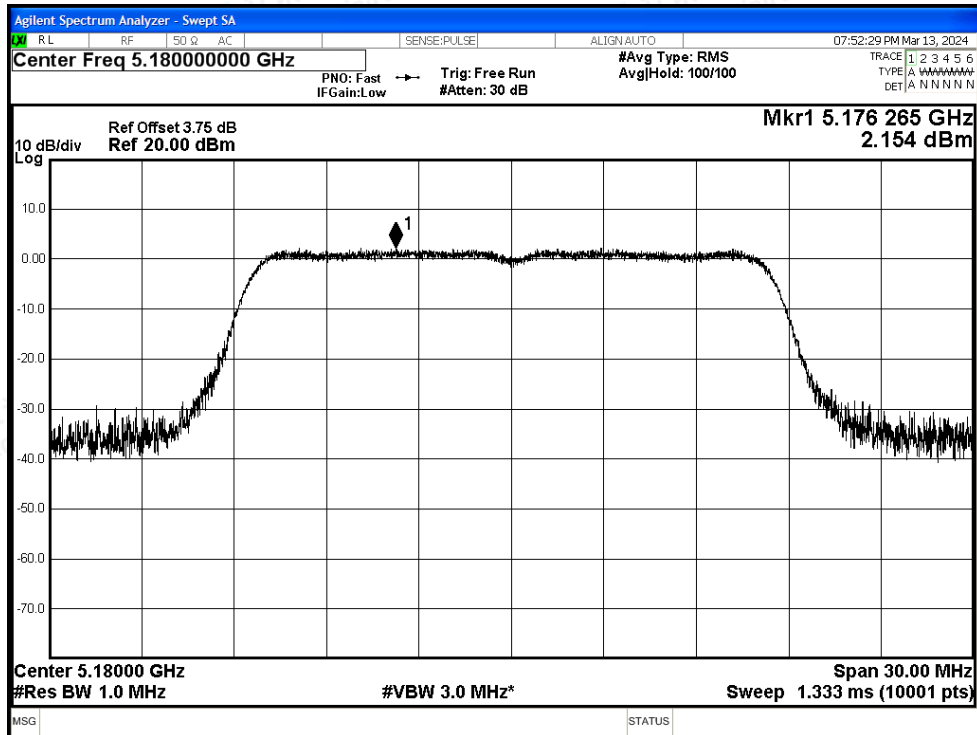


PSD NVNT a 5200MHz Ant1

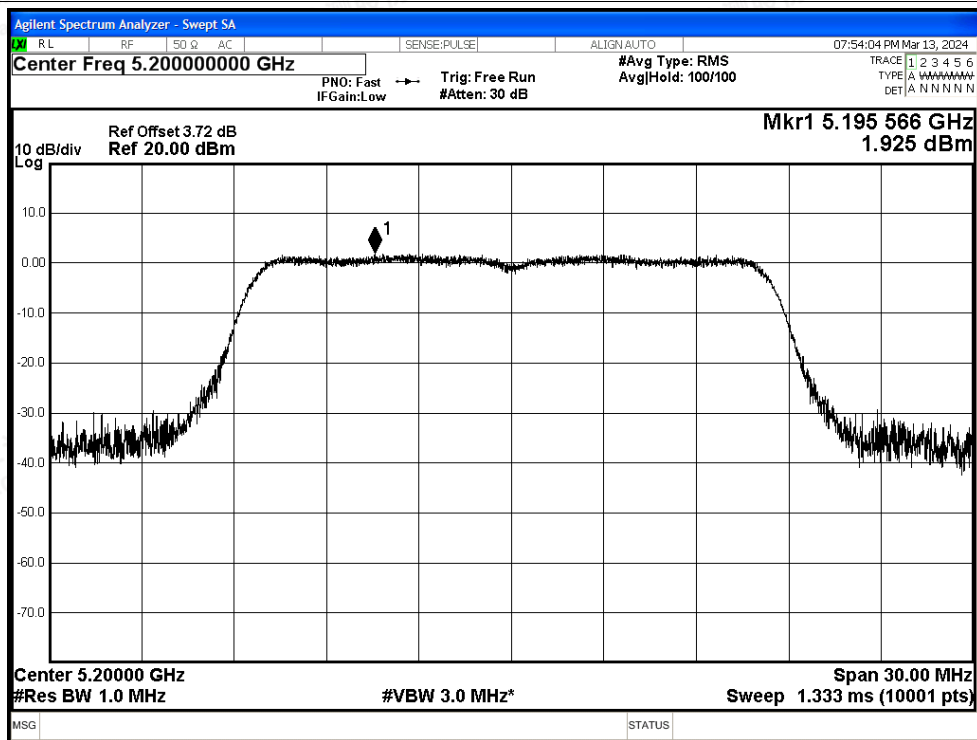




PSD NVNT a 5240MHz Ant1

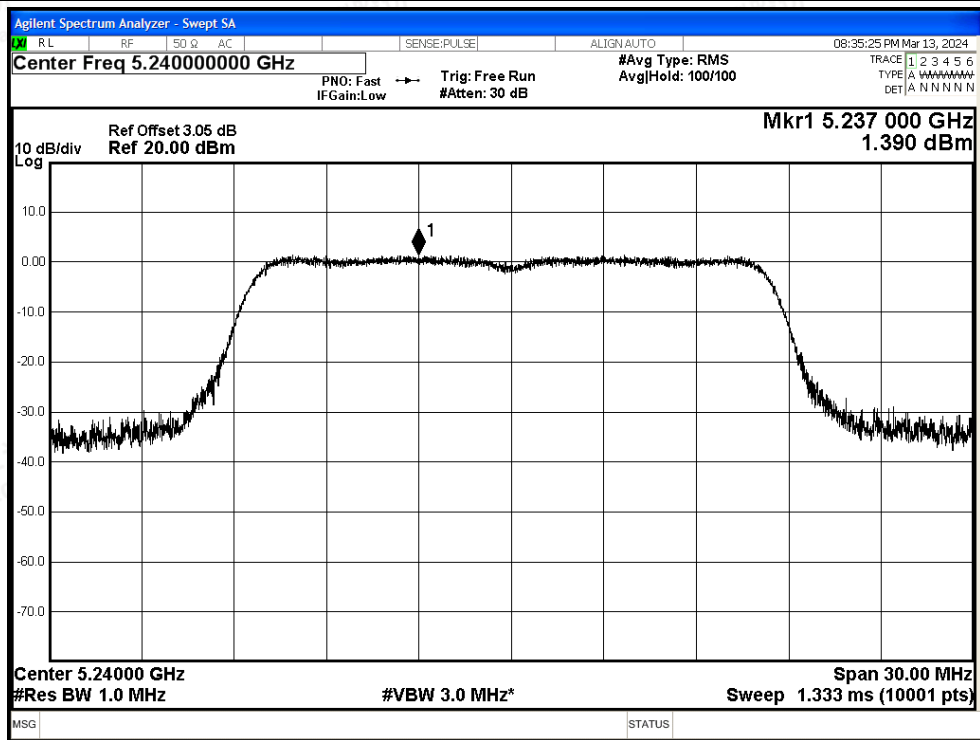


PSD NVNT n20 5180MHz Ant1

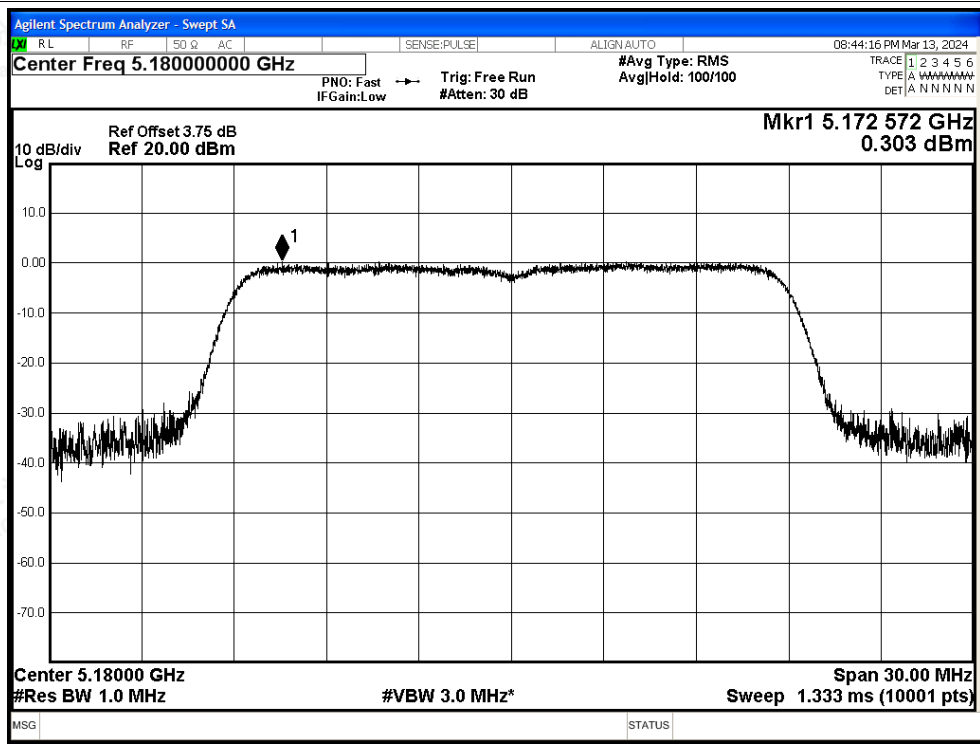




PSD NVNT n20 5200MHz Ant1

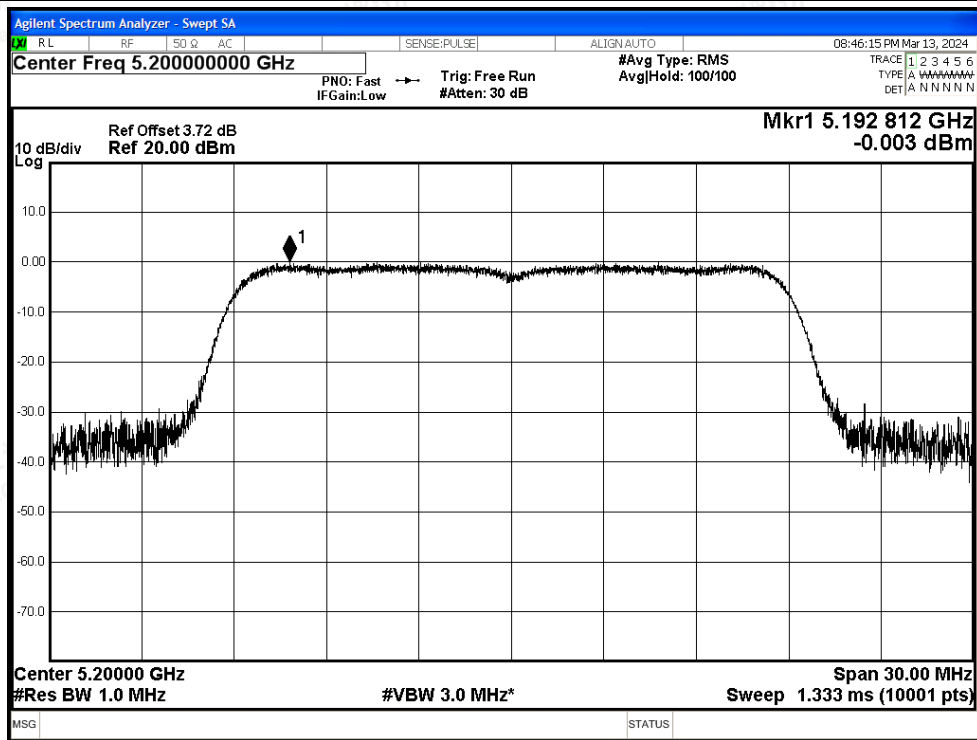


PSD NVNT n20 5240MHz Ant1

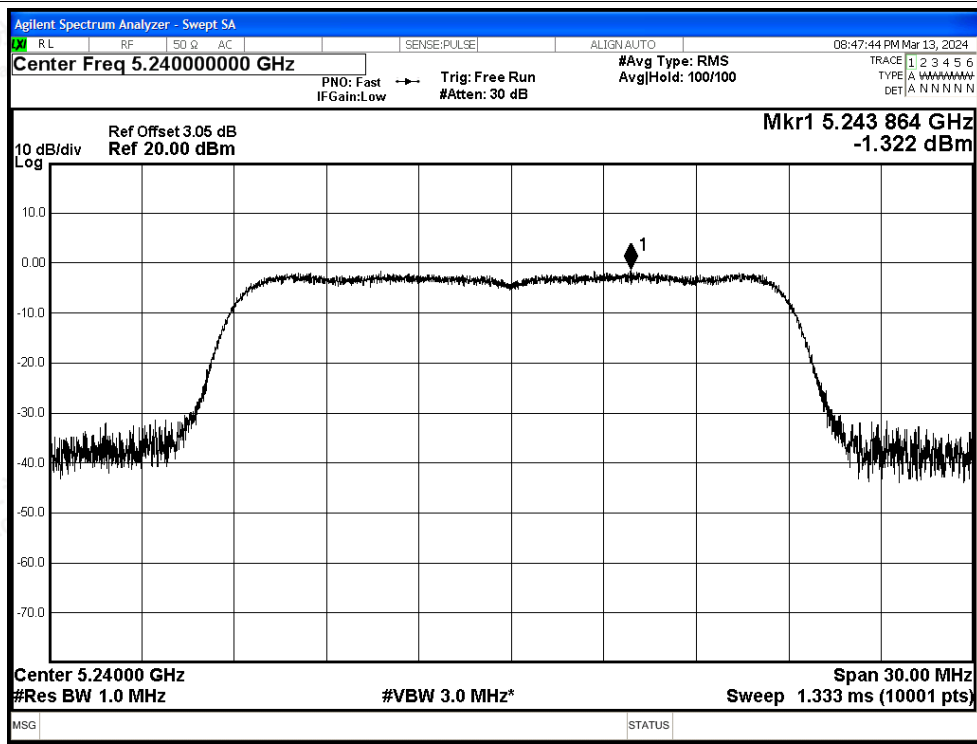




PSD NVNT n40 5190MHz Ant1

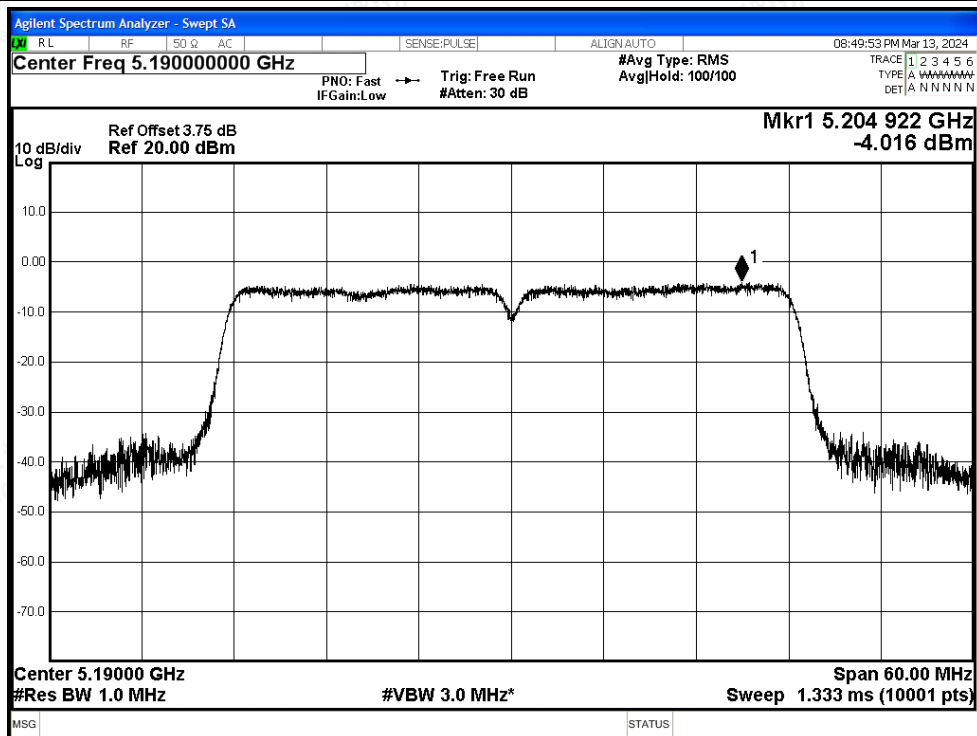

PSD NVNT n40 5230MHz Ant1

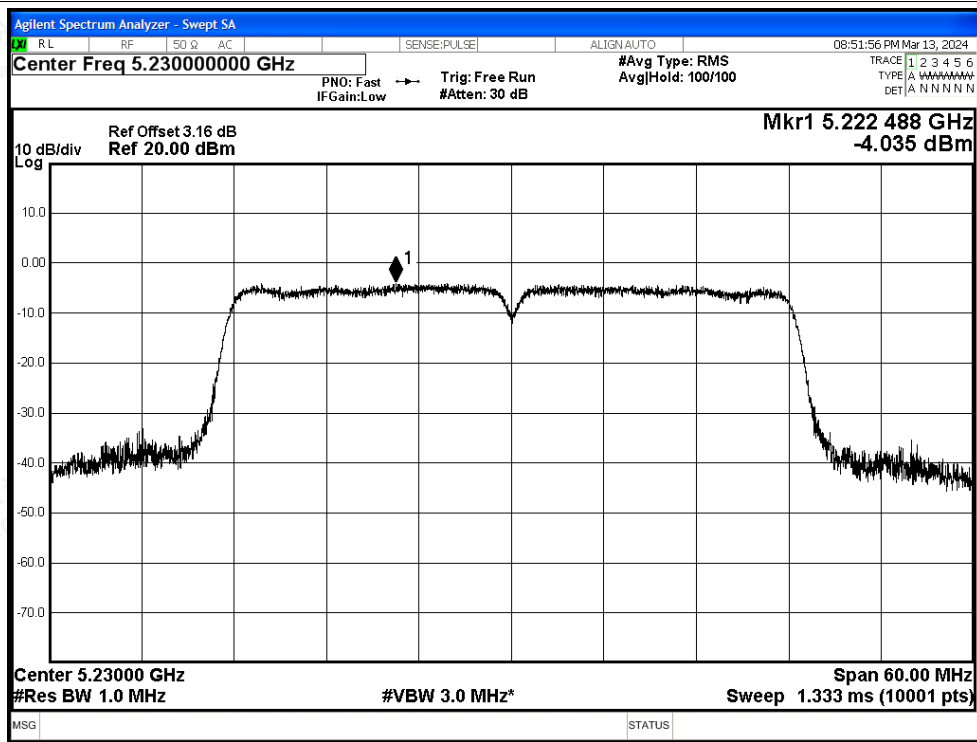



C.4 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBUV/m)	Detector	Limit (dBUV/m)	Verdict
NVNT	a	5180	Ant1	4500	-51.82	5.05	-	48.46	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-58.69	5.05	0.37	41.96	Average	54	Pass
NVNT	a	5180	Ant1	5149.6	-42.08	5.05	-	58.2	Peak	68.2	Pass
NVNT	a	5180	Ant1	5148.9	-55.62	5.05	0.37	45.03	Average	54	Pass
NVNT	a	5180	Ant1	5150	-42.99	5.05	-	57.29	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-55.4	5.05	0.37	45.25	Average	54	Pass
NVNT	a	5240	Ant1	5350	-50.3	5.05	-	49.98	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-58.9	5.05	0.37	41.75	Average	54	Pass
NVNT	a	5240	Ant1	5409.84	-47.56	5.05	-	52.72	Peak	68.2	Pass
NVNT	a	5240	Ant1	5430	-57.45	5.05	0.37	43.2	Average	54	Pass
NVNT	a	5240	Ant1	5460	-50.33	5.05	-	49.95	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-58.17	5.05	0.37	42.48	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-50.05	5.05	-	50.23	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-58.59	5.05	0.43	42.12	Average	54	Pass
NVNT	n20	5180	Ant1	5146.1	-42.63	5.05	-	57.65	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-54.35	5.05	0.43	46.36	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-46.6	5.05	-	53.68	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-54.65	5.05	0.43	46.06	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-51.26	5.05	-	49.02	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-58.45	5.05	0.43	42.26	Average	54	Pass
NVNT	n20	5240	Ant1	5444.4	-47.75	5.05	-	52.53	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5357.76	-57.56	5.05	0.43	43.15	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-49.11	5.05	-	51.17	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-58.29	5.05	0.43	42.42	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-50.06	5.05	-	50.22	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-58.96	5.05	0.79	42.11	Average	54	Pass
NVNT	n40	5190	Ant1	5149.7	-40.19	5.05	-	60.09	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-52.27	5.05	0.79	48.8	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-40.19	5.05	-	60.09	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-52.27	5.05	0.79	48.8	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-50.9	5.05	-	49.38	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-58.8	5.05	0.79	42.27	Average	54	Pass
NVNT	n40	5230	Ant1	5400.6	-47.66	5.05	-	52.62	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5366.58	-57.44	5.05	0.79	43.63	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-50.02	5.05	-	50.26	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-58.32	5.05	0.79	42.75	Average	54	Pass






Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

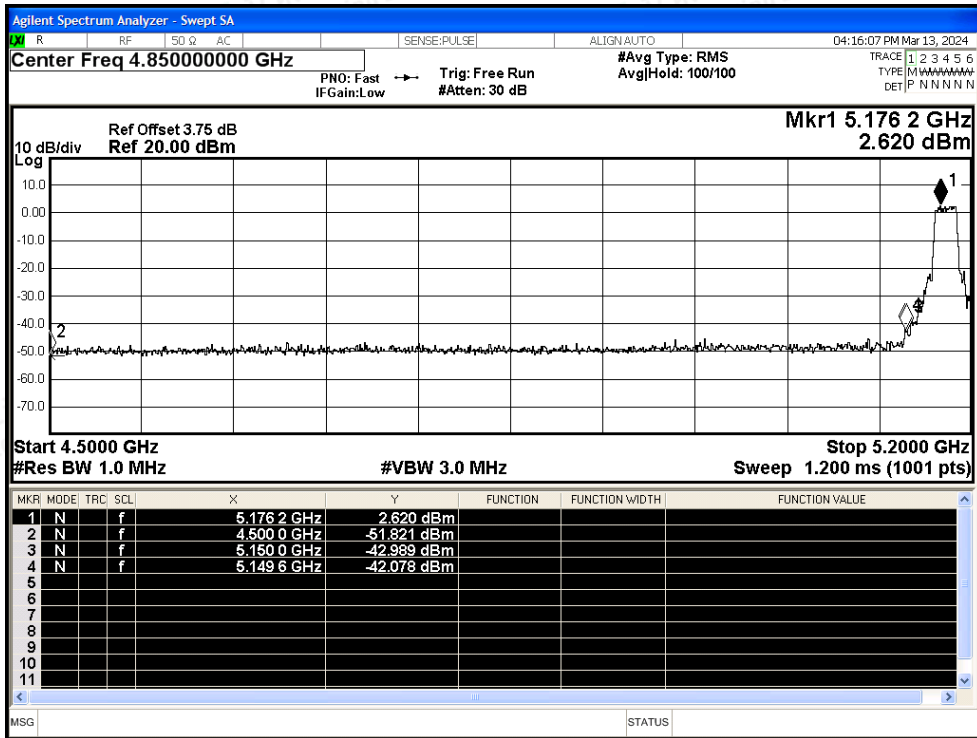


Restrict Band NVNT a 5180MHz Ant1 Average

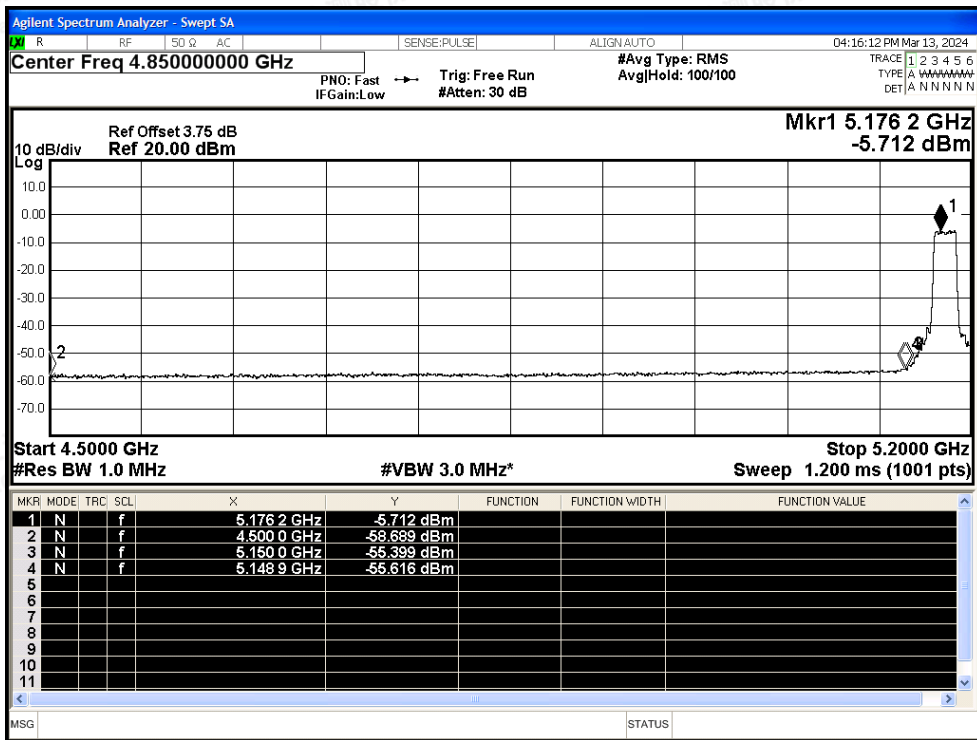




Restrict Band NVNT a 5240MHz Ant1 Peak

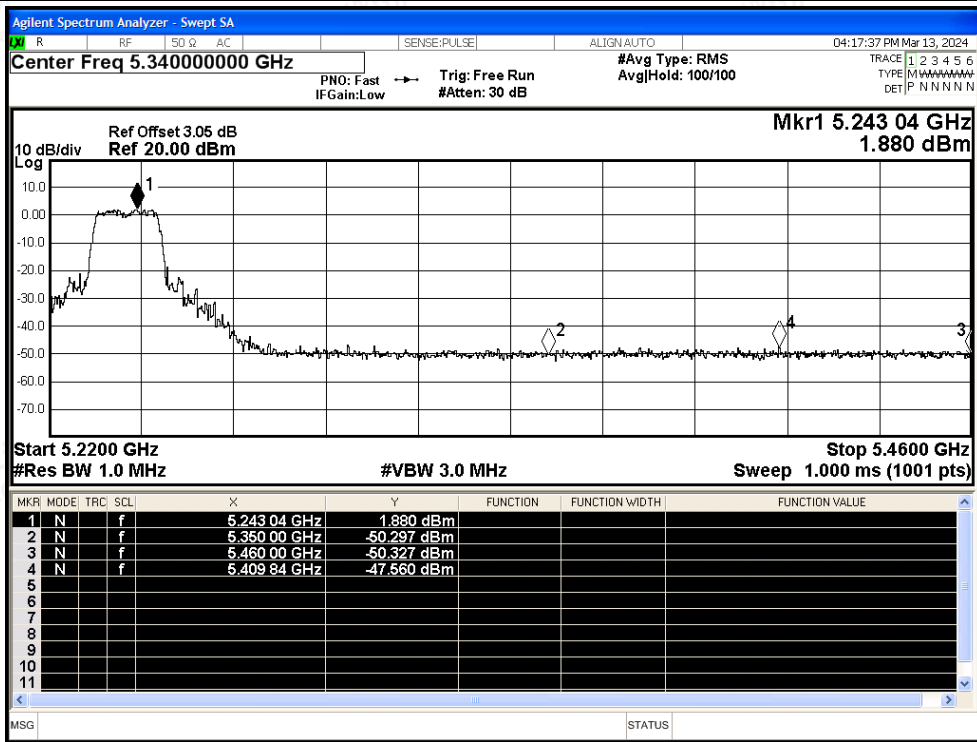


Restrict Band NVNT a 5240MHz Ant1 Average

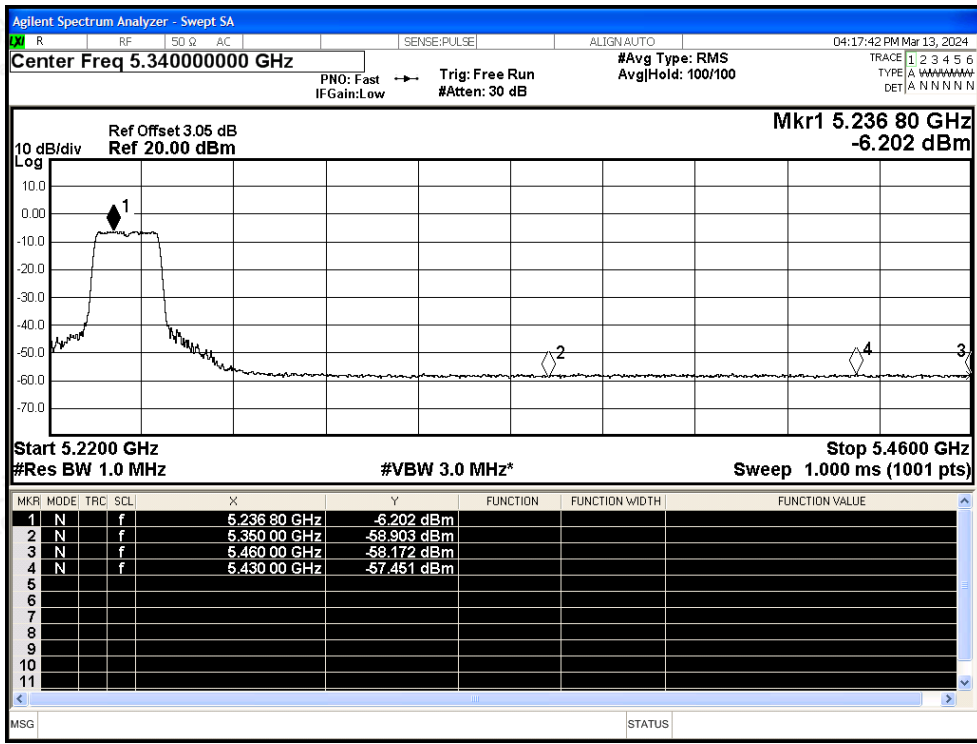




Restrict Band NVNT n20 5180MHz Ant1 Peak

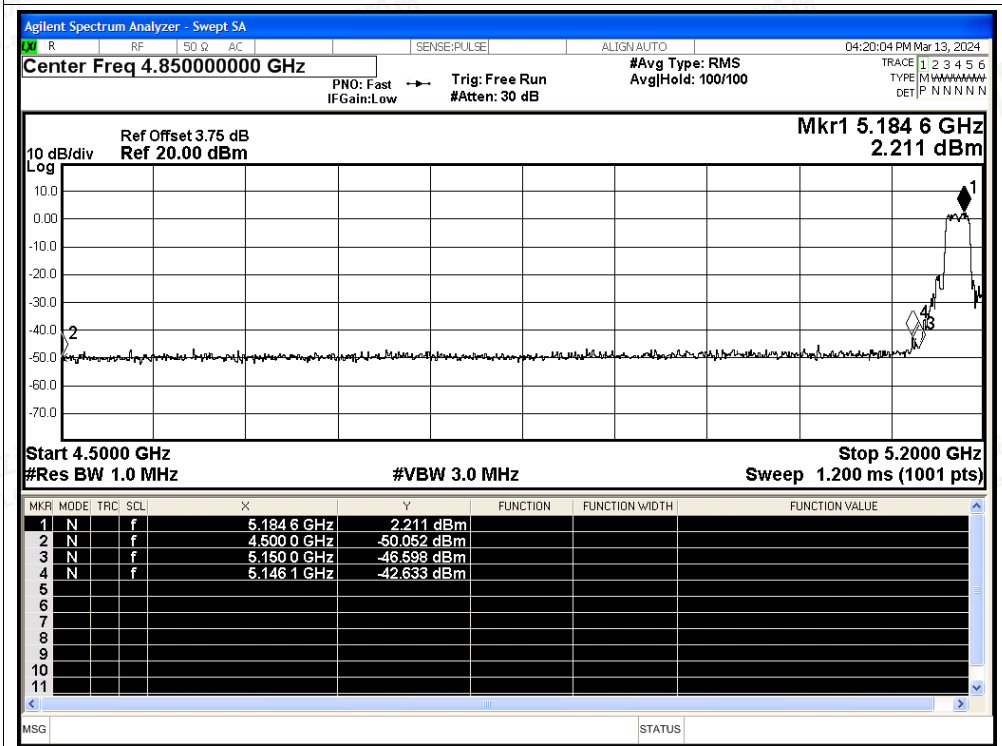


Restrict Band NVNT n20 5180MHz Ant1 Average

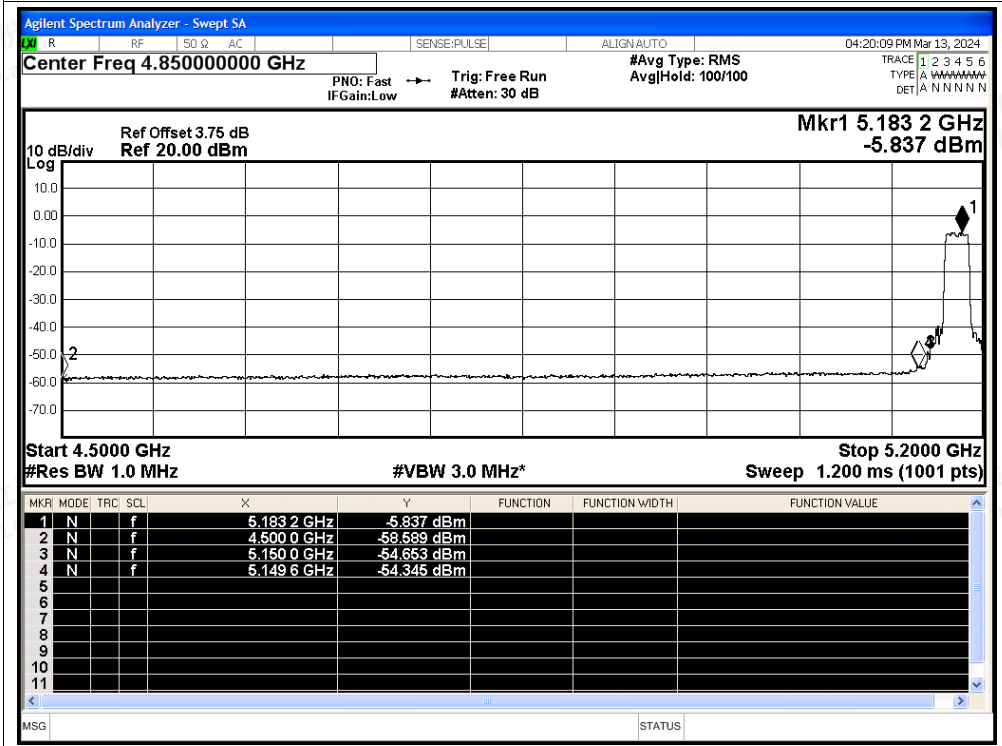




Restrict Band NVNT n20 5240MHz Ant1 Peak

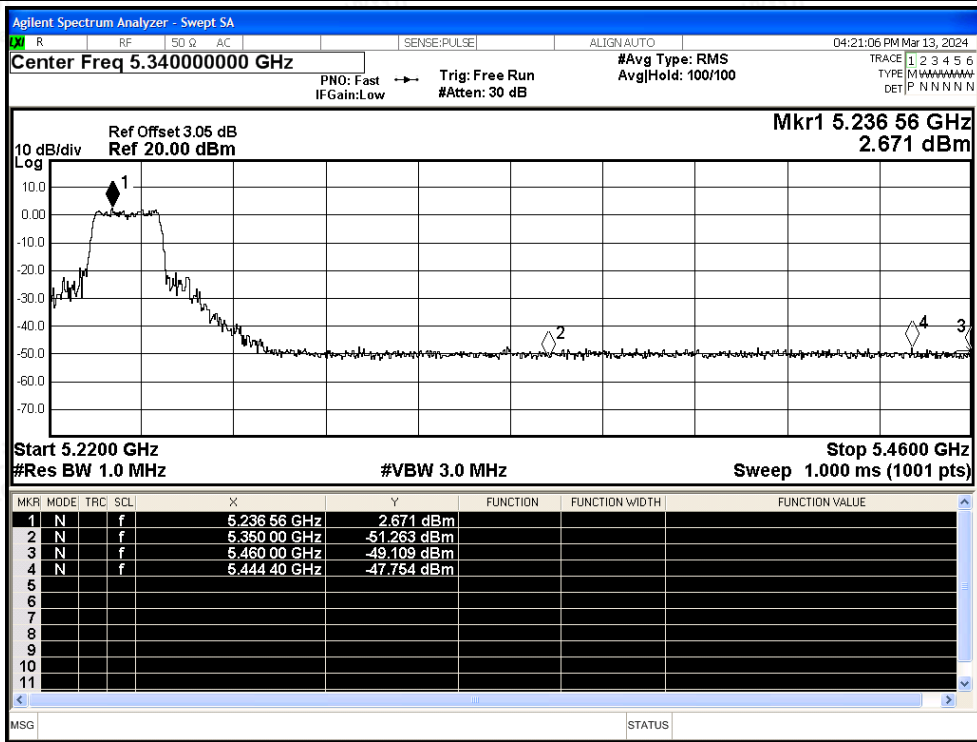


Restrict Band NVNT n20 5240MHz Ant1 Average

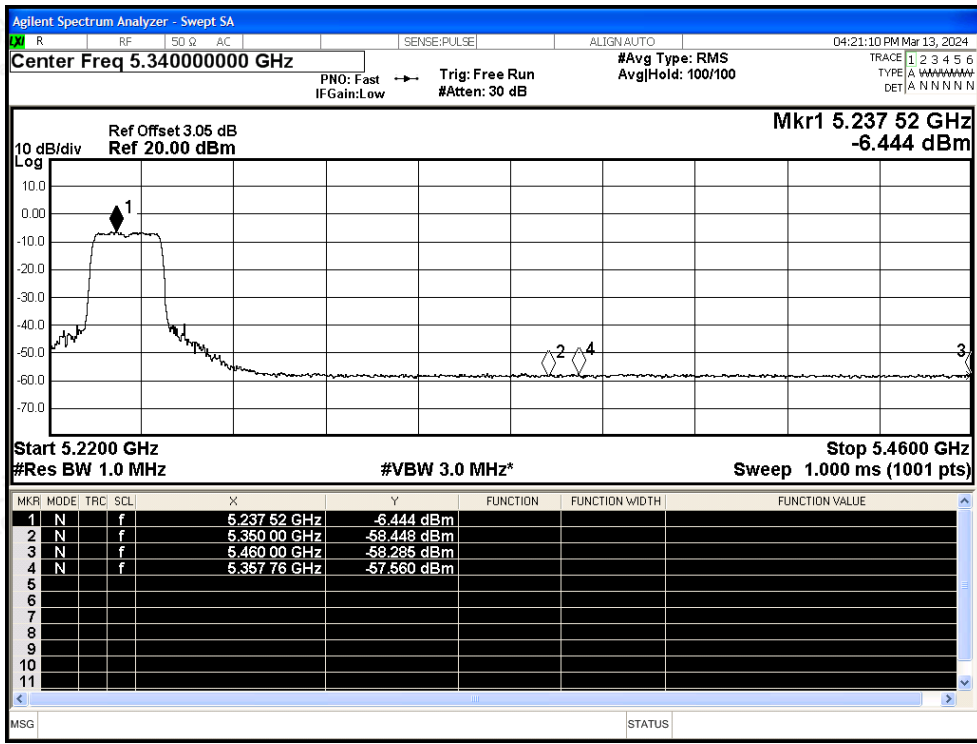




Restrict Band NVNT n40 5190MHz Ant1 Peak

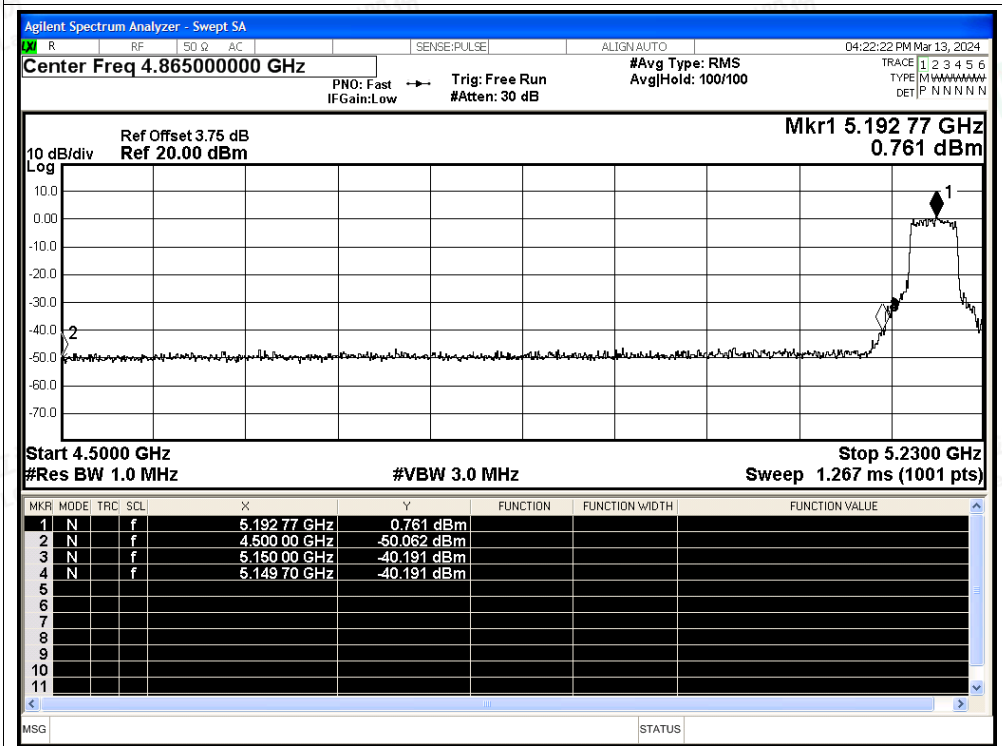


Restrict Band NVNT n40 5190MHz Ant1 Average

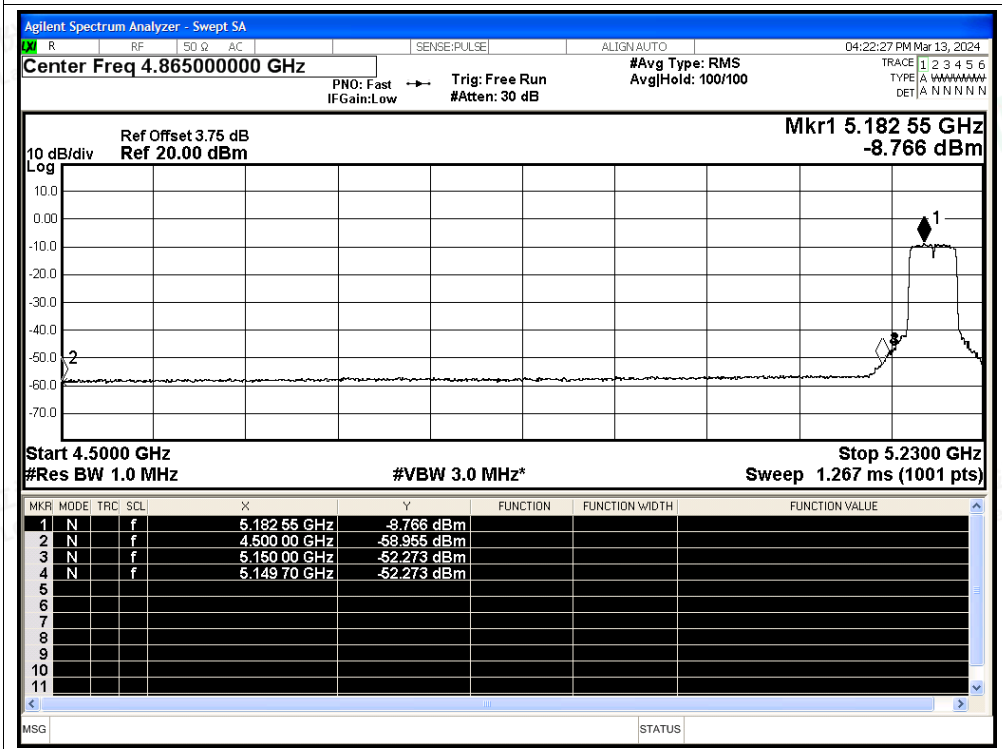




Restrict Band NVNT n40 5230MHz Ant1 Peak

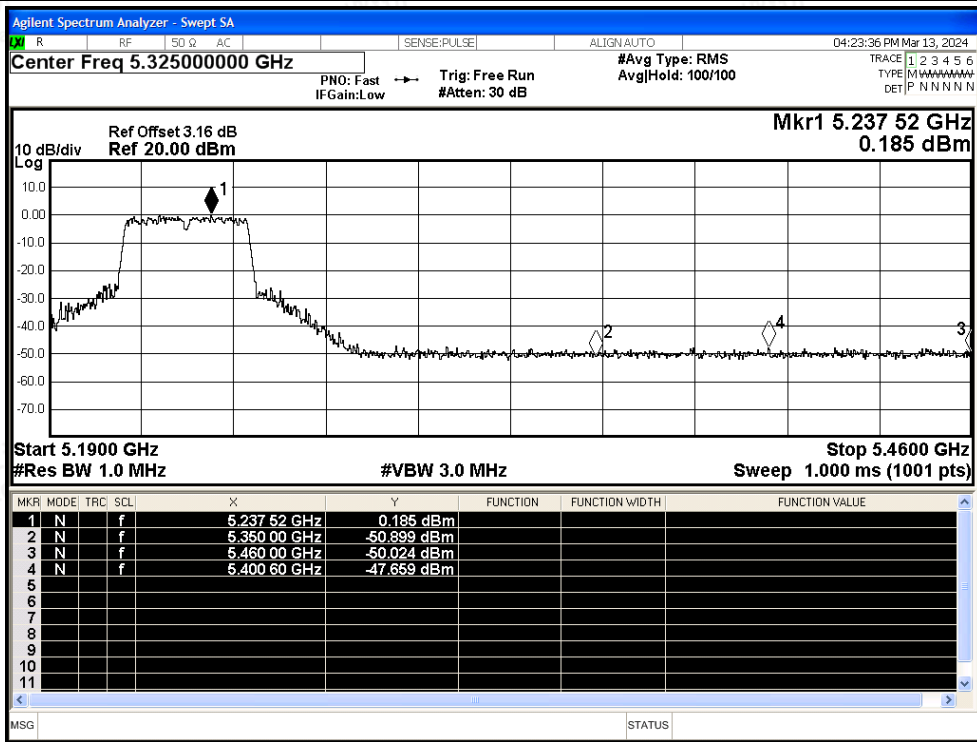

Restrict Band NVNT n40 5230MHz Ant1 Average

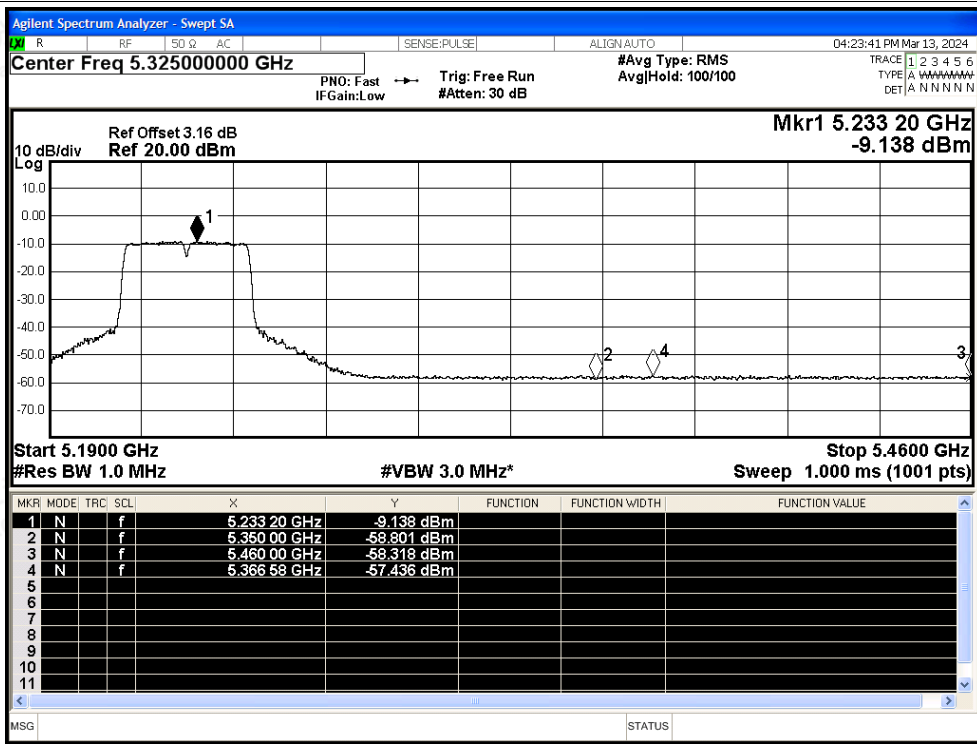



5.Frequency Stability


Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	Ant1	5179.98	-20000	-3.86	25	Pass
NVNT	a	5200	Ant1	5200	0	0	25	Pass
NVNT	a	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
NVNT	n20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
NVNT	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
NVNT	n40	5190	Ant1	5190	0	0	25	Pass
NVNT	n40	5230	Ant1	5230	0	0	25	Pass






Test Graphs

Freq. Stability NVNT a 5180MHz Ant1

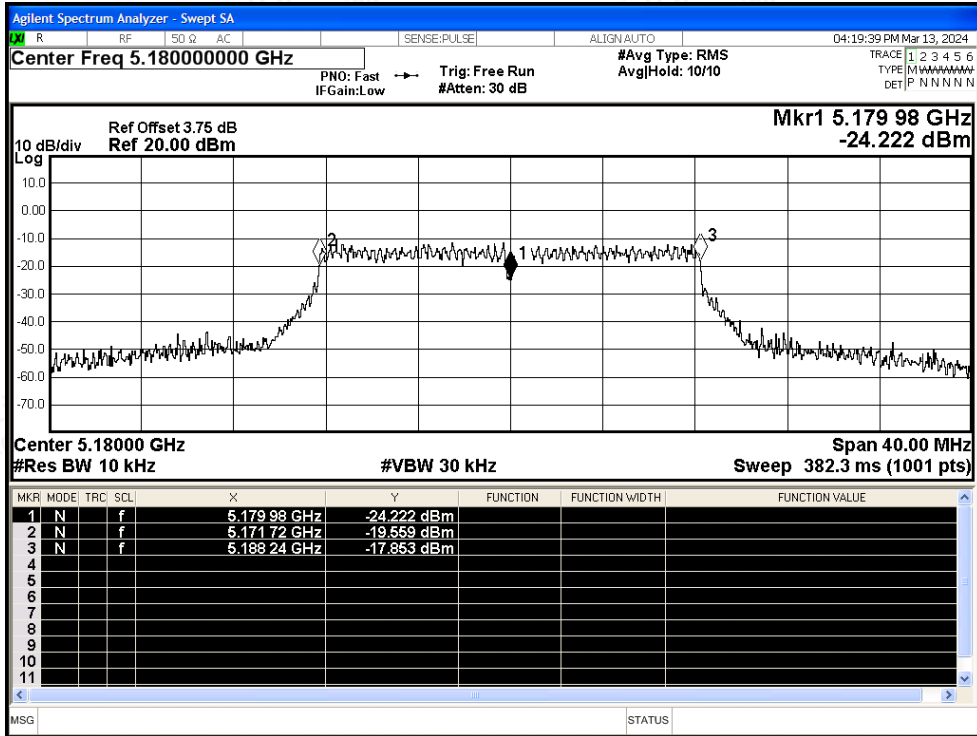


Freq. Stability NVNT a 5200MHz Ant1

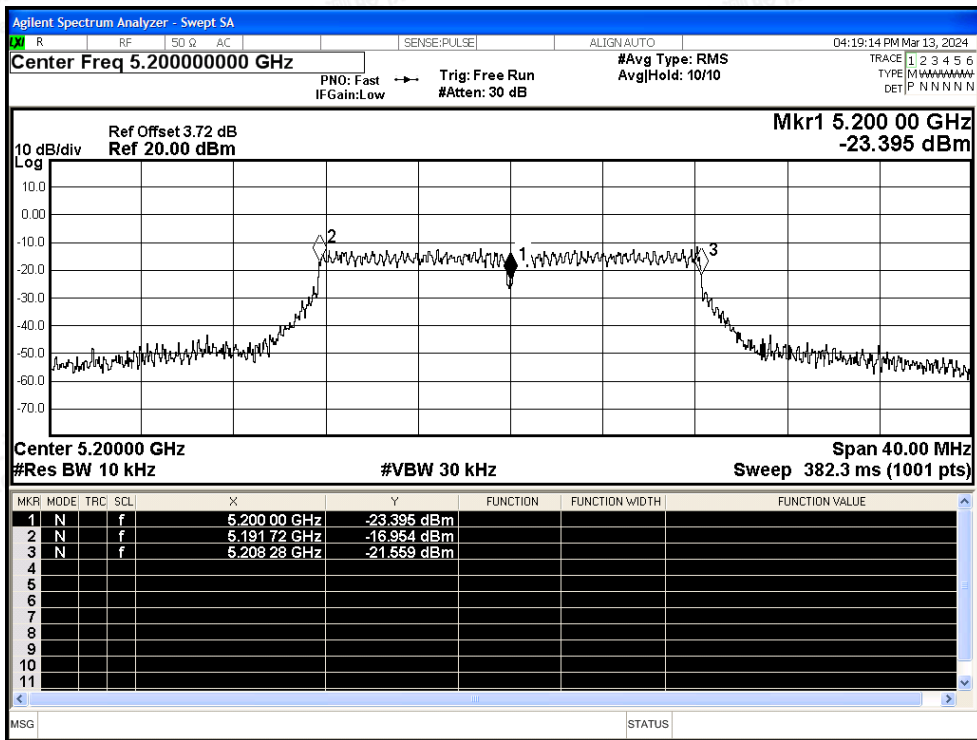




Freq. Stability NVNT a 5240MHz Ant1

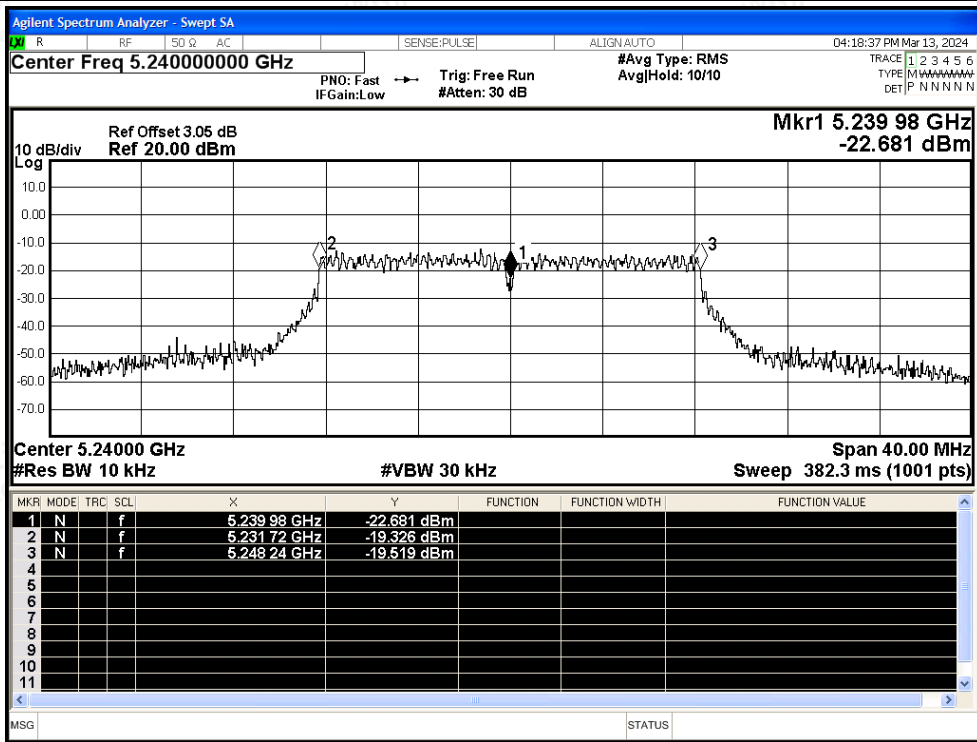


Freq. Stability NVNT n20 5180MHz Ant1

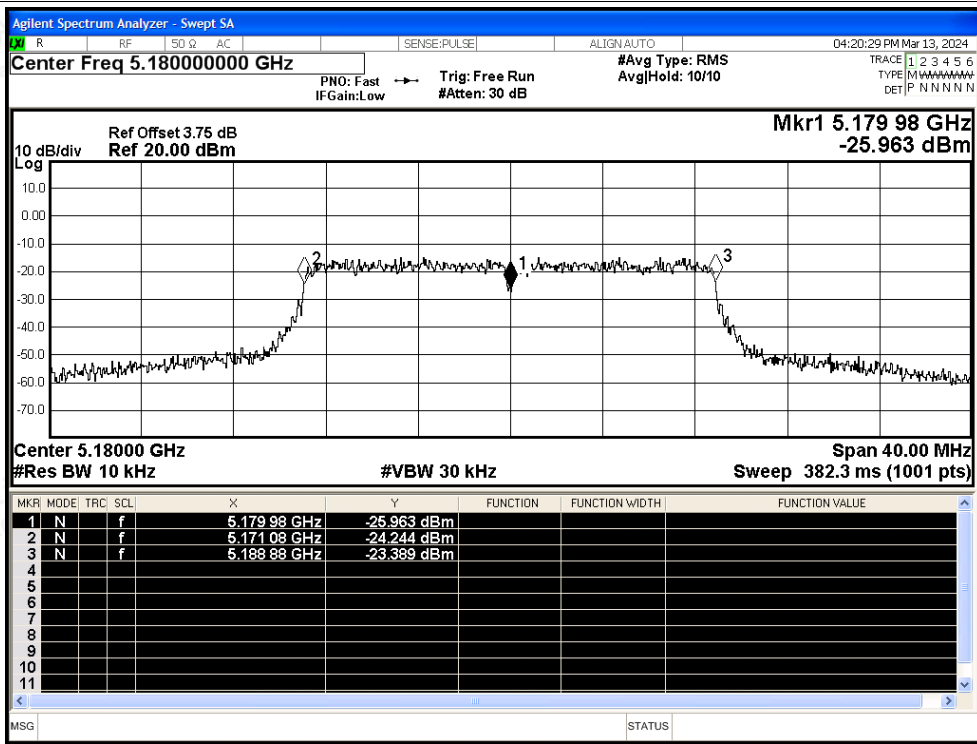




Freq. Stability NVNT n20 5200MHz Ant1

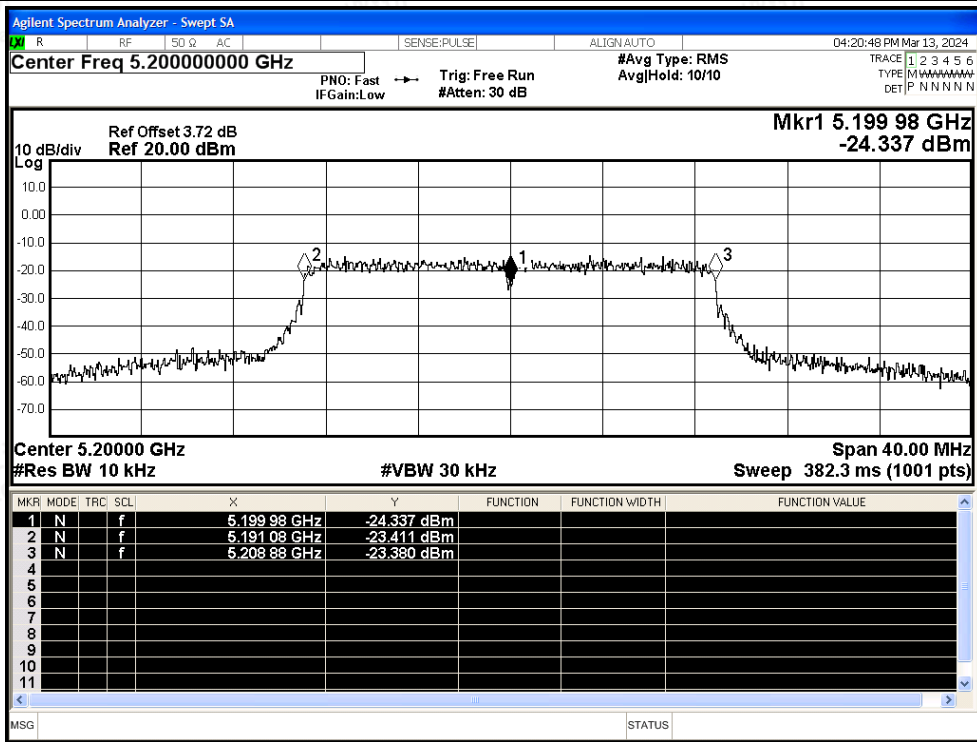


Freq. Stability NVNT n20 5240MHz Ant1

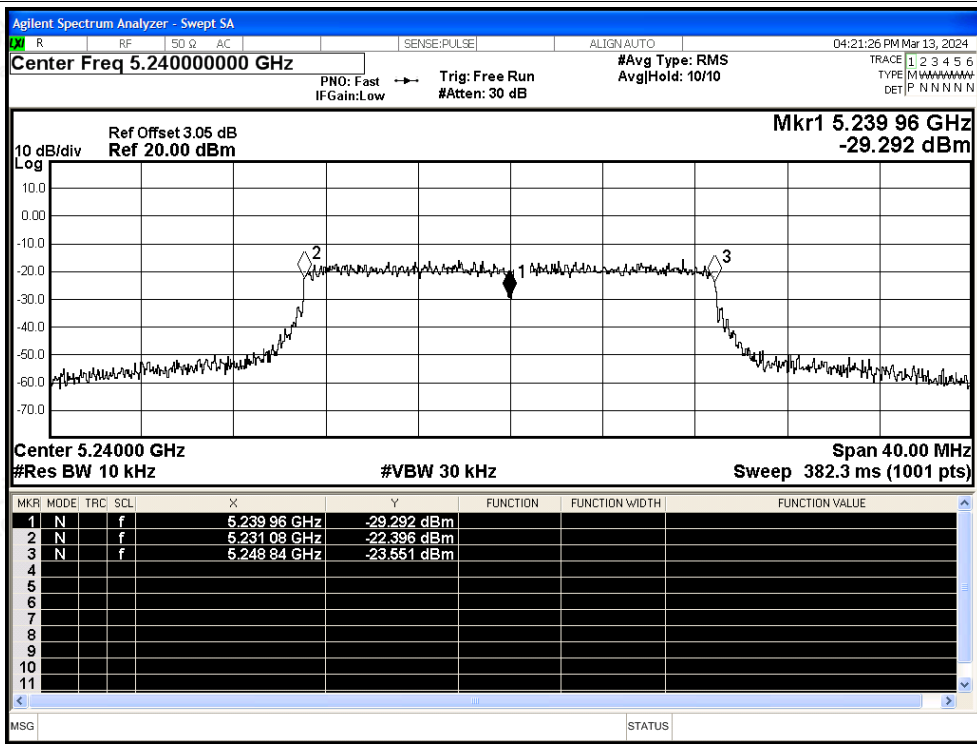




Freq. Stability NVNT n40 5190MHz Ant1

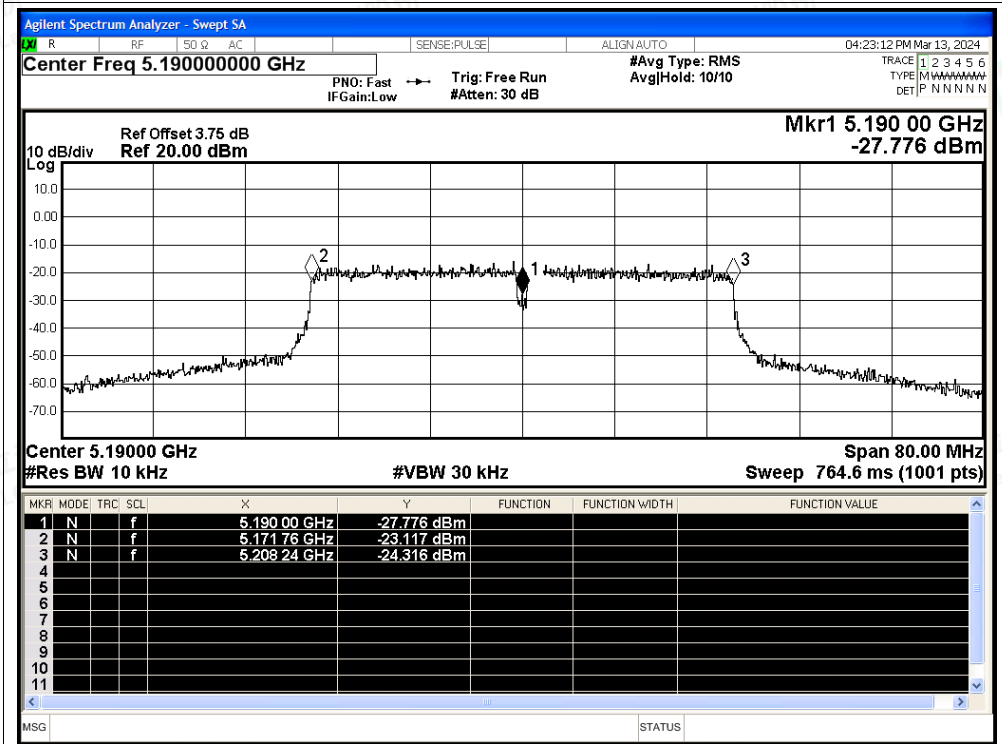

Freq. Stability NVNT n40 5230MHz Ant1

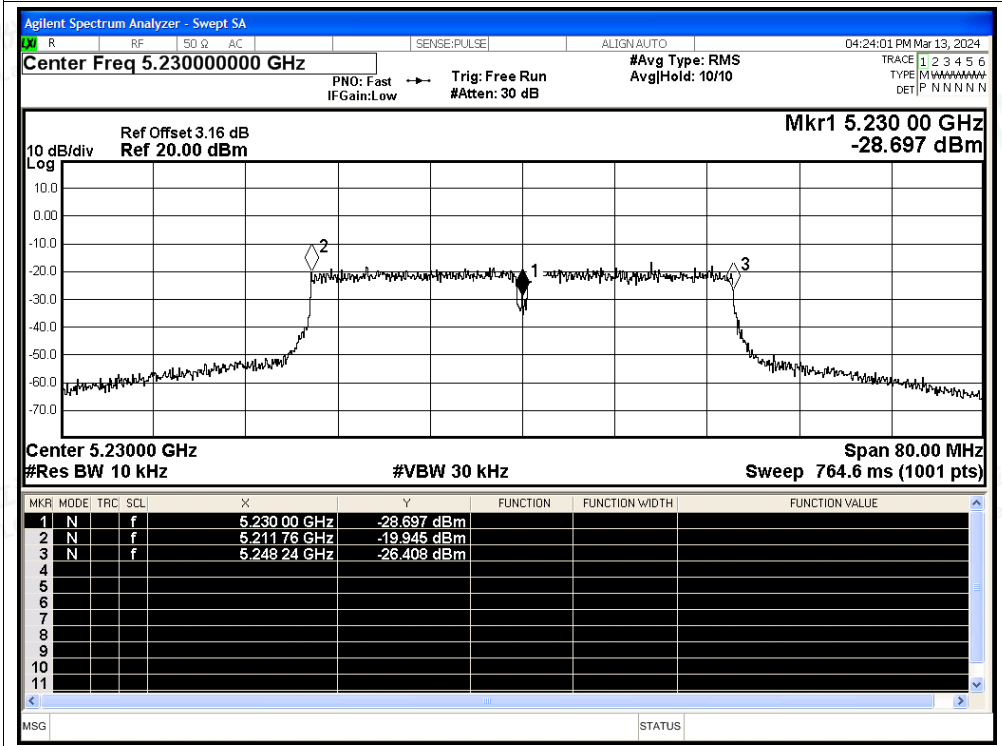



C.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	91.83	0.37	1.43
NVNT	a	5200	Ant1	91.7	0.38	1.44
NVNT	a	5240	Ant1	91.83	0.37	1.43
NVNT	n20	5180	Ant1	90.47	0.43	1.67
NVNT	n20	5200	Ant1	90.47	0.43	1.67
NVNT	n20	5240	Ant1	90.47	0.43	1.67
NVNT	n40	5190	Ant1	83.33	0.79	3.23
NVNT	n40	5230	Ant1	83.33	0.79	3.23






Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

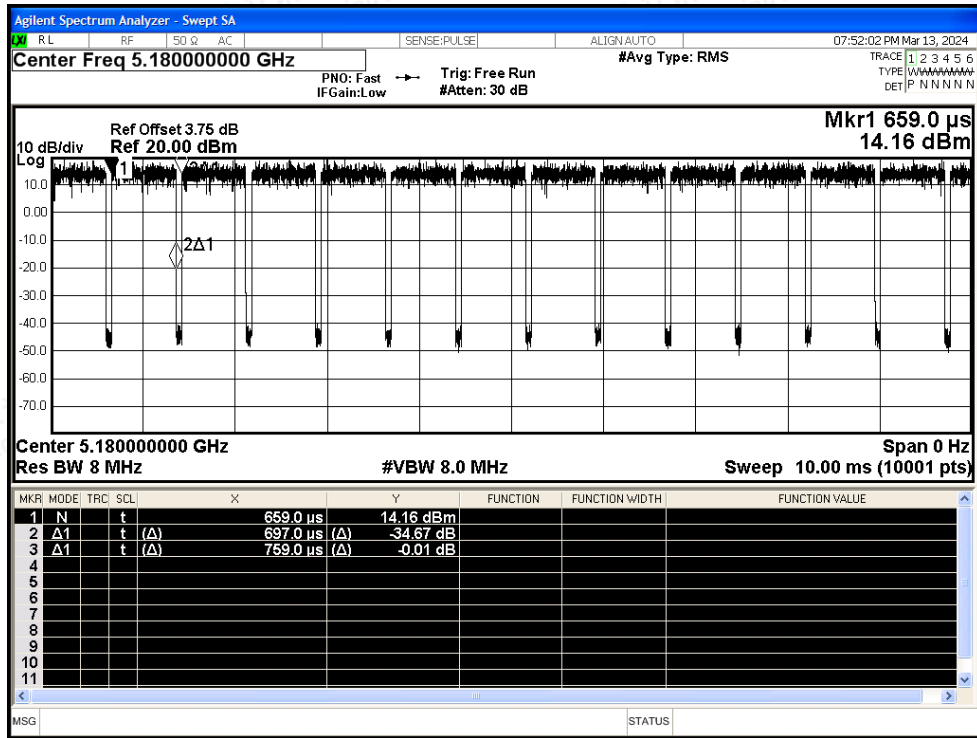


Duty Cycle NVNT a 5200MHz Ant1

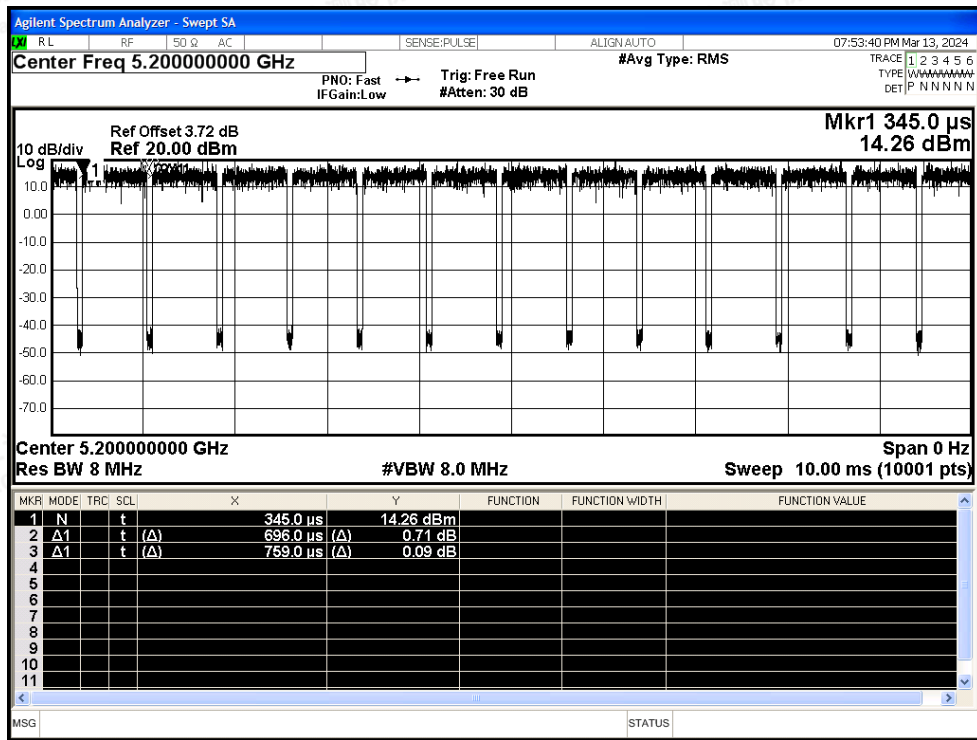




Duty Cycle NVNT a 5240MHz Ant1

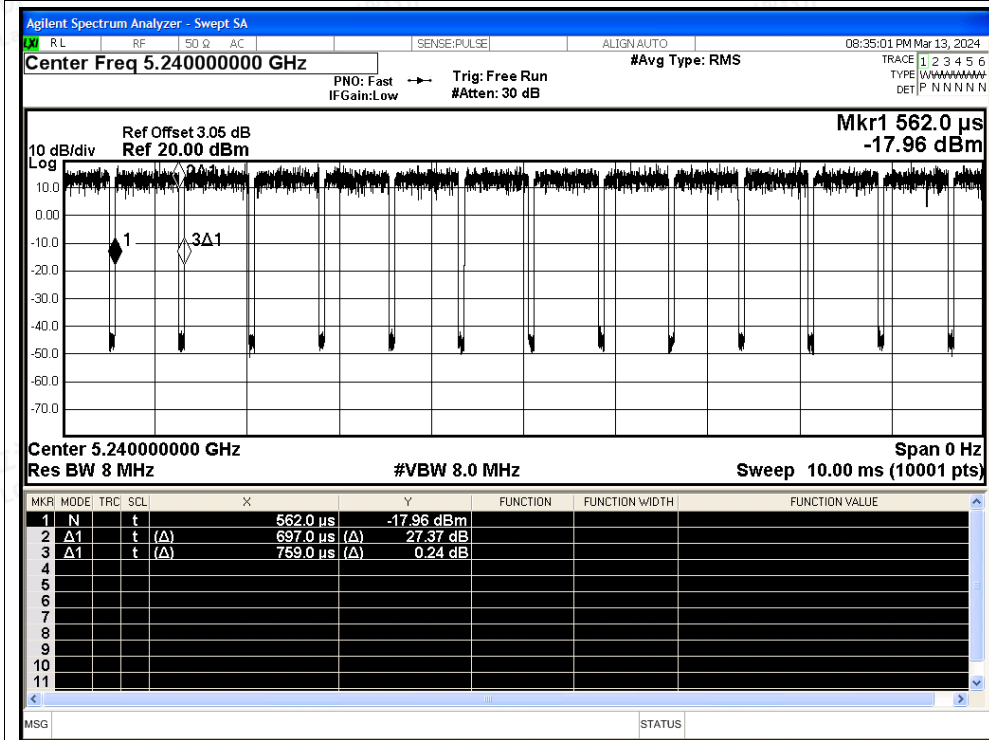


Duty Cycle NVNT n20 5180MHz Ant1

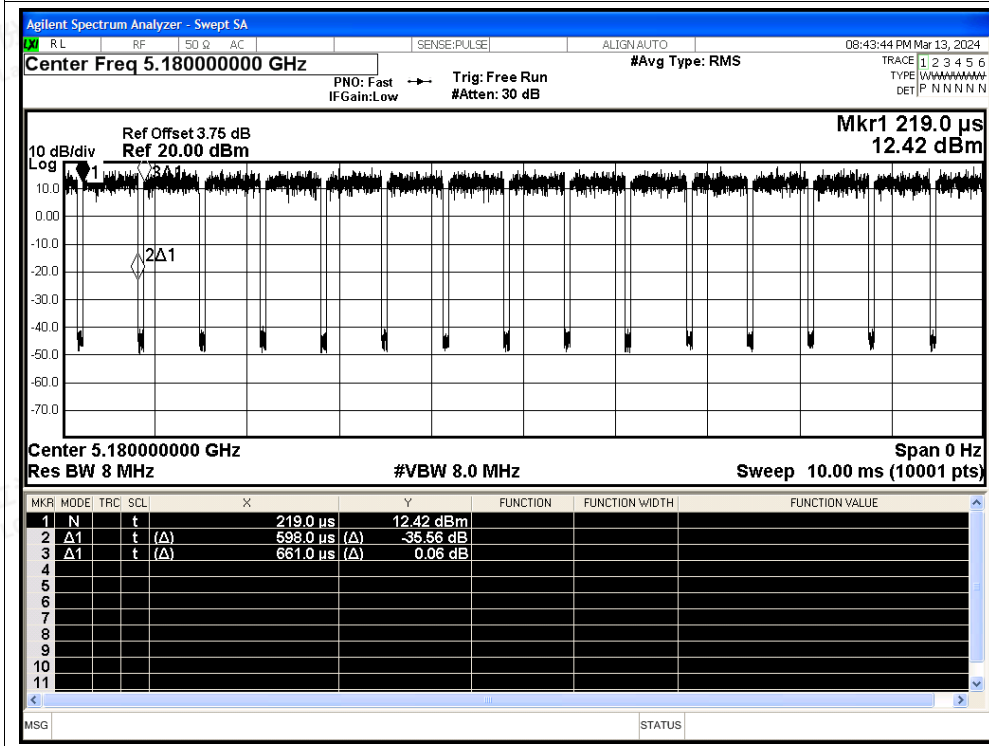




Duty Cycle NVNT n20 5200MHz Ant1

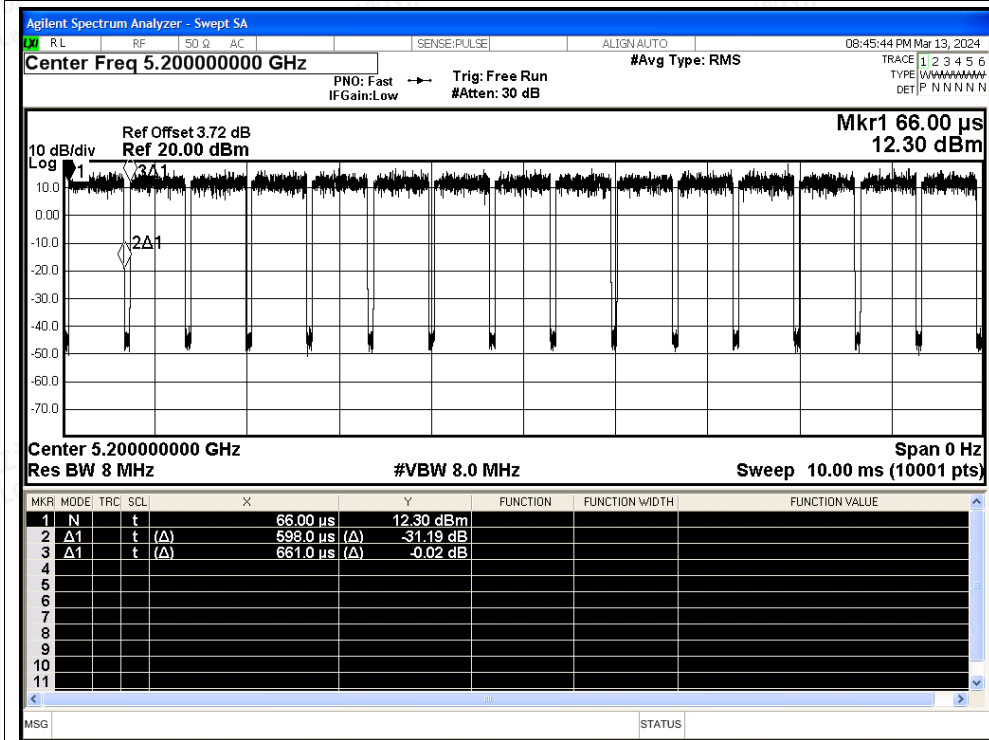


Duty Cycle NVNT n20 5240MHz Ant1

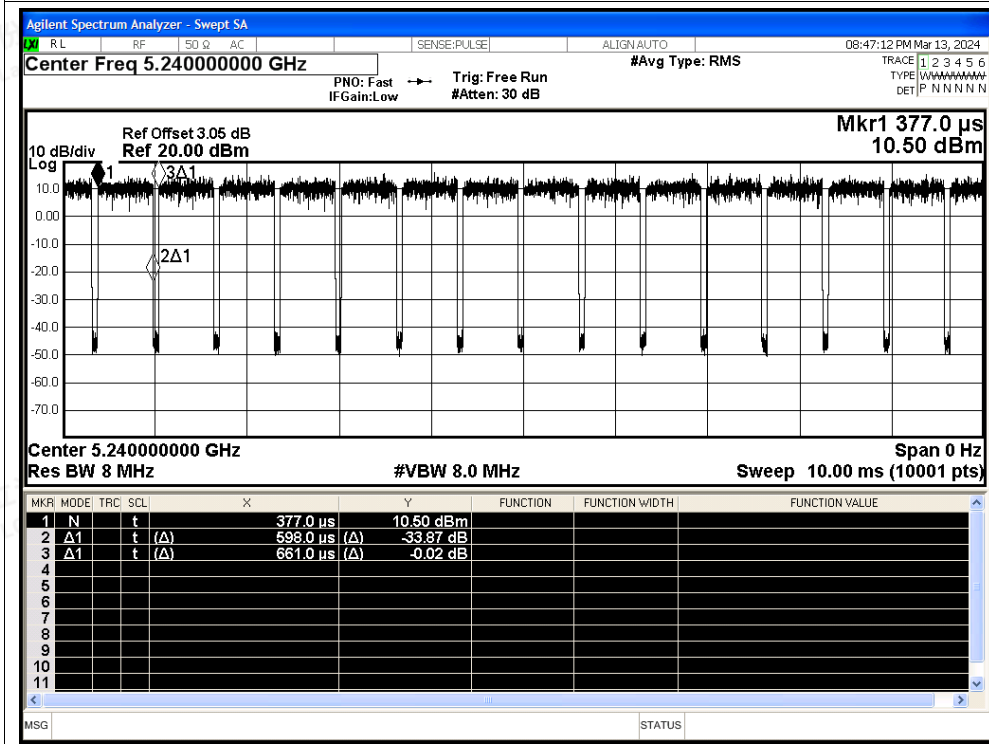



Duty Cycle NVNT n40 5190MHz Ant1

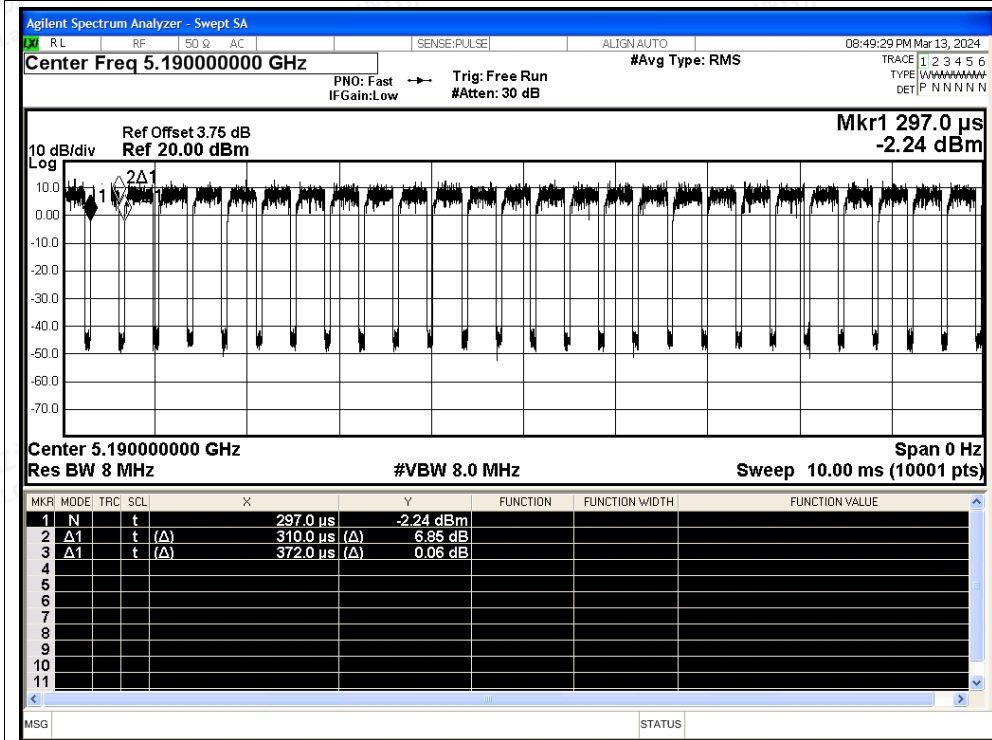

Duty Cycle NVNT n40 5230MHz Ant1

