



# TEST REPORT


## 47 CFR Part 15, Subpart C 15.247

Report Reference No.....: CTL2406052091-WF

Compiled by: Happy Guo  
( position+printed name+signature) (File administrators)

Tested by: Wuqiang Wu  
( position+printed name+signature) (Test Engineer)

Approved by: Ivan Xie  
( position+printed name+signature) (Manager)

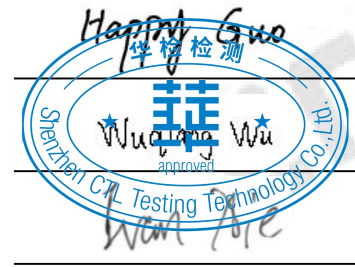

Product Name.....: ELECTRIC SCOOTER

Model/Type reference.....: A10

List Model(s).....: N/A

Trade Mark.....: PHANTOMGOGO

FCC ID.....: 2A4CE-A10

Applicant's name.....: Shenzhen LEQI Intelligent Technology Co., Ltd.

Address of applicant.....: Room 215, Block D, Colorful Science and Technology Park, No.5  
Guanle Road, Luhua Community, Guanhu Street, Longhua District,  
Shenzhen, Guangdong, P.R. China

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,  
Nanshan District, Shenzhen, China 518055

Test specification.....:  
Standard.....: 47 CFR Part 15, Subpart C 15.247: Operation within the bands  
902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Date of receipt of test item.....: June 19, 2024

Date of Test Date.....: June 19, 2024-July 3, 2024

Date of Issue.....: July 8, 2024

Result.....: Pass

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

# TEST REPORT

<b>Test Report No. :</b>	<b>CTL2406052091-WF</b>	July 8, 2024 Date of issue
--------------------------	-------------------------	-------------------------------

Equipment under Test : ELECTRIC SCOOTER

Sample No : CTL2406052091

Model /Type : A10

Listed Models : N/A

**Applicant** : **Shenzhen LEQI Intelligent Technology Co., Ltd.**

Address : Room 215, Block D, Colorful Science and Technology Park, No.5 Guanle Road, Luhu Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, P.R. China

**Manufacturer** : **Shenzhen LEQI Intelligent Technology Co., Ltd.**

Address : Room 215, Block D, Colorful Science and Technology Park, No.5 Guanle Road, Luhu Community, Guanhu Street, Longhua District, Shenzhen, Guangdong, P.R. China

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.



**Table of Contents**

**Page**

**1. SUMMARY .....5**

1.1. TEST STANDARDS ..... 5

1.2. TEST DESCRIPTION ..... 5

1.3. TEST FACILITY ..... 6

1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY ..... 6

**2. GENERAL INFORMATION ..... 8**

2.1. ENVIRONMENTAL CONDITIONS ..... 8

2.2. GENERAL DESCRIPTION OF EUT ..... 8

2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY ..... 9

2.4. EQUIPMENTS USED DURING THE TEST ..... 10

2.5. RELATED SUBMITTAL(S) / GRANT (S) ..... 10

2.6. MODIFICATIONS ..... 10

**3. TEST CONDITIONS AND RESULTS ..... 11**

3.1. CONDUCTED EMISSIONS TEST ..... 11

3.2. RADIATED EMISSIONS AND BAND EDGE ..... 16

3.3. MAXIMUM PEAK CONDUCTED OUTPUT POWER ..... 32

3.4. POWER SPECTRAL DENSITY ..... 33

3.5. 6DB BANDWIDTH ..... 34

3.6. OUT-OF-BAND EMISSIONS ..... 35

3.7. ANTENNA REQUIREMENT ..... 36

**4. TEST SETUP PHOTOS OF THE EUT ..... 37**

**5. PHOTOS OF THE EUT ..... 39**

# 1. SUMMARY

## 1.1. TEST STANDARDS

The tests were performed according to following standards:

[47 CFR Part 15, Subpart C 15.247](#): Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

[ANSI C63.10: 2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

[KDB 558074 D01 v05r02](#): KDB558074 D01 15.247 Meas Guidance v05r02

## 1.2. Test Description

47 CFR Part 15, Subpart C 15.247		
47 CFR Part 15, Subpart C 15.207	AC Power Conducted Emission	PASS
47 CFR Part 15, Subpart C 15.247(a)(2)	6dB Bandwidth	PASS
47 CFR Part 15, Subpart C 15.247(d)	Spurious RF Conducted Emission	PASS
47 CFR Part 15, Subpart C 15.247(b)	Maximum Peak Conducted Output Power	PASS
47 CFR Part 15, Subpart C 15.247(e)	Power Spectral Density	PASS
47 CFR Part 15, Subpart C 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
47 CFR Part 15, Subpart C 15.247(d)	Band Edge	PASS
47 CFR Part 15, Subpart C 15.203/15.247 (b)	Antenna Requirement	PASS

### 1.3. Test Facility

#### 1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

#### 1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L7497**

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No. 4343.01**

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **IC Registration No.: 9618B**

##### **CAB identifier: CN0041**

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B.

##### **FCC-Registration No.: 399832**

##### **Designation No.: CN1216**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

### 1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power Radiated	±2.20 dB	(1)
Radiated Emission 9KHz~30MHz	±3.66dB	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
DTS Bandwidth	±1.9%	(1)
Maximum Conducted Output Power	± 1.18 dB	(1)

Maximum Power Spectral Density Level	$\pm 0.98$ dB	(1)
Band-edge	$\pm 1.21$ dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-7GHz: $\pm 1.09$ dB 7GHz-26.5GHz: $\pm 3.27$ dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 2. GENERAL INFORMATION

### 2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.2. General Description of EUT

Product Name:	ELECTRIC SCOOTER
Model:	A10
Power supply:	DC 36.5V from battery or AC100-240V~ 50-60Hz 2.5A MAX from Adapter
Adapter 1:	Model: FY-4201700 Input: 100-240V~ 50/60Hz 2.5A Output: 42.0V == 1.7A
Adapter 2:	Model: GC72-420170-D Input: 100-240V~ 50/60Hz 2.5A Max Output: 42.0V == 1.7A 71.4W
<b>Bluetooth LE</b>	
Supported type:	Bluetooth Low Energy
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	Microstrip Antenna
Antenna gain:	2.6dBi

Note1: For more details, please refer to the user's manual of the EUT.

Note2: Antenna gain provided by the applicant.



## 2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software(RFTester) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 40 channels provided to the EUT and Channel 00/19/39 were selected for BLE test.

### Operation Frequency List :

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
02	2404
03	2406
⋮	⋮
<b>19</b>	<b>2440</b>
⋮	⋮
37	2476
38	2478
<b>39</b>	<b>2480</b>

Note: The line display in grey were the channel selected for testing

### Power setting during the test:

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

### Power Parameters:

Test Software Version	RFTester		
Frequency	2402MHz	2440MHz	2480MHz
BLE_1M	0	0	0

## 2.4. Equipments Used during the Test

Conducted Emission						
Test Equipment	Manufacturer	Model No.	Serial No.	Previous calibration	Last Cal.	Cal.Due
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2023/05/04	2024/04/30	2025/04/29
LISN	ROHDE & SCHWARZ	ESH2-Z5	860014/010	2023/05/04	2024/04/30	2025/04/29
Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2023/05/04	2024/04/30	2025/04/29
Software:						
Name of Software:			Version:			
ES-K1			V1.71			

Radiated Emission						
Test Equipment	Manufacturer	Model No.	Serial No.	Previous calibration	Last Cal.	Cal.Due
Active Loop Antenna	Da Ze	ZN30900A	/	2021/05/13	2024/04/30	2025/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	/	2023/02/13	2026/02/12
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	/	2021/12/23	2024/12/22
Horn Antenna	Ocean Microwave	OBH100400	26999002	/	2021/12/22	2024/12/21
Amplifier	MRT-AP01M06	MRT	S-001	2023/05/04	2024/04/30	2025/04/29
Amplifier	Agilent	8449B	3008A02306	2023/05/04	2024/04/30	2025/04/29
Amplifier	Brief&Smart	LNA-4018	2104197	2023/05/05	2024/05/03	2025/05/02
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2023/05/04	2024/04/30	2025/04/29
Spectrum Analyzer	RS	FSP	1164.4391.38	2023/05/05	2024/05/03	2025/05/02
Software:						
Name of Software:			Version:			
EZ_EMG(Below 1GHz)			V1.1.4.2			
EZ_EMG(Above 1GHz)			V1.1.4.2			

RF Conducted						
Test Equipment	Manufacturer	Model No.	Serial No.	Previous calibration	Last Cal.	Cal.Due
Spectrum Analyzer	Keysight	N9020A	MY53420874	2023/05/04	2024/05/01	2025/04/30
Temperature/Humidity Meter	Ji Yu	MC501	/	2023/05/09	2024/05/04	2025/05/03
Software:						
Name of Software:			Version:			
TST-PASS			V2.0			

## 2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the 47 CFR Part 15, Subpart C Rules.

## 2.6. Modifications

No modifications were implemented to meet testing criteria.

### 3. TEST CONDITIONS AND RESULTS

#### 3.1. Conducted Emissions Test


##### LIMIT

47 CFR Part 15, Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### TEST CONFIGURATION

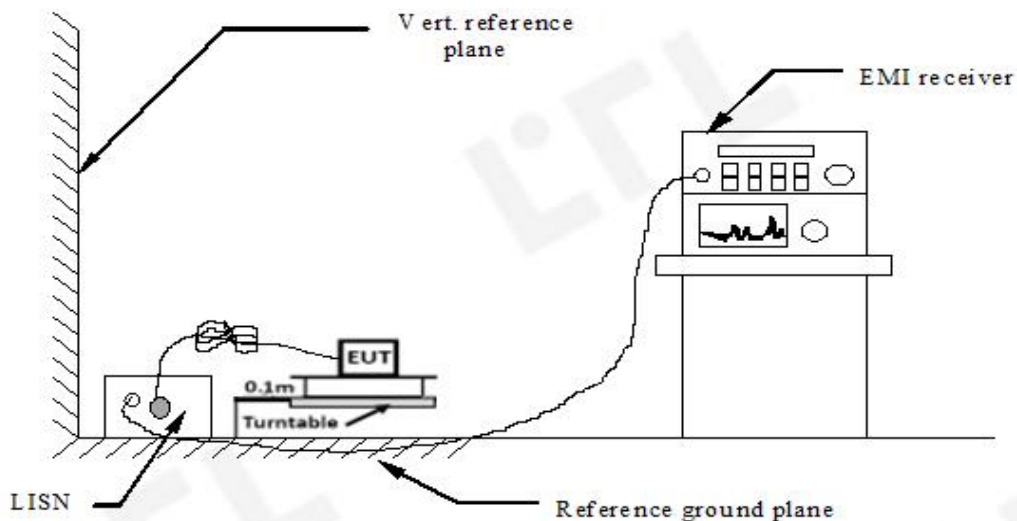

##### TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a floor-standing system; a wooden table with a height of 0.1m is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

**TEST RESULTS**

Note:

- Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:
- All Low, Middle, and High channel has been tested, only the worst BLE 1M Low channel reported.


**Adapter 1**

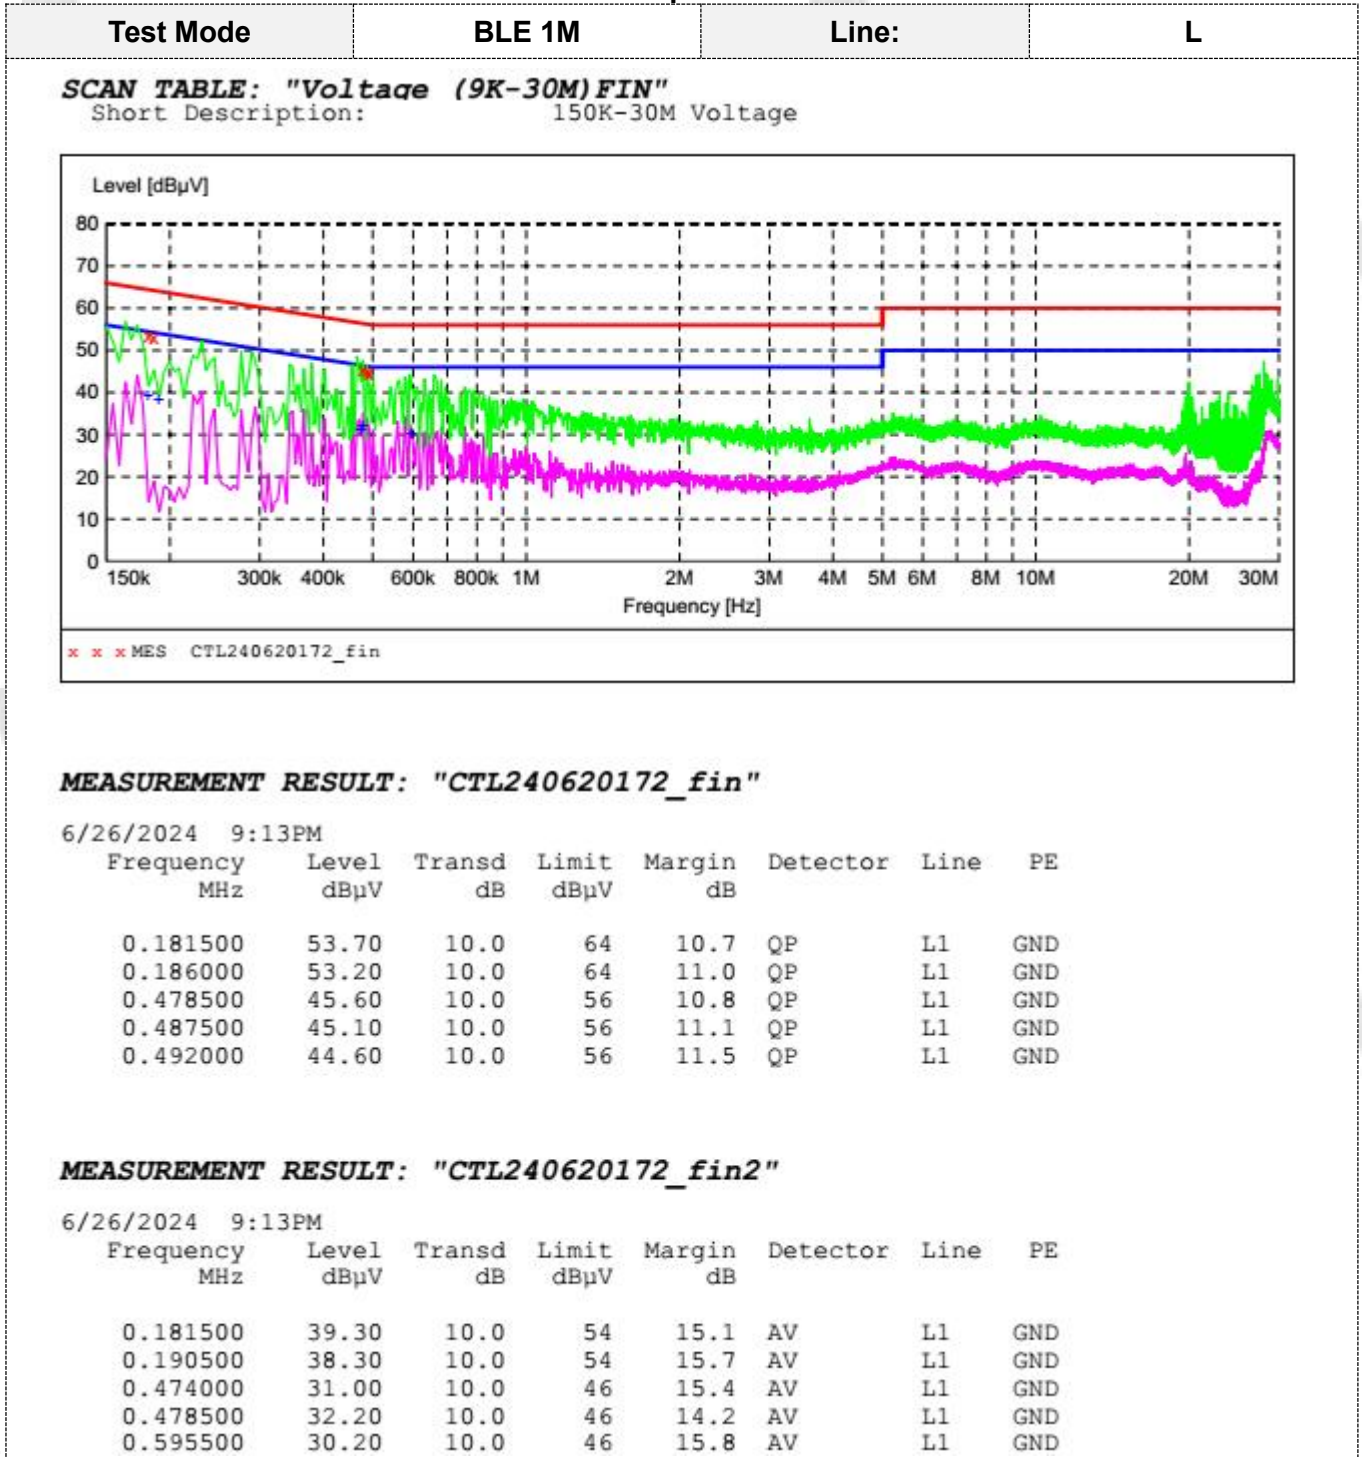

Remark: Level(dBuV)=Reading(dBuV) + Transd.(dB)  
 Margin=Limit(dBuV)- Level(dBuV)

Test Mode	BLE 1M	Line:	N
-----------	--------	-------	---

**SCAN TABLE: "Voltage (9K-30M)FIN"**  
 Short Description: 150K-30M Voltage

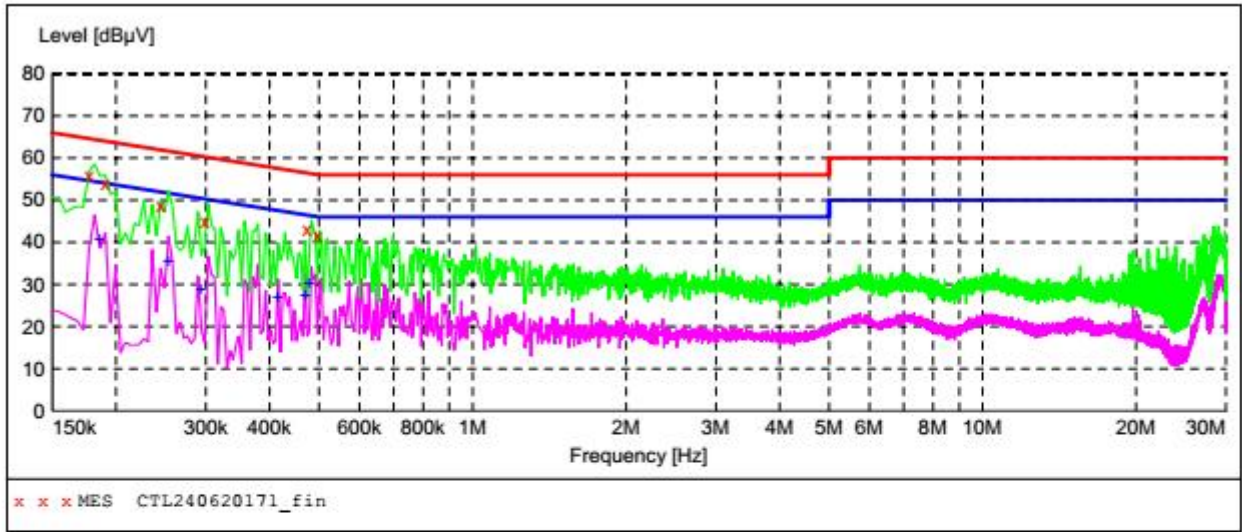

**MEASUREMENT RESULT: "CTL240620171\_fin"**

6/26/2024 9:10PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.177000	55.80	10.0	65	8.8	QP	N	GND
0.190500	54.10	10.0	64	9.9	QP	N	GND
0.244500	48.80	10.0	62	13.1	QP	N	GND
0.298500	45.10	10.0	60	15.2	QP	N	GND
0.474000	43.10	10.0	56	13.3	QP	N	GND
0.496500	41.50	10.0	56	14.6	QP	N	GND

**MEASUREMENT RESULT: "CTL240620171\_fin2"**

6/26/2024 9:10PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	40.70	10.0	54	13.5	AV	N	GND
0.253500	35.60	10.0	52	16.0	AV	N	GND
0.294000	28.80	10.0	50	21.6	AV	N	GND
0.415500	26.90	10.0	48	20.6	AV	N	GND
0.469500	27.20	10.0	47	19.3	AV	N	GND
0.478500	30.40	10.0	46	16.0	AV	N	GND

Remark: Level(dBuV)=Reading(dBuV) + Transd.(dB)  
 Margin=Limit(dBuV)- Level(dBuV)

Adapter 2

Test Mode	BLE 1M	Line:	L
-----------	--------	-------	---

**SCAN TABLE: "Voltage (9K-30M)FIN"**  
 Short Description: 150K-30M Voltage

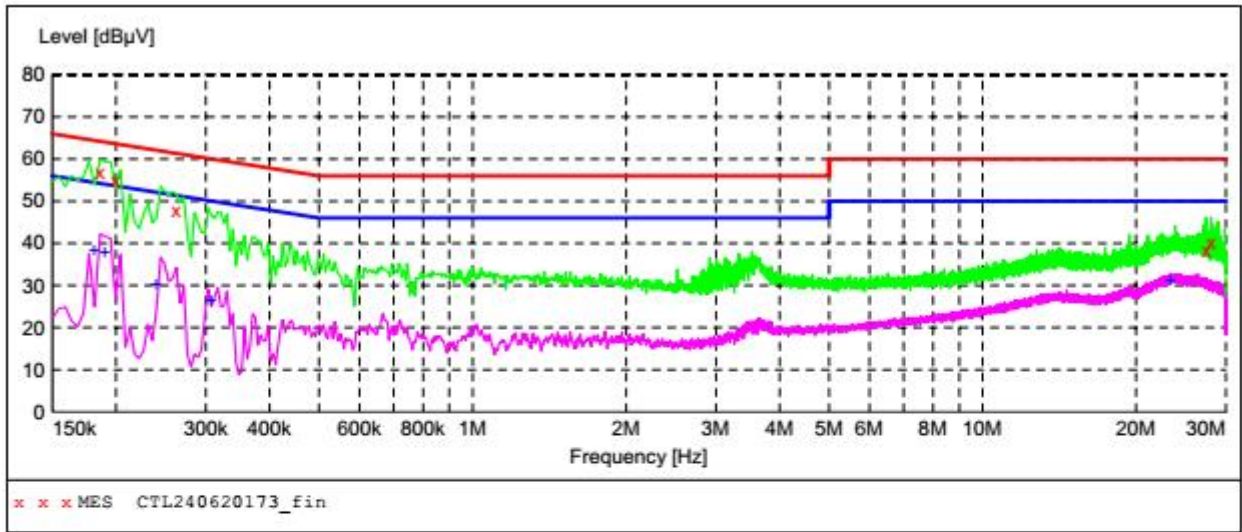

**MEASUREMENT RESULT: "CTL240620173\_fin"**

6/26/2024 9:17PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.186000	56.90	10.0	64	7.3	QP	L1	GND
0.199500	54.70	10.0	64	8.9	QP	L1	GND
0.262500	47.90	10.0	61	13.5	QP	L1	GND
27.442500	38.20	10.3	60	21.8	QP	L1	GND
28.054500	40.40	10.3	60	19.6	QP	L1	GND

**MEASUREMENT RESULT: "CTL240620173\_fin2"**


6/26/2024 9:17PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.181500	38.10	10.0	54	16.3	AV	L1	GND
0.190500	37.90	10.0	54	16.1	AV	L1	GND
0.240000	30.10	10.0	52	22.0	AV	L1	GND
0.307500	26.60	10.0	50	23.4	AV	L1	GND
23.397000	31.30	10.8	50	18.7	AV	L1	GND

Remark: Level(dBuV)=Reading(dBuV) + Transd.(dB)  
 Margin=Limit(dBuV)- Level(dBuV)

Test Mode	BLE 1M	Line:	N
-----------	--------	-------	---

**SCAN TABLE: "Voltage (9K-30M)FIN"**  
 Short Description: 150K-30M Voltage

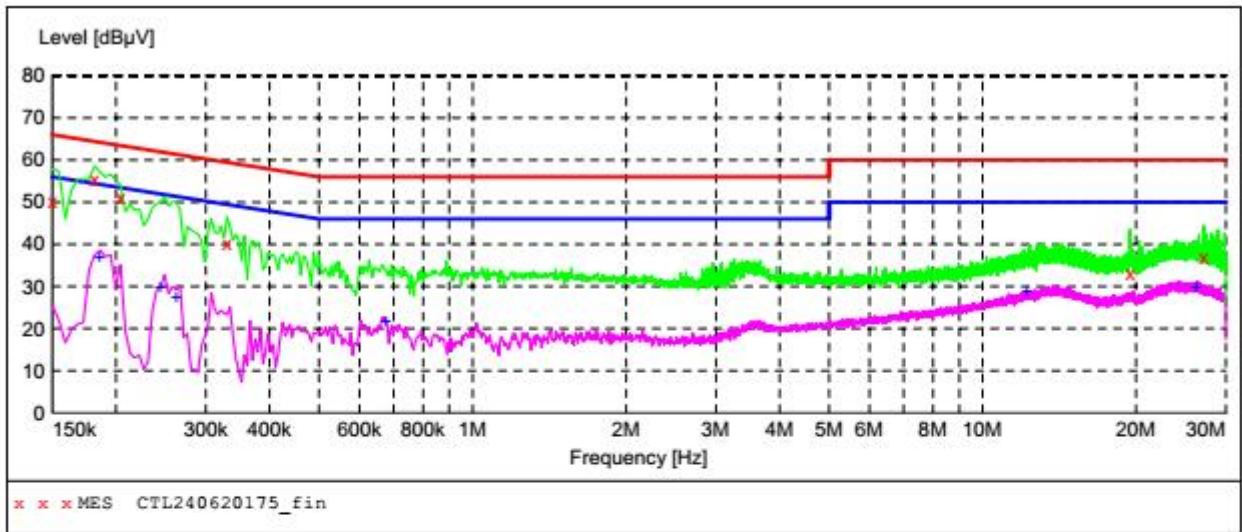

**MEASUREMENT RESULT: "CTL240620175\_fin"**

6/26/2024 9:21PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	50.10	10.0	66	15.9	QP	N	GND
0.181500	55.30	10.0	64	9.1	QP	N	GND
0.204000	51.30	10.0	63	12.1	QP	N	GND
0.330000	40.20	10.0	60	19.3	QP	N	GND
19.455000	32.90	11.2	60	27.1	QP	N	GND
27.154500	37.00	10.4	60	23.0	QP	N	GND

**MEASUREMENT RESULT: "CTL240620175\_fin2"**

6/26/2024 9:21PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	36.90	10.0	54	17.3	AV	N	GND
0.244500	29.60	10.0	52	22.3	AV	N	GND
0.262500	27.60	10.0	51	23.8	AV	N	GND
0.676500	21.80	10.0	46	24.2	AV	N	GND
12.241500	28.60	10.9	50	21.4	AV	N	GND
26.281500	29.70	10.5	50	20.3	AV	N	GND

Remark: Level(dBuV)=Reading(dBuV) + Transd.(dB)

Margin=Limit(dBuV)- Level(dBuV)

## 3.2. Radiated Emissions and Band Edge

### Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

### TEST CONFIGURATION

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

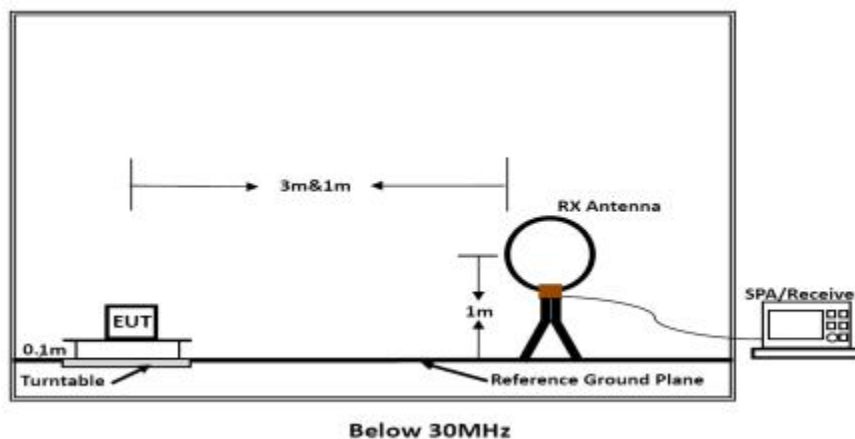


(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

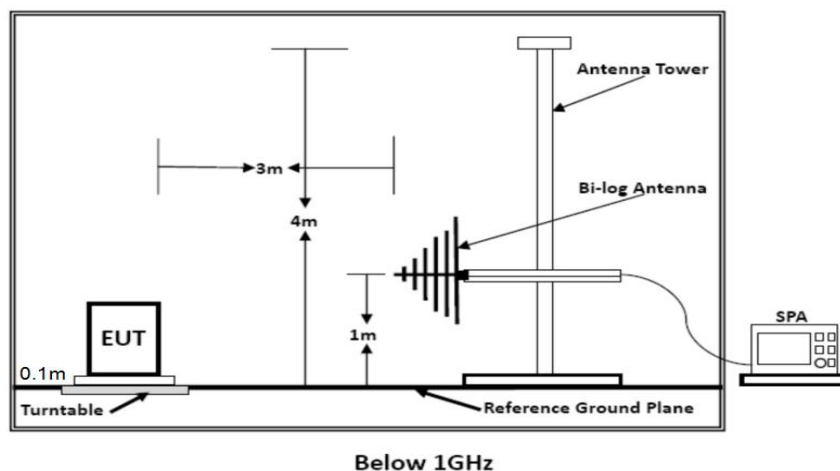



(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

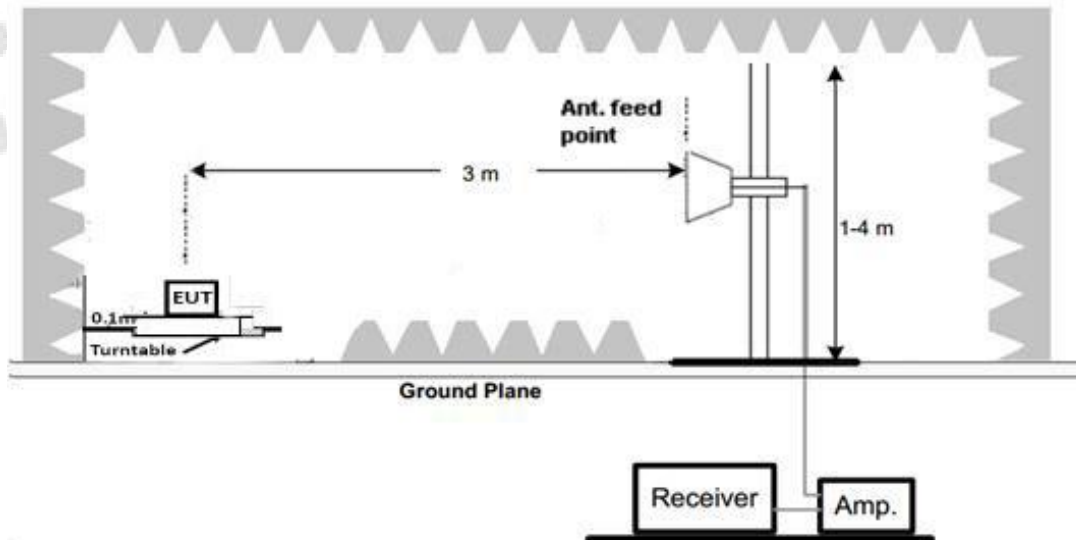

### Test Procedure

1. The EUT is placed on a low permittivity and low loss tangent wooden table which is 0.1m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 40GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


**TEST RESULTS**

Remark:

1. Exploratory measurements were performed from 9KHz to 25GHz with combination of all modulation type and low/middle/high operating channels.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, Found the emission level are attenuated 20dB below the limits from 9 kHz to 30MHz, so it does not record in report.
3. For below 1GHz testing recorded worst at BLE 1M Low channel.

**For 30MHz-1GHz**

**Adapter 1**

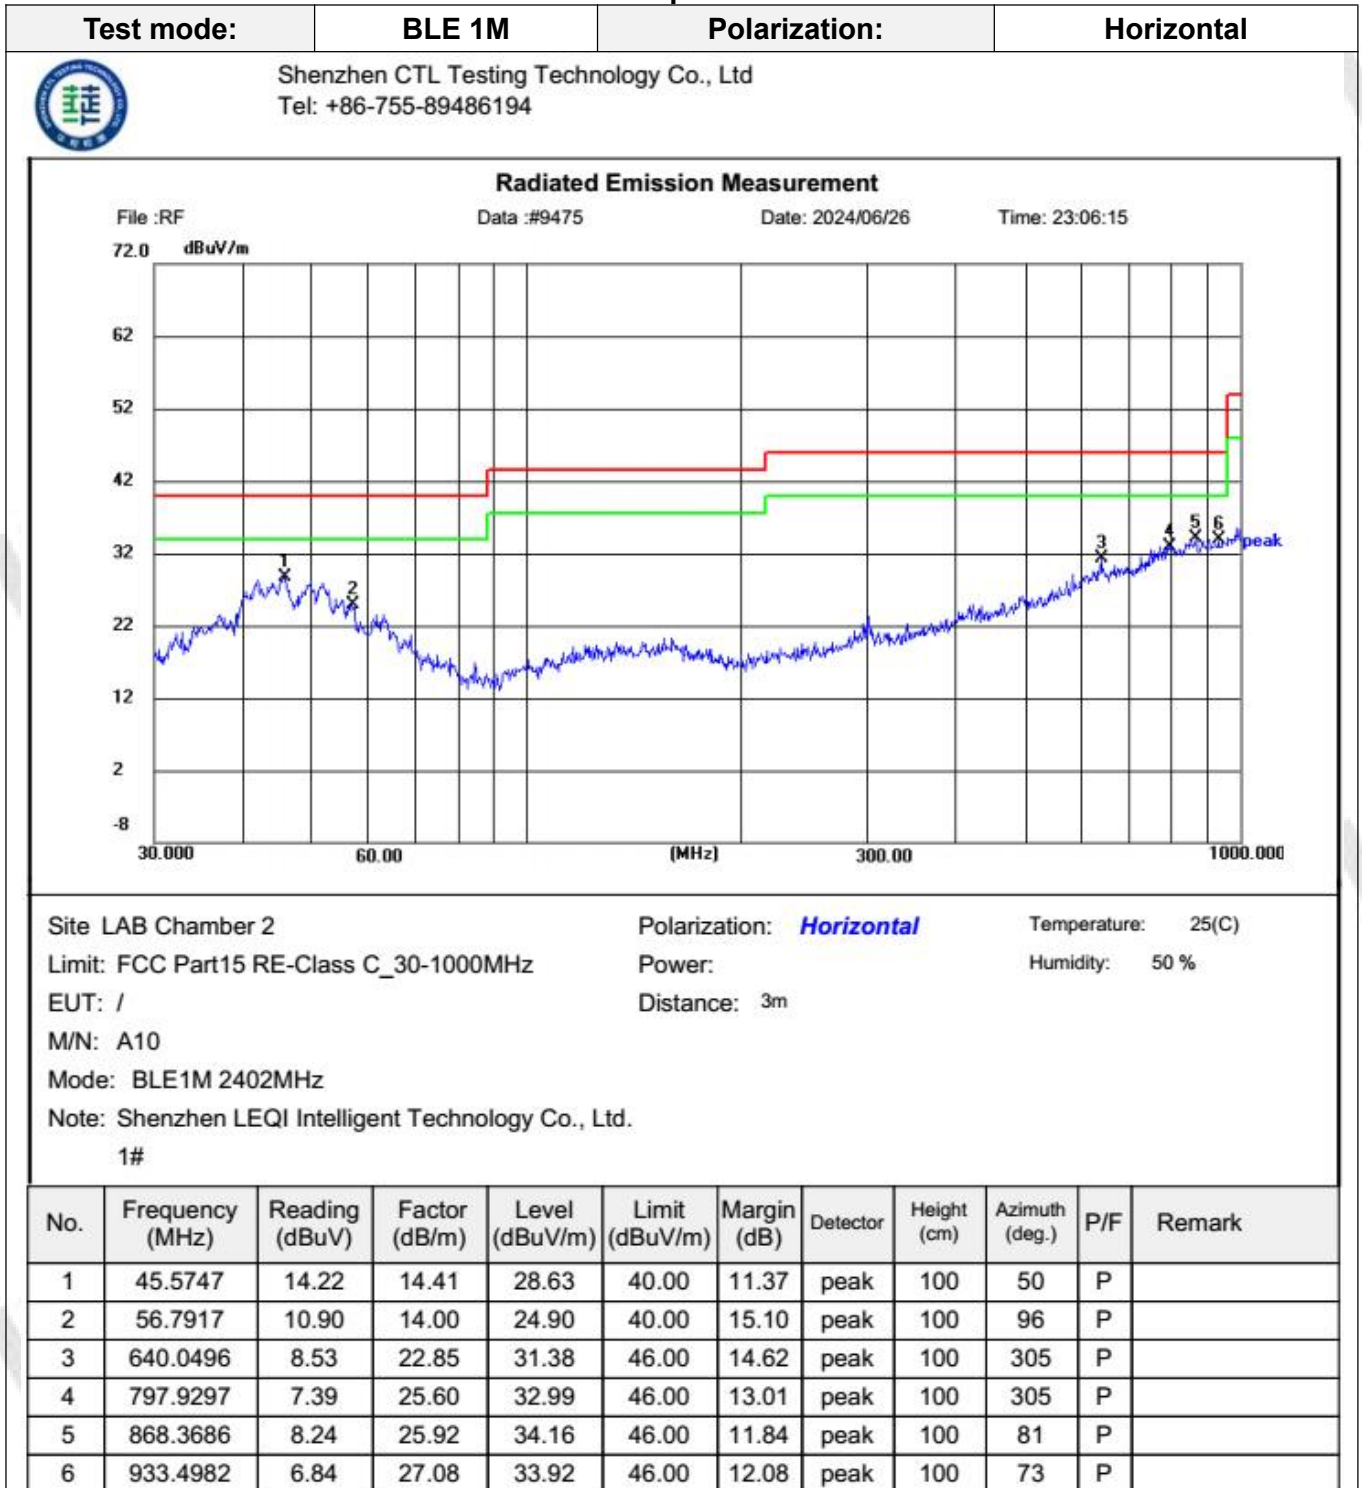


Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)  
Margin= Limit(dBuV/m)- Level(dBuV/m)

Test mode:	BLE 1M	Polarization:	Vertical
------------	--------	---------------	----------



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

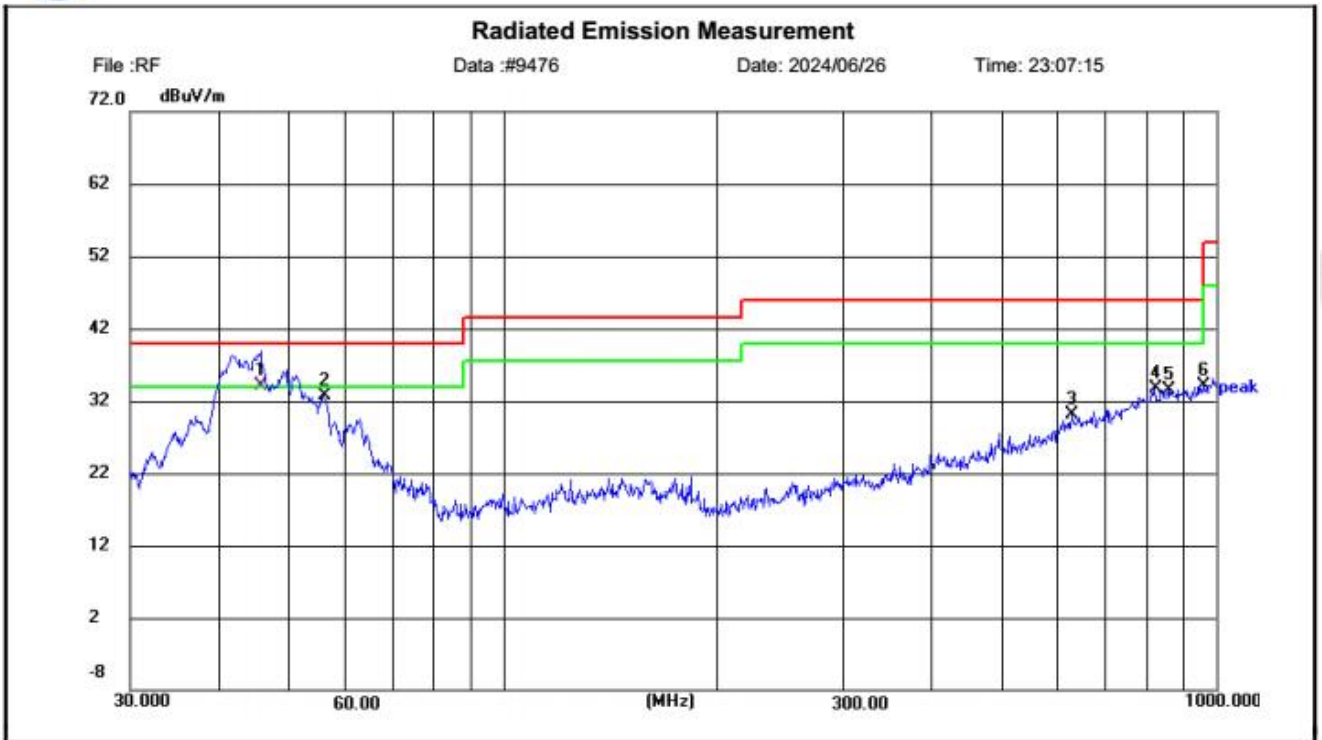

Site LAB Chamber 2  
Limit: FCC Part15 RE-Class C\_30-1000MHz  
EUT: /  
M/N: A10  
Mode: BLE1M 2402MHz  
Note: Shenzhen LEQI Intelligent Technology Co., Ltd.  
1#

Polarization: **Vertical**  
Power:  
Distance: 3m

Temperature: 25(C)  
Humidity: 50 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	45.6206	19.73	14.41	34.14	40.00	5.86	QP	100	0	P	
2	56.0744	18.50	14.22	32.72	40.00	7.28	peak	100	178	P	
3	629.4772	7.63	22.51	30.14	46.00	15.86	peak	100	32	P	
4	820.2710	7.81	25.97	33.78	46.00	12.22	peak	100	348	P	
5	858.1524	7.09	26.34	33.43	46.00	12.57	peak	100	224	P	
6	959.2147	6.94	27.21	34.15	46.00	11.85	peak	100	178	P	


Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)  
Margin= Limit(dBuV/m)- Level(dBuV/m)

Adapter 2

Test mode:	BLE 1M	Polarization:	Horizontal
------------	--------	---------------	------------



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

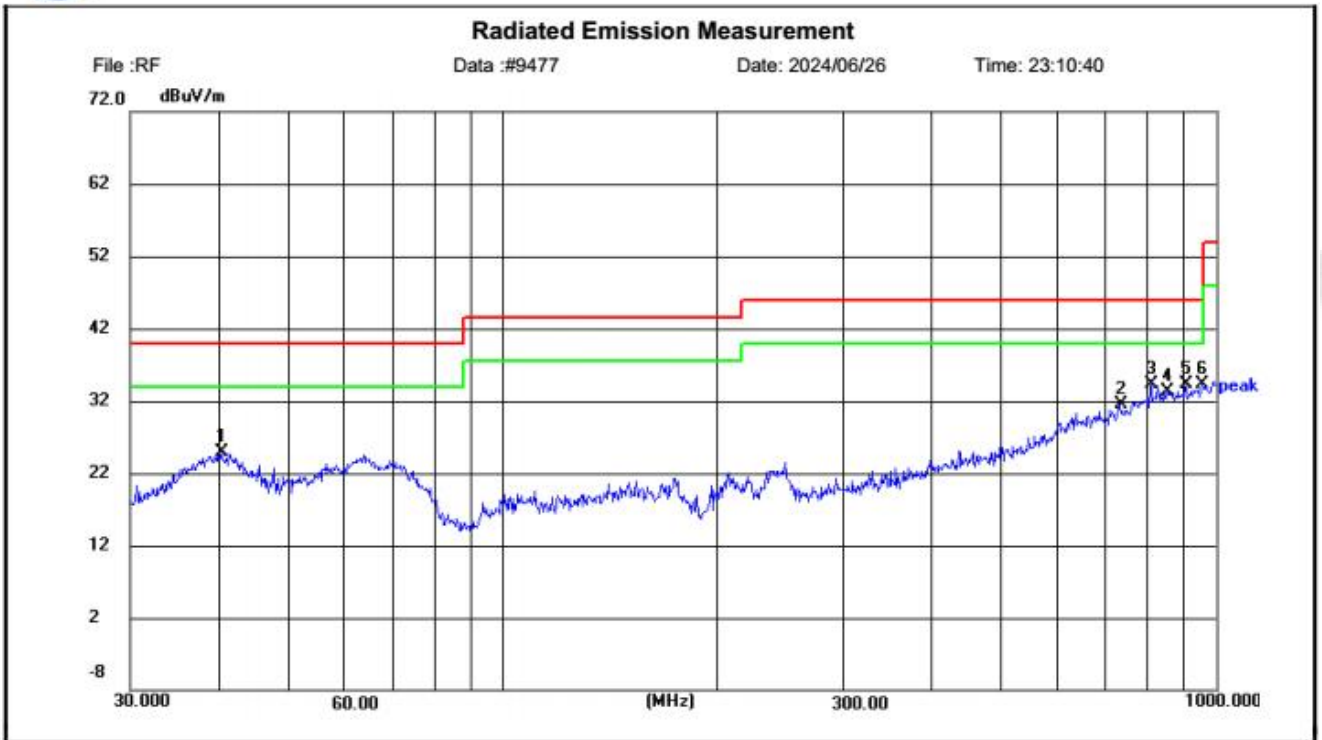

Site LAB Chamber 2  
Limit: FCC Part15 RE-Class C\_30-1000MHz  
EUT: /  
M/N: A10  
Mode: BLE1M 2402MHz  
Note: Shenzhen LEQI Intelligent Technology Co., Ltd.  
2#

Polarization: **Horizontal**  
Power:  
Distance: 3m

Temperature: 25(C)  
Humidity: 50 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.3463	10.63	14.30	24.93	40.00	15.07	peak	100	325	P	
2	734.1694	7.78	23.72	31.50	46.00	14.50	peak	100	9	P	
3	812.0430	8.40	25.90	34.30	46.00	11.70	peak	100	85	P	
4	855.8984	6.88	26.34	33.22	46.00	12.78	peak	100	55	P	
5	907.2774	7.65	26.63	34.28	46.00	11.72	peak	100	93	P	
6	957.9541	7.15	27.18	34.33	46.00	11.67	peak	100	101	P	

Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)  
Margin= Limit(dBuV/m)- Level(dBuV/m)

Test mode:	BLE 1M	Polarization:	Vertical
------------	--------	---------------	----------



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

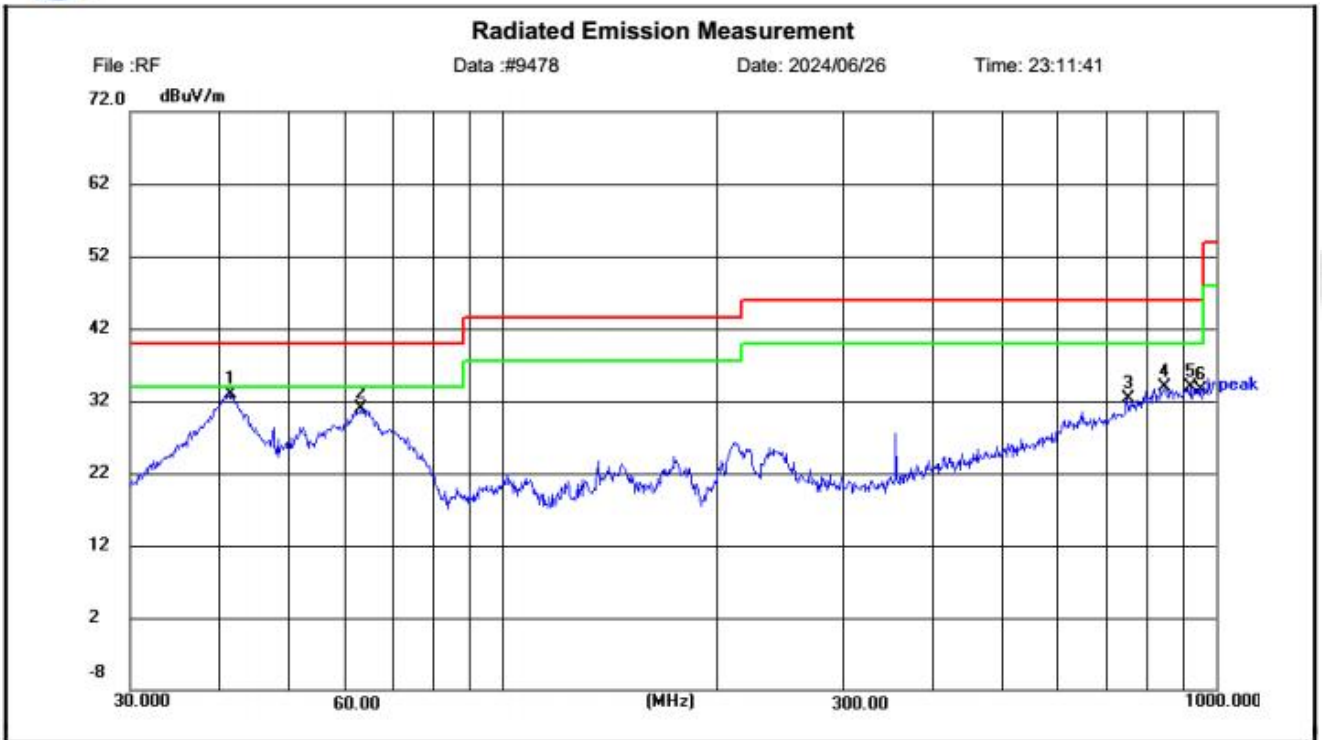

Site LAB Chamber 2  
 Limit: FCC Part15 RE-Class C\_30-1000MHz  
 EUT: /  
 M/N: A10  
 Mode: BLE1M 2402MHz  
 Note: Shenzhen LEQI Intelligent Technology Co., Ltd.  
 2#

Polarization: **Vertical**  
 Power:  
 Distance: 3m


Temperature: 25(C)  
 Humidity: 50 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	41.4760	18.70	14.29	32.99	40.00	7.01	peak	100	1	P	
2	63.3965	17.67	13.16	30.83	40.00	9.17	peak	100	167	P	
3	752.0836	7.87	24.49	32.36	46.00	13.64	peak	100	36	P	
4	848.0563	7.65	26.23	33.88	46.00	12.12	peak	100	113	P	
5	920.8997	7.11	26.78	33.89	46.00	12.11	peak	100	259	P	
6	952.5111	6.33	27.11	33.44	46.00	12.56	peak	100	343	P	

Remark: Level(dBuV/m)=Reading(dBuV)+Factor(dB/m)  
 Margin= Limit(dBuV/m)- Level(dBuV/m)

For 1GHz to 18GHz

BLE 1M (above 1GHz)

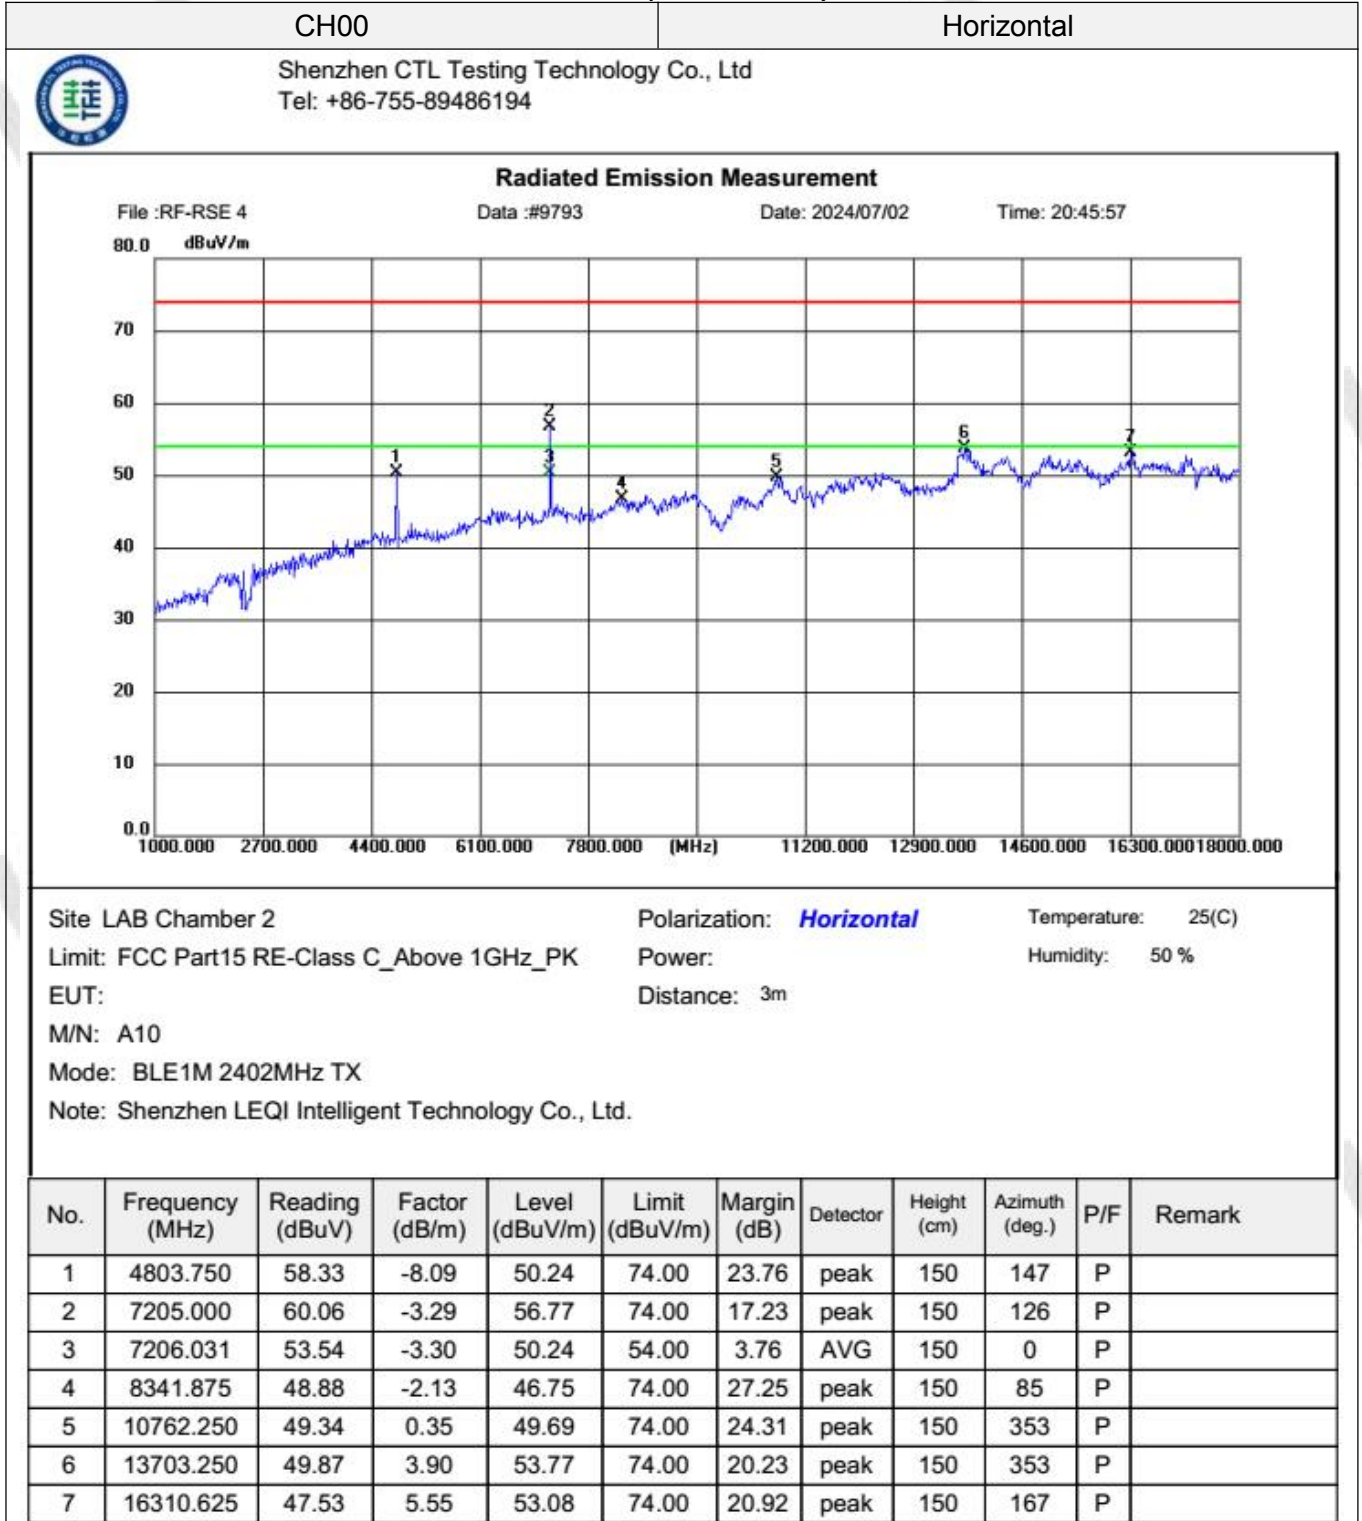


CH00 Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

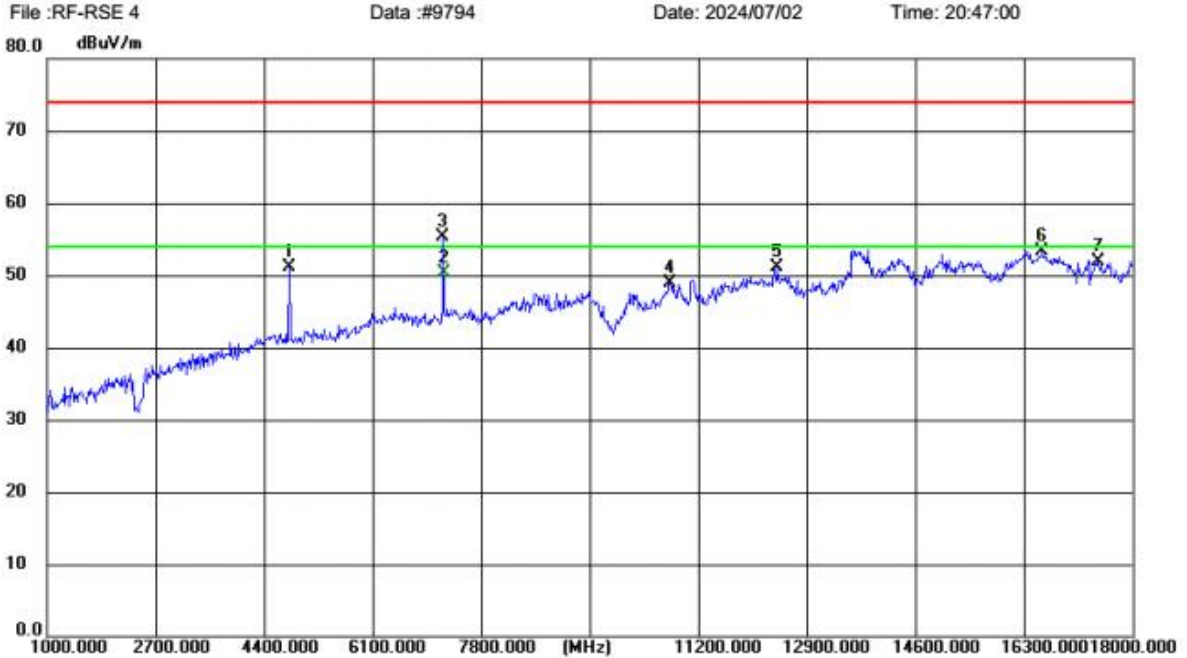

Site LAB Chamber 2      Polarization: **Vertical**      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: A10  
 Mode: BLE1M 2402MHz TX  
 Note: Shenzhen LEQI Intelligent Technology Co., Ltd.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4803.750	59.17	-8.09	51.08	74.00	22.92	peak	150	91	P	
2	7206.020	53.63	-3.30	50.33	54.00	3.67	AVG	150	360	P	
3	7207.125	58.52	-3.29	55.23	74.00	18.77	peak	150	91	P	
4	10762.250	48.63	0.35	48.98	74.00	25.02	peak	150	122	P	
5	12453.750	48.93	2.25	51.18	74.00	22.82	peak	150	80	P	
6	16591.125	47.02	6.27	53.29	74.00	20.71	peak	150	224	P	
7	17468.750	42.95	9.04	51.99	74.00	22.01	peak	150	49	P	


CH19

Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

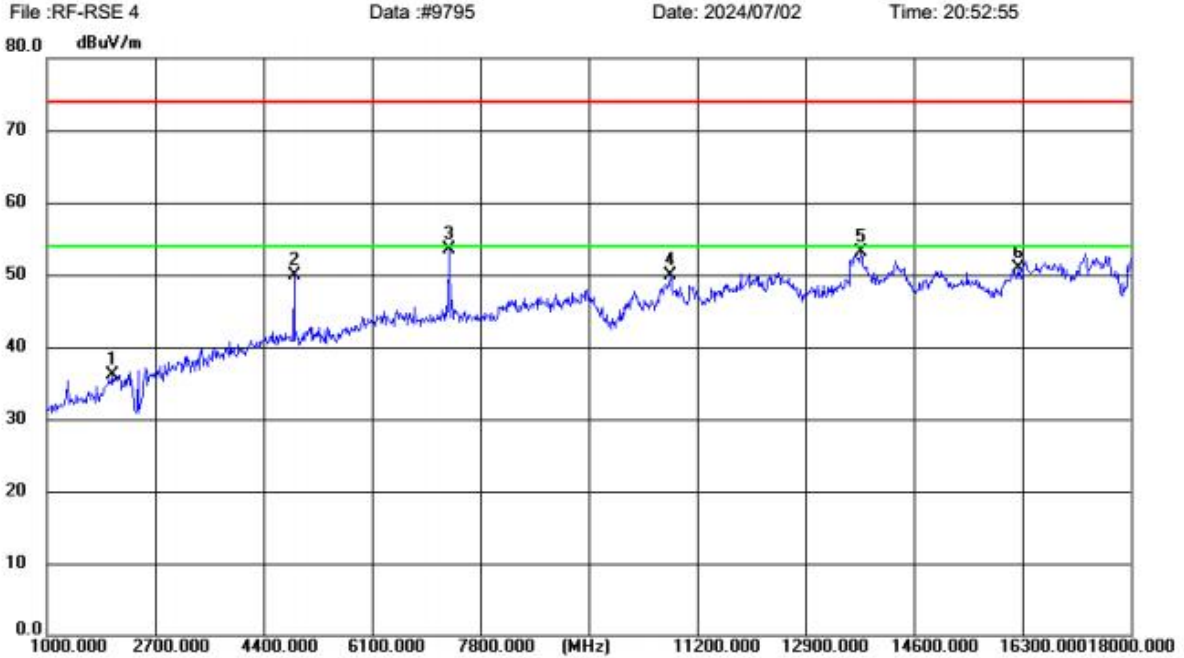

Site LAB Chamber 2      Polarization: **Horizontal**      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: A10  
 Mode: BLE1M 2440MHz TX  
 Note: Shenzhen LEQI Intelligent Technology Co., Ltd.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2034.875	54.72	-18.53	36.19	74.00	37.81	peak	150	2	P	
2	4880.250	57.86	-7.96	49.90	74.00	24.10	peak	150	169	P	
3	7319.750	56.49	-2.98	53.51	74.00	20.49	peak	150	116	P	
4	10777.125	49.47	0.38	49.85	74.00	24.15	peak	150	138	P	
5	13779.750	49.27	3.77	53.04	74.00	20.96	peak	150	273	P	
6	16244.750	45.54	5.37	50.91	74.00	23.09	peak	150	12	P	




CH19 Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

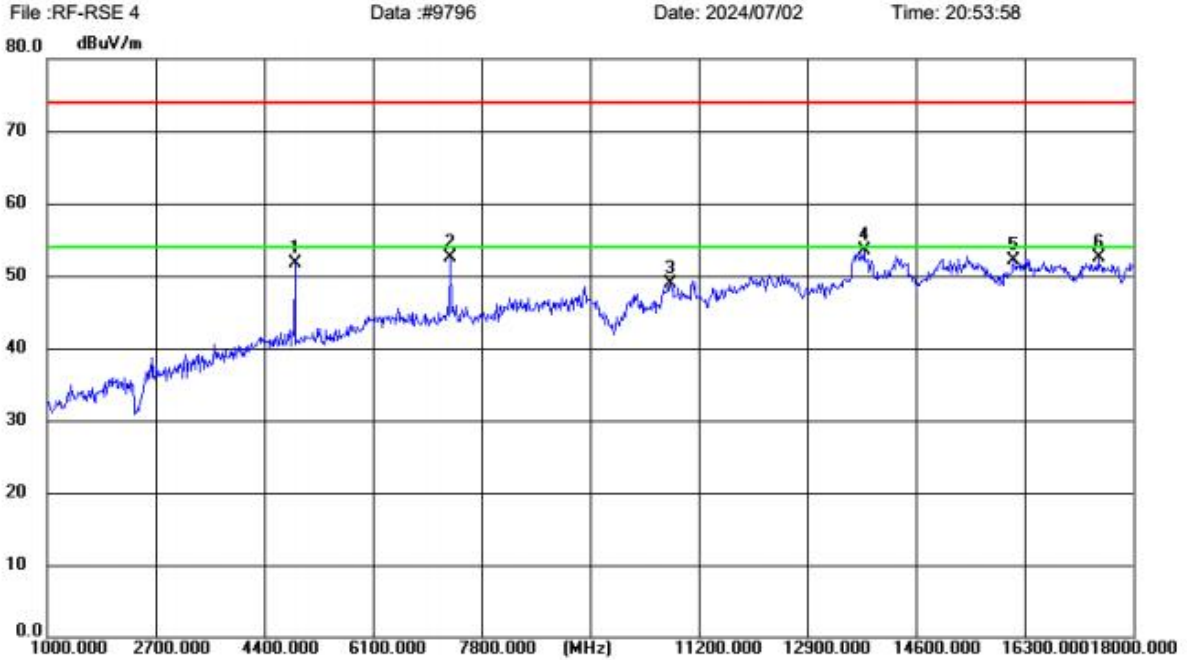

Site LAB Chamber 2      Polarization: **Vertical**      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: A10  
 Mode: BLE1M 2440MHz TX  
 Note: Shenzhen LEQI Intelligent Technology Co., Ltd.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4880.250	59.73	-7.96	51.77	74.00	22.23	peak	150	88	P	
2	7319.750	55.46	-2.98	52.48	74.00	21.52	peak	150	109	P	
3	10766.500	48.52	0.36	48.88	74.00	25.12	peak	150	275	P	
4	13796.750	49.72	3.73	53.45	74.00	20.55	peak	150	119	P	
5	16130.000	47.10	5.04	52.14	74.00	21.86	peak	150	275	P	
6	17462.375	43.54	9.01	52.55	74.00	21.45	peak	150	234	P	


CH39

Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

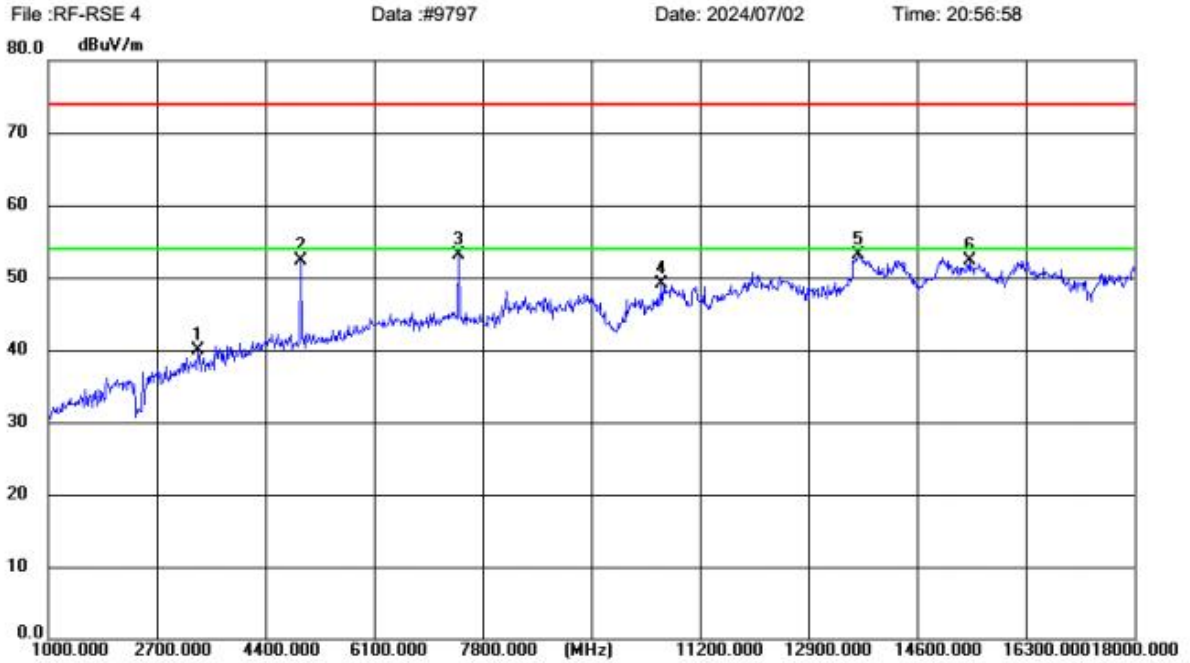

Site LAB Chamber 2      Polarization: **Horizontal**      Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK      Power:      Humidity: 50 %  
 EUT:      Distance: 3m  
 M/N: A10  
 Mode: BLE1M 2480MHz TX  
 Note: Shenzhen LEQI Intelligent Technology Co., Ltd.


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3358.750	52.54	-12.55	39.99	74.00	34.01	peak	150	262	P	
2	4958.875	60.22	-7.85	52.37	74.00	21.63	peak	150	53	P	
3	7438.750	56.01	-2.81	53.20	74.00	20.80	peak	150	231	P	
4	10611.375	49.02	0.06	49.08	74.00	24.92	peak	150	158	P	
5	13686.250	49.13	3.90	53.03	74.00	20.97	peak	150	32	P	
6	15420.250	48.51	3.79	52.30	74.00	21.70	peak	150	283	P	

CH39 Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**

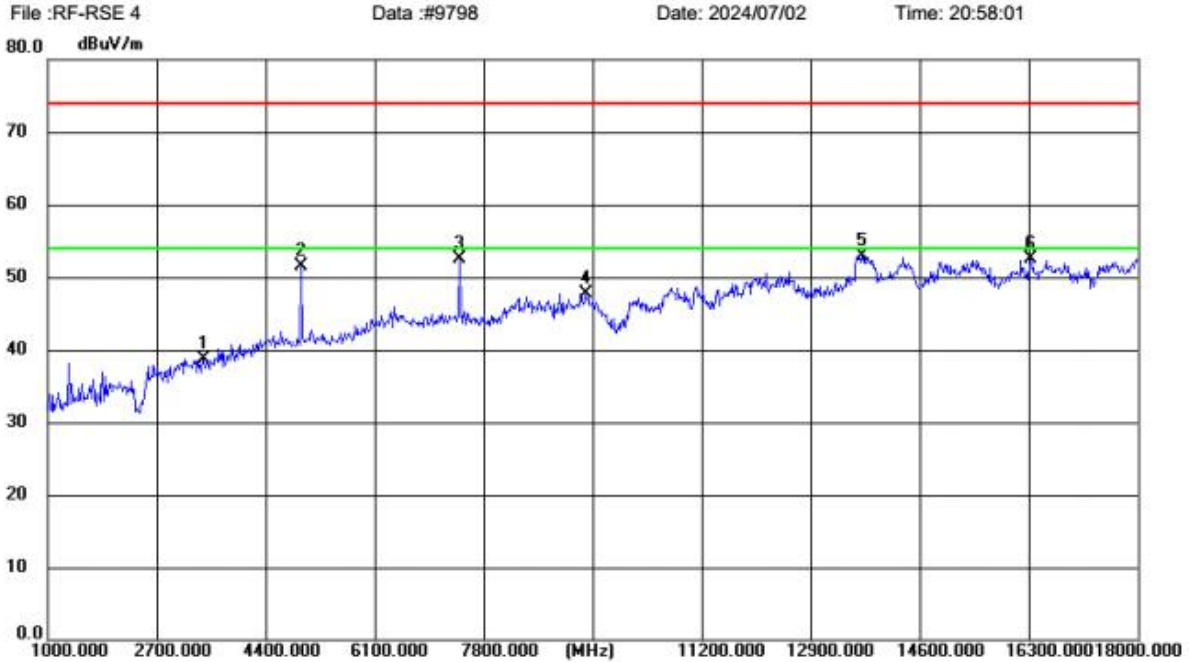

Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)  
 Limit: FCC Part15 RE-Class C\_Above 1GHz\_PK Power: Humidity: 50 %  
 EUT: Distance: 3m  
 M/N: A10  
 Mode: BLE1M 2480MHz TX  
 Note: Shenzhen LEQI Intelligent Technology Co., Ltd.


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	3441.625	51.02	-12.28	38.74	74.00	35.26	peak	150	306	P	
2	4958.875	59.26	-7.85	51.41	74.00	22.59	peak	150	87	P	
3	7438.750	55.39	-2.81	52.58	74.00	21.42	peak	150	87	P	
4	9406.500	47.55	0.22	47.77	74.00	26.23	peak	150	139	P	
5	13699.000	49.08	3.90	52.98	74.00	21.02	peak	150	139	P	
6	16342.500	46.80	5.64	52.44	74.00	21.56	peak	150	76	P	

REMARKS:

- 18GHz-26GHz not recorded for no spurious point have a margin of less than 6 dB with respect to the limits.
- PK detector measurement value is lower than the average limit. Therefore, there is no need to test AV detector measurements.

Results of Band Edges Test (Radiated)

BLE 1M

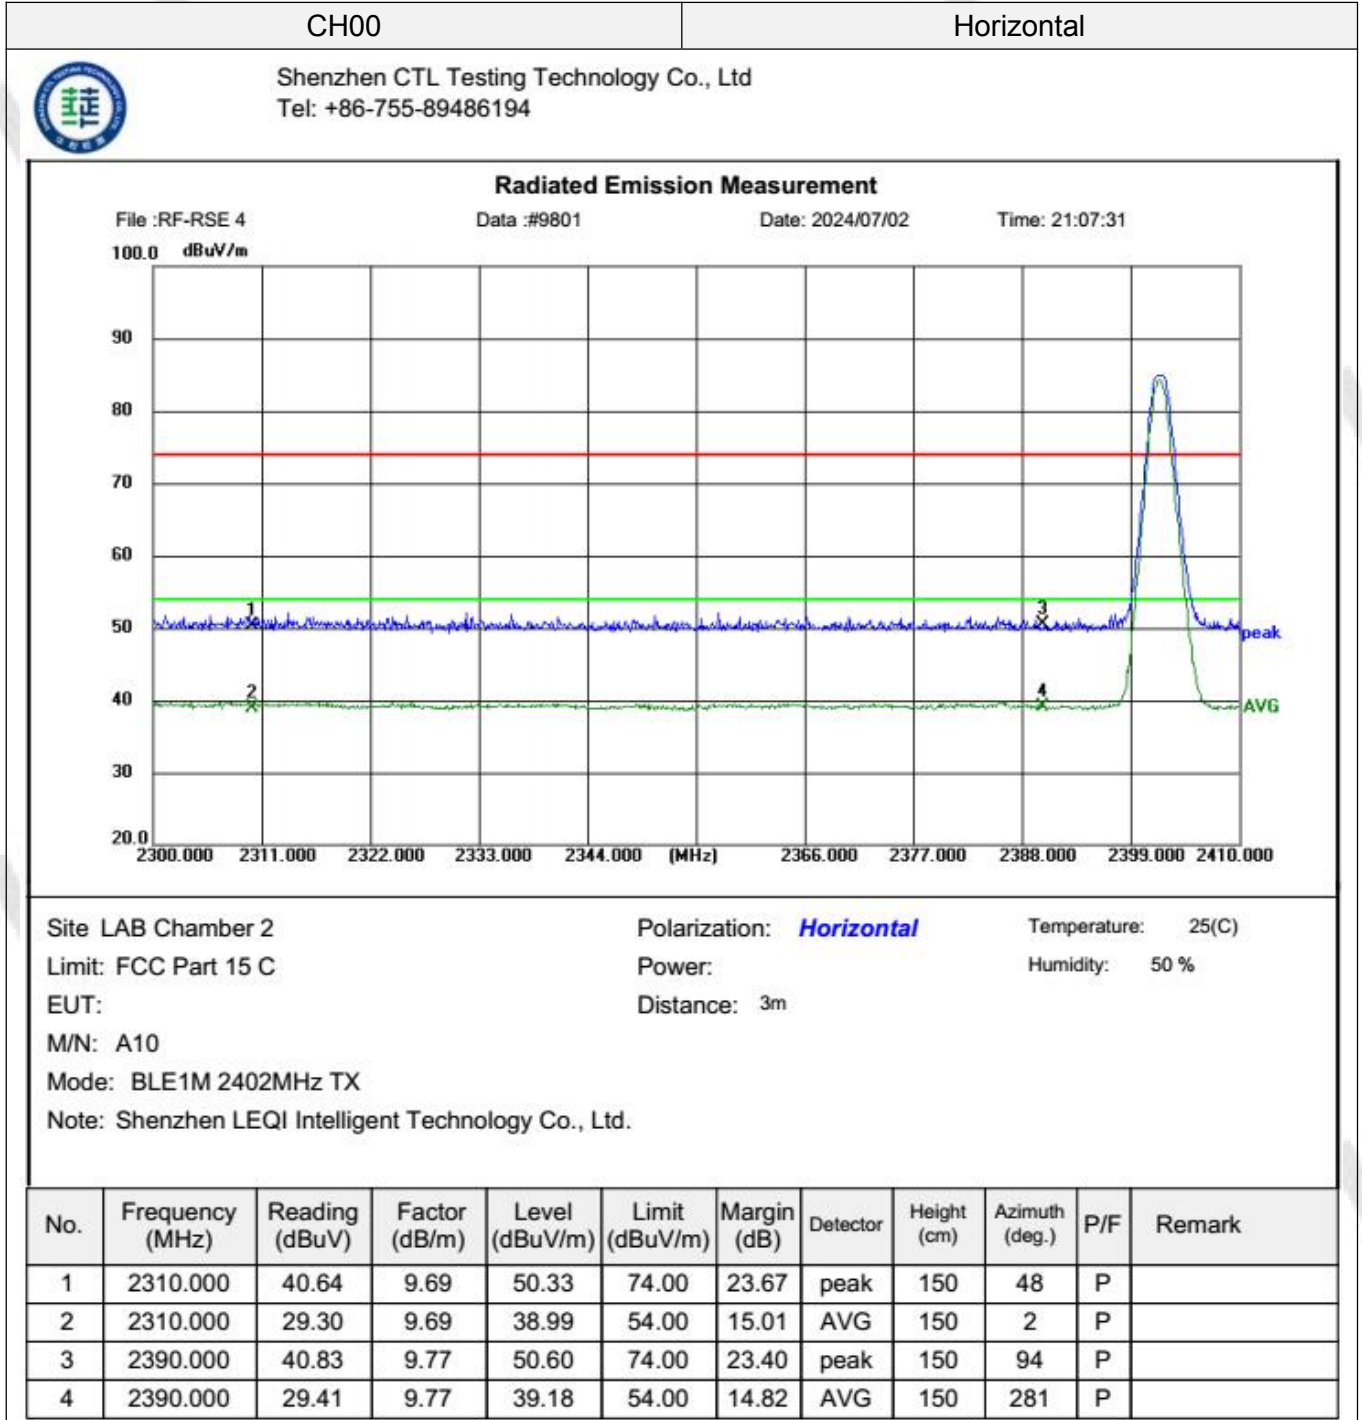

CH00

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data :#9802

Date: 2024/07/02

Time: 21:08:36

100.0 dBuV/m

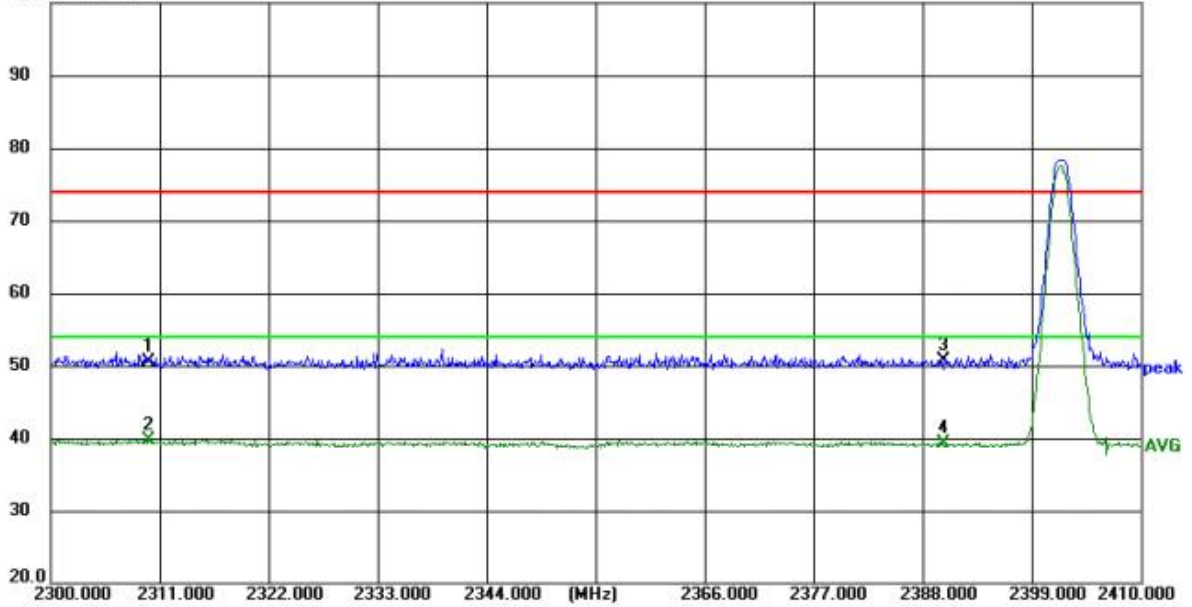

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part 15 C

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: A10

Mode: BLE1M 2402MHz TX

Note: Shenzhen LEQI Intelligent Technology Co., Ltd.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	40.79	9.69	50.48	74.00	23.52	peak	150	189	P	
2	2310.000	29.99	9.69	39.68	54.00	14.32	AVG	150	49	P	
3	2390.000	40.85	9.77	50.62	74.00	23.38	peak	150	112	P	
4	2390.000	29.44	9.77	39.21	54.00	14.79	AVG	150	313	P	

CH39

Horizontal



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data :#9799

Date: 2024/07/02

Time: 21:01:53

100.0 dBuV/m

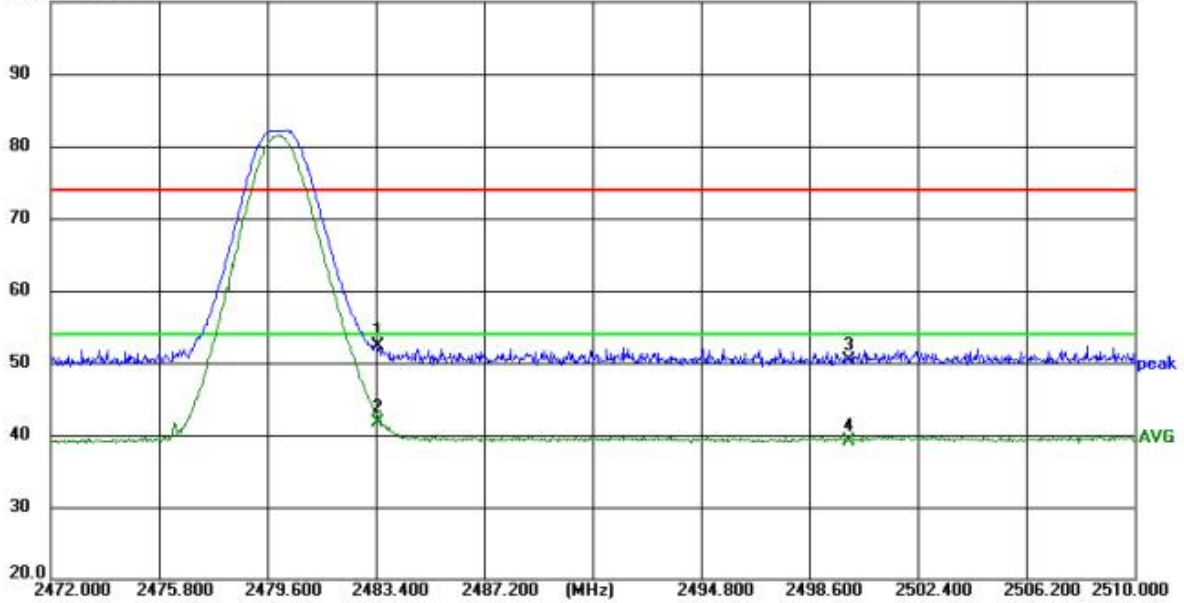

Site LAB Chamber 2

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part 15 C

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: A10

Mode: BLE1M 2480MHz TX

Note: Shenzhen LEQI Intelligent Technology Co., Ltd.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	42.42	9.93	52.35	74.00	21.65	peak	150	64	P	
2	2483.500	31.83	9.93	41.76	54.00	12.24	AVG	150	48	P	
3	2500.000	40.34	10.00	50.34	74.00	23.66	peak	150	48	P	
4	2500.000	29.10	10.00	39.10	54.00	14.90	AVG	150	266	P	

CH39

Vertical



Shenzhen CTL Testing Technology Co., Ltd  
Tel: +86-755-89486194

**Radiated Emission Measurement**


File :RF-RSE 4

Data :#9800

Date: 2024/07/02

Time: 21:02:58

100.0 dBuV/m

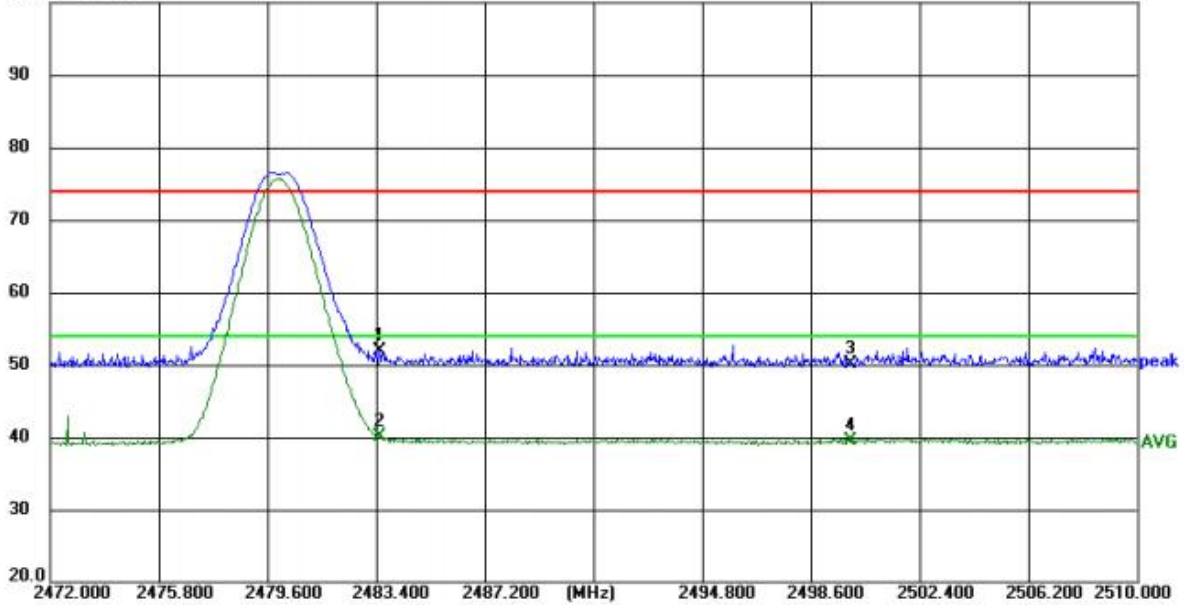

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part 15 C

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: A10

Mode: BLE1M 2480MHz TX

Note: Shenzhen LEQI Intelligent Technology Co., Ltd.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	42.02	9.93	51.95	74.00	22.05	peak	150	95	P	
2	2483.500	30.19	9.93	40.12	54.00	13.88	AVG	150	187	P	
3	2500.000	40.04	10.00	50.04	74.00	23.96	peak	150	95	P	
4	2500.000	29.41	10.00	39.41	54.00	14.59	AVG	150	95	P	

### 3.3. Maximum Peak Conducted Output Power

#### Limit

The Maximum Peak Output Power Measurement is 30dBm.

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer. The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### Test Configuration



#### Test Results

Raw data reference to Section 2 of document No. CTL2406052091-WF\_BLE\_Appendix.



### 3.4. Power Spectral Density

#### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW  $\geq$  3 kHz.
3. Set the VBW  $\geq$  3 $\times$  RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

#### Test Configuration



#### Test Results

Raw data reference to Section 3 of document No. CTL2406052091-WF\_BLE\_Appendix.

### 3.5. 6dB Bandwidth

#### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

#### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### Test Configuration



#### Test Results

Raw data reference to Section 1 of document No. CTL2406052091-WF\_BLE\_Appendix.

### 3.6. Out-of-band Emissions

#### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

#### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

#### Test Configuration



#### Test Results

Raw data reference to Section 4 of document No. CTL2406052091-WF\_BLE\_Appendix.

### 3.7. Antenna Requirement

#### Standard Applicable

#### **For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(b) (4):**

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


#### **Antenna Connector Construction**

The gains of antenna used for transmitting is 2.6dBi(Max.), and the antenna is a Microtrip Antenna and no consideration of replacement. Please see EUT photo for details.


**Results:** Compliance.

## 4. Test Setup Photos of the EUT

Adapter 1

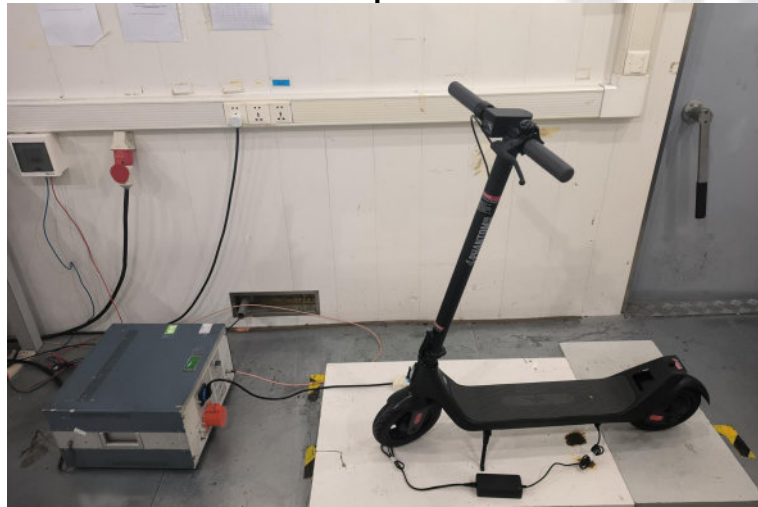

Adapter 2

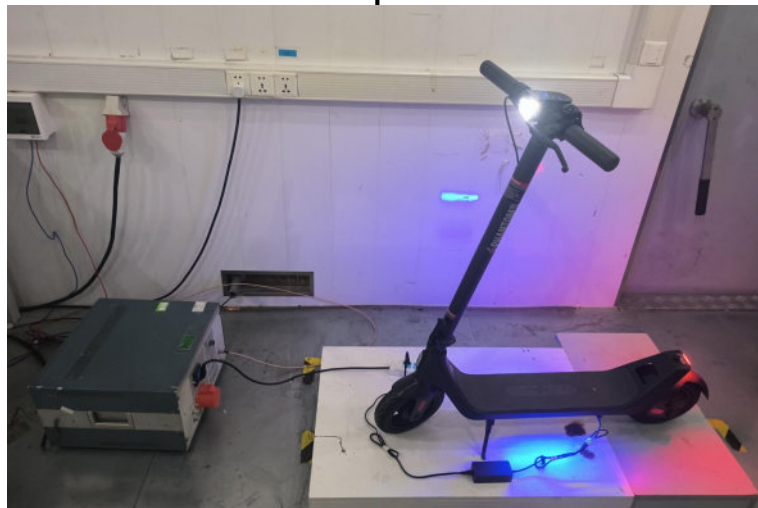

Adapter 1



Adapter 2



## 5. Photos of the EUT

### External Photos of EUT







### Adapter 1








### Adapter 2







**Internal Photos of EUT**

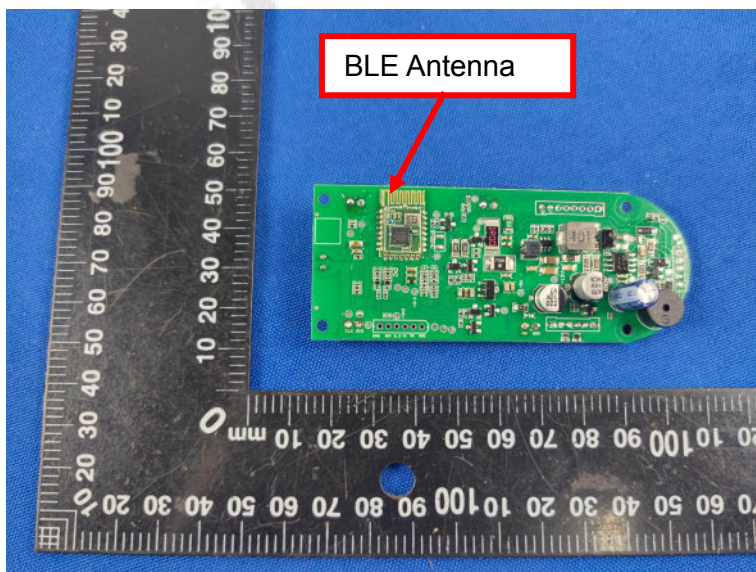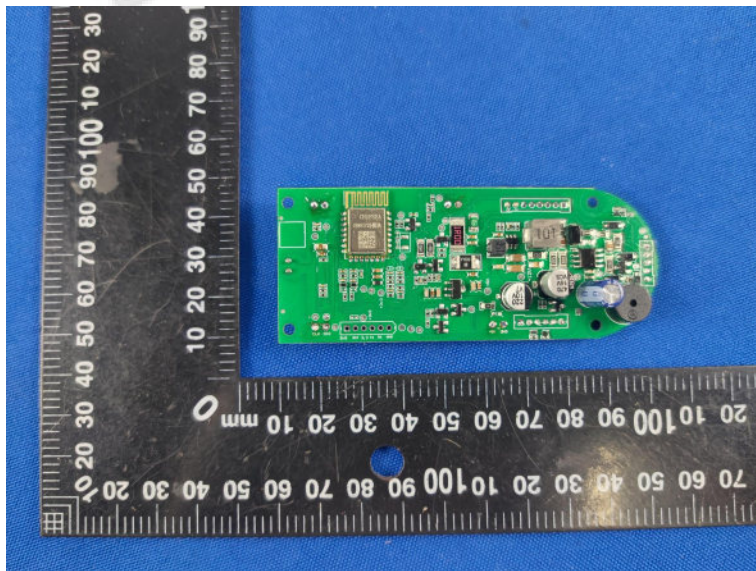

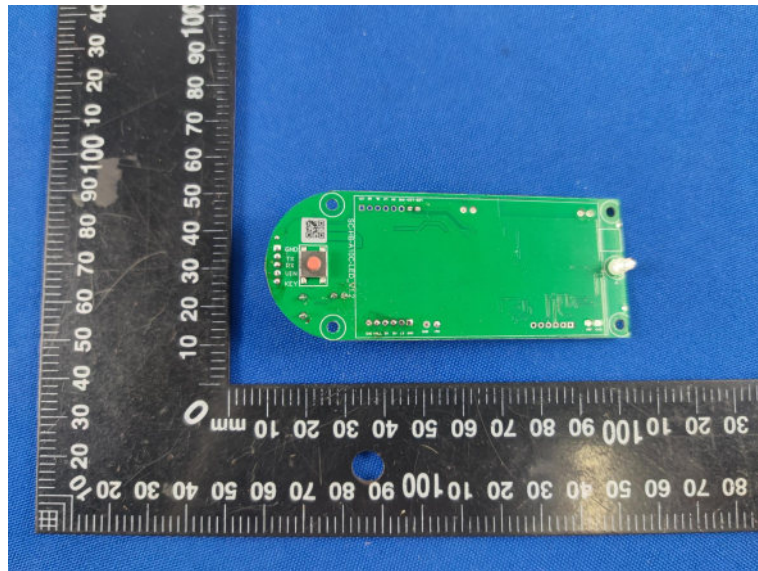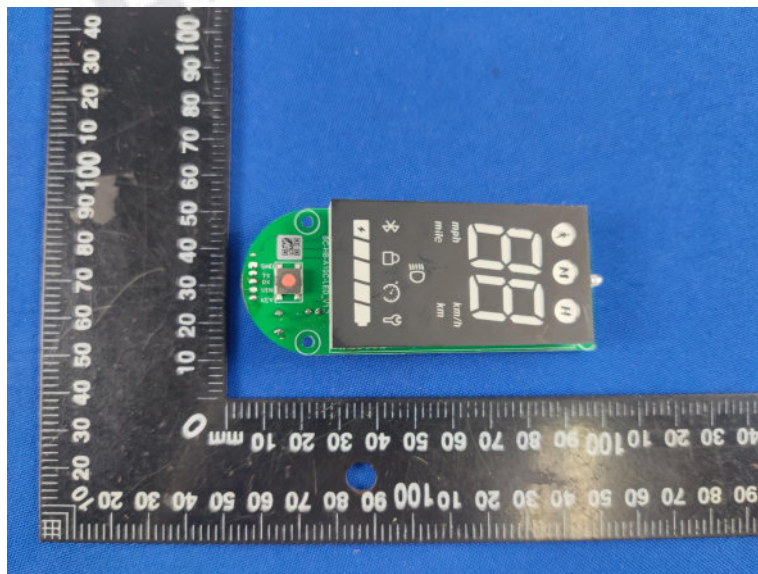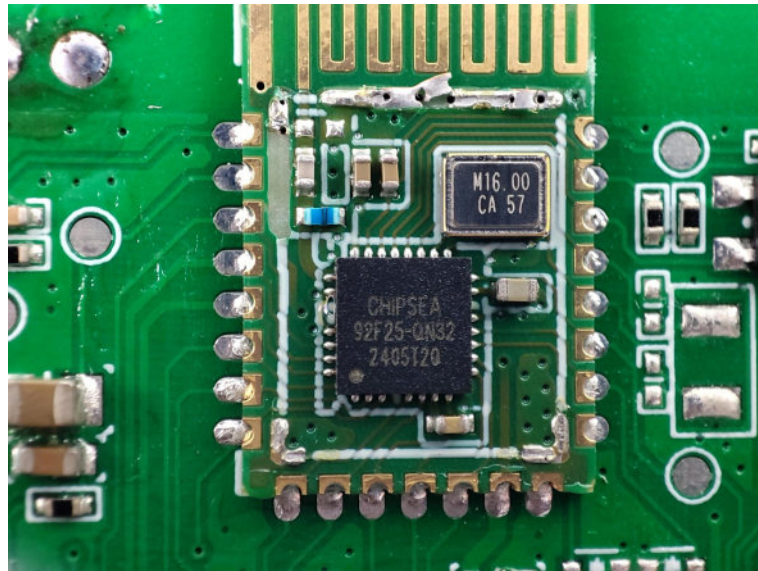

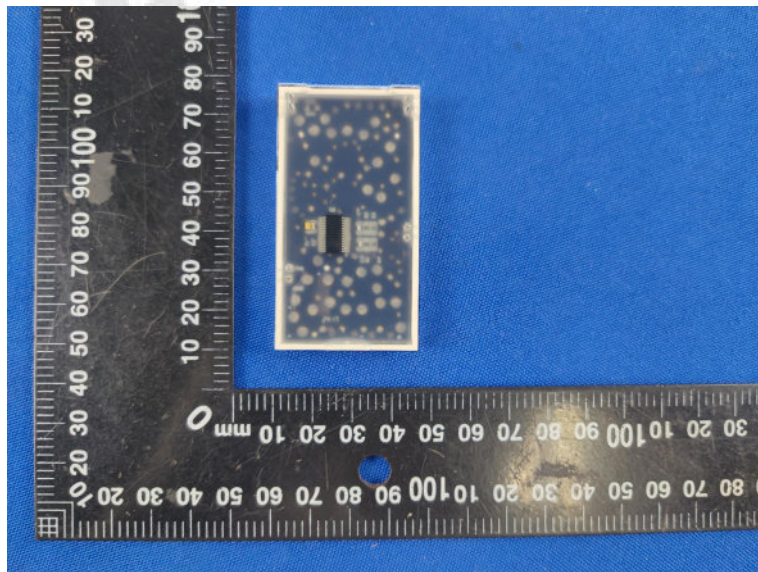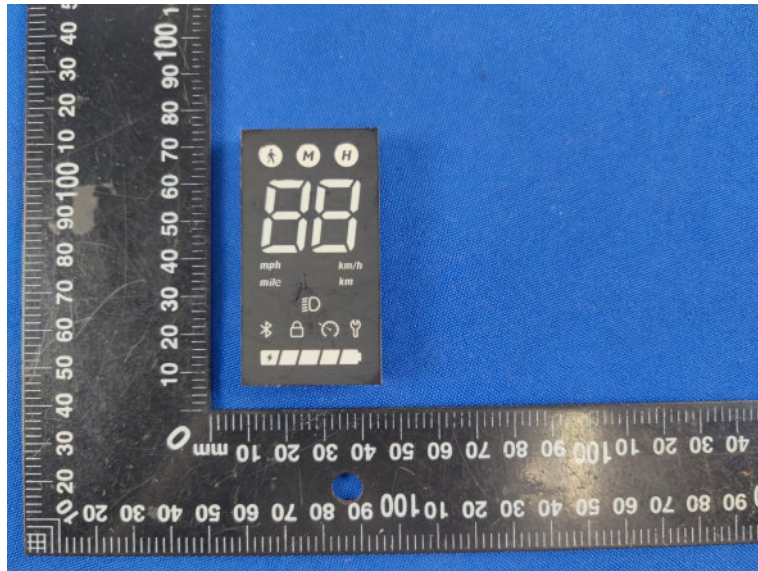

\*\*\*\*\* End of Report \*\*\*\*\*