



# TEST REPORT

Product Name: camera  
FCC ID: 2BFPE-Q101  
Trademark: N/A  
Model Number: Q101, Q102, Q103, Q104, Q105, Q106, Q107, Q108, Q109, Q110, Q111, Q112, Q113, Q114, Q115, Q116, Q117, Q118, Q119, Q120, ZY101, ZY102, ZY103, ZY104, ZY105, ZY106, ZY107, ZY108, ZY109, ZY110, ZY111, ZY112, ZY113, ZY114, ZY115, ZY116, ZY117, ZY118, ZY119, ZY200  
Prepared For: SHENZHEN ZHIYUN IOT CO.,LTD.  
Address: Building 603, Building C, No. 7, East District, Shangxue Technology City, Xinxue Community, Bantian Street, Longgang District, Shenzhen  
Manufacturer: SHENZHEN ZHIYUN IOT CO.,LTD.  
Address: Building 603, Building C, No. 7, East District, Shangxue Technology City, Xinxue Community, Bantian Street, Longgang District, Shenzhen  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Mar. 18, 2024  
Sample tested Date: Mar. 18, 2024 to Mar. 28, 2024  
Issue Date: Mar. 28, 2024  
Report No.: CTB240328037RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION.....</b>	<b>3</b>
<b>2. TEST SUMMARY .....</b>	<b>4</b>
<b>3. MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP .....</b>	<b>6</b>
4.1 Product Information .....	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List .....	7
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED .....</b>	<b>8</b>
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>10</b>
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
<b>7. RADIATED SPURIOUS EMISSION .....</b>	<b>14</b>
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure .....	15
7.4 Test Result .....	16
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>38</b>
8.1 Block Diagram Of Test Setup.....	38
8.2 Limit.....	38
8.3 Test procedure .....	38
8.4 Test Result .....	39
<b>9. CONDUCTED OUTPUT POWER .....</b>	<b>46</b>
9.1 Block Diagram Of Test Setup.....	46
9.2 Limit.....	46
9.3 Test procedure .....	46
9.4 Test Result .....	47
<b>10. 6DB OCCUPIED BANDWIDTH .....</b>	<b>48</b>
10.1 Block Diagram Of Test Setup.....	48
10.2 Limit.....	48
10.3 Test procedure .....	48
10.4 Test Result .....	49
<b>11. POWER SPECTRAL DENSITY .....</b>	<b>54</b>
11.1 Block Diagram Of Test Setup.....	54
11.2 Limit.....	54
11.3 Test procedure .....	54
11.4 Test Result .....	55
<b>12. ANTENNA REQUIREMENT .....</b>	<b>60</b>
<b>13. EUT TEST SETUP PHOTOGRAPHS.....</b>	<b>61</b>

*(Note: N/A means not applicable)*

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240328037RFX	Mar. 28, 2024	Original	Valid



## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s): Q101, Q102, Q103, Q104, Q105, Q106, Q107, Q108, Q109, Q110, Q111, Q112, Q113, Q114, Q115, Q116, Q117, Q118, Q119, Q120, ZY101, ZY102, ZY103, ZY104, ZY105, ZY106, ZY107, ZY108, ZY109, ZY110, ZY111, ZY112, ZY113, ZY114, ZY115, ZY116, ZY117, ZY118, ZY119, ZY200

Model Description: All the model are the same circuit and RF module, only for model name.  
Test sample model: Q101

Wi-Fi Specification: IEEE 802.11b/g/n

Hardware Version: V1.0

Software Version: V1.0

Operation Frequency: WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel  
IEEE 802.11n 40: 2422-2452MHz/ 7 channel

Max. RF output power: WiFi (2.4G): 14.958dBm

Type of Modulation: WiFi: DSSS, OFDM

Antenna installation: WiFi: Glue stick antenna

Antenna Gain: WiFi (2.4G): 2.49dBi

Ratings: DC 5V by adapter

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Adapter	JIYIN	JY-05100C	N/A	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	5V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08



22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	/	2024.07.05

### Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

### Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

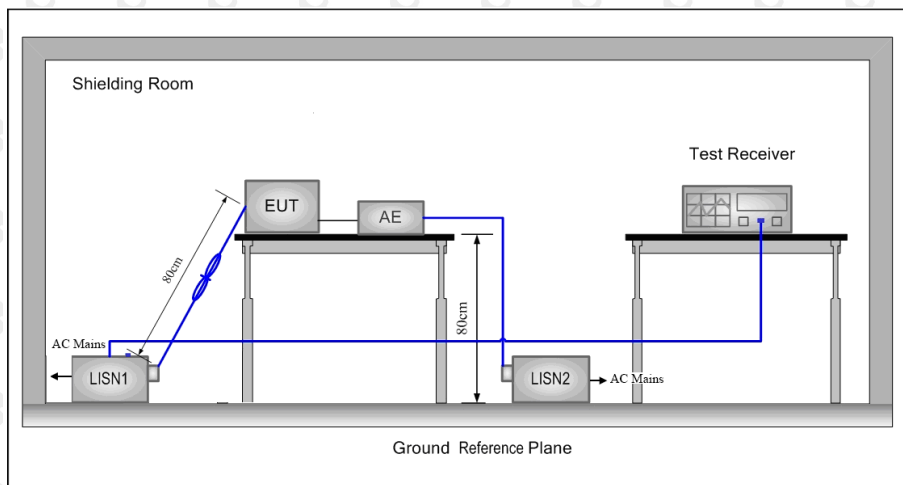

### 6.2 Limit

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.



### 6.4 Test Result

Test Specification: Line  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

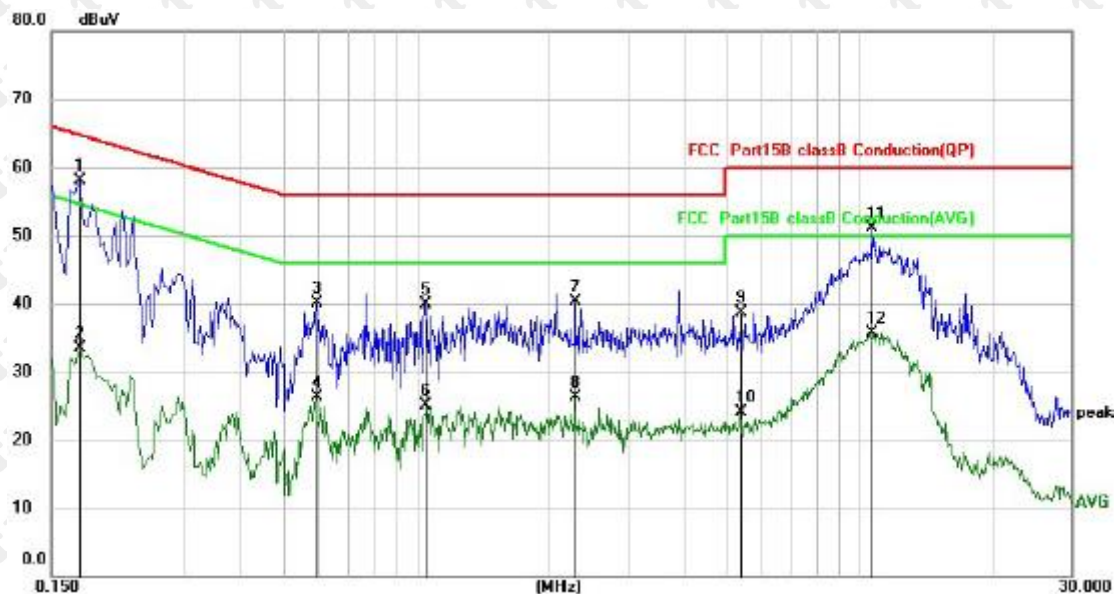


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1740	48.09	9.95	58.04	64.77	-6.73	QP
2		0.1740	23.47	9.95	33.42	54.77	-21.35	AVG
3		0.5940	30.10	10.00	40.10	56.00	-15.90	QP
4		0.5940	16.23	10.00	26.23	46.00	-19.77	AVG
5		1.0460	29.95	10.01	39.96	56.00	-16.04	QP
6		1.0460	15.04	10.01	25.05	46.00	-20.95	AVG
7		2.2820	30.27	10.12	40.39	56.00	-15.61	QP
8		2.2820	16.11	10.12	26.23	46.00	-19.77	AVG
9		5.3780	28.20	10.41	38.61	60.00	-21.39	QP
10		5.3780	13.61	10.41	24.02	50.00	-25.98	AVG
11		10.6500	40.43	10.60	51.03	60.00	-8.97	QP
12		10.6500	25.10	10.60	35.70	50.00	-14.30	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

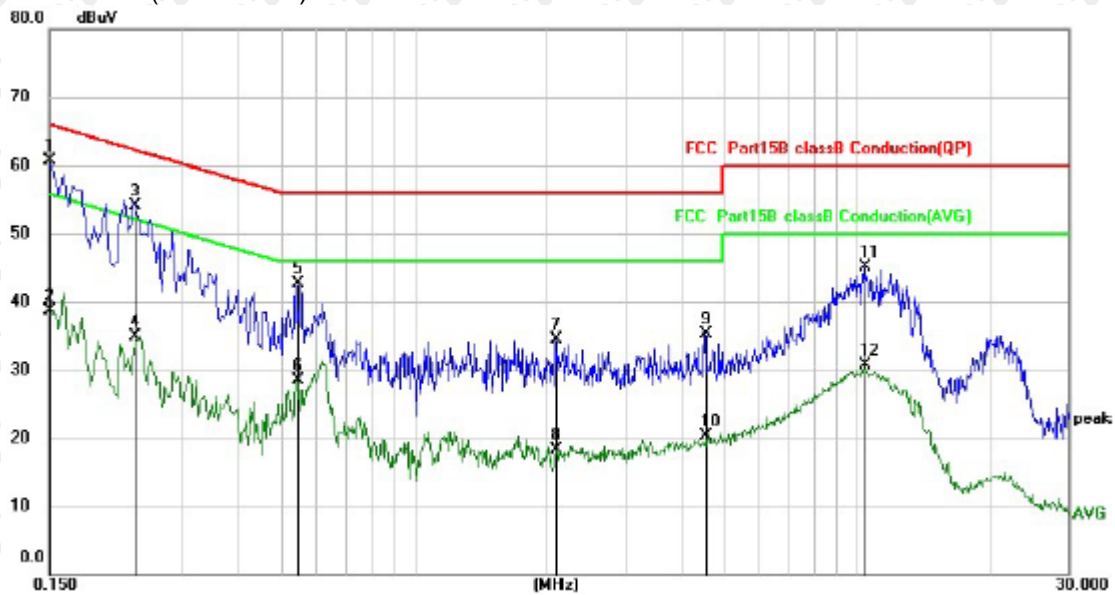

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	50.82	9.95	60.77	66.00	-5.23	QP
2		0.1500	28.72	9.95	38.67	56.00	-17.33	AVG
3		0.2341	44.22	9.95	54.17	62.30	-8.13	QP
4		0.2341	24.95	9.95	34.90	52.30	-17.40	AVG
5		0.5460	32.64	10.00	42.64	56.00	-13.36	QP
6		0.5460	18.45	10.00	28.45	46.00	-17.55	AVG
7		2.0900	24.45	10.10	34.55	56.00	-21.45	QP
8		2.0900	8.24	10.10	18.34	46.00	-27.66	AVG
9		4.5420	24.87	10.34	35.21	56.00	-20.79	QP
10		4.5420	9.90	10.34	20.24	46.00	-25.76	AVG
11		10.3660	34.61	10.59	45.20	60.00	-14.80	QP
12		10.3660	20.06	10.59	30.65	50.00	-19.35	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

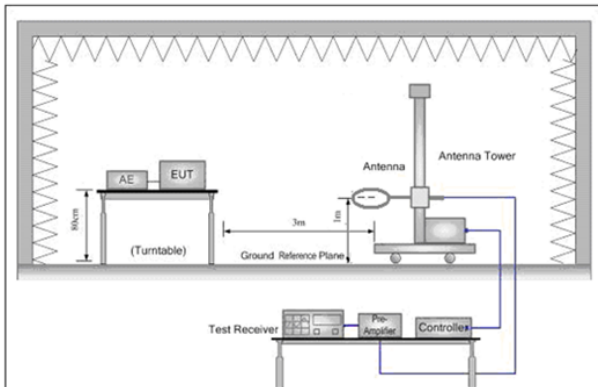


Figure 1. Below 30MHz

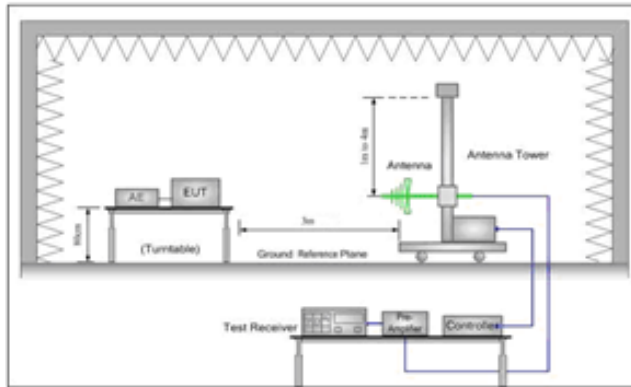


Figure 2. 30MHz to 1GHz

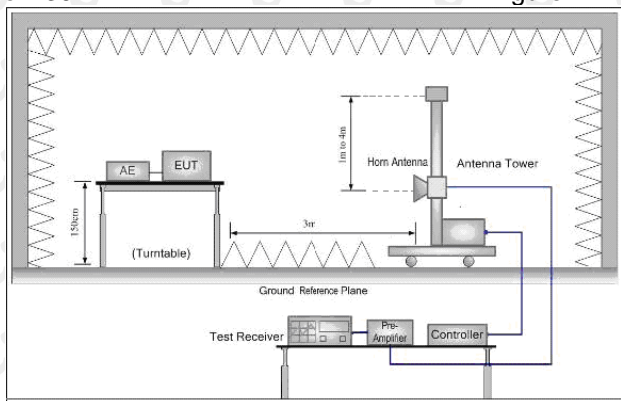


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

### 7.4 Test Result


Below 1GHz Test Results:  
Antenna polarity: H

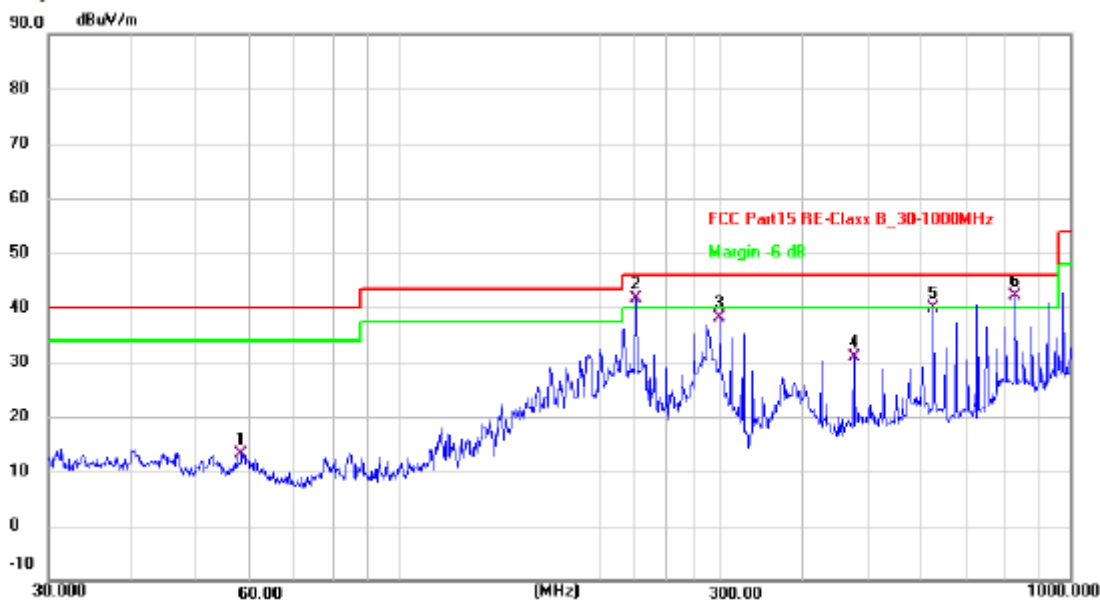

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	58.2030	28.43	-15.26	13.17	40.00	-26.83	QP
2 !	225.3080	57.61	-15.99	41.62	46.00	-4.38	QP
3	300.3672	51.08	-13.00	38.08	46.00	-7.92	QP
4	475.4990	39.97	-9.06	30.91	46.00	-15.09	QP
5	625.0780	45.01	-5.03	39.98	46.00	-6.02	QP
6 *	827.4933	42.66	-0.53	42.13	46.00	-3.87	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

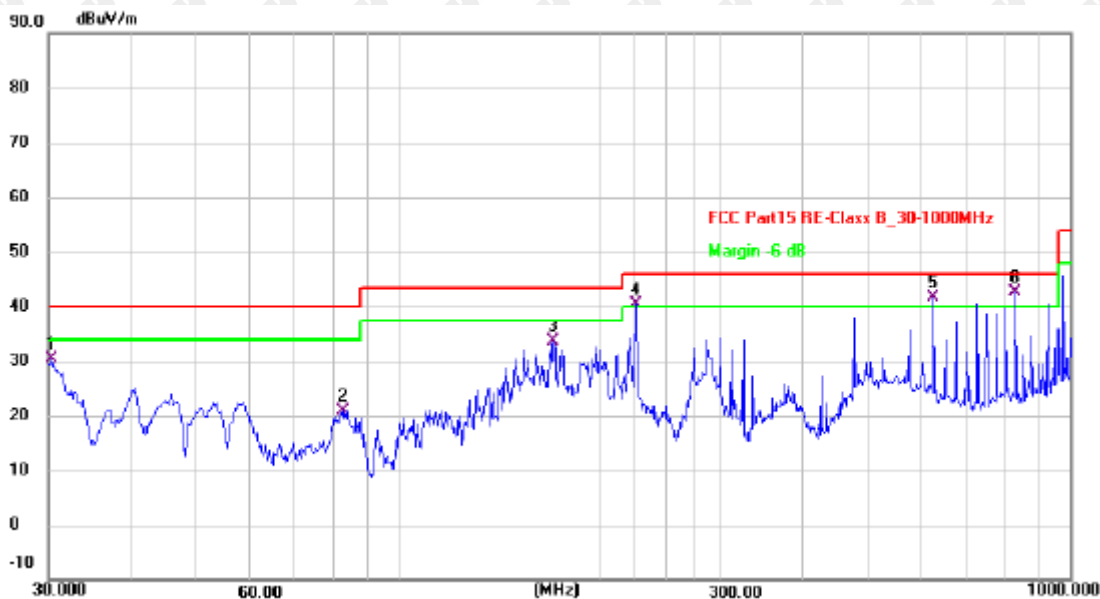

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.3171	44.33	-14.01	30.32	40.00	-9.68	QP
2	82.6480	39.40	-18.52	20.88	40.00	-19.12	QP
3	169.5990	47.34	-13.68	33.66	43.50	-9.84	QP
4 !	225.3080	56.26	-15.99	40.27	46.00	-5.73	QP
5 !	625.0780	46.55	-5.03	41.52	46.00	-4.48	QP
6 *	827.4933	43.13	-0.53	42.60	46.00	-3.40	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)



Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.59	-3.64	60.95	74	-13.05	peak
4824	48.05	-3.64	44.41	54	-9.59	AVG
7236	57.82	-0.95	56.87	74	-17.13	peak
7236	45.28	-0.95	44.33	54	-9.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.20	-3.64	61.56	74	-12.44	peak
4824	48.42	-3.64	44.78	54	-9.22	AVG
7236	56.56	-0.95	55.61	74	-18.39	peak
7236	43.75	-0.95	42.80	54	-11.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	65.08	-3.51	61.57	74	-12.43	peak
4874	48.79	-3.51	45.28	54	-8.72	AVG
7311	58.02	-0.82	57.20	74	-16.80	peak
7311	44.70	-0.82	43.88	54	-10.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.77	-3.51	61.26	74	-12.74	peak
4874	48.51	-3.51	45.00	54	-9.00	AVG
7311	60.29	-0.82	59.47	74	-14.53	peak
7311	43.69	-0.82	42.87	54	-11.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	64.62	-3.43	61.19	74	-12.81	peak
4924	47.03	-3.43	43.60	54	-10.40	AVG
7386	57.33	-0.75	56.58	74	-17.42	peak
7386	45.25	-0.75	44.50	54	-9.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	64.09	-3.43	60.66	74	-13.34	peak
4924	46.24	-3.43	42.81	54	-11.19	AVG
7386	59.09	-0.75	58.34	74	-15.66	peak
7386	43.24	-0.75	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	65.50	-3.64	61.86	74	-12.14	peak
4824	49.49	-3.64	45.85	54	-8.15	AVG
7236	58.95	-0.95	58.00	74	-16.00	peak
7236	44.29	-0.95	43.34	54	-10.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	63.77	-3.64	60.13	74	-13.87	peak
4824	48.80	-3.64	45.16	54	-8.84	AVG
7236	59.77	-0.95	58.82	74	-15.18	peak
7236	44.38	-0.95	43.43	54	-10.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.86	-3.51	61.35	74	-12.65	peak
4874	47.53	-3.51	44.02	54	-9.98	AVG
7311	58.32	-0.82	57.50	74	-16.50	peak
7311	43.00	-0.82	42.18	54	-11.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	63.06	-3.51	59.55	74	-14.45	peak
4874	47.09	-3.51	43.58	54	-10.42	AVG
7311	57.83	-0.82	57.01	74	-16.99	peak
7311	42.81	-0.82	41.99	54	-12.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.49	-3.43	61.06	74	-12.94	peak
4924	49.33	-3.43	45.90	54	-8.10	AVG
7386	57.30	-0.75	56.55	74	-17.45	peak
7386	41.49	-0.75	40.74	54	-13.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.15	-3.43	58.72	74	-15.28	peak
4924	46.97	-3.43	43.54	54	-10.46	AVG
7386	57.44	-0.75	56.69	74	-17.31	peak
7386	42.89	-0.75	42.14	54	-11.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	62.41	-3.64	58.77	74	-15.23	peak
4824	49.20	-3.64	45.56	54	-8.44	AVG
7236	56.96	-0.95	56.01	74	-17.99	peak
7236	43.05	-0.95	42.10	54	-11.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	66.91	-3.64	63.27	74	-10.73	peak
4824	47.35	-3.64	43.71	54	-10.29	AVG
7236	59.78	-0.95	58.83	74	-15.17	peak
7236	42.58	-0.95	41.63	54	-12.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874.00	65.47	-3.51	61.96	74.00	-12.04	peak
4874.00	48.30	-3.51	44.79	54.00	-9.21	AVG
7311.00	57.85	-0.82	57.03	74.00	-16.97	peak
7311.00	46.14	-0.82	45.32	54.00	-8.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874.00	62.77	-3.51	59.26	74.00	-14.74	peak
4874.00	45.97	-3.51	42.46	54.00	-11.54	AVG
7311.00	58.43	-0.82	57.61	74.00	-16.39	peak
7311.00	43.11	-0.82	42.29	54.00	-11.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.09	-3.43	59.66	74	-14.34	peak
4924	47.94	-3.43	44.51	54	-9.49	AVG
7386	58.48	-0.75	57.73	74	-16.27	peak
7386	41.15	-0.75	40.40	54	-13.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.91	-3.43	59.48	74	-14.52	peak
4924	45.83	-3.43	42.40	54	-11.60	AVG
7386	58.45	-0.75	57.70	74	-16.30	peak
7386	43.44	-0.75	42.69	54	-11.31	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.06	-3.63	59.43	74	-14.57	peak
4844	49.03	-3.63	45.40	54	-8.60	AVG
7266	59.20	-0.94	58.26	74	-15.74	peak
7266	44.60	-0.94	43.66	54	-10.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.69	-3.63	62.06	74	-11.94	peak
4844	47.94	-3.63	44.31	54	-9.69	AVG
7266	59.52	-0.94	58.58	74	-15.42	peak
7266	44.29	-0.94	43.35	54	-10.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.63	-3.51	61.12	74	-12.88	peak
4874	49.10	-3.51	45.59	54	-8.41	AVG
7311	58.46	-0.82	57.64	74	-16.36	peak
7311	45.17	-0.82	44.35	54	-9.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.30	-3.51	58.79	74	-15.21	peak
4874	46.45	-3.51	42.94	54	-11.06	AVG
7311	56.66	-0.82	55.84	74	-18.16	peak
7311	43.33	-0.82	42.51	54	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	62.50	-3.43	59.07	74	-14.93	peak
4904	48.51	-3.43	45.08	54	-8.92	AVG
7356	56.83	-0.75	56.08	74	-17.92	peak
7356	41.88	-0.75	41.13	54	-12.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4904	61.93	-3.43	58.50	74	-15.50	peak
4904	47.61	-3.43	44.18	54	-9.82	AVG
7356	56.90	-0.75	56.15	74	-17.85	peak
7356	43.88	-0.75	43.13	54	-10.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report



### Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	56.88	-5.81	51.07	74	-22.93	peak
2390	/	-5.81	/	54	/	AVG
2399	63.33	-5.84	57.49	74	-16.51	peak
2399	49.32	-5.84	43.48	54	-10.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.81	-5.81	52.00	74	-22.00	peak
2390	/	-5.81	/	54	/	AVG
2399	62.84	-5.84	57.00	74	-17.00	peak
2399	45.90	-5.84	40.06	54	-13.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.03	-5.65	51.38	74	-22.62	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.44	-5.65	50.79	74	-23.21	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.88	-5.81	52.07	74	-21.93	peak
2390	/	-5.81	/	54	/	AVG
2399	61.57	-5.84	55.73	74	-18.27	peak
2399	45.93	-5.84	40.09	54	-13.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	56.01	-5.81	50.20	74	-23.80	peak
2390	/	-5.81	/	54	/	AVG
2399	62.94	-5.84	57.10	74	-16.90	peak
2399	45.47	-5.84	39.63	54	-14.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.30	-5.65	50.65	74	-23.35	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.94	-5.65	51.29	74	-22.71	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.68	-5.81	51.87	74	-22.13	peak
2390	/	-5.81	/	54	/	AVG
2399	62.61	-5.84	56.77	74	-17.23	peak
2399	47.75	-5.84	41.91	54	-12.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.42	-5.81	51.61	74	-22.39	peak
2390	/	-5.81	/	54	/	AVG
2399	61.57	-5.84	55.73	74	-18.27	peak
2399	47.71	-5.84	41.87	54	-12.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.11	-5.65	50.46	74	-23.54	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.86	-5.65	51.21	74	-22.79	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.



Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.42	-5.81	51.61	74	-22.39	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.02	-5.81	52.21	74	-21.79	peak
2390	/	-5.81	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.54	-5.65	50.89	74	-23.11	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.32	-5.65	50.67	74	-23.33	peak
2483.5	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

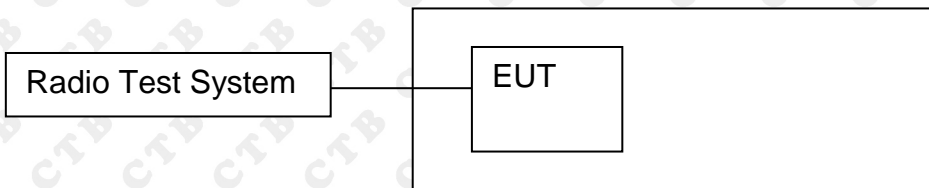

### 8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold




8.4 Test Result

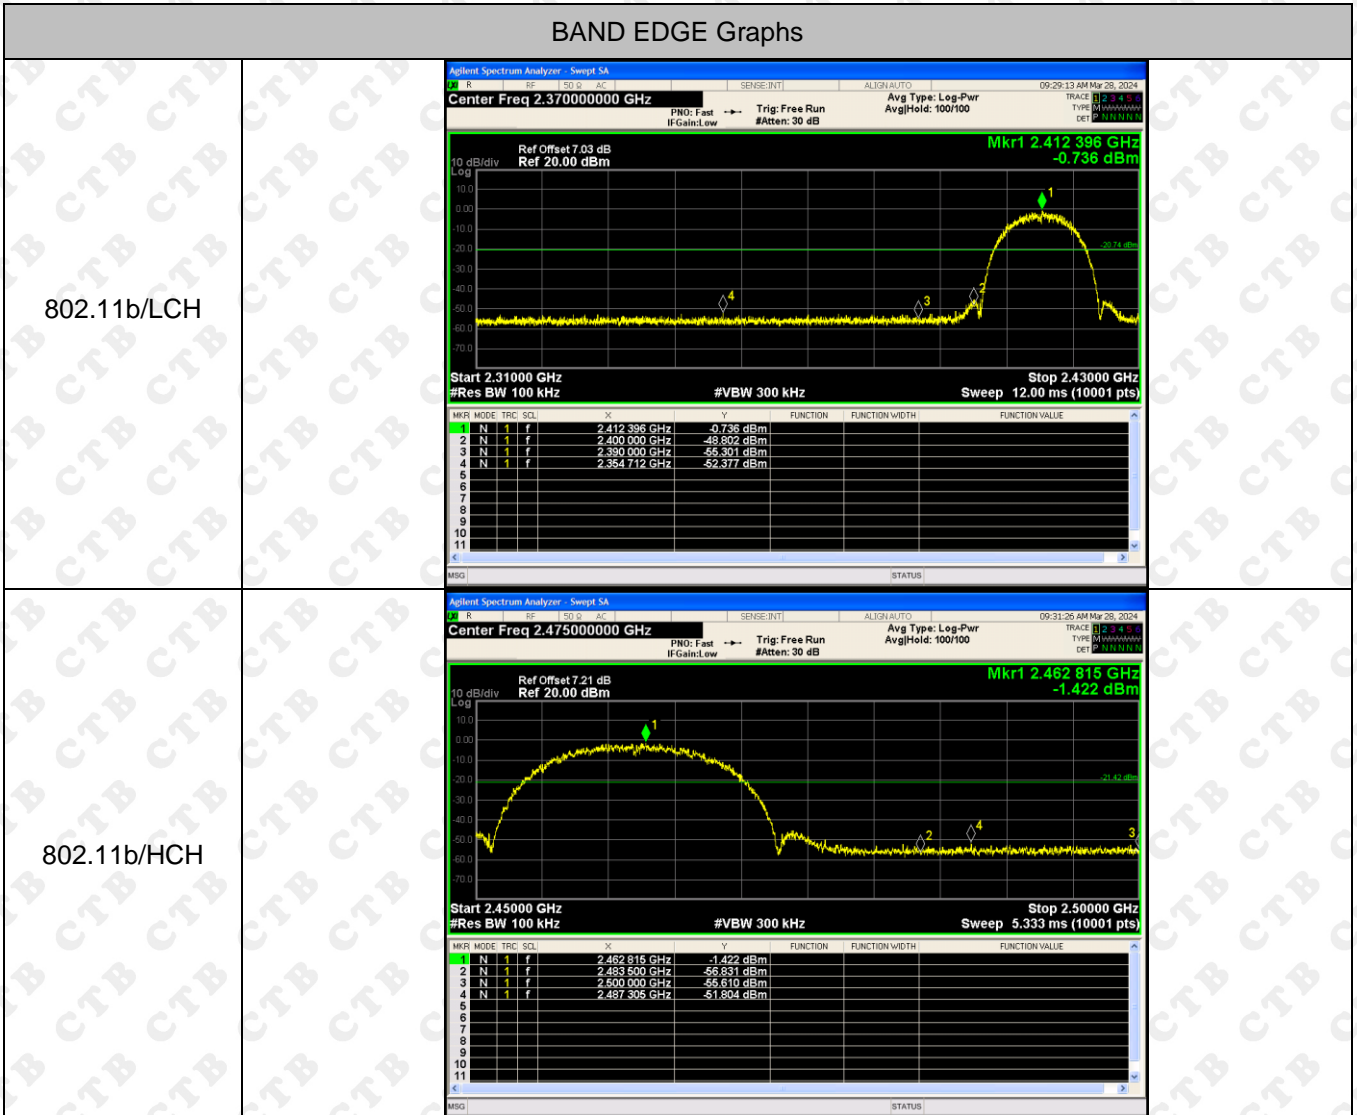


## BAND EDGE Graphs


802.11g/LCH


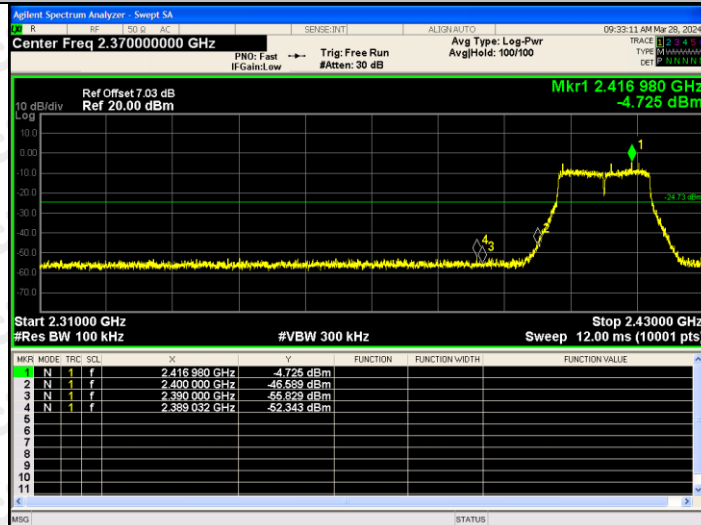


802.11g/HCH

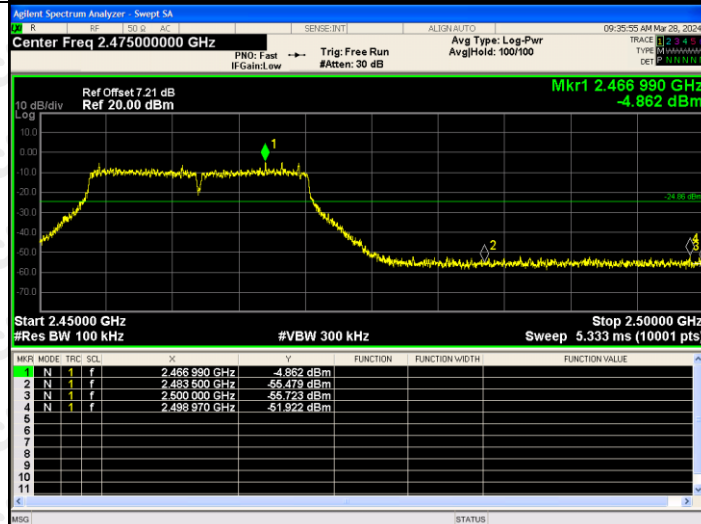

802.11n(HT20)/L  
CH

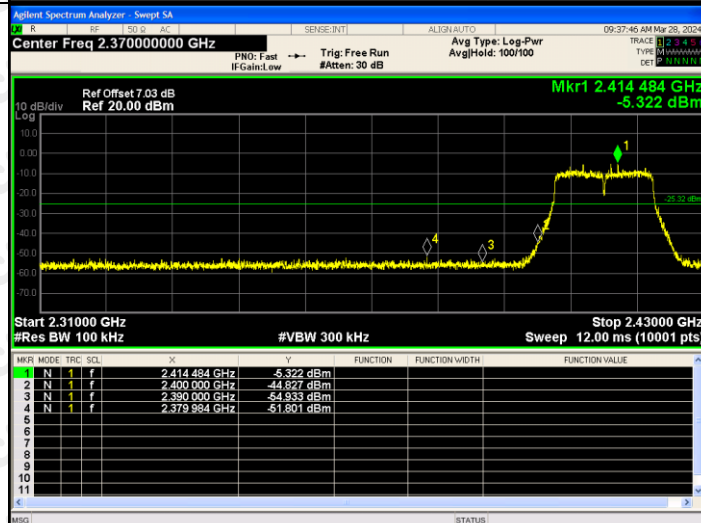

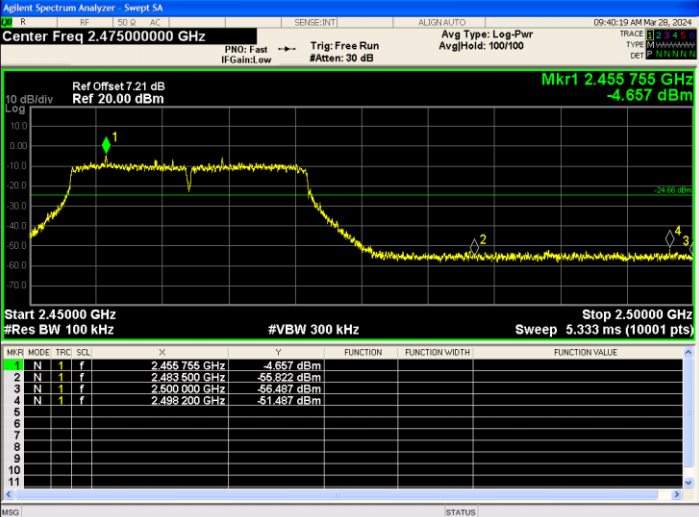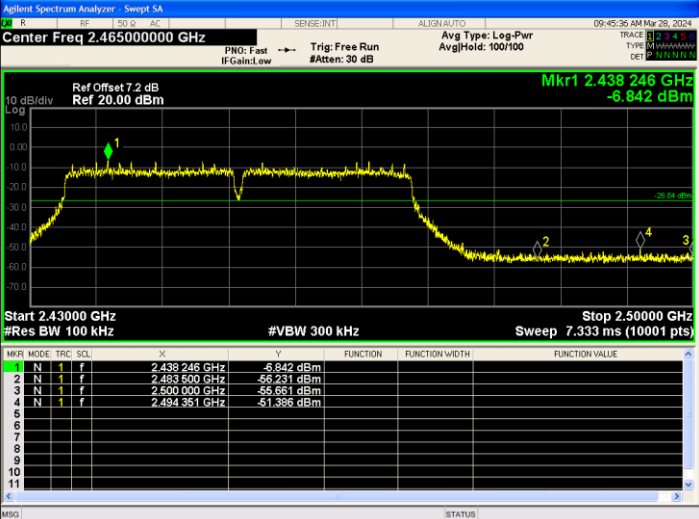
<p>802.11n(HT20)/H CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.475000000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.455755 GHz -4.657 dBm Start 2.45000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 5.333 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.455755 GHz</td> <td>-4.657 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-55.822 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td>-55.467 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.498200 GHz</td> <td>-51.487 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455755 GHz	-4.657 dBm				2	N	1	f	2.483500 GHz	-55.822 dBm				3	N	1	f	2.500000 GHz	-55.467 dBm				4	N	1	f	2.498200 GHz	-51.487 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.455755 GHz	-4.657 dBm																																									
2	N	1	f	2.483500 GHz	-55.822 dBm																																									
3	N	1	f	2.500000 GHz	-55.467 dBm																																									
4	N	1	f	2.498200 GHz	-51.487 dBm																																									
<p>802.11n(HT40)/L CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.380000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.435748 GHz -7.264 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.45000 GHz Sweep 14.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.435748 GHz</td> <td>-7.264 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400000 GHz</td> <td>-45.265 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390000 GHz</td> <td>-47.134 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.373942 GHz</td> <td>-51.315 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.435748 GHz	-7.264 dBm				2	N	1	f	2.400000 GHz	-45.265 dBm				3	N	1	f	2.390000 GHz	-47.134 dBm				4	N	1	f	2.373942 GHz	-51.315 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.435748 GHz	-7.264 dBm																																									
2	N	1	f	2.400000 GHz	-45.265 dBm																																									
3	N	1	f	2.390000 GHz	-47.134 dBm																																									
4	N	1	f	2.373942 GHz	-51.315 dBm																																									
<p>802.11n(HT40)/H CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.465000000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.438246 GHz -6.842 dBm Start 2.43000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 7.333 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.438246 GHz</td> <td>-6.842 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483500 GHz</td> <td>-56.231 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500000 GHz</td> <td>-55.651 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494351 GHz</td> <td>-51.368 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.438246 GHz	-6.842 dBm				2	N	1	f	2.483500 GHz	-56.231 dBm				3	N	1	f	2.500000 GHz	-55.651 dBm				4	N	1	f	2.494351 GHz	-51.368 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.438246 GHz	-6.842 dBm																																									
2	N	1	f	2.483500 GHz	-56.231 dBm																																									
3	N	1	f	2.500000 GHz	-55.651 dBm																																									
4	N	1	f	2.494351 GHz	-51.368 dBm																																									




RF Conducted Spurious Emissions Graphs


802.11b/LCH

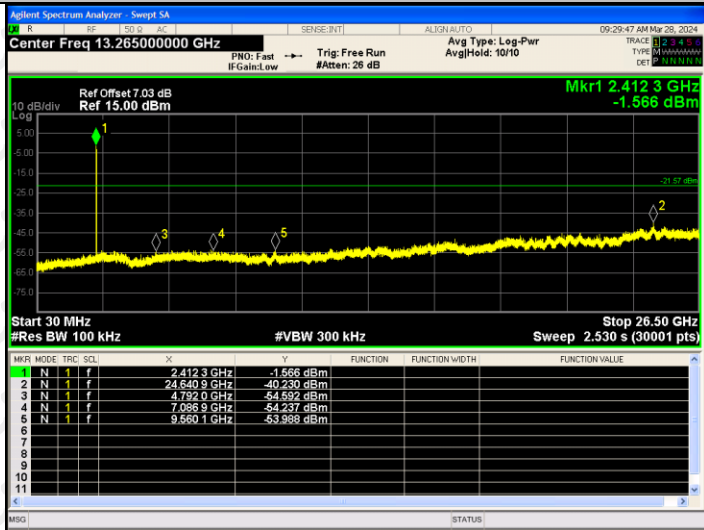


802.11b/MCH

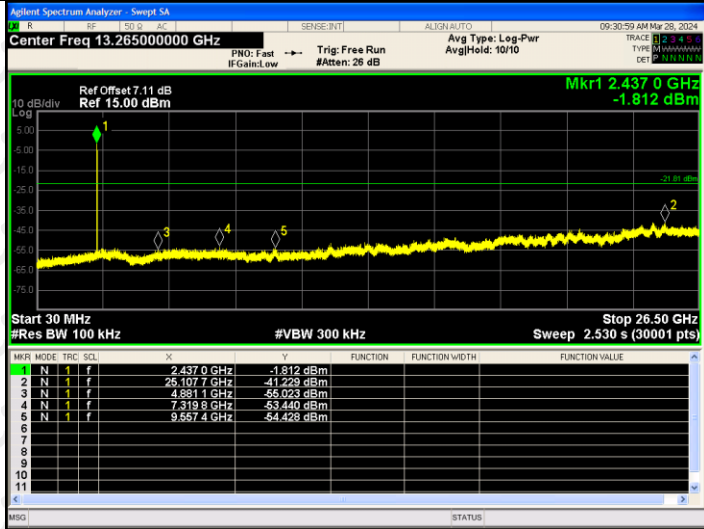

802.11b/HCH

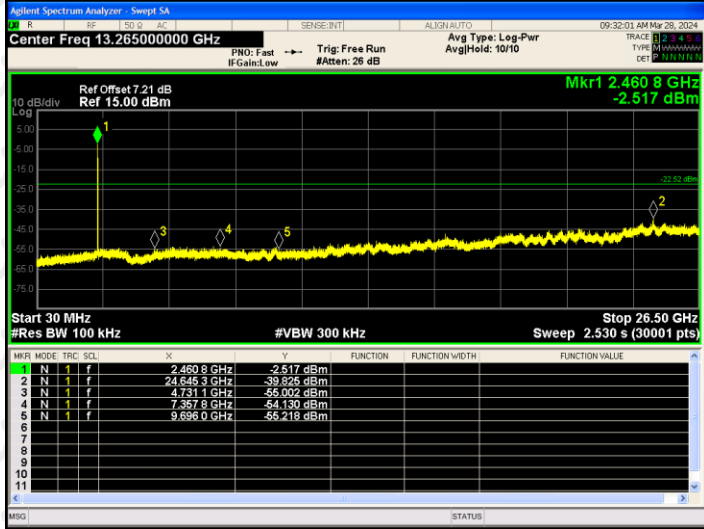


RF Conducted Spurious Emissions Graphs

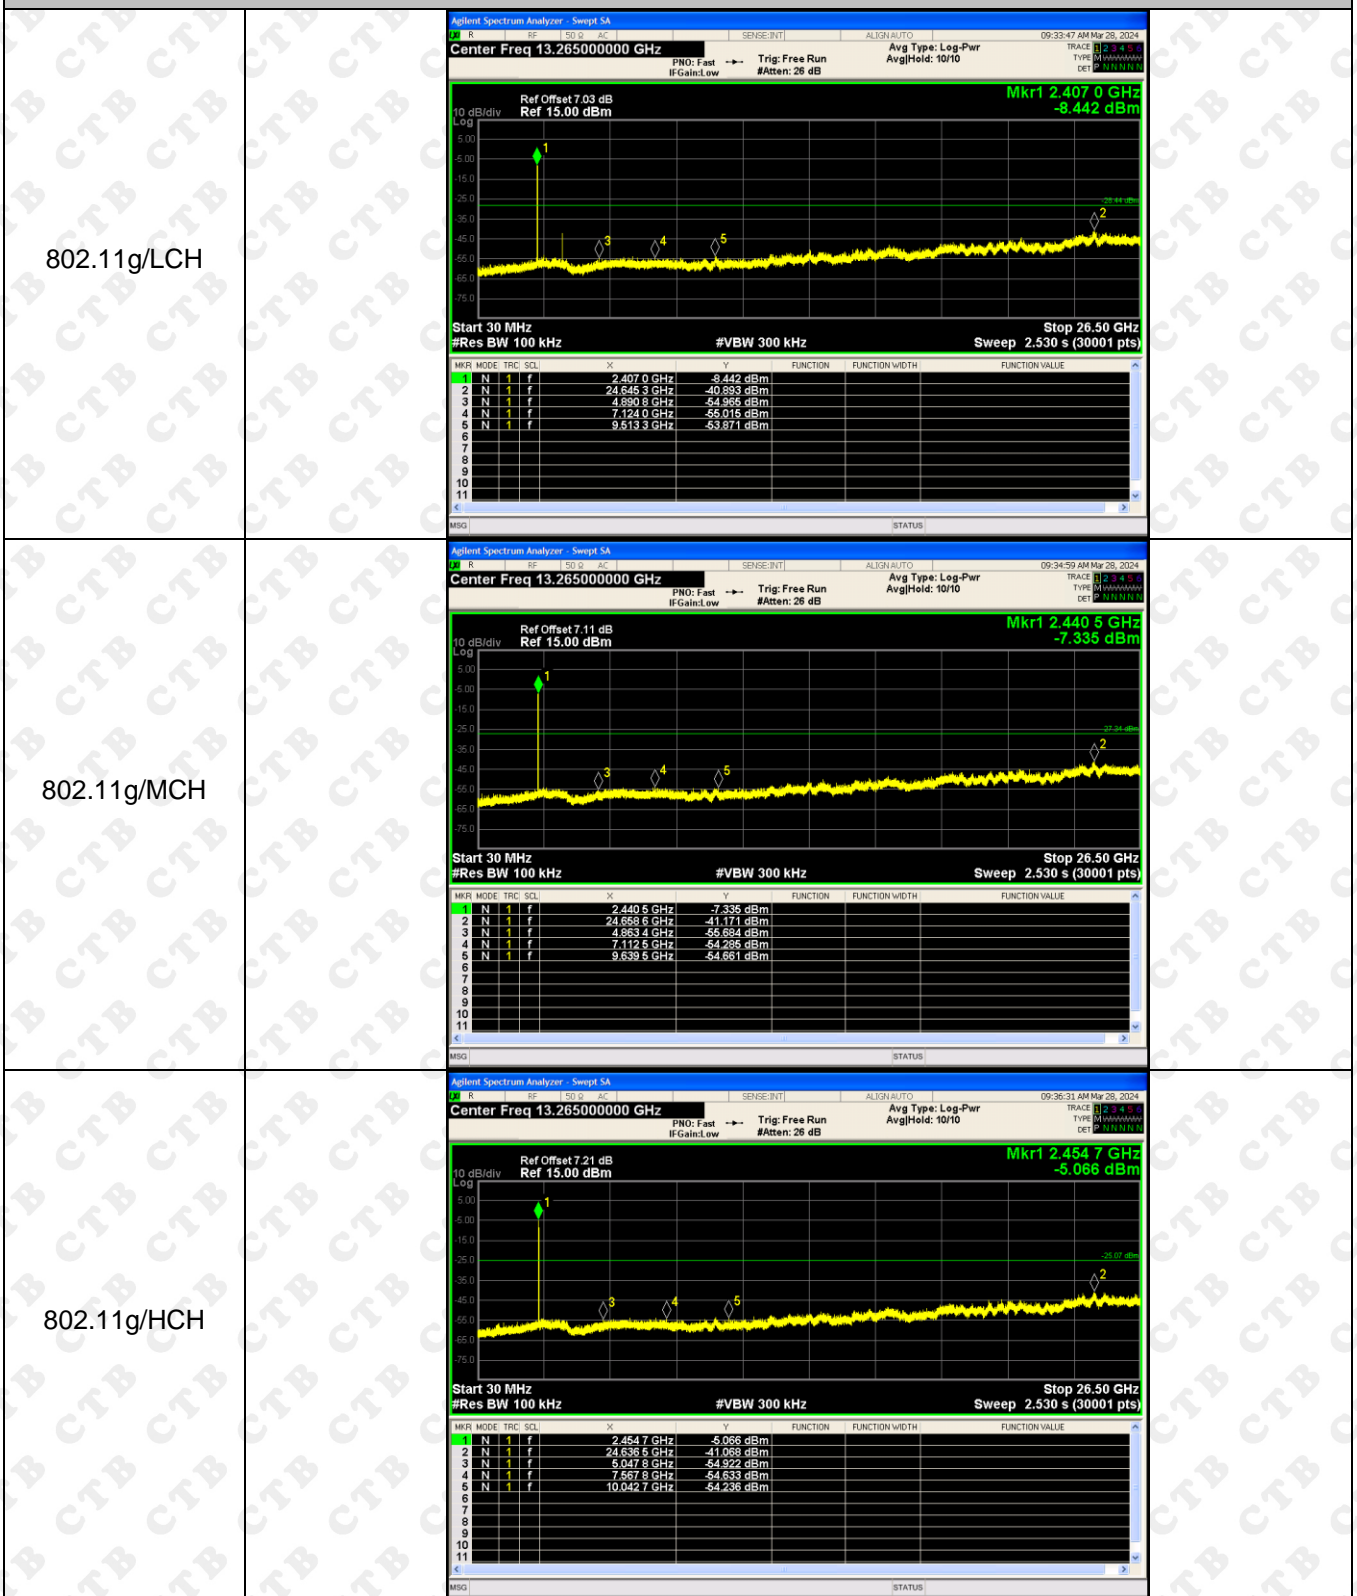


## RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

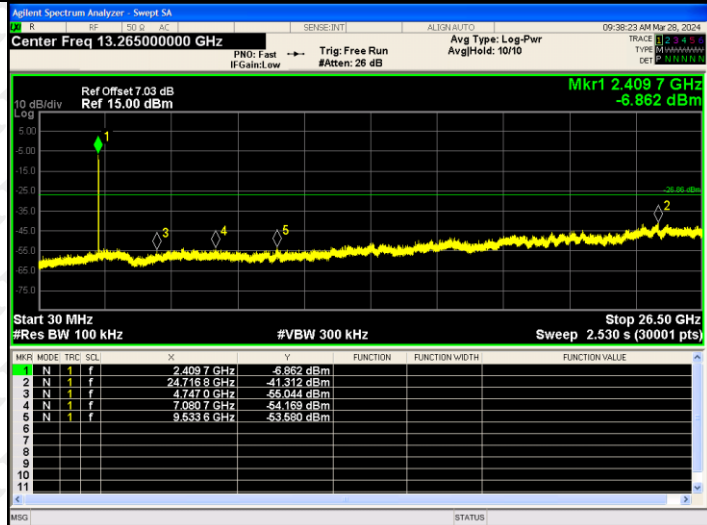

802.11 n(HT20)/MCH

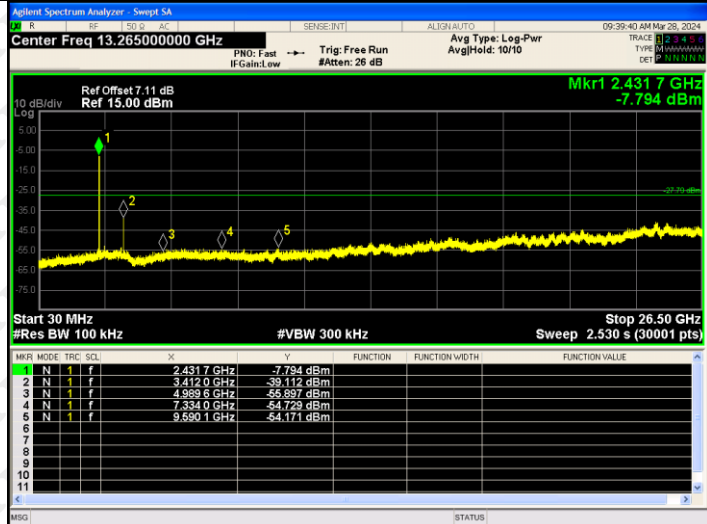


802.11 n(HT20)/HCH

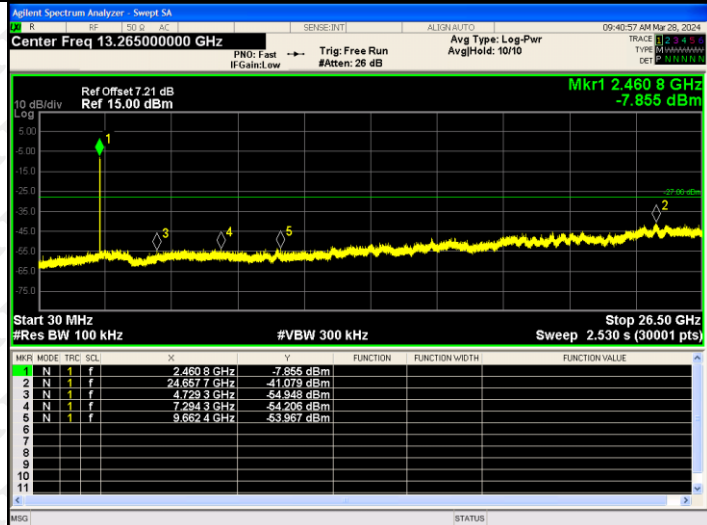





802.11n(HT40)/LCH

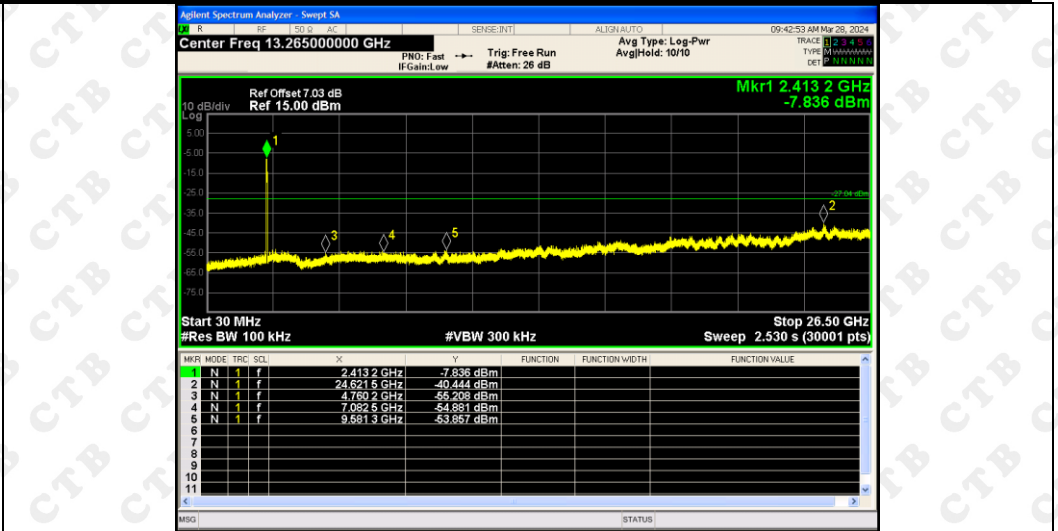

802.11 n(HT40)/MCH

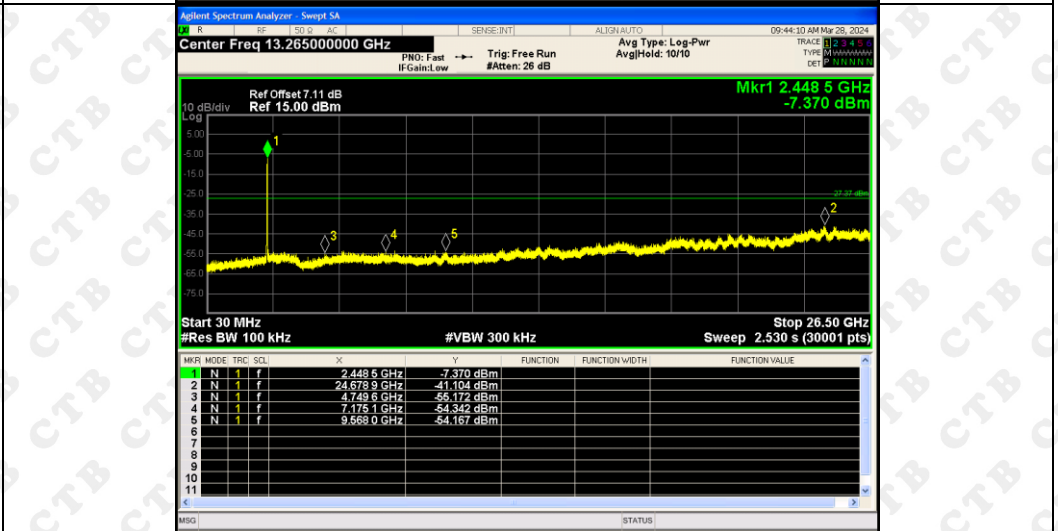

802.11 n(HT40)/HCH

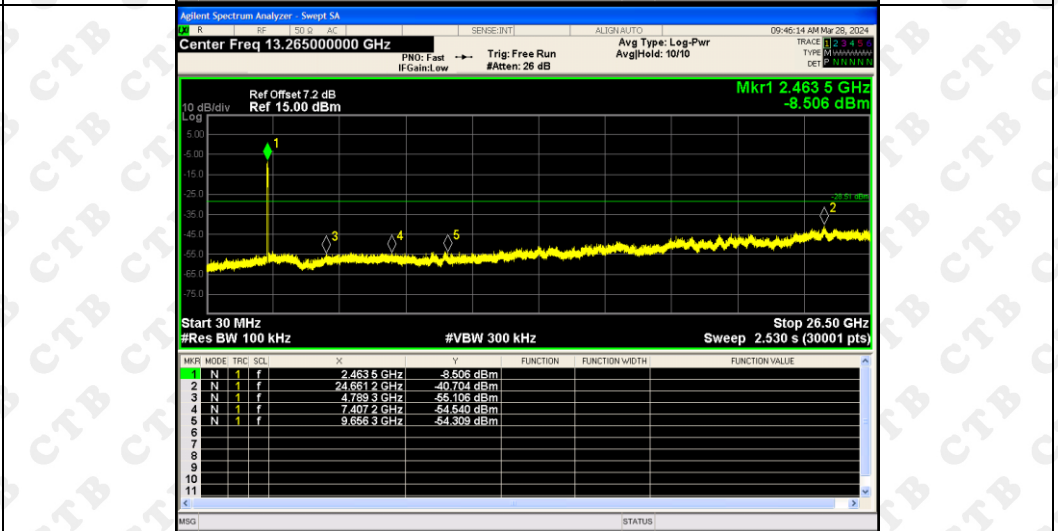

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure

1. The EUT was directly connected to the Power meter


9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	14.881	30	PASS
	MCH	14.958	30	PASS
	HCH	14.571	30	PASS
802.11g	LCH	13.328	30	PASS
	MCH	13.734	30	PASS
	HCH	13.314	30	PASS
802.11n(HT20)	LCH	13.322	30	PASS
	MCH	13.539	30	PASS
	HCH	13.160	30	PASS
802.11n(HT40)	LCH	13.511	30	PASS
	MCH	13.734	30	PASS
	HCH	14.224	30	PASS



### 10. 6DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

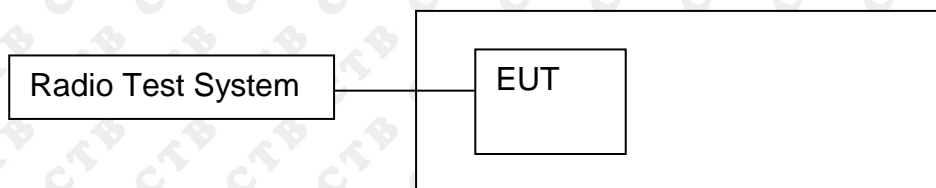

#### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.632	500	PASS
	MCH	10.258	500	PASS
	HCH	9.966	500	PASS
802.11g	LCH	16.385	500	PASS
	MCH	16.379	500	PASS
	HCH	16.066	500	PASS
802.11n(HT20)	LCH	17.550	500	PASS
	MCH	17.087	500	PASS
	HCH	17.334	500	PASS
802.11n(HT40)	LCH	35.648	500	PASS
	MCH	35.342	500	PASS
	HCH	35.559	500	PASS

Test Graph:

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3: 2.416779 GHz</p> <p>-7.5204 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.909 MHz</p> <p>Total Power: 16.3 dBm</p> <p>Transmit Freq Error: -37.132 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 9.632 MHz</p> <p>x dB: -6.00 dB</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3: 2.442119 GHz</p> <p>-5.3040 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.841 MHz</p> <p>Total Power: 16.5 dBm</p> <p>Transmit Freq Error: -10.076 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 10.26 MHz</p> <p>x dB: -6.00 dB</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3: 2.466917 GHz</p> <p>-6.2543 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz</p> <p>Sweep: 2.933 ms</p> <p>Occupied Bandwidth: 14.901 MHz</p> <p>Total Power: 16.1 dBm</p> <p>Transmit Freq Error: -66.060 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 9.966 MHz</p> <p>x dB: -6.00 dB</p>



<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref 27.03 dBm</p> <p>Mkr3 2.42019 GHz</p> <p>-11.928 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td colspan="3">16.453 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	16.453 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.3 dBm											
16.453 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref 27.11 dBm</p> <p>Mkr3 2.445187 GHz</p> <p>-11.519 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">16.433 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	16.433 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
16.433 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref 27.21 dBm</p> <p>Mkr3 2.470006 GHz</p> <p>-11.112 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td colspan="3">16.450 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	16.450 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.4 dBm											
16.450 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											


<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420765 GHz</p> <p>-10.899 dBm</p> <p>Center: 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.580 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -10.024 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.55 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.445538 GHz</p> <p>-11.432 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.596 MHz</p> <p>Total Power 12.5 dBm</p> <p>Transmit Freq Error -5.847 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.09 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470649 GHz</p> <p>-13.180 dBm</p> <p>Center: 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 17.594 MHz</p> <p>Total Power 12.4 dBm</p> <p>Transmit Freq Error -17.604 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 17.33 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.422000000 GHz</p> <p>Center Freq: 2.422000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.439848 GHz</p> <p>-13.779 dBm</p> <p>Center: 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.010 MHz</p> <p>Total Power 13.0 dBm</p> <p>Transmit Freq Error 23.489 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.65 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.45469 GHz</p> <p>-12.818 dBm</p> <p>Center: 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.024 MHz</p> <p>Total Power 13.2 dBm</p> <p>Transmit Freq Error 18.605 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.34 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Center Freq: 2.452000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.2 dB</p> <p>Ref: 27.20 dBm</p> <p>Mkr3 2.469769 GHz</p> <p>-12.559 dBm</p> <p>Center: 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.029 MHz</p> <p>Total Power 13.8 dBm</p> <p>Transmit Freq Error -10.853 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.56 MHz</p> <p>x dB -6.00 dB</p>



## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

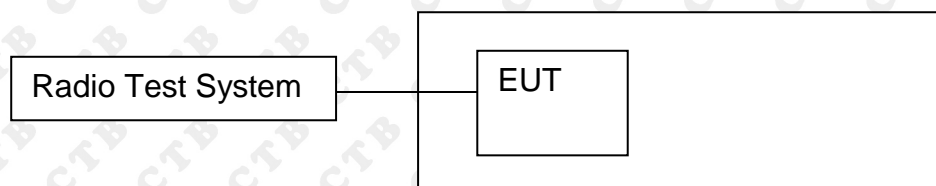

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-14.891	8	PASS
	MCH	-16.316	8	PASS
	HCH	-16.088	8	PASS
802.11g	LCH	-18.684	8	PASS
	MCH	-20.018	8	PASS
	HCH	-20.366	8	PASS
802.11n(H T20)	LCH	-20.306	8	PASS
	MCH	-18.524	8	PASS
	HCH	-19.647	8	PASS
802.11n(H T40)	LCH	-22.400	8	PASS
	MCH	-22.581	8	PASS
	HCH	-20.532	8	PASS

Test Graph

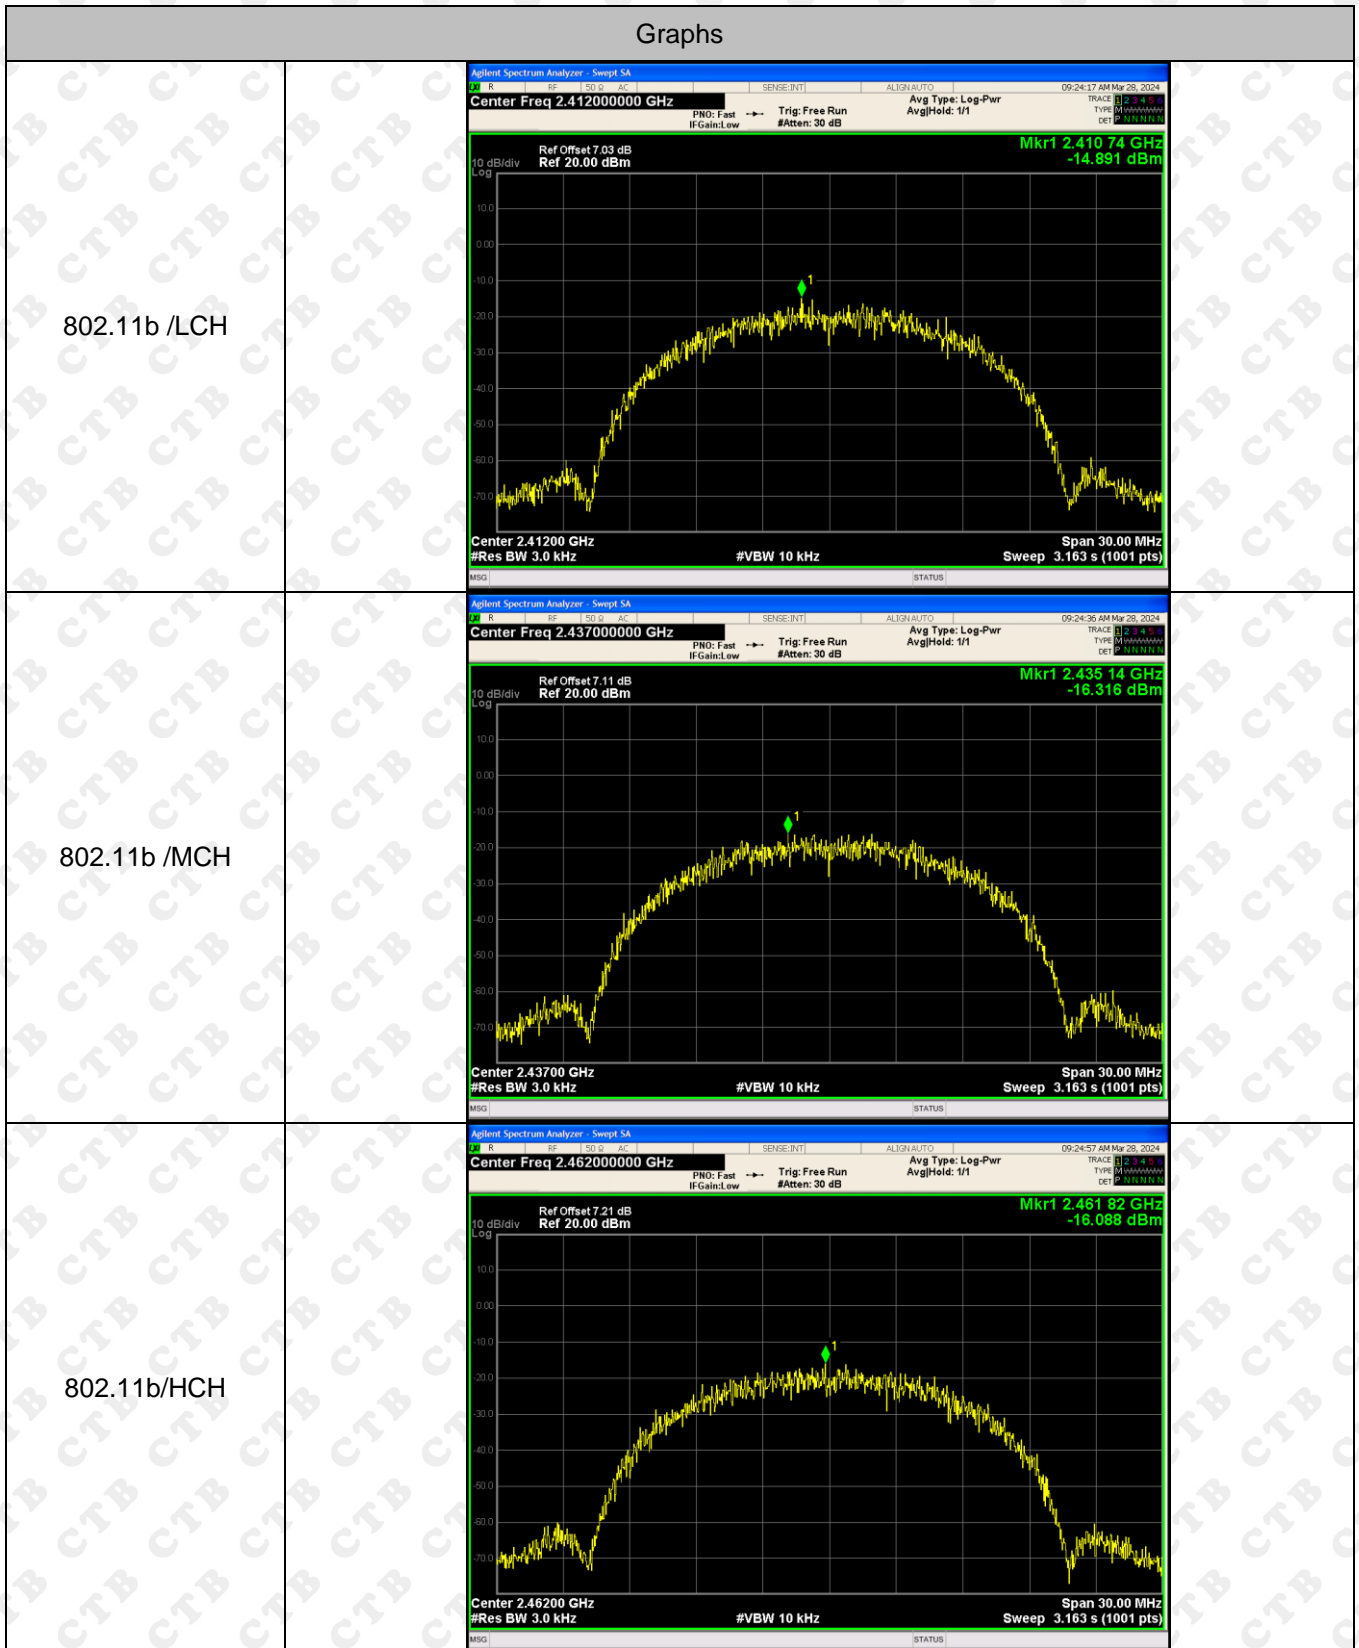

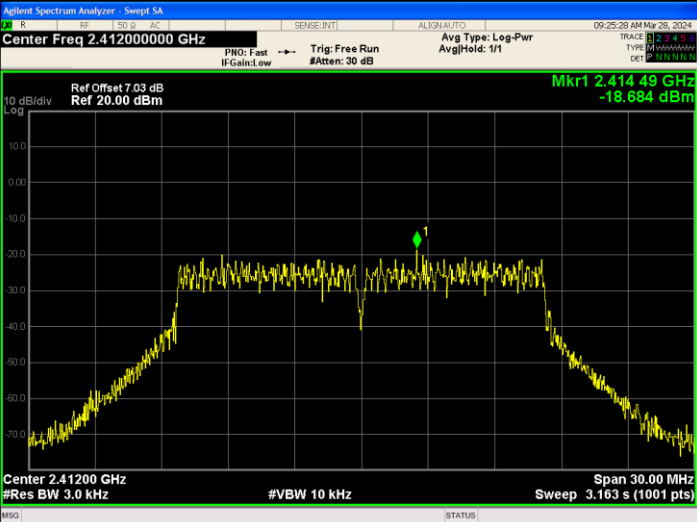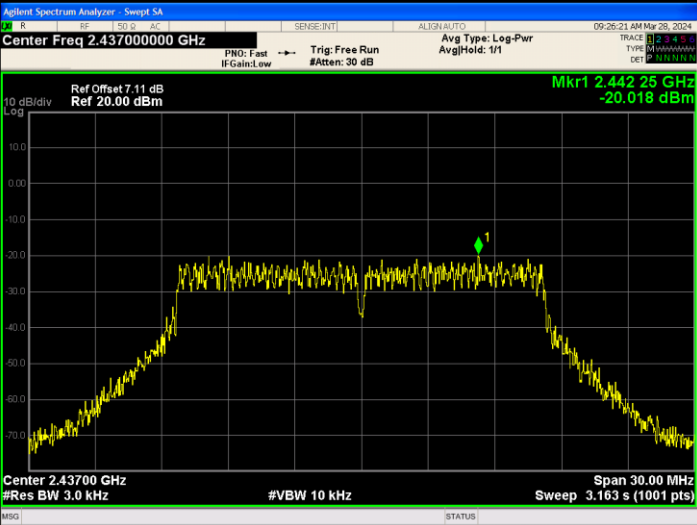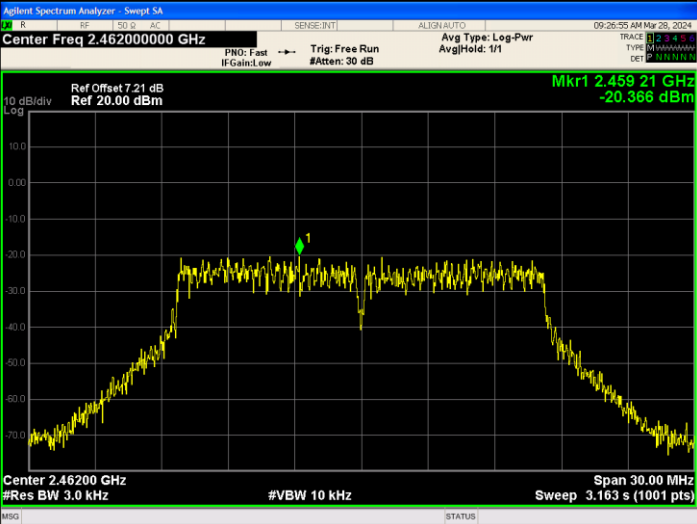

<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.41200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.414 49 GHz          -18.684 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.442 25 GHz          -20.018 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA          Center Freq 2.46200000 GHz          Ref Offset: 7.21 dB          Ref 20.00 dBm          Mkr1 2.459 21 GHz          -20.366 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
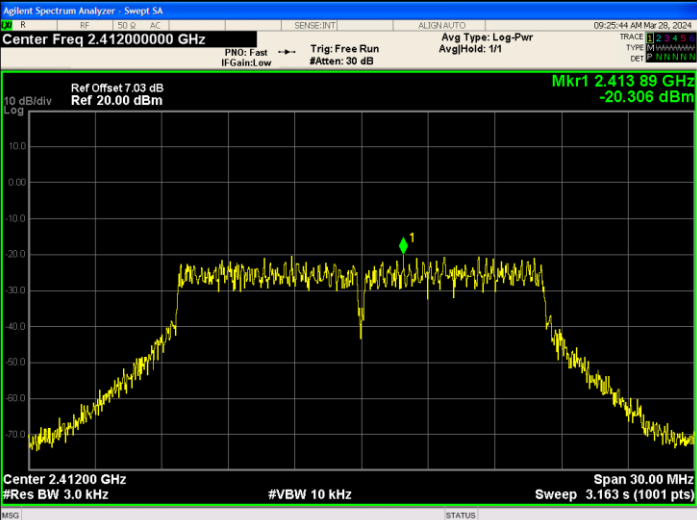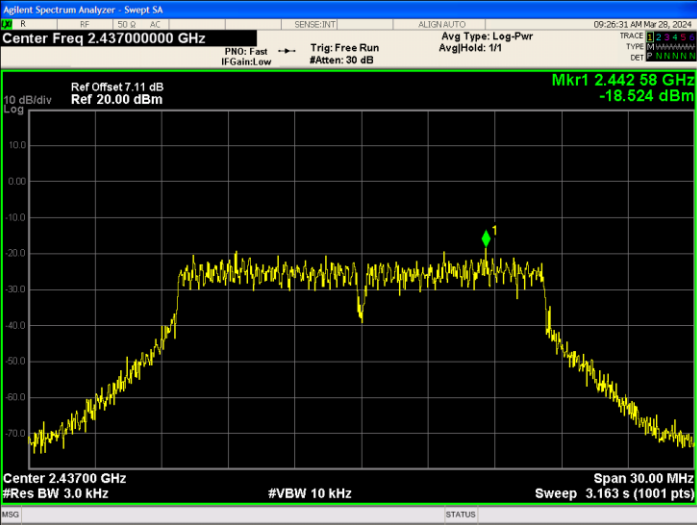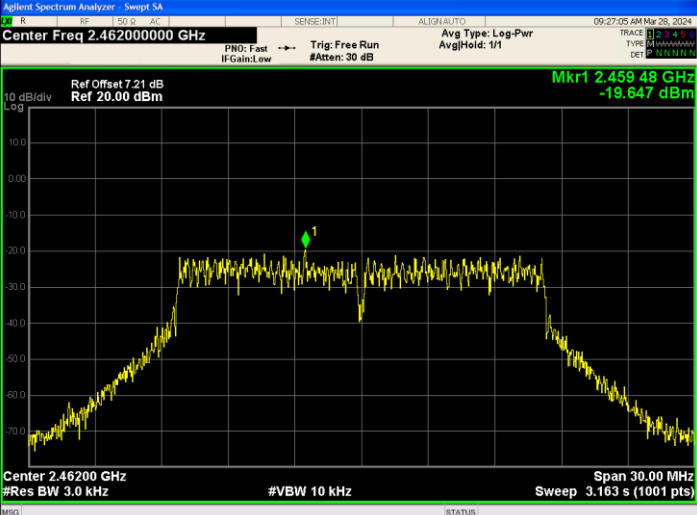
<p>802.11n(HT20)/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.41200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.41389 GHz          -20.306 dBm          Center 2.41200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.44258 GHz          -18.524 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.46200000 GHz          Ref Offset: 7.21 dB          Ref 20.00 dBm          Mkr1 2.45948 GHz          -19.647 dBm          Center 2.46200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 30.00 MHz          Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.42200000 GHz          Ref Offset: 7.03 dB          Ref 20.00 dBm          Mkr1 2.426 68 GHz          -22.400 dBm          Center 2.42200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.43700000 GHz          Ref Offset: 7.11 dB          Ref 20.00 dBm          Mkr1 2.447 62 GHz          -22.581 dBm          Center 2.43700 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.45200000 GHz          Ref Offset: 7.2 dB          Ref 20.00 dBm          Mkr1 2.453 86 GHz          -20.532 dBm          Center 2.45200 GHz          #Res BW 3.0 kHz          #VBW 10 kHz          Span 60.00 MHz          Sweep 6.326 s (1001 pts)</p>



## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### EUT Antenna:

The antenna is glue stick antenna and no consideration of replacement. The best case gain of the antenna is 2.49dBi.


**13. EUT TEST SETUP PHOTOGRAPHS**

Radiated Emission

Below 1G

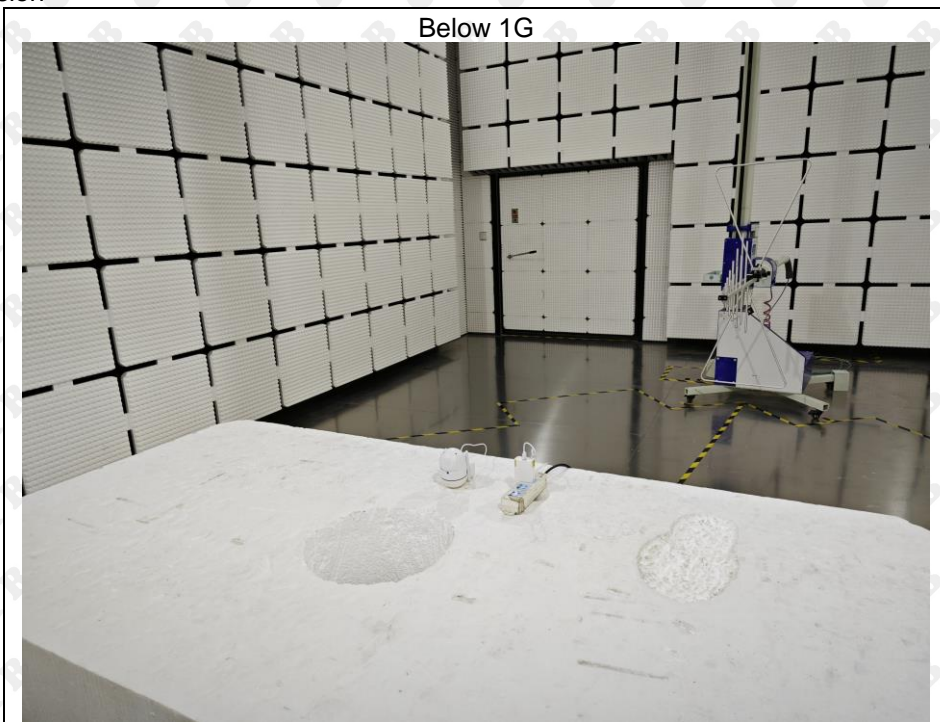

Above 1G

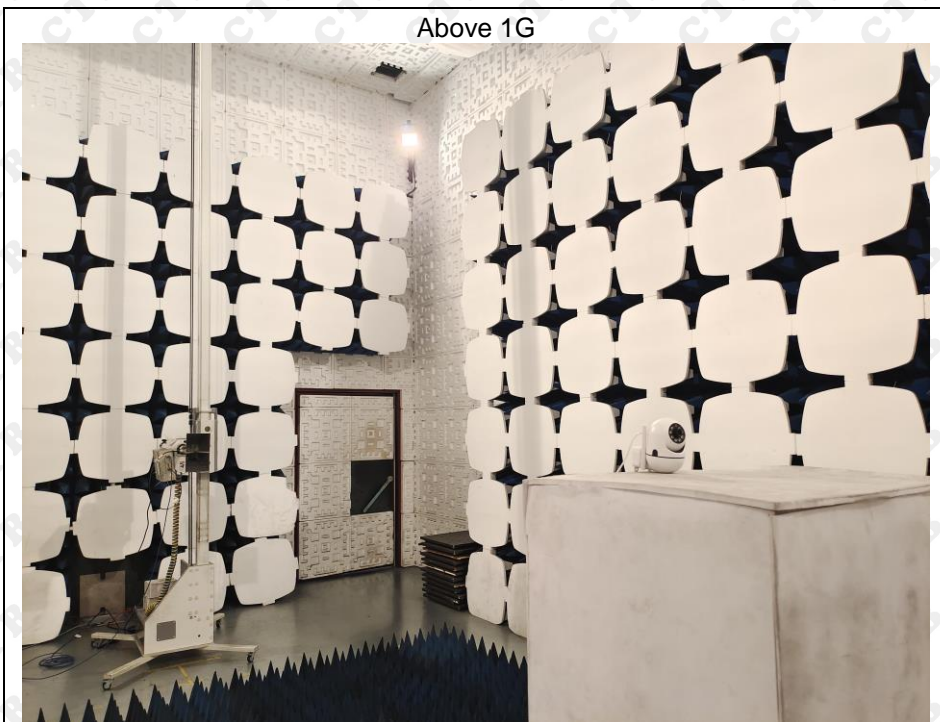



Conducted Emission



※※※※ END OF REPORT ※※※※