

Appendix A. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Average Output power (dBm)	Limit (dBm)	Result
802.11b	2412	16.66	30.00	Pass
	2437	16.82	30.00	Pass
	2462	16.63	30.00	Pass
802.11g	2412	14.10	30.00	Pass
	2437	16.74	30.00	Pass
	2462	12.21	30.00	Pass
802.11n (20 MHz)	2412	14.23	30.00	Pass
	2437	16.69	30.00	Pass
	2462	12.94	30.00	Pass
802.11n (40 MHz)	2422	13.28	30.00	Pass
	2437	13.84	30.00	Pass
	2452	12.89	30.00	Pass
802.11ax (20 MHz)	2412	13.52	30.00	Pass
	2437	16.77	30.00	Pass
	2462	11.50	30.00	Pass
802.11ax (40 MHz)	2422	13.63	30.00	Pass
	2437	13.99	30.00	Pass
	2452	13.58	30.00	Pass

Modulation	Frequency (MHz)	Peak Output power (dBm)	Limit (dBm)	Result
802.11b	2412	19.81	30.00	Pass
	2437	19.69	30.00	Pass
	2462	19.23	30.00	Pass
802.11g	2412	21.99	30.00	Pass
	2437	23.41	30.00	Pass
	2462	20.86	30.00	Pass
802.11n (20 MHz)	2412	23.11	30.00	Pass
	2437	23.31	30.00	Pass
	2462	22.54	30.00	Pass
802.11n (40 MHz)	2422	22.63	30.00	Pass
	2437	22.65	30.00	Pass
	2452	22.45	30.00	Pass
802.11ax (20 MHz)	2412	21.52	30.00	Pass
	2437	23.46	30.00	Pass
	2462	21.35	30.00	Pass
802.11ax (40 MHz)	2422	21.78	30.00	Pass
	2437	22.21	30.00	Pass
	2452	22.65	30.00	Pass


Modulation	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
802.11b	2412	19.81	-3.41	16.40	36.00	Pass
	2437	19.69	-3.41	16.28	36.00	Pass
	2462	19.23	-3.41	15.82	36.00	Pass
802.11g	2412	21.99	-3.41	18.58	36.00	Pass
	2437	23.41	-3.41	20.00	36.00	Pass
	2462	20.86	-3.41	17.45	36.00	Pass
802.11n (20 MHz)	2412	23.11	-3.41	19.70	36.00	Pass
	2437	23.31	-3.41	19.90	36.00	Pass
	2462	22.54	-3.41	19.13	36.00	Pass
802.11n (40 MHz)	2422	22.63	-3.41	19.22	36.00	Pass
	2437	22.65	-3.41	19.24	36.00	Pass
	2452	22.45	-3.41	19.04	36.00	Pass
802.11ax (20 MHz)	2412	21.52	-3.41	18.11	36.00	Pass
	2437	23.46	-3.41	20.05	36.00	Pass
	2462	21.35	-3.41	17.94	36.00	Pass
802.11ax (40 MHz)	2422	21.78	-3.41	18.37	36.00	Pass
	2437	22.21	-3.41	18.80	36.00	Pass
	2452	22.65	-3.41	19.24	36.00	Pass

5 GHz FCC


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11a	5180	--	11.65	--	11.65	24	--	Pass
	5220	--	11.67	--	11.67	24	--	Pass
	5240	--	11.69	--	11.69	24	--	Pass
	5260	19.38	11.61	--	11.61	24	23.87	Pass
	5300	19.38	11.59	--	11.59	24	23.87	Pass
	5320	19.54	11.78	--	11.78	24	23.91	Pass
	5500	19.26	11.74	--	11.74	24	23.85	Pass
	5580	19.26	11.75	--	11.75	24	23.85	Pass
	5700	19.42	11.84	--	11.84	24	23.88	Pass
	5720 (U-NII-2C)	14.84	10.98	0.00	10.98	24	22.71	Pass
	5720 (U-NII-3)	--	4.52	0.00	4.52	30	--	Pass
	5745	--	11.82	--	11.82	30	--	Pass
	5785	--	11.88	--	11.88	30	--	Pass
	5825	--	11.67	--	11.67	30	--	Pass

Note:


1. Output Power (dBm) = Power (dBm) + Duty factor.

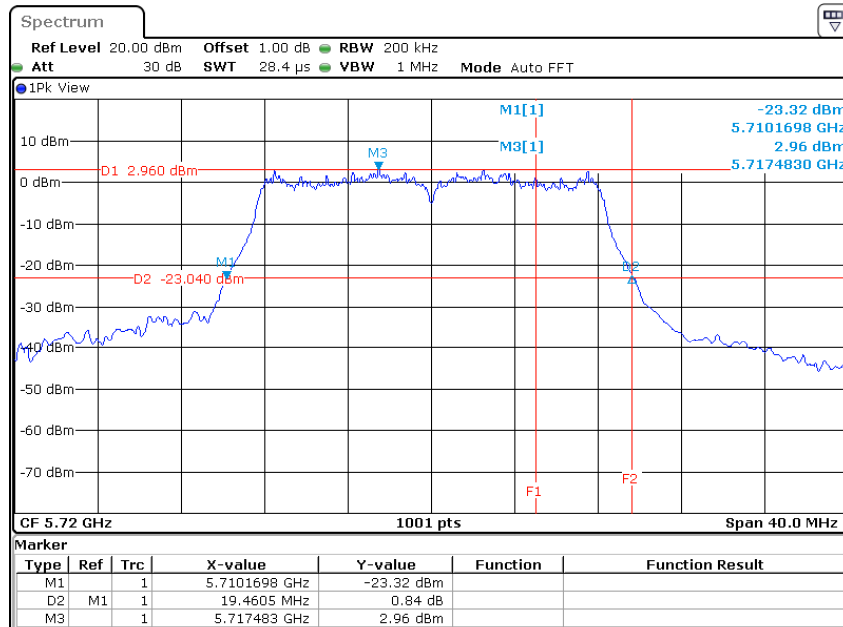26 dB Occupied Bandwidth**802.11a / 5720 MHz**

Date: 9.APR.2024 10:14:20

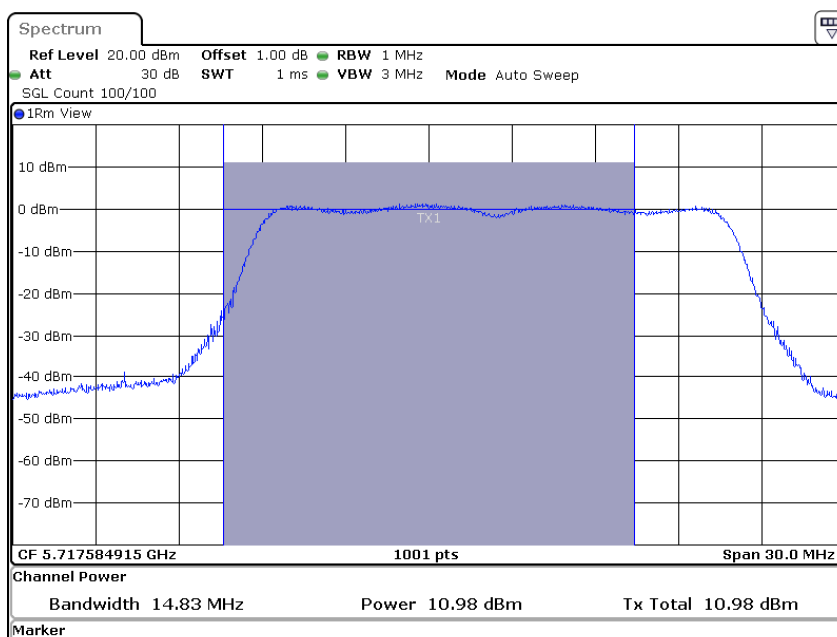Maximum conducted output power**802.11a / 5720 (U-NII-2C) MHz**

Date: 9.APR.2024 10:16:42

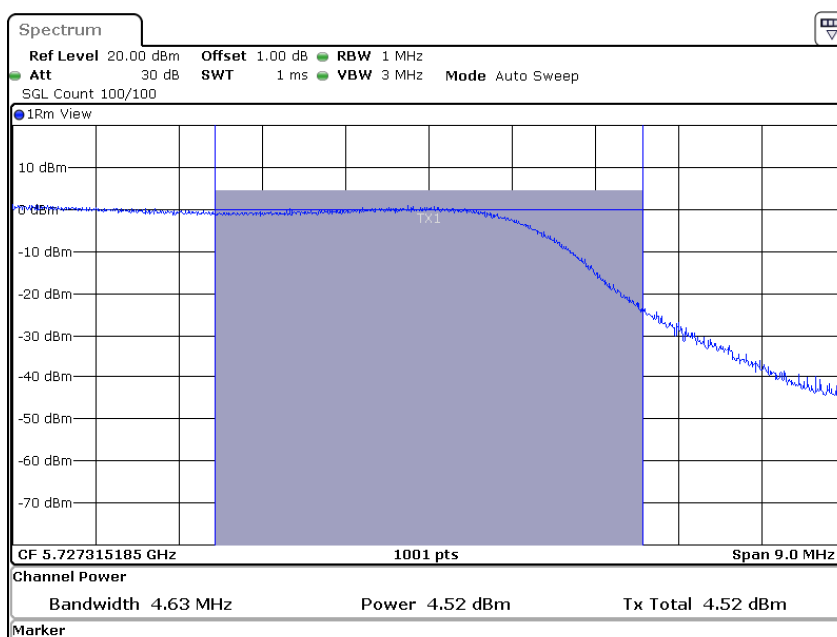
Maximum conducted output power**802.11a / 5720 (U-NII-3) MHz**

Date: 9.APR.2024 10:16:45


Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (20 MHz)	5180	--	11.77	11.32	--	14.56	24	--	Pass
	5220	--	11.74	11.52	--	14.64	24	--	Pass
	5240	--	11.82	11.44	--	14.64	24	--	Pass
	5260	19.50	11.83	11.33	--	14.60	24	23.90	Pass
	5300	19.74	11.69	11.41	--	14.56	24	23.95	Pass
	5320	19.78	11.62	11.49	--	14.57	24	23.96	Pass
	5500	19.58	11.75	11.37	--	14.57	24	23.92	Pass
	5580	19.70	11.38	11.71	--	14.56	24	23.94	Pass
	5700	19.70	11.64	11.66	--	14.66	24	23.94	Pass
	5720 (U-NII-2C)	14.91	10.62	10.62	0.00	13.63	24	22.73	Pass
	5720 (U-NII-3)	--	4.74	4.72	0.00	7.74	30	--	Pass
	5745	--	11.53	11.47	--	14.51	30	--	Pass
	5785	--	11.45	11.56	--	14.52	30	--	Pass
	5825	--	11.13	11.86	--	14.52	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

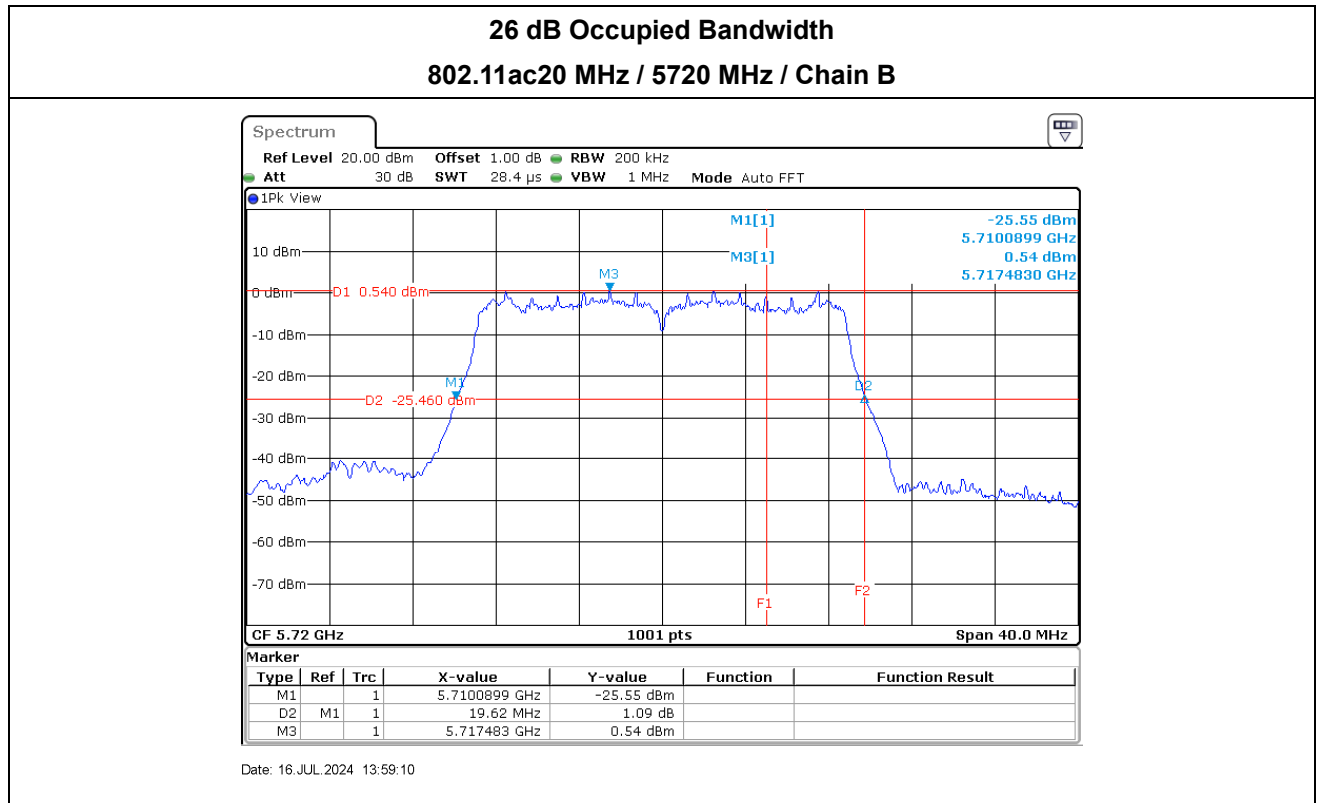


Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-2C) MHz / ChainA

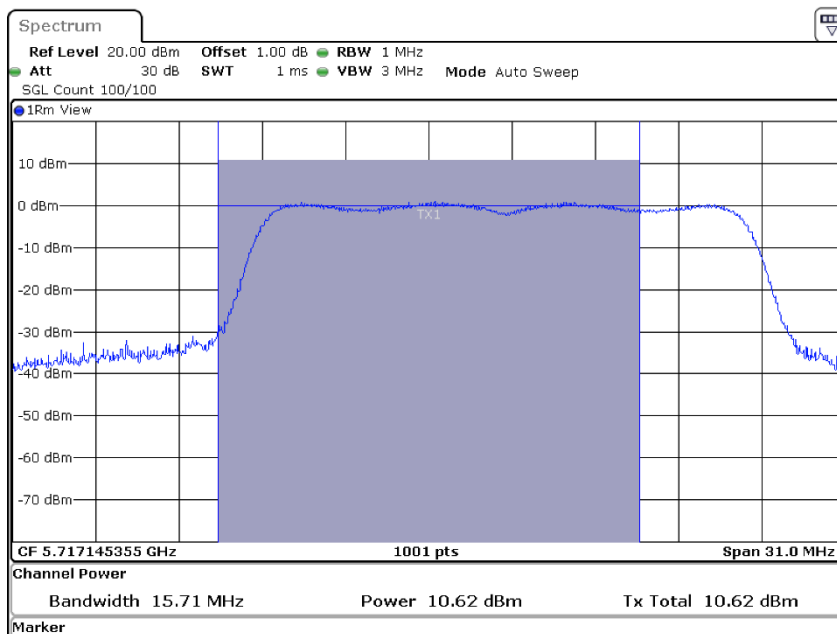


Date: 16.JUL.2024 13:58:15

Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-3) MHz / ChainA

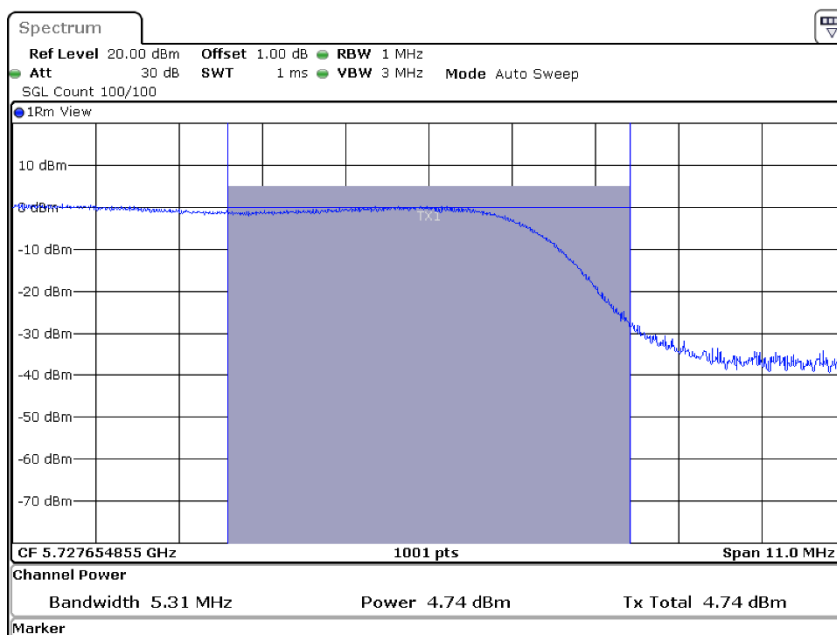


Date: 16.JUL.2024 13:58:17

Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-2C) MHz / ChainB

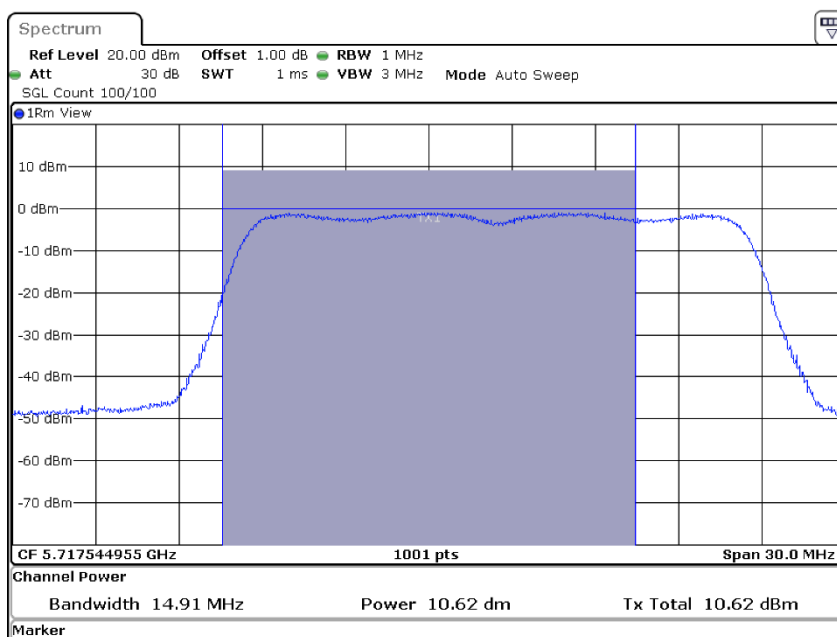

Date: 16.JUL.2024 13:59:33

Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-3) MHz / ChainB

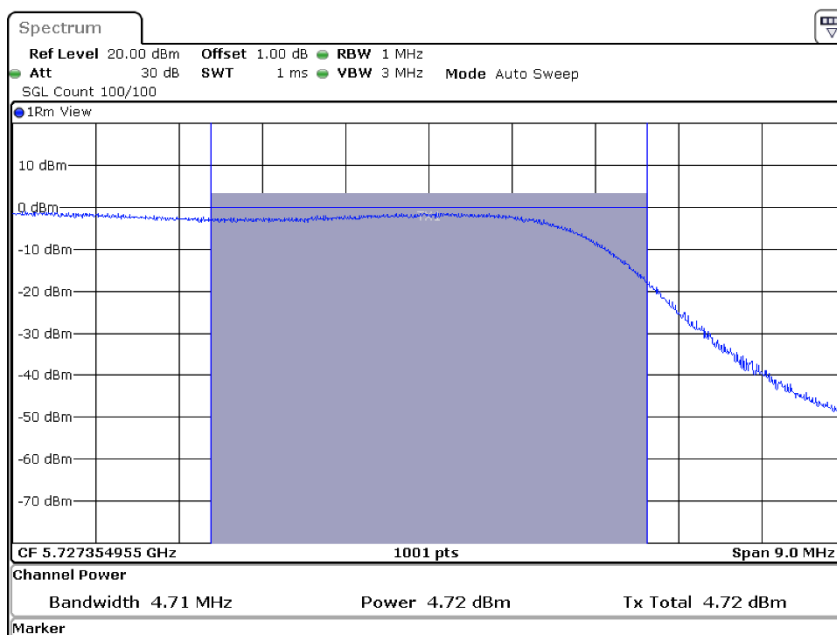


Date: 16.JUL.2024 13:59:36

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (40 MHz)	5190	--	11.91	11.08	--	14.53	24	--	Pass
	5230	--	11.86	11.19	--	14.55	24	--	Pass
	5270	40.04	11.65	11.39	--	14.53	24	27.02	Pass
	5310	40.04	11.55	11.46	--	14.52	24	27.02	Pass
	5510	40.20	11.25	10.77	--	14.03	24	27.04	Pass
	5550	40.12	11.68	11.24	--	14.48	24	27.03	Pass
	5670	39.80	11.58	11.43	--	14.52	24	27.00	Pass
	5710 (U-NII-2C)	35.46	11.34	11.33	0.11	14.46	24	26.50	Pass
	5710 (U-NII-3)	--	1.08	1.03	0.11	4.18	30	--	Pass
	5755	--	11.56	11.41	--	14.50	30	--	Pass
	5795	--	11.31	11.69	--	14.51	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

26 dB Occupied Bandwidth 802.11ac40 MHz / 5710 MHz / Chain A

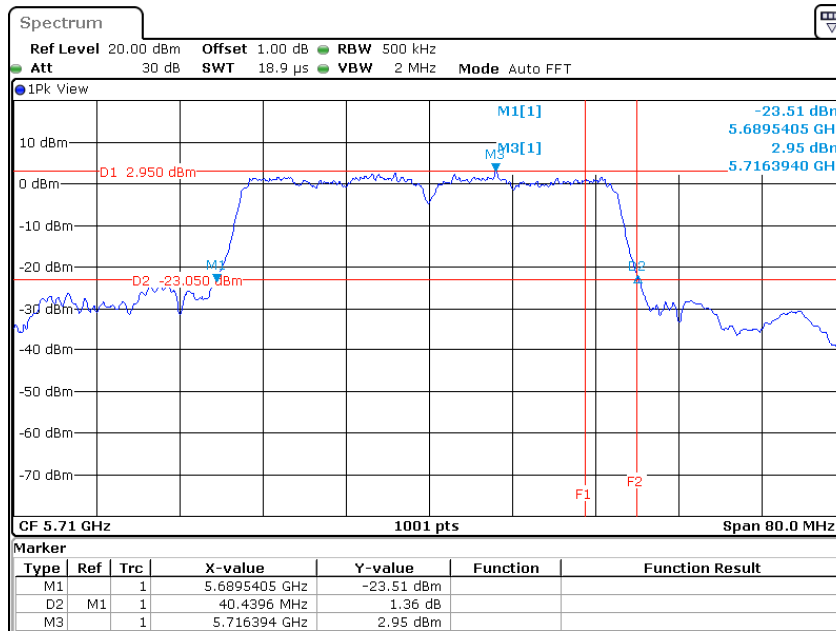


Date: 9 JUL 2024 09:26:10

Maximum conducted output power
802.11ac40 MHz / 5710 (U-NII-2C) MHz / ChainA

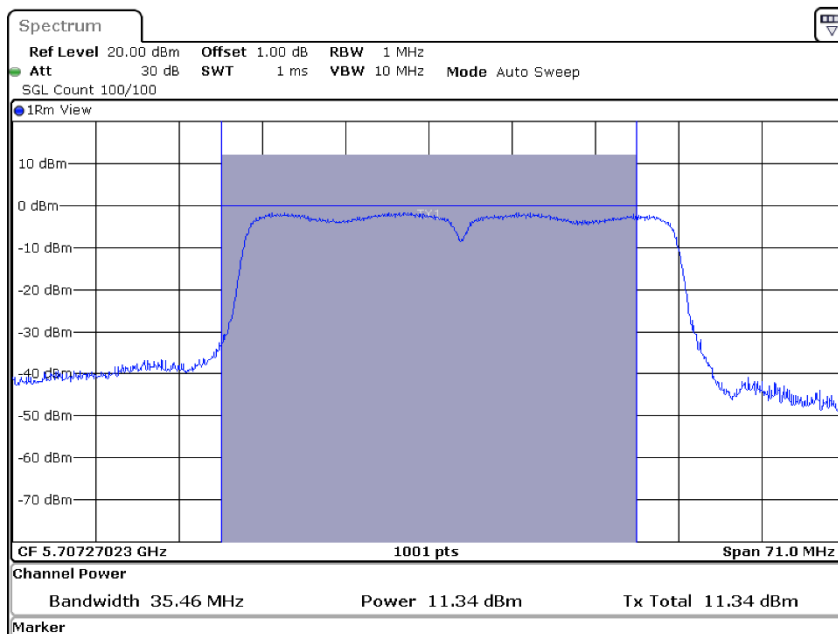


Date: 9 JUL 2024 09:26:13

Maximum conducted output power
802.11ac40 MHz / 5710 (U-NII-3) MHz / ChainA

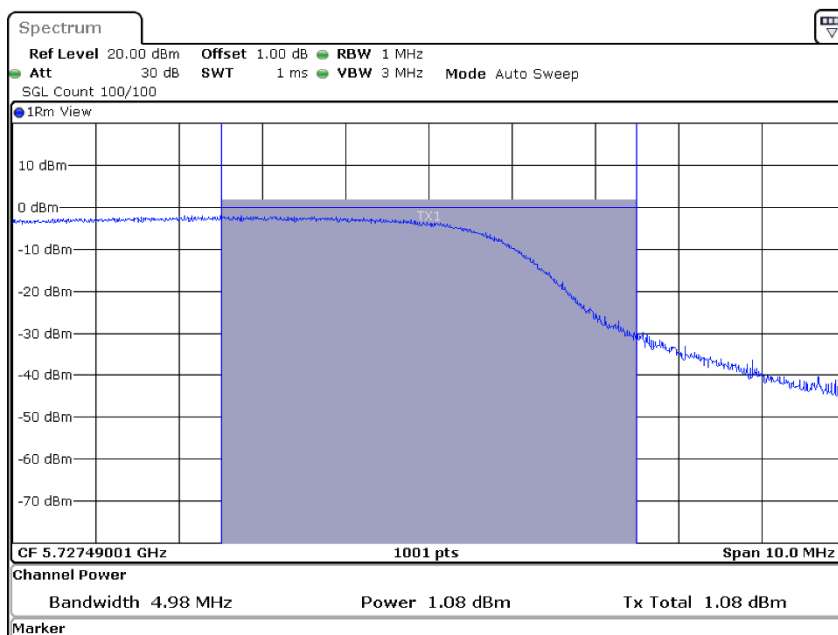


Date: 9 JUL 2024 09:26:16

Maximum conducted output power
802.11ac40 MHz / 5710 (U-NII-2C) MHz / ChainB

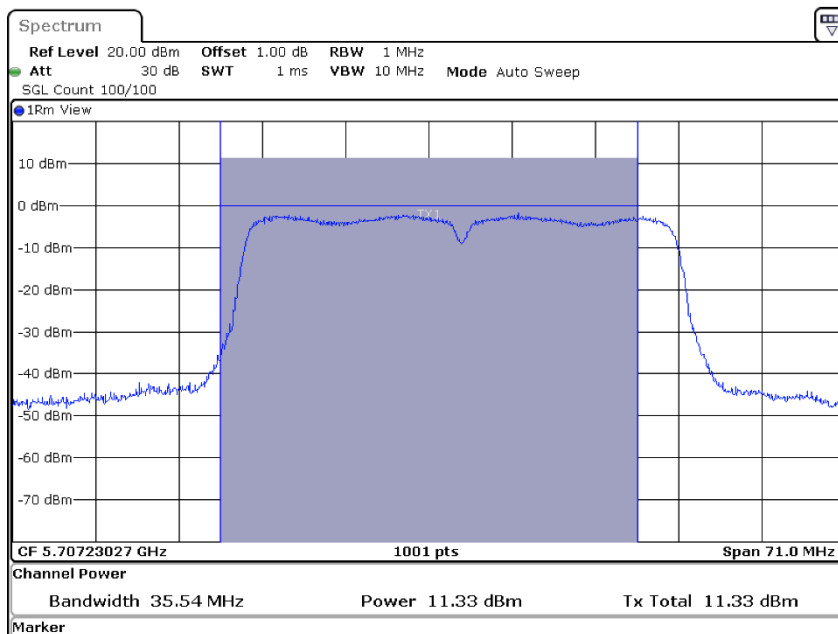

Date: 9 JUL 2024 09:25:26

Maximum conducted output power
802.11ac40 MHz / 5710 (U-NII-3) MHz / ChainB

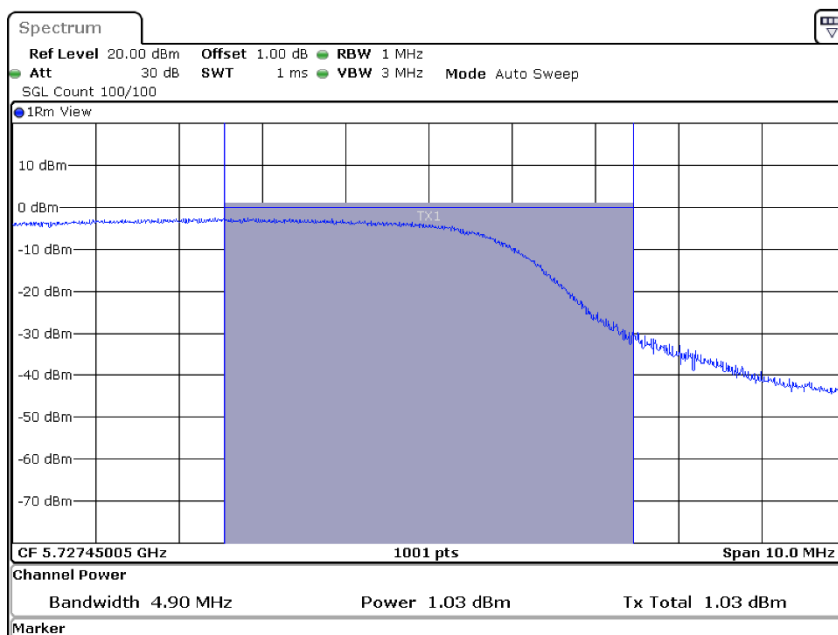


Date: 9 JUL 2024 09:25:29

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (80 MHz)	5210	--	11.81	11.35	--	14.60	24	--	Pass
	5290	81.52	11.74	11.40	--	14.58	24	30.11	Pass
	5530	81.04	11.50	11.35	--	14.44	24	30.09	Pass
	5610	81.36	11.51	11.49	--	14.51	24	30.10	Pass
	5690 (U-NII-2C)	76.08	11.41	11.49	0.23	14.69	24	29.81	Pass
	5690 (U-NII-3)	--	-2.26	-1.82	0.23	1.21	30	--	Pass
	5775	--	11.60	11.70	--	14.66	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

26 dB Occupied Bandwidth
802.11ac80 MHz / 5690 MHz / Chain A

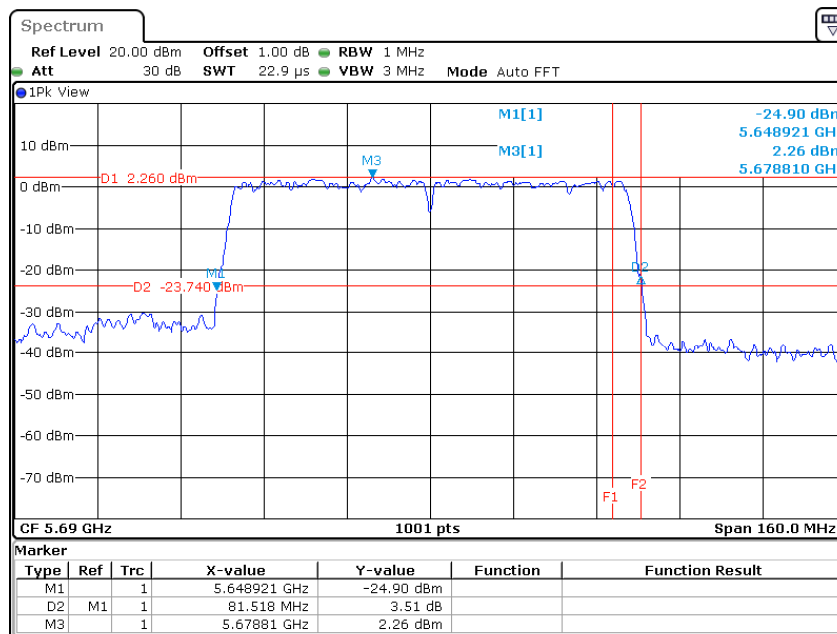


Date: 9 JUL 2024 09:28:15

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-2C) MHz / ChainA

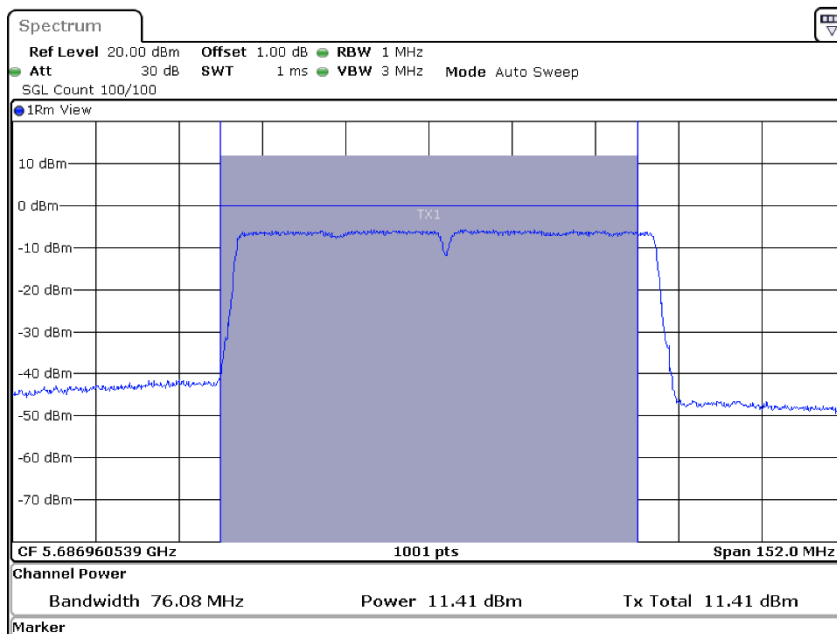


Date: 9 JUL 2024 09:28:18

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-3) MHz / ChainA

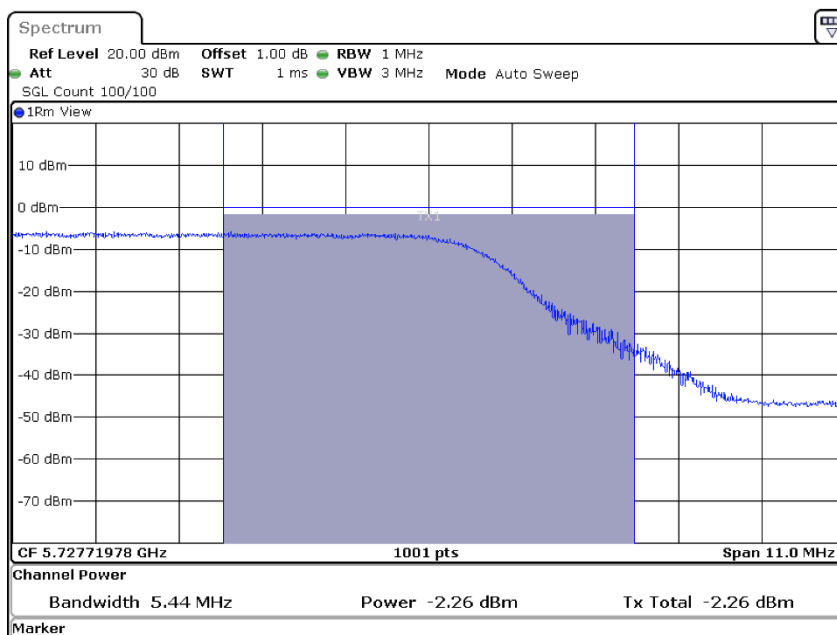


Date: 9 JUL 2024 09:28:21

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-2C) MHz / ChainB

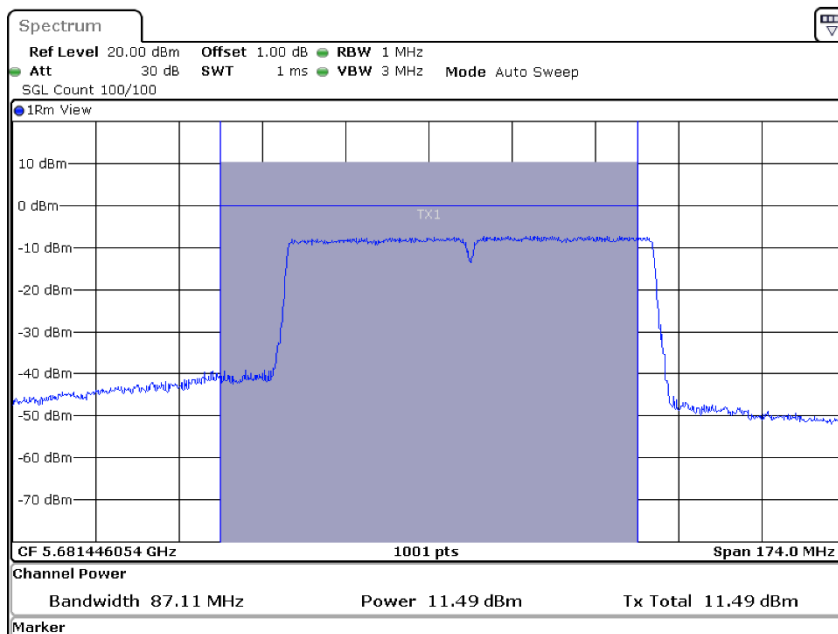

Date: 9 JUL 2024 09:29:25

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-3) MHz / ChainB

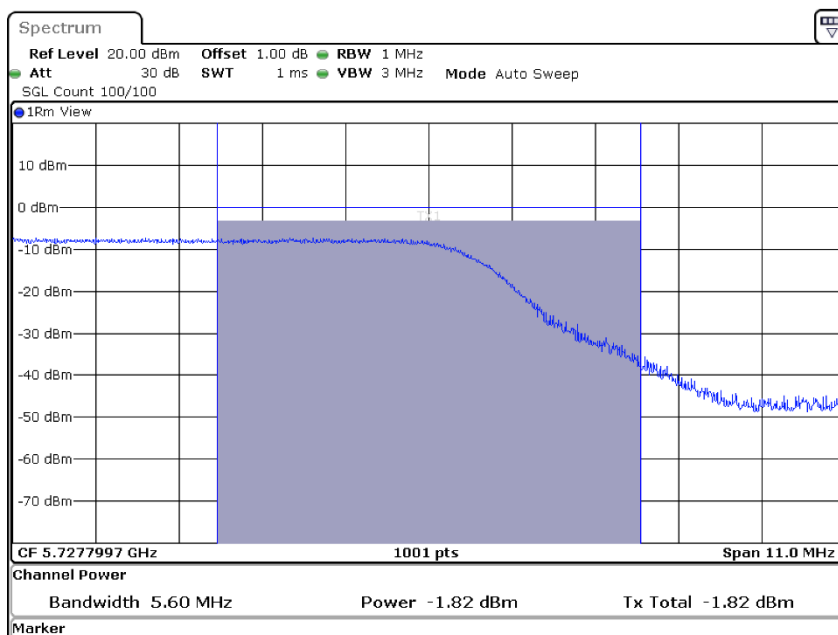


Date: 9 JUL 2024 09:29:28

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	11.87	11.45	--	14.68	24	--	Pass
	5220	--	11.89	11.61	--	14.76	24	--	Pass
	5240	--	11.96	11.52	--	14.76	24	--	Pass
	5260	20.29	11.92	11.40	--	14.68	24	24.07	Pass
	5300	20.33	11.81	11.55	--	14.69	24	24.08	Pass
	5320	20.17	11.77	11.68	--	14.74	24	24.05	Pass
	5500	20.29	11.87	11.44	--	14.67	24	24.07	Pass
	5580	20.17	11.46	11.78	--	14.63	24	24.05	Pass
	5700	20.33	11.78	11.76	--	14.78	24	24.08	Pass
	5720 (U-NII-2C)	15.15	10.69	10.48	0.00	13.60	24	22.80	Pass
	5720 (U-NII-3)	--	5.15	5.48	0.00	8.33	30	--	Pass
	5745	--	11.65	11.54	--	14.61	30	--	Pass
	5785	--	11.52	11.74	--	14.64	30	--	Pass
	5825	--	11.21	11.95	--	14.61	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

26 dB Occupied Bandwidth 802.11ax20 MHz / 5720 MHz / Chain A

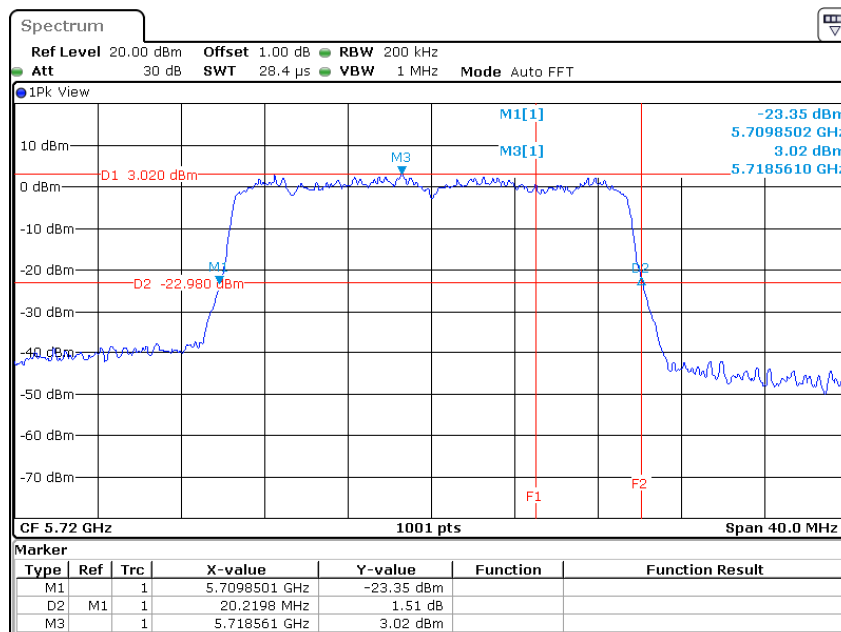


Date: 9.APR.2024 10:26:55

Maximum conducted output power
802.11ax20 MHz / 5720 (U-NII-2C) MHz / ChainA

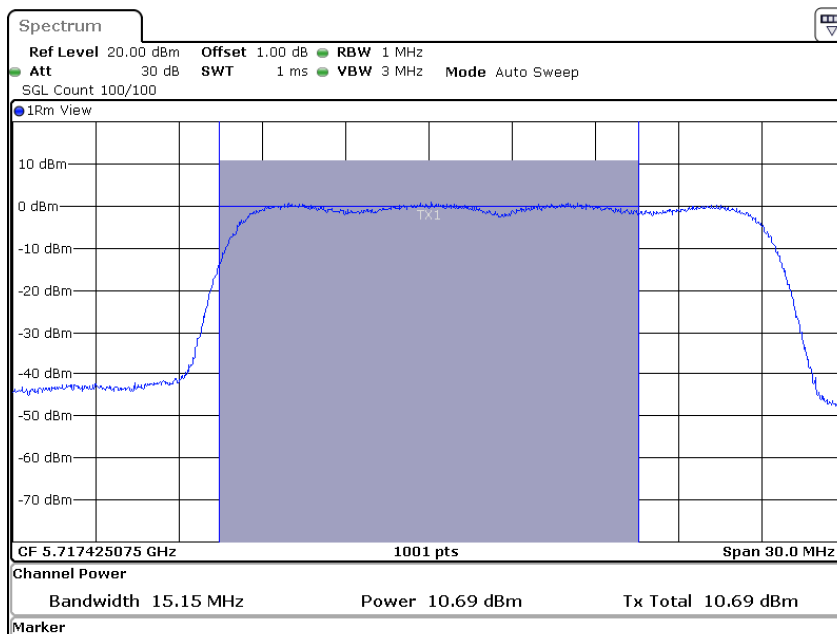


Date: 9.APR.2024 10:28:11

Maximum conducted output power
802.11ax20 MHz / 5720 (U-NII-3) MHz / ChainA

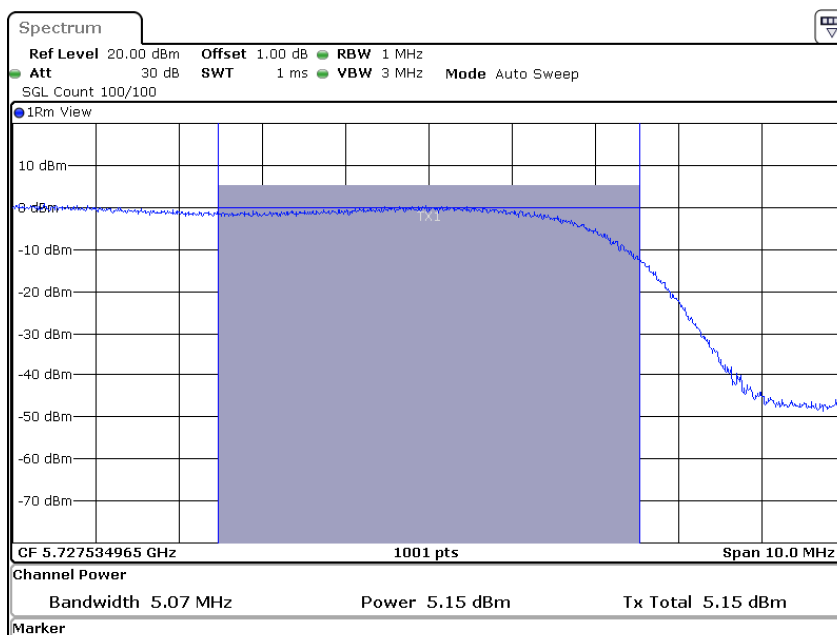


Date: 9.APR.2024 10:28:14

Maximum conducted output power
802.11ax20 MHz / 5720 (U-NII-2C) MHz / ChainB

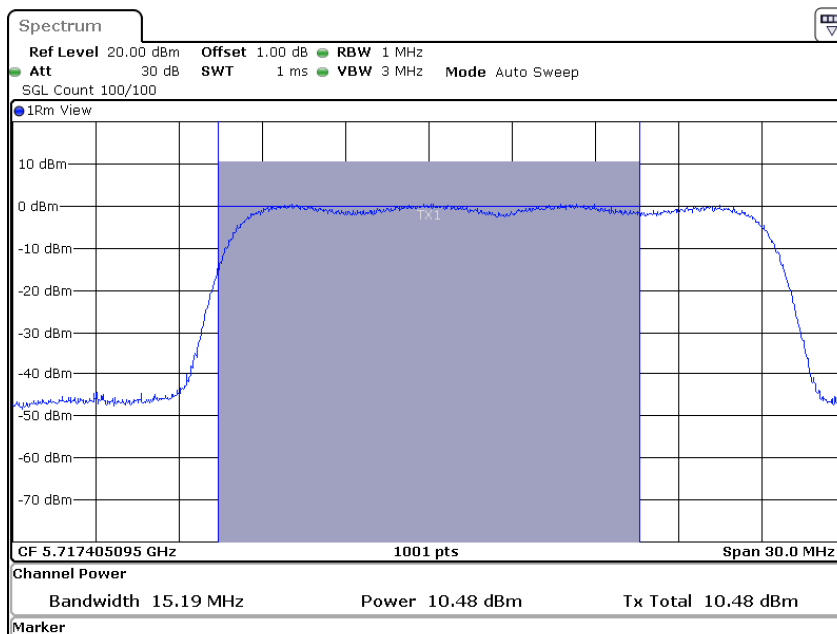

Date: 9.APR.2024 10:24:49

Maximum conducted output power
802.11ax20 MHz / 5720 (U-NII-3) MHz / ChainB

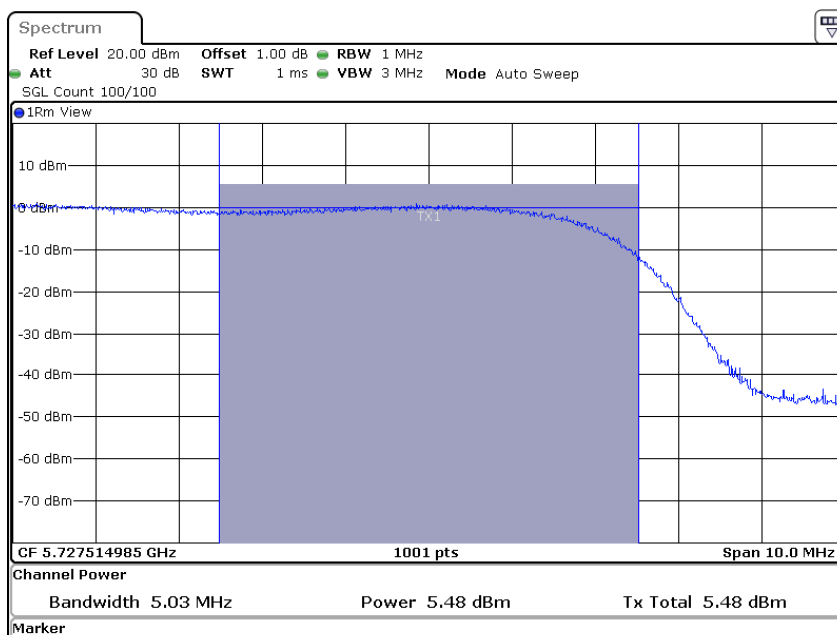


Date: 9.APR.2024 10:24:52

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (40 MHz)	5190	--	11.97	11.17	--	14.60	24	--	Pass
	5230	--	11.94	11.26	--	14.62	24	--	Pass
	5270	40.19	11.73	11.45	--	14.60	24	27.04	Pass
	5310	40.11	11.74	11.51	--	14.64	24	27.03	Pass
	5510	40.27	11.34	10.95	--	14.16	24	27.05	Pass
	5550	40.27	11.76	11.38	--	14.58	24	27.05	Pass
	5670	40.19	11.72	11.62	--	14.68	24	27.04	Pass
	5710 (U-NII-2C)	35.06	11.45	11.41	0.16	14.60	24	26.45	Pass
	5710 (U-NII-3)	--	1.68	1.60	0.16	4.81	30	--	Pass
	5755	--	11.75	11.54	--	14.66	30	--	Pass
	5795	--	11.37	11.81	--	14.61	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

26 dB Occupied Bandwidth 802.11ax40 MHz / 5710 MHz / Chain B

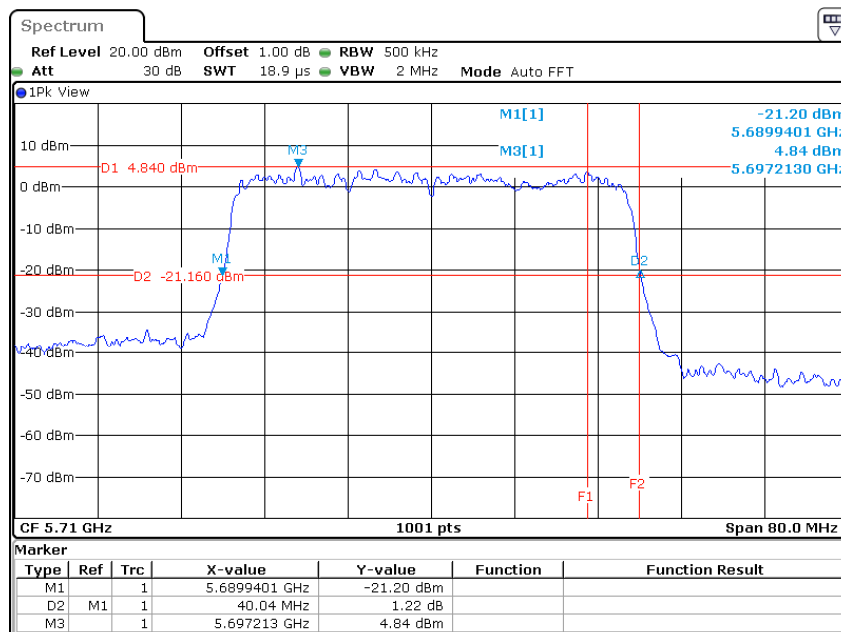


Date: 9.APR.2024 10:32:14

Maximum conducted output power
802.11ax40 MHz / 5710 (U-NII-2C) MHz / ChainA

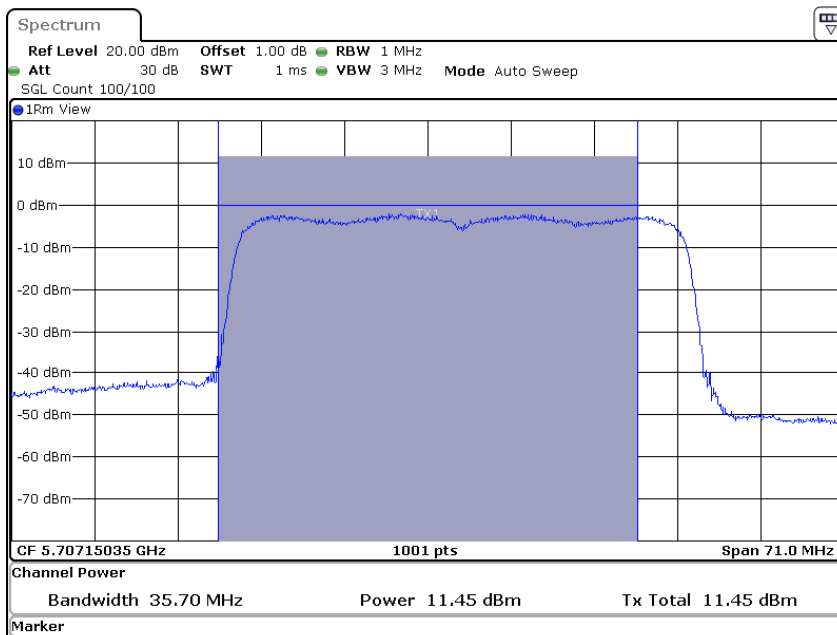


Date: 9.APR.2024 10:31:43

Maximum conducted output power
802.11ax40 MHz / 5710 (U-NII-3) MHz / ChainA

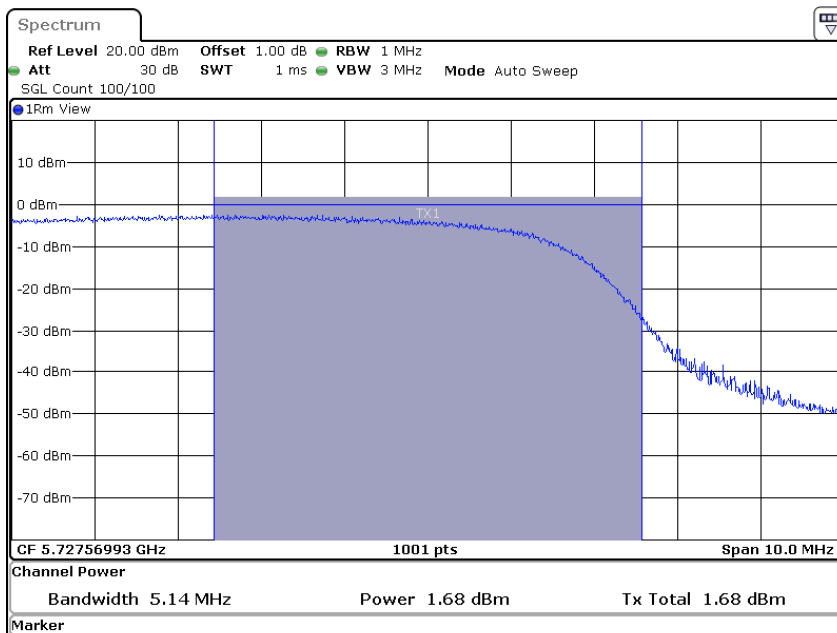


Date: 9.APR.2024 10:31:45

Maximum conducted output power
802.11ax40 MHz / 5710 (U-NII-2C) MHz / ChainB

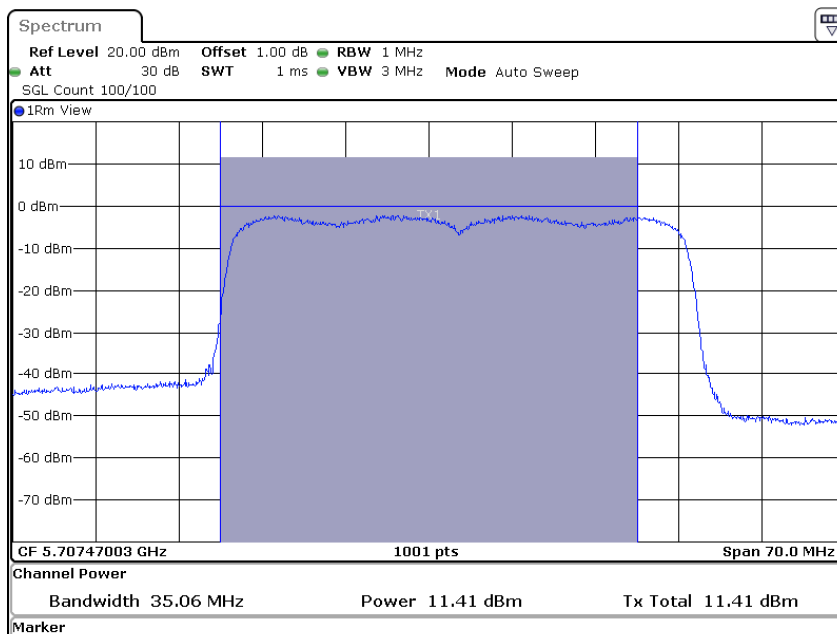

Date: 9.APR.2024 10:33:17

Maximum conducted output power
802.11ax40 MHz / 5710 (U-NII-3) MHz / ChainB

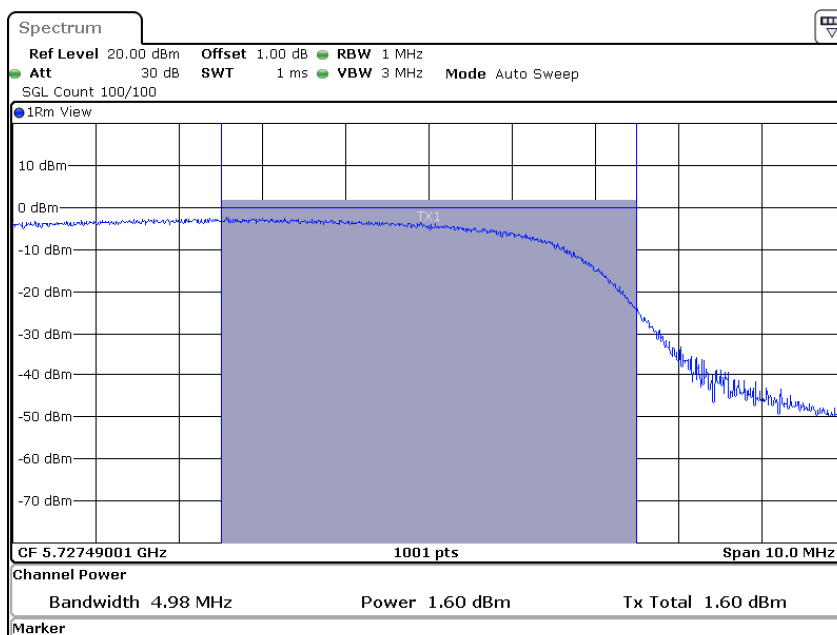


Date: 9.APR.2024 10:33:19

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	11.92	11.52	--	14.73	24	--	Pass
	5290	80.24	11.85	11.46	--	14.67	24	30.04	Pass
	5530	80.40	11.56	11.41	--	14.50	24	30.05	Pass
	5610	80.71	11.70	11.58	--	14.65	24	30.07	Pass
	5690 (U-NII-2C)	75.28	11.43	11.53	0.24	14.73	24	29.77	Pass
	5690 (U-NII-3)	--	-0.91	-1.08	0.24	2.26	30	--	Pass
	5775	--	11.77	11.86	--	14.83	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

26 dB Occupied Bandwidth
802.11ax80 MHz / 5690 MHz / Chain A

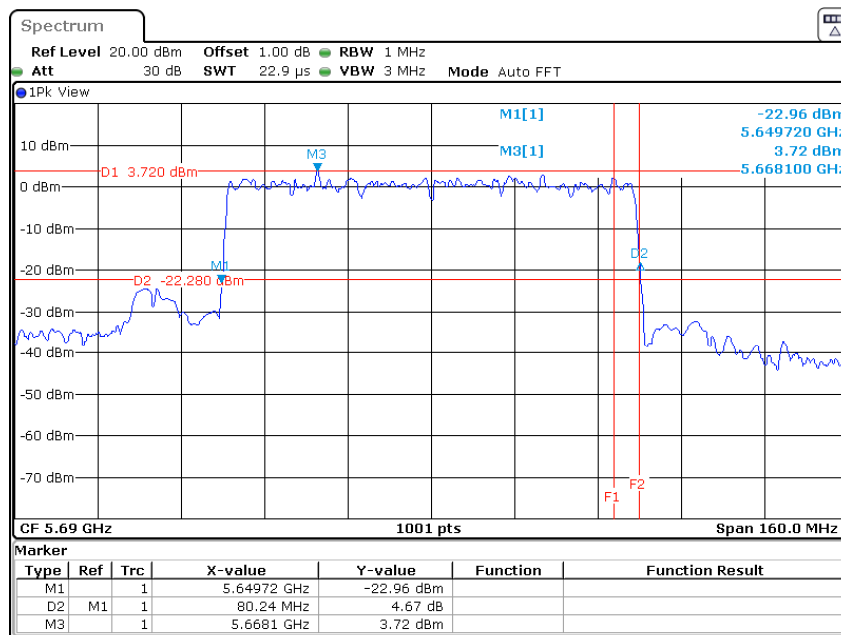


Date: 21.MAR.2024 10:38:51

Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-2C) MHz / ChainA

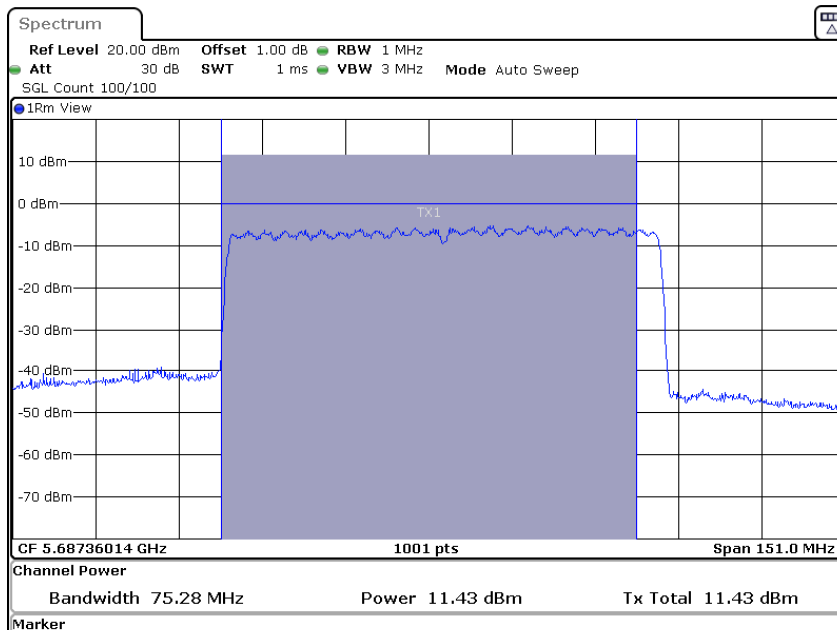


Date: 21.MAR.2024 15:06:16

Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-3) MHz / ChainA

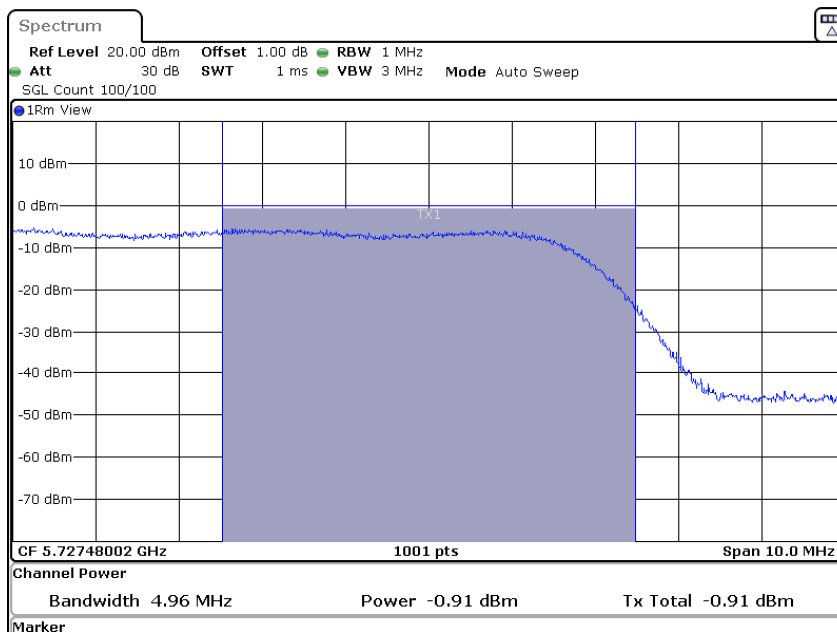


Date: 21.MAR.2024 15:06:19

Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-2C) MHz / ChainB

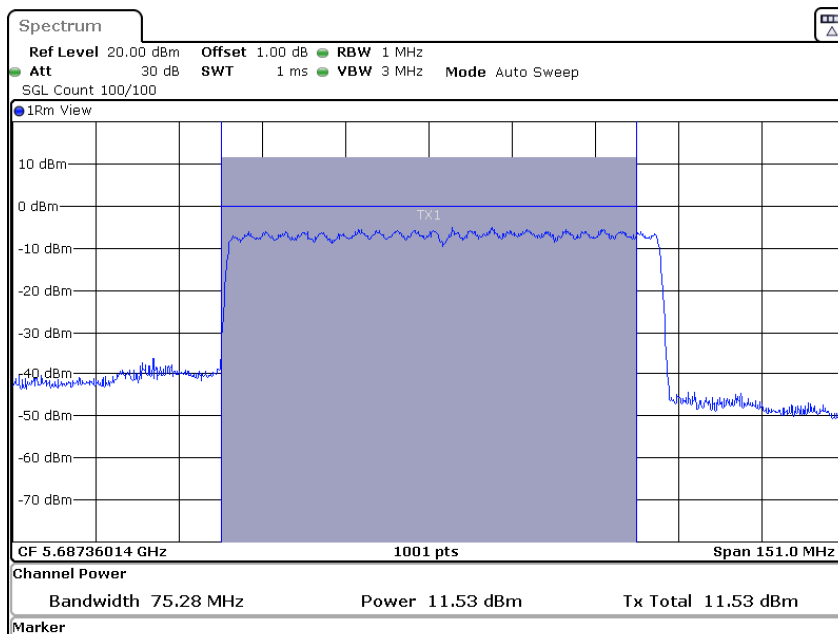

Date: 21.MAR.2024 15:07:46

Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-3) MHz / ChainB

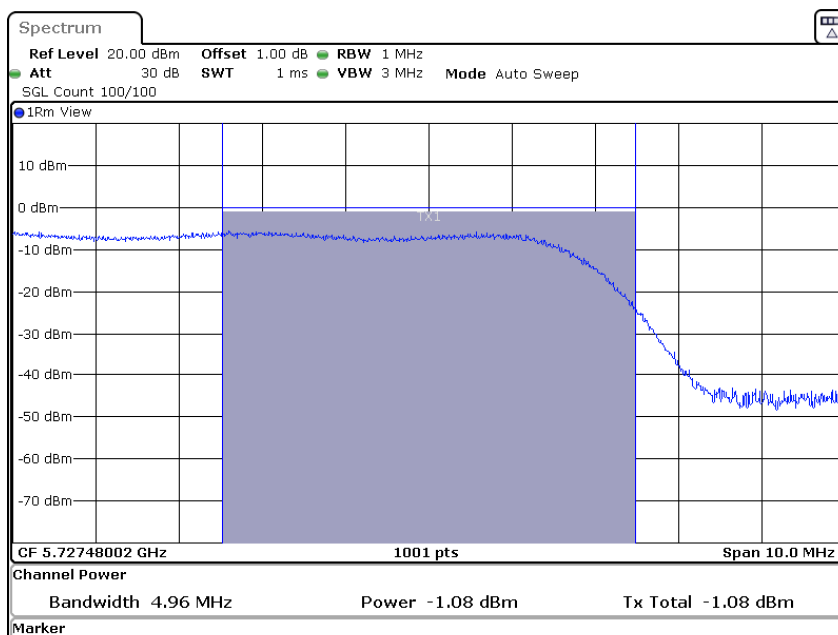

Date: 21.MAR.2024 15:07:49

5 GHz ISED

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
						(dBm)	dBm+10log(BW)	
802.11a	5180	17.142	11.65	--	11.65	--	--	Pass
	5220	17.022	11.67	--	11.67	--	--	Pass
	5240	17.062	11.69	--	11.69	--	--	Pass
	5260	17.302	11.61	--	11.61	24	23.38	Pass
	5300	16.943	11.59	--	11.59	24	23.29	Pass
	5320	17.062	11.78	--	11.78	24	23.32	Pass
	5500	17.062	11.74	--	11.74	24	23.32	Pass
	5580	17.062	11.75	--	11.75	24	23.32	Pass
	5700	16.983	11.84	--	11.84	24	23.30	Pass
	5720 (U-NII-2C)	13.511	10.98	0.00	10.98	24	22.31	Pass
	5720 (U-NII-3)	3.551	4.52	0.00	4.52	30	--	Pass
	5745	17.182	11.82	--	11.82	30	--	Pass
	5785	16.863	11.88	--	11.88	30	--	Pass
	5825	17.102	11.67	--	11.67	30	--	Pass

Note:


1. Output Power (dBm) = Power (dBm) + Duty factor.

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit		Result
						(dBm)	dBm+10log(BW)	
802.11a	5180	17.142	11.65	0.80	12.45	23	22.34	Pass
	5220	17.022	11.67	0.80	12.47	23	22.31	Pass
	5240	17.062	11.69	0.80	12.49	23	22.32	Pass
	5260	17.302	11.61	0.80	12.41	30	29.38	Pass
	5300	16.943	11.59	0.80	12.39	30	29.29	Pass
	5320	17.062	11.78	0.80	12.58	30	29.32	Pass
	5500	17.062	11.74	0.80	12.54	30	29.32	Pass
	5580	17.062	11.75	0.80	12.55	30	29.32	Pass
	5700	16.983	11.84	0.80	12.64	30	29.30	Pass
	5720 (U-NII-2C)	13.511	10.98	0.80	11.78	30	28.31	Pass
	5720 (U-NII-3)	3.551	4.52	0.80	5.32	--	--	Pass
	5745	17.182	11.82	0.80	12.62	--	--	Pass
	5785	16.863	11.88	0.80	12.68	--	--	Pass
	5825	17.102	11.67	0.80	12.47	--	--	Pass

Note:


1. EIRP (dBm) = Output Power (dBm) + Antenna gain.

99% Occupied Bandwidth
802.11a / 5720 MHz

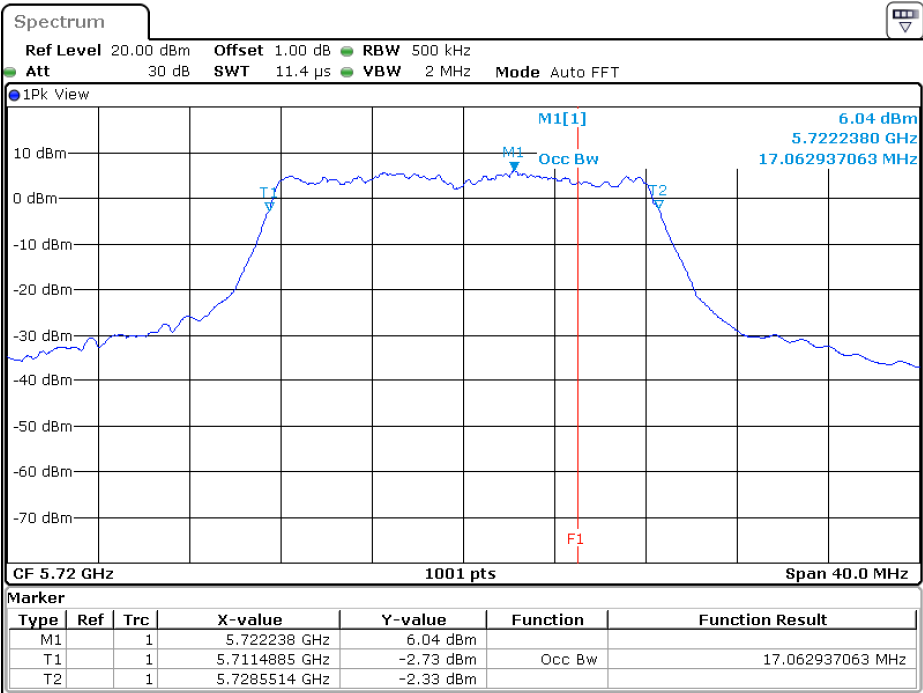


Date: 9 APR 2024 10:14:29

Maximum conducted output power
802.11a / 5720 (U-NII-2C) MHz

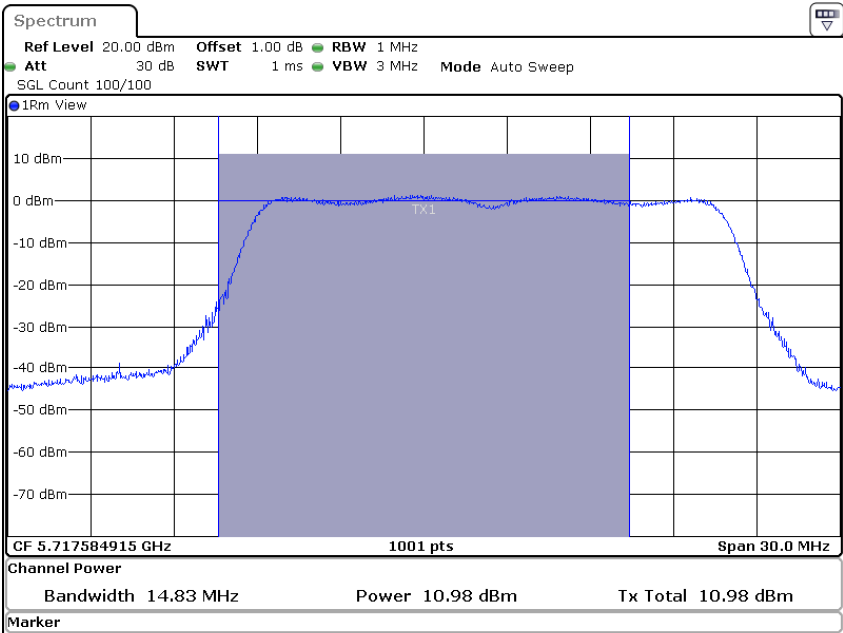

Date: 9 APR 2024 10:16:42

Maximum conducted output power
802.11a / 5720 (U-NII-3) MHz

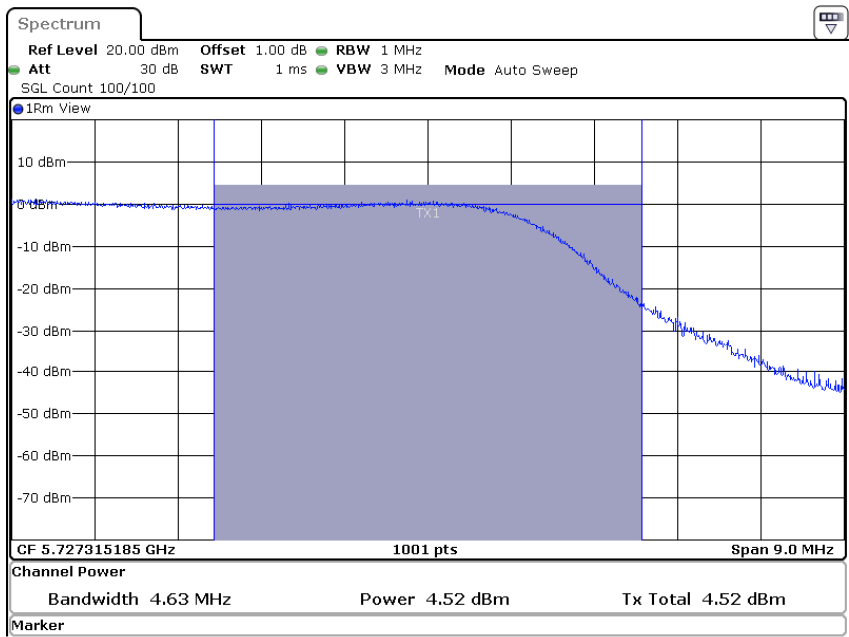

Date: 9.APR.2024 10:16:45

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (20 MHz)	5180	18.02	11.77	11.32	--	14.56	--	--	Pass
	5220	17.90	11.74	11.52	--	14.64	--	--	Pass
	5240	17.94	11.82	11.44	--	14.64	--	--	Pass
	5260	17.90	11.83	11.33	--	14.60	24	23.53	Pass
	5300	17.86	11.69	11.41	--	14.56	24	23.52	Pass
	5320	17.90	11.62	11.49	--	14.57	24	23.53	Pass
	5500	17.90	11.75	11.37	--	14.57	24	23.53	Pass
	5580	17.86	11.38	11.71	--	14.56	24	23.52	Pass
	5700	17.82	11.64	11.66	--	14.66	24	23.51	Pass
	5720 (U-NII-2C)	13.95	10.62	10.62	0.00	13.63	24	22.45	Pass
	5720 (U-NII-3)	3.91	4.74	4.72	0.00	7.74	30	--	Pass
	5745	17.86	11.53	11.47	--	14.51	30	--	Pass
	5785	17.78	11.45	11.56	--	14.52	30	--	Pass
	5825	17.86	11.13	11.86	--	14.52	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ac (20 MHz)	5180	18.02	14.56	0.80	15.36	23	22.56	Pass
	5220	17.90	14.64	0.80	15.44	23	22.53	Pass
	5240	17.94	14.64	0.80	15.44	23	22.54	Pass
	5260	17.90	14.60	0.80	15.40	30	29.53	Pass
	5300	17.86	14.56	0.80	15.36	30	29.52	Pass
	5320	17.90	14.57	0.80	15.37	30	29.53	Pass
	5500	17.90	14.57	0.80	15.37	30	29.53	Pass
	5580	17.86	14.56	0.80	15.36	30	29.52	Pass
	5700	17.82	14.66	0.80	15.46	30	29.51	Pass
	5720 (U-NII-2C)	13.95	13.63	0.80	14.43	30	28.45	Pass
	5720 (U-NII-3)	3.91	7.74	0.80	8.54	--	--	Pass
	5745	17.86	14.51	0.80	15.31	--	--	Pass
	5785	17.78	14.52	0.80	15.32	--	--	Pass
	5825	17.86	14.52	0.80	15.32	--	--	Pass

Note:


1. EIRP (dBm) = Output Power (dBm) + Antenna gain.

99% Occupied Bandwidth
802.11ac (20MHz) / 5720 MHz / Chain B

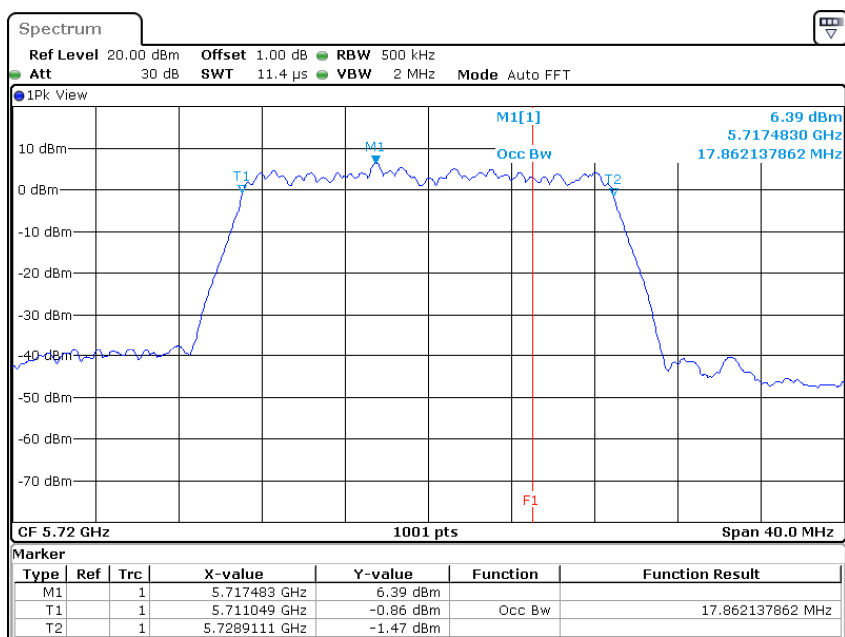


Date: 15.JUL.2024 13:24:42

Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-2C) MHz / ChainA

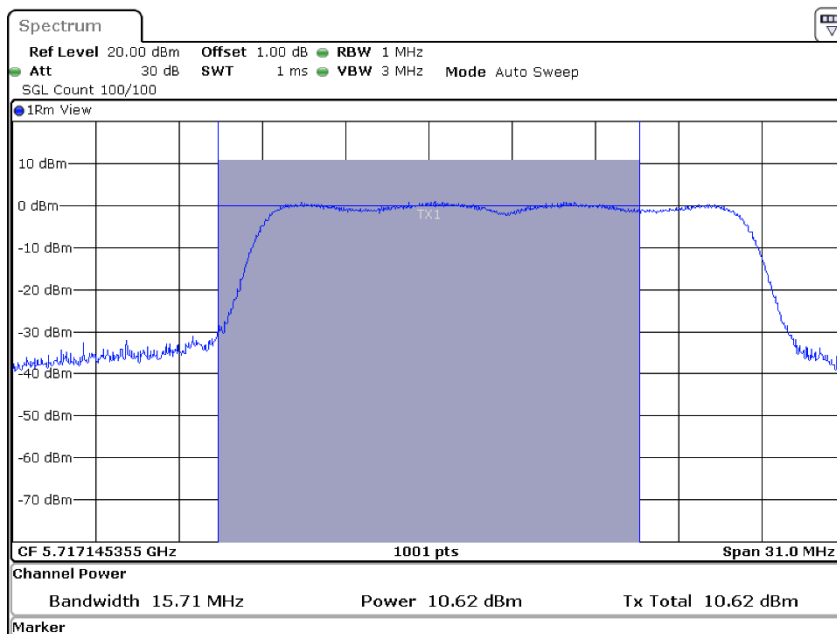


Date: 16.JUL.2024 13:58:15

Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-3) MHz / ChainA

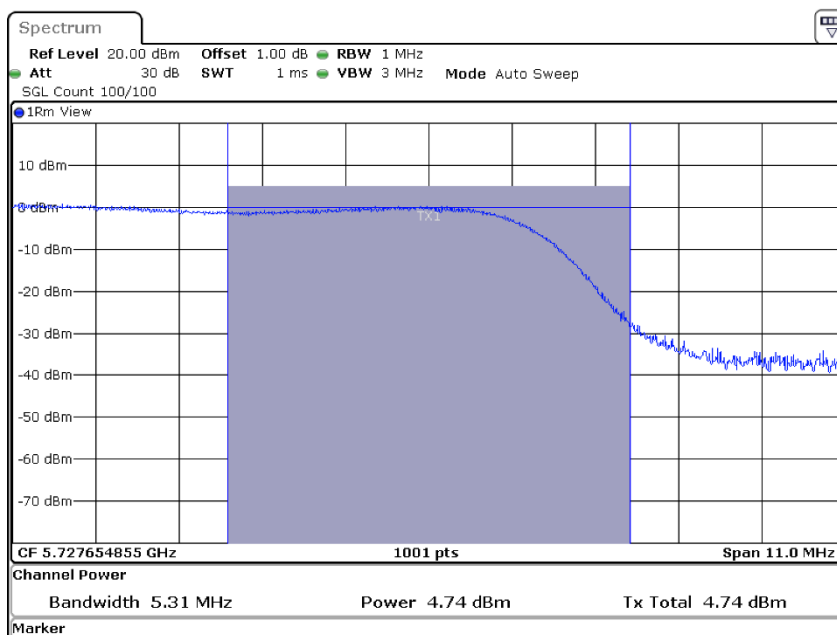


Date: 16.JUL.2024 13:58:17

Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-2C) MHz / ChainB

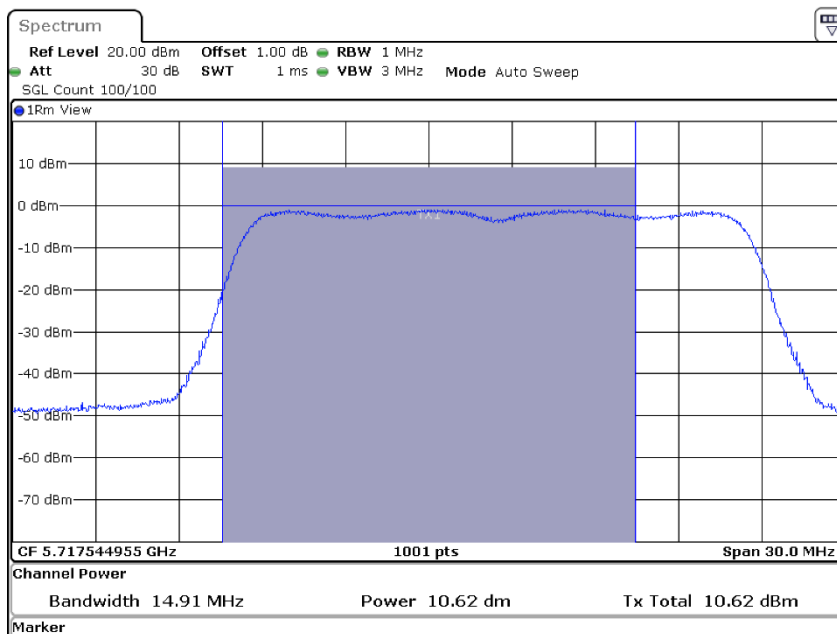

Date: 16.JUL.2024 13:59:33

Maximum conducted output power
802.11ac20 MHz / 5720 (U-NII-3) MHz / ChainB

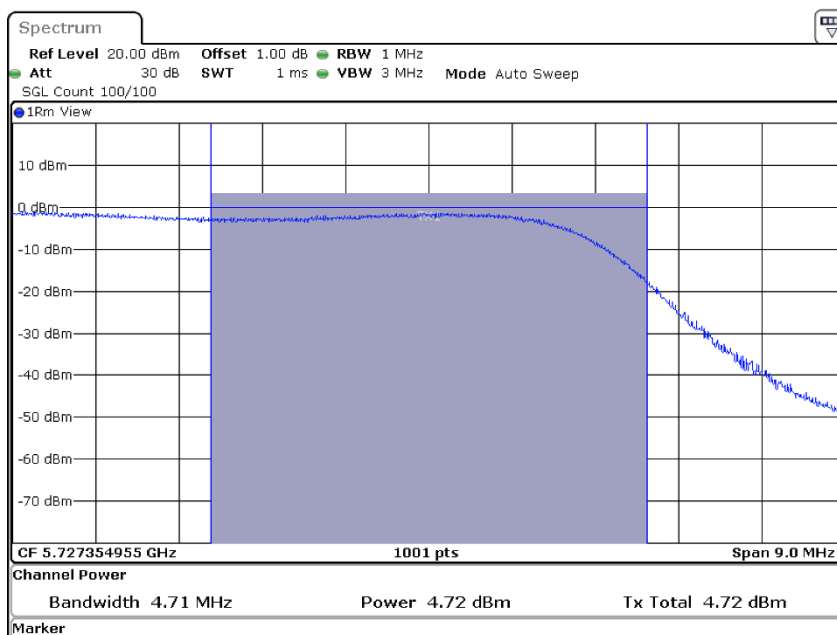

Date: 16.JUL.2024 13:59:36

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (40 MHz)	5190	36.20	11.91	11.08	--	14.53	--	--	Pass
	5230	36.12	11.86	11.19	--	14.55	--	--	Pass
	5270	36.20	11.65	11.39	--	14.53	24	26.59	Pass
	5310	36.20	11.55	11.46	--	14.52	24	26.59	Pass
	5510	36.20	11.25	10.77	--	14.03	24	26.59	Pass
	5550	36.20	11.68	11.24	--	14.48	24	26.59	Pass
	5670	36.20	11.58	11.43	--	14.52	24	26.59	Pass
	5710 (U-NII-2C)	33.06	11.34	11.33	0.11	14.46	24	26.19	Pass
	5710 (U-NII-3)	2.98	1.08	1.03	0.11	4.18	30	--	Pass
	5755	36.12	11.56	11.41	--	14.50	30	--	Pass
	5795	36.28	11.31	11.69	--	14.51	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ac (40 MHz)	5190	36.20	14.53	0.80	15.33	23	25.59	Pass
	5230	36.12	14.55	0.80	15.35	23	25.58	Pass
	5270	36.20	14.53	0.80	15.33	30	25.59	Pass
	5310	36.20	14.52	0.80	15.32	30	25.59	Pass
	5510	36.20	14.03	0.80	14.83	30	25.59	Pass
	5550	36.20	14.48	0.80	15.28	30	25.59	Pass
	5670	36.20	14.52	0.80	15.32	30	25.59	Pass
	5710 (U-NII-2C)	33.06	14.46	0.80	15.26	30	25.19	Pass
	5710 (U-NII-3)	2.98	4.18	0.80	4.98	--	--	Pass
	5755	36.12	14.50	0.80	15.30	--	--	Pass
	5795	36.28	14.51	0.80	15.31	--	--	Pass

Note:

1. EIRP (dBm) = Output Power (dBm) + Antenna gain.


99% Occupied Bandwidth
802.11ac (40MHz) / 5710 MHz / Chain B

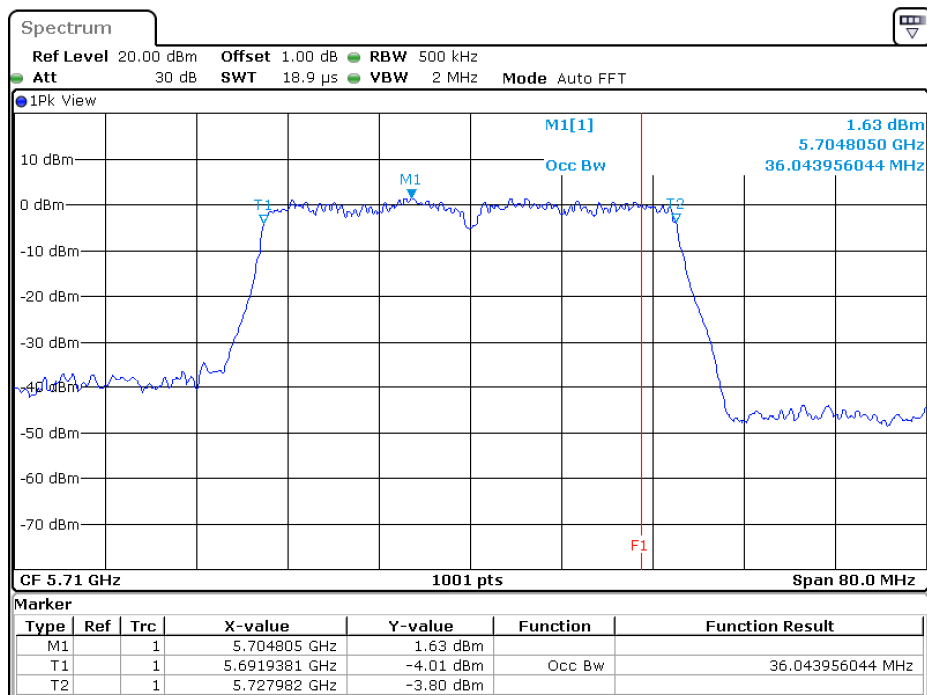

Date: 15 JUL 2024 13:42:58

Maximum conducted output power


802.11ac40 MHz / 5710 (U-NII-2C) MHz / ChainA

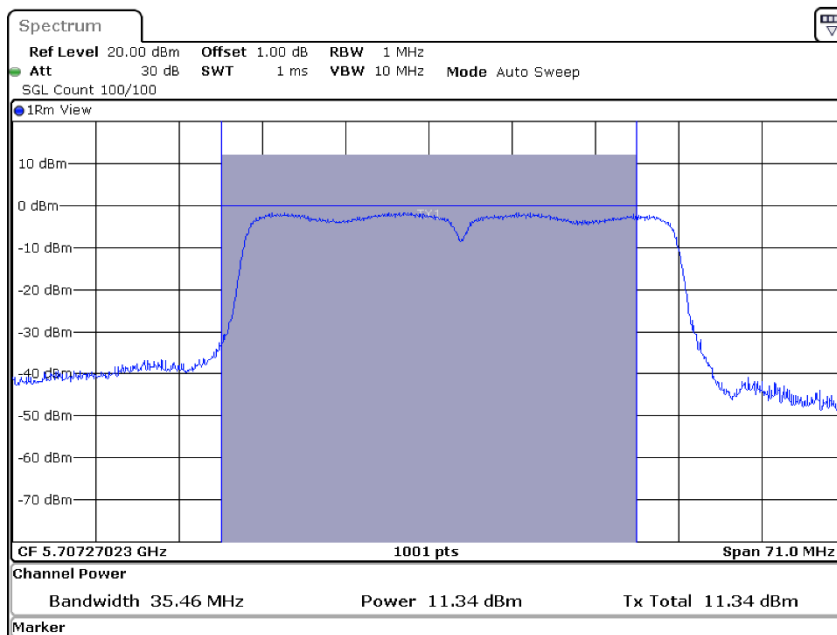

Date: 9.JUL.2024 09:26:13


Maximum conducted output power

802.11ac40 MHz / 5710 (U-NII-3) MHz / ChainA

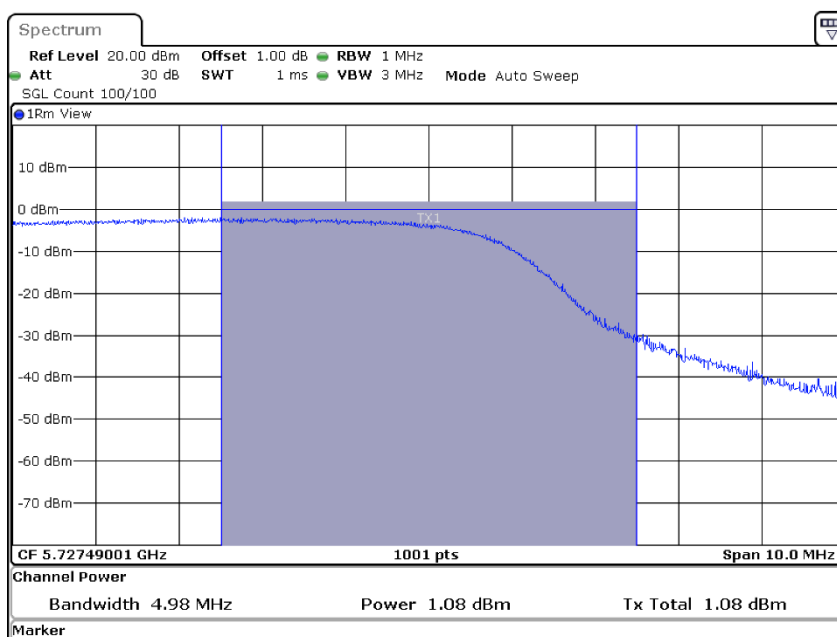


Date: 9.JUL.2024 09:26:16

Maximum conducted output power
802.11ac40 MHz / 5710 (U-NII-2C) MHz / ChainB

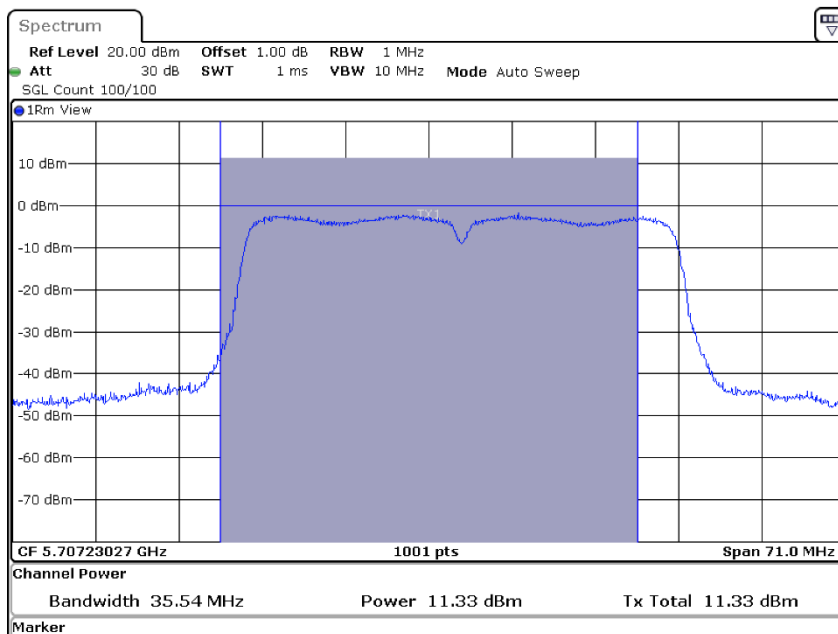

Date: 9 JUL 2024 09:25:26

Maximum conducted output power
802.11ac40 MHz / 5710 (U-NII-3) MHz / ChainB

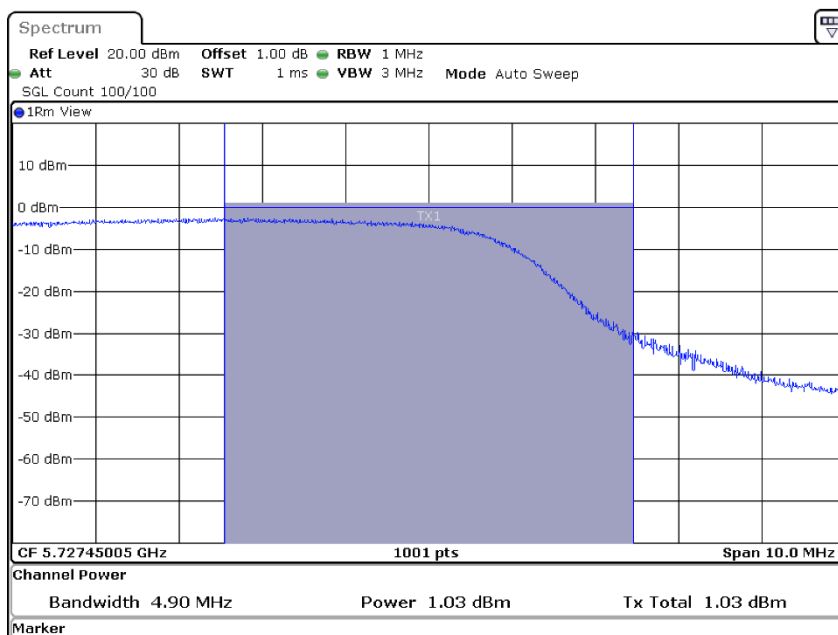

Date: 9 JUL 2024 09:25:29

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ac (80 MHz)	5210	76.08	11.81	11.35	--	14.60	--	--	Pass
	5290	75.92	11.74	11.40	--	14.58	24	28.80	Pass
	5530	75.92	11.50	11.35	--	14.44	24	28.80	Pass
	5690 (U-NII-2C)	72.88	11.41	11.49	0.23	14.69	24	28.63	Pass
	5690 (U-NII-3)	2.88	-2.26	-1.82	0.23	1.21	30	--	Pass
	5775	76.08	11.60	11.70	--	14.66	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ac (80 MHz)	5210	76.08	14.60	0.80	15.40	23	28.81	Pass
	5290	75.92	14.58	0.80	15.38	30	28.80	Pass
	5530	75.92	14.44	0.80	15.24	30	28.80	Pass
	5690 (U-NII-2C)	72.88	14.69	0.80	15.49	30	28.63	Pass
	5690 (U-NII-3)	2.88	1.21	0.80	2.01	--	--	Pass
	5775	76.08	14.66	0.80	15.46	--	--	Pass

Note:


1. EIRP (dBm) = Output Power (dBm) + Antenna gain.

99% Occupied Bandwidth
802.11ac (80MHz) / 5690 MHz / Chain B

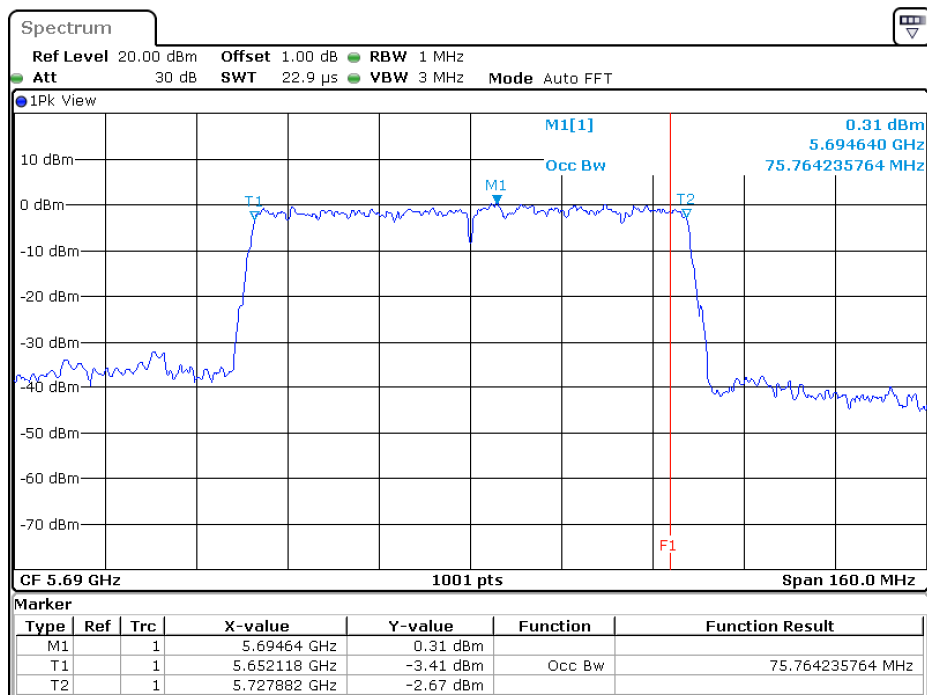


Date: 15 JUL 2024 13:53:22

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-2C) MHz / ChainA

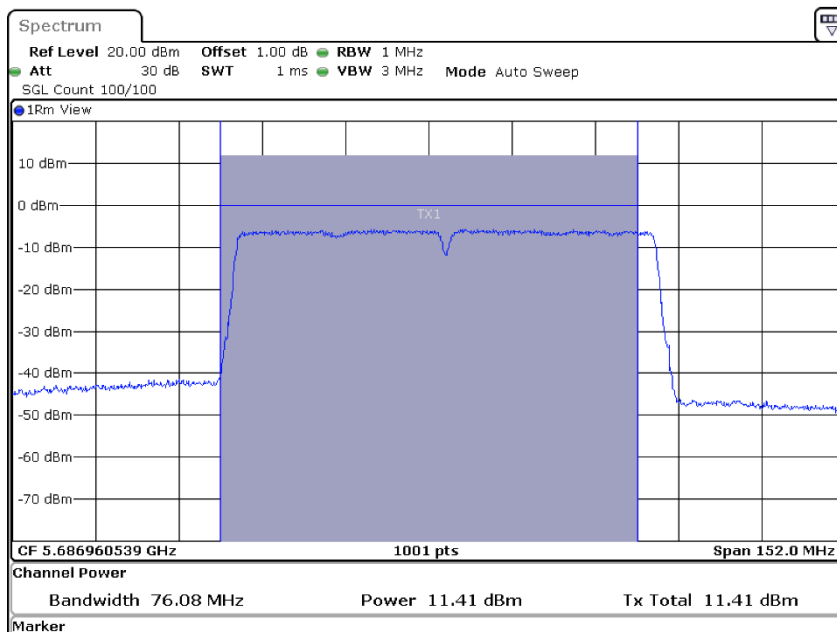


Date: 9 JUL 2024 09:28:18

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-3) MHz / ChainA

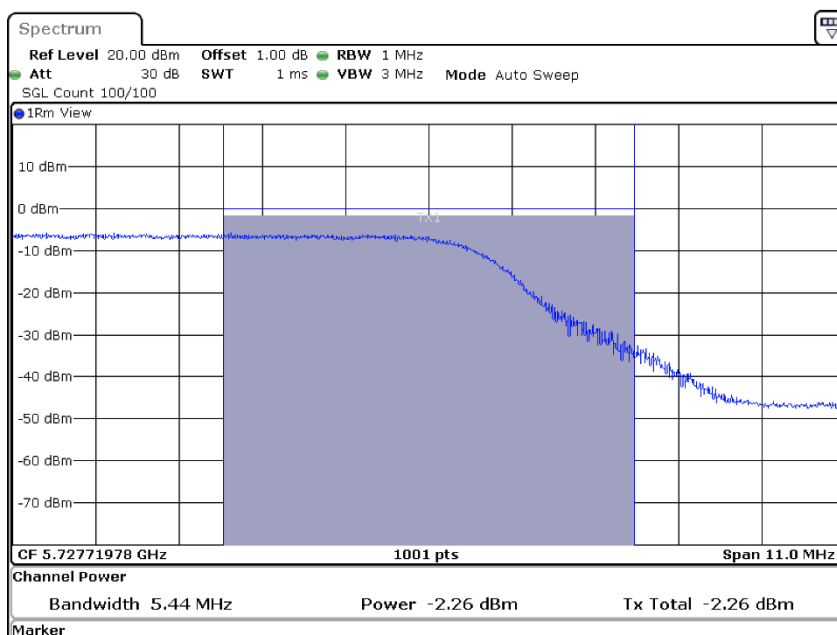


Date: 9 JUL 2024 09:28:21

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-2C) MHz / ChainB

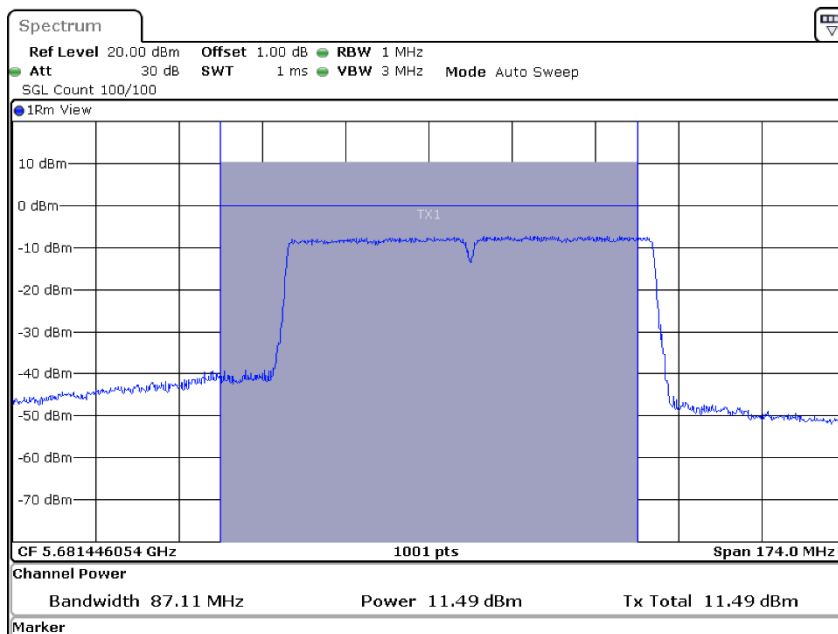

Date: 9 JUL 2024 09:29:25

Maximum conducted output power
802.11ac80 MHz / 5690 (U-NII-3) MHz / ChainB

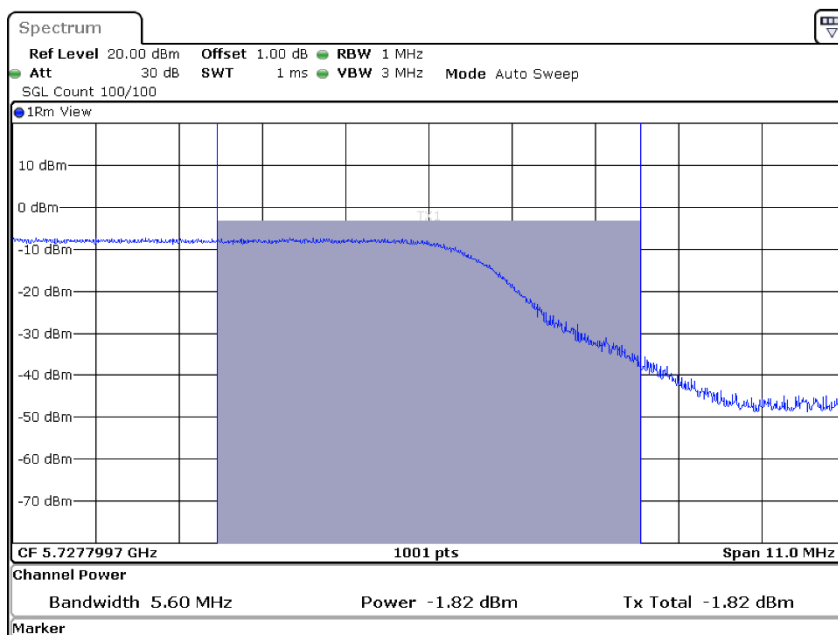

Date: 9 JUL 2024 09:29:28

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	18.94	11.87	11.45	--	14.68	--	--	Pass
	5220	18.90	11.89	11.61	--	14.76	--	--	Pass
	5240	18.86	11.96	11.52	--	14.76	--	--	Pass
	5260	18.86	11.92	11.40	--	14.68	24	23.76	Pass
	5300	18.90	11.81	11.55	--	14.69	24	23.76	Pass
	5320	18.90	11.77	11.68	--	14.74	24	23.76	Pass
	5500	18.94	11.87	11.44	--	14.67	24	23.77	Pass
	5580	18.82	11.46	11.78	--	14.63	24	23.75	Pass
	5700	18.86	11.78	11.76	--	14.78	24	23.76	Pass
	5720 (U-NII-2C)	14.39	10.69	10.48	0.00	13.60	24	22.58	Pass
	5720 (U-NII-3)	4.43	5.15	5.48	0.00	8.33	30	--	Pass
	5745	18.90	11.65	11.54	--	14.61	30	--	Pass
	5785	18.90	11.52	11.74	--	14.64	30	--	Pass
	5825	18.86	11.21	11.95	--	14.61	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	18.94	14.68	0.80	15.48	23	23.77	Pass
	5220	18.90	14.76	0.80	15.56	23	23.76	Pass
	5240	18.86	14.76	0.80	15.56	23	23.76	Pass
	5260	18.86	14.68	0.80	15.48	30	23.76	Pass
	5300	18.90	14.69	0.80	15.49	30	23.76	Pass
	5320	18.90	14.74	0.80	15.54	30	23.76	Pass
	5500	18.94	14.67	0.80	15.47	30	23.77	Pass
	5580	18.82	14.63	0.80	15.43	30	23.75	Pass
	5700	18.86	14.78	0.80	15.58	30	23.76	Pass
	5720 (U-NII-2C)	14.39	13.60	0.80	14.40	30	22.58	Pass
	5720 (U-NII-3)	4.43	8.33	0.80	9.13	--	--	Pass
	5745	18.90	14.61	0.80	15.41	--	--	Pass
	5785	18.90	14.64	0.80	15.44	--	--	Pass
	5825	18.86	14.61	0.80	15.41	--	--	Pass


Note:

1. EIRP (dBm) = Output Power (dBm) + Antenna gain.


99% Occupied Bandwidth
802.11ax (20MHz) / 5720 MHz / Chain B

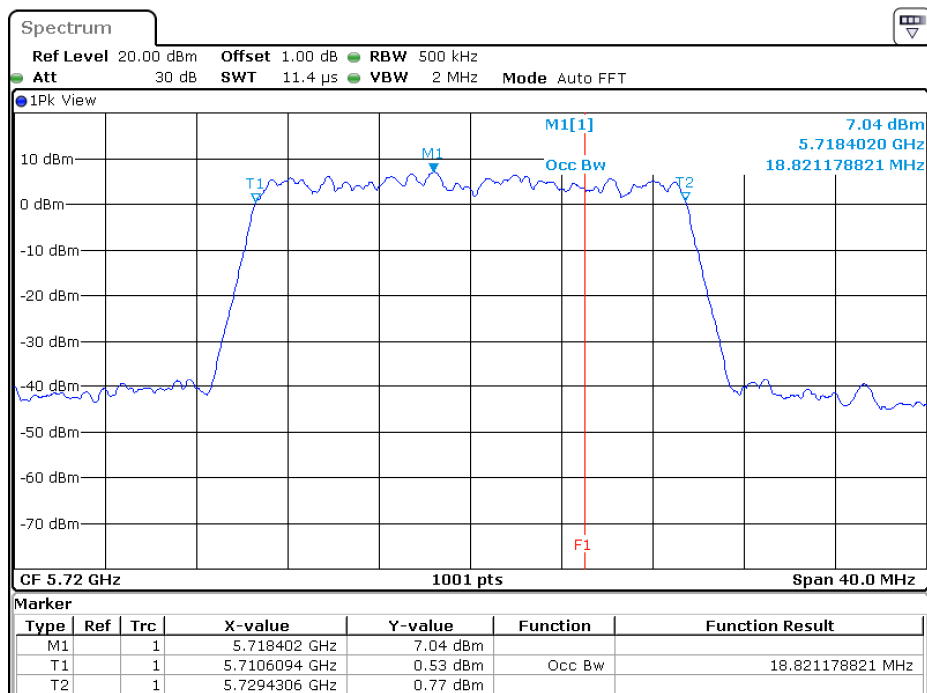

Date: 9.APR.2024 10:23:44

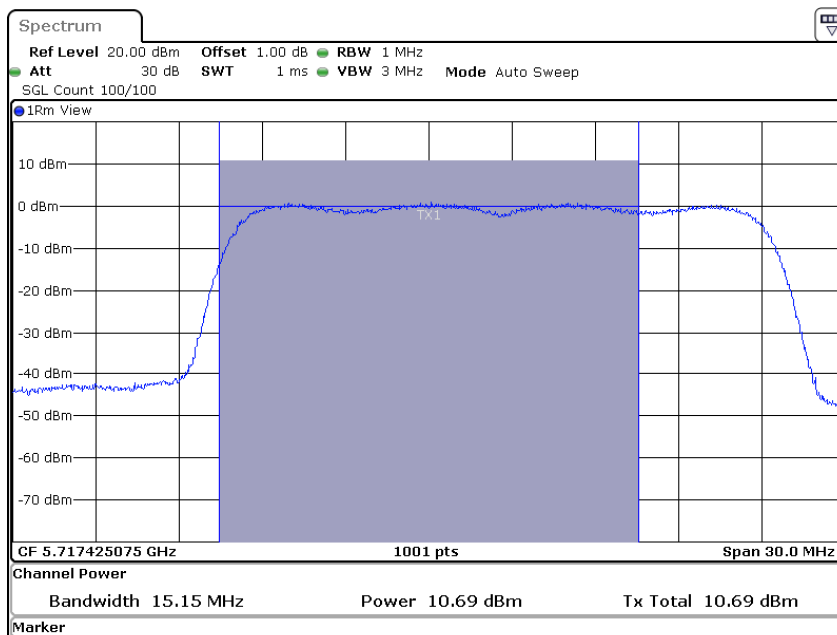
Maximum conducted output power**802.11ax20 MHz / 5720 (U-NII-2C) MHz / ChainA**

Date: 9.APR.2024 10:28:11

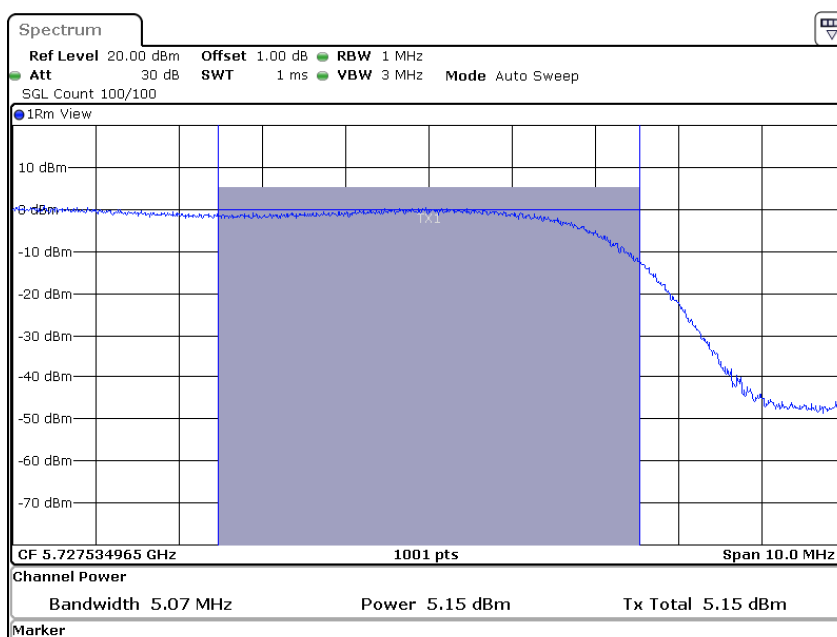Maximum conducted output power**802.11ax20 MHz / 5720 (U-NII-3) MHz / ChainA**


Date: 9.APR.2024 10:28:14

Maximum conducted output power
802.11ax20 MHz / 5720 (U-NII-2C) MHz / ChainB

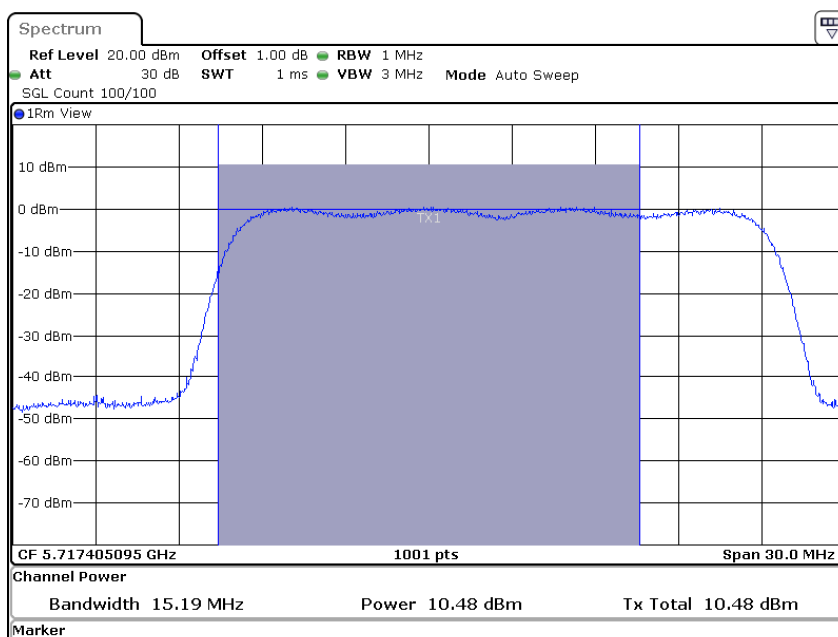

Date: 9.APR.2024 10:24:49

Maximum conducted output power
802.11ax20 MHz / 5720 (U-NII-3) MHz / ChainB

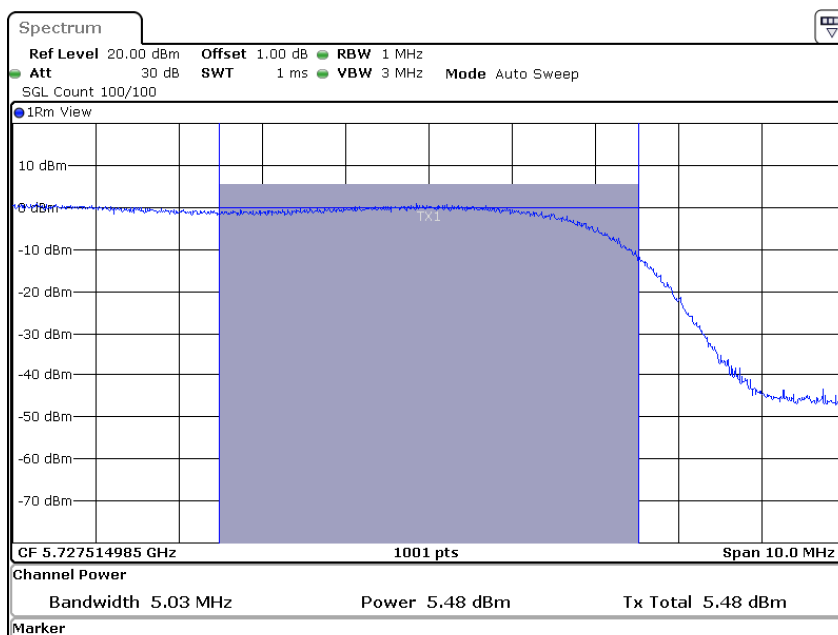

Date: 9.APR.2024 10:24:52

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (40 MHz)	5190	37.72	11.97	11.17	--	14.60	--	--	Pass
	5230	37.64	11.94	11.26	--	14.62	--	--	Pass
	5270	37.56	11.73	11.45	--	14.60	24	26.75	Pass
	5310	37.48	11.74	11.51	--	14.64	24	26.74	Pass
	5510	37.56	11.34	10.95	--	14.16	24	26.75	Pass
	5550	37.56	11.76	11.38	--	14.58	24	26.75	Pass
	5670	37.64	11.72	11.62	--	14.68	24	26.76	Pass
	5710 (U-NII-2C)	33.70	11.45	11.41	0.16	14.60	24	--	Pass
	5710 (U-NII-3)	3.70	1.68	1.60	0.16	4.81	30	--	Pass
	5755	37.48	11.75	11.54	--	14.66	30	--	Pass
	5795	37.48	11.37	11.81	--	14.61	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ax (40 MHz)	5190	37.72	14.60	0.80	15.40	23	--	Pass
	5230	37.64	14.62	0.80	15.42	23	--	Pass
	5270	37.56	14.60	0.80	15.40	30	--	Pass
	5310	37.48	14.64	0.80	15.44	30	--	Pass
	5510	37.56	14.16	0.80	14.96	30	--	Pass
	5550	37.56	14.58	0.80	15.38	30	--	Pass
	5670	37.64	14.68	0.80	15.48	30	--	Pass
	5710 (U-NII-2C)	33.70	14.60	0.80	15.40	30	--	Pass
	5710 (U-NII-3)	3.70	4.81	0.80	5.61	--	--	Pass
	5755	37.48	14.66	0.80	15.46	--	--	Pass
	5795	37.48	14.61	0.80	15.41	--	--	Pass


Note:

1. EIRP (dBm) = Output Power (dBm) + Antenna gain.


99% Occupied Bandwidth
802.11ax (40MHz) / 5710 MHz / Chain B

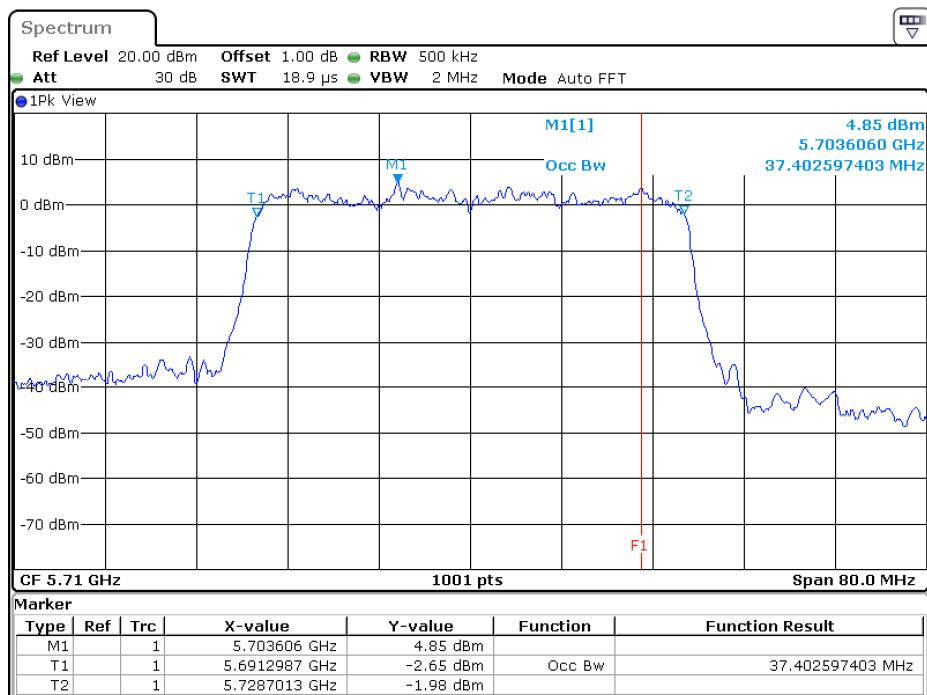

Date: 9.APR.2024 10:32:23

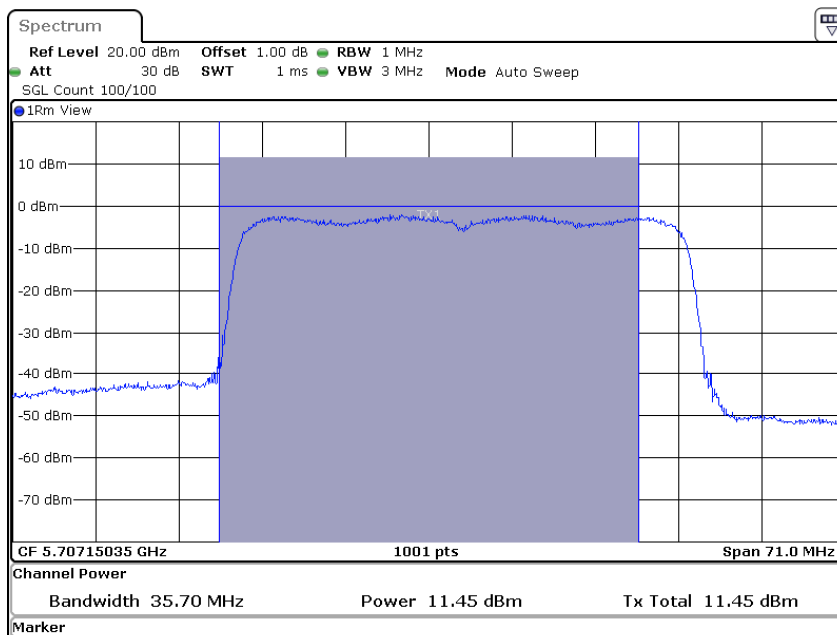
Maximum conducted output power**802.11ax40 MHz / 5710 (U-NII-2C) MHz / ChainA**

Date: 9.APR.2024 10:31:43

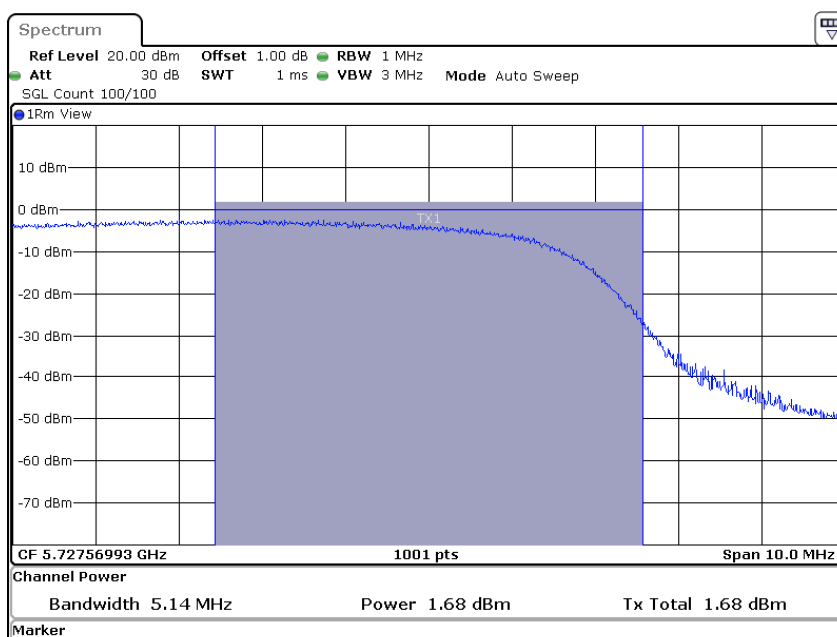Maximum conducted output power**802.11ax40 MHz / 5710 (U-NII-3) MHz / ChainA**


Date: 9.APR.2024 10:31:45

Maximum conducted output power
802.11ax40 MHz / 5710 (U-NII-2C) MHz / ChainB

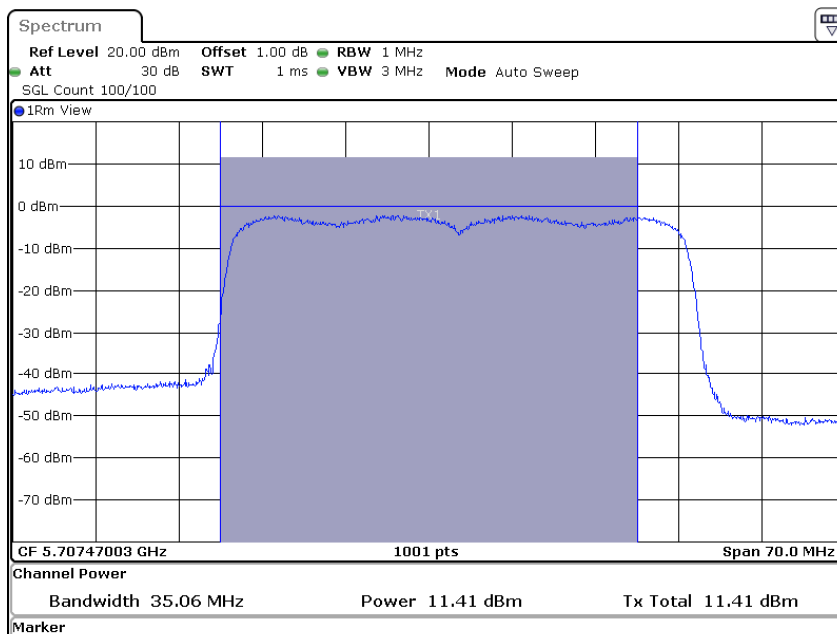

Date: 9.APR.2024 10:33:17

Maximum conducted output power
802.11ax40 MHz / 5710 (U-NII-3) MHz / ChainB

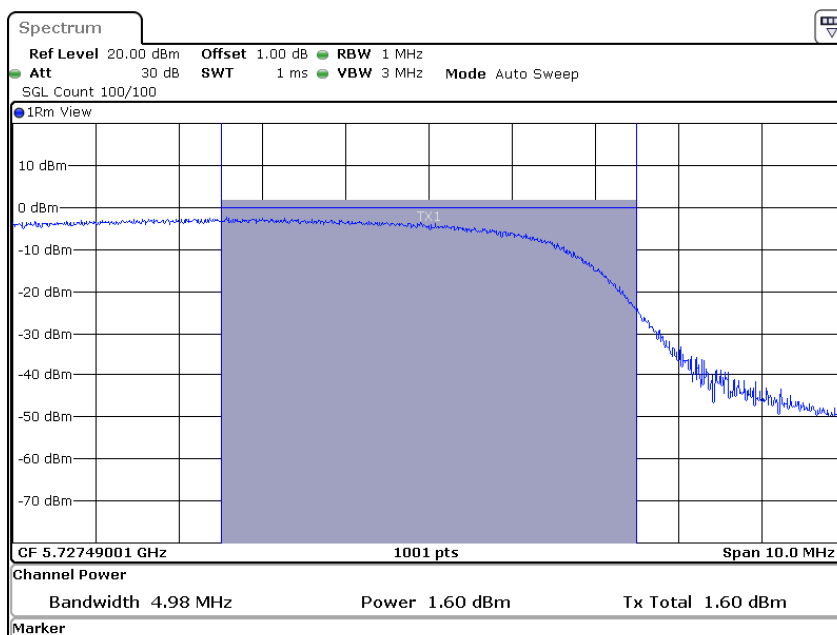

Date: 9.APR.2024 10:33:19

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	77.52	11.92	11.52	--	14.73	--	--	Pass
	5290	77.68	11.85	11.46	--	14.67	24	29.90	Pass
	5530	77.52	11.56	11.41	--	14.50	24	29.89	Pass
	5690 (U-NII-2C)	73.68	11.43	11.53	0.24	14.73	24	29.67	Pass
	5690 (U-NII-3)	3.68	-0.91	-1.08	0.24	2.26	30	--	Pass
	5775	77.68	11.77	11.86	--	14.83	30	--	Pass

Note:


1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 99% Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	99% Bandwidth (MHz)	Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit		Result
						(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	77.52	14.73	0.80	15.53	23	29.89	Pass
	5290	77.68	14.67	0.80	15.47	30	29.90	Pass
	5530	77.52	14.50	0.80	15.30	30	29.89	Pass
	5690 (U-NII-2C)	73.68	14.73	0.80	15.53	30	29.67	Pass
	5690 (U-NII-3)	3.68	2.26	0.80	3.06	--	--	Pass
	5775	77.68	14.83	0.80	15.63	--	--	Pass

Note:


1. EIRP (dBm) = Output Power (dBm) + Antenna gain.

99% Occupied Bandwidth
802.11ax (80MHz) / 5690 MHz / Chain A

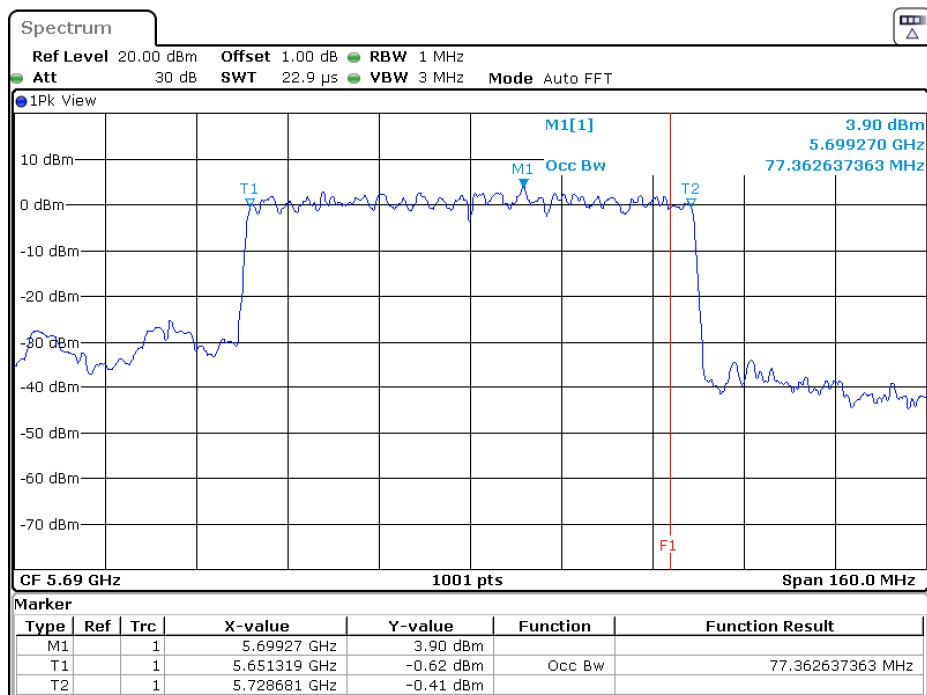


Date: 21.MAR.2024 10:39:01

Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-2C) MHz / ChainA

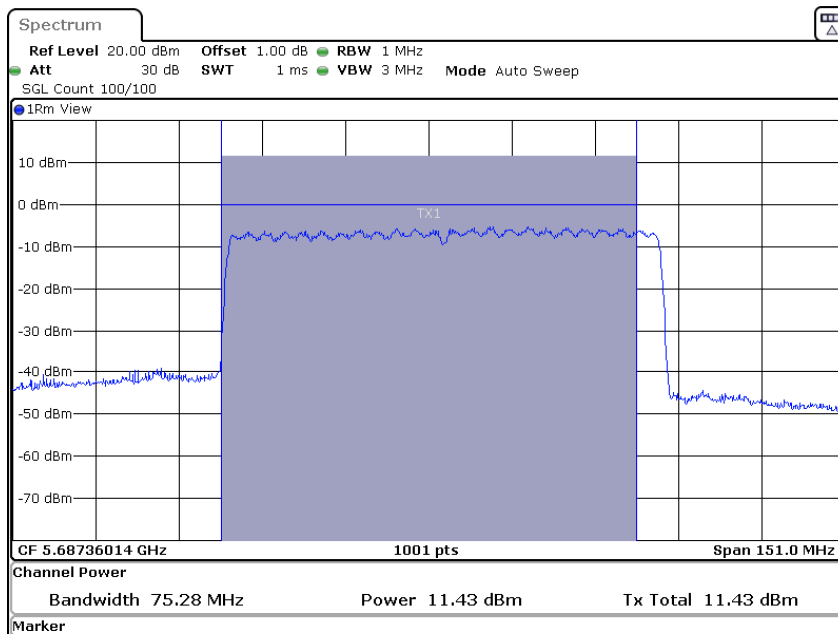


Date: 21.MAR.2024 15:06:16

Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-3) MHz / ChainA

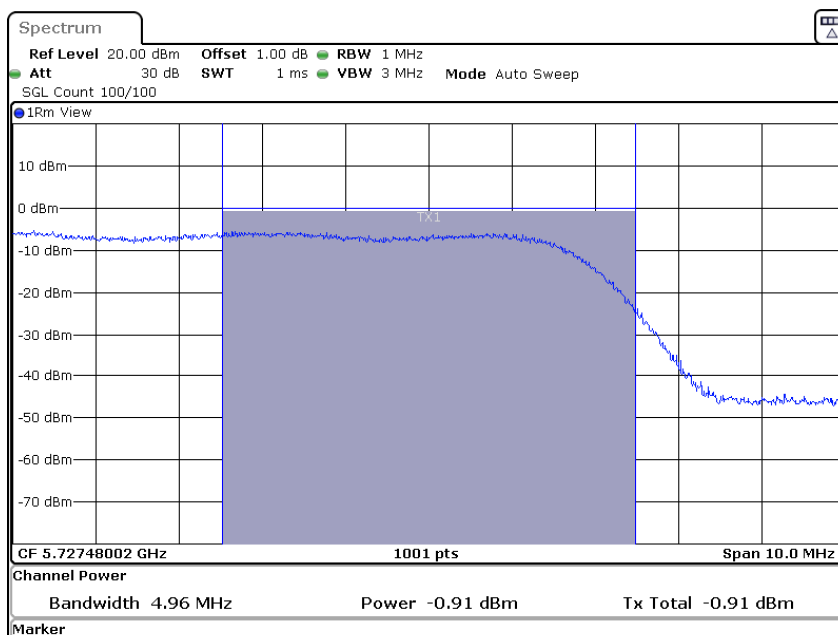


Date: 21.MAR.2024 15:06:19

Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-2C) MHz / ChainB

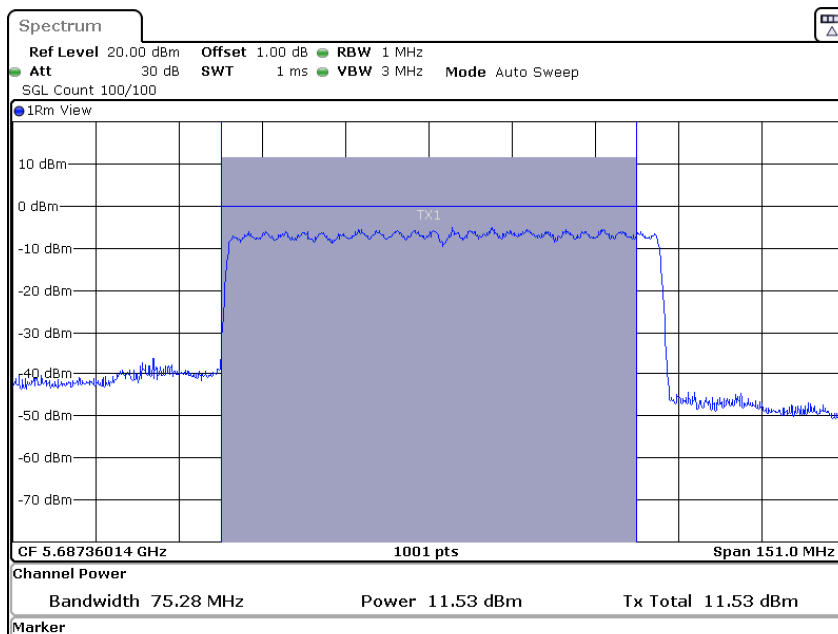

Date: 21.MAR.2024 15:07:46


Maximum conducted output power
802.11ax80 MHz / 5690 (U-NII-3) MHz / ChainB

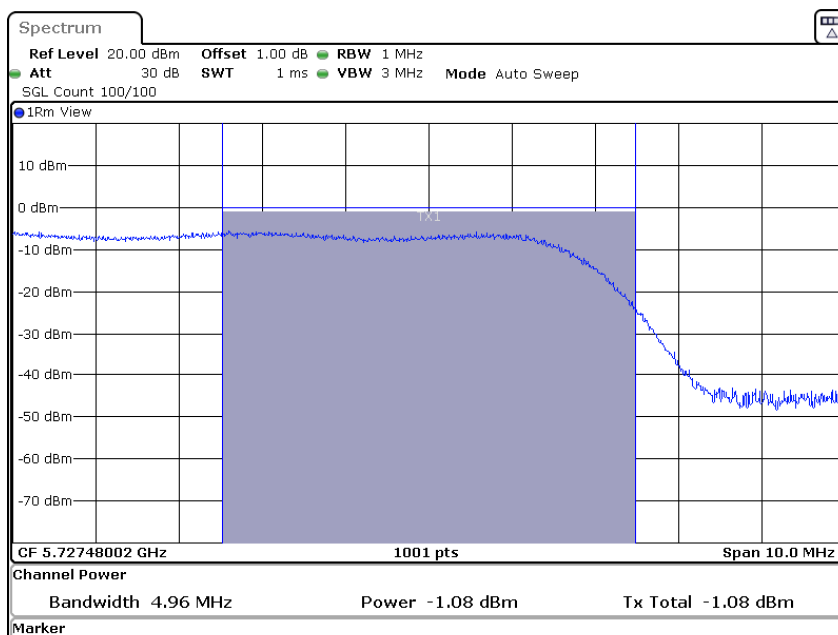

Date: 21.MAR.2024 15:07:49

Appendix B. Test Result of Radiated Emission

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2412MHz
Test by :Rock

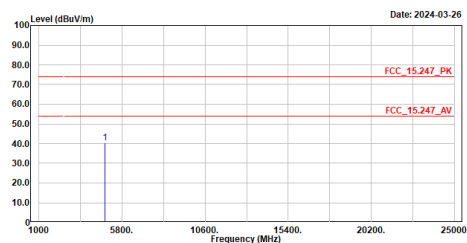


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	40.56	74.00	-33.44	47.65	-7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2412MHz
Test by :Rock

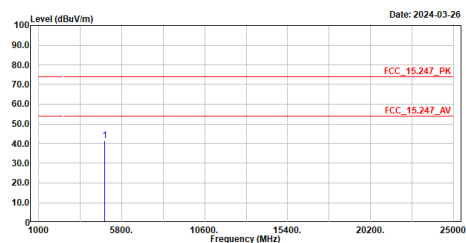


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	41.61	74.00	-32.39	48.70	-7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2437MHz
Test by :Rock

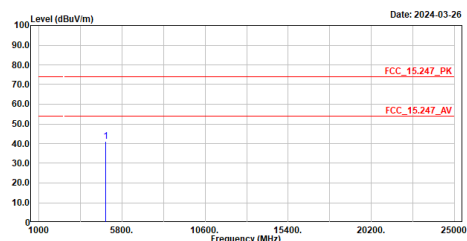


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	41.28	74.00	-32.72	48.13	-6.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2437MHz
Test by :Rock

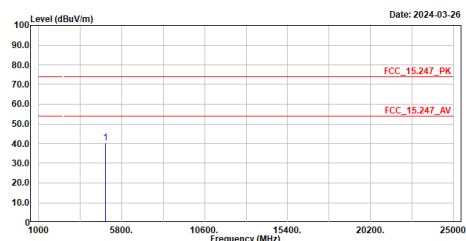


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	40.20	74.00	-33.80	47.05	-6.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Rock

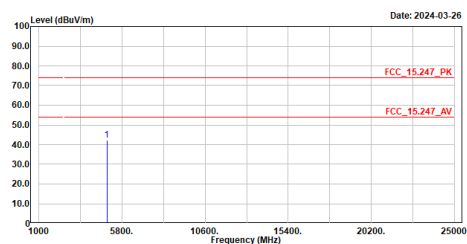

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	42.34	74.00	-31.66	48.94	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_b_2462MHz
Test by :Rock

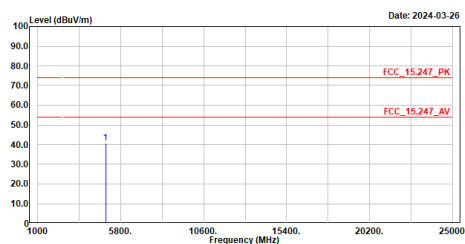

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	40.65	74.00	-33.35	47.25	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Rock

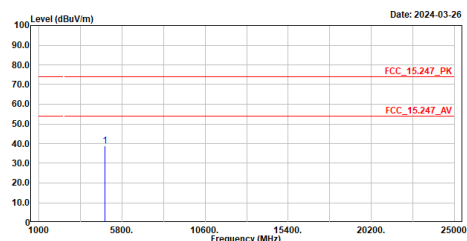

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	38.85	74.00	-35.15	45.94	-7.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2412MHz
Test by :Rock

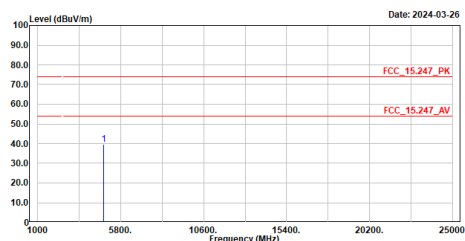

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4824.000	39.55	74.00	-34.45	46.64	-7.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2437MHz
Test by :Rock

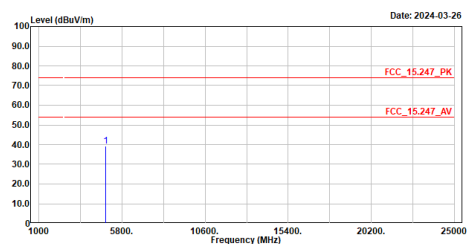

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	39.33	74.00	-34.67	46.18	-6.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2437MHz
Test by :Rock

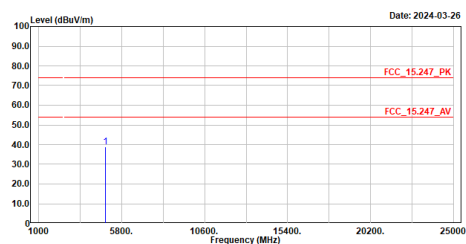

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4874.000	38.75	74.00	-35.25	45.60	-6.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Rock

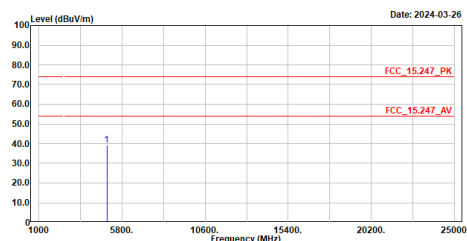

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	39.31	74.00	-34.69	45.91	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_g_2462MHz
Test by :Rock

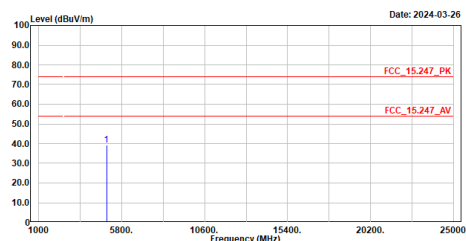

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4924.000	39.37	74.00	-34.63	45.97	-6.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2412MHz
Test by :Rock

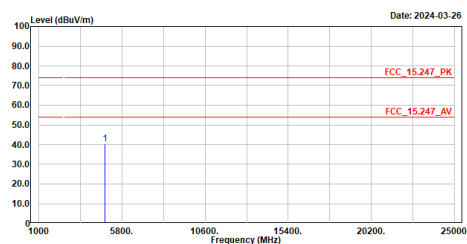

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2412MHz
Test by :Rock

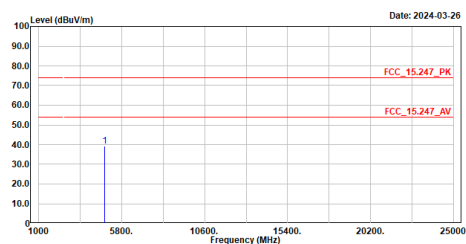

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2437MHz
Test by :Rock

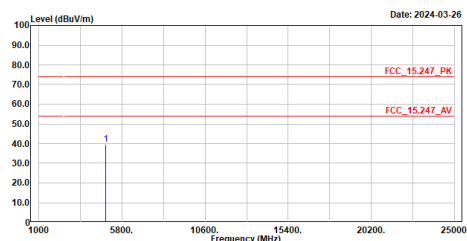

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2437MHz
Test by :Rock

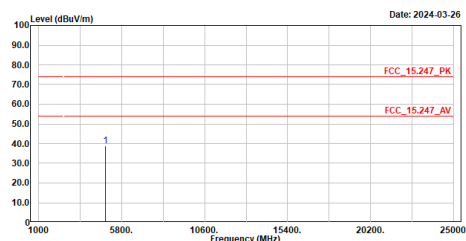

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Rock

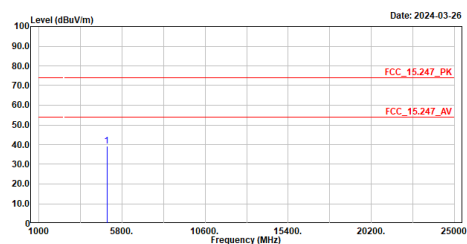

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n20_2462MHz
Test by :Rock

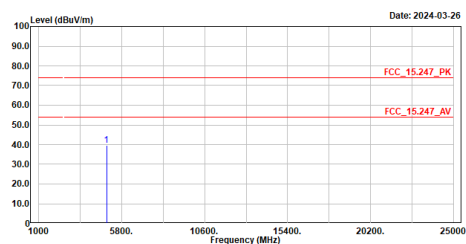

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2422MHz
Test by :Rock

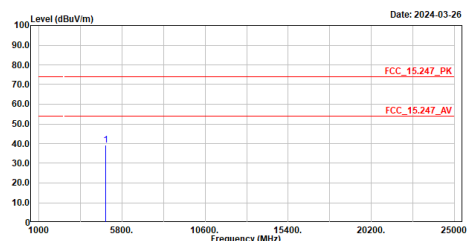

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2422MHz
Test by :Rock

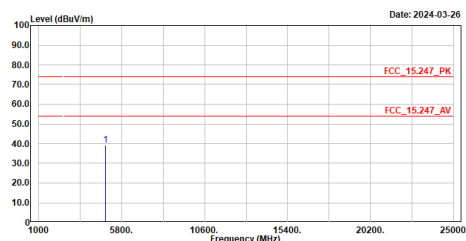

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2437MHz
Test by :Rock

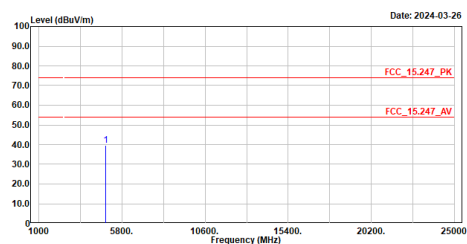


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4874.000	39.62	74.00	-34.38	46.47	-6.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2437MHz
Test by :Rock

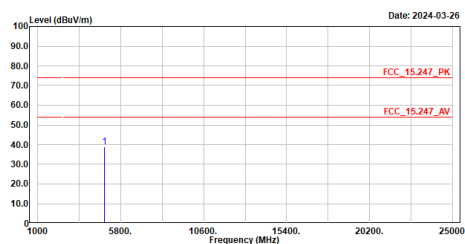


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.72	74.00	-35.28	45.57	-6.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Rock

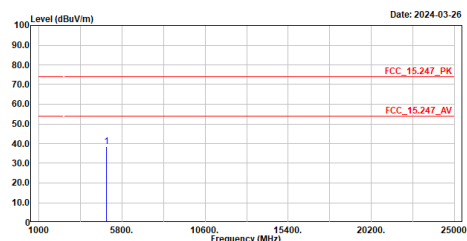


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4904.000	38.50	74.00	-35.50	45.15	-6.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_n40_2452MHz
Test by :Rock

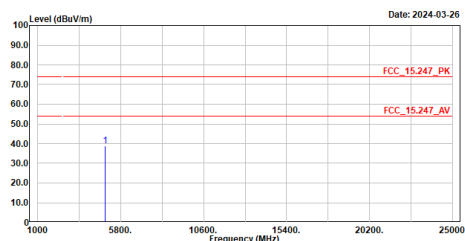


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4904.000	38.97	74.00	-35.03	45.62	-6.65	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz
Test by :Rock

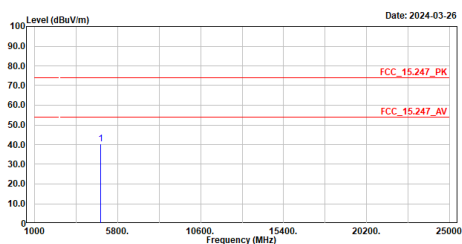


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	40.48	74.00	-33.52	47.57	-7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2412MHz
Test by :Rock

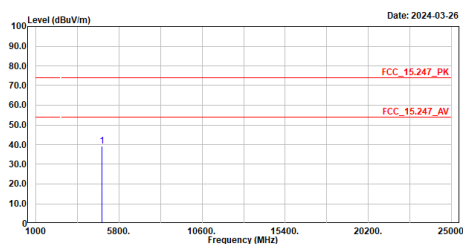


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4824.000	39.26	74.00	-34.74	46.35	-7.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2437MHz
Test by :Rock

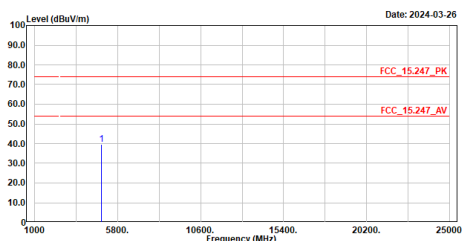


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	39.80	74.00	-34.20	46.65	-6.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2437MHz
Test by :Rock

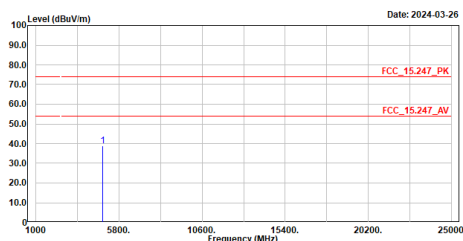


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.86	74.00	-35.14	45.71	-6.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz
Test by :Rock

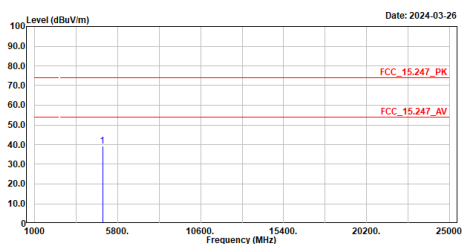

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax20_2462MHz
Test by :Rock

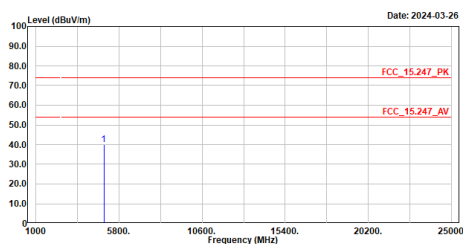

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz
Test by :Rock

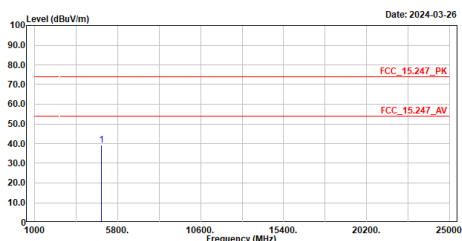

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2422MHz
Test by :Rock

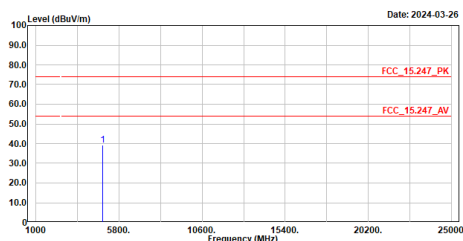

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Rock

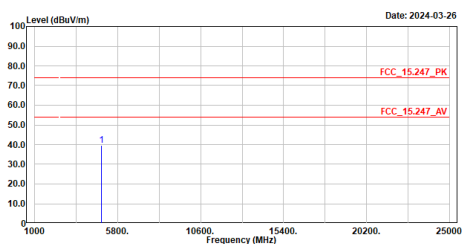

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4874.000	39.79	74.00	-34.21	46.64	-6.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Rock

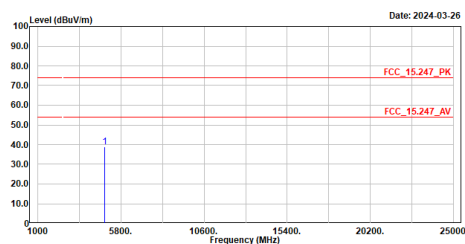

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4874.000	38.87	74.00	-35.13	45.72	-6.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz
Test by :Rock

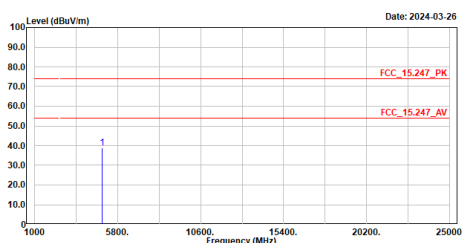

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4904.000	38.83	74.00	-35.17	45.48	-6.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2452MHz
Test by :Rock

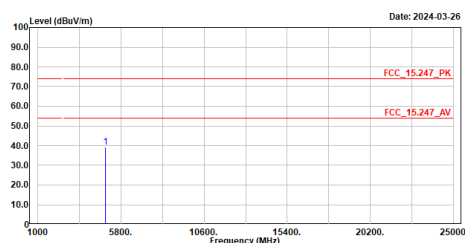

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	4904.000	39.11	74.00	-34.89	45.76	-6.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2437MHz
Test by :Rock

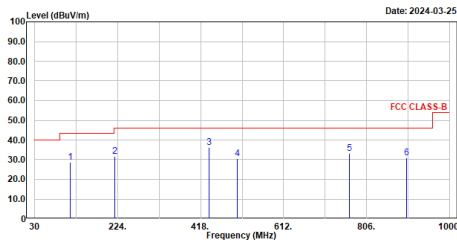


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	112.547	28.70	43.50	-14.80	55.13	-26.43	QP
2	217.210	31.71	46.00	-14.29	57.62	-25.91	QP
3	437.400	36.28	46.00	-9.72	55.04	-18.76	QP
4	583.942	30.59	46.00	-15.41	48.07	-17.48	QP
5	766.715	33.05	46.00	-12.95	45.43	-12.38	QP
6	899.993	30.98	46.00	-15.02	41.93	-10.95	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ax40_2437MHz
Test by :Rock

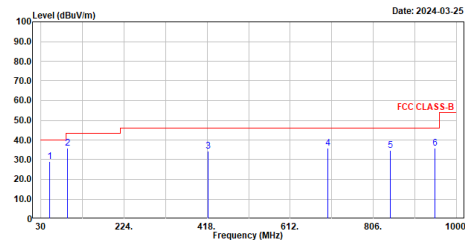


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	49.885	29.08	40.00	-10.92	52.13	-23.05	QP
2	92.953	35.82	43.50	-7.68	64.65	-28.83	QP
3	420.716	34.50	46.00	-11.50	54.02	-19.52	QP
4	699.979	35.88	46.00	-10.12	49.50	-13.62	QP
5	845.867	34.84	46.00	-11.16	46.33	-11.49	QP
6	950.045	35.87	46.00	-10.13	46.04	-10.17	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2412MHz
Test by :Rock

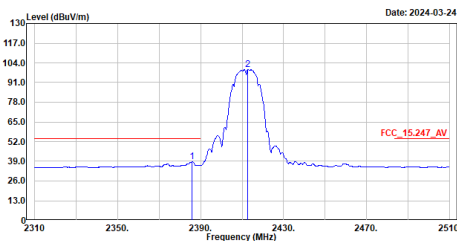


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.000	38.65	54.00	-15.35	32.57	6.08	Average
2	2412.800	99.60	-----	-----	93.59	6.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2412MHz
Test by :Rock

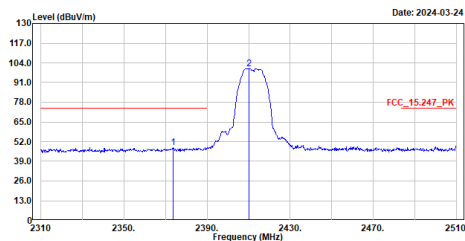


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2373.800	48.03	74.00	-25.97	42.02	6.01	Peak
2	2410.200	100.28	-----	-----	94.27	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2412MHz
Test by :Rock

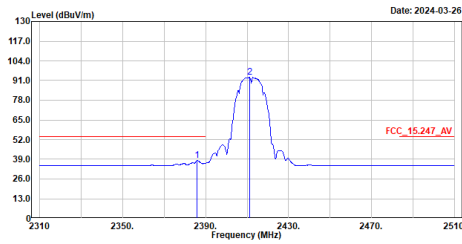


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2386.000	38.07	54.00	-15.93	31.99	6.08	Average
2	2411.200	93.19	-----	-----	87.18	6.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2412MHz
Test by :Rock

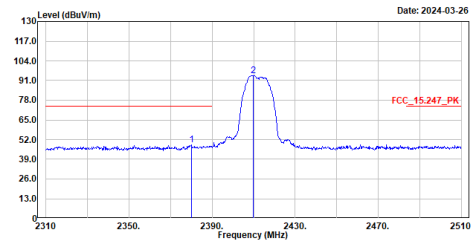


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2380.000	48.33	74.00	-25.67	42.25	6.08	Peak
2	2409.800	94.15	-----	-----	88.14	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Rock

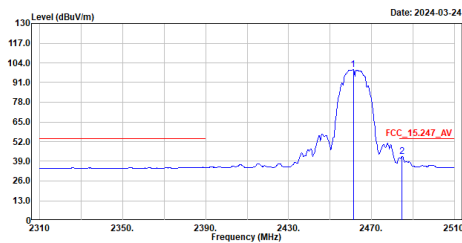


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2461.200	99.42	-----	-----	93.48	5.94	Average
2	2484.000	42.40	54.00	-11.60	36.41	5.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_b_2462MHz
Test by :Rock

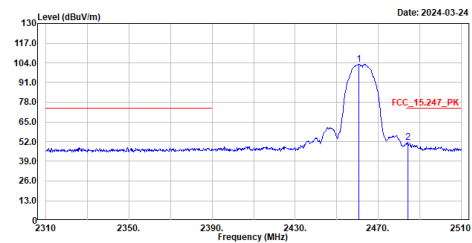


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2460.600	102.99	-----	-----	97.05	5.94	Peak
2	2484.200	51.36	74.00	-22.64	45.38	5.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Rock

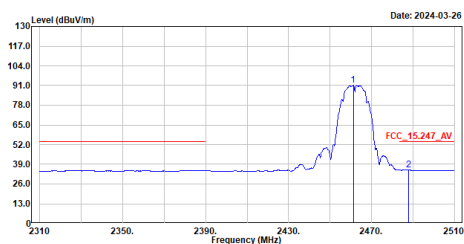


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	91.13	-----	-----	85.19	5.94	Average
2	2487.800	35.29	54.00	-18.71	29.26	6.03	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_b_2462MHz
Test by :Rock

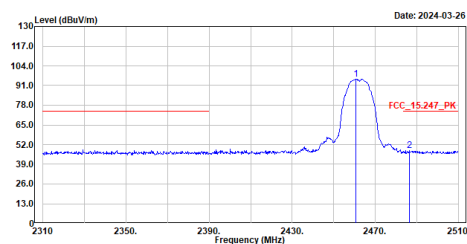


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.600	95.25	-----	-----	89.31	5.94	Peak
2	2486.400	48.07	74.00	-25.93	42.07	6.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Rock

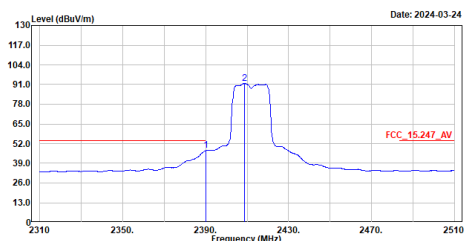


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	47.37	54.00	-6.63	41.28	6.09	Average
2	2408.600	91.62	-----	-----	85.61	6.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2412MHz
Test by :Rock

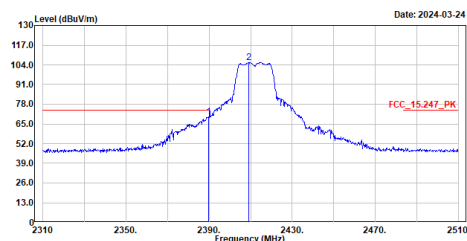


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.800	69.55	74.00	-4.45	63.46	6.09	Peak
2	2409.000	105.61	-----	-----	99.60	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2412MHz
Test by :Rock

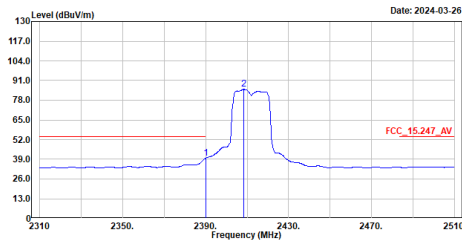


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	39.75	54.00	-14.25	33.66	6.09	Average
2	2406.400	85.20	-----	-----	79.19	6.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2412MHz
Test by :Rock

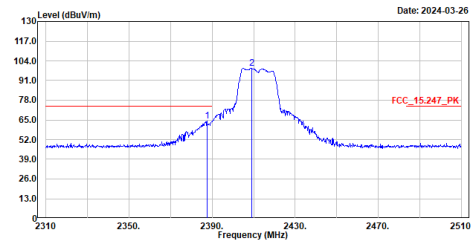


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2387.600	64.05	74.00	-9.95	57.96	6.09	Peak
2	2409.000	99.10	-----	-----	93.09	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Rock

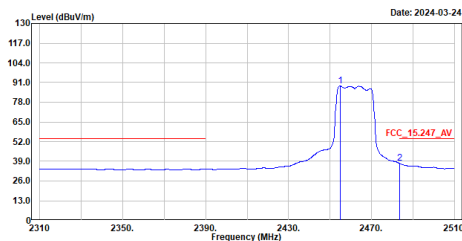


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2454.800	88.93	-----	-----	82.99	5.94	Average
2	2403.600	37.54	54.00	-16.46	31.56	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_g_2462MHz
Test by :Rock

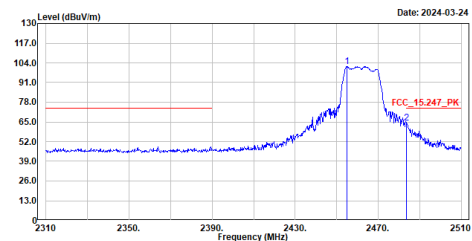


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2455.000	101.62	-----	-----	95.68	5.94	Peak
2	2403.600	64.04	74.00	-9.96	58.06	5.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2462MHz
Test by :Rock

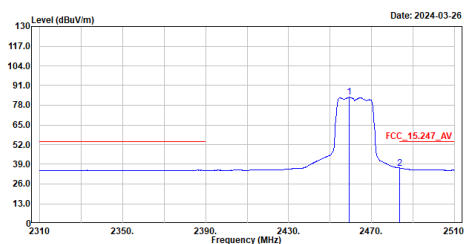


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.400	83.20	-----	-----	77.26	5.94	Average
2	2483.600	36.50	54.00	-17.50	30.52	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_g_2462MHz
Test by :Rock

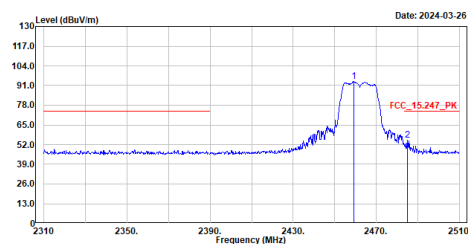


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2459.200	93.62	-----	-----	87.68	5.94	Peak
2	2485.000	54.99	74.00	-19.01	49.00	5.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2412MHz
Test by :Rock

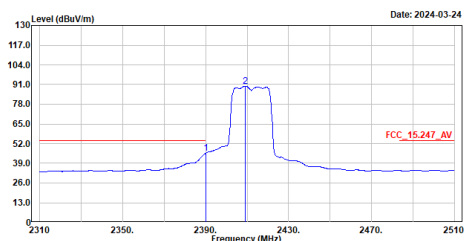


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	45.58	54.00	-8.42	39.49	6.09	Average
2	2409.200	89.86	-----	-----	83.85	6.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2412MHz
Test by :Rock

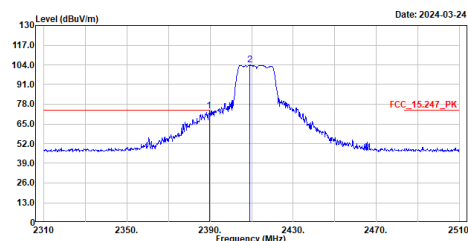


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2389.600	73.39	74.00	-0.61	67.30	6.09	Peak
2	2409.200	104.11	-----	-----	98.10	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2412MHz
Test by :Rock

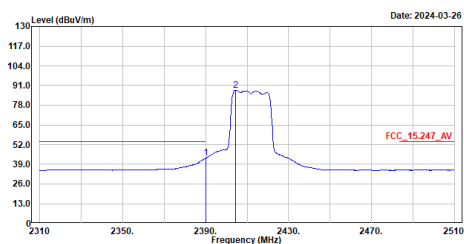


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	42.97	54.00	-11.03	36.88	6.09	Average
2	2404.400	87.94	-----	-----	81.94	6.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2412MHz
Test by :Rock

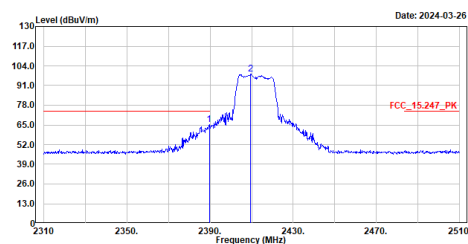


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	65.19	74.00	-8.81	59.10	6.09	Peak
2	2409.600	98.43	-----	-----	92.42	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Rock

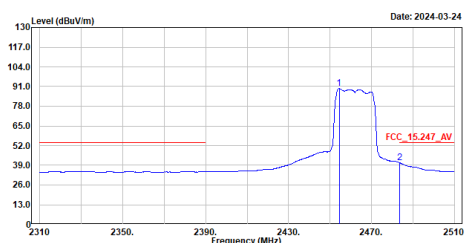


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2454.000	89.62	-----	-----	83.68	5.94	Average
2	2403.600	40.65	54.00	-13.35	34.67	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n20_2462MHz
Test by :Rock

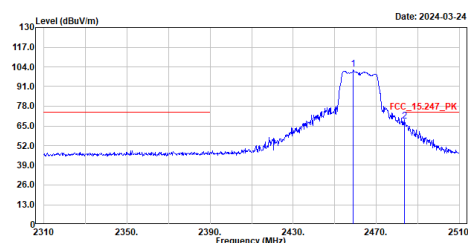


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.000	102.32	-----	-----	96.38	5.94	Peak
2	2403.600	68.07	74.00	-5.93	62.09	5.98	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Rock

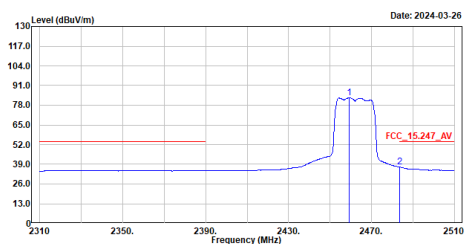


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.400	82.88	-----	-----	76.94	5.94	Average
2	2483.600	37.17	54.00	-16.83	31.19	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n20_2462MHz
Test by :Rock

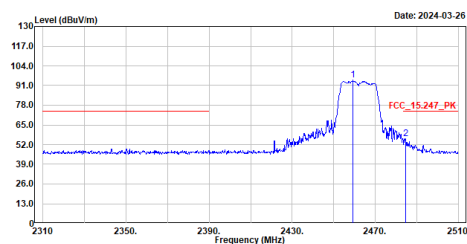


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.400	94.48	-----	-----	88.54	5.94	Peak
2	2484.800	56.08	74.00	-17.92	50.09	5.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2422MHz
Test by :Rock

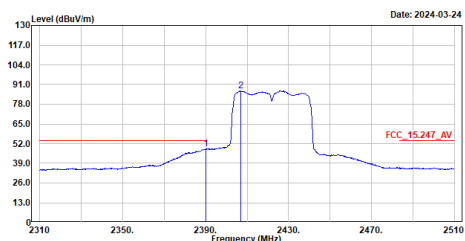


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	48.41	54.00	-5.59	42.32	6.09	Average
2	2406.800	86.89	-----	-----	80.89	6.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2422MHz
Test by :Rock

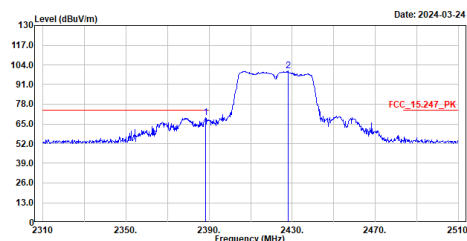


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.400	69.02	74.00	-4.98	62.93	6.09	Peak
2	2428.000	100.08	-----	-----	94.07	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Rock

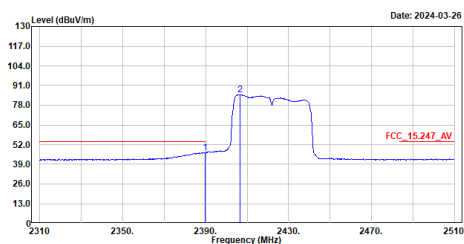


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	46.85	54.00	-7.15	40.76	6.09	Average
2	2406.600	85.06	-----	-----	79.06	6.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2422MHz
Test by :Rock

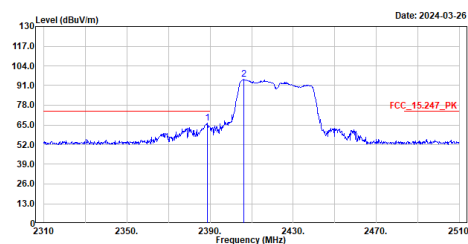


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.600	66.17	74.00	-7.83	60.08	6.09	Peak
2	2406.200	94.94	-----	-----	88.94	6.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Rock

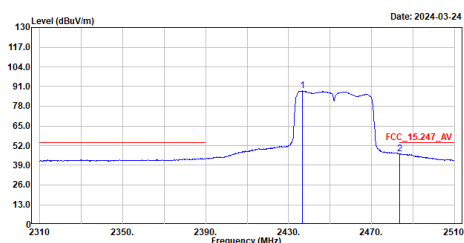


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2436.800	88.09	-----	-----	82.21	5.88	Average
2	2403.600	46.70	54.00	-7.30	40.72	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_n40_2452MHz
Test by :Rock

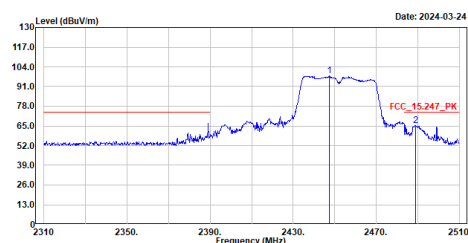


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2447.400	98.07	-----	-----	92.17	5.90	Peak
2	2458.800	65.36	74.00	-8.64	59.32	6.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2452MHz
Test by :Rock

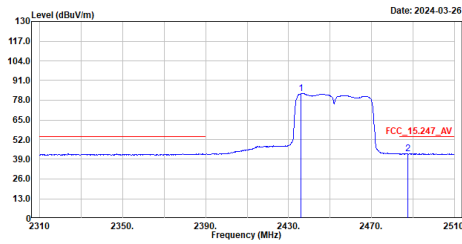


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2435.800	82.39	54.00	-11.20	76.49	5.90	Average
2	2487.400	42.88	54.00	-11.20	36.79	6.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_n40_2452MHz
Test by :Rock

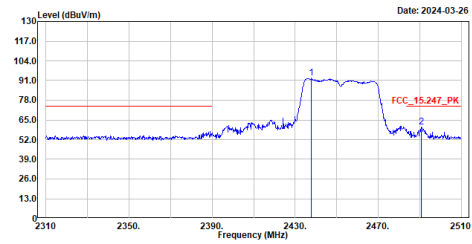


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2437.800	92.56	74.00	-13.65	86.70	5.86	Peak
2	2498.800	68.35	74.00	-13.65	54.38	6.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz
Test by :Rock

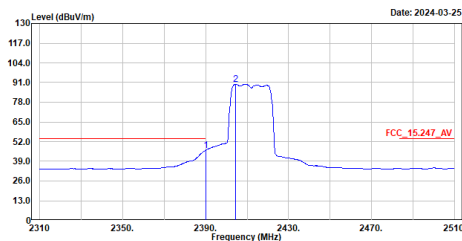


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2390.000	46.27	54.00	-7.73	48.18	6.09	Average
2	2404.400	89.99	54.00	-7.73	83.99	6.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2412MHz
Test by :Rock

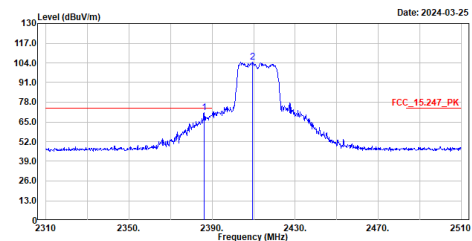


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2386.200	71.01	74.00	-2.99	64.93	6.08	Peak
2	2409.600	104.49	74.00	-2.99	98.48	6.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz
Test by :Rock

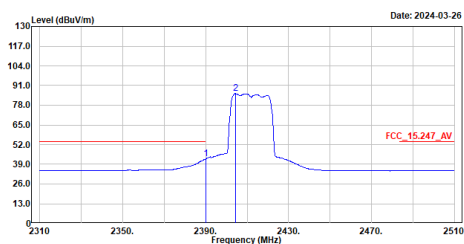


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	42.47	54.00	-11.53	36.38	6.09	Average
2	2404.400	85.70	-----	-----	79.70	6.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2412MHz
Test by :Rock

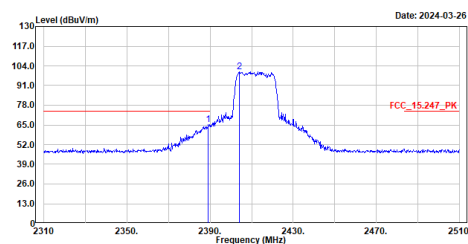


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.200	65.25	74.00	-8.75	59.16	6.09	Peak
2	2404.200	100.21	-----	-----	94.21	6.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz
Test by :Rock

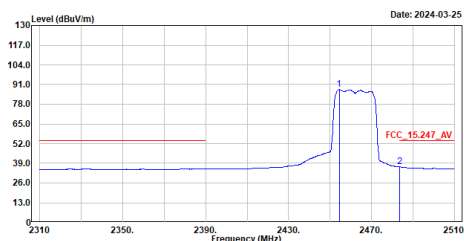


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2454.400	87.67	-----	-----	81.73	5.94	Average
2	2403.600	36.64	54.00	-17.36	30.66	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax20_2462MHz
Test by :Rock

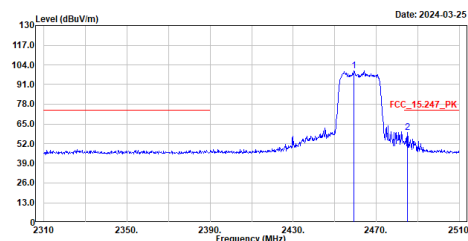


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2459.400	100.11	-----	-----	94.17	5.94	Peak
2	2403.000	59.23	74.00	-14.77	53.24	5.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2462MHz
Test by :Rock

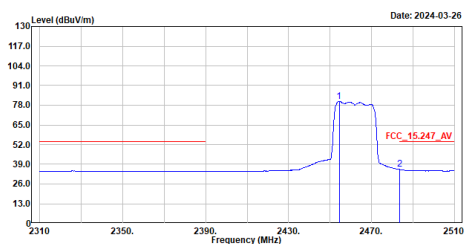


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2454.400	80.67	-----	-----	74.73	5.94	Average
2	2483.600	35.61	54.00	-18.39	29.63	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax20_2462MHz
Test by :Rock

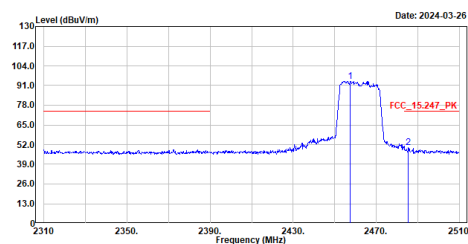


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2457.600	93.74	-----	-----	87.80	5.94	Peak
2	2485.400	50.13	74.00	-23.87	44.14	5.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz
Test by :Rock

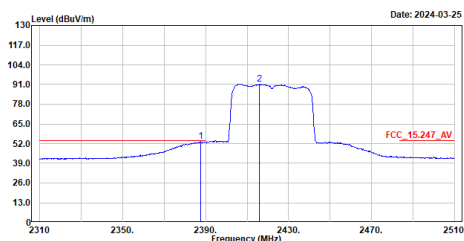


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2387.600	53.25	54.00	-0.75	47.16	6.09	Average
2	2416.000	91.26	-----	-----	85.25	6.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2422MHz
Test by :Rock

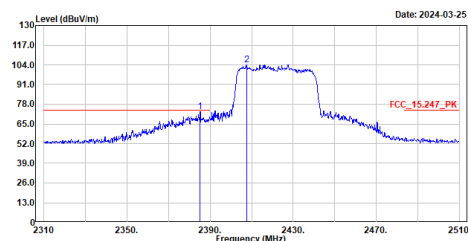


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2385.200	73.24	74.00	-0.76	67.16	6.08	Peak
2	2407.800	104.22	-----	-----	98.22	6.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2422MHz
Test by :Rock

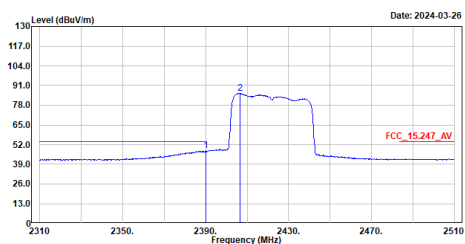


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2390.000	47.95	54.00	-6.05	41.86	6.09	Average
2	2406.600	85.98	-----	-----	79.98	6.00	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2422MHz
Test by :Rock

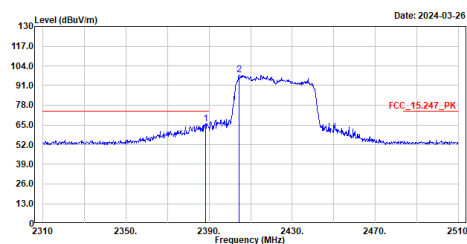


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2388.400	65.88	74.00	-8.12	59.79	6.09	Peak
2	2404.400	98.11	-----	-----	92.11	6.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz
Test by :Rock

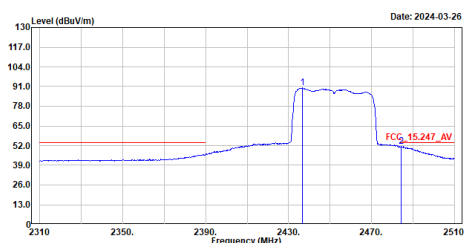


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2436.600	90.10	-----	-----	84.21	5.89	Average
2	2404.400	51.42	54.00	-2.58	45.44	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ax40_2452MHz
Test by :Rock

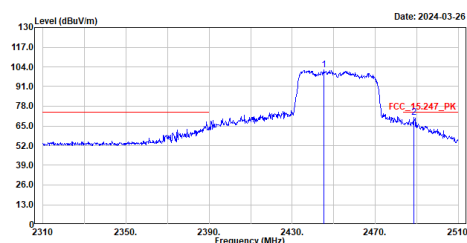


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2445.200	102.13	-----	-----	96.25	5.88	Peak
2	2408.600	70.75	74.00	-3.25	64.71	6.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2452MHz
Test by :Rock

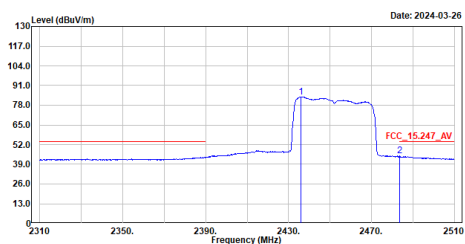


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2435.000	83.59	-----	-----	77.69	5.90	Average
2	2483.600	44.40	54.00	-9.60	38.42	5.98	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_ax40_2452MHz
Test by :Rock

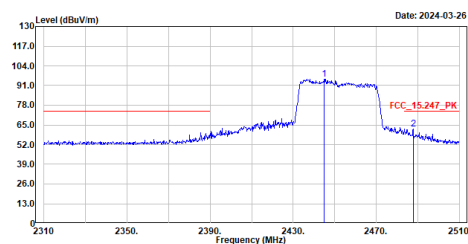


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2445.000	95.23	-----	-----	89.35	5.88	Peak
2	2487.000	62.40	74.00	-11.60	56.37	6.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5180MHz
Test by :Rock

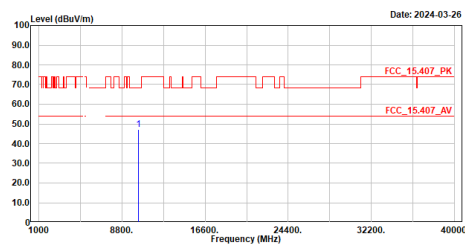


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	47.01	68.22	-21.21	44.23	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5180MHz
Test by :Rock

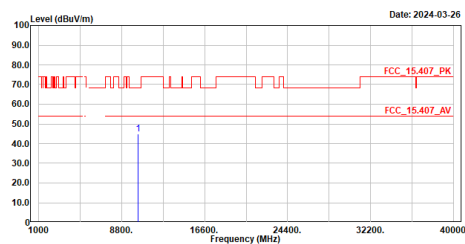


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	44.90	68.22	-23.32	42.12	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5220MHz
Test by :Rock

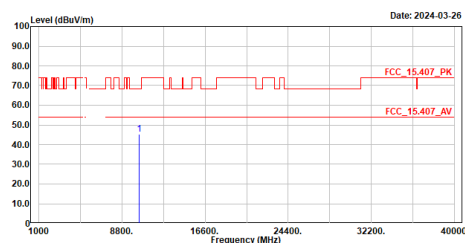


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	45.36	68.22	-22.86	42.72	2.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5220MHz
Test by :Rock

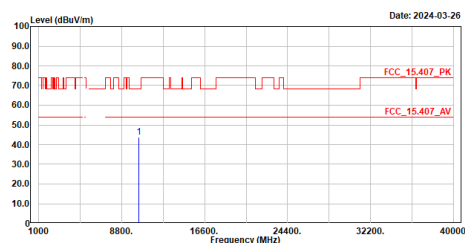


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	43.71	68.22	-24.51	41.07	2.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5240MHz
Test by :Rock

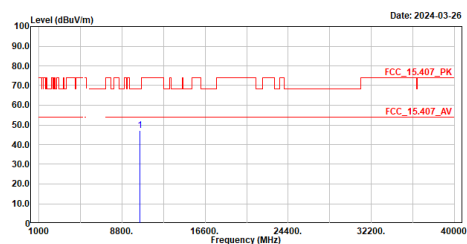


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	10480.000	47.09	68.22	-21.13	44.31	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5240MHz
Test by :Rock

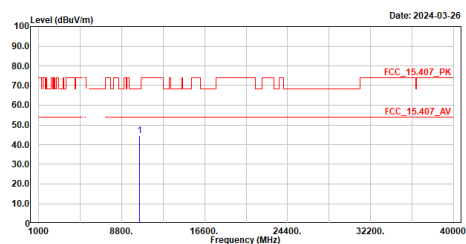


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	10480.000	44.35	68.22	-23.87	41.57	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5260MHz
Test by :Rock

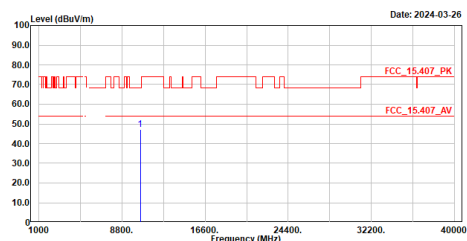


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	10520.000	47.10	68.22	-21.12	44.20	2.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5260MHz
Test by :Rock

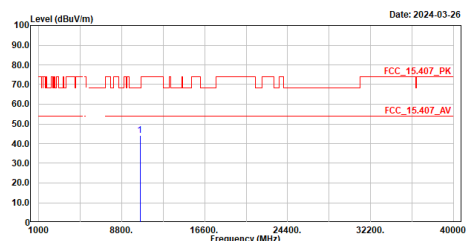


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	10520.000	44.16	68.22	-24.06	41.26	2.90	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5300MHz
Test by :Rock

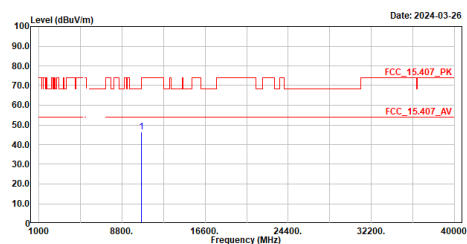

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	46.58	74.00	-27.42	43.57	3.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5300MHz
Test by :Rock

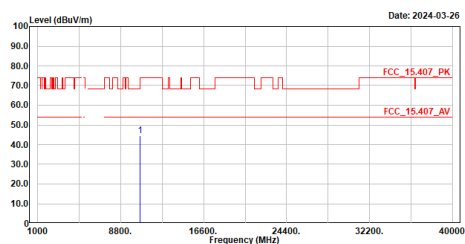

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	44.42	74.00	-29.58	41.41	3.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5320MHz
Test by :Rock

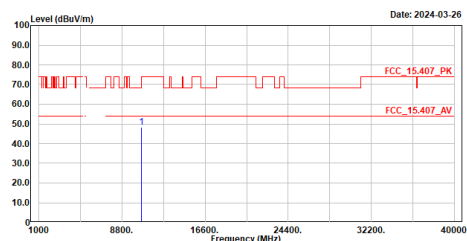

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	48.22	74.00	-25.78	45.15	3.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5320MHz
Test by :Rock

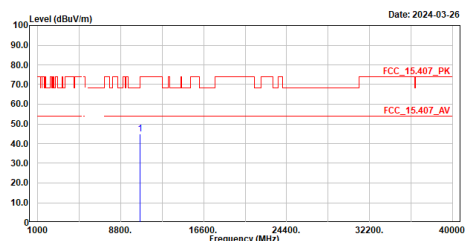

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10640.000	44.97	74.00	-29.03	41.90	3.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5500MHz
Test by :Rock

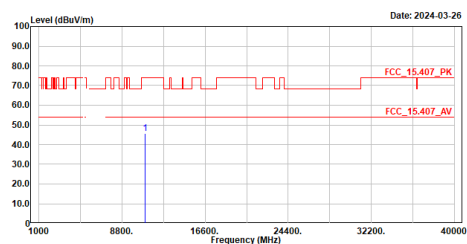


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11000.000	45.70	74.00	-28.30	42.41	3.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5500MHz
Test by :Rock

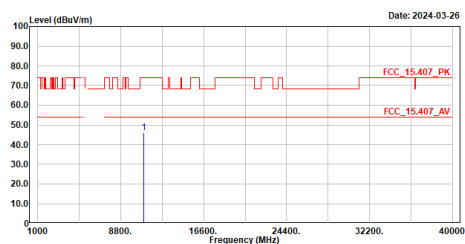


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11000.000	45.99	74.00	-28.01	42.70	3.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5500MHz
Test by :Rock

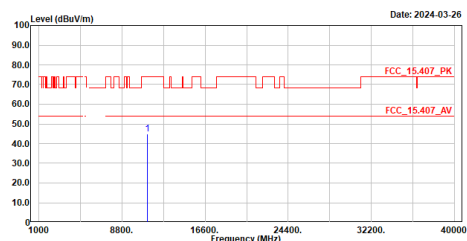


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11160.000	45.03	74.00	-28.97	41.34	3.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5500MHz
Test by :Rock

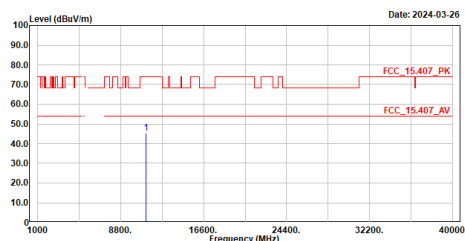


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11160.000	45.45	74.00	-28.55	41.76	3.69	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5700MHz
Test by :Rock

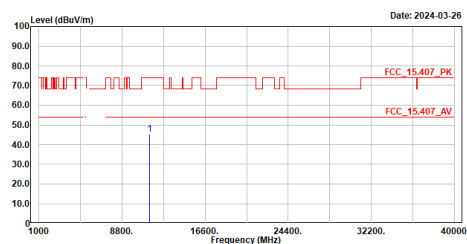

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11400.000	45.42	74.00	-28.58	41.30	4.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5700MHz
Test by :Rock

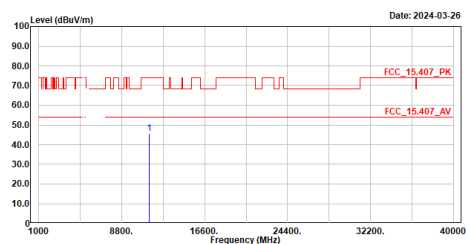

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11400.000	45.63	74.00	-28.37	41.51	4.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5720MHz
Test by :Rock

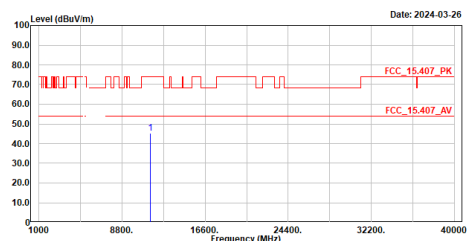

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11440.000	45.32	74.00	-28.68	41.09	4.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5720MHz
Test by :Rock

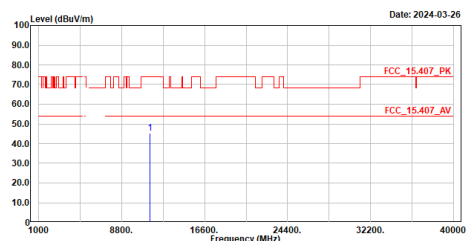

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11440.000	45.19	74.00	-28.81	40.96	4.23	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5745MHz
Test by :Rock

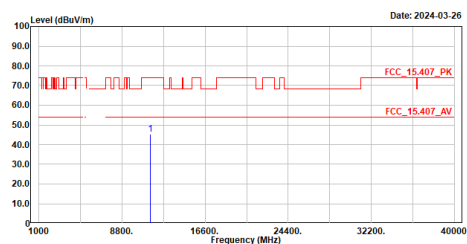


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11490.000	45.17	74.00	-28.83	40.98	4.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5745MHz
Test by :Rock

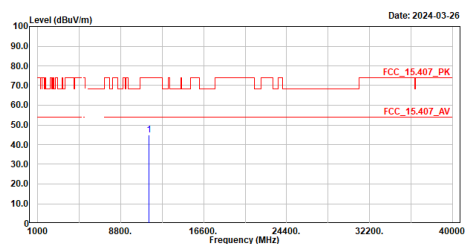


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11490.000	44.72	74.00	-29.28	40.53	4.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5785MHz
Test by :Rock

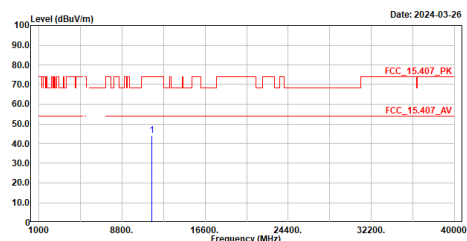


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11570.000	44.30	74.00	-29.70	40.06	4.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5785MHz
Test by :Rock

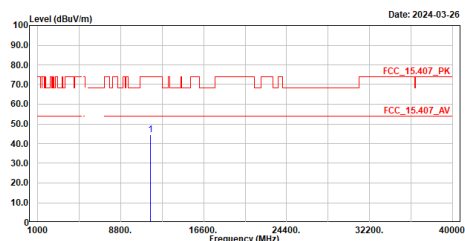


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11570.000	44.59	74.00	-29.41	40.35	4.24	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5825MHz
Test by :Rock

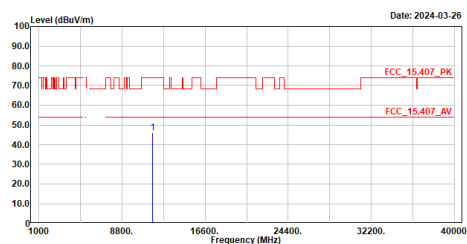


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11650.000	46.21	74.00	-27.79	42.03	4.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5825MHz
Test by :Rock

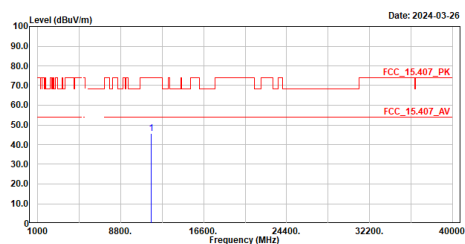


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	11650.000	45.63	74.00	-28.37	41.45	4.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_a_5825MHz
Test by :Rock

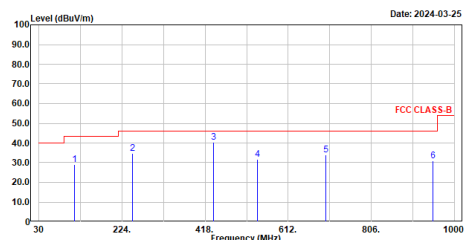


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	112.547	29.09	43.50	-14.41	55.52	-26.43	QP
2	247.765	34.83	46.00	-11.17	59.32	-24.49	QP
3	437.400	40.29	46.00	-5.71	59.05	-18.76	QP
4	540.026	31.73	46.00	-14.27	48.56	-16.83	QP
5	699.979	34.03	46.00	-11.97	47.65	-13.62	QP
6	950.045	31.04	46.00	-14.96	41.21	-10.17	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_a_5825MHz
Test by :Rock

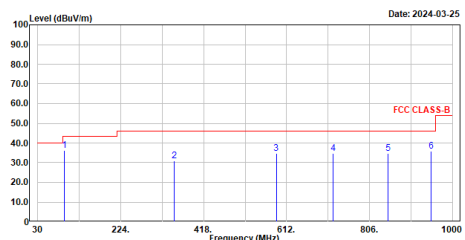


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	92.662	36.06	43.50	-7.44	64.98	-28.92	QP
2	350.003	30.90	46.00	-15.10	52.40	-21.50	QP
3	587.944	34.79	46.00	-11.21	50.18	-15.39	QP
4	720.058	34.78	46.00	-11.22	48.13	-13.35	QP
5	850.038	34.61	46.00	-11.39	46.01	-11.40	QP
6	950.045	35.87	46.00	-10.13	46.04	-10.17	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Rock

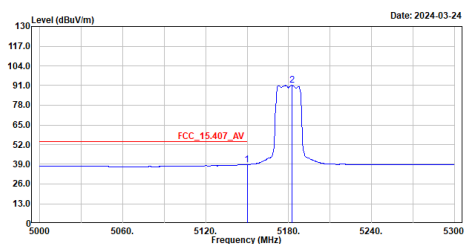


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	38.76	54.00	-15.24	24.30	14.46	Average
2	5182.400	91.12	-----	-----	76.69	14.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5180MHz
Test by :Rock

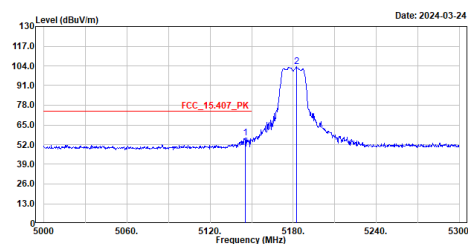


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5145.500	56.61	74.00	-17.39	42.15	14.46	Peak
2	5182.400	103.30	-----	-----	88.87	14.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Rock

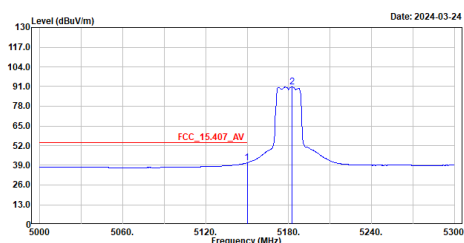


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	40.73	54.00	-13.27	26.27	14.46	Average
2	5182.400	90.71	-----	-----	76.28	14.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5180MHz
Test by :Rock

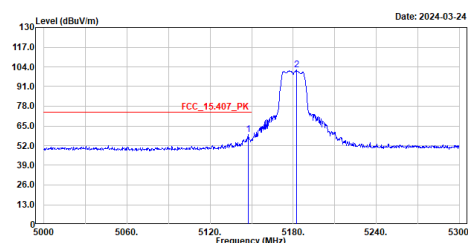


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.600	59.48	74.00	-14.52	45.02	14.46	Peak
2	5182.400	101.93	-----	-----	87.50	14.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5320MHz
Test by :Rock

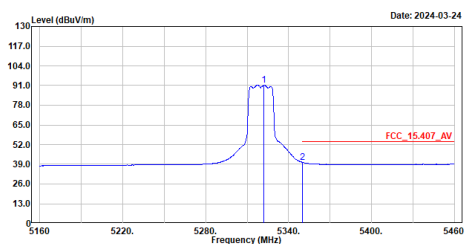


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5322.300	91.10	-----	-----	76.70	14.40	Average
2	5350.200	40.28	54.00	-13.72	25.91	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5320MHz
Test by :Rock

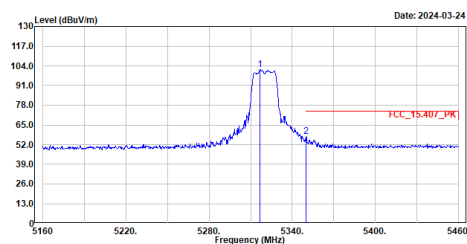


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5316.900	101.40	-----	-----	87.00	14.40	Peak
2	5350.200	57.36	74.00	-16.64	42.99	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5320MHz
Test by :Rock

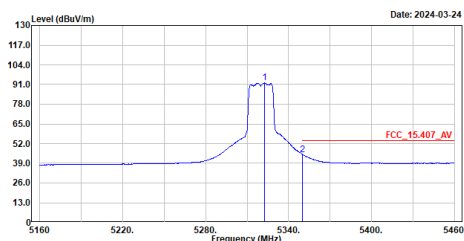


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5322.600	91.98	-----	-----	77.59	14.39	Average
2	5350.200	44.77	54.00	-9.23	30.40	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5320MHz
Test by :Rock

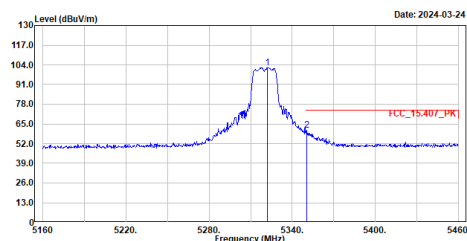


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5322.000	102.04	-----	-----	87.64	14.40	Peak
2	5350.500	60.78	74.00	-13.22	46.41	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5500MHz
Test by :Rock

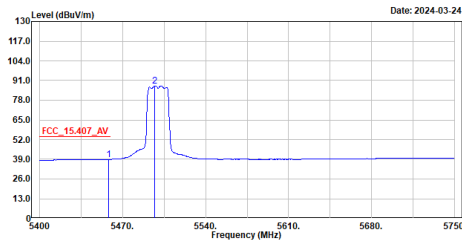


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5458.459	38.96	54.00	-15.04	24.29	14.67	Average
2	5497.300	87.47	-----	-----	72.59	14.88	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5500MHz
Test by :Rock

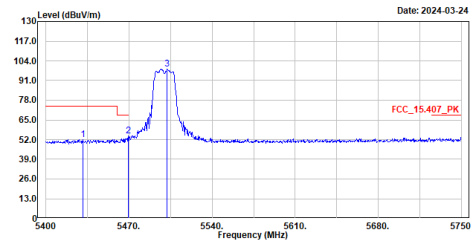


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5431.150	51.98	74.00	-22.02	37.46	14.52	Peak
2	5469.650	54.52	68.22	-13.70	39.78	14.74	Peak
3	5502.200	98.63	-----	-----	83.72	14.91	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5500MHz
Test by :Rock

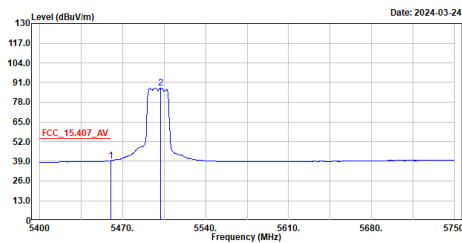


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5459.850	39.41	54.00	-14.59	24.73	14.68	Average
2	5501.850	87.27	-----	-----	72.36	14.91	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5500MHz
Test by :Rock

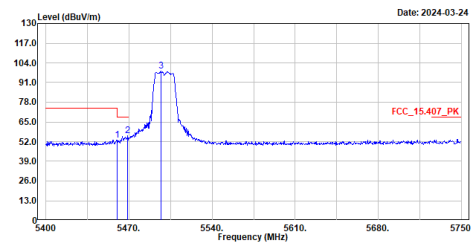


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5459.850	53.17	74.00	-20.83	38.49	14.68	Peak
2	5468.950	56.13	68.22	-12.09	41.40	14.73	Peak
3	5496.950	98.43	-----	-----	83.55	14.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5700MHz
Test by :Rock

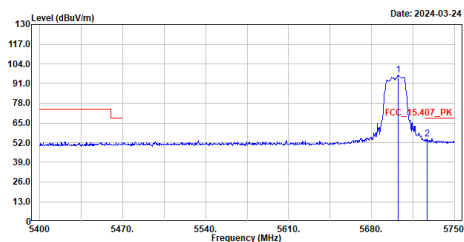


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5702.750	96.44	-----	-----	80.35	16.09	Peak
2	5726.900	54.51	68.22	-13.71	38.30	16.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5700MHz
Test by :Rock

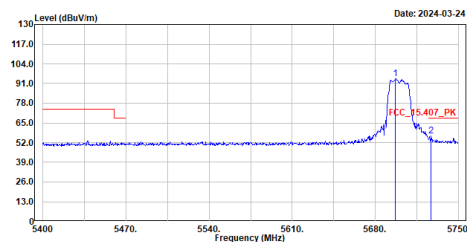


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5697.150	94.14	-----	-----	78.08	16.06	Peak
2	5726.900	56.47	68.22	-11.75	40.26	16.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5745MHz
Test by :Rock

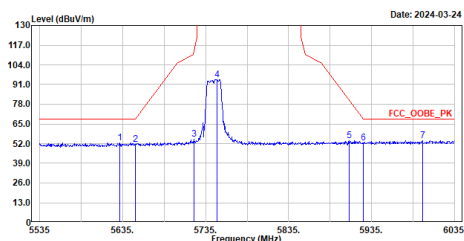


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5631.500	52.73	68.20	-15.47	37.23	15.50	Peak
2	5650.000	51.45	68.21	-16.76	35.81	15.64	Peak
3	5721.000	54.76	113.08	-58.32	38.58	16.18	Peak
4	5748.500	94.40	-----	-----	78.09	16.31	Peak
5	5908.000	54.00	80.78	-26.78	37.60	16.40	Peak
6	5925.000	52.39	68.21	-15.82	35.96	16.43	Peak
7	5996.500	54.18	68.20	-14.02	37.68	16.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5745MHz
Test by :Rock

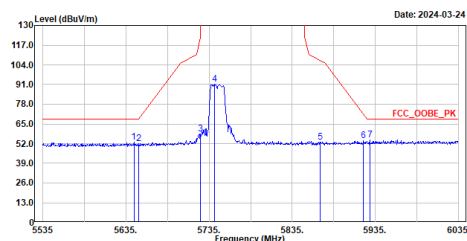


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5644.500	52.91	68.20	-15.29	37.31	15.60	Peak
2	5650.000	51.90	68.21	-16.31	36.26	15.64	Peak
3	5725.000	58.38	122.20	-63.82	42.18	16.20	Peak
4	5742.000	91.47	-----	-----	75.19	16.28	Peak
5	5868.500	53.10	107.02	-53.92	36.74	16.36	Peak
6	5921.000	54.17	71.17	-17.00	37.76	16.41	Peak
7	5928.500	54.51	68.20	-13.69	38.08	16.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Horizontal
mode :TX_a_5825MHz
Test by :Rock

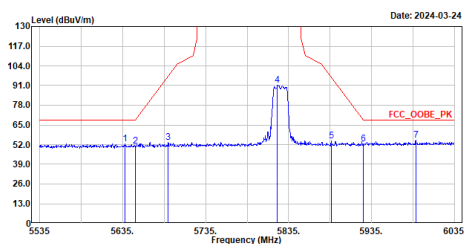


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5638.000	52.47	68.20	-15.73	36.92	15.55	Peak
2	5650.000	50.97	68.21	-17.24	35.33	15.64	Peak
3	5690.000	53.60	97.80	-44.20	37.60	16.00	Peak
4	5821.500	91.12	-----	-----	74.76	16.36	Peak
5	5886.500	54.30	96.69	-42.39	37.92	16.38	Peak
6	5925.000	52.25	68.21	-15.96	35.82	16.43	Peak
7	5988.500	54.81	68.20	-13.39	38.33	16.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,Vertical
mode :TX_a_5825MHz
Test by :Rock

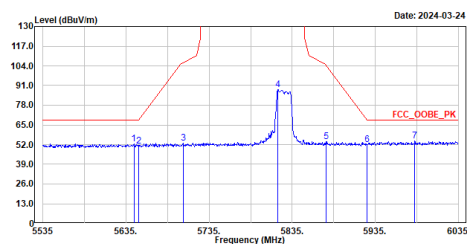


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5644.500	52.63	68.20	-15.57	37.03	15.60	Peak
2	5650.000	51.11	68.21	-17.10	35.47	15.64	Peak
3	5704.000	52.87	106.32	-53.45	36.77	16.10	Peak
4	5818.000	88.38	-----	-----	72.02	16.36	Peak
5	5875.500	53.96	104.83	-50.87	37.60	16.36	Peak
6	5925.000	51.96	68.21	-16.25	35.53	16.43	Peak
7	5982.500	54.26	68.20	-13.94	37.78	16.48	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5180MHz
Test by :Rock

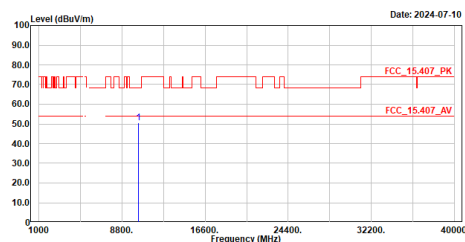


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	50.61	68.22	-17.61	47.83	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5180MHz
Test by :Rock

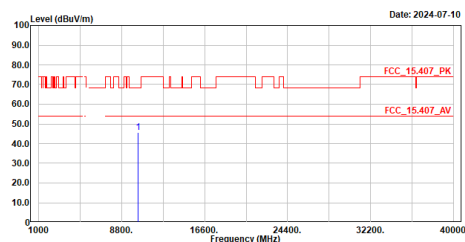


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10360.000	45.78	68.22	-22.44	43.00	2.78	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :TX_ac20_5220MHz
Test by :Rock

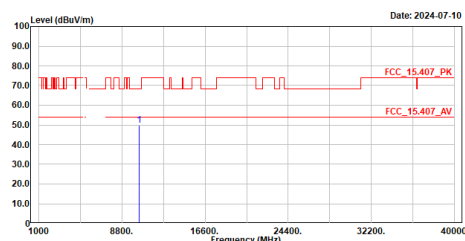


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	49.93	68.22	-18.29	47.29	2.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :TX_ac20_5220MHz
Test by :Rock

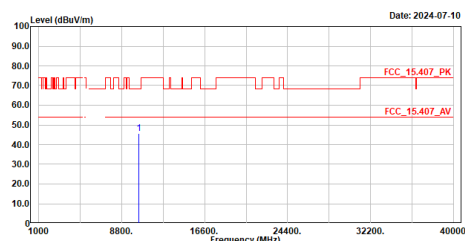

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10440.000	45.49	68.22	-22.73	42.85	2.64	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.