

# Test Report for the FCC and ISED (ANT+) Testing of a Zwift Hub Z004 to FCC Rule 47CFR 15.247 and ISED RSS-247 for Zwift Inc

Test Report number: C14775TR1

Project number: C7078

Author: .....

J Beevers MPhys(Hons), PhD

Radio Testing Team Lead

Checked: .....

M Render BSc(Hons), PhD, MIET

Senior Test Engineer

Approved: .....

M Render BSc(Hons), PhD, MIET

Senior Test Engineer

Issue	Description						Issue by	Date
1	Copy 1		Copy 2		PDF	√	MR	12 <sup>th</sup> August 2022

**This report shall not be reproduced, except in full without the prior written approval of Eurofins York**  
**The results contained in this report are only applicable to the apparatus tested.**



1574

**Registered Address:**

Eurofins York  
i54 Business Park, Valiant Way  
Wolverhampton, WV9 5GB, UK

Registered in England and Wales  
Company Reg. No. 6048589  
VAT Reg. No. GB 887 1276 83

**CONTENTS**

<b>Test Report Change History .....</b>	<b>6</b>
<b>Section 1      Test Location.....</b>	<b>7</b>
1.1      UKAS Accreditation.....	7
<b>Section 2      Customer Information .....</b>	<b>8</b>
<b>Section 3      Equipment Details.....</b>	<b>9</b>
3.1      Equipment Under Test (EUT).....	9
3.2      EUT Photographs.....	10
3.3      Configuration of EUT.....	10
3.4      EUT Monitoring/Auxiliary Equipment .....	10
3.5      Monitoring Software .....	10
<b>Section 4      Test Specifications .....</b>	<b>11</b>
4.1      Knowledge Database References.....	13
4.1.1      Radiated Emissions (30MHz to 1000MHz) .....	13
4.1.2      Radiated Emissions (1GHz to 40GHz) .....	13
4.2      Compliance Statement.....	13
<b>Section 5      Spurious Emission Results – Radiated and Conducted.....</b>	<b>14</b>
5.1      Test Specification.....	14
5.2      Procedure and Test Software Version .....	14
5.3      Radiated Emissions (30MHz to 1GHz) .....	15
5.3.1      Limits at 3m .....	15
5.3.2      Emissions measurements .....	15
5.3.3      Date of Test.....	15
5.3.4      Test Area.....	15
5.3.5      Tested by.....	15
5.3.6      Test Setup .....	16
5.3.7      Electric field emissions, 30MHz to 1GHz .....	17
5.4      Radiated Emissions (1GHz to 18GHz) .....	18
5.4.1      Limits.....	18
5.4.2      Receiver Settings .....	18
5.4.3      Emissions measurements .....	18
5.4.4      Date of Test.....	18
5.4.5      Test Area.....	18
5.4.6      Tested by.....	18
5.4.7      Test Setup .....	19
5.4.8      Exploratory Radiated Emission Maximization.....	20
5.4.9      Electric field emissions, 1GHz to 18GHz .....	21
5.4.10      Example field strength calculation .....	23
5.4.11      Sample Data .....	23
5.5      Radiated Emissions (18GHz to 26GHz) .....	24
5.5.1      Limits.....	24
5.5.2      Receiver Settings .....	24
5.5.3      Emissions measurements .....	24
5.5.4      Date of Test.....	24
5.5.5      Test Area.....	24
5.5.6      Tested by.....	24
5.5.7      Test Setup .....	24
5.5.8      Exploratory Radiated Emission Maximization.....	25
5.6      Conducted Spurious Emissions 30MHz to 25GHz .....	26
5.6.1      Limits.....	26
5.6.2      Emissions measurements .....	26
5.6.3      Date of Test.....	26
5.6.4      Test Area.....	26
5.6.5      Tested by.....	26
5.6.6      Test Setup .....	27
5.6.7      Test Results .....	27

5.6.8	Antenna port conducted emissions, 30MHz to 25GHz .....	28
<b>Section 6</b>	<b>6dB Bandwidth and 99% Occupied Bandwidth .....</b>	<b>29</b>
6.1	Test Specification .....	29
6.2	Procedure and Test Software Version .....	29
6.2.1	Emissions measurements .....	30
6.2.2	Date of Test .....	30
6.2.3	Test Area .....	30
6.2.4	Tested by .....	30
6.2.5	Test Setup .....	30
6.2.6	Test Results .....	30
<b>Section 7</b>	<b>Peak Output Power .....</b>	<b>33</b>
7.1	Test Specification .....	33
7.2	Procedure and Test Software Version .....	33
7.2.1	Emissions measurements .....	34
7.2.2	Date of Test .....	34
7.2.3	Test Area .....	34
7.2.4	Tested by .....	34
7.2.5	Test Setup .....	34
7.2.6	Test Result .....	35
<b>Section 8</b>	<b>Power Spectral Density .....</b>	<b>37</b>
8.1	Test Specification .....	37
8.2	Procedure and Test Software Version .....	37
8.2.1	Emissions measurements .....	38
8.2.2	Date of Test .....	38
8.2.3	Test Area .....	38
8.2.4	Tested by .....	38
8.2.5	Test Setup .....	38
8.2.6	Test Results .....	39
<b>Section 9</b>	<b>Band Edge Compliance .....</b>	<b>41</b>
9.1	Test Specification .....	41
9.2	Procedure and Test Software Version .....	41
9.2.1	Emissions measurements .....	42
9.2.2	Date of Test .....	42
9.2.3	Test Area .....	42
9.2.4	Tested by .....	42
9.2.5	Test Setup .....	42
9.2.6	Test Results .....	42
<b>Section 10</b>	<b>Mains Conducted Emissions .....</b>	<b>46</b>
10.1	Test Specification .....	46
10.2	Power Line Emission Limits .....	46
10.3	Receiver Settings .....	46
10.4	Procedure and Test Software Version .....	46
10.4.1	Date of Test .....	47
10.4.2	Test Area .....	47
10.4.3	Tested by .....	47
10.4.4	Test Setup .....	47
10.4.5	Mains Conducted Emissions Results .....	48
10.4.6	Correction factors .....	50
10.4.7	Sample Data .....	50
<b>Appendix A</b>	<b>EUT Test Photos .....</b>	<b>51</b>
<b>Appendix B</b>	<b>Test Equipment List .....</b>	<b>52</b>

**List of Figures**

Figure 1 Test Setup for E-Field Measurements from 30MHz to 1GHz .....	16
Figure 2 Electric field emissions Plot, 30MHz to 1GHz, ANT+ Operation.....	17
Figure 3 Test Setup for Final E-Field Measurements from 1GHz to 18GHz.....	19
Figure 4 Electric field emissions Plot, 1GHz to 18GHz. ANT+ operation.....	21
Figure 5 Electric field emissions Plot, 10GHz to 18GHz. 1m measurement distance. ANT+ operation .....	22
Figure 6 – manual investigation – ANT+ operation .....	25
Figure 7 Conducted emissions 30MHz to 25GHz. ANT+ operation.....	28
Figure 8 Bandwidth at 6dB Point. ANT+ operation.....	31
Figure 9 99% Occupied Bandwidth. ANT+ operation.....	32
Figure 10 Peak output power, ANT+ operation .....	36
Figure 11 Power spectral density, ANT+ operation.....	40
Figure 12 Band Edge Measurement – upper band edge - horizontal polarity.....	44
Figure 13 Band Edge Measurement – upper band edge - vertical polarity.....	44
Figure 14 Band Edge Measurement – lower band edge - horizontal polarity .....	45
Figure 15 Band Edge Measurement – lower band edge - vertical polarity .....	45
Figure 30: Test setup for Conducted Emissions on the AC power port .....	47
Figure 17: Mains Conducted Emissions Plot – ANT+ operation - Input Power 120V 60Hz Live .....	48
Figure 18: Mains conducted Emissions Plot – ANT+ operation - Input Power 120V 60Hz Neutral.....	49

**List of Tables**

Table 1 Electric Field Emissions Peaks, 30MHz to 1GHz. ANT+ Operation .....	17
Table 2 Frequencies identified during Exploratory Radiated Emission maximization.....	20
Table 3 Electric Field Emissions Peaks, 1GHz to 18GHz – ANT+ operation .....	21
Table 4 Electric Field Emissions Peaks, 10GHz to 18GHz. 1m measurement distance – ANT+ operation.	22
Table 5 Bandwidth Measurements .....	30
Table 6 Peak Output Power Measurements .....	35
Table 7 Peak Spectral Density Measurements .....	39
Table 8 Upper Band Edge, Peak detector measurements.....	43
Table 9 Upper Band Edge, average detector measurements.....	43
Table 10 Lower Band Edge, Peak detector measurements.....	43
Table 11 Lower Band Edge, average detector measurements.....	43
Table 12: Input Power Live Conducted Emissions Peaks – ANT+ operation .....	48
Table 13: Input Power Neutral Conducted Emissions Peaks – ANT+ operation .....	49

## Test Report Change History

Issue	Date	Modification Details
1	12 <sup>th</sup> August 2022	First Issue
2		
3		
4		
5		
6		
7		
8		
9		
10		

## Section 1 Test Location

All testing was performed at;

<b>Eurofins York</b>	Unit 5
	Speedwell Road
	Castleford
	WF10 5PY
<b>Tel:</b>	01977 731173
<b>Website</b>	<a href="http://www.yorkemc.co.uk">http://www.yorkemc.co.uk</a>
<b>UKAS Testing No.</b>	1574

### 1.1 UKAS Accreditation

Opinions and interpretations expressed herein are outside the scope of UKAS Accreditation.

Eurofins York latest accreditation schedule can be found at:

[http://www.ukas.org/testing/lab\\_detail.asp?lab\\_id=989&location\\_id=&vMenuOption=3](http://www.ukas.org/testing/lab_detail.asp?lab_id=989&location_id=&vMenuOption=3)

Eurofins York Castleford Laboratory, is an Accredited facility recognised by the Federal Communications Commission (FCC) for certification testing. The appropriate FCC Designation Number is UK2013, dated 1<sup>st</sup> March 2021.

Eurofins York Castleford Laboratory is recognised by ISED for certification testing.

ISED Assigned Code: 22959

**Section 2 Customer Information**

<b>Company name</b>	Zwift Inc
<b>Address</b>	111 W. Ocean Blvd
	Suite 1800
	Long Beach
	CA 90802
	USA
<b>Contact</b>	Xiaofei Zhang
<b>Email</b>	xiaofei.zhang@zwift.com



## Section 3 Equipment Details

### 3.1 Equipment Under Test (EUT)

<b>Date received:</b>	21 <sup>st</sup> July 2022		
<b>EUT name:</b>	Zwift Hub Z004		
<b>PMN:</b>	Zwift Hub Z004		
<b>HVIN:</b>	A.0		
<b>FVIN:</b>	v.3.1		
<b>FCC ID:</b>	2A4DF-Z004		
<b>ISED number:</b>	N/A		
<b>Serial no's:</b>	EMC Test 1 and EMC Test 2		
<b>EUT description:</b>	Zwift Hub Z004 is a stationary smart cycling training equipment designed for indoor exercises and it can be connected to the Zwift virtual training App via the built-in Bluetooth and ANT+ modules.		
<b>Antenna</b>	Integral Antenna		
<b>Transmission</b>	Digital Transmission System (DTS) ANT+		
<b>Modulation schemes</b>	GFSK		
<b>Operating frequency band</b>	2400MHz to 2483.5MHz		
<b>No of units tested:</b>	Two		
<b>EUT power:</b>	120 V, 60 Hz AC mains		
<b>Highest internal frequency:</b>	2.480GHz		
<b>Size of EUT (mm)</b>	Width: 500 mm	Depth: 620 mm	Height: 470 mm
<b>Mode/s of operation:</b>	Continuous transmit of packetized data on 2457MHz – this was fixed channel operation.		
<b>Test software:</b>	EUT flashed with test software to simulate the transmission of continuous packetized data.		
<b>Modifications incorporated during testing:</b>	The output power of the ANT+ transmitter was limit to +3dBm by the system firmware.		

Ports and Cables	Cable Length	Screened/ unscreened	Connected to
PSU cable	1.5m	unscreened	Power supply unit

### **3.2 EUT Photographs**

Photographs are supplied separately.

### **3.3 Configuration of EUT**

The apparatus was supplied in one single possible configuration.

### **3.4 EUT Monitoring/Auxiliary Equipment**

None.

### **3.5 Monitoring Software**

None. The channel required was selected via software prior to the testing.

**Section 4 Test Specifications****For USA:**

<b>Regulation / Test Standard</b>	<p>Regulation:</p> <p>Title 47 of the Code of Federal Regulations (CFR) Part 15 (47CFR15) Subpart C – Intentional Radiators</p> <p>Measurement standard:</p> <p>ANSI C63.10-2013 American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices</p>
-----------------------------------	---

<b>Requirement</b>	<b>FCC Rule Part</b>	<b>Comments</b>	<b>Result Summary</b>
6 dB Bandwidth	FCC § 15.247(a)(2)	Applies	Pass
Maximum peak conducted power	FCC § 15.247(b)(3)	Applies	Pass
Power spectral density	FCC § 15.247(e)	Applies	Pass
Band edge compliance	FCC § 15.247(d)	Applies	Pass
Conducted spurious emissions	FCC § 15.247(d)	Applies	Pass
Transmitter radiated spurious emissions – restricted bands	FCC § 15.247(d) FCC § 15.209	Applies	Pass
AC power line conducted emissions	FCC § 15.207	Applies	Pass

**For Canada:**

<b>Regulation / Test Standard</b>	<p>RSS-247 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices Issue 2 February 2017</p> <p>And,</p> <p>RSS-Gen — General Requirements for Compliance of Radio Apparatus Issue 5 April 2018 +A1 March 2019 +A2 February 2021</p>
-----------------------------------	---

Requirement	ISED Regulation	Comments	Results Summary
99% Occupied Bandwidth	RSS-Gen 6.6	Applies	Pass
6 dB Bandwidth	ISED RSS-247 § 5.2	Applies	Pass
Maximum peak conducted power	ISED RSS-247 § 5.4	Applies	Pass
Power spectral density	ISED RSS-247 § 5.2	Applies	Pass
Band edge compliance	<p>ISED RSS-247 § 3.3 and 5.5</p> <p>RSS-GEN Issue 5 Section 8.10</p>	Applies	Pass
Conducted spurious emissions	ISED RSS-247 § 5.5	Applies	Pass
Transmitter radiated spurious emissions	ISED RSS-GEN § 8.9	Applies	Pass
AC power line conducted emissions	ISED RSS-247 § 3.1	Applies	Pass

#### 4.1 Knowledge Database References

The following KDBs were referenced during the testing.

The latest knowledge database references are available via the FCC KDB website at:

<https://apps.fcc.gov/kdb>

##### 4.1.1 Radiated Emissions (30MHz to 1000MHz)

Publication Number	Keyword	Publication Date
913591	Measurement of radiated emissions at the band-edge for a Part 15 RF Device	04/05/2017

##### 4.1.2 Radiated Emissions (1GHz to 40GHz)

Publication Number	Keyword	Publication Date
704992	Test Site Validation Requirements above 1 GHz.	12/06/2015
149045	Comparison Noise Emitter (CNE), reference noise source, .pdf	05/04/2007
913591	Measurement of radiated emissions at the band-edge for a Part 15 RF Device	04/05/2017
934285	Comparison Noise Emitters (CNE), test equipment, Broadband.pdf	05/04/2007

#### 4.2 Compliance Statement

The Zswift Hub Z004, as tested, was shown to meet requirements of the standards listed in Section 4 of this report.

## Section 5 Spurious Emission Results – Radiated and Conducted

### 5.1 Test Specification

FCC Rule Part	47CFR 15.247 (d)
Standard	ANSI C63.10:2013
Measurement Uncertainty Radiated tests	The reported uncertainty of measurement $y \pm U$ , where expanded uncertainty $U$ is based on a standard uncertainty multiplied by a coverage factor of $k=2$ , providing a level of confidence of approximately 95% is  +/- 5.85dB for the frequency range 30MHz to 1GHz +/- 4.64dB for the frequency range from 1GHz to 6GHz +/- 4.96dB for the frequency range from 6GHz to 18GHz
Measurement Uncertainty Conducted tests	$\pm 1.4$ dB

### 5.2 Procedure and Test Software Version

**Radiated tests:- 47CFR15.205 and 47CFR15.209**

Eurofins York test procedure (30MHz to 1GHz)	CEP23b Issue 8
Eurofins York test procedure (1GHz to 40GHz)	CEP64b Issue 8
Test software	RadiMation Version 2016.2.8

### Conducted Tests 47CFR 15.247(d)

ANSI C63.10-2013 Clause reference:	11.11.2 and 11.11.3
Test software	N/A

**5.3 Radiated Emissions (30MHz to 1GHz)**

Radiated electric field emission measurements are applied as defined in 47CFR15.205 and 47CFR15.209.

**5.3.1 Limits at 3m**

Frequency (MHz)	Electric Field Strength Limit (dBµV/m) at 3m measurement distance
	Quasi Peak
30 - 88	40.0
88 -216	43.5
216 - 960	46.0
960- 1000	54.0

Note: FCC 47 CFR Part 15 Section 15.209 and 15.205 specifies test limits at 3m

**Receiver Settings**

Receiver Parameters	Setting
Detector Function	Quasi Peak
Start Frequency	30MHz
Stop Frequency	1000MHz
Resolution Bandwidth	120kHz
Video Bandwidth	Auto

**5.3.2 Emissions measurements****5.3.3 Date of Test**

25<sup>th</sup> July 2022

**5.3.4 Test Area**

LAB 1 (SAC)


**5.3.5 Tested by**

J Beevers

### 5.3.6 Test Setup

The EUT was configured in the SAC on an 80cm high polystyrene table.

The measurement was performed with an antenna to EUT separation distance of 3m. The results were maximised in orientation 0-360 degrees and height 1-4m.

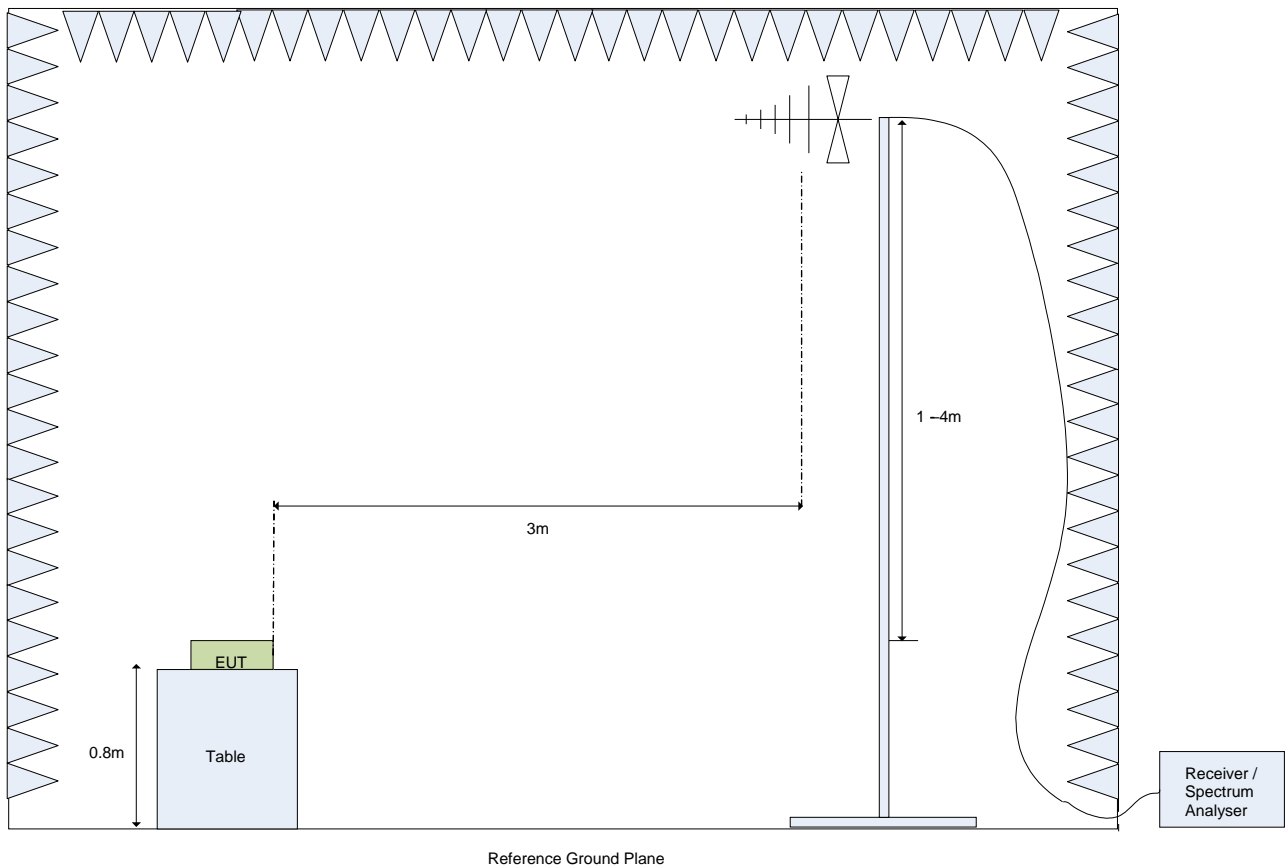

**Figure 1 Test Setup for E-Field Measurements from 30MHz to 1GHz**

Note 1 : With the EUT de-energized the ambient radio noise and signals met the 6dB peak detection requirement of ANSI C63.10-2013.

Note 2 : There were no significant environmental temperature changes during the test duration and hence it was not considered necessary to consider any variation in cable loss.

### Operating Mode During testing

During spurious emission testing the equipment under test was set to transmit at the same frequency 2457MHz.



## 5.3.7 Electric field emissions, 30MHz to 1GHz

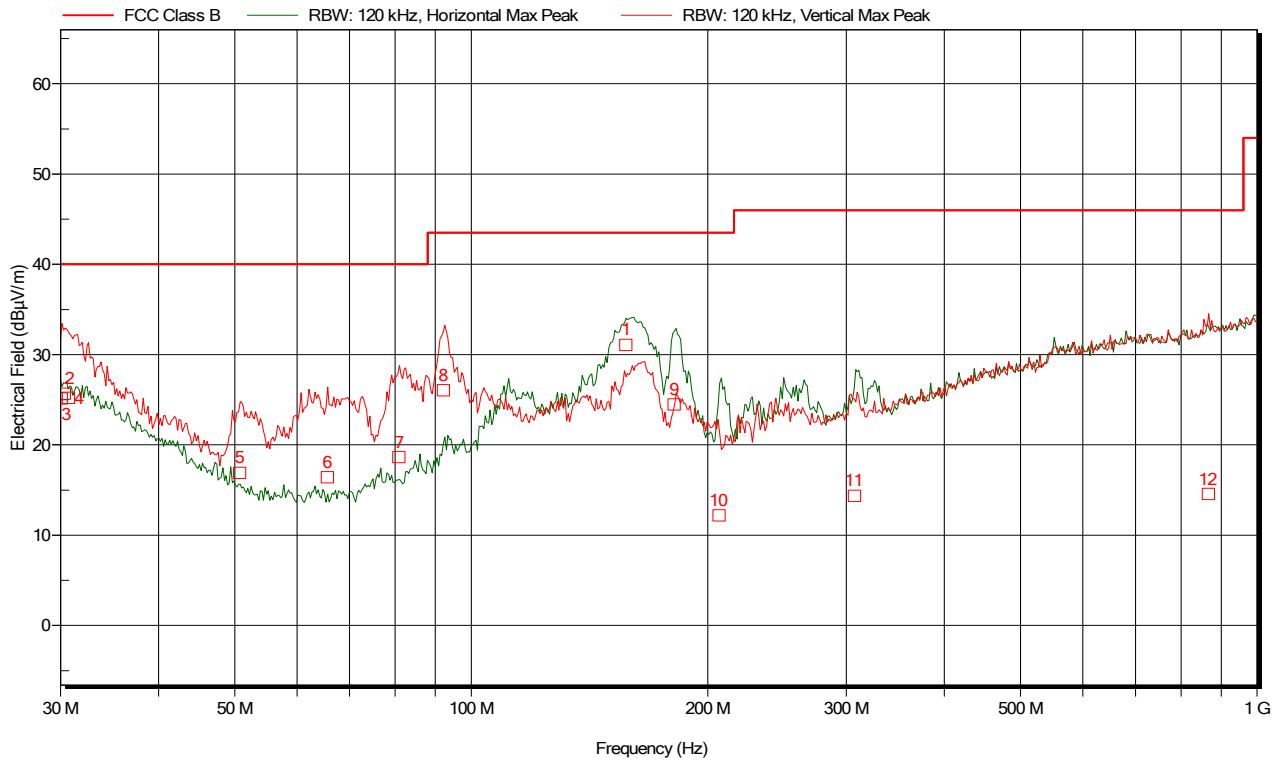


Figure 2 Electric field emissions Plot, 30MHz to 1GHz, ANT+ Operation

Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height	Polarization
MHz	dBμV/m	dBμV/m	dB		degrees	m	
157.20	31.1	43.5	-12.4	Pass	185	1.9	Horizontal
30.36	25.7	40.0	-14.3	Pass	315	1.0	Vertical
30.06	25.1	40.0	-14.9	Pass	205	1.0	Vertical
30.72	25.2	40.0	-14.8	Pass	0	1.0	Vertical
50.70	16.9	40.0	-23.1	Pass	115	1.1	Vertical
65.58	16.4	40.0	-23.6	Pass	275	1.6	Vertical
80.88	18.6	40.0	-21.4	Pass	300	1.4	Vertical
92.10	26.1	43.5	-17.4	Pass	260	1.1	Vertical
181.14	24.5	43.5	-19.0	Pass	210	1.9	Horizontal
206.70	12.2	43.5	-31.3	Pass	205	1.5	Horizontal
307.26	14.4	46.0	-31.6	Pass	135	1.4	Horizontal
866.64	14.6	46.0	-31.4	Pass	325	2.7	Vertical

Table 1 Electric Field Emissions Peaks, 30MHz to 1GHz. ANT+ Operation

**5.4 Radiated Emissions (1GHz to 18GHz)****5.4.1 Limits**

Frequency (GHz)	Limit (dBµV/m)	Limit (dBµV/m)
	Peak	Average
1-18	74.0	54.0

**5.4.2 Receiver Settings**

Receiver Parameters	Setting
Detector Function	Average and Peak
Start Frequency	1GHz
Stop Frequency	18GHz
Resolution Bandwidth	1MHz
Video Bandwidth	Auto

**5.4.3 Emissions measurements****5.4.4 Date of Test**5<sup>th</sup> August 2022**5.4.5 Test Area**

LAB 1 (SAC)

**5.4.6 Tested by**

J Beevers


### 5.4.7 Test Setup

The EUT was configured in the SAC on an 1.5m high table. Exploratory measurements on the EUT were carried out to identify suspect frequencies and worst case orientations, see Section 5.4.8.

The measurement was then performed with an antenna to EUT separation distance of 3m.

The antenna was kept in the “cone of radiation” from the EUT and pointed at the area both in azimuth and elevation using the tilt mechanism on the antenna mast.

The results were maximised in orientation 0-360 degrees and height 1-4m.

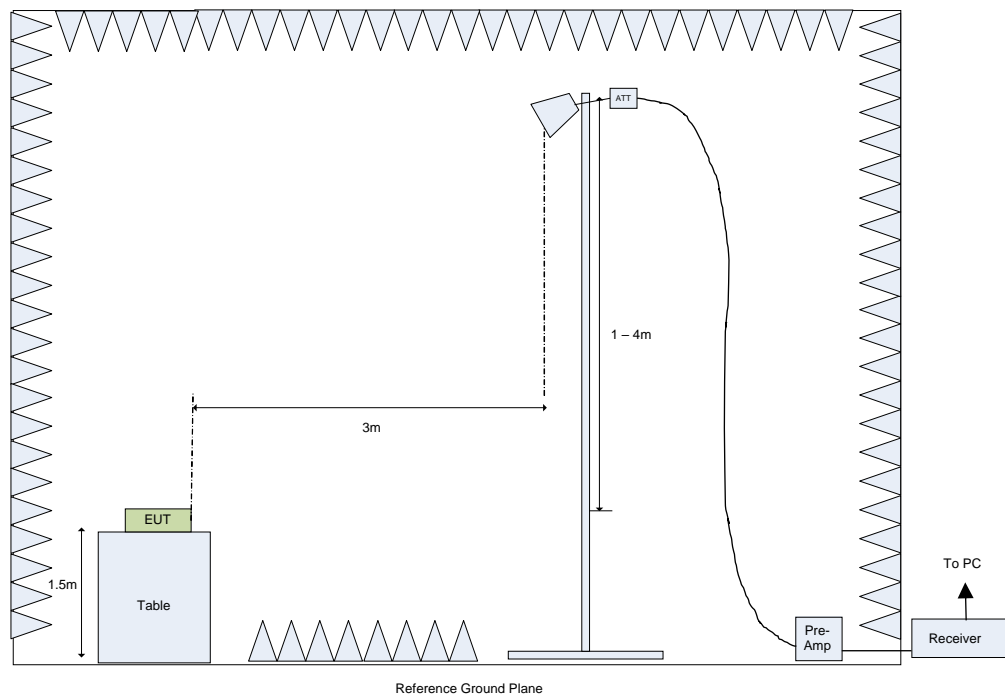

**Figure 3 Test Setup for Final E-Field Measurements from 1GHz to 18GHz**

- Note 1 : With the EUT de-energized the ambient radio noise and signals met the 6dB peak detection requirement of ANSI C63.10
- Note 2 : There were no significant environmental temperature changes during the test duration and hence it was not considered necessary to consider any variation in cable loss.
- Note 3: For final measurements, between 10GHz and 18GHz the measurements were repeated with a measurement distance of 1m in order to reduce the measurement noise floor in this frequency range.
- Note 4: On all swept and final measurements made between 1GHz and 18GHz a 2.4GHz Microtronics BRM50702 notch filter was placed in the measurement chain between the antenna and pre-amplifier in order to prevent the artificial generation of harmonics within the pre-amplifier.

#### 5.4.8 Exploratory Radiated Emission Maximization

During exploratory testing, suspect emissions from the EUT were identified both in terms of the frequency and directionality. This was achieved by manually positioning the antenna close to the EUT and also by scanning it over all sides of the EUT whilst observing a spectral display. The typical distance between the surface of the EUT and the scanning antenna was circa 30cm.

Frequency (GHz)	Mode of operation	EUT face *	Emissions Angle (w.r.t. turntable)	Height	Polarization
2.136	Transmitting on 2457MHz	front face	90	2.0	H
4.914	Transmitting on 2457MHz	front face	90	2.0	H
7.308	Transmitting on 2457MHz	front face	90	2.0	H
7.370	Transmitting on 2457MHz	front face	90	2.0	H
12.284	Transmitting on 2457MHz	front face	90	2.0	H

**Table 2 Frequencies identified during Exploratory Radiated Emission maximization**

Note 1 : The front face of the EUT is deemed to be 0°, which is then turned in a clockwise direction through 360°.

## 5.4.9 Electric field emissions, 1GHz to 18GHz

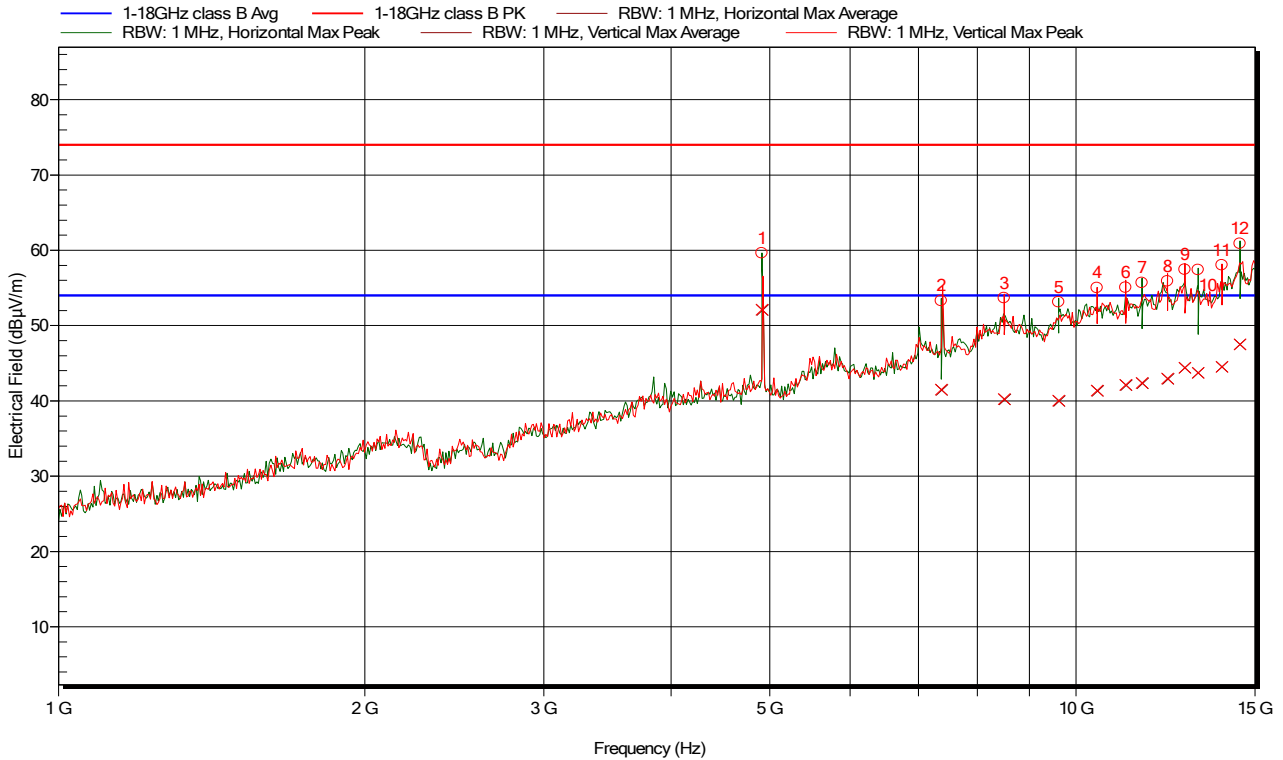


Figure 4 Electric field emissions Plot, 1GHz to 18GHz. ANT+ operation

Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height	Polarization
GHz	dBμV/m	dBμV/m	dB		degrees	m	
4.913	52.13	54	-1.87	Pass	125	3.2	Horizontal
7.372	41.49	54	-12.51	Pass	130	1.0	Horizontal
8.501	40.23	54	-13.77	Pass	270	1.2	Vertical
10.489	41.39	54	-12.61	Pass	295	3.5	Vertical
9.616	40.04	54	-13.96	Pass	125	2.0	Horizontal
11.190	42.14	54	-11.86	Pass	275	2.8	Vertical
11.614	42.37	54	-11.63	Pass	70	1.9	Horizontal
12.298	42.98	54	-11.02	Pass	25	2.9	Vertical
12.793	44.39	54	-9.61	Pass	250	1.2	Vertical
13.188	43.72	54	-10.28	Pass	245	2.1	Horizontal
13.913	44.53	54	-9.47	Pass	360	2.4	Vertical
14.497	47.48	54	-6.52	Pass	105	3.0	Horizontal

Table 3 Electric Field Emissions Peaks, 1GHz to 18GHz – ANT+ operation

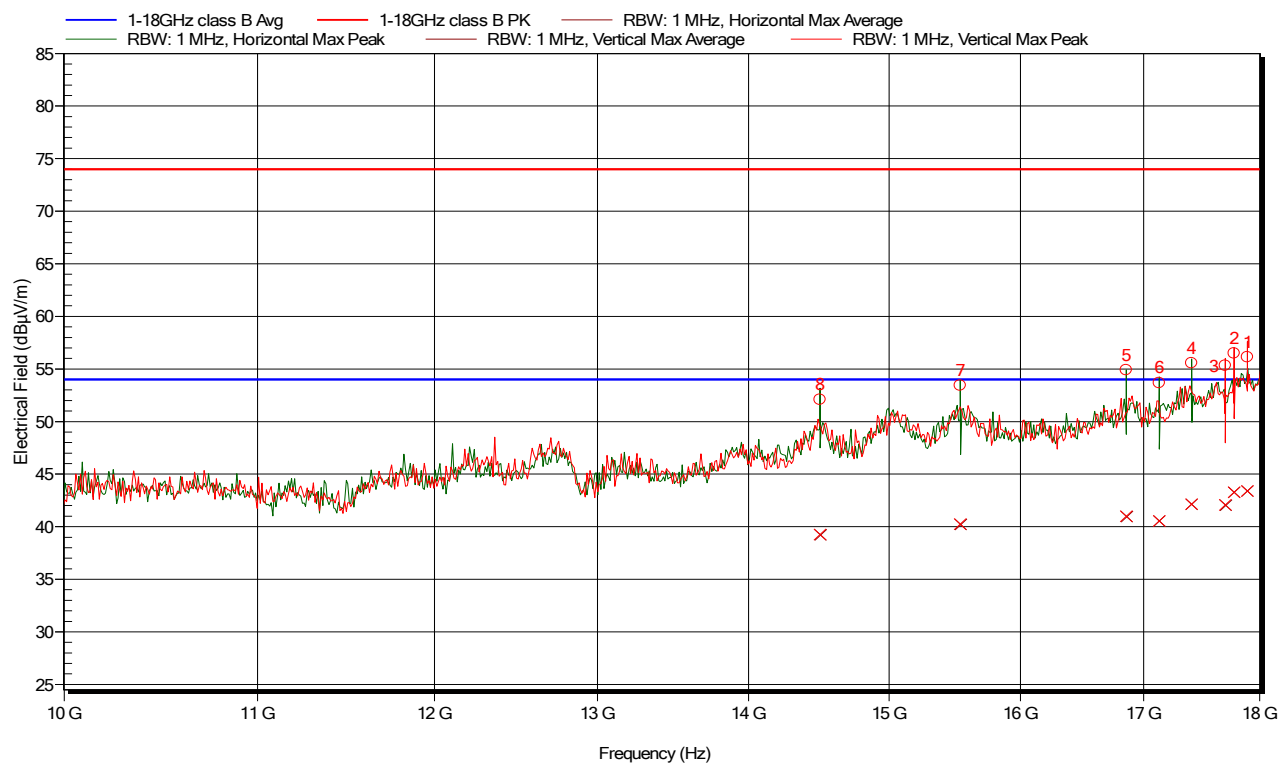


Figure 5 Electric field emissions Plot, 10GHz to 18GHz. 1m measurement distance. ANT+ operation

Frequency	Average	Average Limit	Average Difference	Average Status	Angle	Height	Polarization
GHz	dBμV/m	dBμV/m	dB		degrees	m	
17.887	43.38	54	-10.62	Pass	15	1.7	Vertical
17.770	43.27	54	-10.73	Pass	275	2.5	Vertical
17.694	42.06	54	-11.94	Pass	225	3.7	Vertical
17.405	42.12	54	-11.88	Pass	15	3.6	Horizontal
16.854	40.98	54	-13.02	Pass	100	3.6	Horizontal
17.129	40.54	54	-13.46	Pass	245	1.8	Horizontal
15.535	40.25	54	-13.75	Pass	165	2.2	Horizontal
14.500	39.27	54	-14.73	Pass	5	1.7	Horizontal

Table 4 Electric Field Emissions Peaks, 10GHz to 18GHz. 1m measurement distance – ANT+ operation

#### 5.4.10 Example field strength calculation

The total average corrections are shown in the above table. This correction figure consists of Preamplifier gain (PG), Antenna factor (AF); and Cable loss (CL), and where necessary distance extrapolation factor (dB).

Field strength (FS) is calculated as follows:

$$\text{FS (dB}\mu\text{V/m)} = \text{Indicated Signal Level (dB}\mu\text{V)} - \text{PG (dB)} + \text{AF (dB)} + \text{CL (dB)}$$

#### 5.4.11 Sample Data

From Figure 4 and table 3, The Average level at 14.497GHz is calculated as follows:

$$\text{FS (dB}\mu\text{V/m)} = 40.17(\text{dB}\mu\text{V}) - 50.40(\text{dB}) + 46.71(\text{dB/m}) + 11.00 (\text{dB}) = 47.48\mu\text{V/m}$$

Between 10GHz and 18GHz the final measurement was made at 1m distance. The data was then extrapolated to the value expected at 3.

The extrapolation value was calculated as:

$$= -20\log_{10}(\text{measurement distance (1m)} / \text{specification distance (3m)})$$

$$= 20\log_{10}(1/3) = -9.5\text{dB}$$

**5.5 Radiated Emissions (18GHz to 26GHz)****5.5.1 Limits**

Frequency (GHz)	Limit (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
	Peak	Average
18-25	74.0	54.0

**5.5.2 Receiver Settings**

Receiver Parameters	Setting
Detector Function	Average and Peak
Start Frequency	18GHz
Stop Frequency	25GHz
Resolution Bandwidth	1MHz
Video Bandwidth	Auto

**5.5.3 Emissions measurements****5.5.4 Date of Test**26<sup>th</sup> July 2022**5.5.5 Test Area**

LAB 1 (SAC)

**5.5.6 Tested by**

J Beevers

**5.5.7 Test Setup**

This is the same as for the 1-18GHz range for final measurements, except with a measurement distance of 1m.



### 5.5.8 Exploratory Radiated Emission Maximization


During exploratory testing, suspect emissions from the EUT were identified both in terms of the frequency and directionality. This was achieved by manually positioning the antenna close to the EUT and also by scanning it over all sides of the EUT whilst observing a spectral display. The typical distance between the surface of the EUT and the scanning antenna was circa 30cm.

Frequency (GHz)	Mode of operation	EUT face *	Emissions Angle (w.r.t. turntable)	Height	Polarization
-	Tx on channels 2402MHz, 2440MHz and 2480MHz.	-	-	-	-

**Table 4: Frequencies identified during Exploratory Radiated Emission maximization**

Note 2 : The front face of the EUT is deemed to be 0°, which is then turned in a clockwise direction through 360°.

No emissions were identified for further investigation above 18GHz.

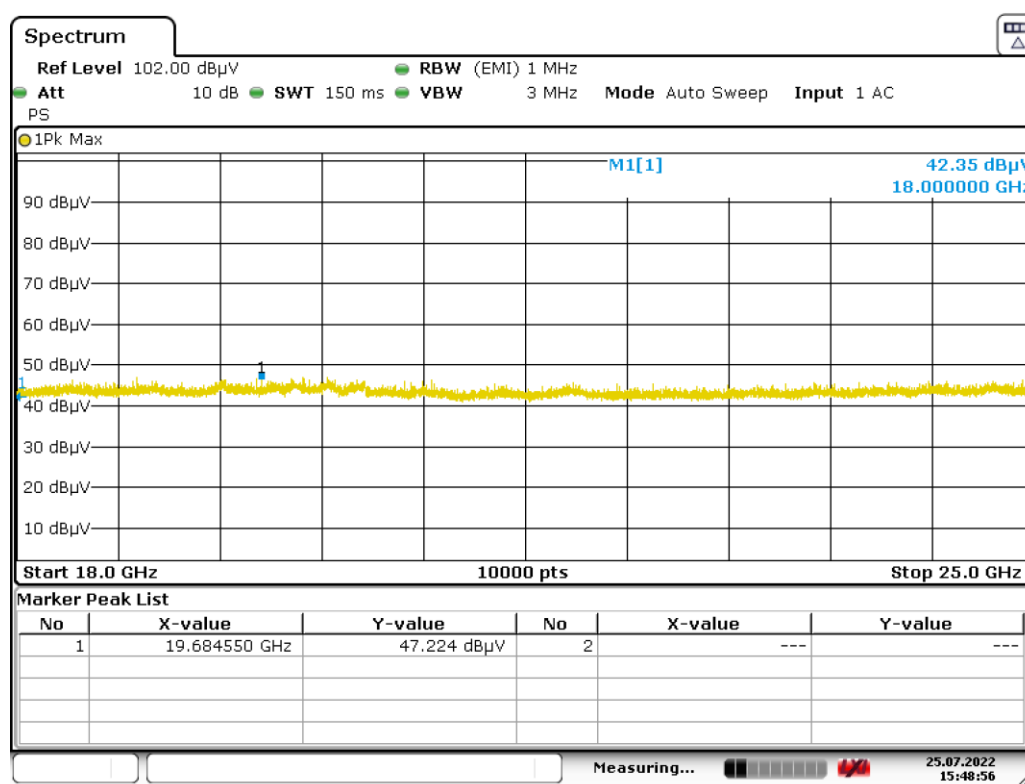

Date: 25.JUL.2022 15:48:56

**Figure 6 – manual investigation – ANT+ operation**

**5.6 Conducted Spurious Emissions 30MHz to 25GHz****5.6.1 Limits**

Frequency (MHz)	Limit, 47CFR 15.247(d)
	Peak
30 – 25000	-20dBc

Spectrum analyser settings as specified by ANSI C63.10-2013 Clause 11.11.2

Receiver Parameters	Setting
Detector Function	Peak
Start Frequency	30MHz
Stop Frequency	1000MHz
Start Frequency	1000MHz
Stop Frequency	25000MHz
Resolution Bandwidth	100kHz
Video Bandwidth	300kHz
Sweep rate	Auto couple
Trace mode	Max hold

**5.6.2 Emissions measurements****5.6.3 Date of Test**

21<sup>st</sup> July 2022

**5.6.4 Test Area**


LAB 1

**5.6.5 Tested by**

J Beevers

### 5.6.6 Test Setup

The antenna port was connected directly to the signal analyser.

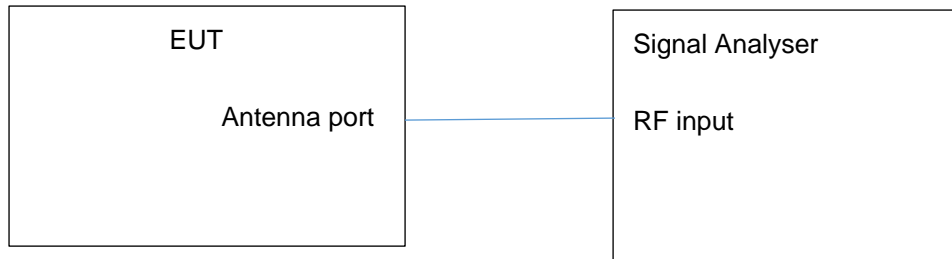

### 5.6.7 Test Results

The results of the conducted spurious emissions are stated below and by the signal analyser images.

All disturbances detected were > 20dB below the carrier.

## 5.6.8 Antenna port conducted emissions, 30MHz to 25GHz

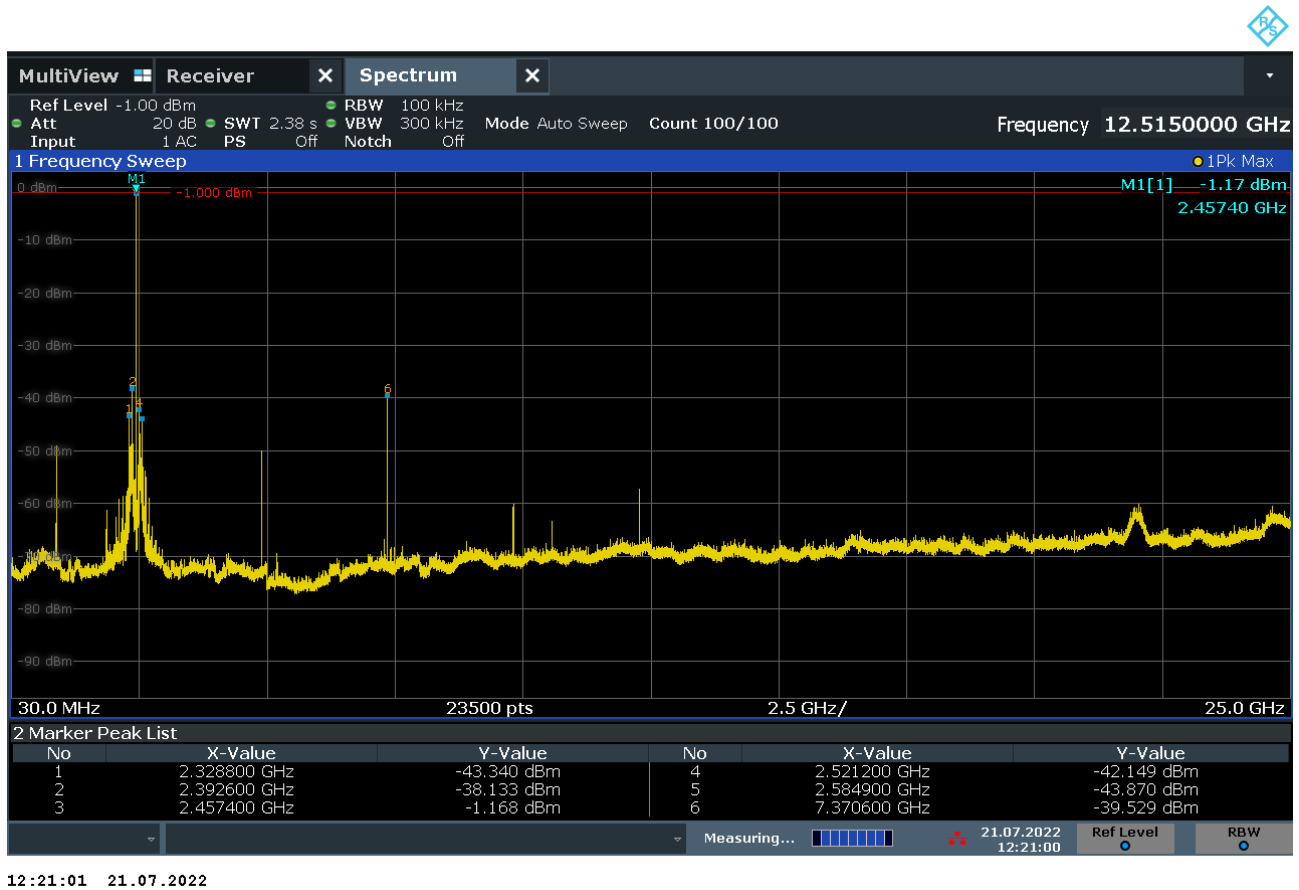


Figure 7 Conducted emissions 30MHz to 25GHz. ANT+ operation

## Section 6 6dB Bandwidth and 99% Occupied Bandwidth

### 6.1 Test Specification

FCC Rule Part	46CFR 15.247 (b)(2)
Standard	ANSI C63.10:2013

### 6.2 Procedure and Test Software Version

#### Conducted Tests

ANSi C63.10-2013 Clause reference:	11.9.1.1 (RBW>DTS bandwidth)
Test software	N/A

Frequency (MHz)	Limit, 47CFR 15.247(a)(2) 6dB bandwidth
	Peak
2400MHz to 2483.5MHz	At least 500kHz

Spectrum analyser settings as specified by ANSI C63.10-2013 Clause 11.8.1

Receiver Parameters	Setting
Detector Function	Peak
Span	3MHz
Resolution Bandwidth	50kHz
Video Bandwidth	150kHz
Sweep rate	Auto couple
Trace mode	Max hold

**6.2.1 Emissions measurements****6.2.2 Date of Test**21<sup>st</sup> July 2022**6.2.3 Test Area**


LAB 1

**6.2.4 Tested by**

J Beevers

**6.2.5 Test Setup**

The antenna port was connected directly to the signal analyser.

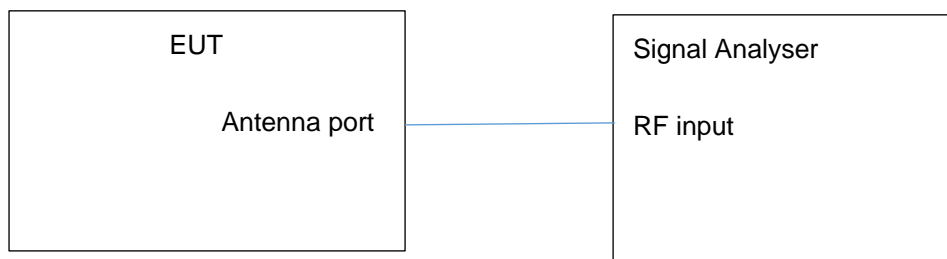**6.2.6 Test Results**

The results of the 6dB bandwidth measurements are stated in the table below and by the signal analyser images.

Channel (MHz)	99% Occupied Bandwidth (MHz)	Measured 6dB bandwidth (kHz)	Minimum requirement (kHz)	Figures	Result
2457.00	1.0155	513.45	500.0	8 and 9	Pass

**Table 5 Bandwidth Measurements**


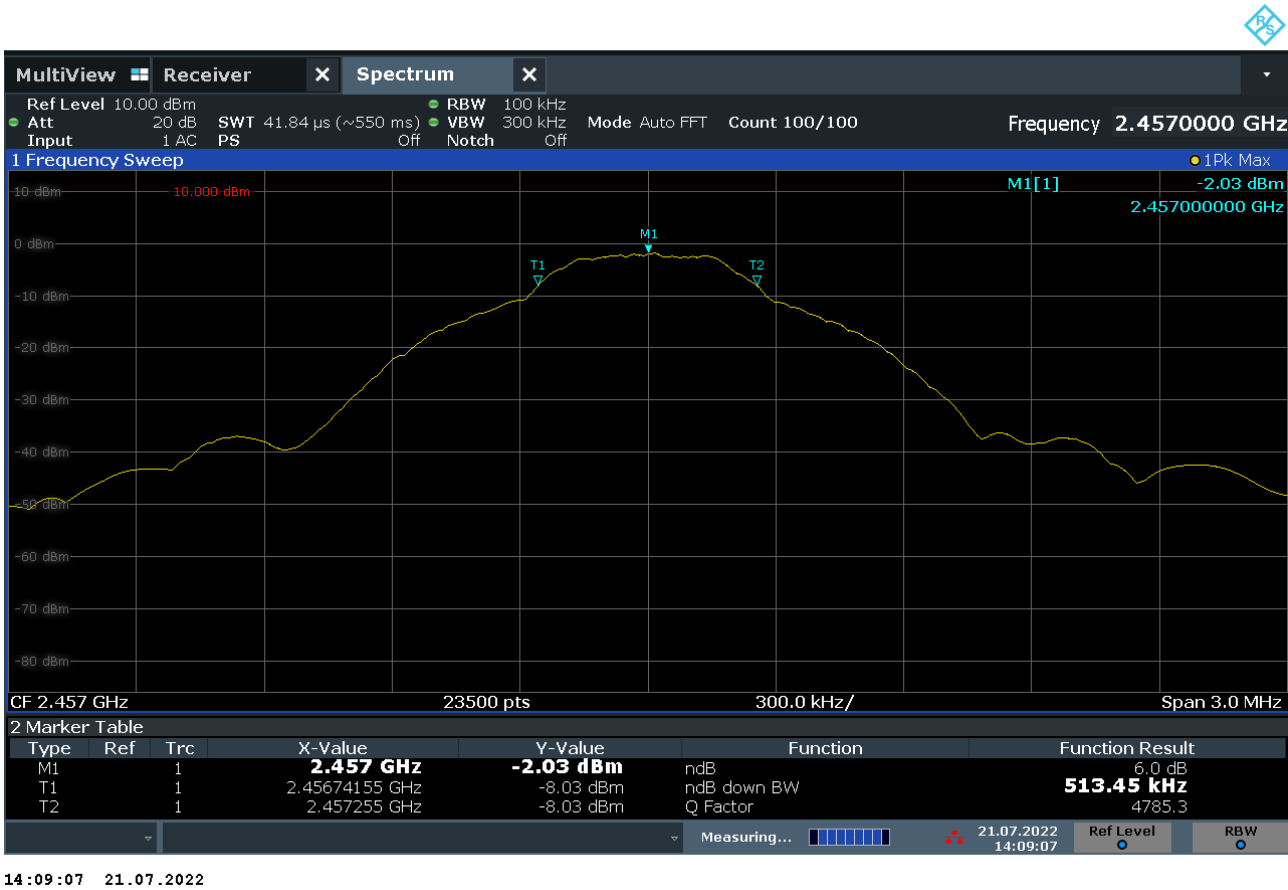


Figure 8 Bandwidth at 6dB Point. ANT+ operation



14:25:58 21.07.2022

Figure 9 99% Occupied Bandwidth. ANT+ operation

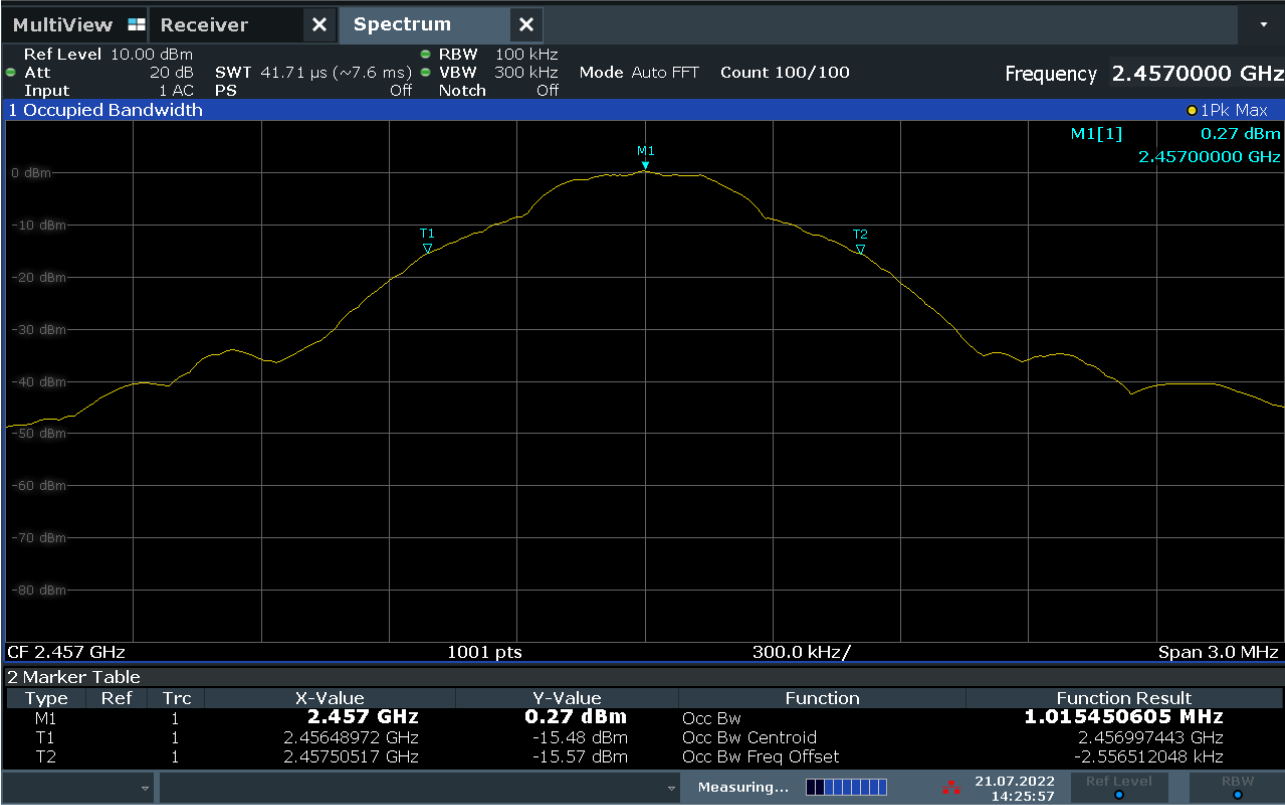

## Section 7 Peak Output Power

### 7.1 Test Specification

FCC Rule Part	46CFR 15.247 (b)(3)
Standard	ANSI C63.10:2013

### 7.2 Procedure and Test Software Version

#### Conducted Tests

ANSi C63.10-2013 Clause reference:	11.9.1.1 (RBS>DTS bandwidth)
Test software	N/A

Frequency (MHz)	Limit, 47CFR 15.247(b)(2)
	Peak
2457.0	1 watt

Spectrum analyser settings as specified by ANSI C63.10-2013 Clause 11.11.2

Receiver Parameters	Setting
Detector Function	Peak
Span	10MHz
Resolution Bandwidth	2MHz (>DTS Bandwidth)
Video Bandwidth	6MHz
Sweep rate	Auto couple
Trace mode	Max hold

#### 7.2.1 Emissions measurements

#### 7.2.2 Date of Test

21<sup>st</sup> July 2022

#### 7.2.3 Test Area


LAB 1

#### 7.2.4 Tested by

J Beevers

#### 7.2.5 Test Setup

The antenna port was connected directly to the signal analyser.

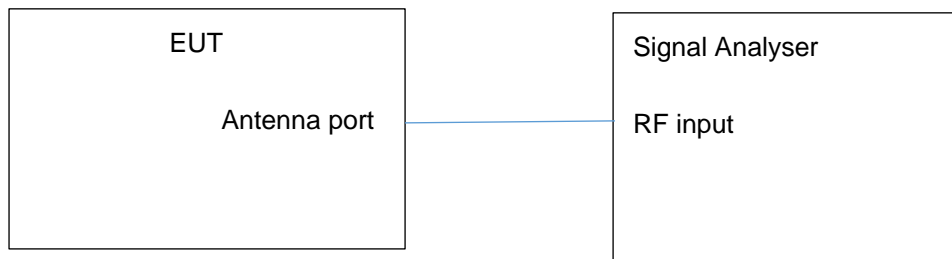

### 7.2.6 Test Result

The results of the peak output power measurements are stated in the table below and by the signal analyser images.

Frequency (MHz)	Measured Power (dBm)	Cable Loss (dB)	Peak Power (dBm)	Peak Power (Watts)	Limit (Watts)	Figure
2457	-0.57	2.30	1.73	0.00149	1	10

**Table 6 Peak Output Power Measurements**

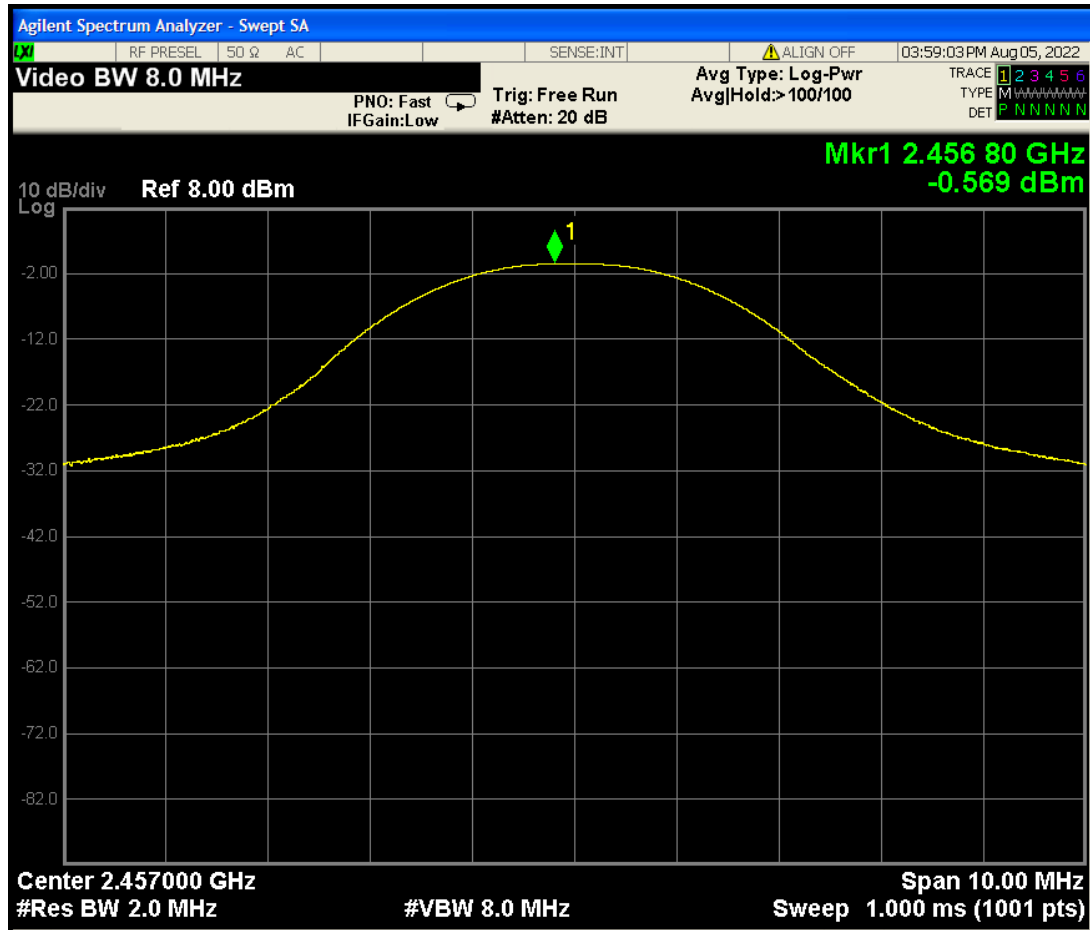


Figure 10 Peak output power, ANT+ operation

## Section 8 Power Spectral Density

### 8.1 Test Specification

FCC Rule Part	46CFR 15.247 (e)
Standard	ANSI C63.10:2013

### 8.2 Procedure and Test Software Version

#### Conducted Tests

ANSi C63.10-2013 Clause reference:	Clause 11.10.2
Test software	N/A

Frequency (MHz)	Limit, 47CFR 15.247(e)
	Peak
2457.00	<8dBm in any 3kHz band during any time interval of complete transmission

Spectrum analyser settings as specified by ANSI C63.10-2013 Clause 11.10.2

Receiver Parameters	Setting
Detector Function	Peak
Span	1.5xDTS bandwidth
Resolution Bandwidth	3kHz ≤RBW ≤100kHz
Video Bandwidth	3 x RBW
Sweep rate	Auto couple
Trace mode	Max hold

#### 8.2.1 Emissions measurements

#### 8.2.2 Date of Test

5<sup>th</sup> August 2022

#### 8.2.3 Test Area


LAB 1

#### 8.2.4 Tested by

J Beevers

#### 8.2.5 Test Setup

The antenna port was connected directly to the signal analyser.

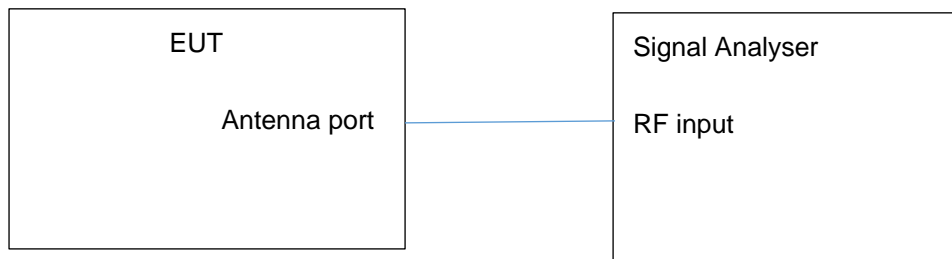

**8.2.6 Test Results**

Frequency (MHz)	Measured Power in 3kHz RBW (dBm)	Cable Loss (dB)	Power in 3kHz RBW (dBm)	Limit (dBm)	Figure	Result
2457	-10.87	2.30	-8.57	8.0	11	Pass

**Table 7 Peak Spectral Density Measurements**

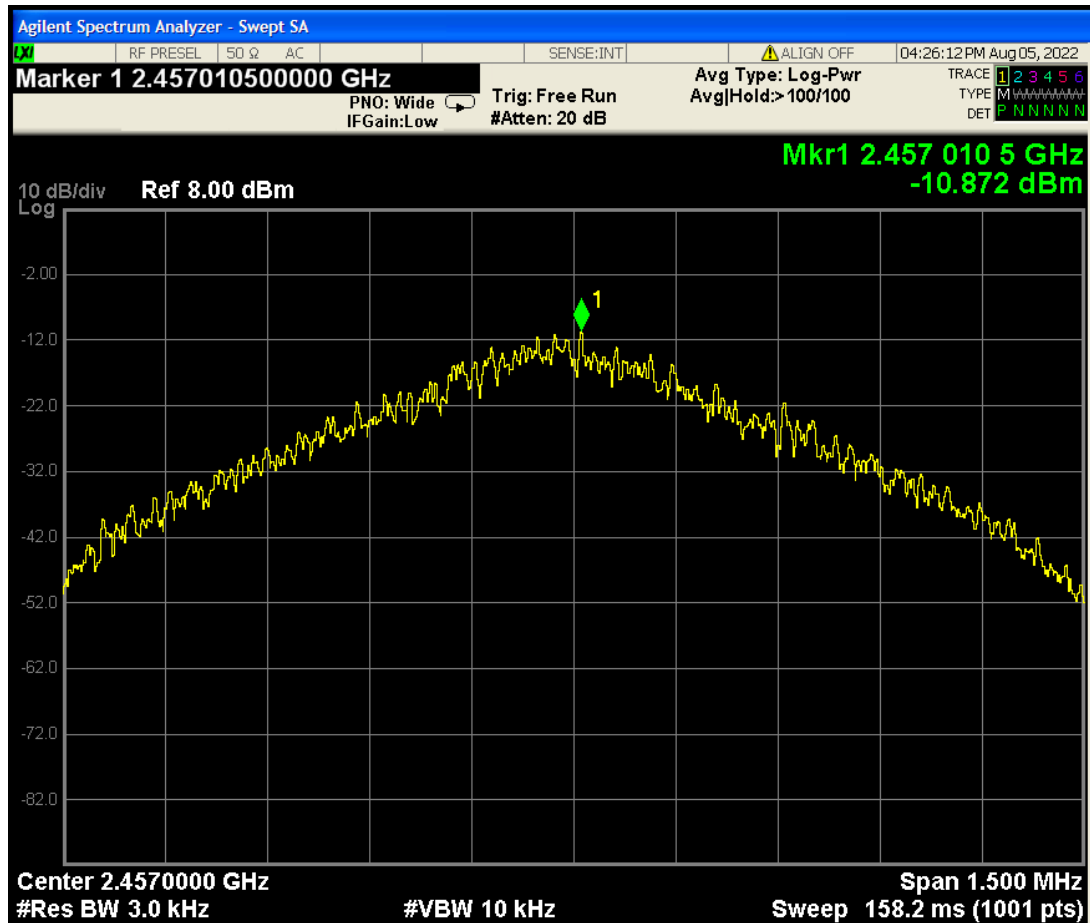


Figure 11 Power spectral density, ANT+ operation



## Section 9 Band Edge Compliance

### 9.1 Test Specification

FCC Rule Part	46CFR 15.205 and 47CFR15.209
Standard	ANSI C63.10:2013

### 9.2 Procedure and Test Software Version

#### Radiated Tests

ANSi C63.10-2013 Clause reference:	Clause 6.10.4 Authorised band-edge measurements
Test software	N/A

Frequency (MHz)	Limit, 47CFR 15.247(e)
	Peak
2400MHz to 2483.5MHz	Measured signal at the band edge must be below the radiated emission limits of 47CFR15.209

Spectrum analyser settings as specified by ANSI C63.10-2013 Clause 6.10.5 "Restricted band-edge measurements"

Receiver Parameters	Setting
Detector Function	Peak
Span	As necessary
Resolution Bandwidth	1MHz
Video Bandwidth	3 x RBW
Sweep rate	Auto couple
Trace mode	Max hold

#### **9.2.1 Emissions measurements**

#### **9.2.2 Date of Test**

26<sup>th</sup> July 2022

#### **9.2.3 Test Area**

LAB 1

#### **9.2.4 Tested by**

J Beevers

#### **9.2.5 Test Setup**

The test setup was identical to radiated emissions testing 1-18GHz.

#### **9.2.6 Test Results**

Results are presented in two formats:

Tabular results of measurements at the band edges. Manual measurements were performed to measure the maximum value of signal at the band edge. The tabular data includes the following:

1. Polarity of the measurement antenna
2. Frequency at the band edge
3. Amplitude of signal at the input of the test receiver
4. Pre-amplifier gain
5. Cable loss
6. Antenna factor
7. Resultant Electric field strength = 3-4+5+6

Spectrum analyser screen displays are also included. Please note that the screen displays do not include losses or antenna factor.

**Tabular Data**

The following radiated measurements were made at the band edges:

**Upper band edge**

Polarity	frequency (MHz)	Amplitude (dBuV)	Preamp (dB)	Cable loss (dB)	AF(dB/m)	E (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	2483.5	72.5	54.27	4.28	29.89	52.39	74.0	21.61
V	2483.5	73.4	54.27	4.28	29.89	53.29	74.0	20.71

**Table 8 Upper Band Edge, Peak detector measurements**

Polarity	frequency (MHz)	Amplitude (dBuV)	Preamp (dB)	Cable loss (dB)	AF(dB/m)	E (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	2483.5	48.4	54.27	4.28	29.89	28.29	54.0	25.71
V	2483.5	48.5	54.27	4.28	29.89	28.39	54.0	25.61

**Table 9 Upper Band Edge, average detector measurements****Lower band edge**


Polarity	frequency (MHz)	Amplitude (dBuV)	Preamp (dB)	Cable loss (dB)	AF(dB/m)	E (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	2400	68.2	54.24	4.16	29.67	47.79	74.0	26.21
V	2400	70.9	54.24	4.16	29.67	50.49	74.0	23.51

**Table 10 Lower Band Edge, Peak detector measurements**

Polarity	frequency (MHz)	Amplitude (dBuV)	Preamp (dB)	Cable loss (dB)	AF(dB/m)	E (dBuV/m)	Limit (dBuV/m)	Margin (dB)
H	2400	50.2	54.24	4.16	29.67	29.79	54.0	24.21
V	2400	52.5	54.24	4.16	29.67	32.09	54.0	21.91


**Table 11 Lower Band Edge, average detector measurements**

## Spectrum analyser displays

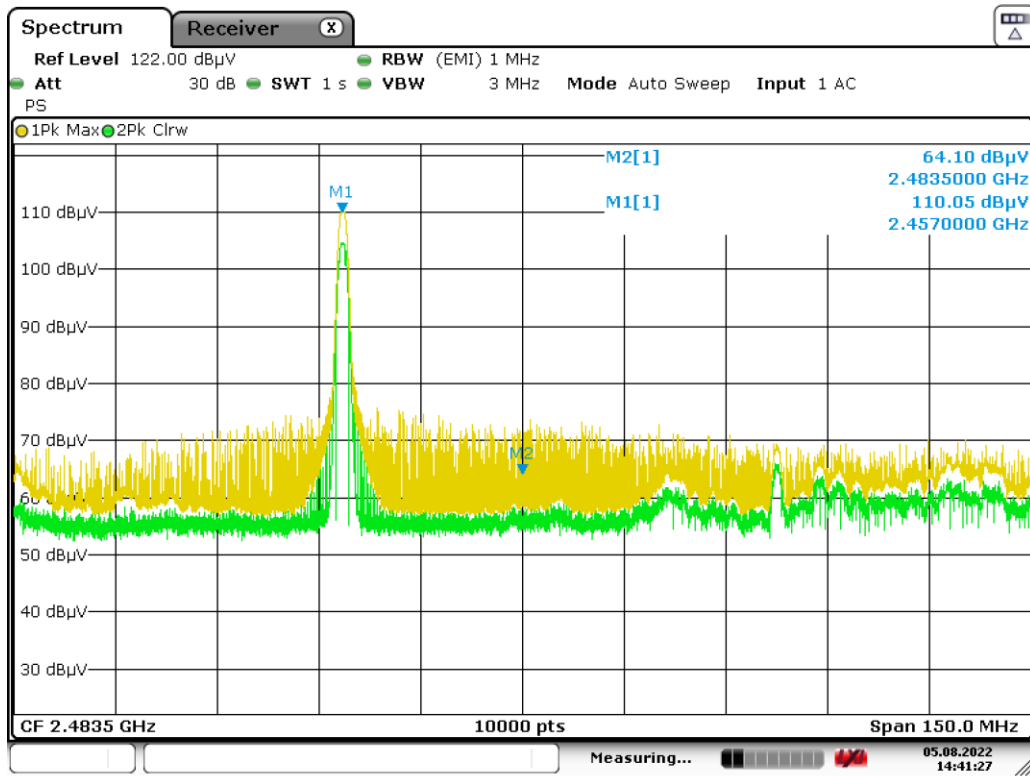


Date: 5.AUG.2022 14:41:28

Figure 12 Band Edge Measurement – upper band edge - horizontal polarity

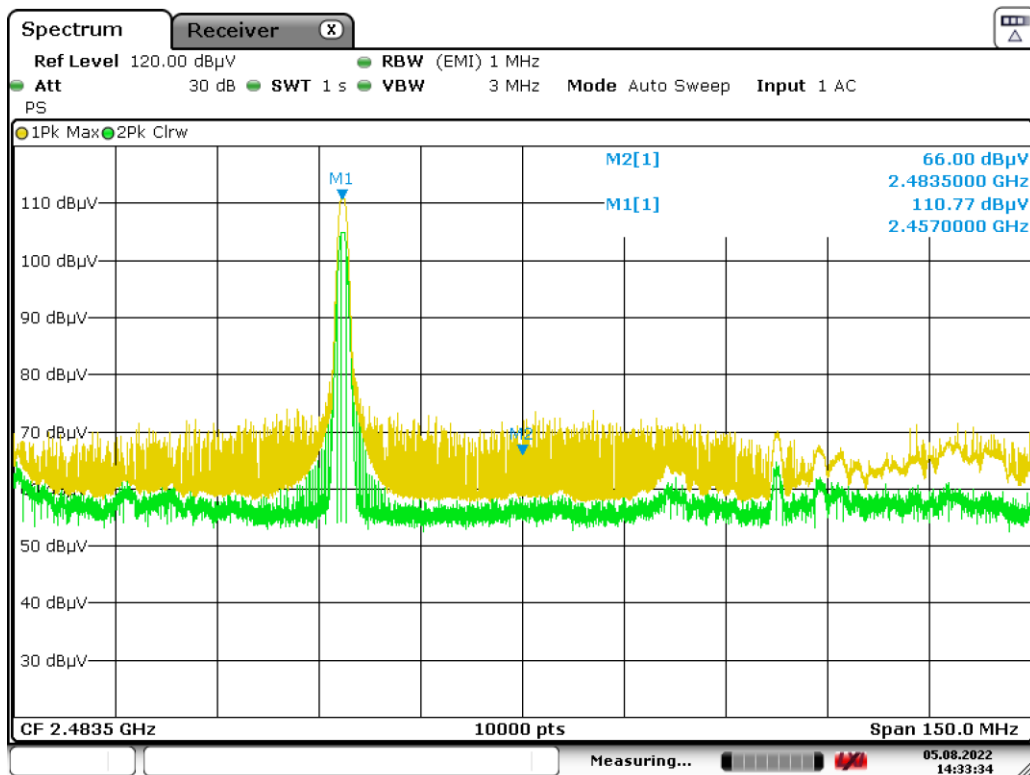


Date: 5.AUG.2022 14:33:35

Figure 13 Band Edge Measurement – upper band edge - vertical polarity

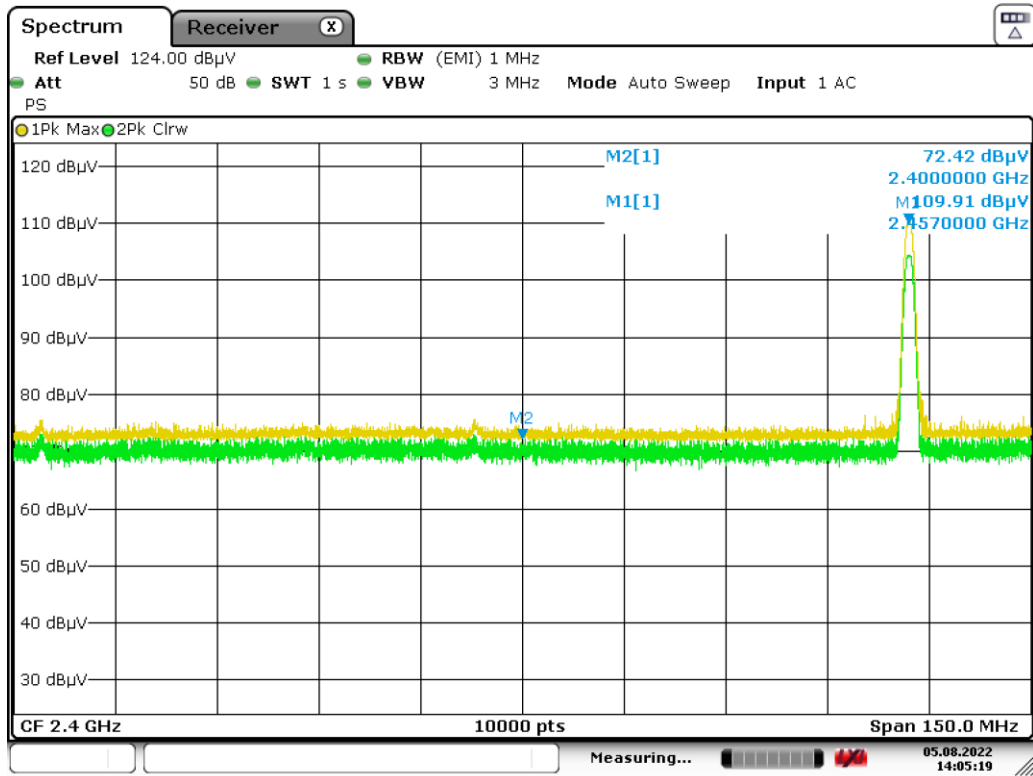

Date: 5.AUG.2022 14:05:19

Figure 14 Band Edge Measurement – lower band edge - horizontal polarity

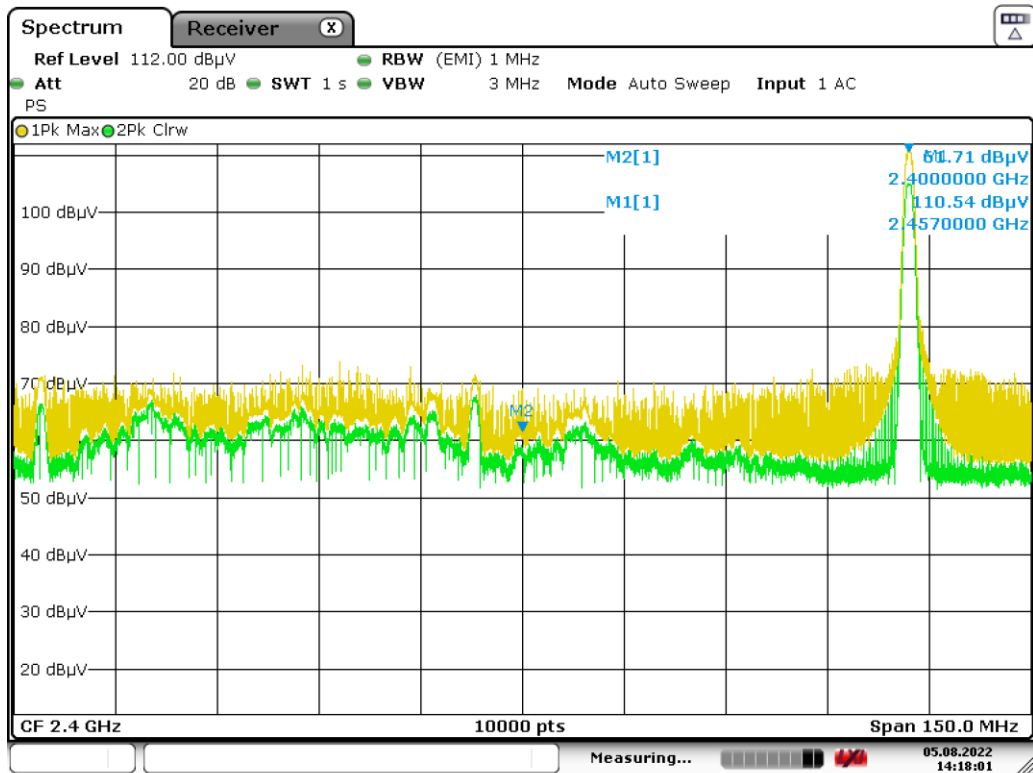

Date: 5.AUG.2022 14:18:02

Figure 15 Band Edge Measurement – lower band edge - vertical polarity

## Section 10 Mains Conducted Emissions

### 10.1 Test Specification

FCC rule part	47CFR 15.207
Standard	ANSI C63.10:2013
Measurement Uncertainty	The reported uncertainty of measurement $y \pm U$ , where expanded uncertainty $U$ is based on a standard uncertainty multiplied by a coverage factor of $k=2$ , providing a level of confidence of approximately 95 % is $\pm 3.45\text{dB}$

### 10.2 Power Line Emission Limits

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi Peak	Average
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5.0	56.0	46.0
5.0 - 30	60.0	50.0

Note: \* The limit decreases linearly with the logarithm of the frequency in the range

### 10.3 Receiver Settings

Receiver Parameters	Setting
Detector Function	Quasi Peak and Average
Start Frequency	150kHz
Stop Frequency	30MHz
Resolution Bandwidth	10kHz
Video Bandwidth	Auto

### 10.4 Procedure and Test Software Version

Eurofins York test procedure	CEP19 Issue 8
Test software	RadiMation Version 2016.1.6

**10.4.1 Date of Test**22<sup>nd</sup> July 2022**10.4.2 Test Area**

LAB 2


**10.4.3 Tested by**

J Beevers

**10.4.4 Test Setup**

This test was applied to the EUT's Live and Neutral lines. The EUT was configured in the screened room on an 80cm high table and was positioned 40cm from the room wall.

The EUT was then powered from the mains supply via a Line Impedance Stabilisation Network (LISN).

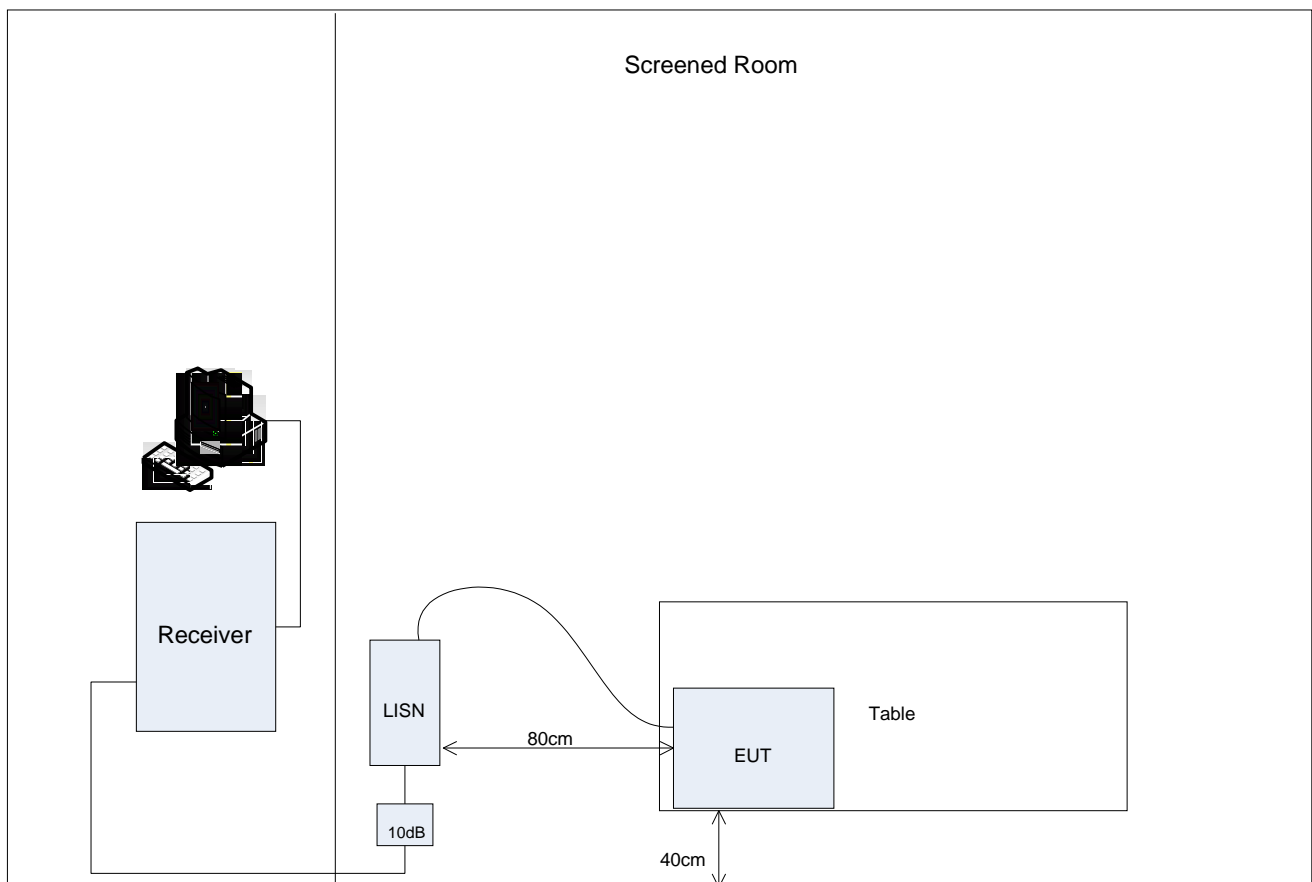

**Figure 16: Test setup for Conducted Emissions on the AC power port**

The screened room provides an environment that ensures valid, repeatable measurement results that meet the requirements of Clause 5.2 of ANSI C63.4-2014.

## 10.4.5 Mains Conducted Emissions Results

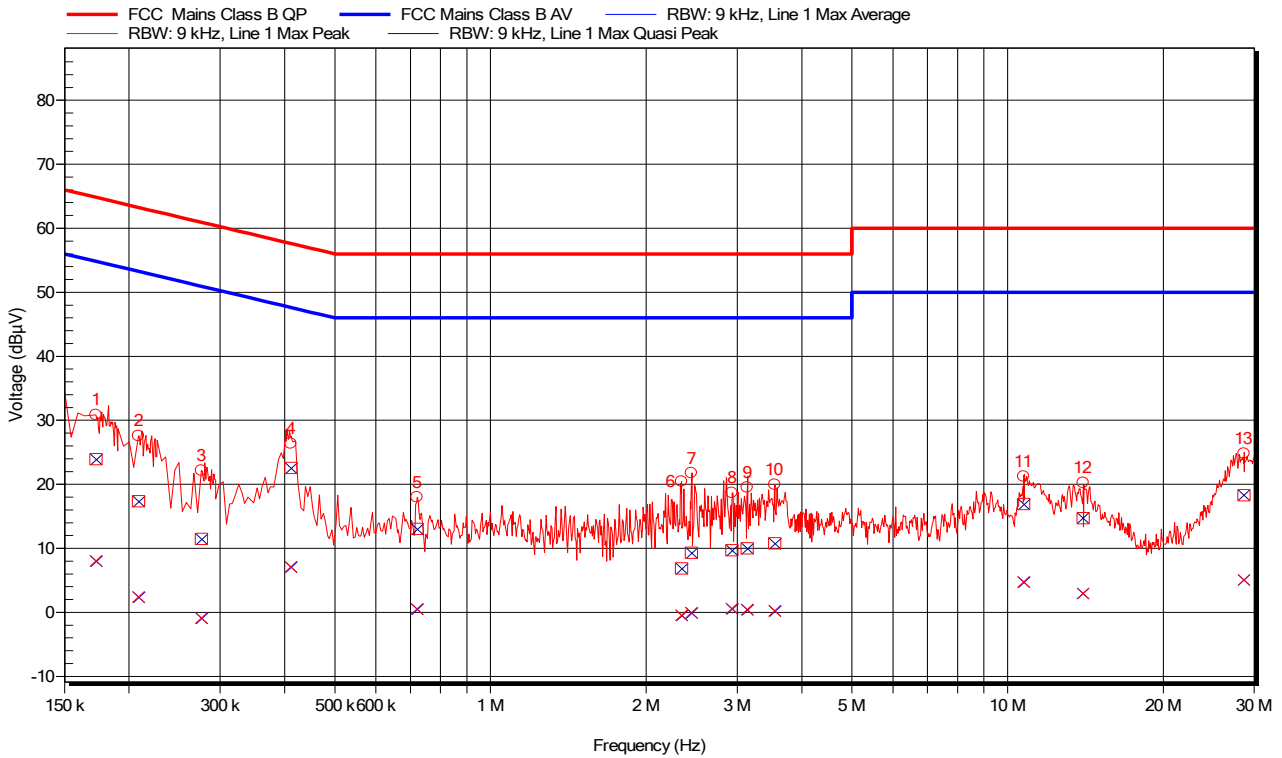


Figure 17: Mains Conducted Emissions Plot – ANT+ operation - Input Power 120V 60Hz Live

Frequency	Average	Average	Average	Average	Average	Quasi-	Quasi-	Quasi-	Quasi-	Quasi-	Overall
	dBμV	Limit	Difference	Correction	Status	Peak	Peak	Peak	Peak	Peak	Status
	dBμV	dBμV	dB	dB	dB	dBμV	dBμV	dB	dB	dB	
172.5 kHz	8.0	54.8	-46.81	10.0	Pass	23.9	64.8	-40.90	10.0	Pass	Pass
208.5 kHz	2.4	53.3	-50.88	9.9	Pass	17.4	63.3	-45.91	9.9	Pass	Pass
276.0 kHz	-0.9	50.9	-51.82	9.7	Pass	11.5	60.9	-49.44	9.7	Pass	Pass
411.0 kHz	7.1	47.6	-40.53	9.9	Pass	22.6	57.6	-35.05	9.9	Pass	Pass
720.6 kHz	0.5	46.0	-45.48	10.0	Pass	13.1	56.0	-42.94	10.0	Pass	Pass
2.340 MHz	-0.4	46.0	-46.44	10.0	Pass	6.9	56.0	-49.11	10.0	Pass	Pass
2.446 MHz	0.0	46.0	-46.04	10.0	Pass	9.3	56.0	-46.68	10.0	Pass	Pass
2.931 MHz	0.6	46.0	-45.41	10.0	Pass	9.7	56.0	-46.30	10.0	Pass	Pass
3.134 MHz	0.5	46.0	-45.54	10.1	Pass	10.0	56.0	-45.98	10.1	Pass	Pass
3.542 MHz	0.2	46.0	-45.77	10.1	Pass	10.8	56.0	-45.22	10.1	Pass	Pass
10.739 MHz	4.8	50.0	-45.24	10.8	Pass	16.9	60.0	-43.1	10.8	Pass	Pass
14.006 MHz	2.9	50.0	-47.06	11.0	Pass	14.7	60.0	-45.31	11.0	Pass	Pass
28.662 MHz	5.0	50.0	-44.96	11.3	Pass	18.3	60.0	-41.71	11.3	Pass	Pass

Table 12: Input Power Live Conducted Emissions Peaks – ANT+ operation



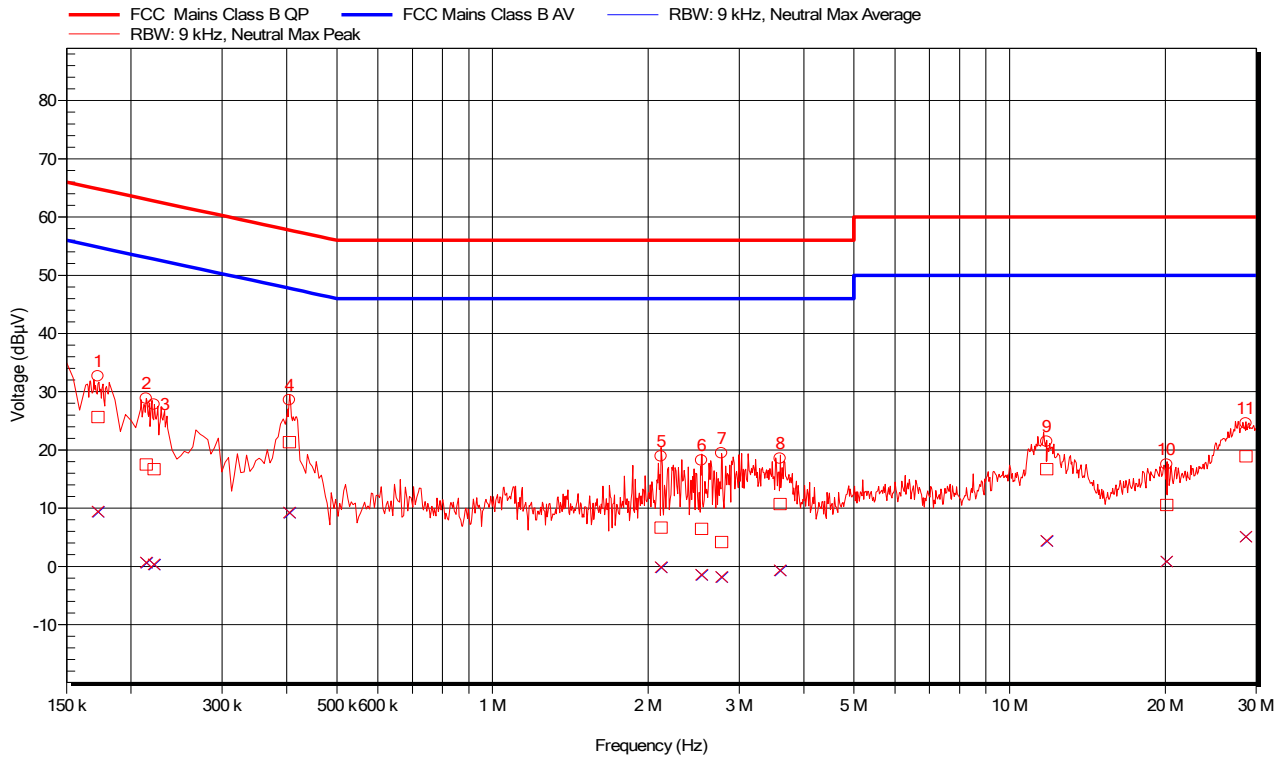


Figure 18: Mains conducted Emissions Plot – ANT+ operation - Input Power 120V 60Hz Neutral

Frequency	Average	Average	Average	Average	Average	Quasi-Peak	Quasi-Peak	Quasi-Peak	Quasi-Peak	Quasi-Peak	Overall
	dBμV	Limit	Difference	Correction	Status	dBμV	Limit	Difference	Correction	Status	Status
172.5 kHz	9.4	54.8	-45.40	10.0	Pass	25.7	64.8	-39.18	10.0	Pass	Pass
213.9 kHz	0.7	53.1	-52.37	9.9	Pass	17.5	63.1	-45.53	9.9	Pass	Pass
221.6 kHz	0.3	52.8	-52.43	9.8	Pass	16.7	62.8	-46.06	9.8	Pass	Pass
404.7 kHz	9.2	47.8	-38.51	9.9	Pass	21.3	57.8	-36.43	9.9	Pass	Pass
2.119 MHz	-0.2	46.0	-46.15	10.0	Pass	6.7	56.0	-49.31	10.0	Pass	Pass
2.535 MHz	-1.4	46.0	-47.43	10.0	Pass	6.4	56.0	-49.55	10.0	Pass	Pass
2.774 MHz	-1.8	46.0	-47.80	10.0	Pass	4.2	56.0	-51.83	10.0	Pass	Pass
3.599 MHz	-0.7	46.0	-46.68	10.1	Pass	10.7	56.0	-45.28	10.1	Pass	Pass
11.787 MHz	4.4	50.0	-45.60	10.9	Pass	16.7	60.0	-43.28	10.9	Pass	Pass
20.135 MHz	0.9	50.0	-49.14	11.0	Pass	10.5	60.0	-49.46	11.0	Pass	Pass
28.626 MHz	5.1	50.0	-44.88	11.3	Pass	18.9	60.0	-41.12	11.3	Pass	Pass

Table 13: Input Power Neutral Conducted Emissions Peaks – ANT+ operation

#### 10.4.6 Correction factors

The quasi-peak correction and average correction are shown in the above table. This correction figure consists of LISN Insertion loss (IL), Cable loss (CL) and Transient Limiter Loss (TL)

The Actual Signal Level (ASL) is calculated as follows:

$$\text{ASL (dB}\mu\text{V)} = \text{Indicated Signal Level (dB}\mu\text{V)} + \text{IL (dB)} + \text{CL (dB)} + \text{TL (dB)}$$

#### 10.4.7 Sample Data

The Quasi-Peak level at 28.626 MHz

$$\text{ASL (dB}\mu\text{V)} = 5.1\text{dB}\mu\text{V} = -6.6\text{dB}\mu\text{V} + 1.2\text{dB} + 0.1\text{dB} + 10.4\text{dB}$$

## **Appendix A EUT Test Photos**

**Test set up photographs are supplied separately.**

## Appendix B Test Equipment List

### Conducted Emissions from Antenna Port

Item	Serial No.	Last Calibration Date	Calibration Interval
RF Cable	Cable 22	January 2022	12 Months
R & S ESR7	C0499	3 <sup>rd</sup> February 2022	12 Months
Keysight MXE	C0339	25 <sup>th</sup> January 2022	12 Months

**Radiated Emissions Equipment**

Item	Serial No.	Last Calibration Date	Calibration Interval
Laboratory 1 Semi-Anechoic Chamber	Lab 1	28 <sup>th</sup> January 2020	36 Months
ETS Lindgren 2017B Mast (1 – 4m) with tilting mechanism	--	N/A	N/A
R & S ESR26	C0502	10 <sup>th</sup> November 2021	12 Months
Teseq CBL 6112D Bilog antenna	C0506	15 <sup>th</sup> July 2021	36 Months
6dB Attenuator (For use with Bilog Antenna)	C0506B	15 <sup>th</sup> July 2021	36 Months
HF26 Cable	HF26	17 <sup>th</sup> January 2022	12 Months
HF35 Cable	HF35	17 <sup>th</sup> January 2022	12 Months
HF27 Cable	HF27	17 <sup>th</sup> January 2022	12 Months
Schwarzbeck D-69250 Antenna 1-18GHz	C0626	23 <sup>rd</sup> December 2021	24 Months
2.4GHz Microtronics BRM50702 notch filter	C0473	11 <sup>th</sup> January 2022	12 Months
BONN BLMA 0118-M Preamplifier	G0327	6 <sup>th</sup> January 2022	12 Months
ETS Lingren 3116C-PA Horn Antenna 18-40GHz	C0433	17 <sup>th</sup> October 2019	36 Months