



FCC RF Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Wireless Tablet
MODEL NAME : SU8NST
FCC ID : 2A4DH-0808
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Sep. 30, 2022 ~ Oct. 12, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

 1.1 Applicant.....5

 1.2 Product Feature of Equipment Under Test.....5

 1.3 Product Specification of Equipment Under Test.....5

 1.4 Modification of EUT6

 1.5 Testing Location6

 1.6 Test Software.....6

 1.7 Applicable Standards.....7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST8

 2.1 Carrier Frequency and Channel8

 2.2 Test Mode.....9

 2.3 Connection Diagram of Test System.....10

 2.4 Support Unit used in test configuration and system.....11

 2.5 EUT Operation Test Setup11

 2.6 Measurement Results Explanation Example.....12

3 TEST RESULT.....13

 3.1 6dB and 99% Bandwidth Measurement13

 3.2 Output Power Measurement.....14

 3.3 Power Spectral Density Measurement19

 3.4 Conducted Band Edges and Spurious Emission Measurement20

 3.5 Radiated Band Edges and Spurious Emission Measurement21

 3.6 AC Conducted Emission Measurement.....25

 3.7 Antenna Requirements.....27

4 LIST OF MEASURING EQUIPMENT28

5 UNCERTAINTY OF EVALUATION.....29

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR261401-01C	Rev. 01	Initial issue of report	Nov. 01, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.11 dB at 2484.16 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.51 dB at 0.150 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Amazon.com Services LLC
410 Terry Avenue N, Seattle, WA 98109-5210, United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Tablet
Model Name	SU8NST
FCC ID	2A4DH-0808
SN	Conducted: GCC2DM022342005T Conduction: GCC2DM02235300BK Radiation: GCC2DM02235300BD

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2472 MHz
Maximum (Peak) Output Power to antenna	SISO Ant 1 802.11b : 17.49 dBm (0.0561 W) 802.11g : 20.45 dBm (0.1109 W) 802.11n HT20 : 20.84 dBm (0.1213 W) 802.11ax HE20 : 21.32 dBm (0.1355 W) SISO Ant 2 802.11b : 21.27 dBm (0.1340 W) 802.11g : 23.07 dBm (0.2028 W) 802.11n HT20 : 22.64 dBm (0.1837 W) 802.11ax HE20 : 23.89 dBm (0.2449 W)
99% Occupied Bandwidth	SISO Ant 1 802.11b : 12.787MHz 802.11g : 17.822MHz 802.11ax HE20 : 19.181MHz SISO Ant 2 802.11b : 12.747MHz 802.11g : 17.862MHz 802.11ax HE20 : 19.181MHz
Antenna Type / Gain	ANT.1 : FPC Antenna type with gain 0.7 dBi ANT.2 : LDS Antenna type with gain -5.1 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n /ax: OFDM (BPSK / QPSK / 16QAM / 64QAM/1024QAM)

Remark:

1. WLAN support SISO only and channel 12/13.
2. For 802.11n & 802.11ax mode, the whole testing have assessed only 802.11ax HE20 by referring to



the higher output power.

- 3. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test Power/PSD/RSE, the full RU power > partial RU, therefore the full RU perform full test and Partial RU verified power/PSD/RSE.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11ax HE20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :WLAN Link(2.4G)+ BT Link+ USB Cable(Charging From Adapter(AP15 US))
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable	


CO-location
2.4GH WIFI 802.11g Tx + BLE CH 39 2Mbps Link

2.3 Connection Diagram of Test System


AC Conducted Emission:

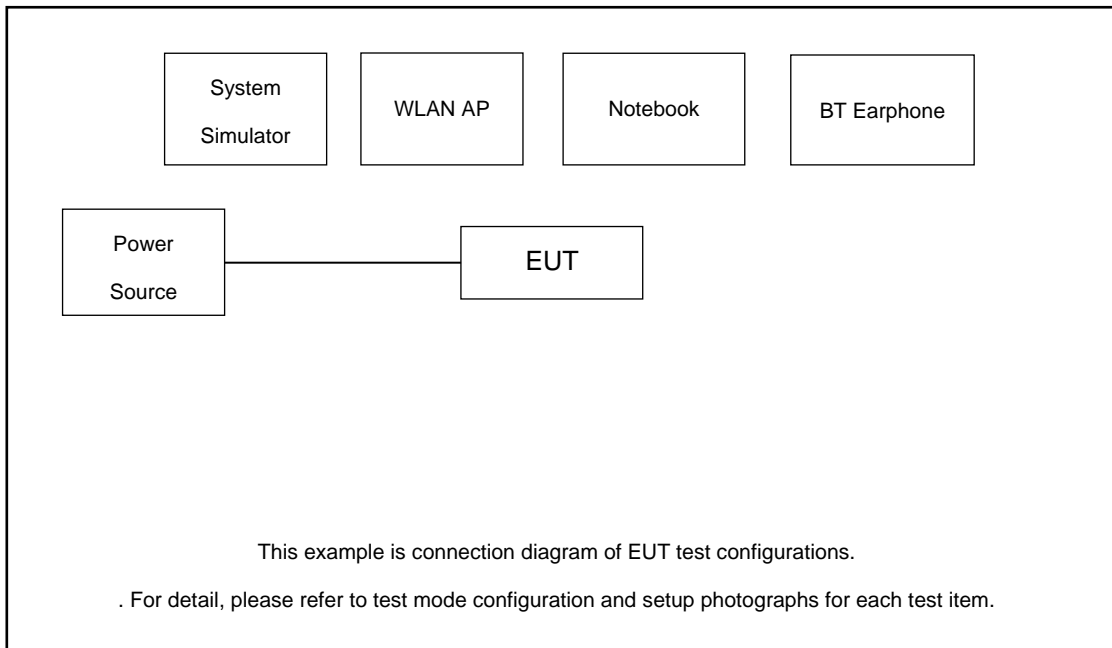

Radiated Emission:

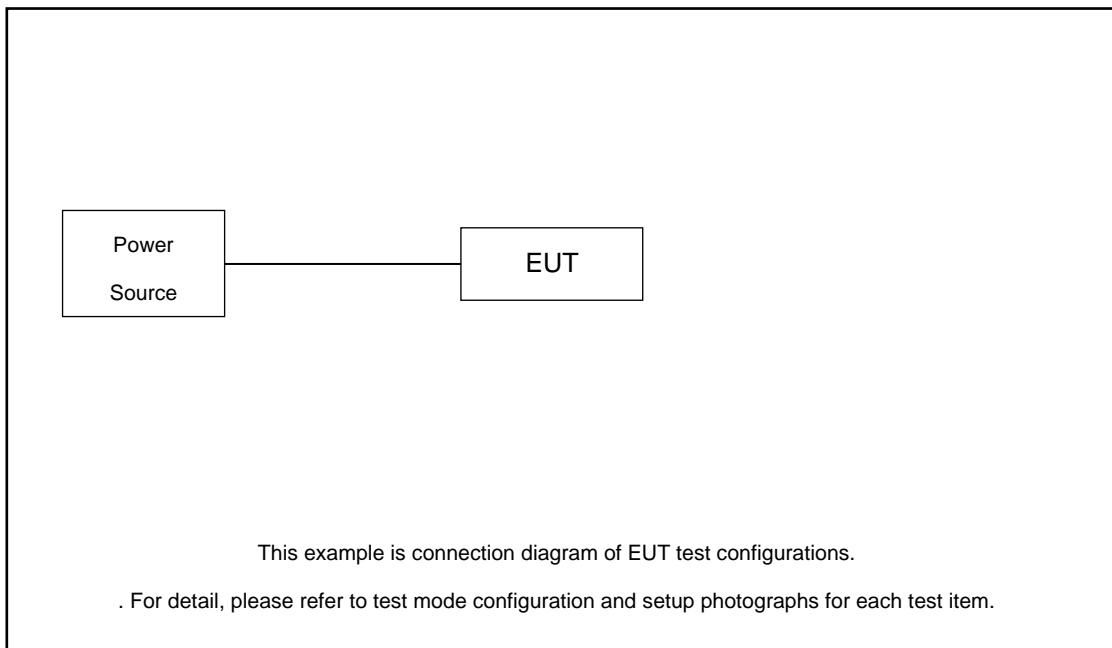

Radiated Emission with Keyboard

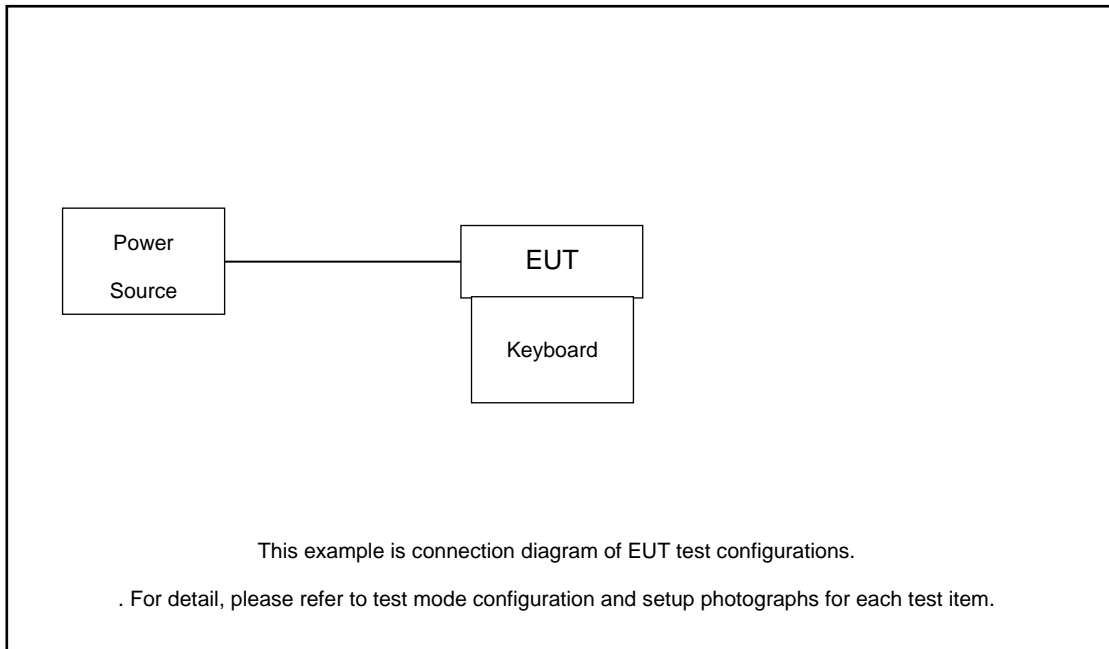

2.4 Support Unit used in test configuration and system

Item	Equipment	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	LBH308	N/A	N/A
2.	BT Base Station	CBT	N/A	N/A
3.	Notebook	G480	QDS-BRCM1050I	N/A
4.	Router	DIR-655	KA21R655B1	N/A
5.	SD Card	8GB	N/A	N/A
6.	Keyboard	SA6DIN	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.95 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 2.95 + 10 = 12.95 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

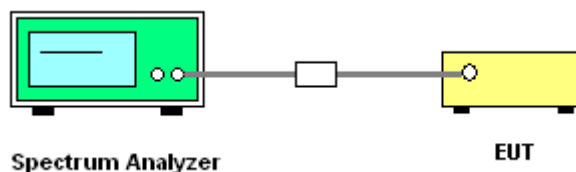

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

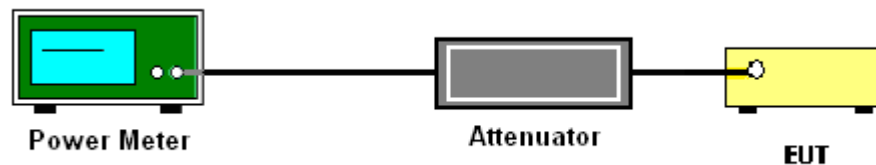



3.2.5 Test Result of Peak Output Power

2.4GHz Band Single Antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)		Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	17.49	21.27	30.00	30.00	0.70	-5.10	18.19	16.17	36.00	36.00	Pass
11b	1Mbps	1	6	2437	17.38	21.11	30.00	30.00	0.70	-5.10	18.08	16.01	36.00	36.00	Pass
11b	1Mbps	1	11	2462	17.26	20.72	30.00	30.00	0.70	-5.10	17.96	15.62	36.00	36.00	Pass
11b	1Mbps	1	12	2467	17.47	20.83	30.00	30.00	0.70	-5.10	18.17	15.73	36.00	36.00	Pass
11b	1Mbps	1	13	2472	17.44	20.65	30.00	30.00	0.70	-5.10	18.14	15.55	36.00	36.00	Pass
11g	6Mbps	1	1	2412	20.45	23.07	30.00	30.00	0.70	-5.10	21.15	17.97	36.00	36.00	Pass
11g	6Mbps	1	6	2437	19.64	22.22	30.00	30.00	0.70	-5.10	20.34	17.12	36.00	36.00	Pass
11g	6Mbps	1	11	2462	19.71	22.04	30.00	30.00	0.70	-5.10	20.41	16.94	36.00	36.00	Pass
11g	6Mbps	1	12	2467	19.52	21.71	30.00	30.00	0.70	-5.10	20.22	16.61	36.00	36.00	Pass
11g	6Mbps	1	13	2472	17.87	20.38	30.00	30.00	0.70	-5.10	18.57	15.28	36.00	36.00	Pass
HT20	MCS0	1	1	2412	20.09	22.38	30.00	30.00	0.70	-5.10	20.79	17.28	36.00	36.00	Pass
HT20	MCS0	1	6	2437	20.16	22.64	30.00	30.00	0.70	-5.10	20.86	17.54	36.00	36.00	Pass
HT20	MCS0	1	11	2462	20.31	21.12	30.00	30.00	0.70	-5.10	21.01	16.02	36.00	36.00	Pass
HT20	MCS0	1	12	2467	20.13	20.69	30.00	30.00	0.70	-5.10	20.83	15.59	36.00	36.00	Pass
HT20	MCS0	1	13	2472	20.84	21.27	30.00	30.00	0.70	-5.10	21.54	16.17	36.00	36.00	Pass



2.4GHz Band Single Antenna															
Mod.	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)		Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	1	1	2412	Full	20.21	22.51	30.00	30.00	0.70	-5.10	20.91	17.41	36.00	36.00	Pass
HE20	1	1	2412	26/0	16.48	17.05	30.00	30.00	0.70	-5.10	17.18	11.95	36.00	36.00	Pass
HE20	1	1	2412	52/37	18.01	19.35	30.00	30.00	0.70	-5.10	18.71	14.25	36.00	36.00	Pass
HE20	1	1	2412	106/53	19.85	22.05	30.00	30.00	0.70	-5.10	20.55	16.95	36.00	36.00	Pass
HE20	1	6	2437	Full	20.53	23.89	30.00	30.00	0.70	-5.10	21.23	18.79	36.00	36.00	Pass
HE20	1	6	2437	26/4	16.32	17.26	30.00	30.00	0.70	-5.10	17.02	12.16	36.00	36.00	Pass
HE20	1	6	2437	52/39	18.36	19.44	30.00	30.00	0.70	-5.10	19.06	14.34	36.00	36.00	Pass
HE20	1	6	2437	106/53	20.08	22.65	30.00	30.00	0.70	-5.10	20.78	17.55	36.00	36.00	Pass
HE20	1	11	2462	Full	20.48	21.38	30.00	30.00	0.70	-5.10	21.18	16.28	36.00	36.00	Pass
HE20	1	11	2462	26/8	16.23	17.11	30.00	30.00	0.70	-5.10	16.93	12.01	36.00	36.00	Pass
HE20	1	11	2462	52/40	18.26	19.38	30.00	30.00	0.70	-5.10	18.96	14.28	36.00	36.00	Pass
HE20	1	11	2462	106/54	20.19	21.23	30.00	30.00	0.70	-5.10	20.89	16.13	36.00	36.00	Pass
HE20	1	12	2467	Full	20.52	21.04	30.00	30.00	0.70	-5.10	21.22	15.94	36.00	36.00	Pass
HE20	1	12	2467	26/8	16.38	16.95	30.00	30.00	0.70	-5.10	17.08	11.85	36.00	36.00	Pass
HE20	1	12	2467	52/40	18.23	19.26	30.00	30.00	0.70	-5.10	18.93	14.16	36.00	36.00	Pass
HE20	1	12	2467	106/54	20.35	20.92	30.00	30.00	0.70	-5.10	21.05	15.82	36.00	36.00	Pass
HE20	1	13	2472	Full	21.32	21.55	30.00	30.00	0.70	-5.10	22.02	16.45	36.00	36.00	Pass
HE20	1	13	2472	26/8	16.42	16.88	30.00	30.00	0.70	-5.10	17.12	11.78	36.00	36.00	Pass
HE20	1	13	2472	52/40	18.18	19.23	30.00	30.00	0.70	-5.10	18.88	14.13	36.00	36.00	Pass
HE20	1	13	2472	106/54	20.49	21.16	30.00	30.00	0.70	-5.10	21.19	16.06	36.00	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

2.4GHz Band Single Antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)		Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	14.97	18.75	30.00	30.00	0.70	-5.10	15.67	13.65	36.00	36.00	Pass
11b	1Mbps	1	6	2437	14.91	18.48	30.00	30.00	0.70	-5.10	15.61	13.38	36.00	36.00	Pass
11b	1Mbps	1	11	2462	14.82	18.23	30.00	30.00	0.70	-5.10	15.52	13.13	36.00	36.00	Pass
11b	1Mbps	1	12	2467	14.95	18.32	30.00	30.00	0.70	-5.10	15.65	13.22	36.00	36.00	Pass
11b	1Mbps	1	13	2472	14.99	18.16	30.00	30.00	0.70	-5.10	15.69	13.06	36.00	36.00	Pass
11g	6Mbps	1	1	2412	14.30	16.84	30.00	30.00	0.70	-5.10	15.00	11.74	36.00	36.00	Pass
11g	6Mbps	1	6	2437	14.39	16.95	30.00	30.00	0.70	-5.10	15.09	11.85	36.00	36.00	Pass
11g	6Mbps	1	11	2462	14.37	16.62	30.00	30.00	0.70	-5.10	15.07	11.52	36.00	36.00	Pass
11g	6Mbps	1	12	2467	14.26	16.50	30.00	30.00	0.70	-5.10	14.96	11.40	36.00	36.00	Pass
11g	6Mbps	1	13	2472	11.86	14.53	30.00	30.00	0.70	-5.10	12.56	9.43	36.00	36.00	Pass
HT20	MCS0	1	1	2412	14.61	15.77	30.00	30.00	0.70	-5.10	15.31	10.67	36.00	36.00	Pass
HT20	MCS0	1	6	2437	14.64	15.84	30.00	30.00	0.70	-5.10	15.34	10.74	36.00	36.00	Pass
HT20	MCS0	1	11	2462	14.65	15.51	30.00	30.00	0.70	-5.10	15.35	10.41	36.00	36.00	Pass
HT20	MCS0	1	12	2467	14.57	15.58	30.00	30.00	0.70	-5.10	15.27	10.48	36.00	36.00	Pass
HT20	MCS0	1	13	2472	14.67	15.06	30.00	30.00	0.70	-5.10	15.37	9.96	36.00	36.00	Pass



2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)		Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	Full	1	1	2412	Full	14.88	16.05	30.00	30.00	0.70	-5.10	15.58	10.95	36.00	36.00	Pass
HE20	Full	1	1	2412	26/0	6.56	7.18	30.00	30.00	0.70	-5.10	7.26	2.08	36.00	36.00	Pass
HE20	Full	1	1	2412	52/37	9.22	10.46	30.00	30.00	0.70	-5.10	9.92	5.36	36.00	36.00	Pass
HE20	Full	1	1	2412	106/53	11.66	12.83	30.00	30.00	0.70	-5.10	12.36	7.73	36.00	36.00	Pass
HE20	Full	1	6	2437	Full	14.87	17.18	30.00	30.00	0.70	-5.10	15.57	12.08	36.00	36.00	Pass
HE20	Full	1	6	2437	26/4	6.67	7.64	30.00	30.00	0.70	-5.10	7.37	2.54	36.00	36.00	Pass
HE20	Full	1	6	2437	52/39	9.47	10.76	30.00	30.00	0.70	-5.10	10.17	5.66	36.00	36.00	Pass
HE20	Full	1	6	2437	106/53	12.16	12.97	30.00	30.00	0.70	-5.10	12.86	7.87	36.00	36.00	Pass
HE20	Full	1	11	2462	Full	14.83	15.52	30.00	30.00	0.70	-5.10	15.53	10.42	36.00	36.00	Pass
HE20	Full	1	11	2462	26/8	7.10	7.07	30.00	30.00	0.70	-5.10	7.80	1.97	36.00	36.00	Pass
HE20	Full	1	11	2462	52/40	9.34	10.52	30.00	30.00	0.70	-5.10	10.04	5.42	36.00	36.00	Pass
HE20	Full	1	11	2462	106/54	12.22	12.89	30.00	30.00	0.70	-5.10	12.92	7.79	36.00	36.00	Pass
HE20	Full	1	12	2467	Full	14.89	15.55	30.00	30.00	0.70	-5.10	15.59	10.45	36.00	36.00	Pass
HE20	Full	1	12	2467	26/8	6.50	7.12	30.00	30.00	0.70	-5.10	7.20	2.02	36.00	36.00	Pass
HE20	Full	1	12	2467	52/40	9.48	10.44	30.00	30.00	0.70	-5.10	10.18	5.34	36.00	36.00	Pass
HE20	Full	1	12	2467	106/54	12.19	12.73	30.00	30.00	0.70	-5.10	12.89	7.63	36.00	36.00	Pass
HE20	Full	1	13	2472	Full	14.93	15.53	30.00	30.00	0.70	-5.10	15.63	10.43	36.00	36.00	Pass
HE20	Full	1	13	2472	26/8	6.45	7.24	30.00	30.00	0.70	-5.10	7.15	2.14	36.00	36.00	Pass
HE20	Full	1	13	2472	52/40	9.21	10.32	30.00	30.00	0.70	-5.10	9.91	5.22	36.00	36.00	Pass
HE20	Full	1	13	2472	106/54	12.07	12.86	30.00	30.00	0.70	-5.10	12.77	7.76	36.00	36.00	Pass

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

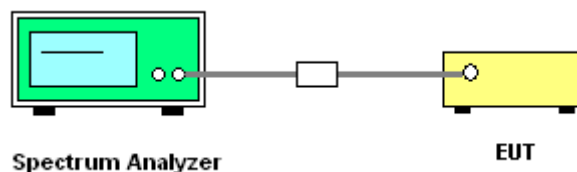

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

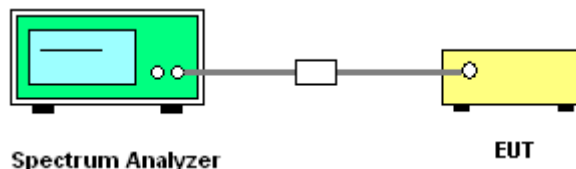

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

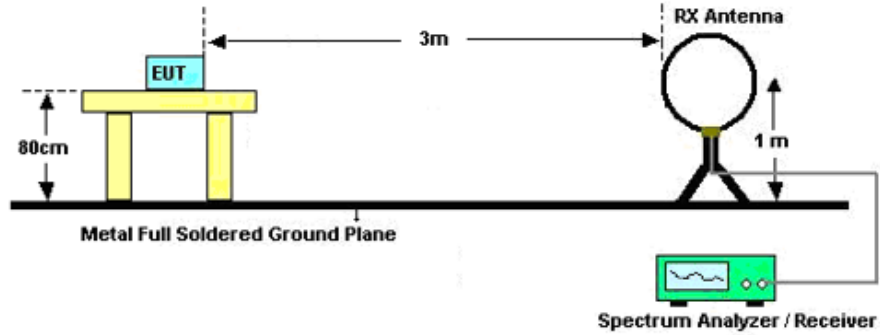

For radiated emissions from 30MHz to 1GHz

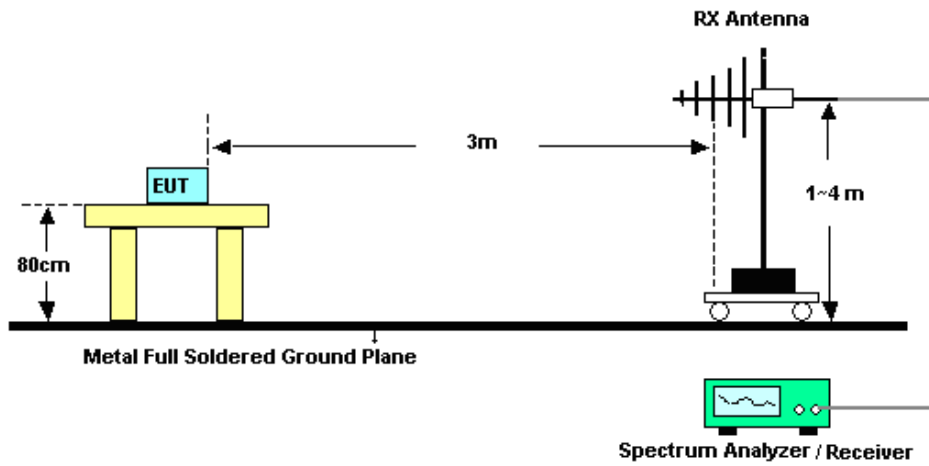

For radiated emissions above 1GHz

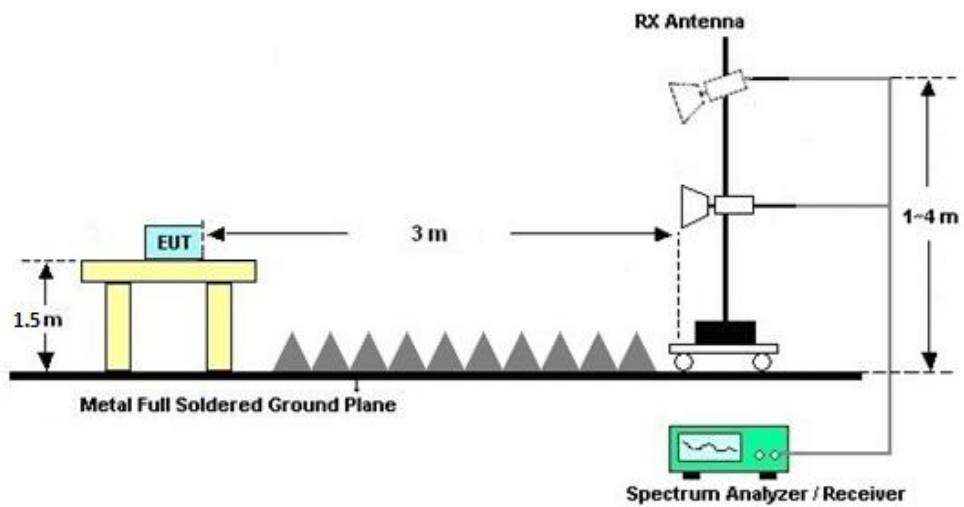



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.& D

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.& D



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

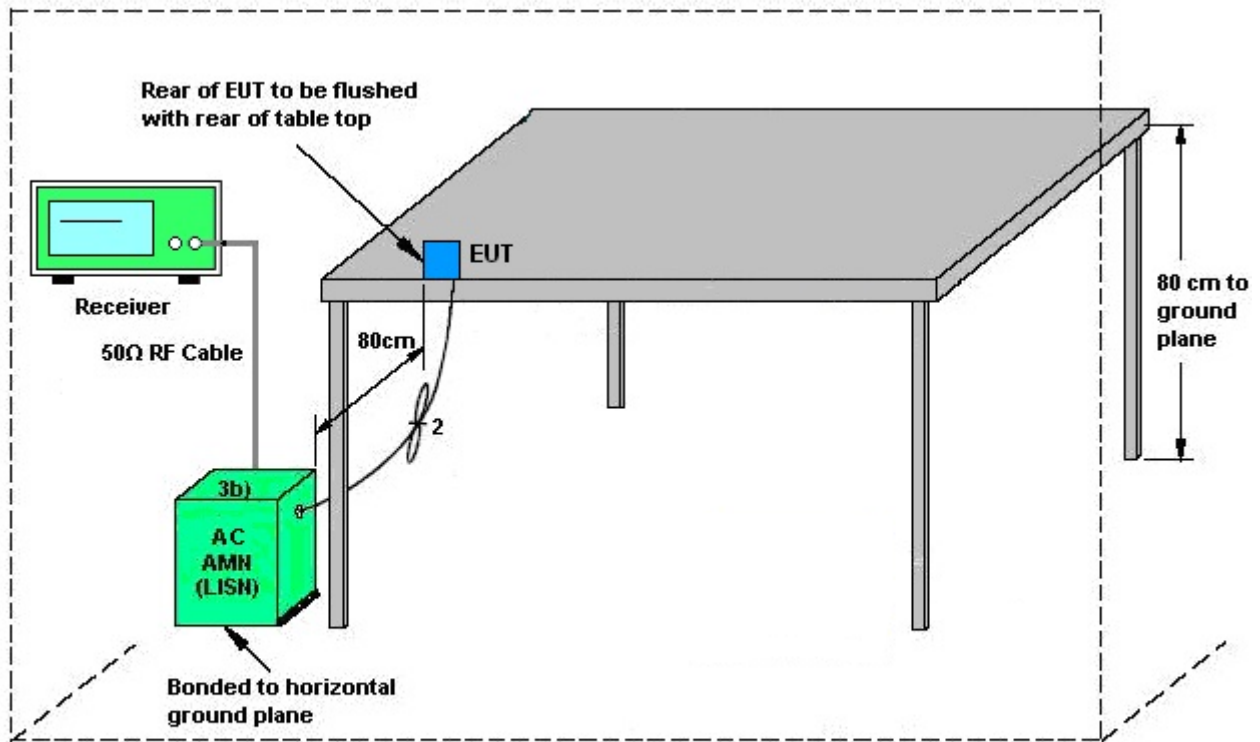

AMN = Artificial mains network (LISH)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Oct. 08, 2022~ Oct. 09, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Oct. 08, 2022~ Oct. 09, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Oct. 08, 2022~ Oct. 09, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;M ax 30dBm	Oct. 16, 2021	Oct. 12, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz-44G,MAX 30dB	Mar. 24, 2022	Oct. 12, 2022	Mar. 23, 2023	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Oct. 12, 2022	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24 ,2022	Oct. 12, 2022	May 23, 2023	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2021	Oct. 12, 2022	Nov. 07, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Oct. 12, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380826	9KHz-1GHz	Jul. 11, 2022	Oct. 12, 2022	Jul. 10, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Oct. 12, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Oct. 12, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY532703 16	500MHz~26.5G Hz	Oct. 16, 2021	Oct. 12, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Oct. 12, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 12, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 12, 2022	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Sep. 30, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Sep. 30, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Sep. 30, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Sep. 30, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.001 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>25</u> °C, <u>45</u> %RH
Test Date: <u>2022.10.08~2022.10.09</u> Test Engineer: <u>Jiang Jun</u>


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.08	2407.96	2416.04	0.5	PASS
	Ant2	2412	8.04	2408.00	2416.04	0.5	PASS
	Ant1	2437	8.04	2433.00	2441.04	0.5	PASS
	Ant2	2437	8.08	2433.00	2441.08	0.5	PASS
	Ant1	2462	8.08	2457.96	2466.04	0.5	PASS
	Ant2	2462	8.04	2458.04	2466.08	0.5	PASS
	Ant1	2467	8.52	2463.00	2471.52	0.5	PASS
	Ant2	2467	8.52	2462.52	2471.04	0.5	PASS
	Ant1	2472	8.56	2467.48	2476.04	0.5	PASS
	Ant2	2472	8.04	2468.00	2476.04	0.5	PASS
11G	Ant1	2412	15.48	2404.12	2419.60	0.5	PASS
	Ant2	2412	14.52	2404.12	2418.64	0.5	PASS
	Ant1	2437	15.36	2429.24	2444.60	0.5	PASS
	Ant2	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant1	2462	15.12	2454.44	2469.56	0.5	PASS
	Ant2	2462	15.00	2454.56	2469.56	0.5	PASS
	Ant1	2467	15.16	2459.44	2474.60	0.5	PASS
	Ant2	2467	14.12	2459.44	2473.56	0.5	PASS
	Ant1	2472	15.12	2464.48	2479.60	0.5	PASS
	Ant2	2472	15.08	2464.48	2479.56	0.5	PASS
11AX20SISO	Ant1	2412	18.88	2402.52	2421.40	0.5	PASS
	Ant2	2412	16.52	2402.76	2419.28	0.5	PASS
	Ant1	2437	18.56	2427.84	2446.40	0.5	PASS
	Ant2	2437	17.04	2429.00	2446.04	0.5	PASS
	Ant1	2462	15.88	2454.44	2470.32	0.5	PASS
	Ant2	2462	16.04	2453.52	2469.56	0.5	PASS
	Ant1	2467	18.32	2457.64	2475.96	0.5	PASS
	Ant2	2467	18.28	2457.76	2476.04	0.5	PASS
	Ant1	2472	18.52	2462.76	2481.28	0.5	PASS
	Ant2	2472	18.48	2462.72	2481.20	0.5	PASS





Test Graphs

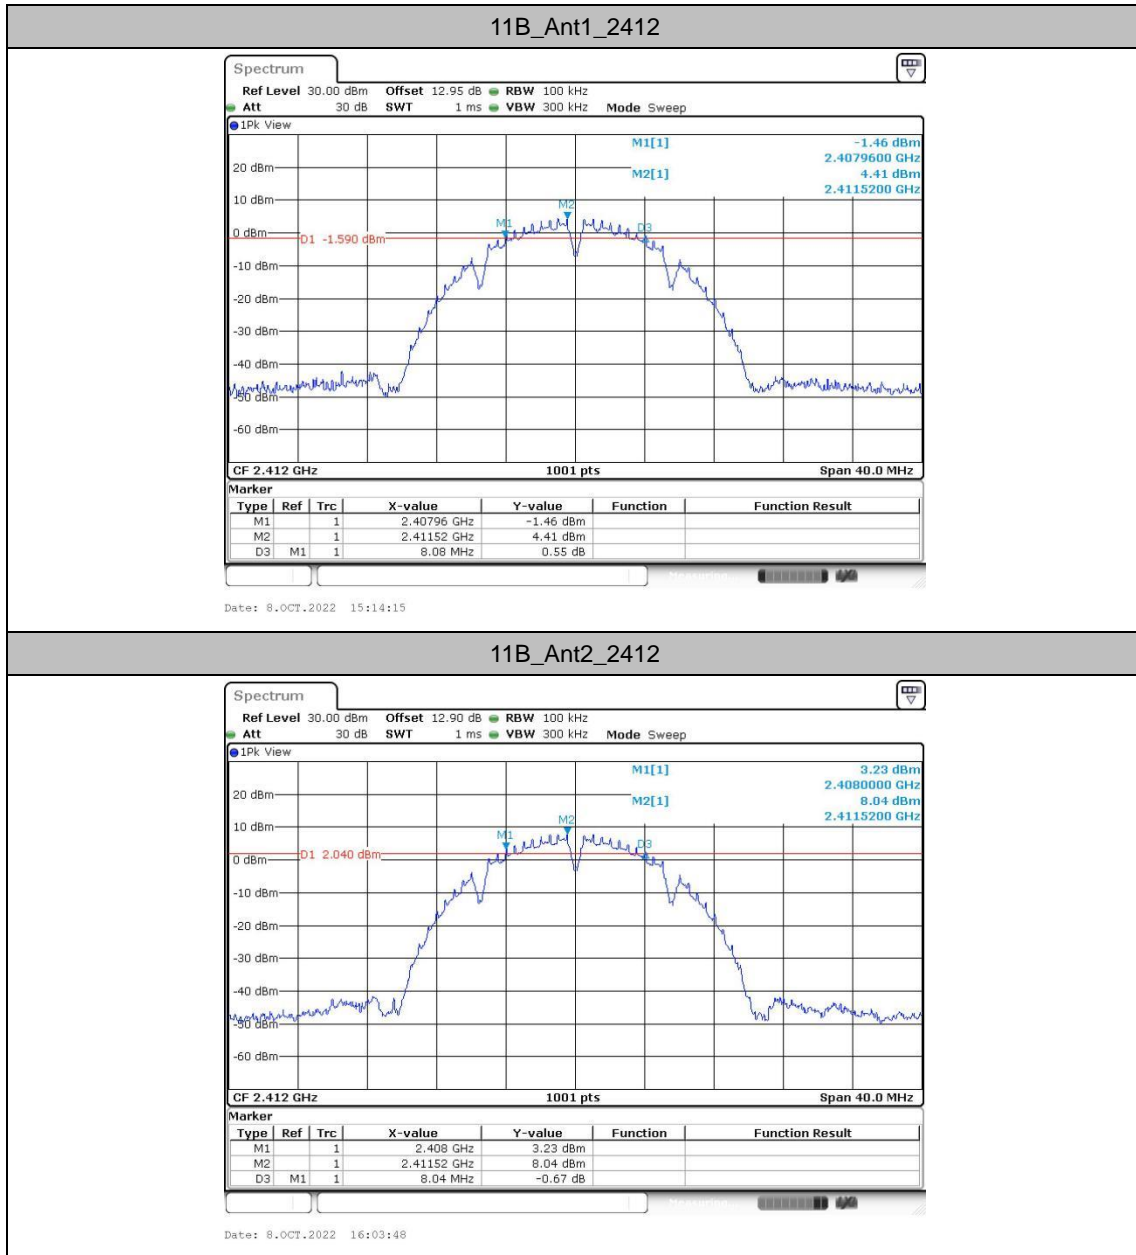


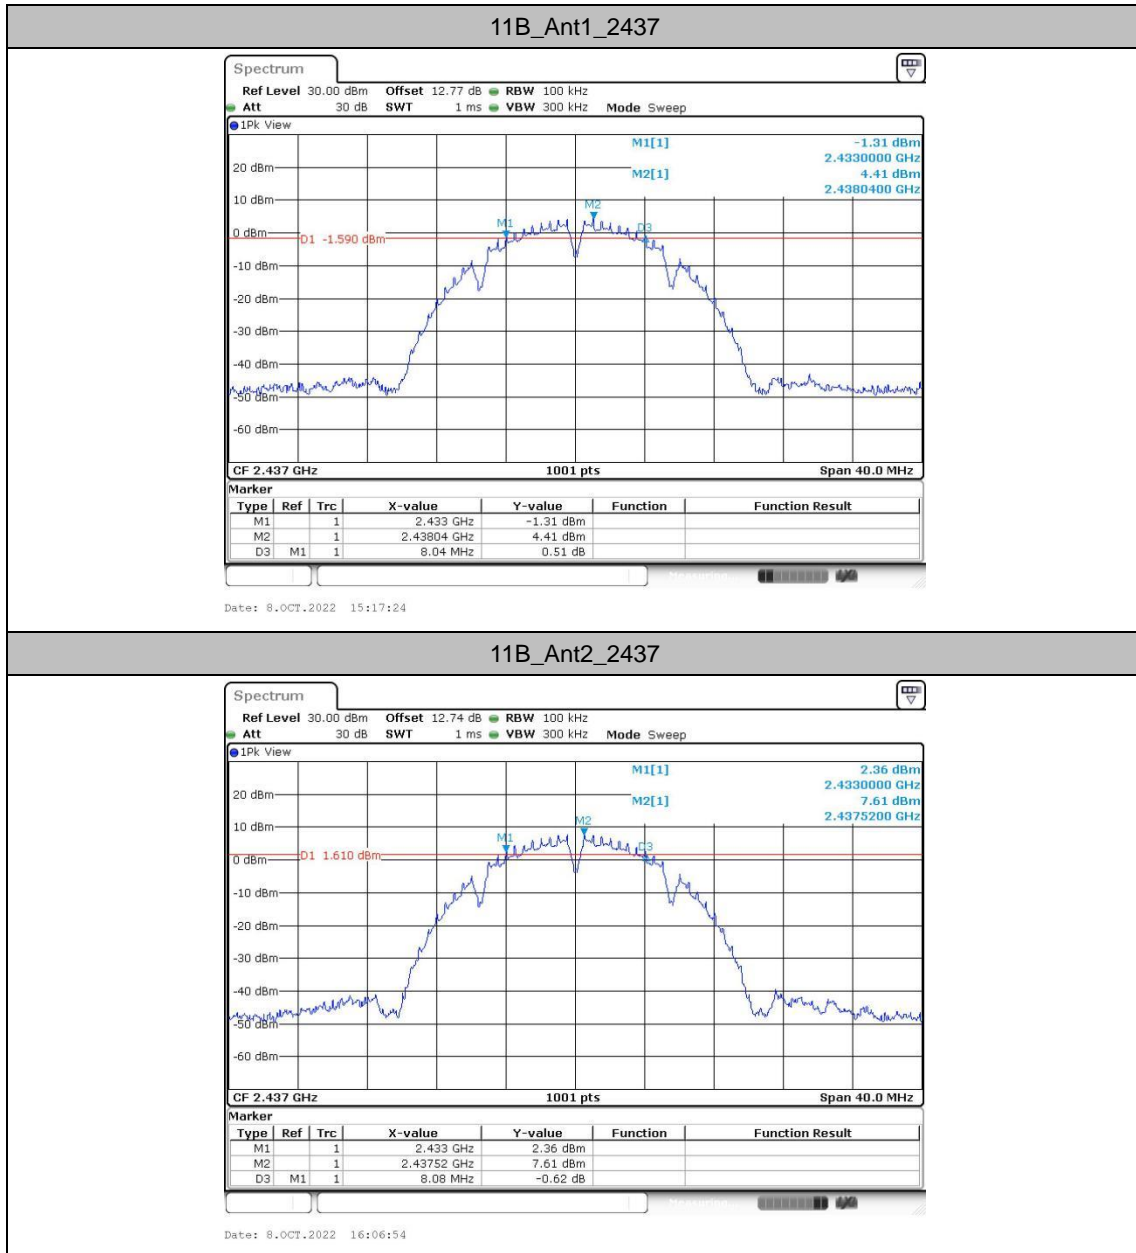


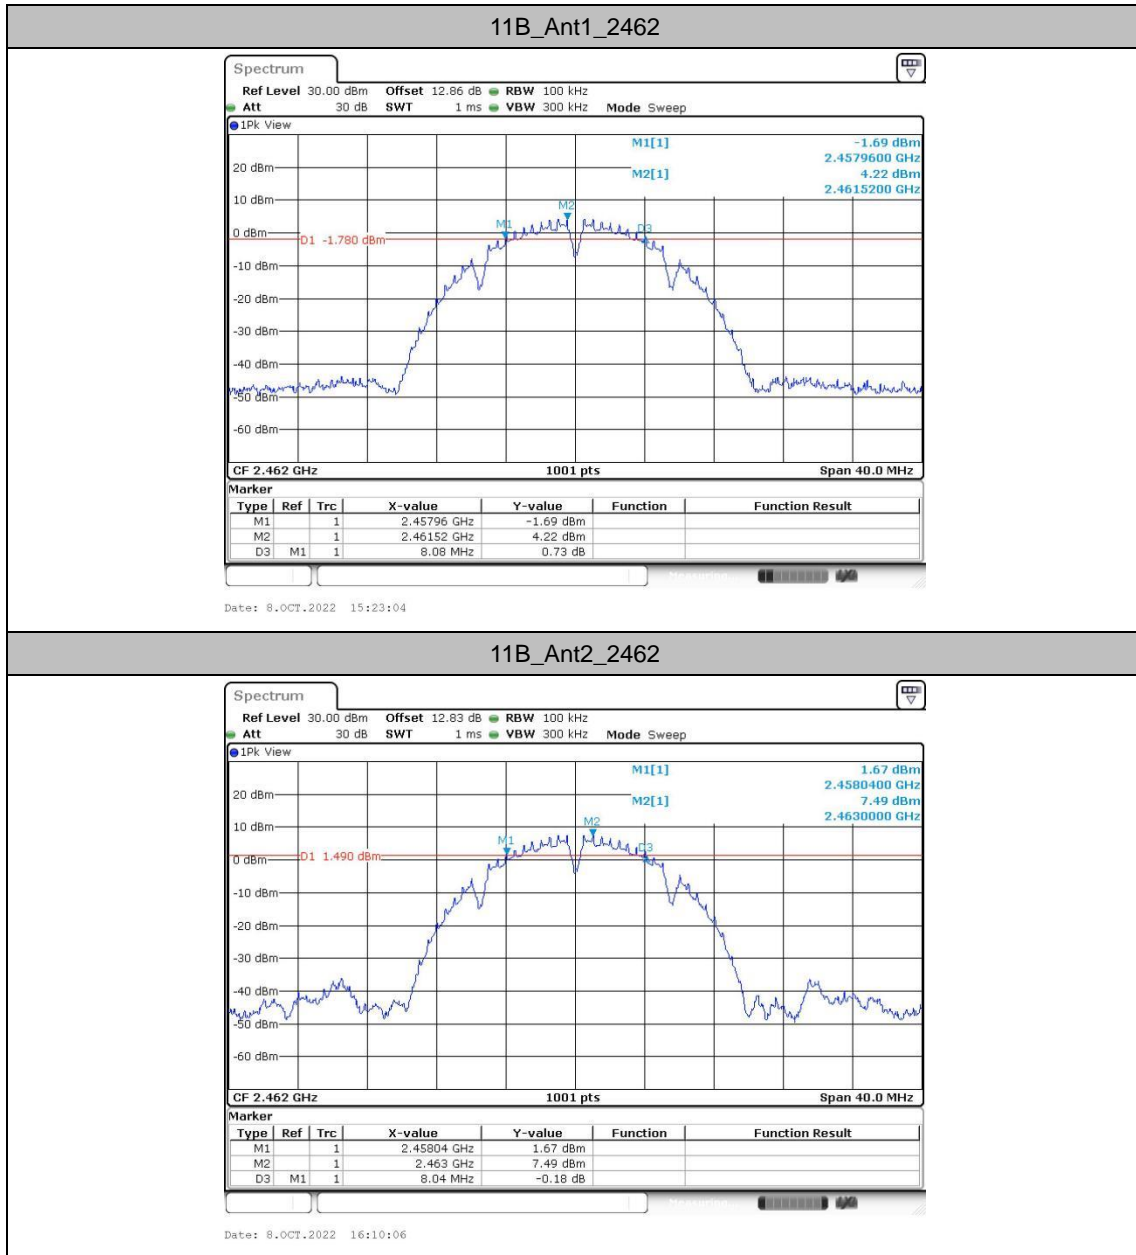


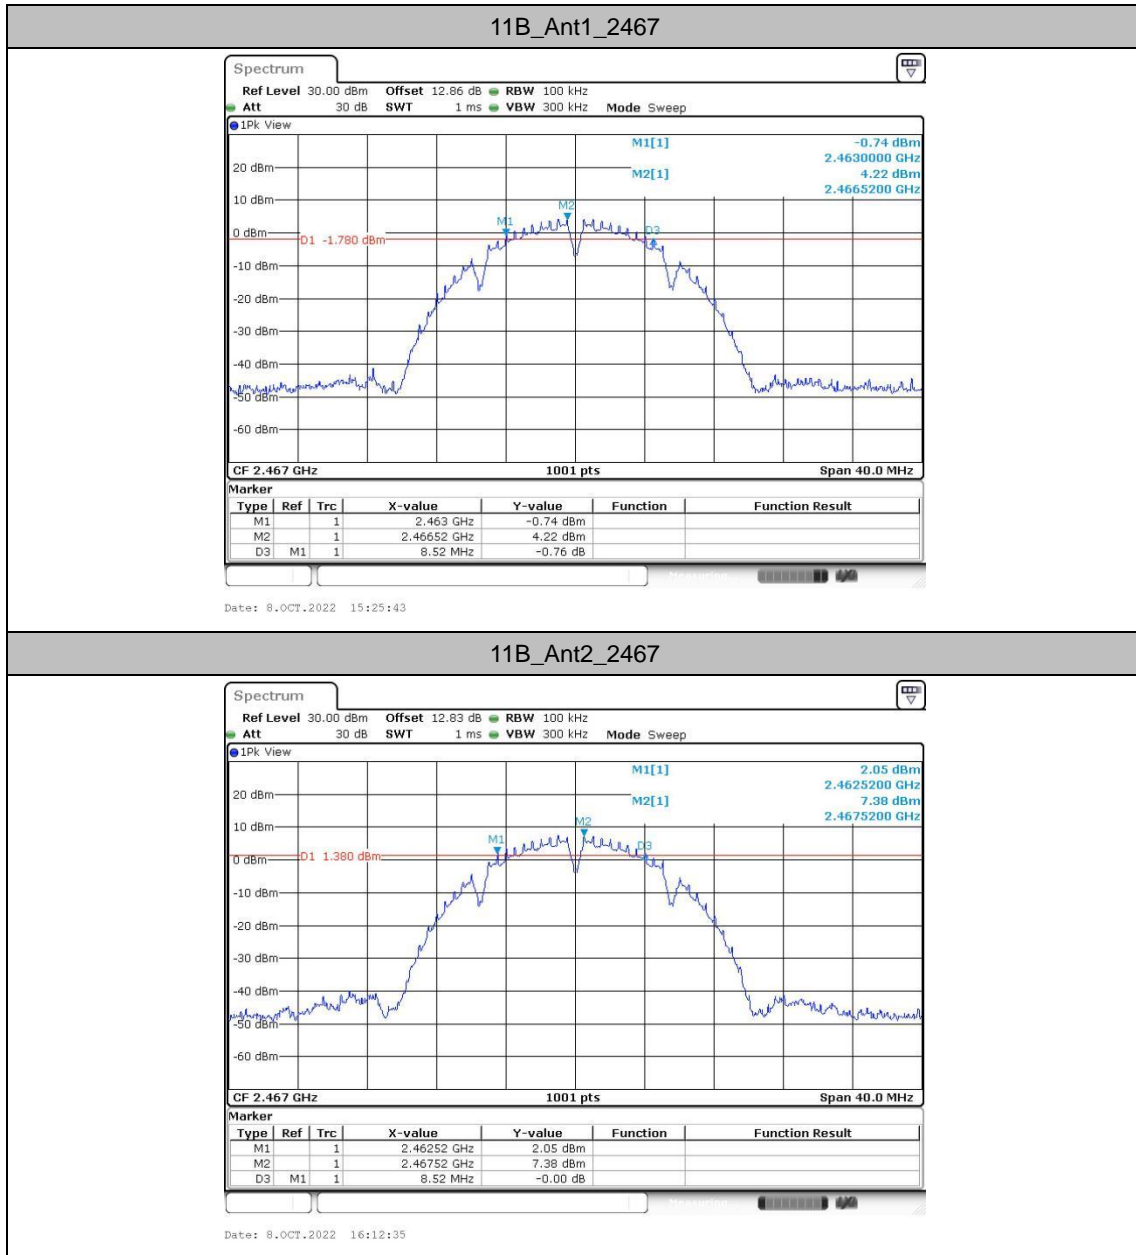


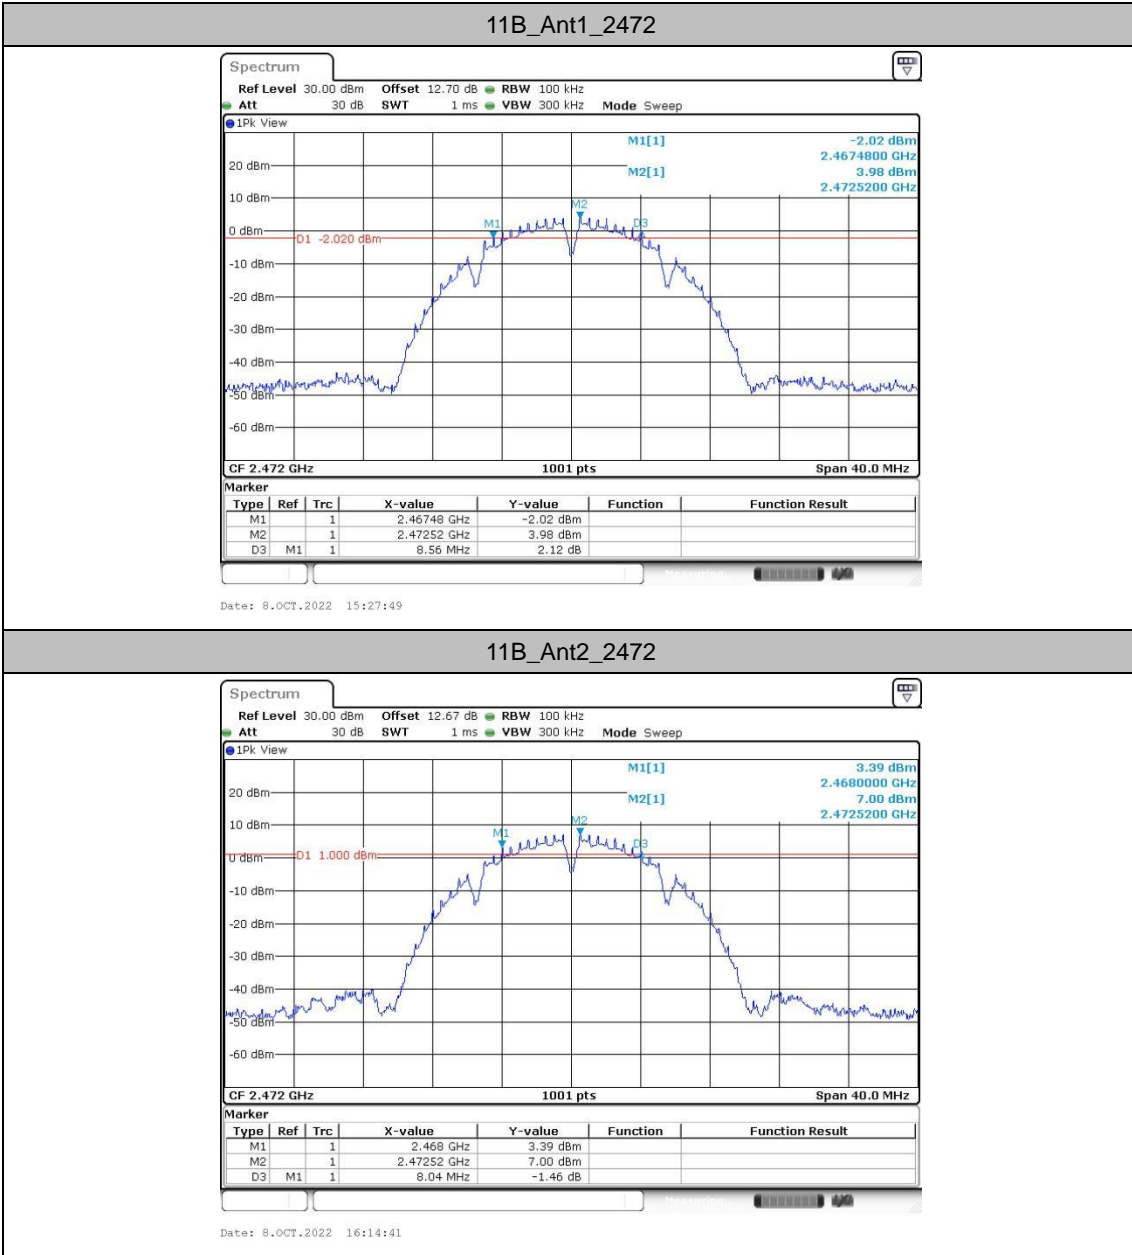


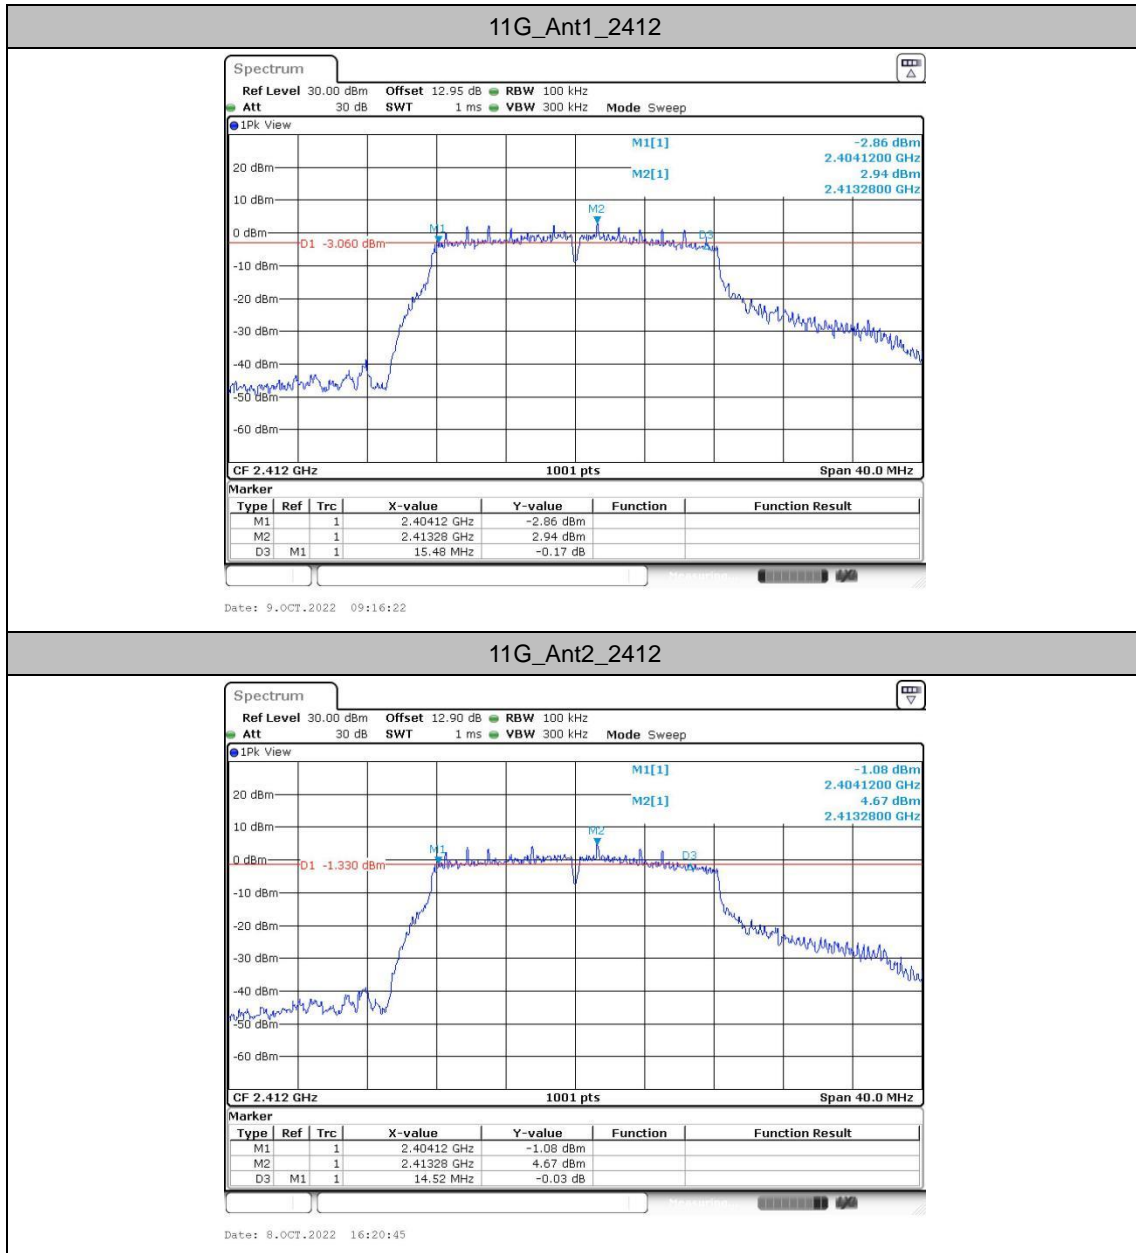


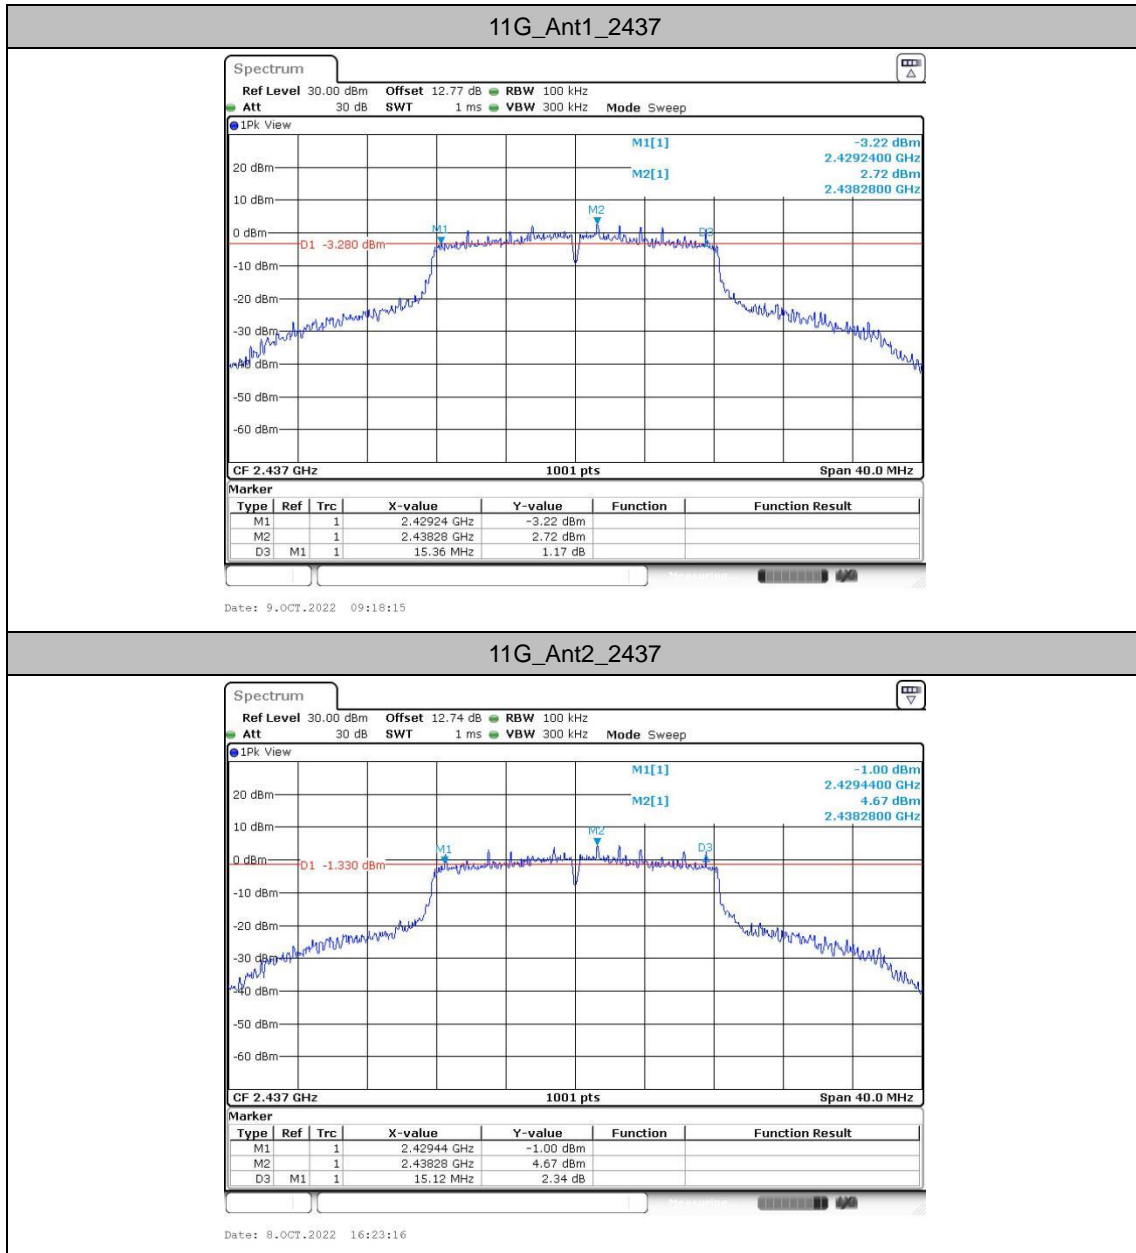


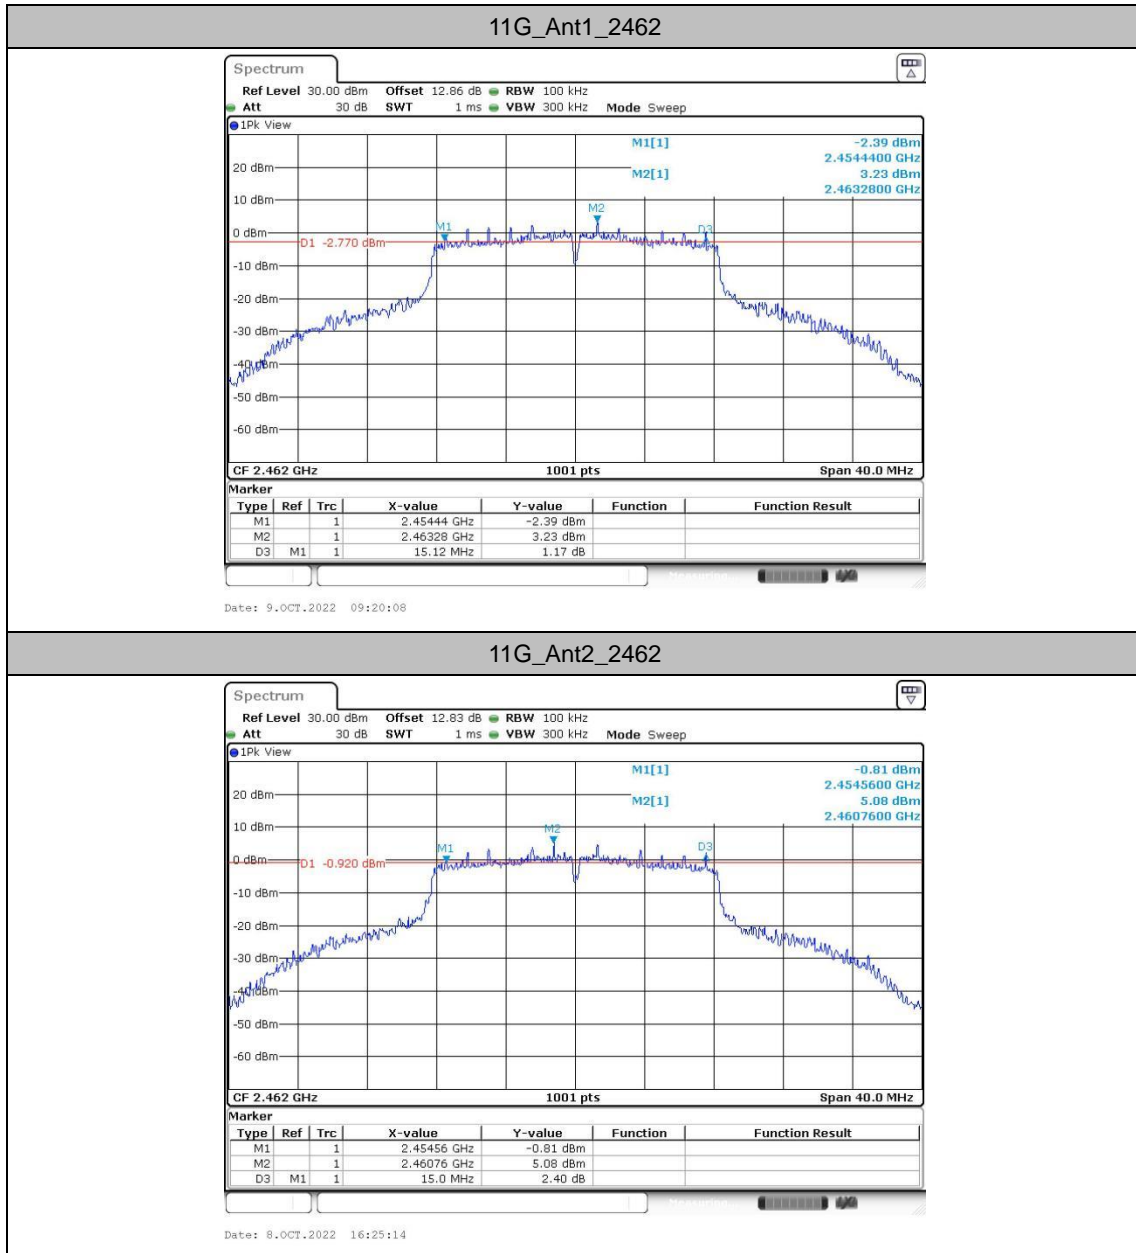
11G_Ant2_2462

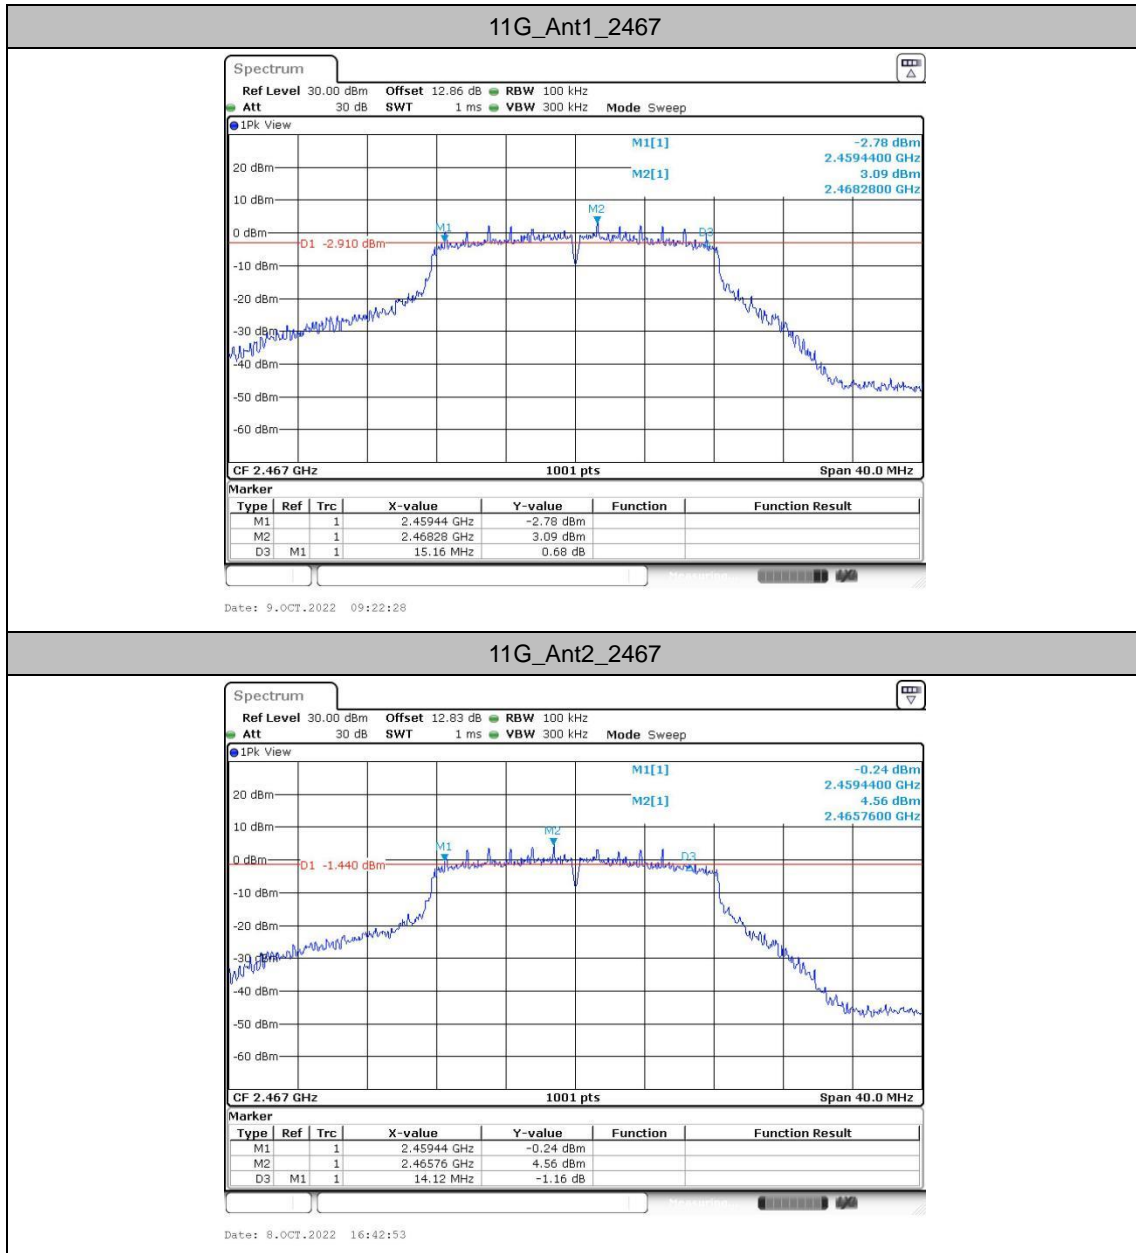
11G_Ant2_2467

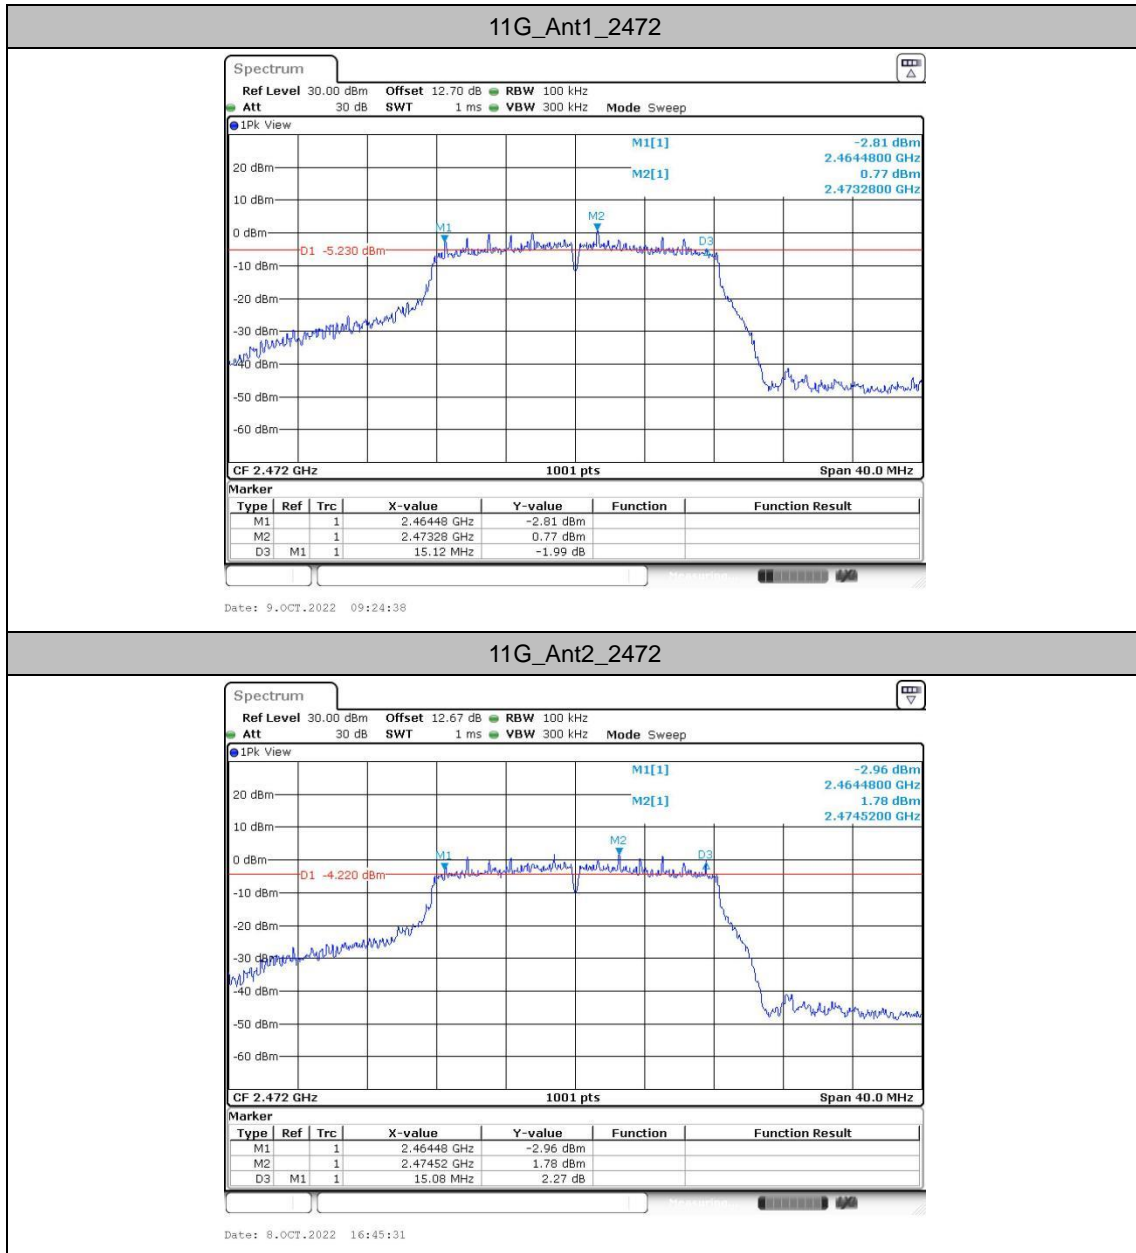

11G_Ant2_2472

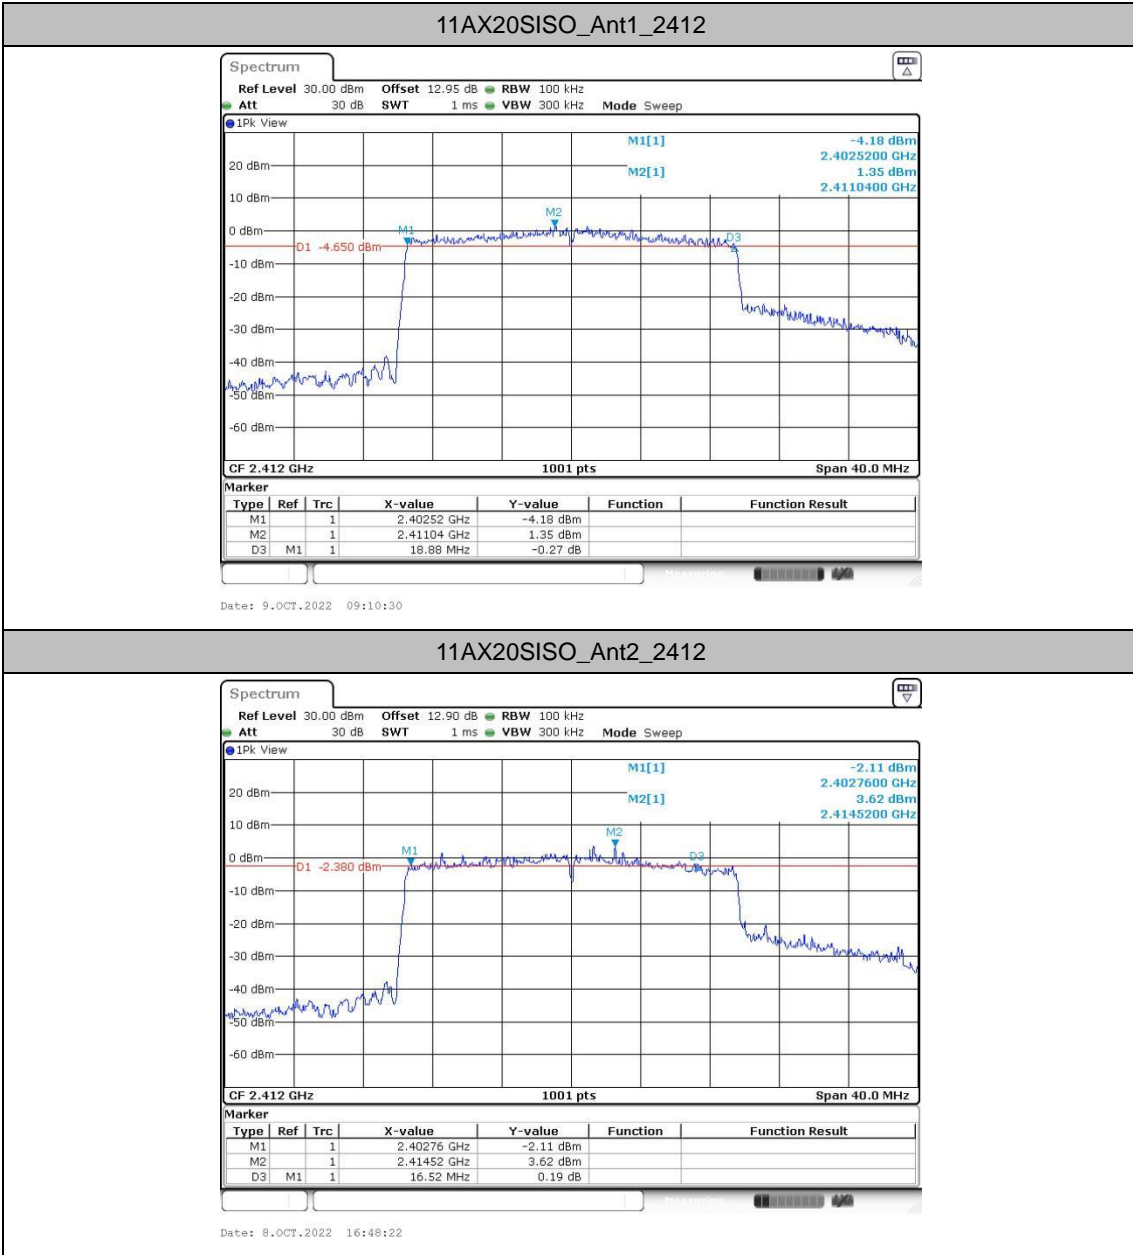

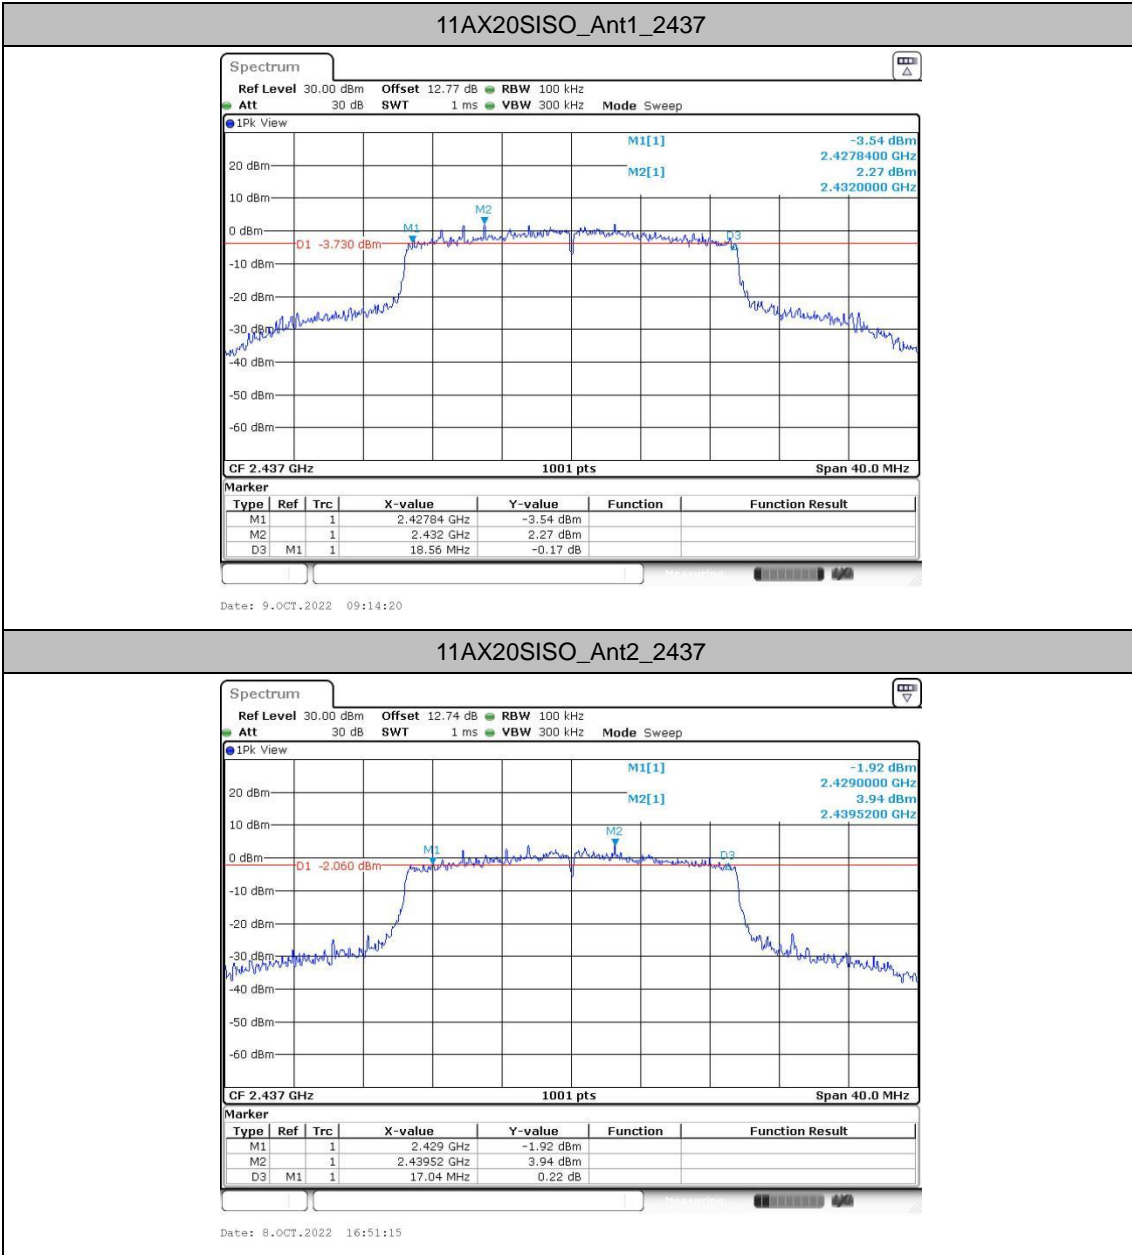





11AX20SISO_Ant1_2462

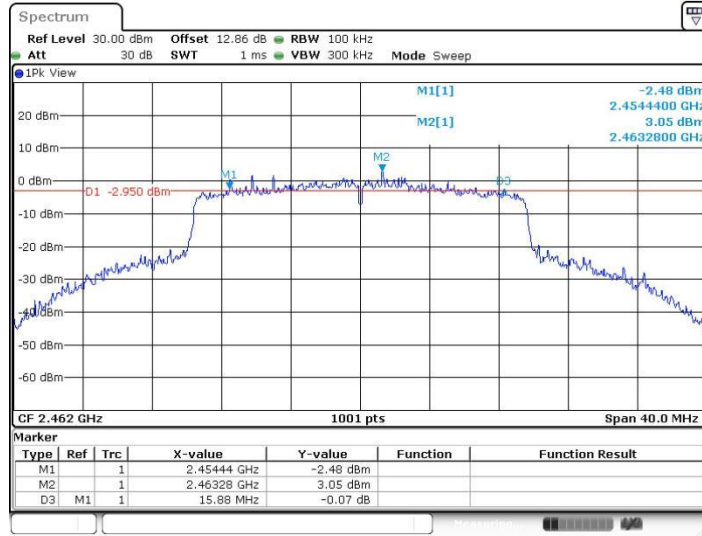


11AX20SISO_Ant2_2462

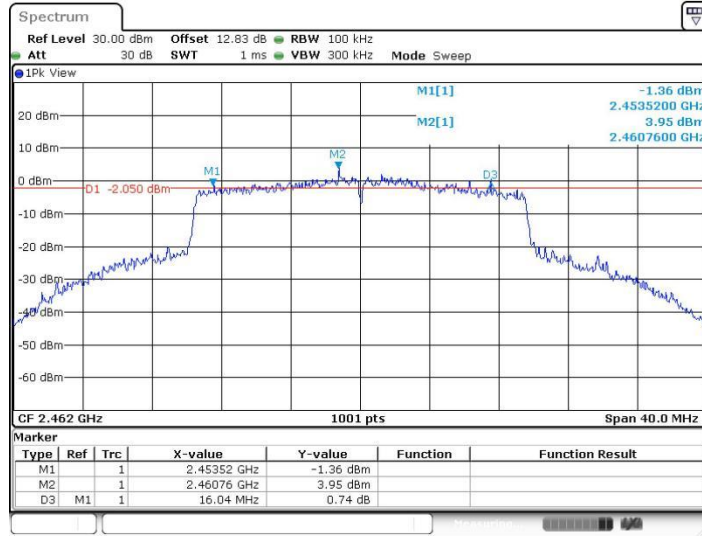

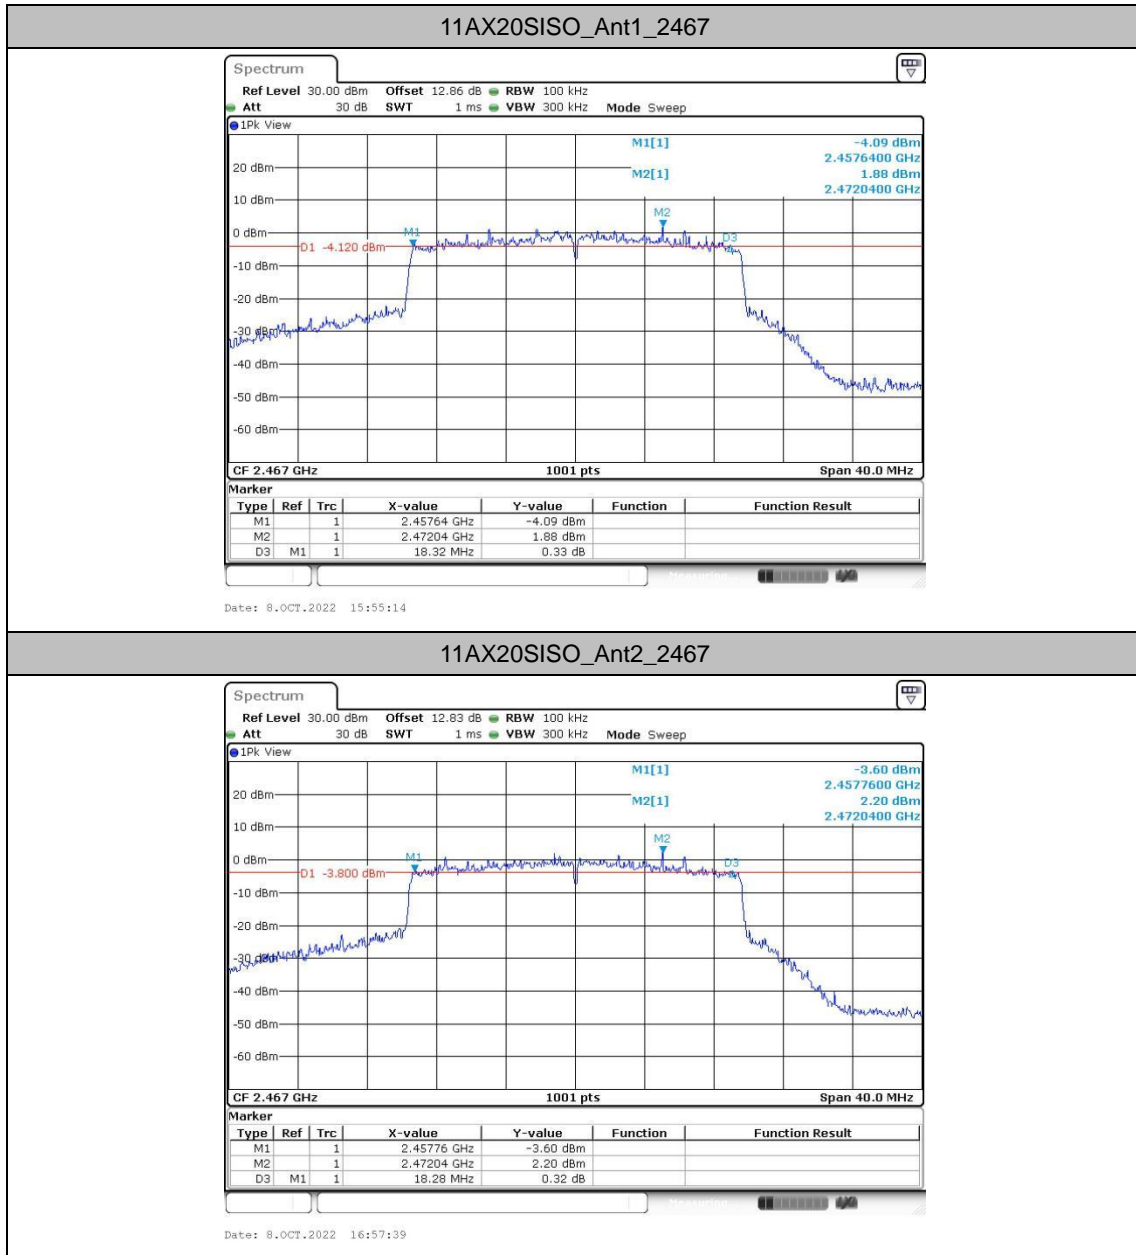




11AX20SISO_Ant1_2472

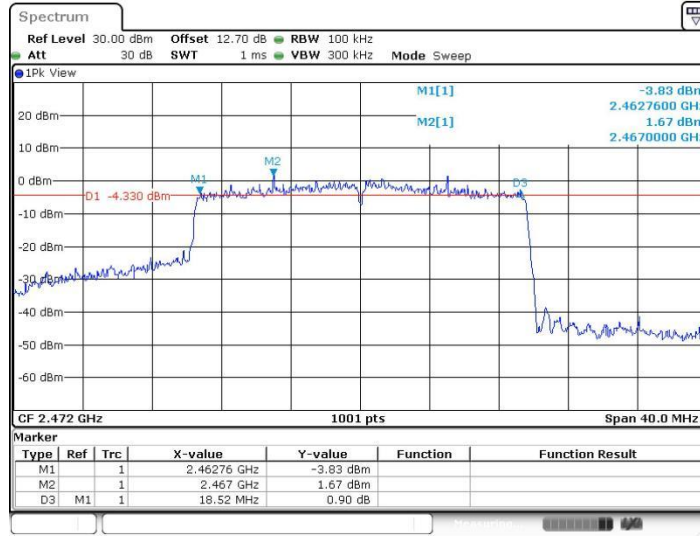

11AX20SISO_Ant2_2472

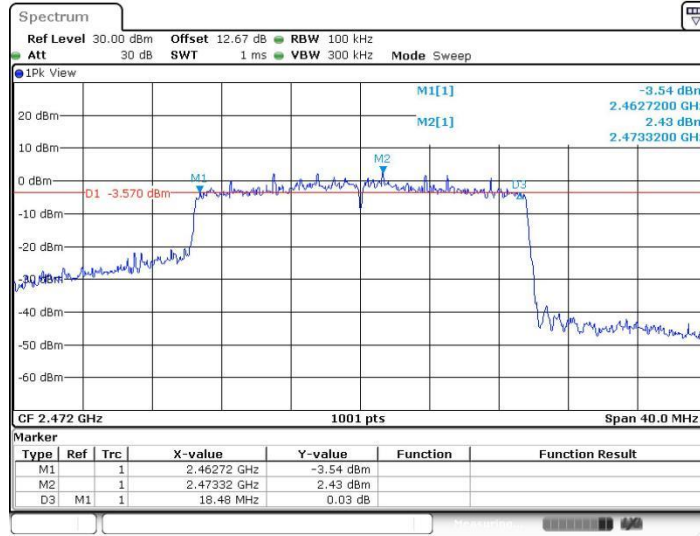




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.787	2405.5664	2418.3536	---	---
	Ant2	2412	12.667	2405.6064	2418.2737	---	---
	Ant1	2437	12.747	2430.6863	2443.4336	---	---
	Ant2	2437	12.707	2430.6863	2443.3936	---	---
	Ant1	2462	12.747	2455.6064	2468.3536	---	---
	Ant2	2462	12.388	2455.9261	2468.3137	---	---
	Ant1	2467	12.747	2460.6064	2473.3536	---	---
	Ant2	2467	12.707	2460.6064	2473.3137	---	---
	Ant1	2472	12.747	2465.6064	2478.3536	---	---
	Ant2	2472	12.747	2465.6064	2478.3536	---	---
11G	Ant1	2412	17.622	2403.2887	2420.9111	---	---
	Ant2	2412	17.622	2403.2488	2420.8711	---	---
	Ant1	2437	17.822	2428.0889	2445.9111	---	---
	Ant2	2437	17.862	2428.0889	2445.9510	---	---
	Ant1	2462	17.742	2453.0889	2470.8312	---	---
	Ant2	2462	17.742	2453.0090	2470.7512	---	---
	Ant1	2467	17.582	2458.1289	2475.7113	---	---
	Ant2	2467	17.702	2457.8891	2475.5914	---	---
	Ant1	2472	17.582	2463.0090	2480.5914	---	---
	Ant2	2472	17.782	2462.8492	2480.6314	---	---
11AX20SISO	Ant1	2412	18.941	2402.5694	2421.5105	---	---
	Ant2	2412	18.981	2402.5295	2421.5105	---	---
	Ant1	2437	19.101	2427.4895	2446.5904	---	---
	Ant2	2437	19.101	2427.4895	2446.5904	---	---
	Ant1	2462	19.181	2452.4096	2471.5904	---	---
	Ant2	2462	19.181	2452.3696	2471.5504	---	---
	Ant1	2467	18.981	2457.4895	2476.4705	---	---
	Ant2	2467	19.021	2457.4496	2476.4705	---	---
	Ant1	2472	19.021	2462.4496	2481.4705	---	---
	Ant2	2472	19.061	2462.4096	2481.4705	---	---




Test Graphs

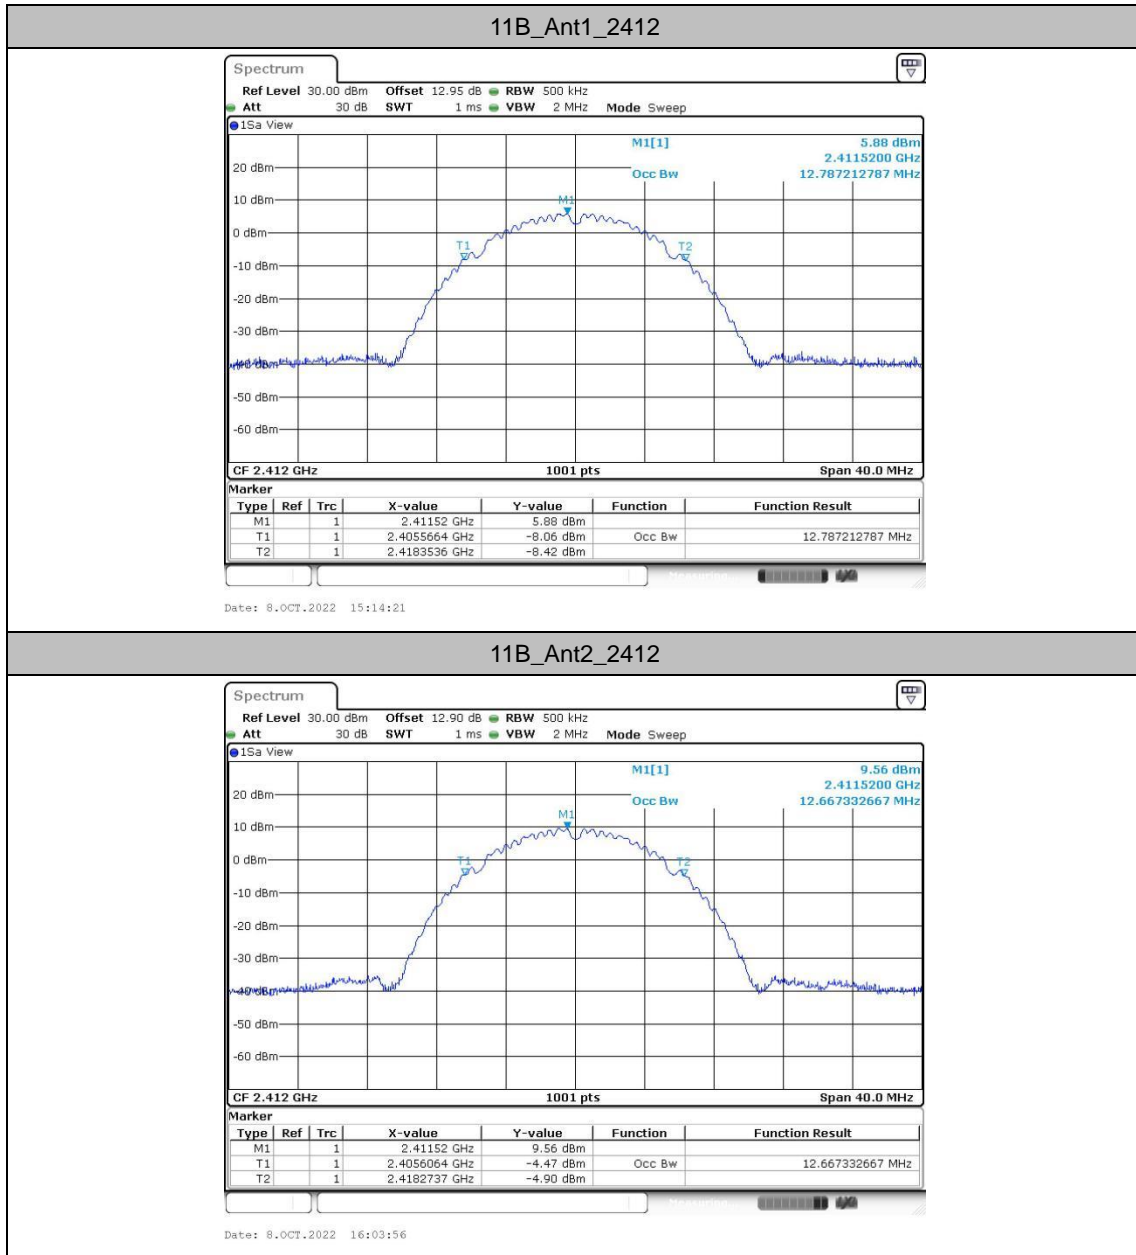

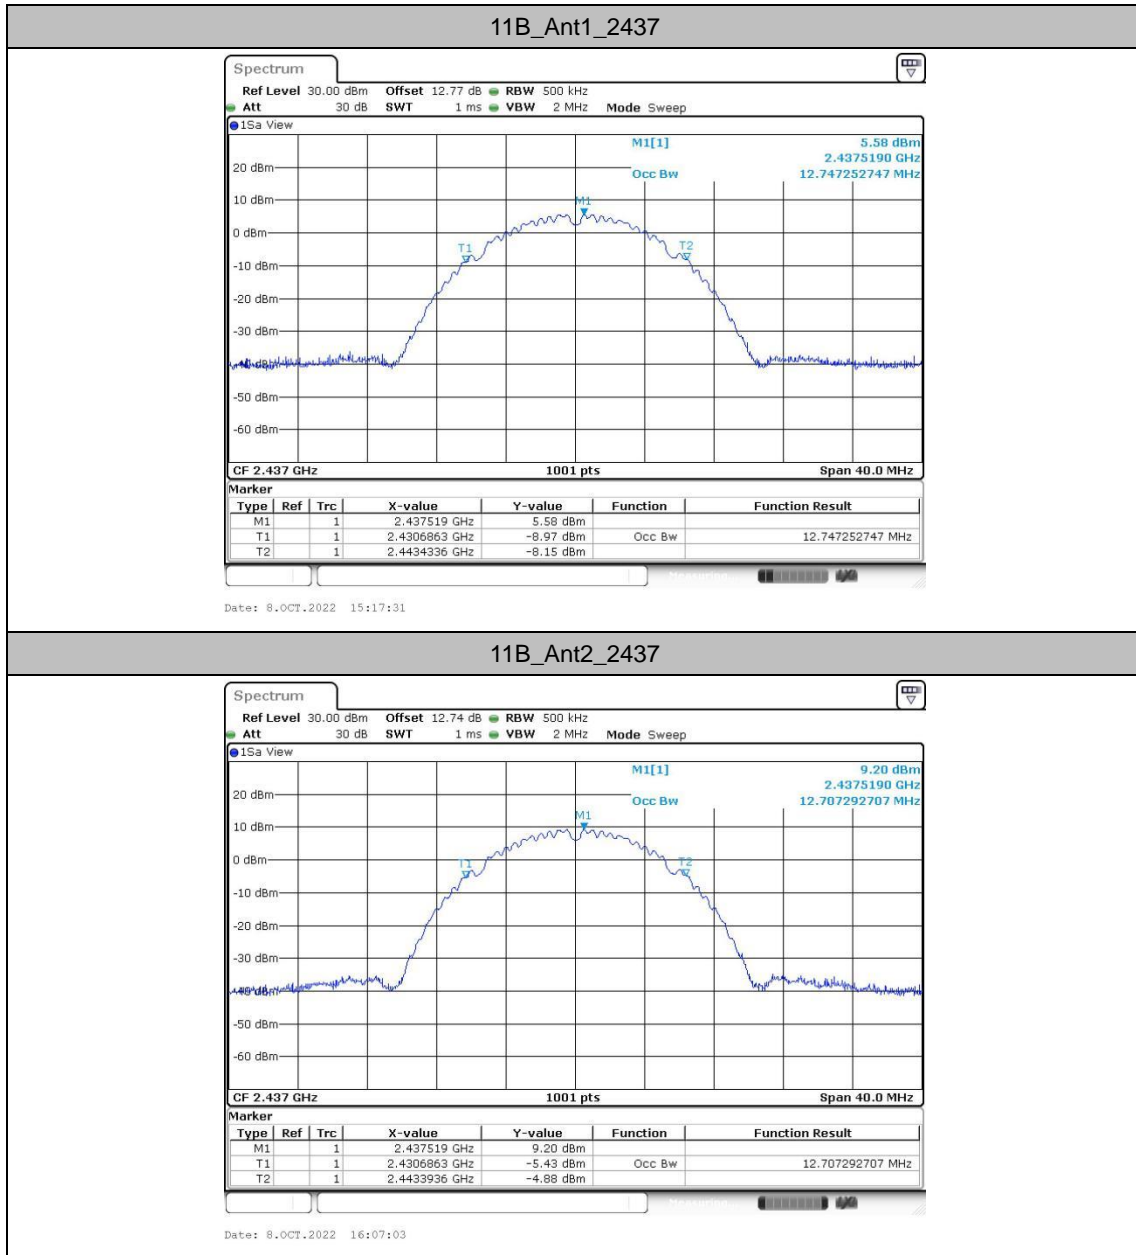

11B_Ant2_2437

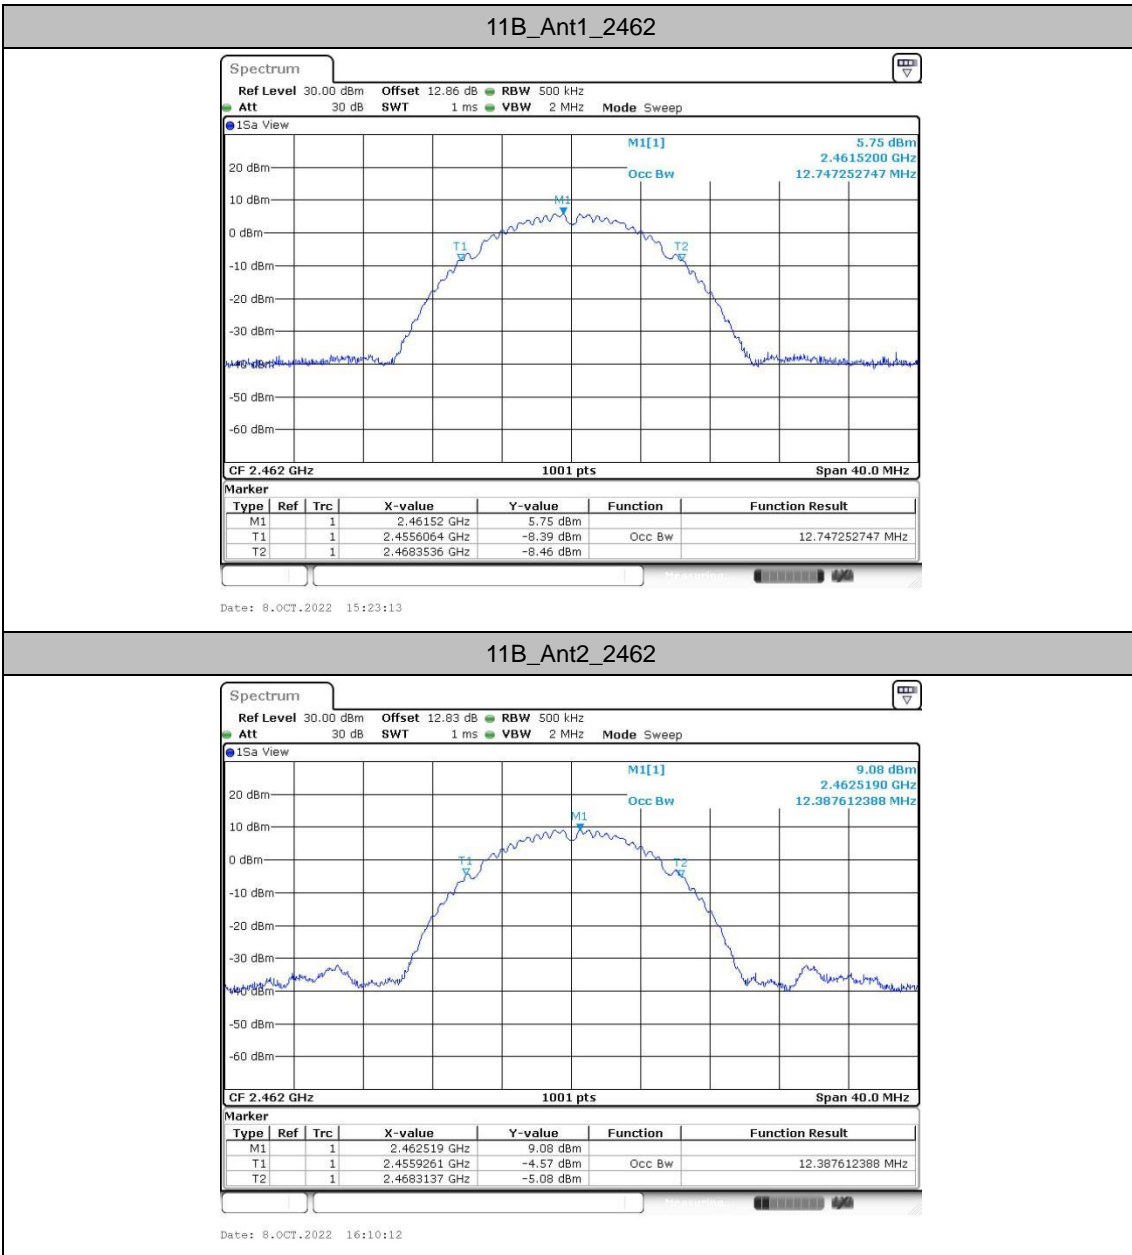

11B_Ant2_2462

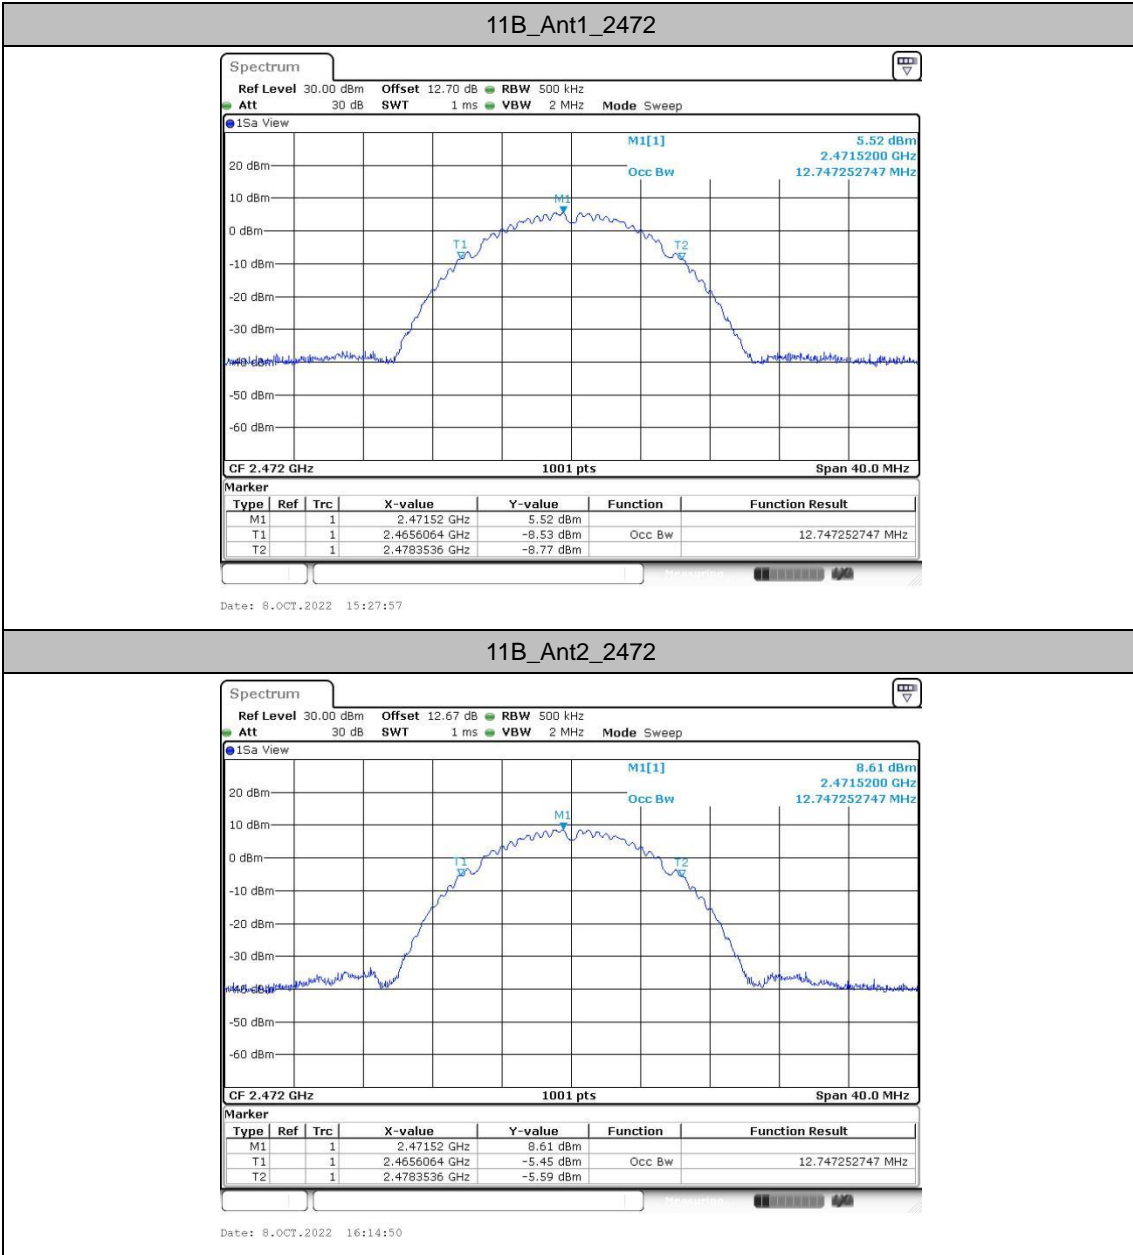




11B_Ant2_2472



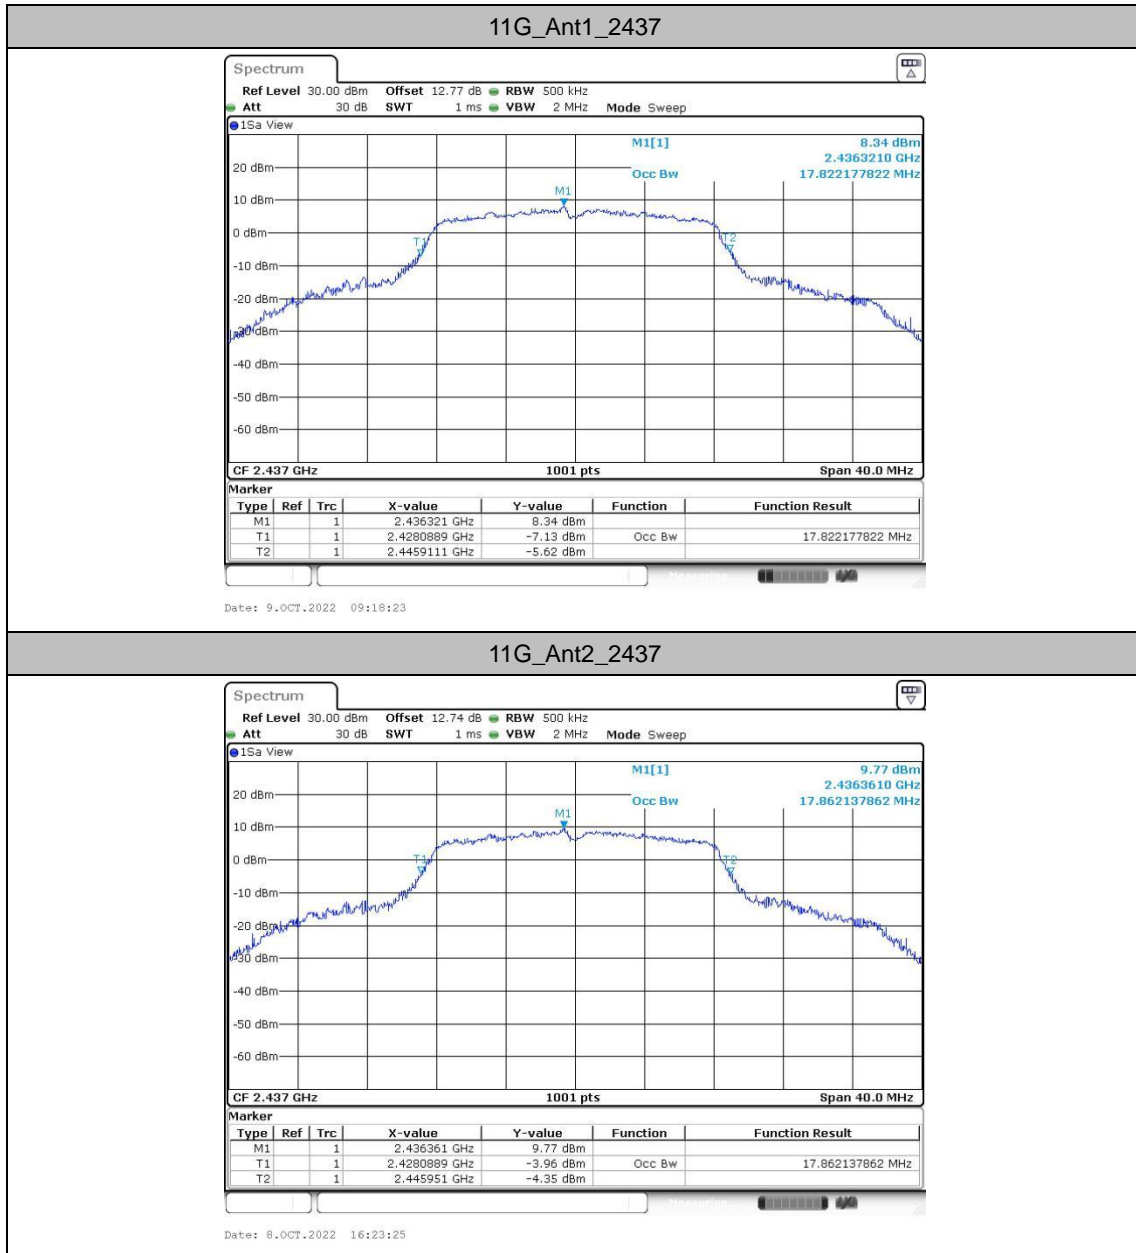

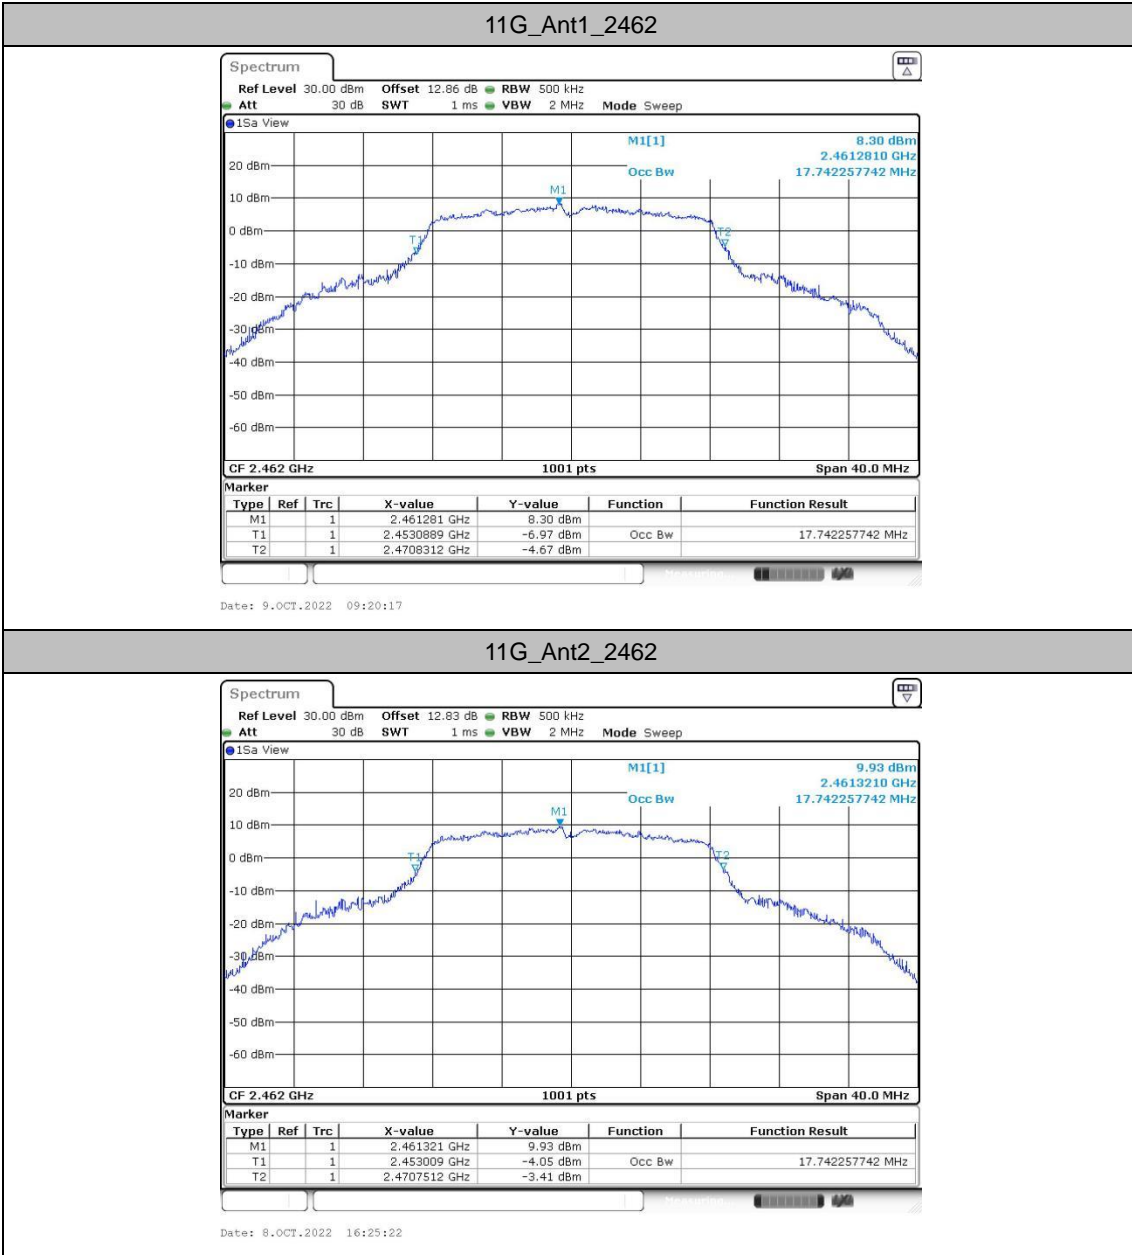


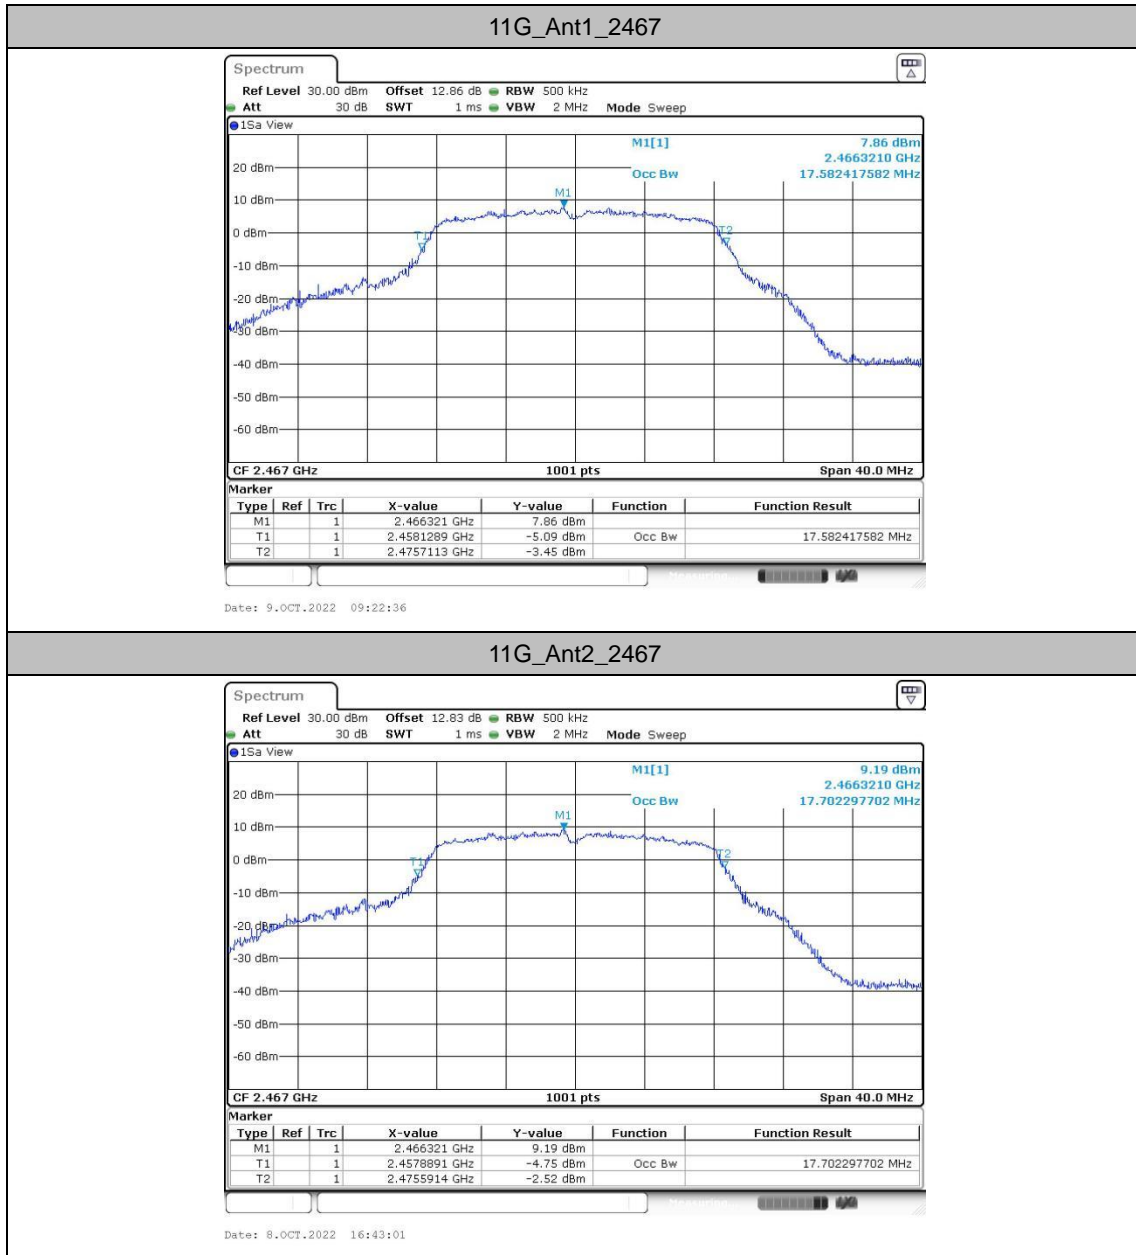

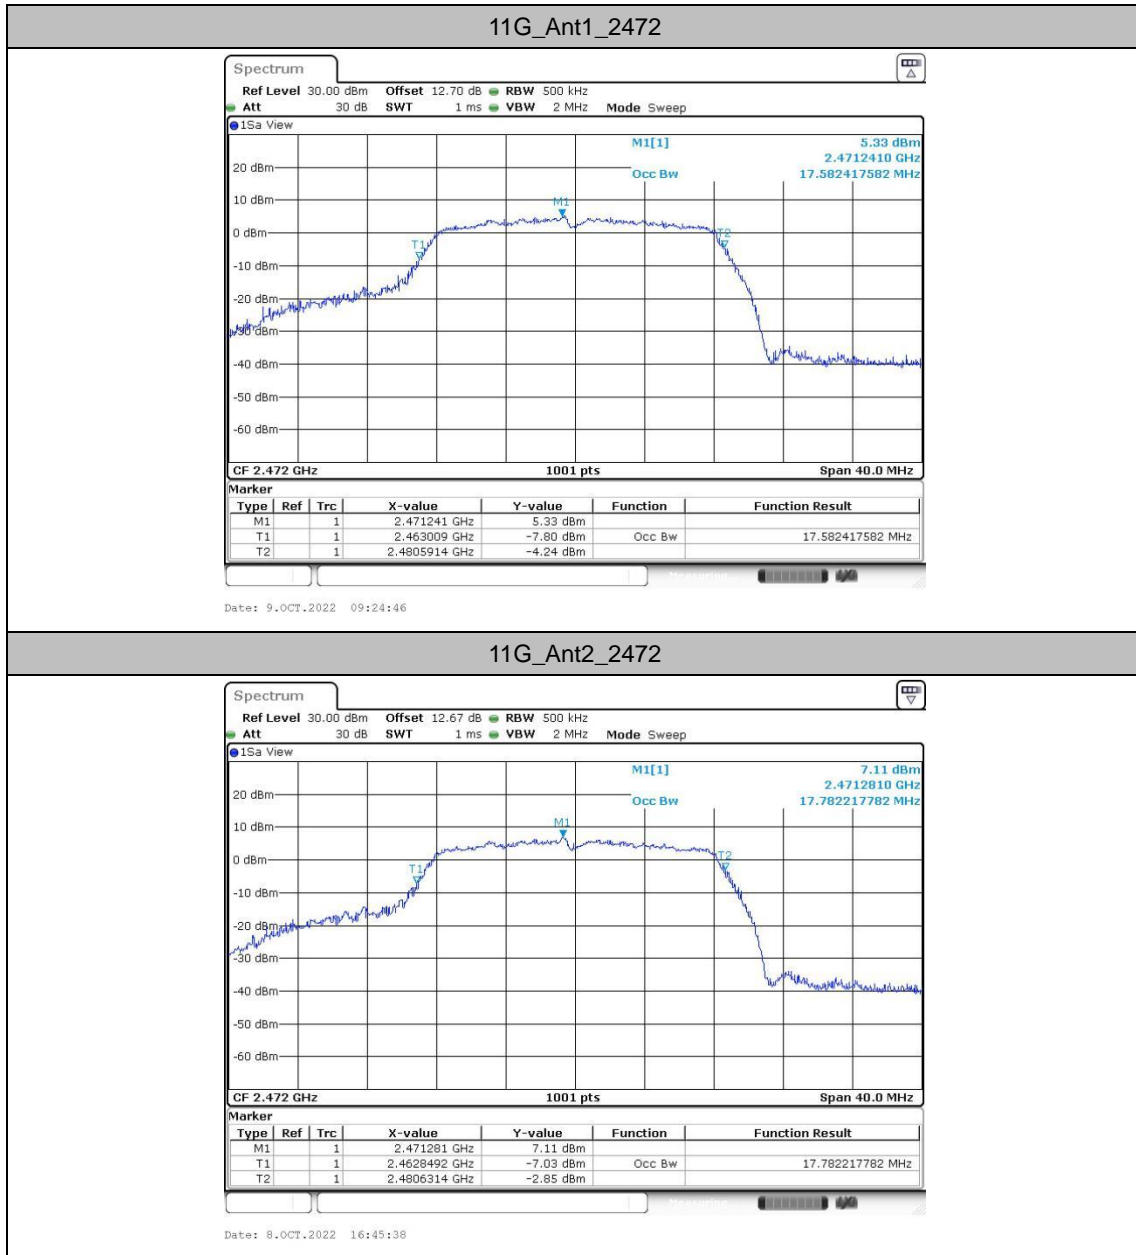




11AX20SISO_Ant1_2412

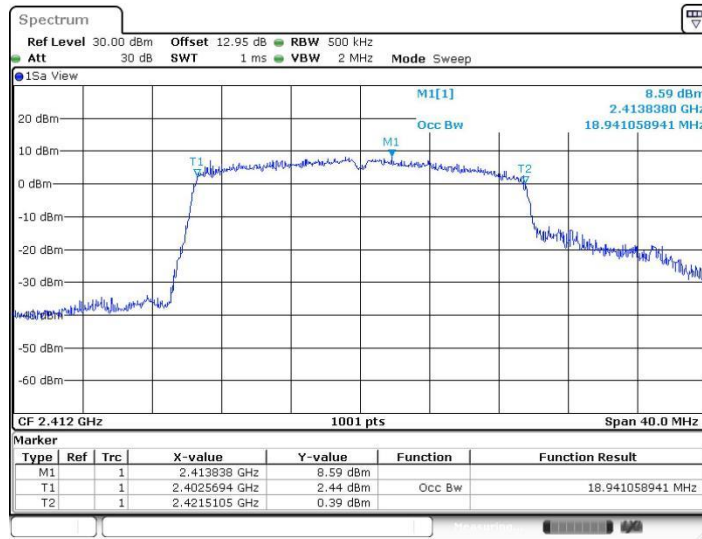

Date: 8.OCT.2022 15:43:17


11AX20SISO_Ant2_2412

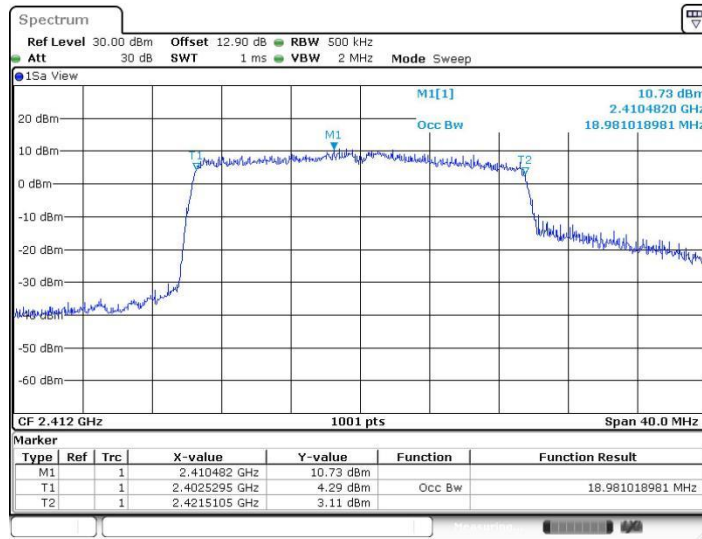

Date: 8.OCT.2022 16:48:30



11AX20SISO_Ant1_2437

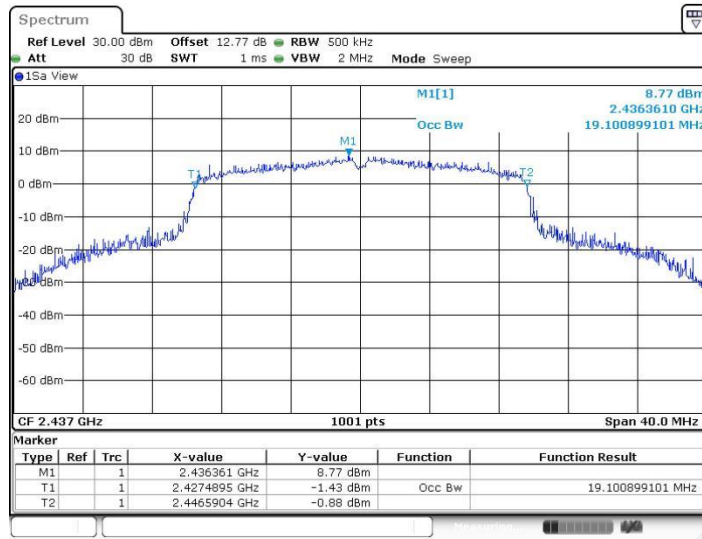

11AX20SISO_Ant2_2437

