

TEST REPORT

Product : Long-middle range radar
Trade mark : CUBTEK
Model/Type reference : B122-035 (VS-93G016)
Serial Number : N/A
Report Number : EED32Q80555301
FCC ID : 2BGAB-3602300X9D05
Date of Issue : May 30, 2024
Test Standards : 47 CFR Part 2
47 CFR Part 95, Subpart M
Test result : PASS

Prepared for:

CUBTEK (Shanghai) INC.

**Building 6, No. 51, Jinwen Road, Zhuqiao Town, Pudong New Area,
Shanghai**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Compiled by:

Frazer Li

Frazer Li

Reviewed by:

Tom Chen

Tom Chen

Approved by:

Aaron Ma

Aaron Ma

Date:

May 30, 2024



Check No.:6417260424

1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST ENVIRONMENT	5
3.4 DESCRIPTION OF SUPPORT UNITS	5
3.5 TEST LOCATION	5
3.6 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	6
4 EQUIPMENT LIST	7
5 TEST RESULTS AND MEASUREMENT DATA	9
5.1 MODULATION CHARACTERISTICS	9
5.2 99% OCCUPIED BANDWIDTH	11
5.3 EIRP(EFFECTIVE ISOTROPIC RADIATED POWER)	13
5.4 UNWANTED EMISSIONS	17
5.5 FREQUENCY STABILITY	34
6 PHOTOGRAPHS OF TEST SETUP	36
7 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	39

2 Test Summary

Test Item	Test Requirement	Result
EIRP (Effective Isotropic Radiated Power)	47 CFR Part 95, Subpart M Section 95.3367 47 CFR Part 2, Subpart J Section 2.1046	PASS
Modulation characteristics	47 CFR Part 2, Subpart J Section 2.1047	PASS
99% Occupied bandwidth	47 CFR Part 2, Subpart J Section 2.1049	PASS
Unwanted emissions	47 CFR Part 95, Subpart M Section 95.3379 (a) 47 CFR Part 2, Subpart J Section 2.1053	PASS
Frequency stability	47 CFR Part 95, Subpart M Section 95.3379 (b) 47 CFR Part 2, Subpart J Section 2.1055	PASS

Remark:

Company Name and Address shown on Report, the sample(s) and sample Information were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

3 General Information

3.1 Client Information

Applicant:	CUBTEK (Shanghai) INC.
Address of Applicant:	Building 6,No. 51, Jinwen Road, Zhuqiao Town, Pudong New Area, Shanghai
Manufacturer:	CUBTEK (Shanghai) INC.
Address of Manufacturer:	Building 6,No. 51, Jinwen Road, Zhuqiao Town, Pudong New Area, Shanghai
Factory:	CUBTEK (Shanghai) INC.
Address of Factory:	Building 6,No. 51, Jinwen Road, Zhuqiao Town, Pudong New Area, Shanghai

3.2 General Description of EUT

Product Name:	Long-middle range radar
Model No.:	B122-035 (VS-93G016)
Trade mark:	CUBTEK
Product Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Type of Modulation:	FMCW(Frequency Modulated Continuous Wave)
Operating Frequency	76.45GHz
Test Power Grade:	Default
Test Software of EUT:	N/A
Antenna Type:	PCB Antenna
Antenna Gain:	20.99dBi
Power Supply:	DC 9.0V to DC 32.0V
Test Voltage:	DC 24V
Sample Received Date:	Apr. 26, 2024
Sample tested Date:	Apr. 26, 2024 to Apr. 30, 2024

3.3 Test Environment

Operating Environment:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

3.4 Description of Support Units

The EUT has been tested independently.

3.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

3.6 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
		4.62dB (40GHz-60GHz)
		4.80dB (60GHz-90GHz)
		4.90dB (90GHz-140GHz)
		5.11dB (140GHz-220GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

3M Semi-anechoic Chamber (2)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-22-2022	05-21-2025
Receiver	R&S	ESCI7	100938-003	09-22-2023	09-21-2024
Spectrum Analyzer	R&S	FSV40	101200	07-25-2023	07-24-2024
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-15-2021 04-16-2024	04-14-2024 04-15-2025
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-618	05-21-2023	05-20-2024
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-17-2021 04-16-2024	04-16-2024 04-15-2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	05-29-2021	05-28-2024
Preamplifier	Agilent	11909A	12-1	03-22-2024	03-21-2025
Preamplifier	EMCI	EMC051845SE	980380	12-14-2023	12-13-2024
Preamplifier	CD	PAP-1840-60	6041.6042	07-04-2023	07-03-2024
Spectrum Analyzer	R&S	FSV3044	101509	05-23-2023	05-22-2024
Receive unit	R&S	TC-RSE60	100729	N/A	N/A
Receive unit	R&S	TC-RSE90	100721	N/A	N/A
Receive unit	R&S	TC-RSE140	101254	N/A	N/A
Receive unit	R&S	TC-RSE220	100716	N/A	N/A
Receive unit	R&S	TC-RSE325	100638	N/A	N/A

Note:

N/A:Calibrated by the equipment manufacturer.


3M full-anechoic Chamber (3)					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	01-09-2024	01-08-2025
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-19-2024	01-18-2025
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-13-2024	01-12-2025
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-28-2021	04-27-2024
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-17-2021 04-16-2024	04-16-2024 04-15-2025
Horn Antenna	ETS-LINDGREN	3117	57407	07-04-2021	07-03-2024
Preamplifier	EMCI	EMC184055SE	980597	04-13-2023 04-12-2024	04-12-2024 04-11-2025
Preamplifier	EMCI	EMC001330	980563	03-28-2023 03-08-2024	03-27-2024 03-07-2025
Preamplifier	JS Tonscend	TAP-011858	AP21B806112	07-25-2023	07-24-2024
Communication test set	R&S	CMW500	102898	12-14-2023	12-13-2024
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-11-2023 04-07-2024	04-10-2024 04-06-2025
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---
Spectrum Analyzer	R&S	FSV3044	100509	05-23-2023	05-22-2024
Receive unit	R&S	TC-RSE60	100729	N/A	N/A
Receive unit	R&S	TC-RSE90	100721	N/A	N/A
Receive unit	R&S	TC-RSE140	101254	N/A	N/A
Receive unit	R&S	TC-RSE220	100716	N/A	N/A
Receive unit	R&S	TC-RSE325	100638	N/A	N/A

Note:

N/A:Calibrated by the equipment manufacturer.

5 Test results and Measurement Data

5.1 Modulation characteristics
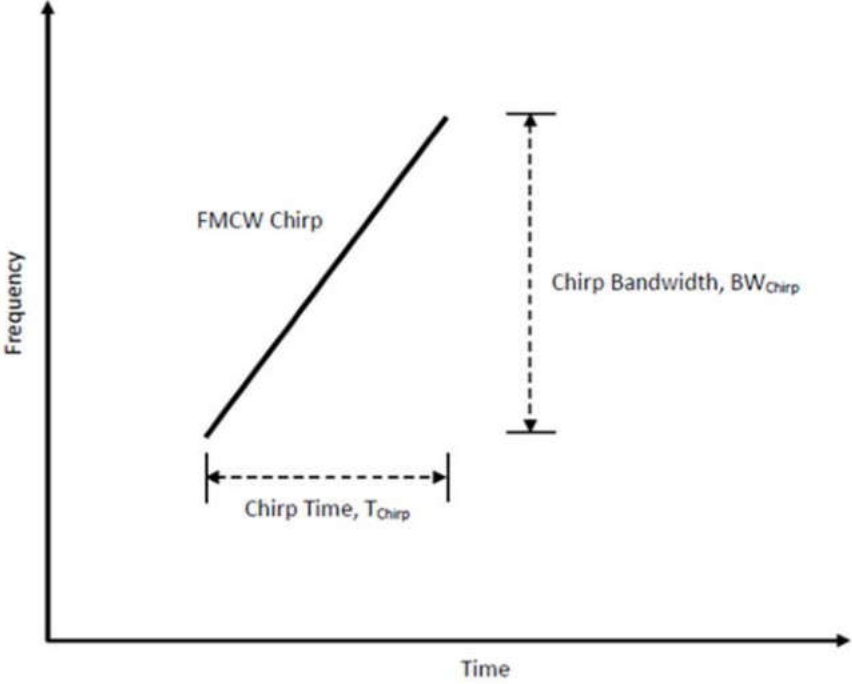
<p>Standard requirements:</p>	<p>47 CFR Part 2, Subpart J Section 2.1047 (b), KDB 653005 D01 76-81 GHz Radars v01r01 Section 3 g) 2)</p> <p>47 CFR Part 2, Subpart J Section 2.1047 requirements: (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.</p> <p>KDB 653005 D01 76-81 GHz Radars v01r01 Section 3 g) 2) requirements: g) Concerning the Section 2.1047 modulation characteristics requirement, the following information should be provided: 1) Pulsed radar: pulse width and pulse repetition frequency (if PRF is variable, then report maximum and minimum values). 2) Non-pulsed radar (e.g., FMCW): modulation type (i.e., sawtooth, sinusoid, triangle, or square wave) and sweep characteristics (sweep bandwidth, sweep rate, sweep time).</p>
<p>FMCW signals characteristic:</p>	<p>F_s=sweep width and T_s=sweep time,are designated as BW_{chirp}=Chirp Bandwidth (or Chirp BW) and T_{chirp}=Chirp Time, respectively.</p>  <p>Figure L.1—Frequency-time characteristics of an FMCW chirp with linear sweep</p>


Conclusion

According to § 2.1047, A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed

Comments from manufacturer on modulation characteristics according to KDB:

Parameter	
Duty Cycle(%):	35.7
Time RF on(ms):	22.32
Time RF off(ms):	40.18
Power:	Constant during RF on
Steepness of Ramps(GHz/s):	8,200 / 17,570
Calibration:	N/A
Antenna Beam Steering(TX):	N/A
Characteristics	
Type of Modulation:	FMCW(Frequency Modulated Continuous Wave)
Sweep Width(MHz):	573
Sweep Time(μ s):	32.6
Chirp Bandwidth(MHz):	450
Chirp Time(μ s):	25.6
Chirp Rate(MHz/ μ s):	17.57
Chirp Length(μ s):	43.6


5.2 99% Occupied bandwidth

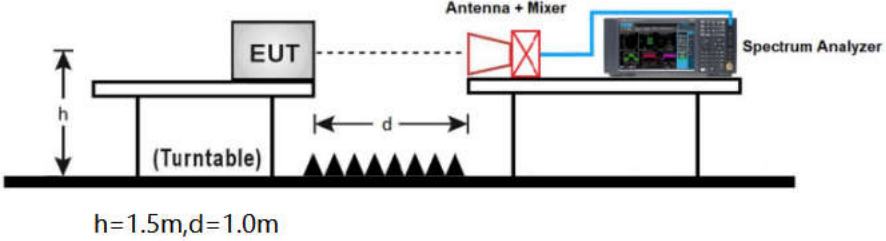Test Requirement:	47 CFR Part 2, Subpart J Section 2.1049
Test Method:	ANSI C63.26:2015 Section 5.4
Limit:	Within the designated 76~81GHz frequency band
Test Setup:	 <p style="text-align: center;">h=1.5m,d=1.0m</p>
Test Procedure:	<ol style="list-style-type: none"> 1.The signal analyzer`s automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission. 2.Span equal to approximately 1.5 times the OBW, centered on the carrier frequency. 3.RBW, prefer 1% to 5% of OBW, or a minimum of 1MHz if this is not possible due to a large OBW. 4.VBW approximately 3*RBW. 5.Detector = Peak. 6.Trance mode = Max hold. 7.Sweep = Auto couple. 8.The trace was allowed to stabilize. 9.If necessary, step 2~6 were repeated after changing the RBW such that it would be within 1%~5 % of the 99% occupied bandwidth observed in step 6. <p>Note: The RBW and VBW were setting up to the limitations of the test equipment.</p>
Test Mode:	TX mode_Make EUT continuously emit radar signals.


Test data:

99% emission bandwidth (MHz)	Lowest Frequency (GHz)	Highest Frequency (GHz)	Limit (GHz)	Result
563.716936603	76.165432	76.729149	76 to 81	Pass

Test graph:

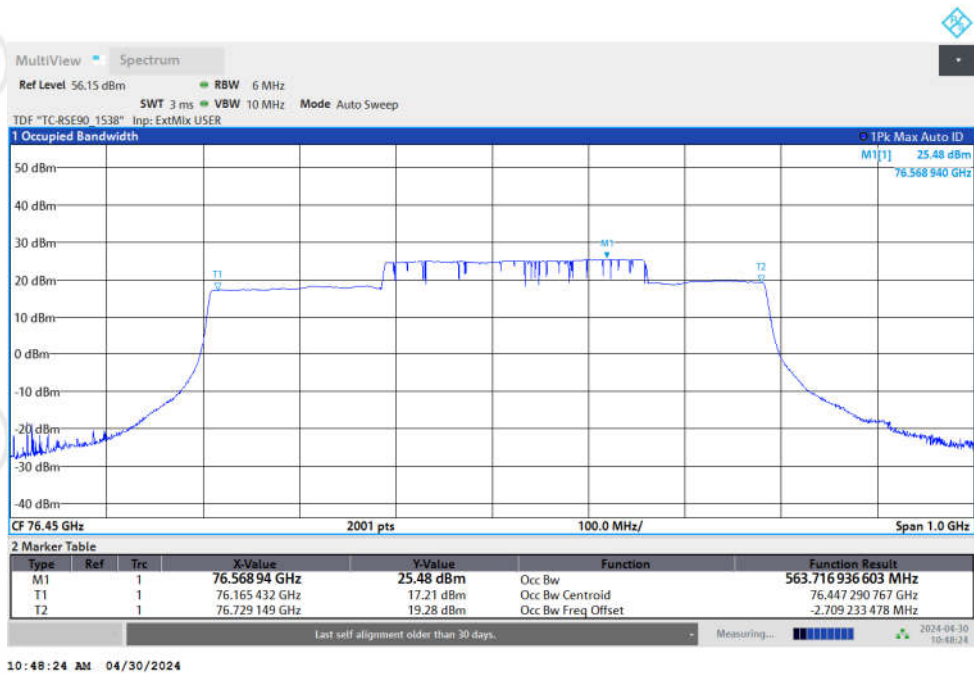

5.3 EIRP(Effective Isotropic Radiated Power)

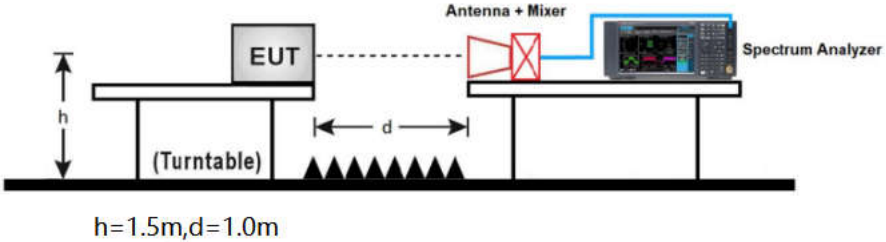Test Requirement:	47 CFR Part 95, Subpart M Section 95.3367, KDB 653005 D01 76-81 GHz Radars v01r01 Section 4 a),b),c)
Test Method:	ANSI C63.26:2015 Section 5.2
Limit:	Peak EIRP $\leq 55\text{dBm/MHz}$; Average EIRP $\leq 50\text{dBm/MHz}$;
Test Setup:	 <p style="text-align: center;">h=1.5m,d=1.0m</p>
Test Procedure:	<p>(1)Maximum peak power(EIRP) – Peak detector</p> <ol style="list-style-type: none"> 1. Set RBW = 1MHz; 2. Set VBW $\geq 3 \times$ RBW; 3. Span to 2~3*OBW; 4. Detector = Peak; 5. Set number of points in sweep $\geq 2 \times$ Span/RBW; 6. Sweep time=Auto couple; 7. Trace = Max hold; <p>(2)Maximum power(EIRP) – Averaging detector</p> <p>Note: The maximum power(averaging detector) measurements are performed using the “channel power” measurement capability and integrated over the 99% OBW to obtain the result.</p> <ol style="list-style-type: none"> 1. Measurement capability of instrument = Channel power; 2. Set RBW = 1MHz; 3. Set VBW $\geq 3 \times$ RBW; 4. Span to 2~3*OBW; 5. Channel bandwidth setting of instrument \geq OBW; 6. Detector = Power averaging (RMS); 7. Set number of points in sweep $\geq 2 \times$ Span/RBW; 8. Sweep time = Auto couple; 9. Trace = Averaging;
Test Mode:	TX mode_Make EUT continuously emit radar signals.

Test data:

Frequency (GHz)	Distance (m)	Polarity	EIRP (dBm/MHz)	FMCW Chirps Correction Factor (dB)	Corrected EIRP (dBm/MHz)	EIRP Limit (dBm/MHz)	Result	Remark
76.45	1.0	Horizontal	-2.06	7.70	5.64	≤55.0	Pass	Peak
		Vertical	24.57	7.70	32.27	≤55.0	Pass	Peak
		Horizontal	-26.62	7.70	-18.92	≤50.0	Pass	AVG
		Vertical	-1.30	7.70	6.40	≤50.0	Pass	AVG

Remark:

- ① This is a radiated test, and test distance of 1.0m was used for the fundamental emissions measurement.
- ② EIRP(dBm/MHz) has added free space loss of 1.0m distance.
- ③ The FMCW Chirps Correction Factor was calculated using the formula:

$$CF_{chirp} = 5 * \log \left(1 + K * \left(\frac{\text{Span}}{t * RBW^2} \right)^2 \right)$$

With t being the length of the chirp and K a correction factor for the setting process of the gaussian shaped filter (~0.1947).


Sample calculation for FMCW chirps correction factor:



$$CF_{chirp} = 5 * \log_{10}(1 + 0.1947 * (573\text{MHz} / (43.6\mu\text{s} * 1\text{MHz}^2))^2) = 7.70\text{dB}$$

Note: Span=573MHz, t=43.6us, refer to the section of 5.1, claimed by the customer.

- ④ Guidance for calculating the correction factor is from Application Note 1EF107-1E Rohde & Schwarz Peak and Mean Power measurements on wideband FMCW radar signals.
- ⑤ Corrected EIRP(dBm/MHz)=EIRP(dBm/MHz)+FMCW Chirps Correction Factor(dB).
- ⑥ Only the worst case data was recorded in the report.


Test graph:

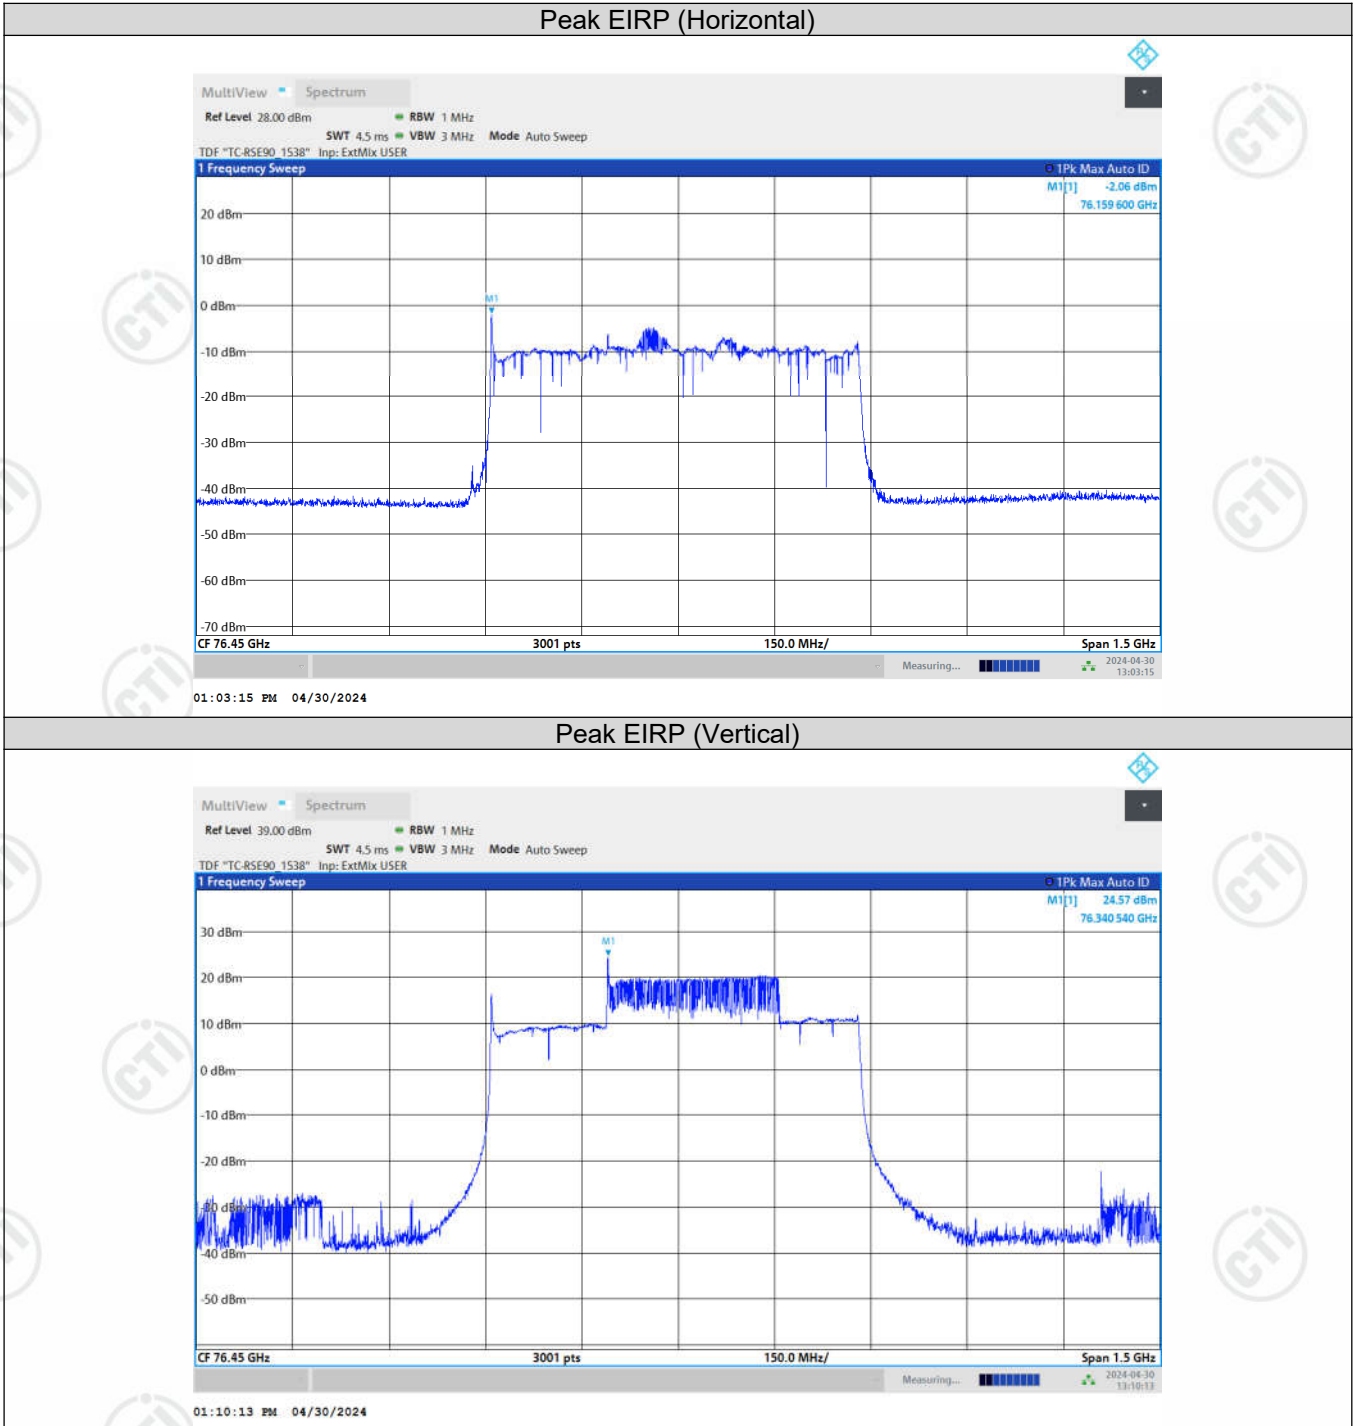


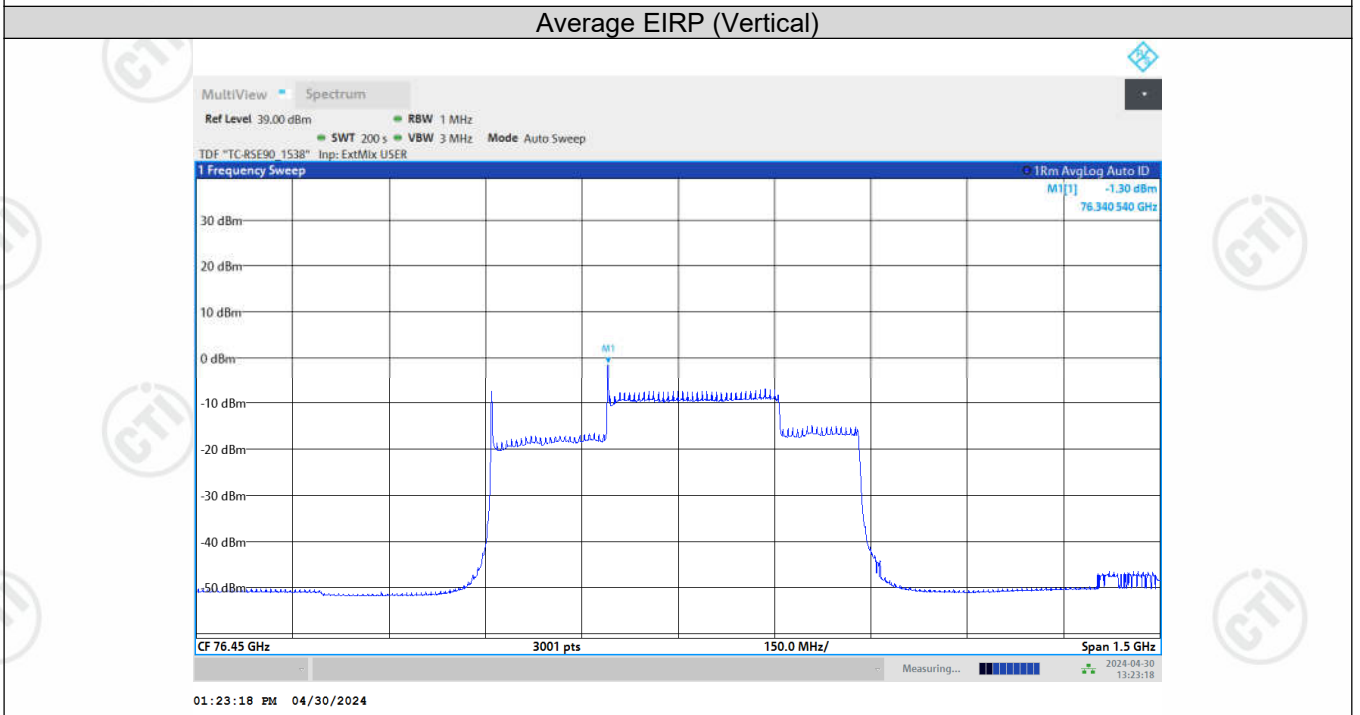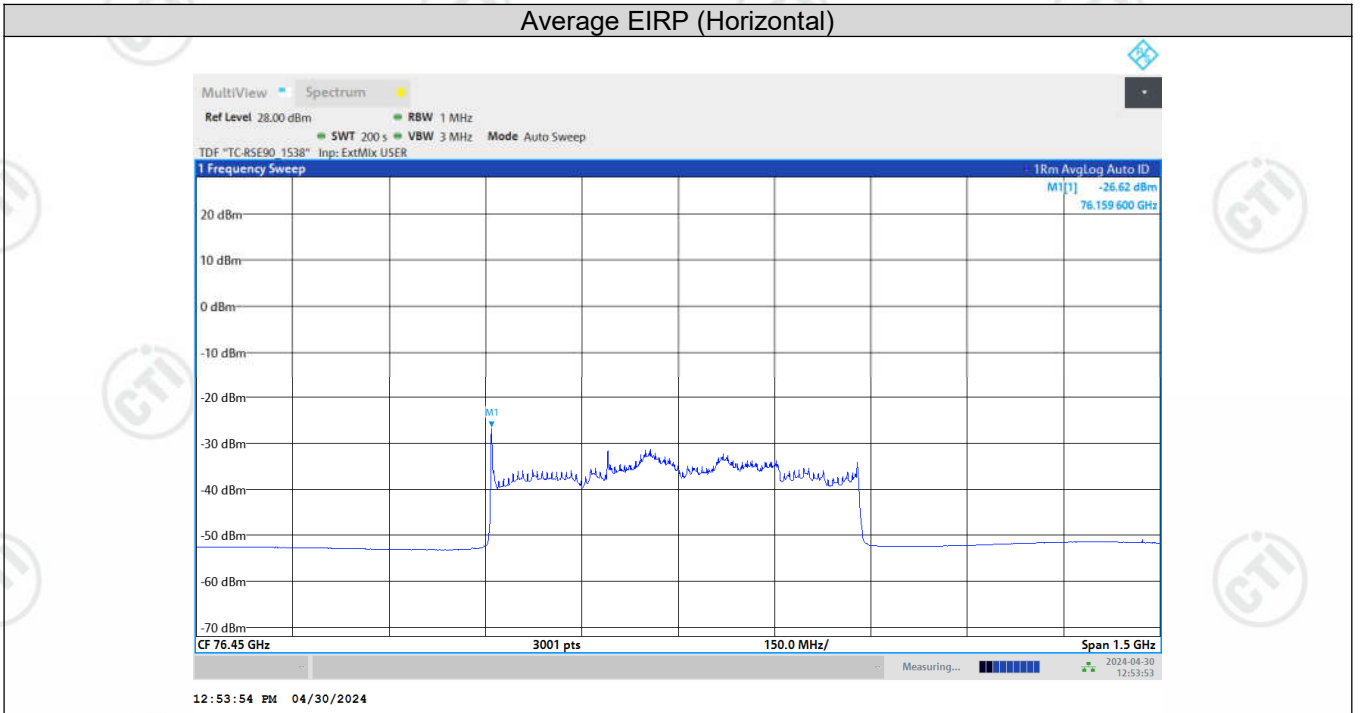


5.4 Unwanted emissions

Test Requirement:	47 CFR Part 95, Subpart M Section 95.3379 (a), KDB 653005 D01 76-81 GHz Radars v01r01 Section 4 e)																								
Test Method:	ANSI C63.26:2015 Section 5.5																								
Limit:	<p>The power density of any emissions outside the 76GHz-81GHz band shall consist solely of spurious emissions and shall not exceed the following:</p> <p>(1) Radiated emissions below 40GHz shall not exceed the field strength as shown in the following emissions table.</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field Strength (uV/m)</th> <th>Measurement Distance (m)</th> </tr> </thead> <tbody> <tr> <td>0.009 ~ 0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490 ~ 1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705 ~ 30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30 ~ 88</td> <td>100</td> <td>3</td> </tr> <tr> <td>88 ~ 216</td> <td>150</td> <td>3</td> </tr> <tr> <td>216 ~ 960</td> <td>200</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>(i) The tighter limit applies at the band edges. (ii) The limits in the table are based on the frequency of the unwanted emissions and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency. (iii) The emissions limits shown in the table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90kHz,110kHz-490kHz,and above 1000MHz.Radiated emissions limits in these three bands are based on measurements employing an average detector with a 1MHz RBW.</p> <p>(2) The power density of radiated emissions outside the 76GHz-81GHz band above 40GHz shall not exceed the following,based on measurements employing an average detector with a 1MHz.</p> <p>(i) For radiated emissions between 40GHz and 200GHz: 600pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure. (ii) For radiated emissions above 200GHz: 1000pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.</p> <p>(3) For field disturbance sensors and radar systems operating in the 76GHz-81GHz band, the spectrum shall be investigated up to 231GHz (preferably 243GHz).</p>	Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)	0.009 ~ 0.490	2400/F(kHz)	300	0.490 ~ 1.705	24000/F(kHz)	30	1.705 ~ 30.0	30	30	30 ~ 88	100	3	88 ~ 216	150	3	216 ~ 960	200	3	Above 960	500	3
Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)																							
0.009 ~ 0.490	2400/F(kHz)	300																							
0.490 ~ 1.705	24000/F(kHz)	30																							
1.705 ~ 30.0	30	30																							
30 ~ 88	100	3																							
88 ~ 216	150	3																							
216 ~ 960	200	3																							
Above 960	500	3																							

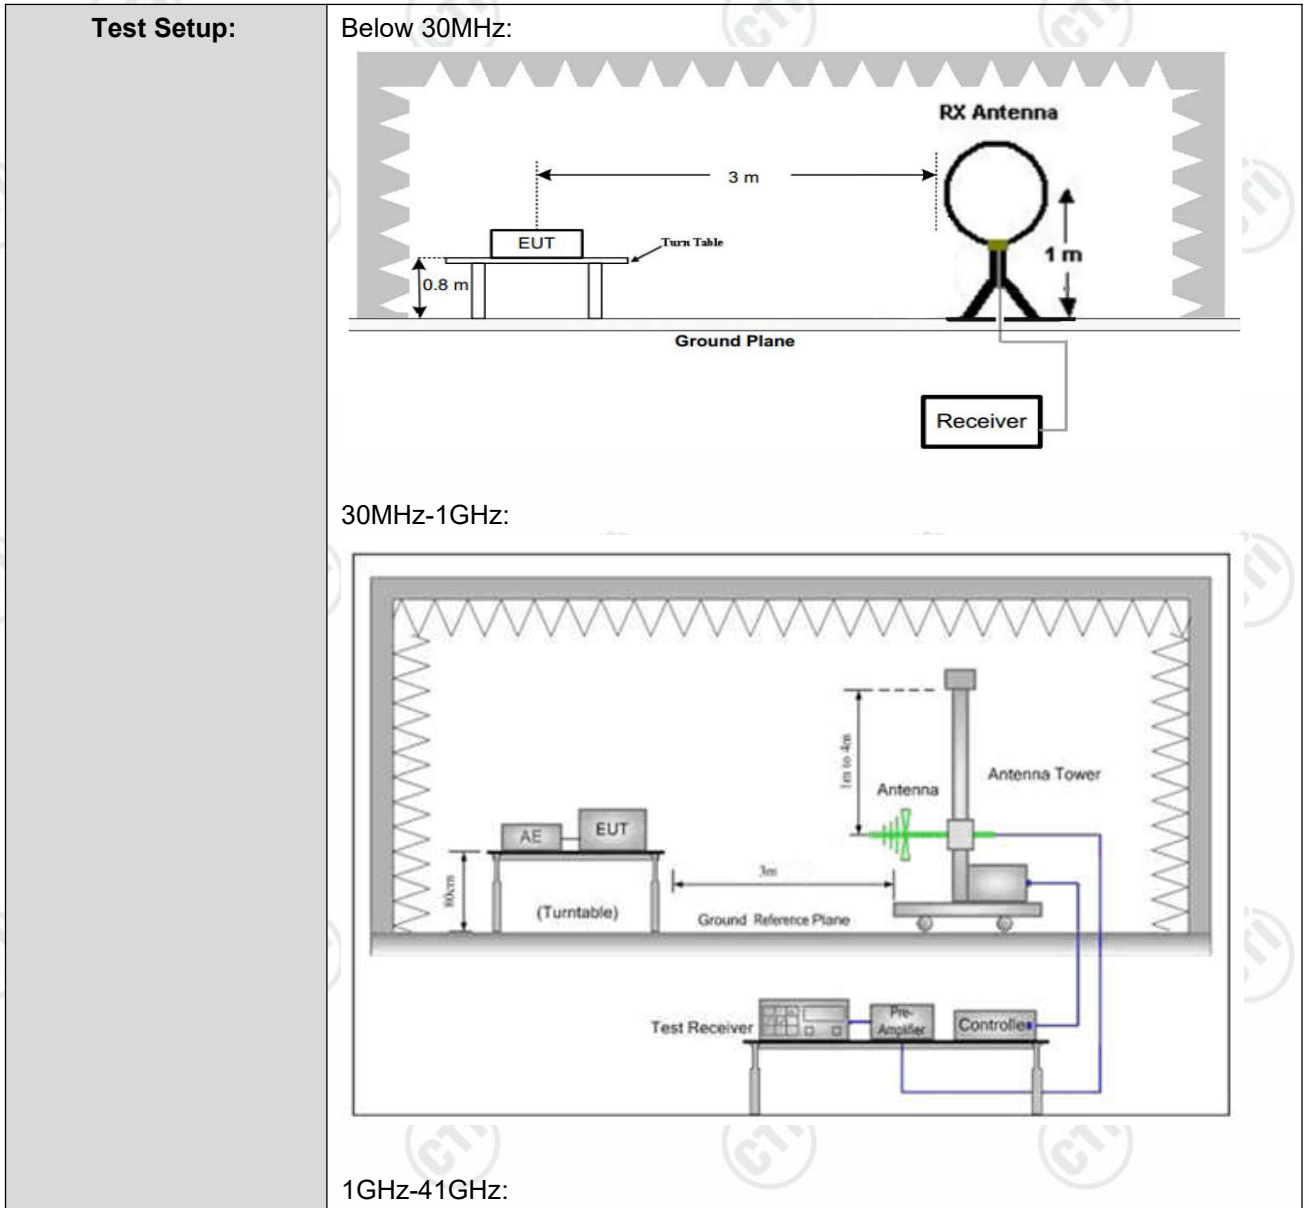

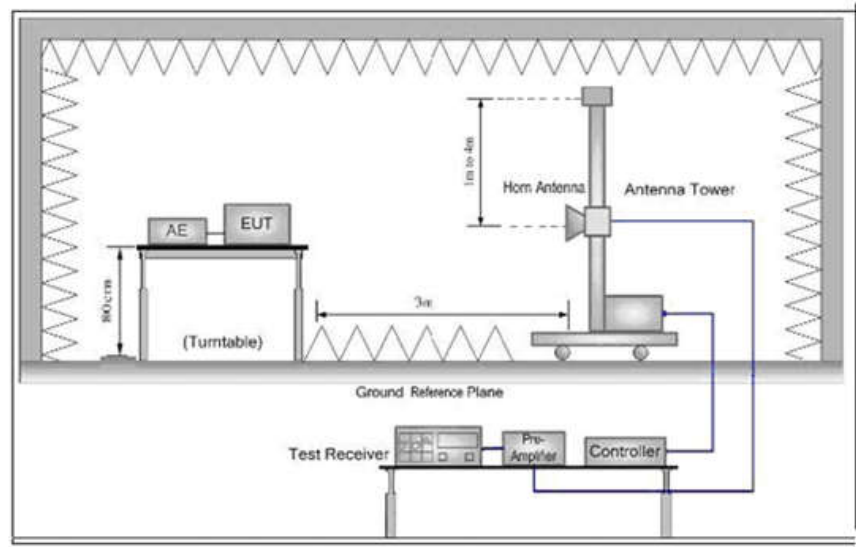

Above 41GHz:

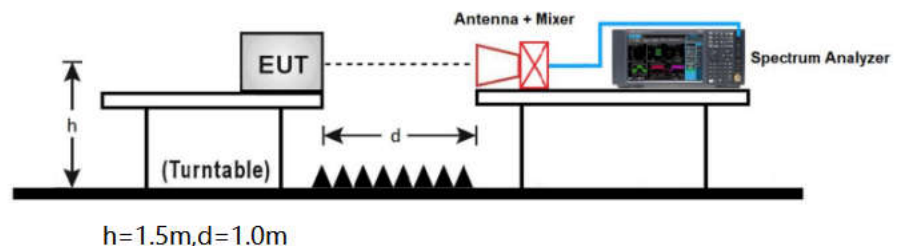

Test Procedure:

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

	The measurement frequency range form 9kHz - 231GHz was investigated (preferably 243GHz).
Test Mode:	TX mode_Make EUT continuously emit radar signals.


Radiated Spurious Emission below 30MHz:

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

Radiated Spurious Emission 30MHz-1GHz:


Test data:

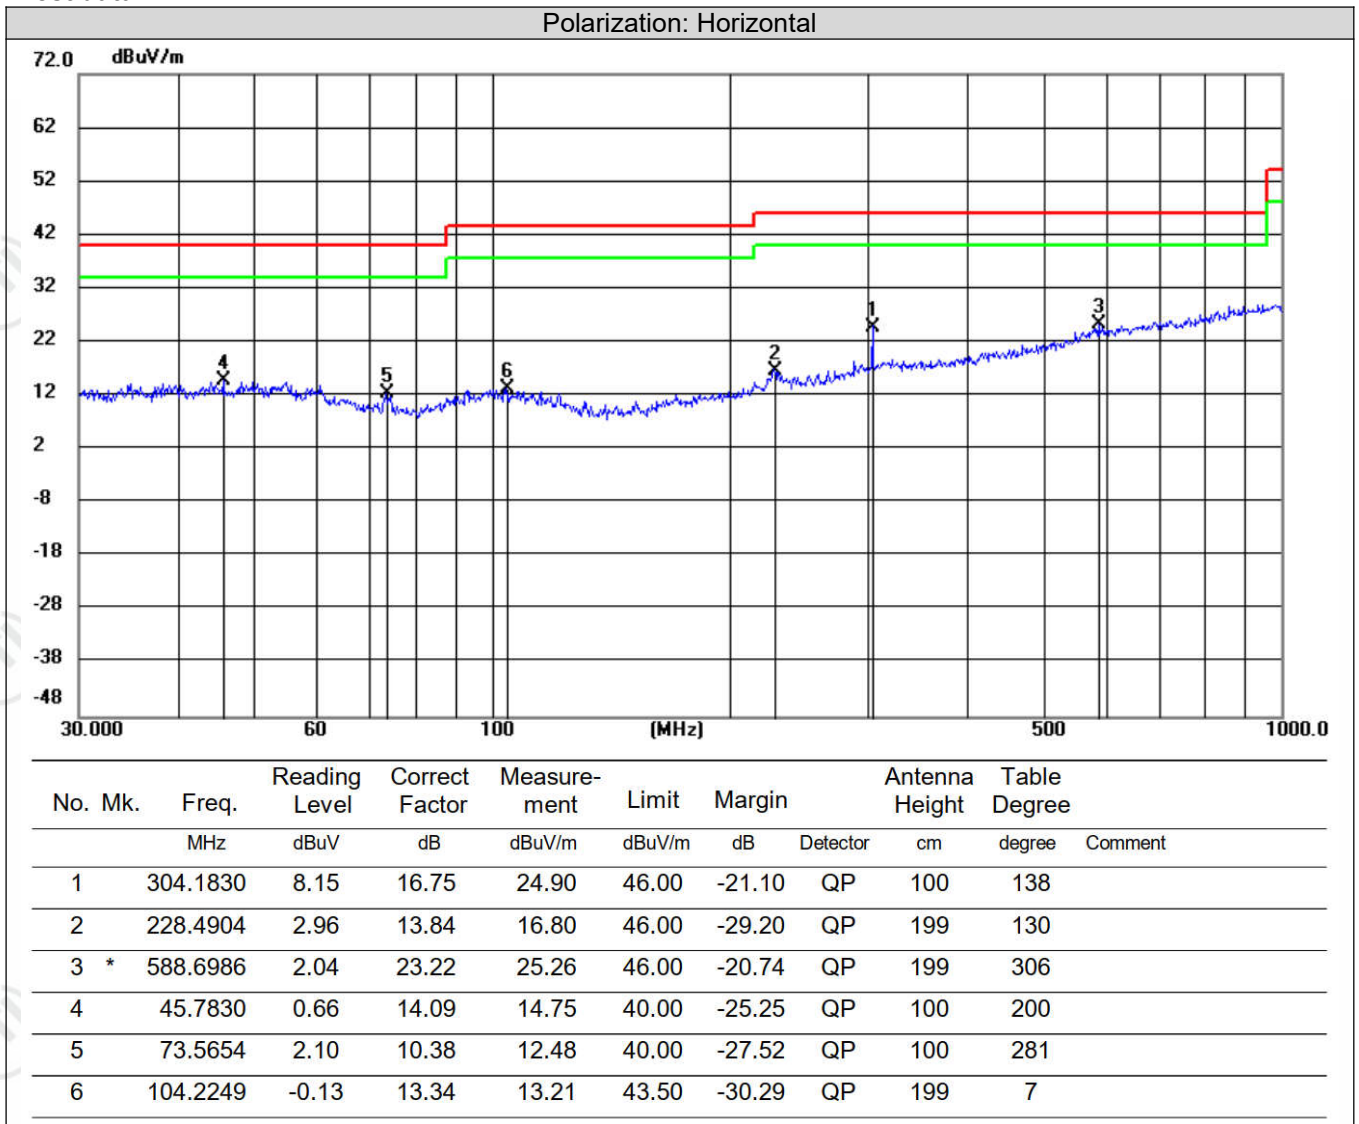

Note:

① Measurement(dBuV/m)=Reading Level(dBuV)+Correct Factor(dB);

② Margin(dB)=Measurement(dBuV/m)-Limit(dBuV/m);

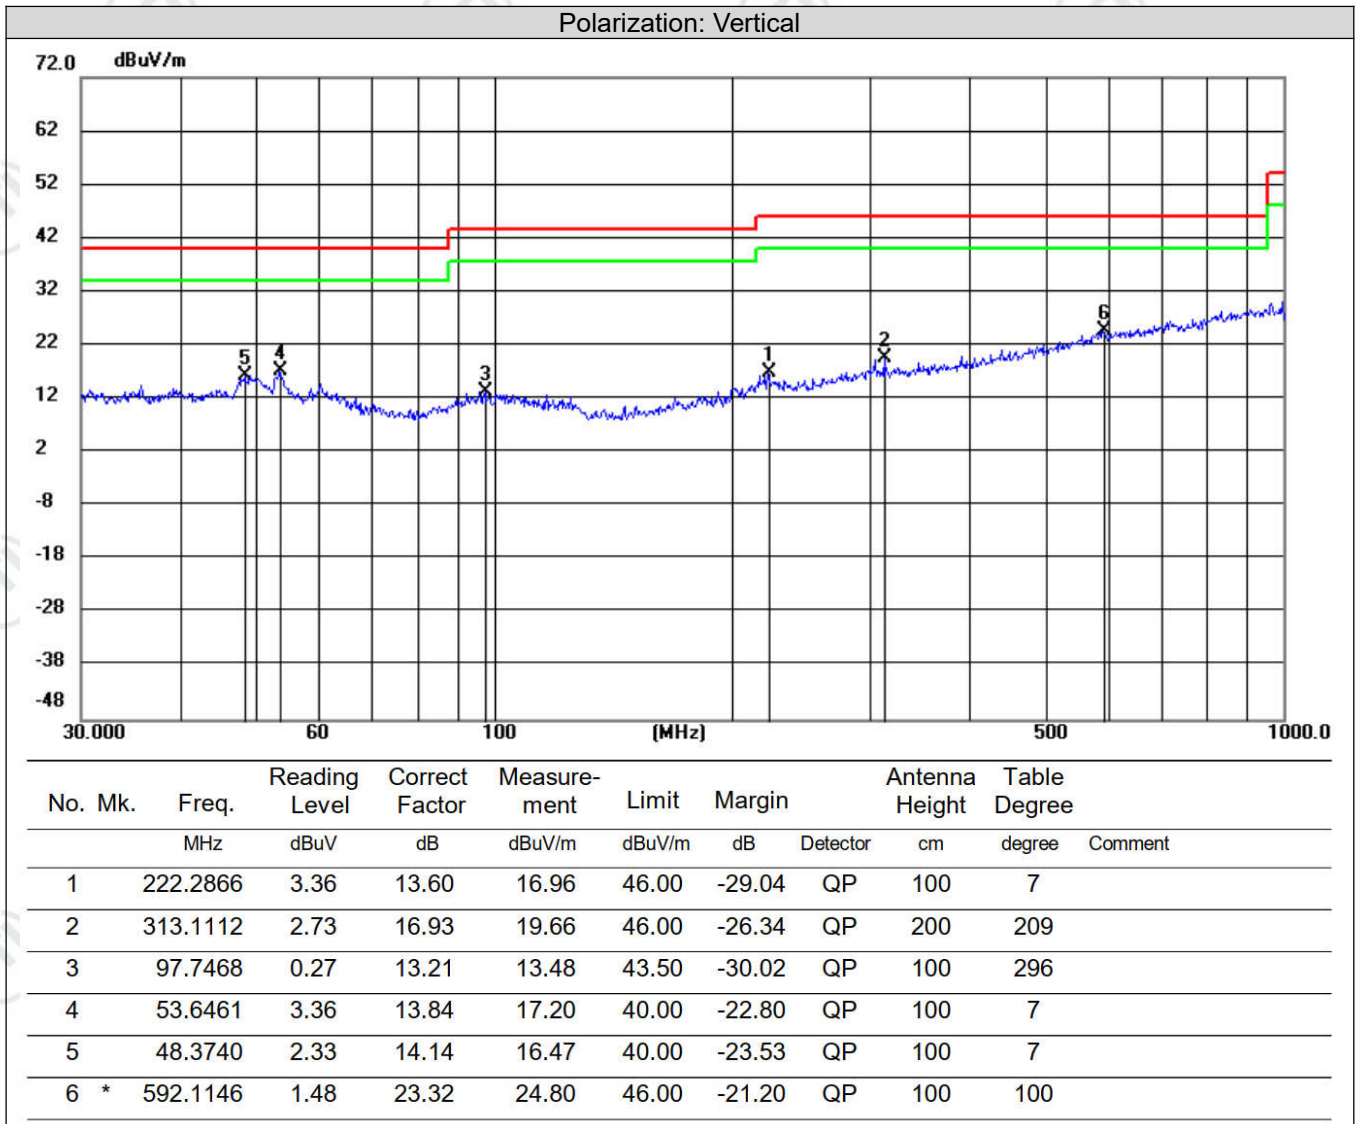

Note:

① Measurement(dBuV/m)=Reading Level(dBuV)+Correct Factor(dB);

② Margin(dB)=Measurement(dBuV/m)-Limit(dBuV/m);

Radiated Spurious Emission 1GHz-18GHz:

Test data:

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	1279.952	-26.84	64.42	37.58	74.00	36.42	PASS	Horizontal	PK
2	2412.2275	-22.11	54.69	32.58	74.00	41.42	PASS	Horizontal	PK
3	4239.2826	-16.08	51.10	35.02	74.00	38.98	PASS	Horizontal	PK
4	7801.5868	-4.38	45.75	41.37	74.00	32.63	PASS	Horizontal	PK
5	13673.7783	5.04	43.05	48.09	74.00	25.91	PASS	Horizontal	PK
6	17644.1096	10.21	36.42	46.63	74.00	27.37	PASS	Vertical	PK
7	1279.952	-26.84	63.68	36.84	74.00	37.16	PASS	Vertical	PK
8	2072.2048	-23.74	54.38	30.64	74.00	43.36	PASS	Vertical	PK
9	2755.6504	-20.69	54.38	33.69	74.00	40.31	PASS	Vertical	PK
10	4371.8915	-15.53	50.26	34.73	74.00	39.27	PASS	Vertical	PK
11	9514.1676	-0.94	43.09	42.15	74.00	31.85	PASS	Vertical	PK
12	17669.0446	10.21	36.17	46.38	74.00	27.62	PASS	Vertical	PK

Radiated Spurious Emission 18GHz-41GHz:

Test data:

NO	Freq. [MHz]	Factor [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity	Remark
1	18875.875	-24.74	59.02	34.28	74.00	39.72	PASS	Horizontal	PK
2	20458.3383	-24.24	56.10	31.86	74.00	42.14	PASS	Horizontal	PK
3	22506.3403	-24.37	53.17	28.80	74.00	45.20	PASS	Horizontal	PK
4	27651.186	-20.40	40.77	20.37	74.00	53.63	PASS	Horizontal	PK
5	32414.2166	-15.51	39.48	23.97	74.00	50.03	PASS	Horizontal	PK
6	38721.0688	-11.71	42.04	30.33	74.00	43.67	PASS	Horizontal	PK
7	40832.5533	-10.41	40.81	30.40	93.57	63.17	PASS	Horizontal	PK
8	18681.7473	-25.33	60.67	35.34	74.00	38.66	PASS	Vertical	PK
9	21058.2023	-24.74	54.97	30.23	74.00	43.77	PASS	Vertical	PK
10	24079.6032	-20.59	50.23	29.64	74.00	44.36	PASS	Vertical	PK
11	28171.0068	-20.50	40.51	20.01	74.00	53.99	PASS	Vertical	PK
12	32411.4565	-15.50	39.24	23.74	74.00	50.26	PASS	Vertical	PK
13	39056.8823	-10.78	41.47	30.69	74.00	43.31	PASS	Vertical	PK
14	40557.4623	-10.62	41.04	30.42	93.57	63.15	PASS	Vertical	PK

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- For 40GHz to 41GHz,the limit is 600pW/cm² equivalent to an electric field strength of 93.57dBuV/m@3m. Only the worst case data was recorded in the report.

Radiated Spurious Emission 41GHz-243GHz:


Test data:

Test Frequency (GHz)	Polarity	EIRP/1MHz (dBm)	Power density(pW/cm ²) @3m distance	Limit of Power density(pW/cm ²) @3m distance	Result
41.011500	Horizontal	-33.41	0.40	≤600	Pass
41.002500	Vertical	-34.49	0.31	≤600	Pass
60.068750	Horizontal	-34.08	0.35	≤600	Pass
69.676090	Vertical	-8.89	114.17	≤600	Pass
98.233150	Horizontal	-26.96	1.78	≤600	Pass
98.156650	Vertical	-19.85	9.15	≤600	Pass
130.872030	Horizontal	-38.66	0.12	≤600	Pass
130.829040	Vertical	-38.84	0.12	≤600	Pass
139.147800	Horizontal	-37.46	0.16	≤600	Pass
138.729330	Vertical	-36.99	0.18	≤600	Pass
140.318750	Horizontal	-36.56	0.20	≤600	Pass
140.060250	Vertical	-34.10	0.34	≤600	Pass
219.540260	Horizontal	-45.94	0.02	≤1000	Pass
203.929450	Vertical	-42.70	0.05	≤1000	Pass
221.629080	Horizontal	-36.09	0.22	≤1000	Pass
222.118150	Vertical	-40.38	0.08	≤1000	Pass
234.83590	Horizontal	-40.27	0.08	≤1000	Pass
235.535560	Vertical	-45.89	0.02	≤1000	Pass


Note:

- ① EIRP(dBm/MHz) has added free space loss of 1.0m distance.
- ② Only the worst case data was recorded in the report.
- ③ Power density(pW/cm²)=10^{EIRP/1MHz(dBm)+10*10⁹÷[4*π*(3m*100)²];}


Test graph:

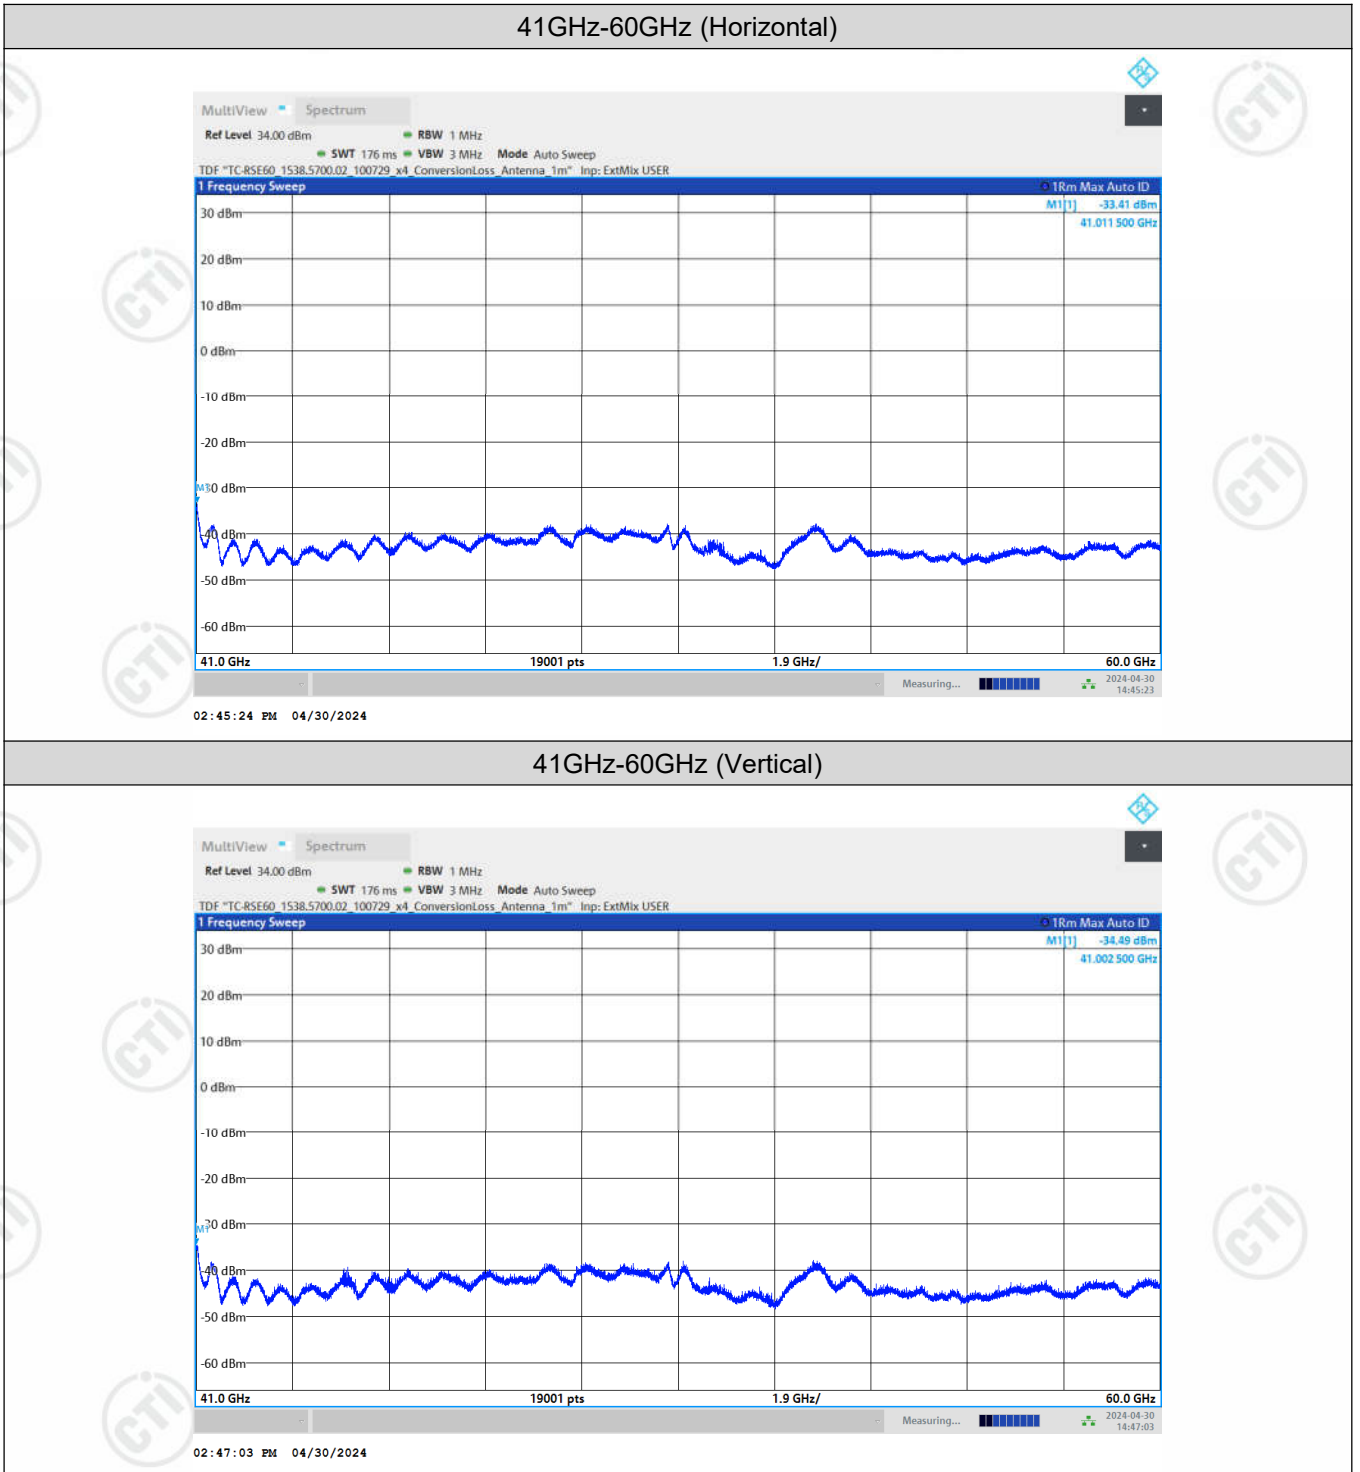


60GHz-90GHz (Horizontal)

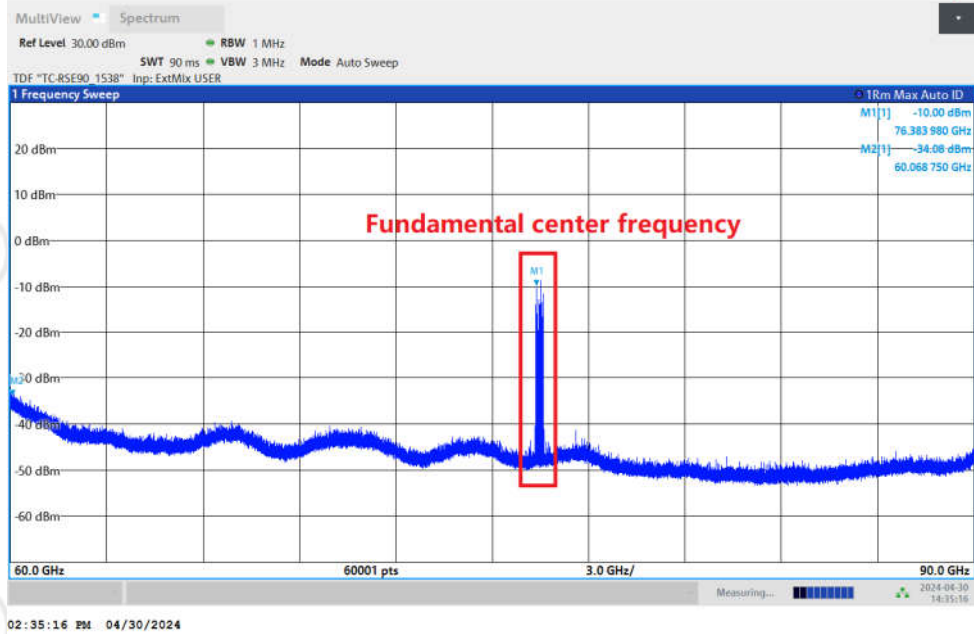


60GHz-90GHz (Vertical)

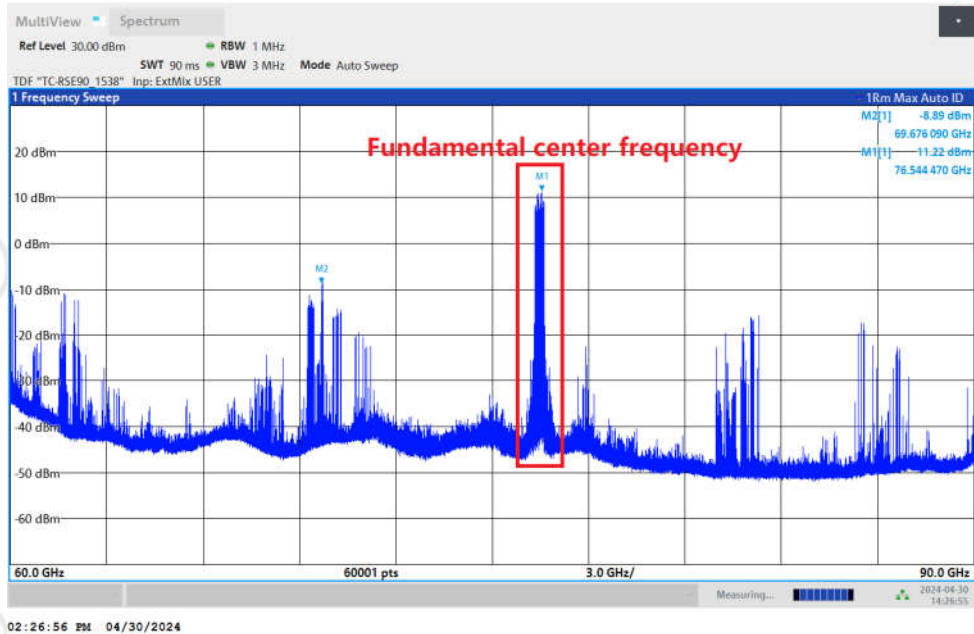


90GHz-130GHz (Horizontal)

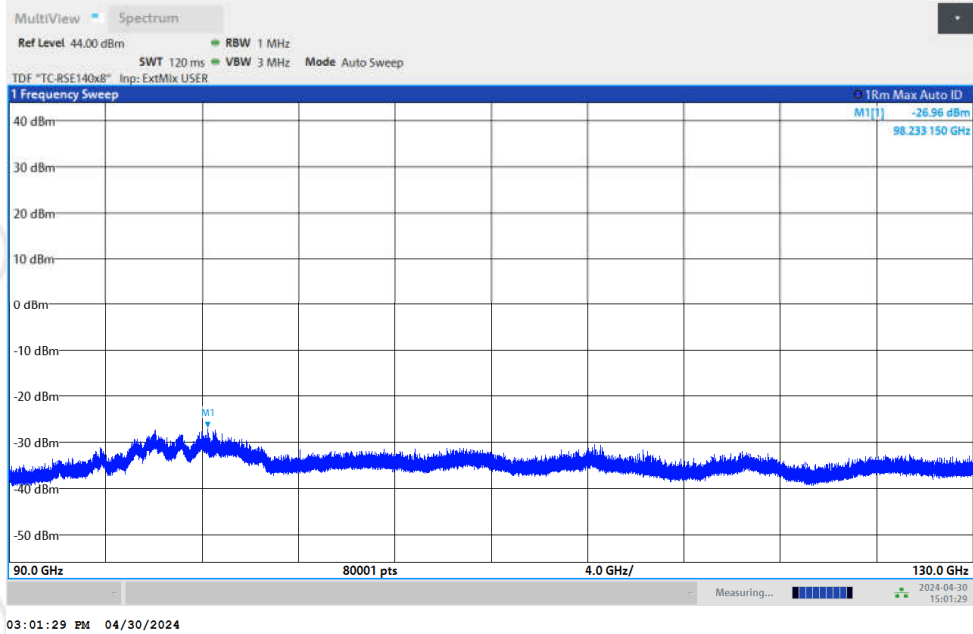


90GHz-130GHz (Vertical)

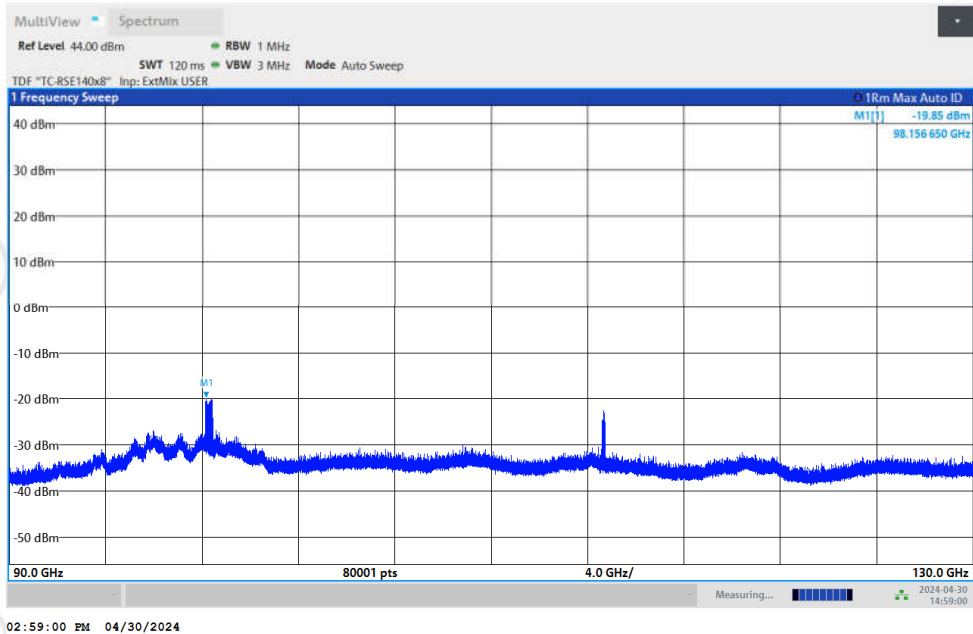


130GHz-132GHz (Horizontal)

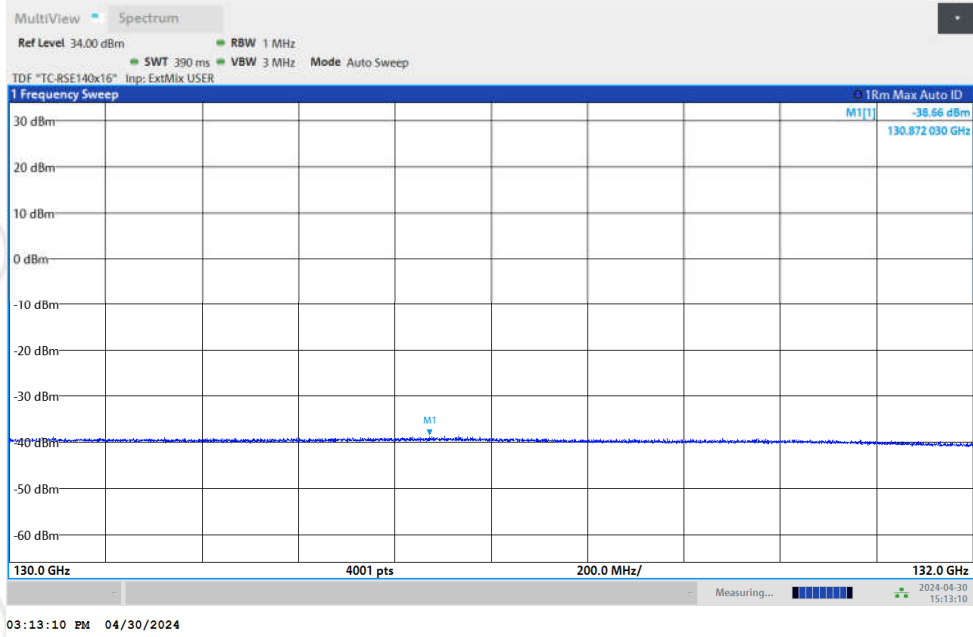


130GHz-132GHz (Vertical)

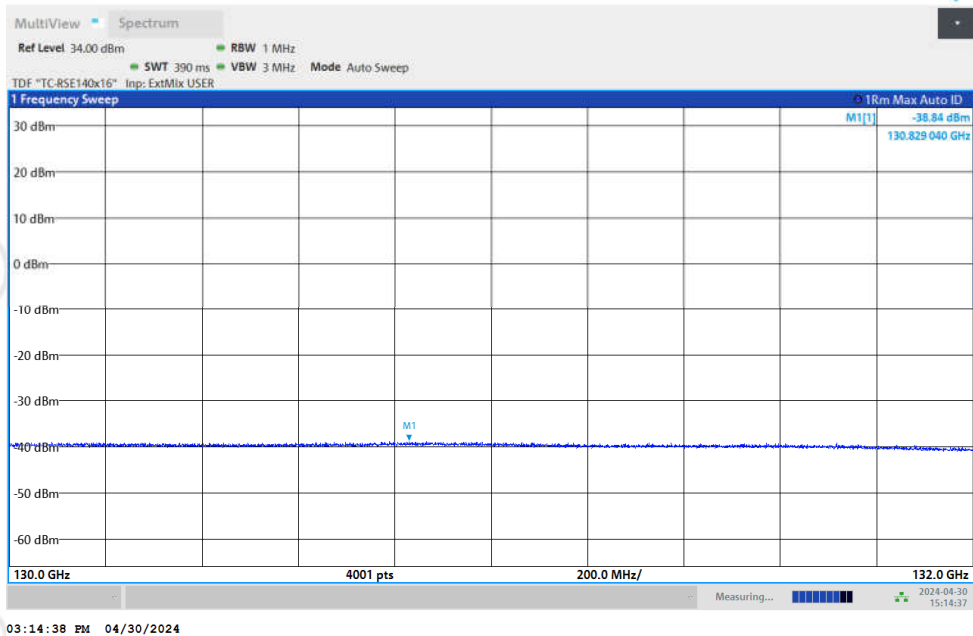


132GHz-140GHz (Horizontal)

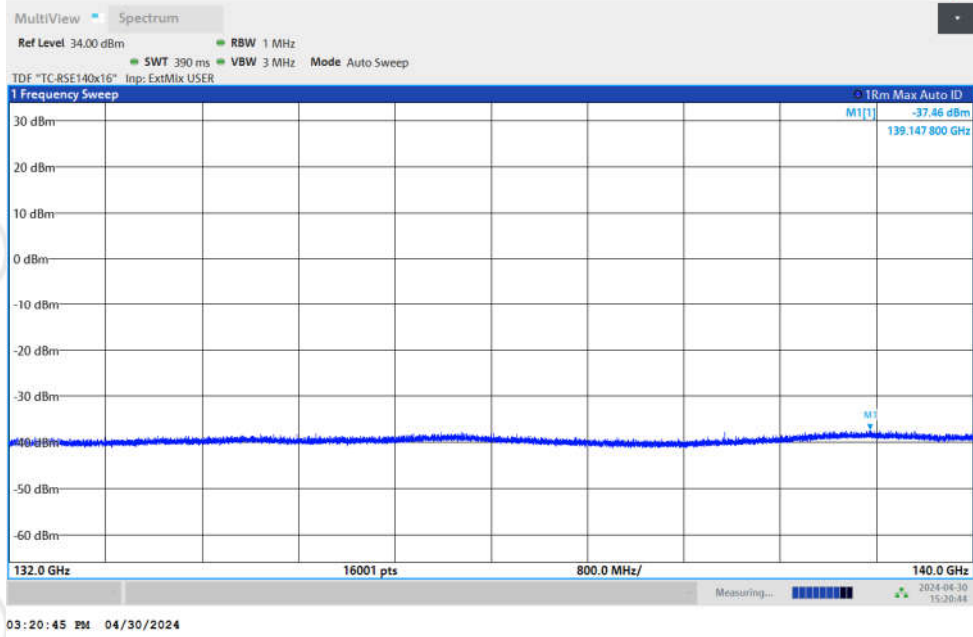


132GHz-140GHz (Vertical)

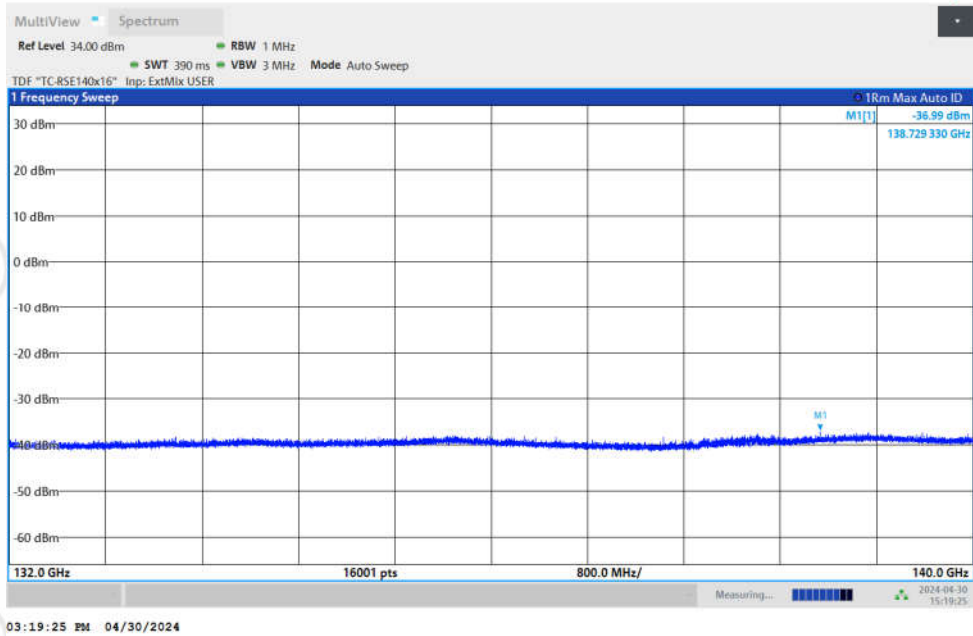


140GHz-180GHz (Horizontal)

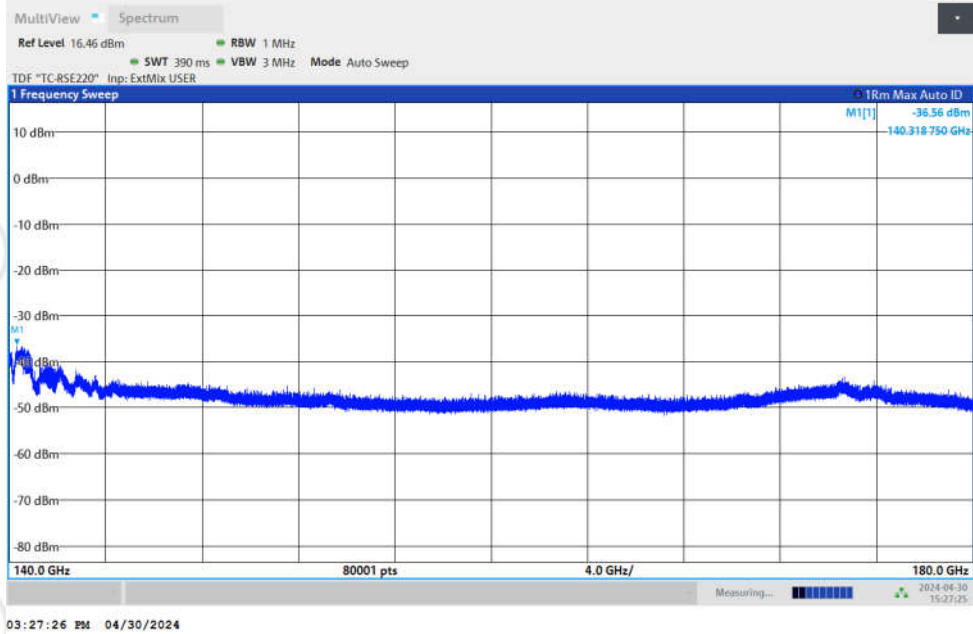


140GHz-180GHz (Vertical)

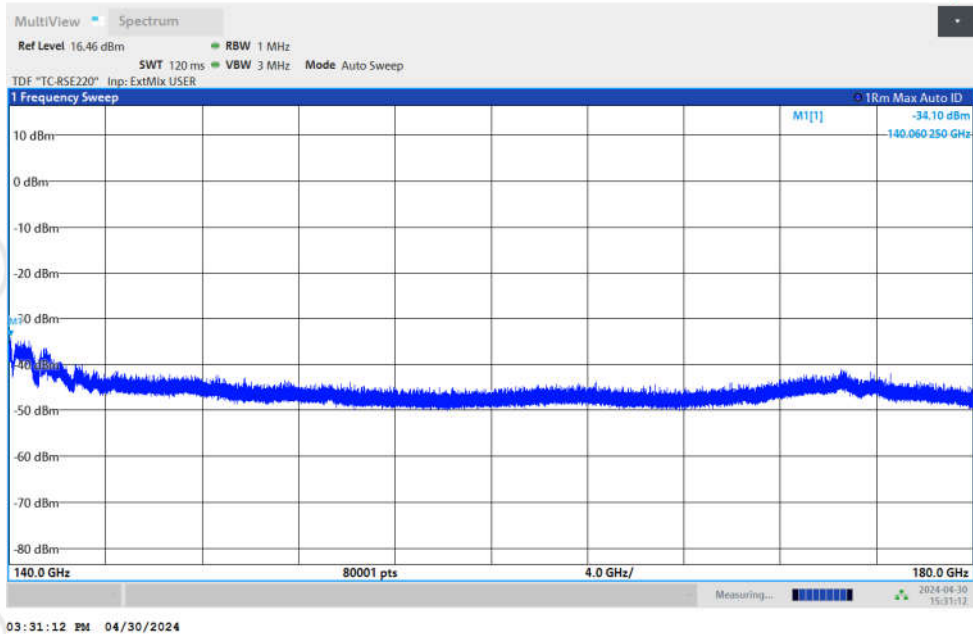


180GHz-220GHz (Horizontal)

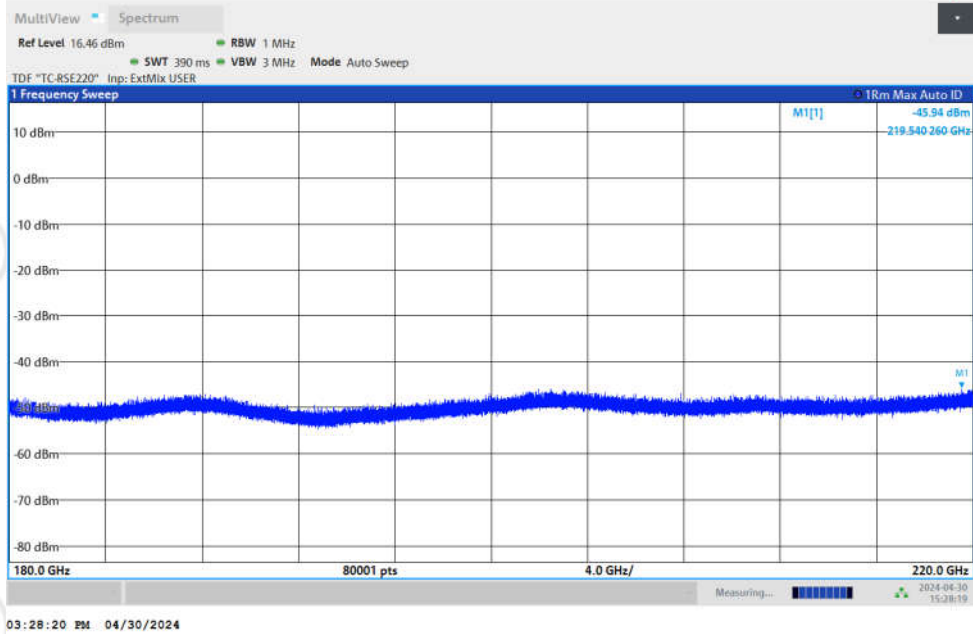


180GHz-220GHz (Vertical)

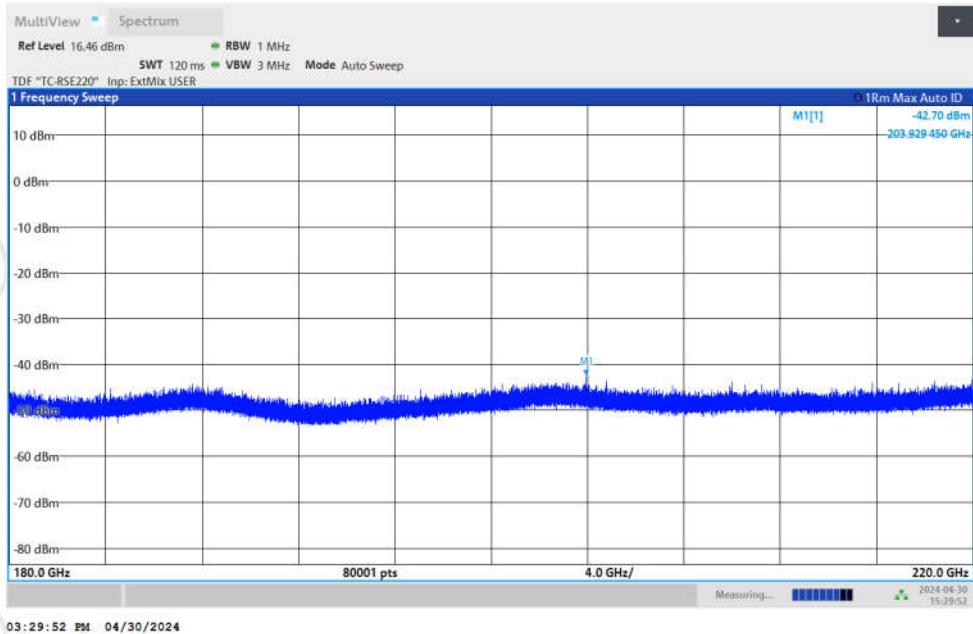


220GHz-231GHz (Horizontal)

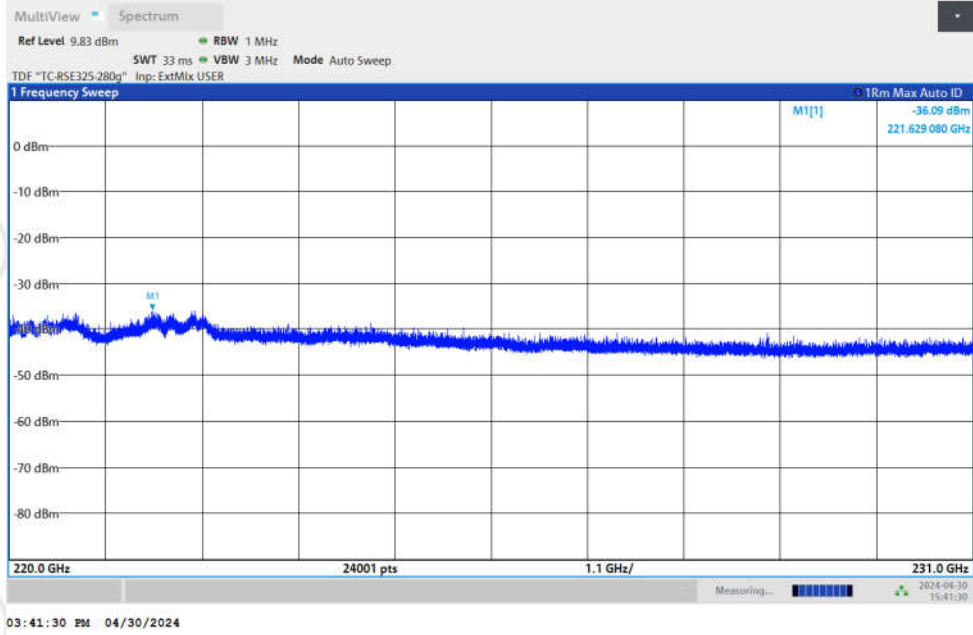


220GHz-231GHz (Vertical)

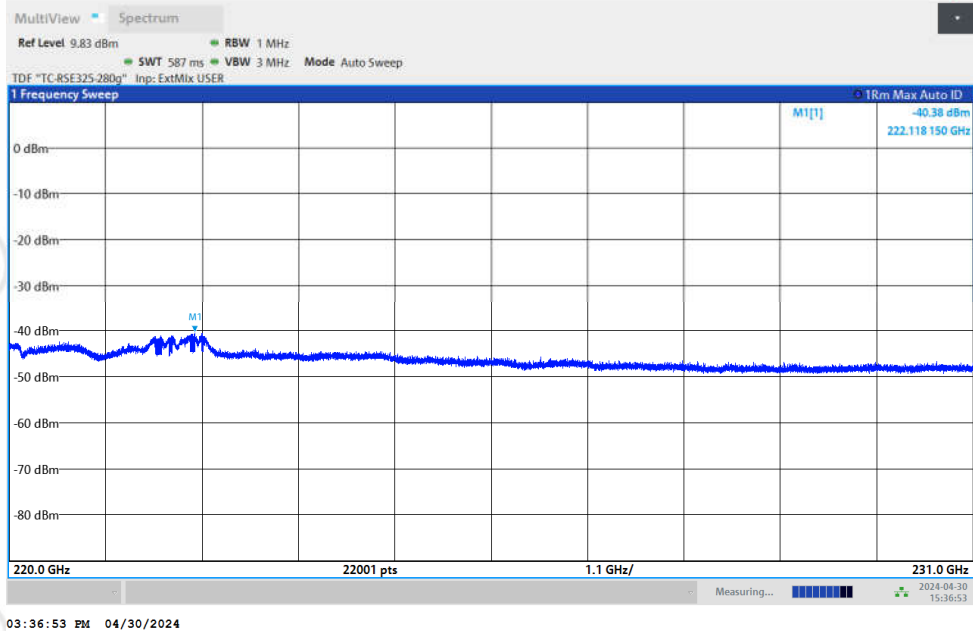


231GHz-243GHz (Horizontal)

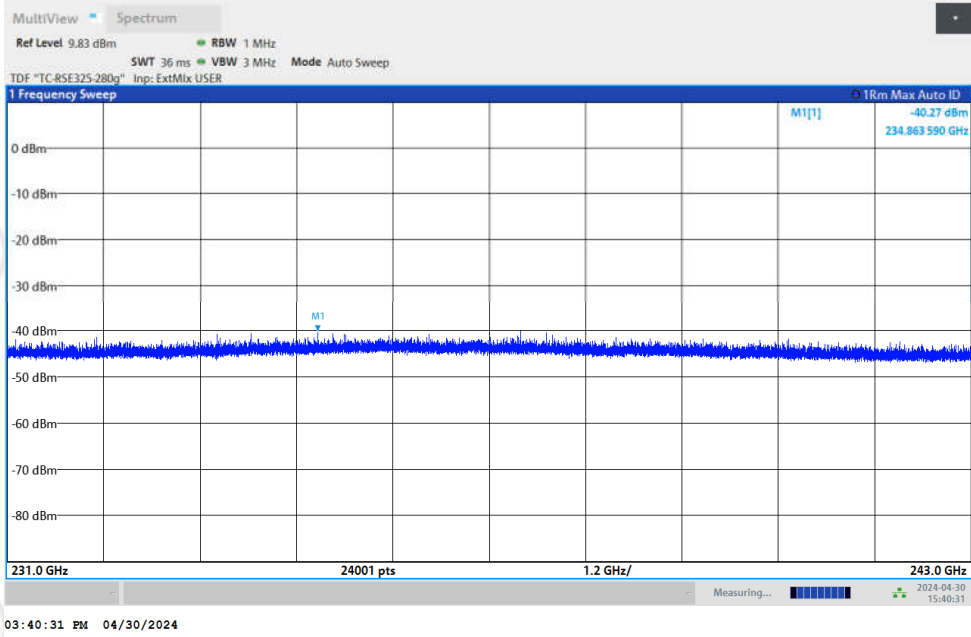

231GHz-243GHz (Vertical)

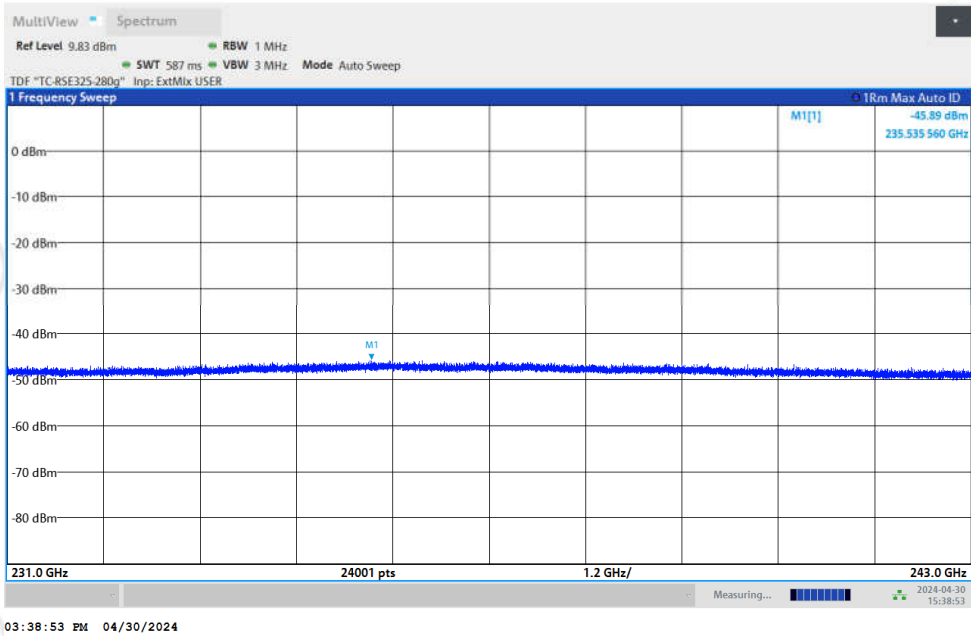

5.5 Frequency stability

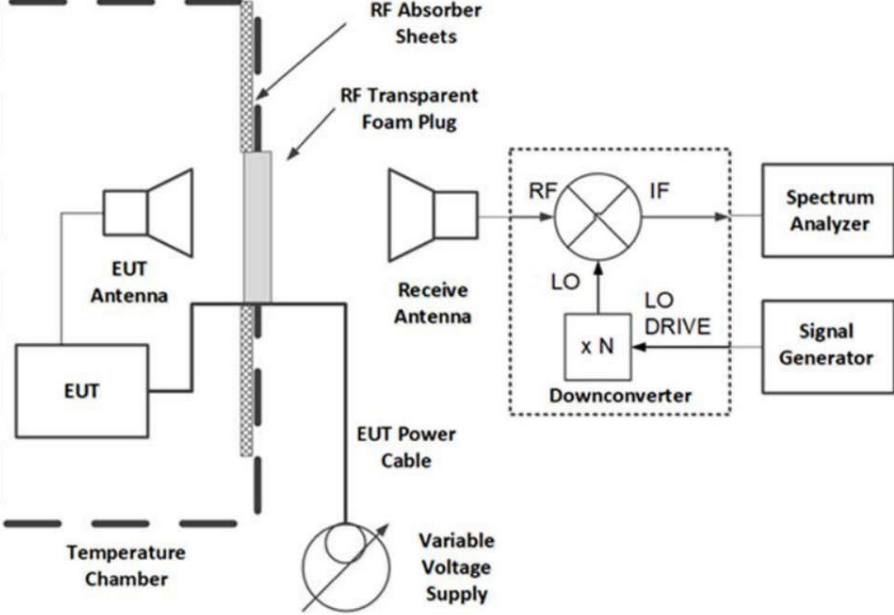Test Requirement:	47 CFR Part 95, Subpart M Section 95.3379 (b), KDB 653005 D01 76-81 GHz Radars v01r01 Section 4 d)
Test Method:	ANSI C63.26:2015 Section 5.6
Limit:	Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation.
Test Setup:	 <p style="text-align: center;">Figure 23—Example of a frequency stability setup configuration</p>
Test Procedure:	<p>The carrier frequency of the transmitter is measured at room temperature. (20°C to provide a reference)</p> <p>At 10°C intervals of temperatures between -30°C and +50°C at the manufacturer's rated supply voltage, and At +20°C temperature and ±15% supply voltage variations. If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.</p> <p>Measurement data showing variation in transmitter output frequency from a cold start and the elapsed time necessary for the frequency to stabilize within the applicable tolerance.</p> <p>Tests shall be made after temperature stabilization at each of the ambient temperature levels; the lower temperature limit, 0°C and + 30°C with no primary power applied.</p> <p>Beginning at each temperature level , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater.</p> <p>During each test, the ambient temperature shall not be allowed to rise more than 10°C above the respective beginning ambient temperature level.</p>
Test Mode:	TX mode_Make EUT continuously emit radar signals.

Test data:

Voltage (%)	Power (V/DC)	Temperature (°C)	Frequency Left (GHz)	Frequency Right (GHz)	Limit (GHz)	Result
100	24.0	-40	76.163127	76.730514	76 to 81	Pass
		-30	76.161346	76.730802	76 to 81	Pass
		-20	76.163031	76.728479	76 to 81	Pass
		-10	76.160477	76.729320	76 to 81	Pass
		0	76.160367	76.731152	76 to 81	Pass
		+10	76.162835	76.730097	76 to 81	Pass
		+20	76.160082	76.730502	76 to 81	Pass
		+30	76.159584	76.729940	76 to 81	Pass
		+40	76.160574	76.730485	76 to 81	Pass
		+50	76.160935	76.730481	76 to 81	Pass
		+60	76.162344	76.730903	76 to 81	Pass
		+70	76.159647	76.732790	76 to 81	Pass
		+80	76.163547	76.730261	76 to 81	Pass
+85	76.161642	76.730843	76 to 81	Pass		
115	32.0	+20	76.160950	76.728477	76 to 81	Pass
85	9.0	+20	76.160637	76.729950	76 to 81	Pass

Note: The extreme voltage and extreme temperature is specified by the manufacturer.