



# FCC RF Test Report

**APPLICANT** : Amazon.com Services LLC  
**EQUIPMENT** : Digital Media Receiver  
**MODEL NAME** : C2N6L4  
**FCC ID** : 2A4DH-0821  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : May 01, 2022 ~ Jul. 07, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Product Feature of Equipment Under Test..... 5

    1.3 Product Specification of Equipment Under Test..... 5

    1.4 Modification of EUT ..... 5

    1.5 Testing Location ..... 6

    1.6 Test Software..... 6

    1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8**

    2.1 Carrier Frequency Channel ..... 8

    2.2 Test Mode ..... 9

    2.3 Connection Diagram of Test System ..... 10

    2.4 EUT Operation Test Setup ..... 11

    2.5 Measurement Results Explanation Example ..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB and 99% Bandwidth Measurement ..... 12

    3.2 Output Power Measurement..... 21

    3.3 Power Spectral Density Measurement ..... 22

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 31

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 40

    3.6 AC Conducted Emission Measurement..... 44

    3.7 Antenna Requirements..... 46

**4 LIST OF MEASURING EQUIPMENT..... 47**

**5 UNCERTAINTY OF EVALUATION..... 48**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1D0934-01B	Rev. 01	Initial issue of report	Jul. 18, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 10.53 dB at 2483.520 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 21.96 dB at 0.401 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Remark:** Not required means after assessing, test items are not necessary to carry out.

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Amazon.com Services LLC  
410 Terry Avenue N Seattle, WA 98109-5210 United States

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	C2N6L4
FCC ID	2A4DH-0821

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps : 4.90dBm (0.0031 W) Bluetooth LE 2Mbps : 4.80dBm (0.0030 W)
99% Occupied Bandwidth	Bluetooth LE 1Mbps : 1.033MHz Bluetooth LE 2Mbps : 2.058MHz
Antenna Type / Gain	PIFA Antenna type with gain 4 dBi
Type of Modulation	Bluetooth LE : GFSK

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ TH01-SZ	CN1256	421272
<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH02-SZ	CN1256	421272

### 1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO01-SZ	AUDIX	E3	6.120613b



## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

### **Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-





## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: All Stress(CPU, DDR, NAND, all LEDs, Max Audio, Mic On)+ NB +Bluetooth Link+ WLAN Link(2.4G)+ Adapter(Acbel US)

### 2.3 Connection Diagram of Test System

For AC Conducted Emission:

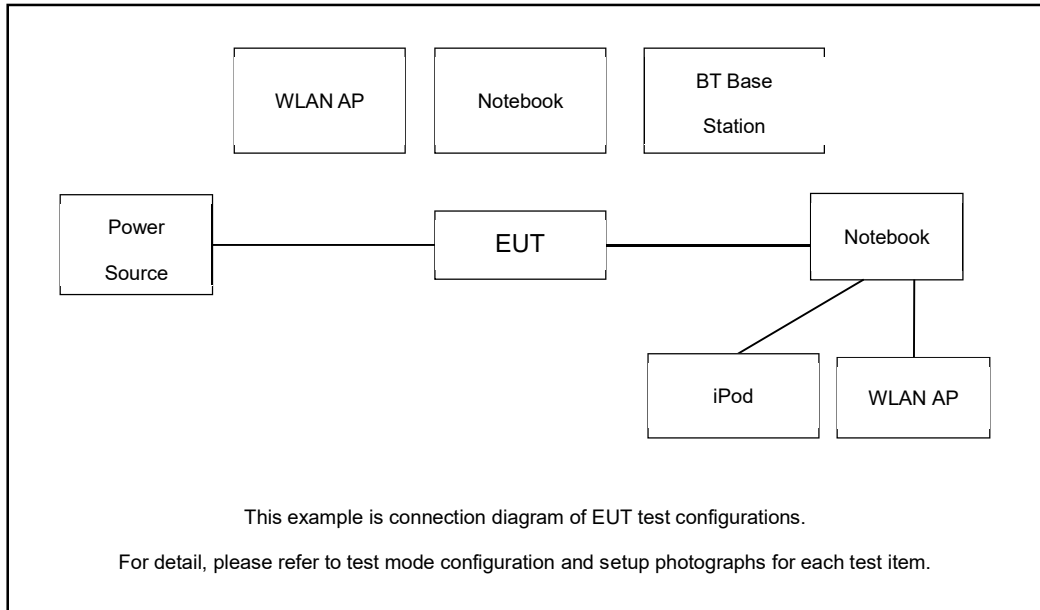

For Radiated Emission:

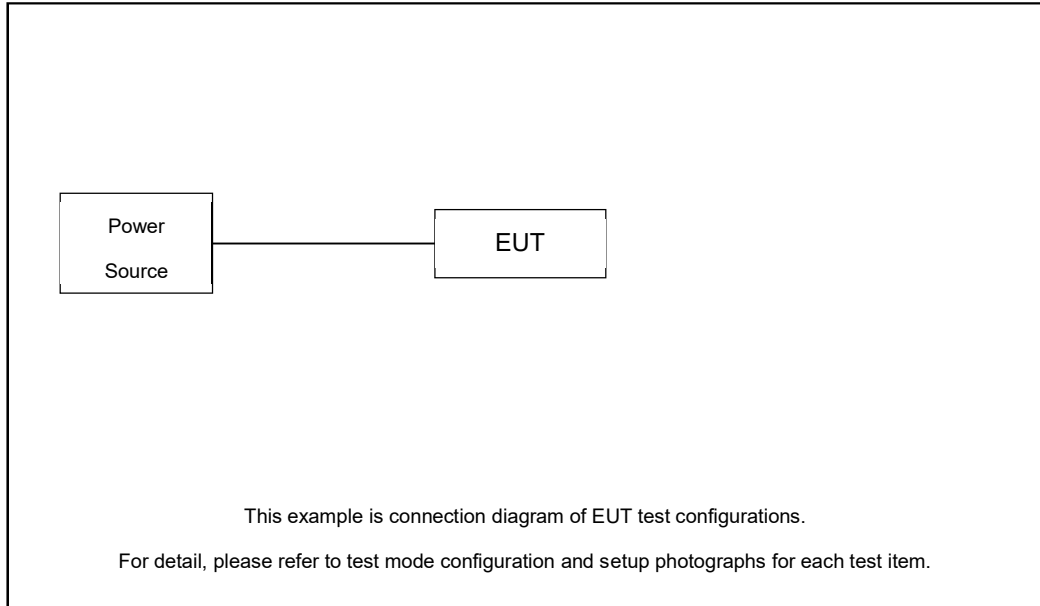



### 2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
2.	Notebook	Inspiron 15-7570	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	IPod	MC525 ZP/A	Fcc DoC	Shielded, 1.0m	N/A
4.	Base Station	R&S	CBT32	N/A	Unshielded,1.8m

### 2.5 EUT Operation Test Setup

For BLE function, the engineering test program (compliance tool) was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

### 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 1.5 dB and 10dB attenuator.

$$\begin{aligned}
\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
&= 1.5 + 10 = 11.5 \text{ (dB)}
\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

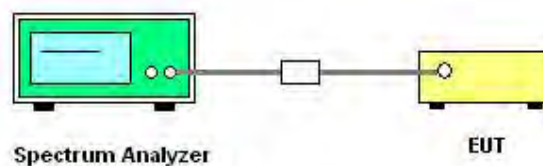




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

Bluetooth LE 1Mbps:


6 dB Bandwidth Plot on Channel 00

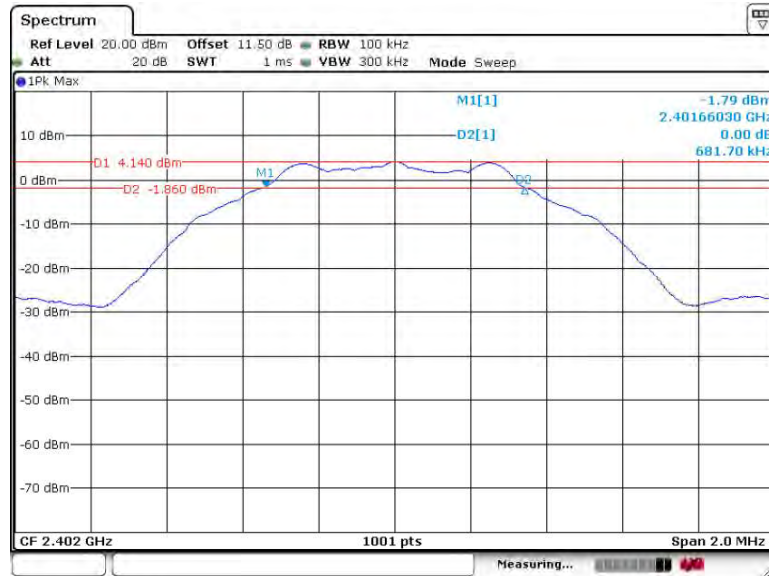

Date: 1 MAY 2022 21:25:21



6 dB Bandwidth Plot on Channel 19

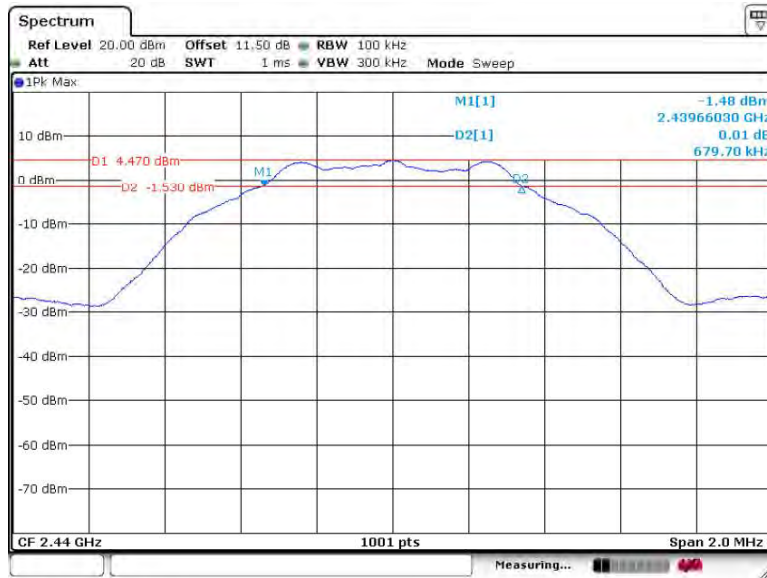

Date: 1.MAY.2022 21:27:30

6 dB Bandwidth Plot on Channel 39




Date: 1.MAY.2022 21:29:49



Bluetooth LE 2Mbps:


6 dB Bandwidth Plot on Channel 00

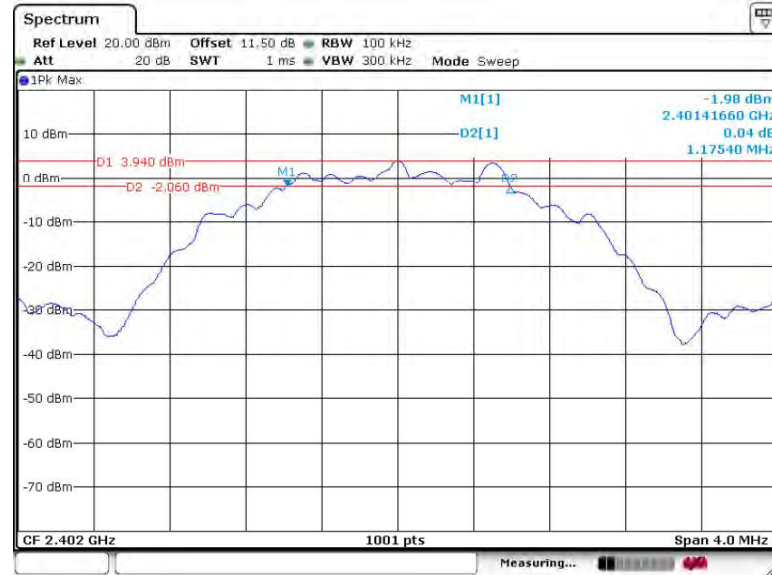

Date: 1.MAY.2022 21:32:32




6 dB Bandwidth Plot on Channel 19

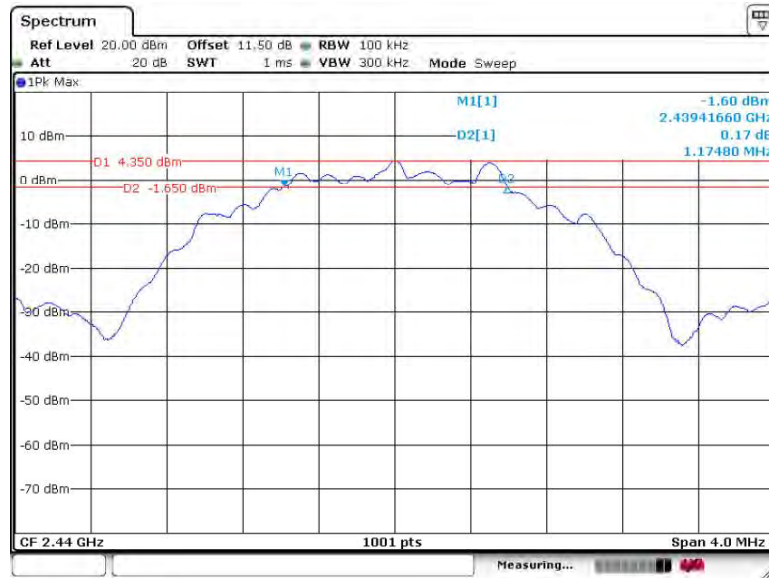

Date: 1.MAY.2022 21:36:02

6 dB Bandwidth Plot on Channel 39

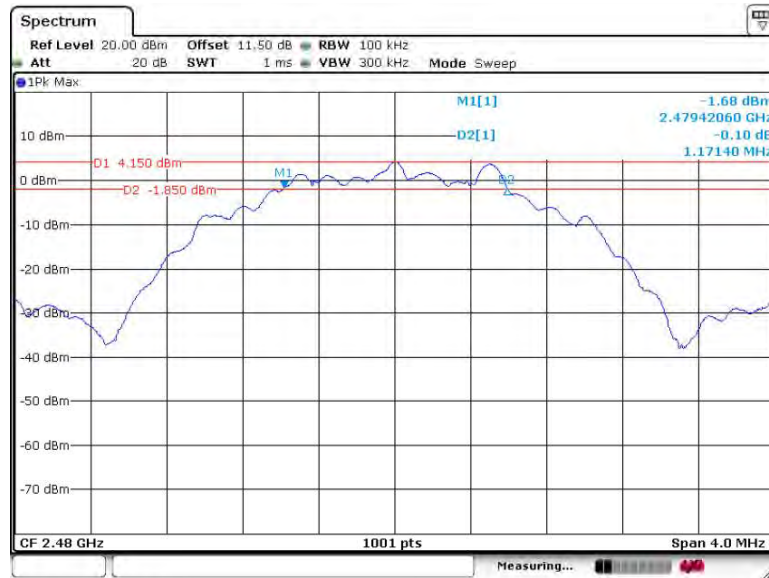

Date: 1.MAY.2022 21:37:53






### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

Bluetooth LE 1Mbps:


99% Occupied Bandwidth Plot on Channel 00

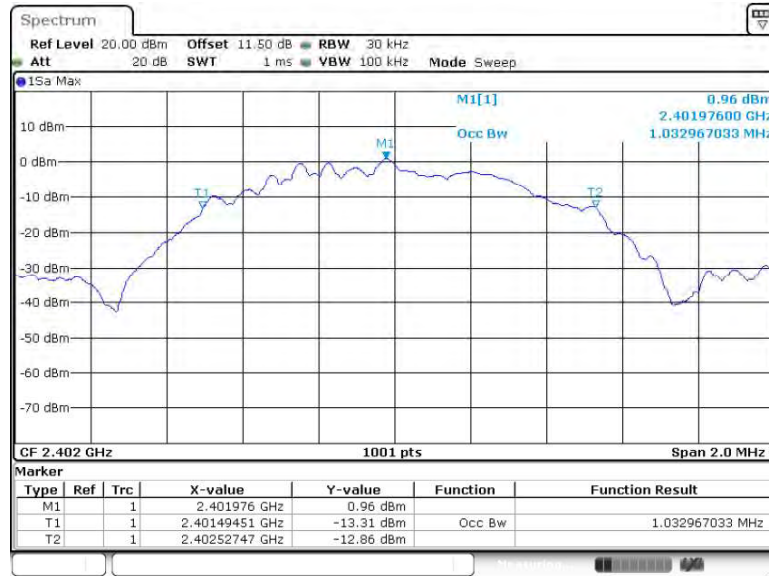

Date: 1.MAY.2022 21:26:40




99% Occupied Bandwidth Plot on Channel 19

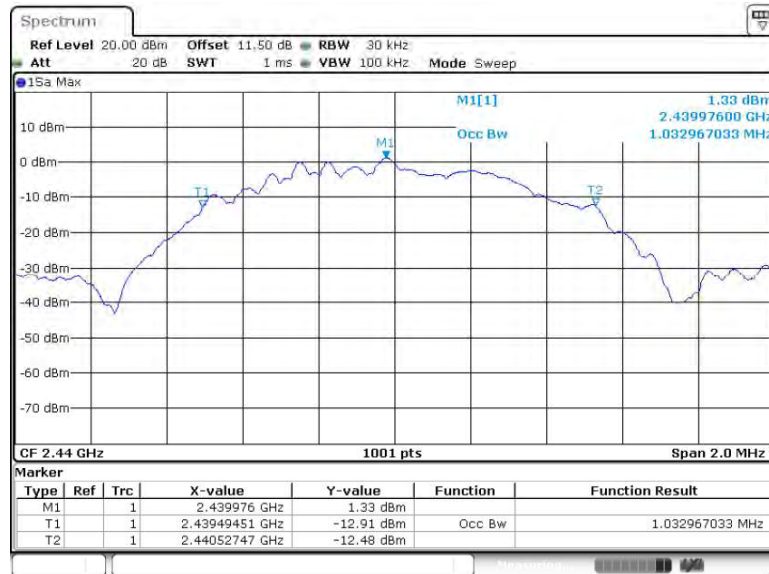

Date: 1.MAY.2022 21:29:01

99% Occupied Bandwidth Plot on Channel 39

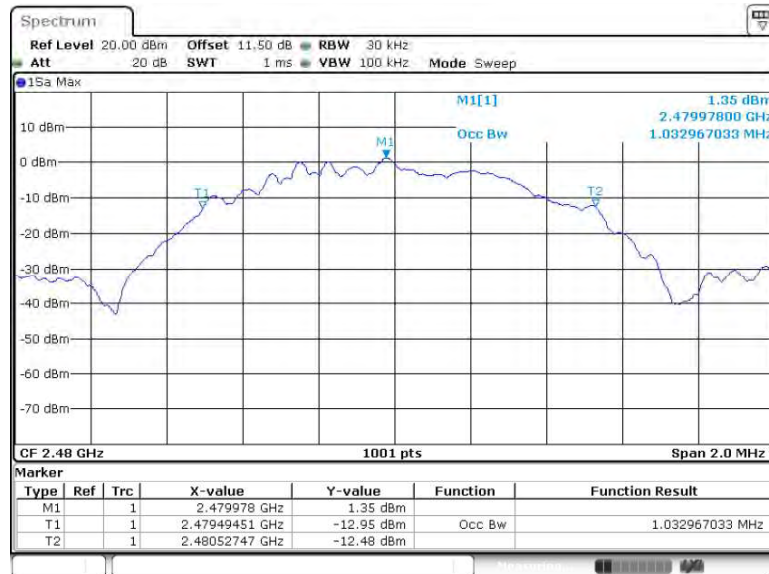


Date: 1.MAY.2022 21:31:15



Bluetooth LE 2Mbps:


99% Occupied Bandwidth Plot on Channel 00

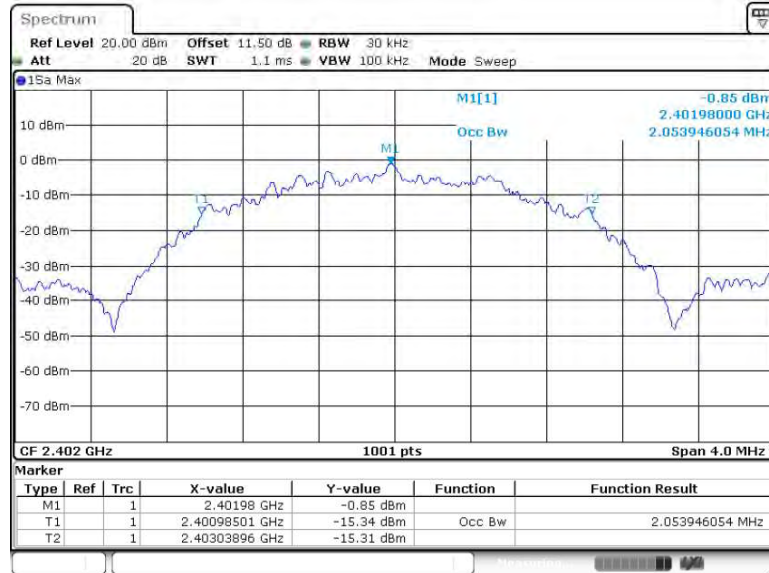

Date: 1.MAY.2022 21:34:55




99% Occupied Bandwidth Plot on Channel 19

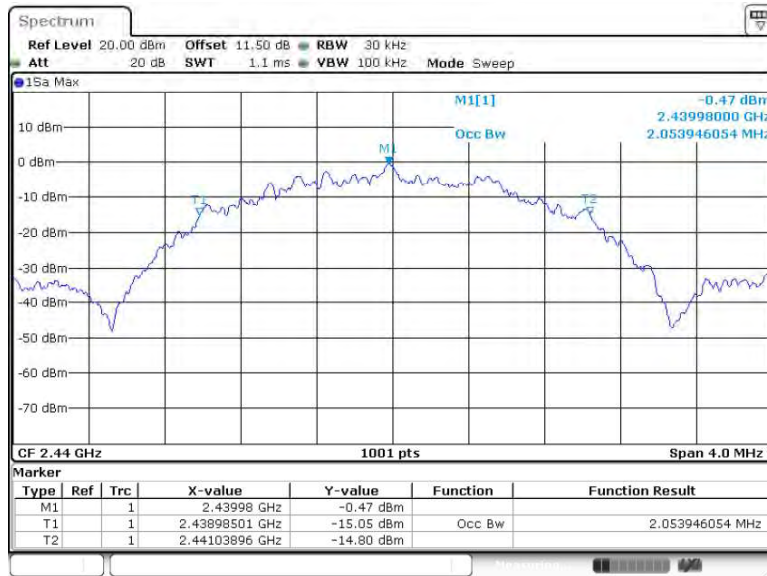

Date: 1.MAY.2022 21:37:00

99% Occupied Bandwidth Plot on Channel 39

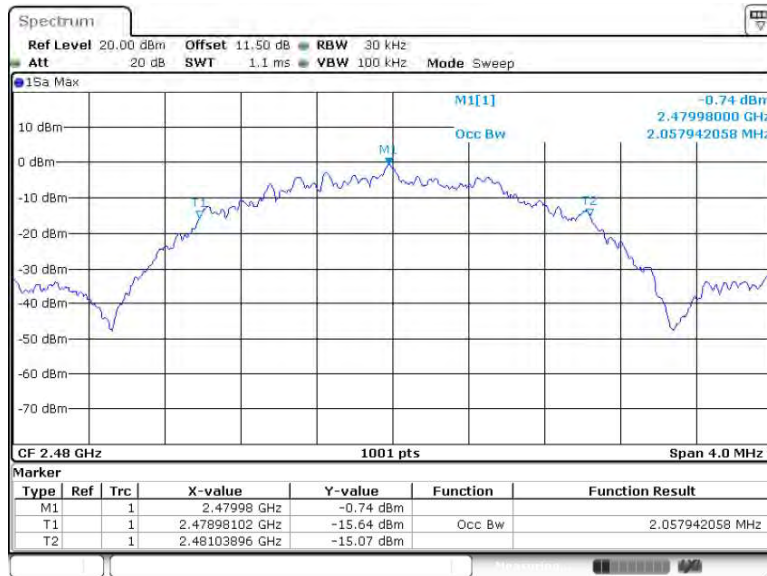

Date: 1.MAY.2022 21:39:03

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

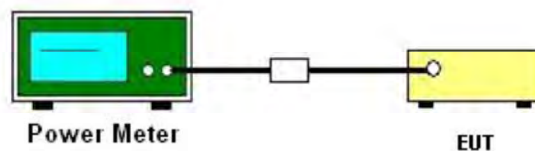

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

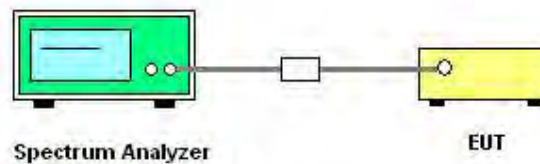

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


Bluetooth LE 1Mbps:

PSD 100kHz Plot on Channel 00

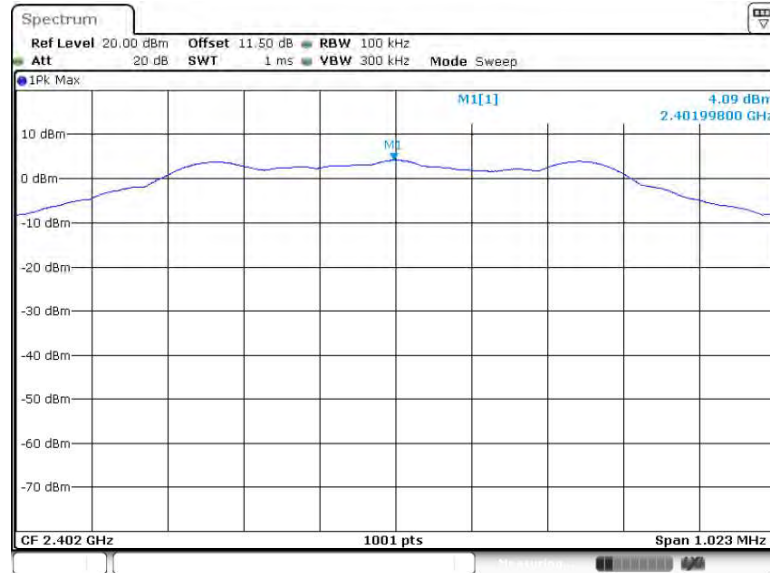

Date: 1.MAY.2022 21:25:47


PSD 100kHz Plot on Channel 19

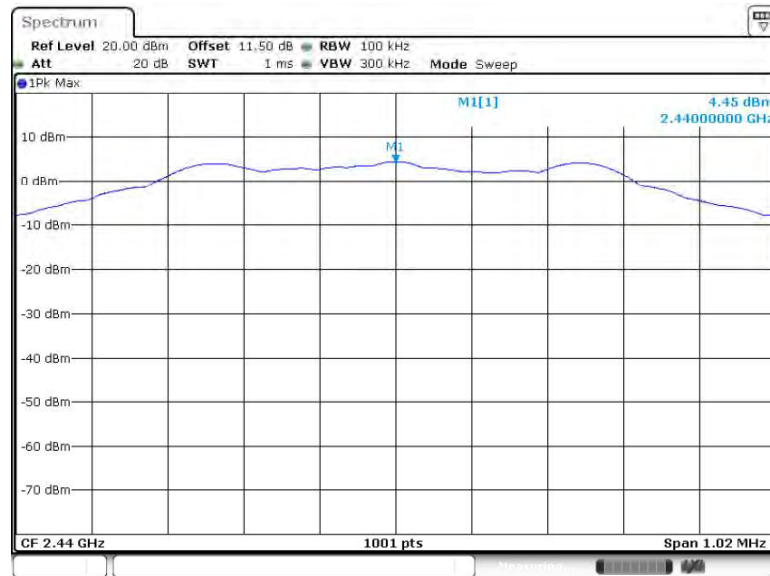

Date: 1.MAY.2022 21:27:52



PSD 100kHz Plot on Channel 39

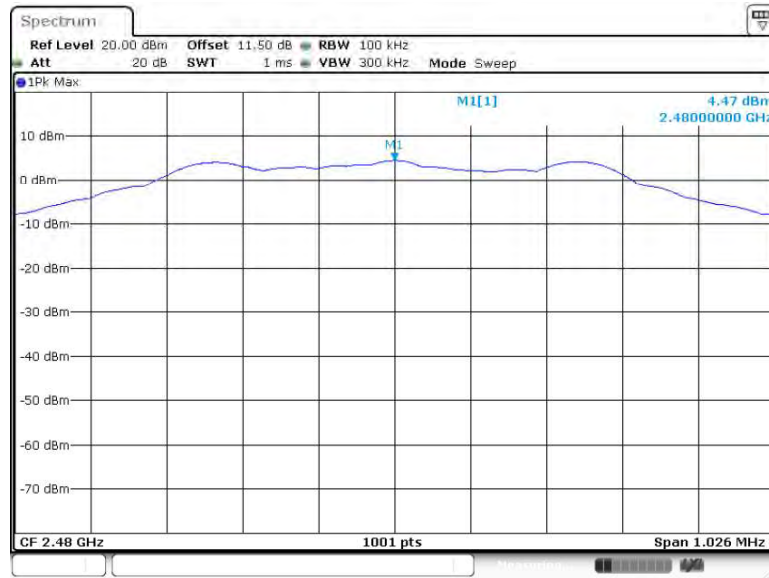


Date: 1.MAY.2022 21:30:30






Bluetooth LE 2Mbps:

PSD 100kHz Plot on Channel 00

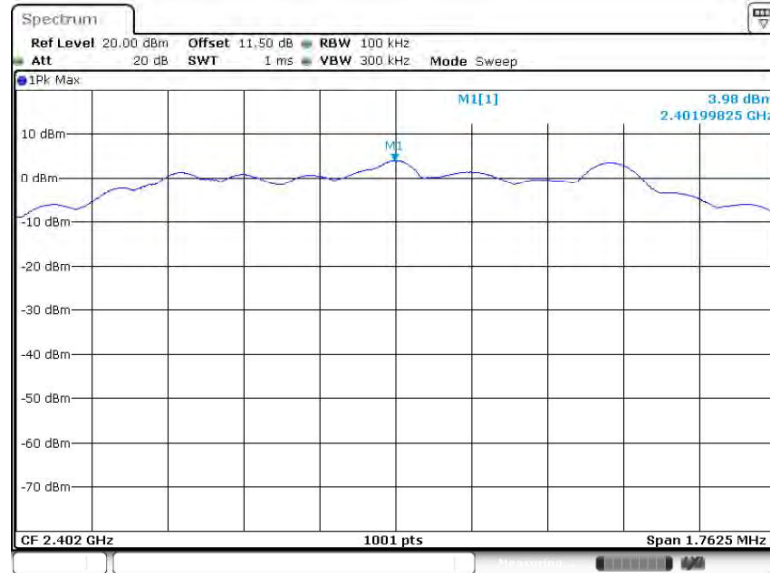

Date: 1.MAY.2022 21:32:54


PSD 100kHz Plot on Channel 19

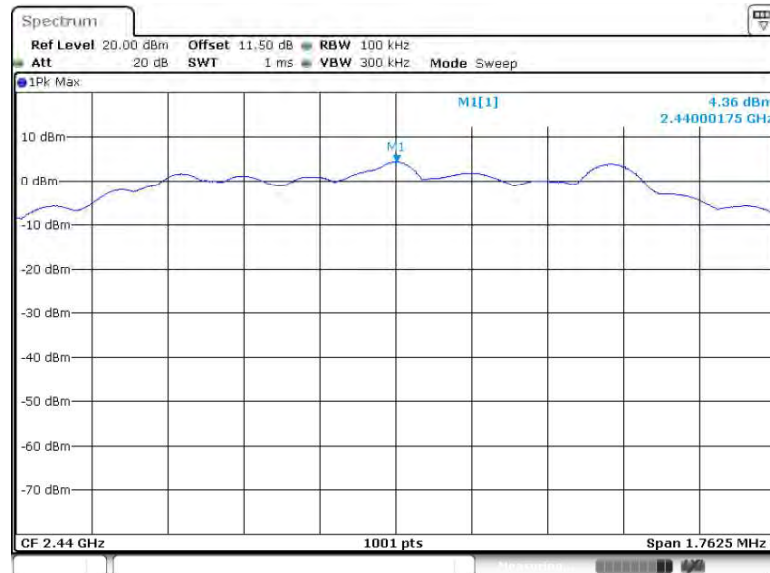

Date: 1.MAY.2022 21:36:23



PSD 100kHz Plot on Channel 39

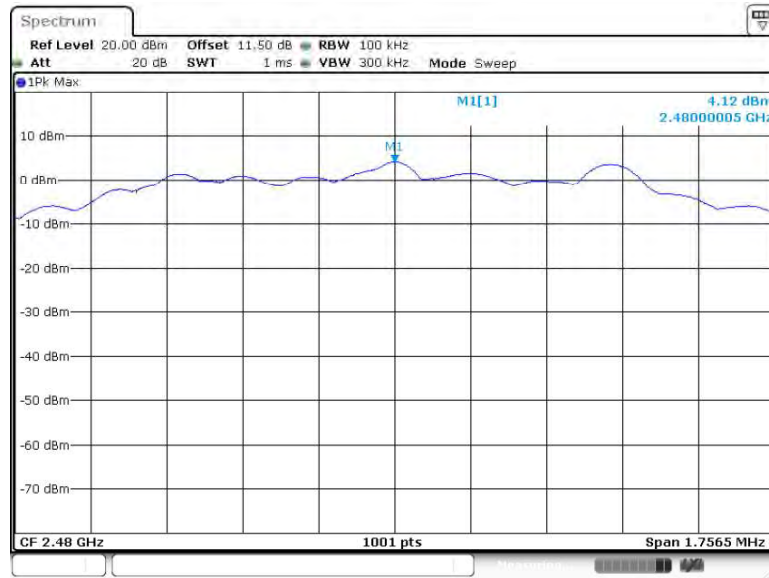


Date: 1.MAY.2022 21:38:16



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


Bluetooth LE 1Mbps:

PSD 3kHz Plot on Channel 00

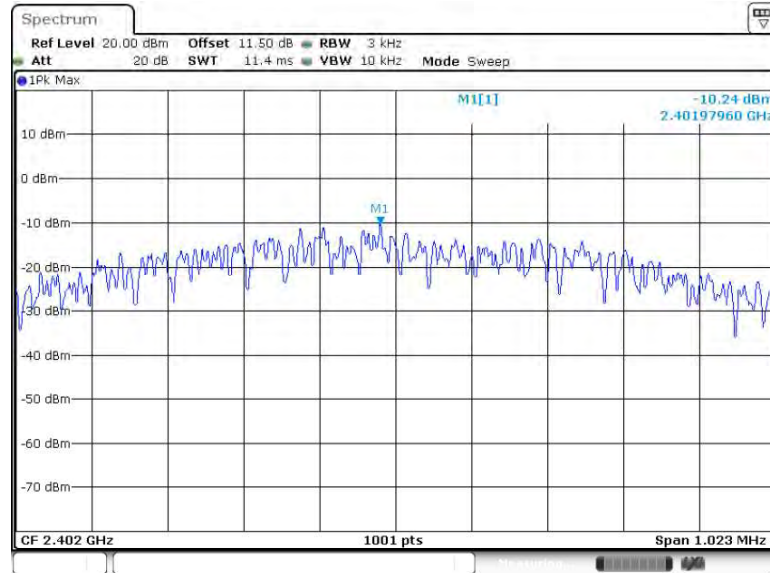

Date: 1.MAY.2022 21:25:33


PSD 3kHz Plot on Channel 19

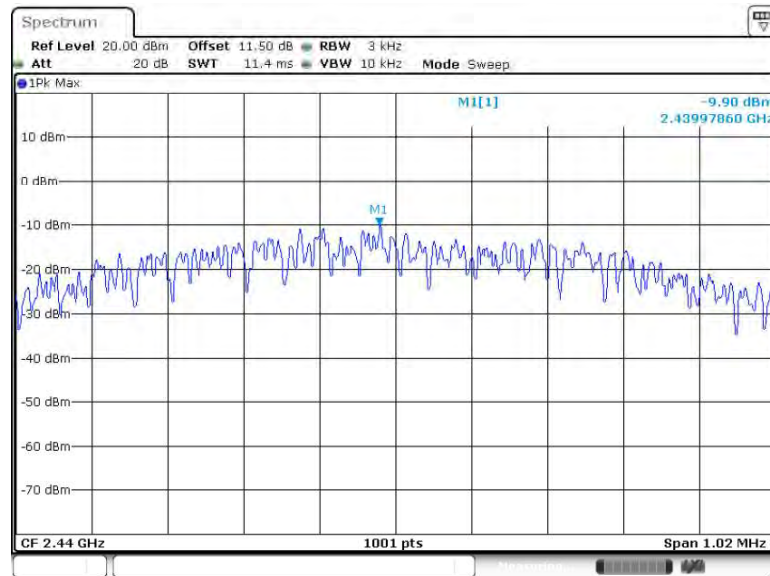

Date: 1.MAY.2022 21:27:42



PSD 3kHz Plot on Channel 39

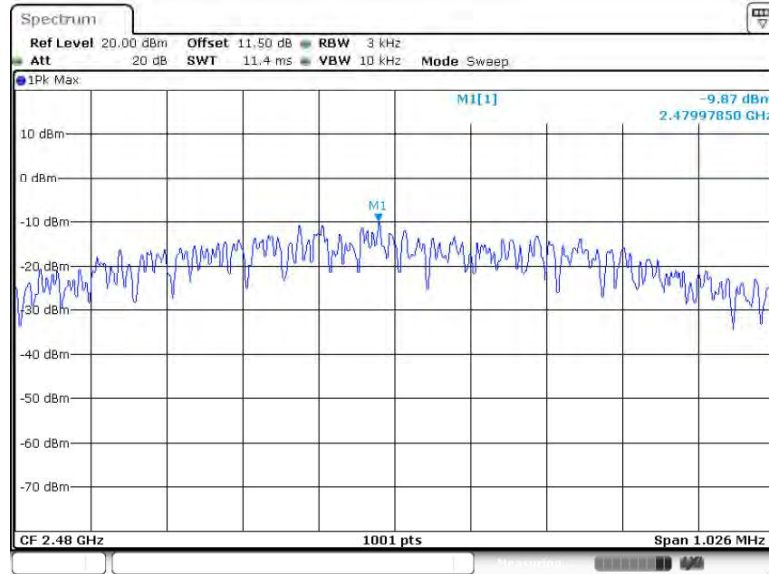


Date: 1 MAY 2022 21:30:02




Bluetooth LE 2Mbps:

PSD 3kHz Plot on Channel 00

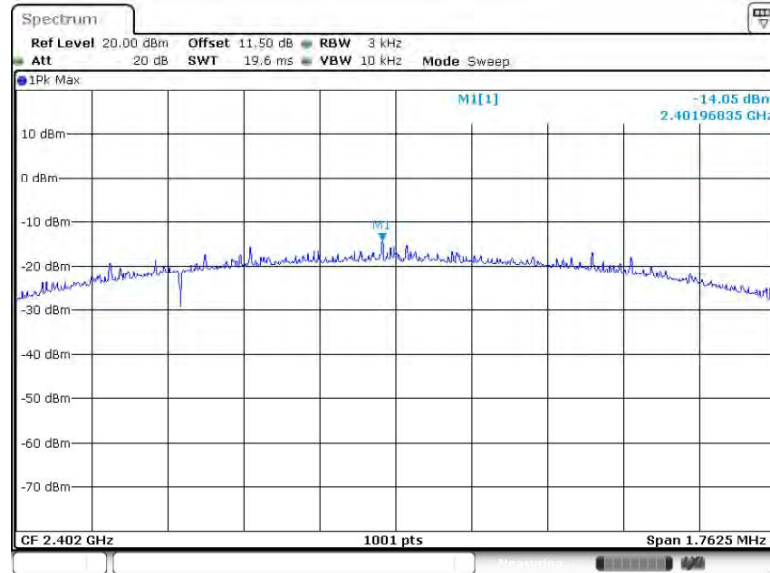

Date: 1.MAY.2022 21:32:43


PSD 3kHz Plot on Channel 19

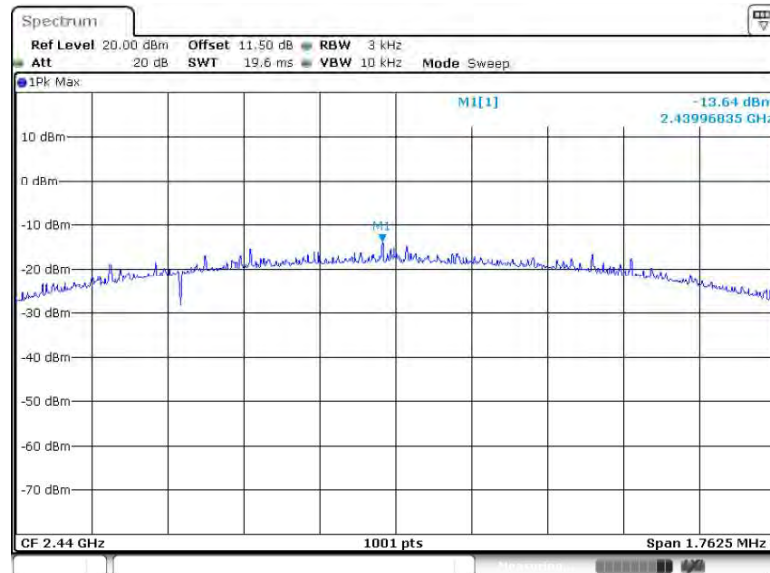

Date: 1.MAY.2022 21:36:13



PSD 3kHz Plot on Channel 39

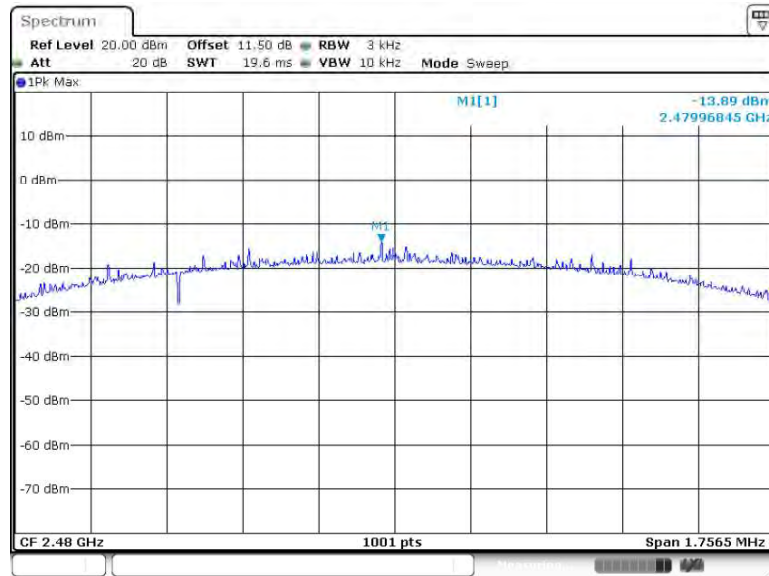

Date: 1 MAY 2022 21:38:05

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup






### 3.4.5 Test Result of Conducted Band Edges Plots


Bluetooth LE 1Mbps:

#### Low Band Edge Plot on Channel 00

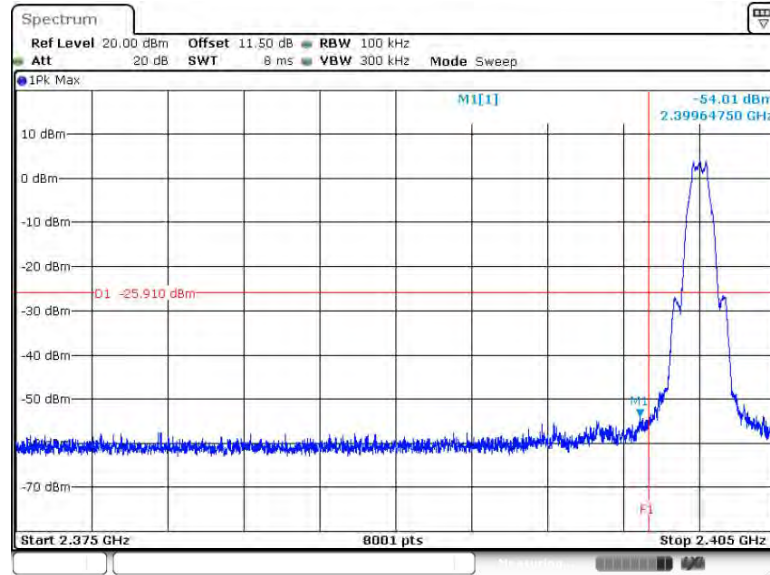

Date: 1.MAY.2022 21:28:06

#### High Band Edge Plot on Channel 39

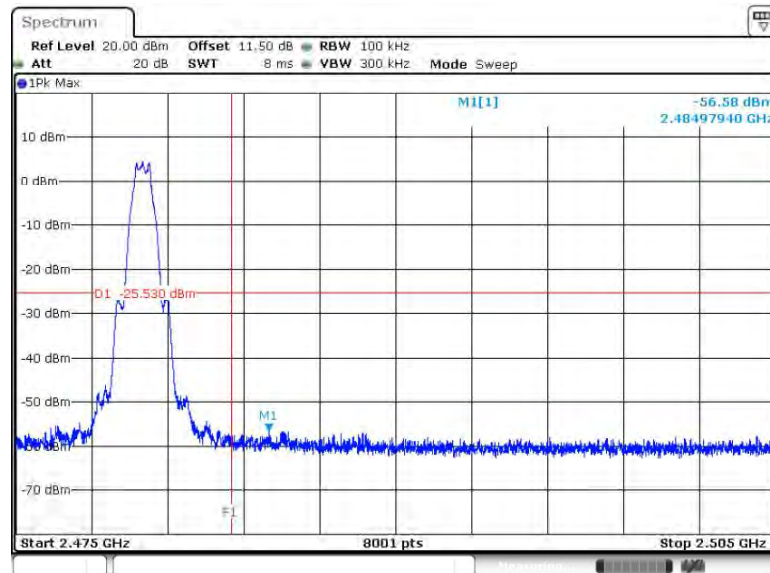


Date: 1.MAY.2022 21:30:41






Bluetooth LE 2Mbps:

Low Band Edge Plot on Channel 00

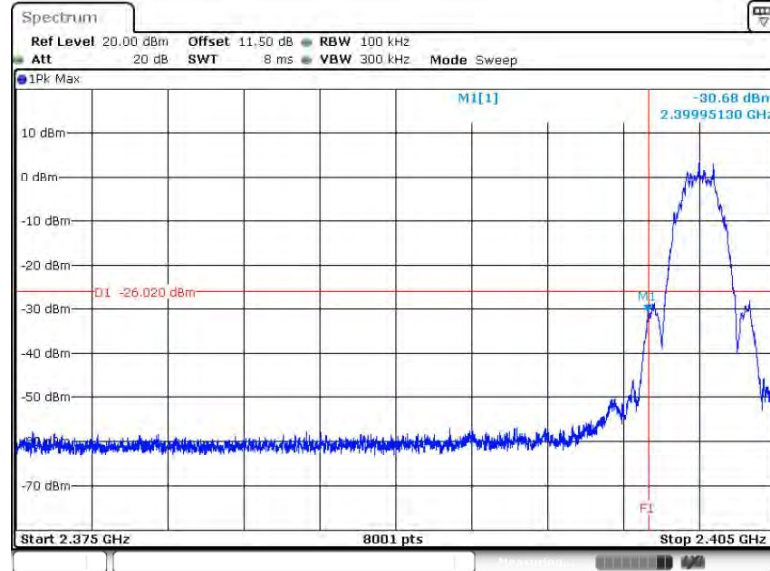

Date: 1.MAY.2022 21:33:52

High Band Edge Plot on Channel 39

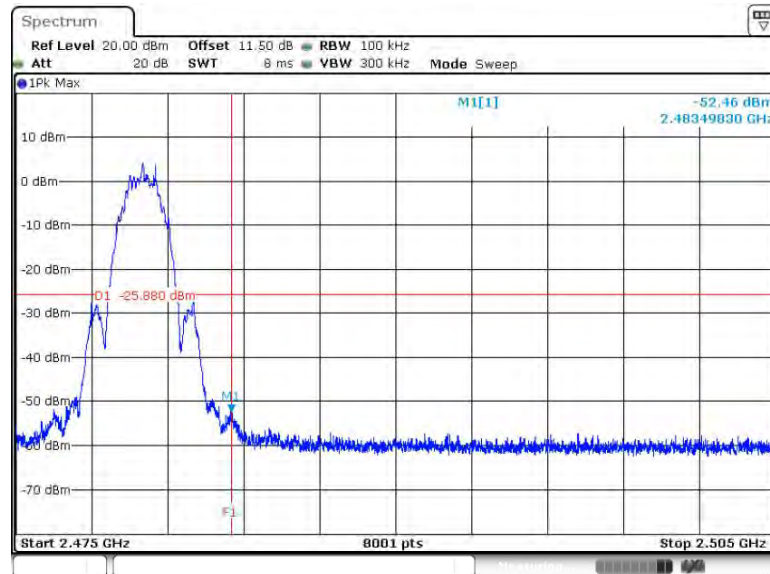


Date: 1.MAY.2022 21:38:26



### 3.4.6 Test Result of Conducted Spurious Emission Plots


Bluetooth LE 1Mbps:

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

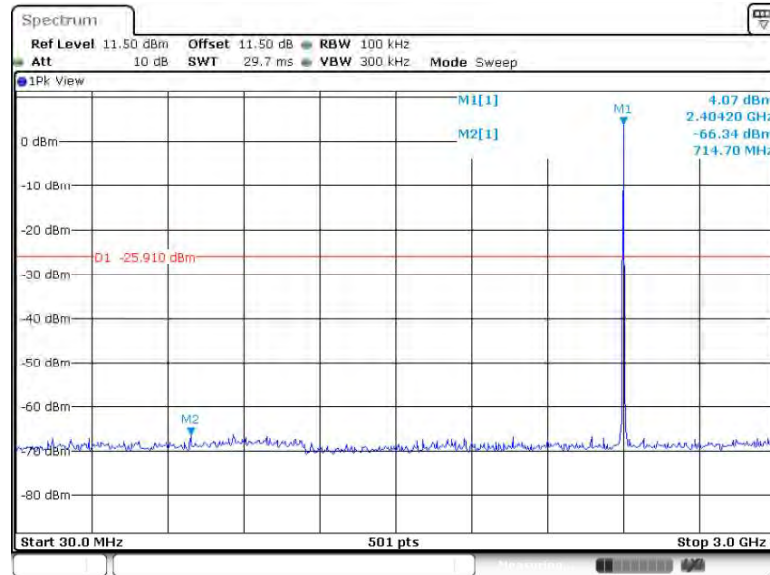

Date: 1.MAY.2022 21:26:19


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

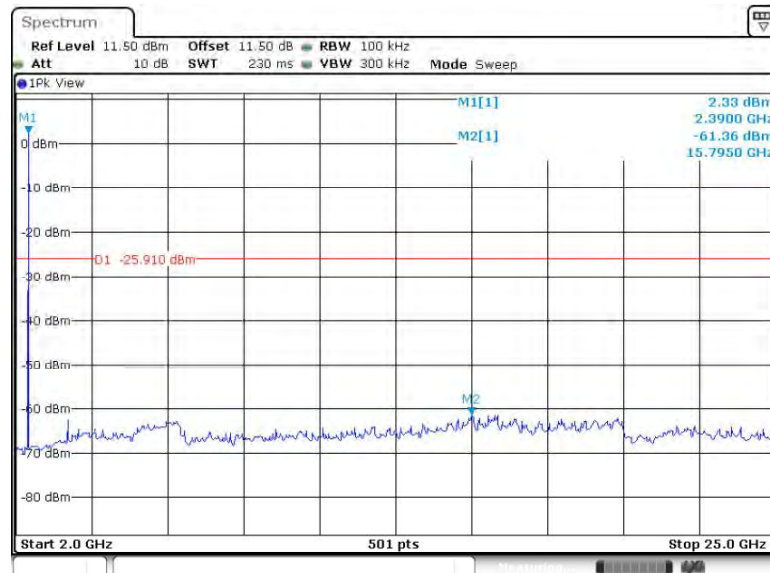

Date: 1.MAY.2022 21:26:29




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

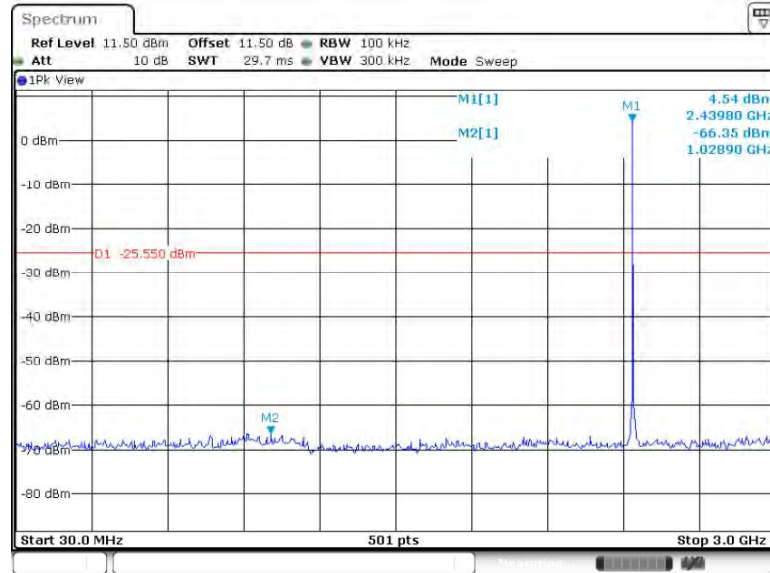

Date: 1.MAY.2022 21:28:41


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

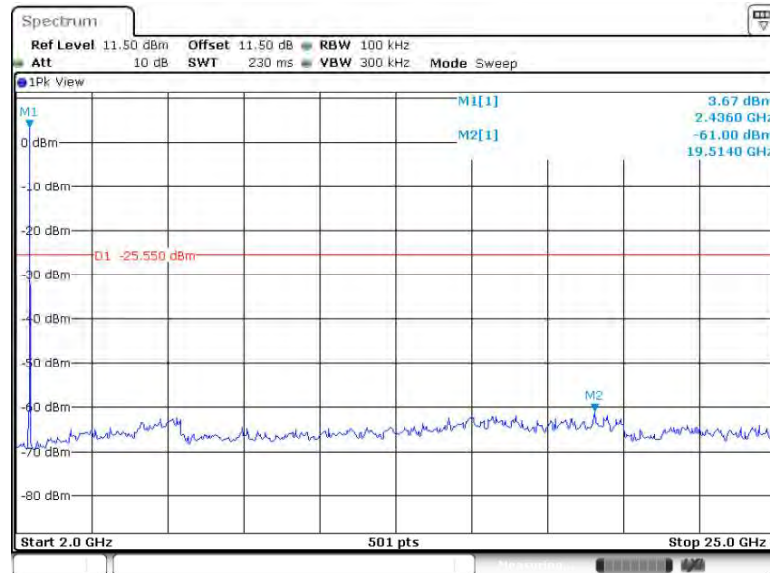

Date: 1.MAY.2022 21:28:51




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

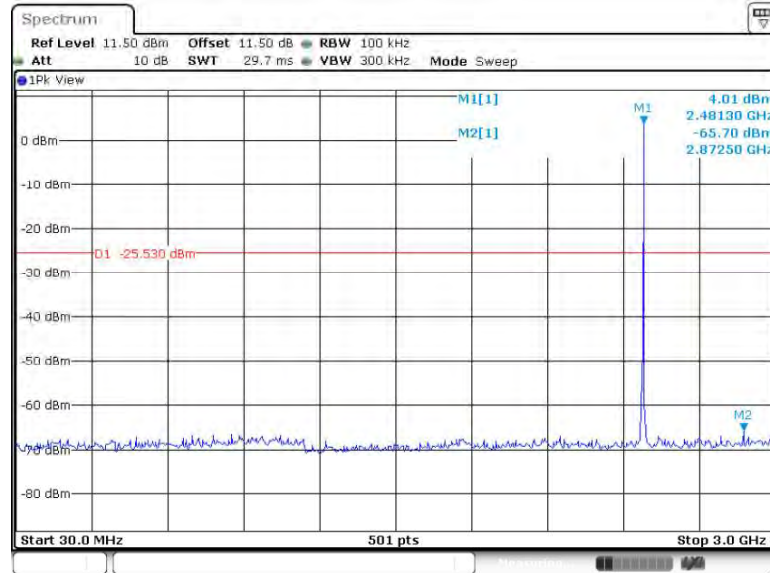

Date: 1.MAY.2022 21:30:54

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

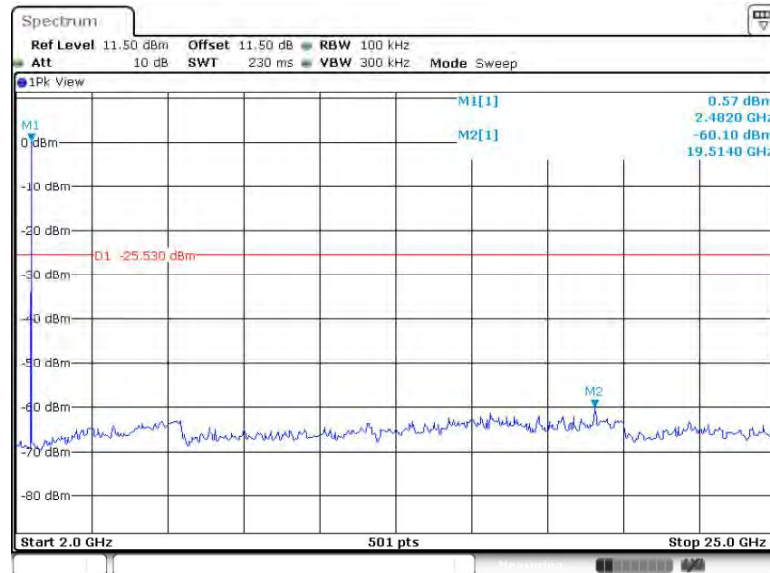


Date: 1.MAY.2022 21:31:05




Bluetooth LE 2Mbps:

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

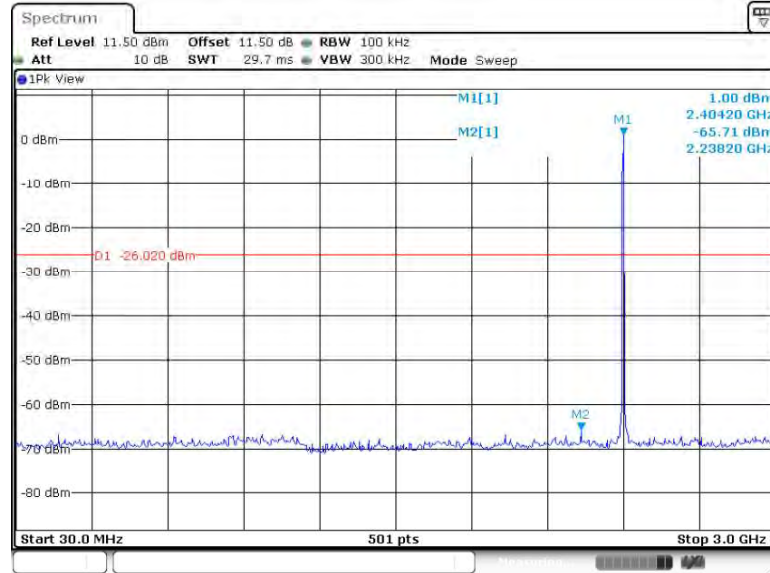

Date: 1.MAY.2022 21:34:34


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

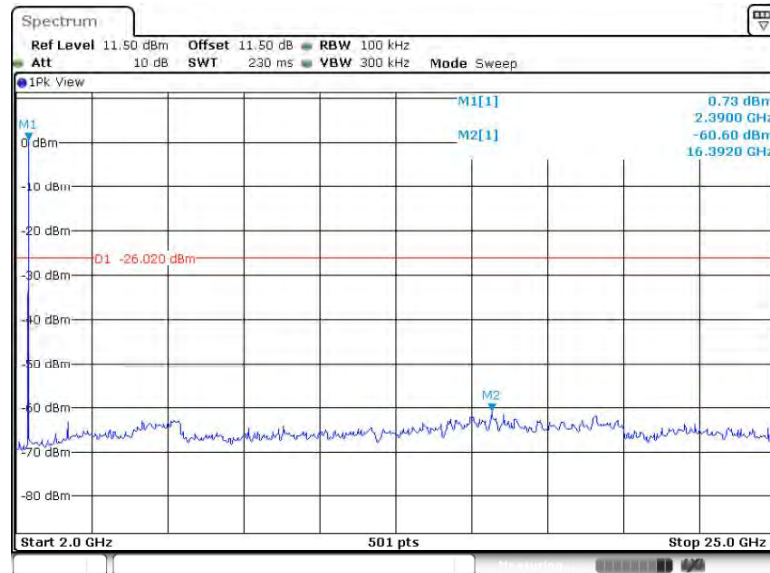

Date: 1.MAY.2022 21:34:44




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

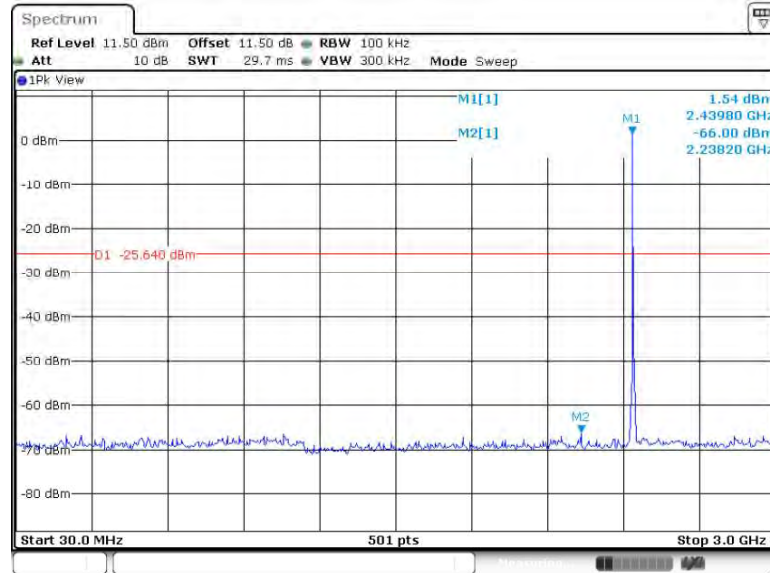

Date: 1.MAY.2022 21:36:35


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps  
GFSK Channel 19

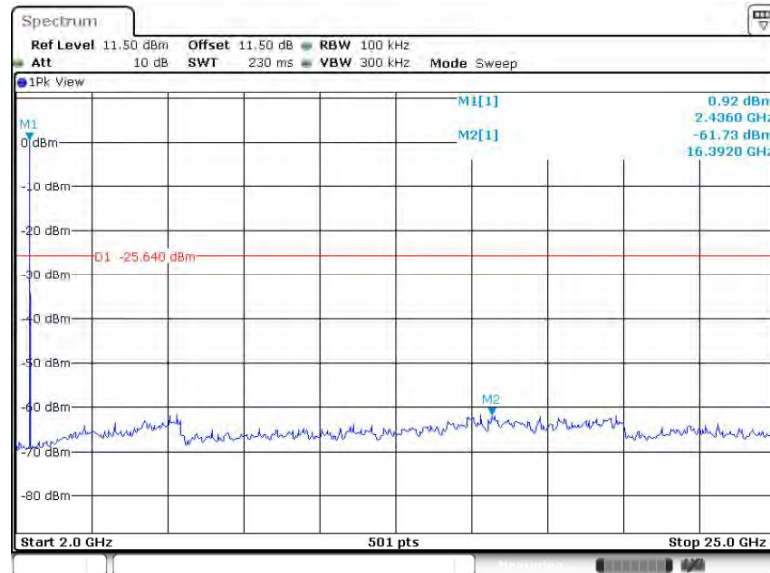

Date: 1.MAY.2022 21:36:47




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

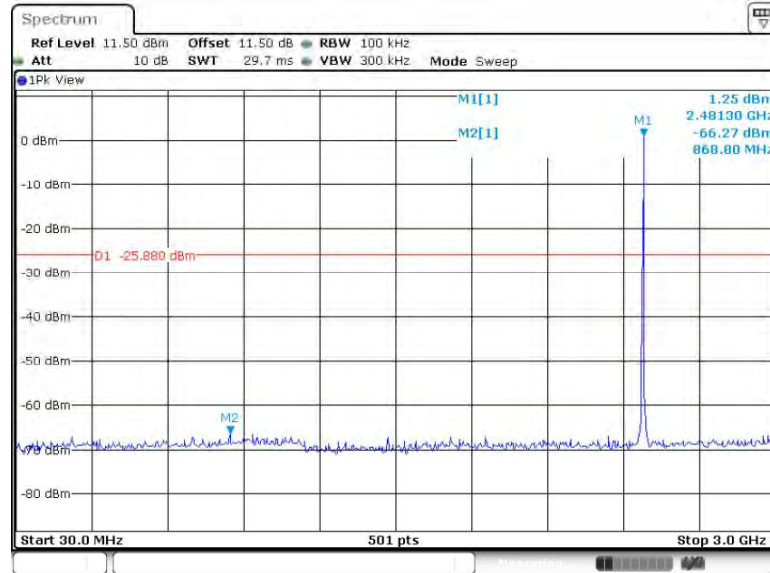

Date: 1.MAY.2022 21:38:42

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

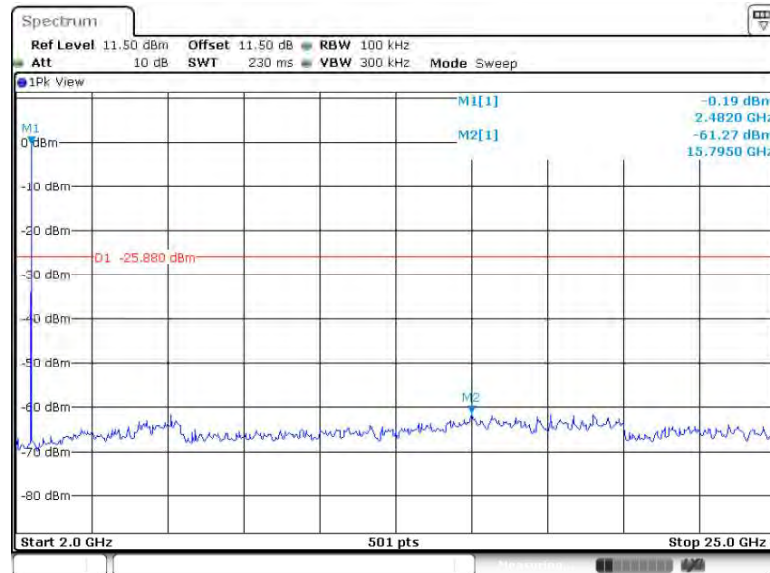

Date: 1.MAY.2022 21:38:52



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.






### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

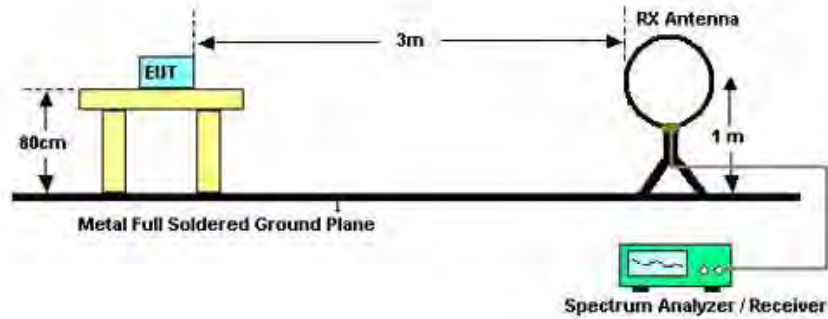

For radiated emissions from 30MHz to 1GHz

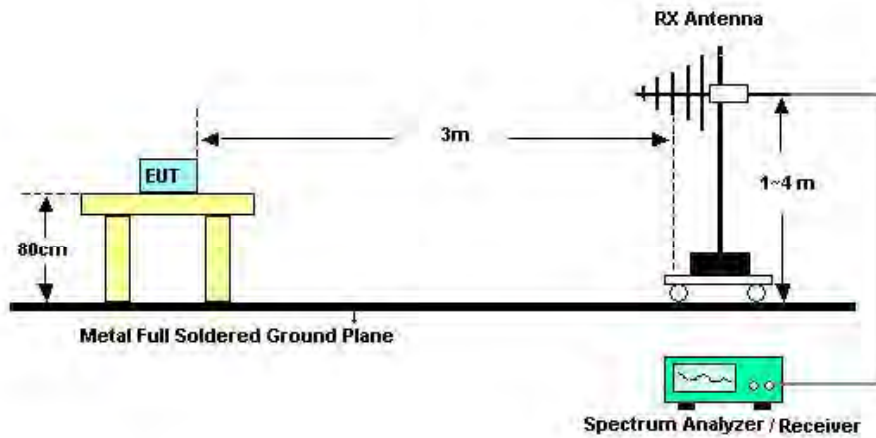

For radiated emissions above 1GHz

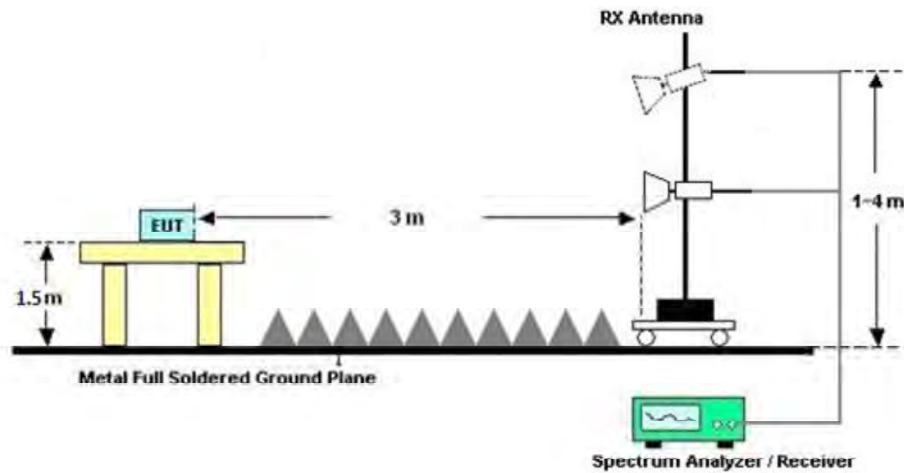



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C&D.

### **3.5.7 Duty Cycle**

Please refer to Appendix E.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C&D.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

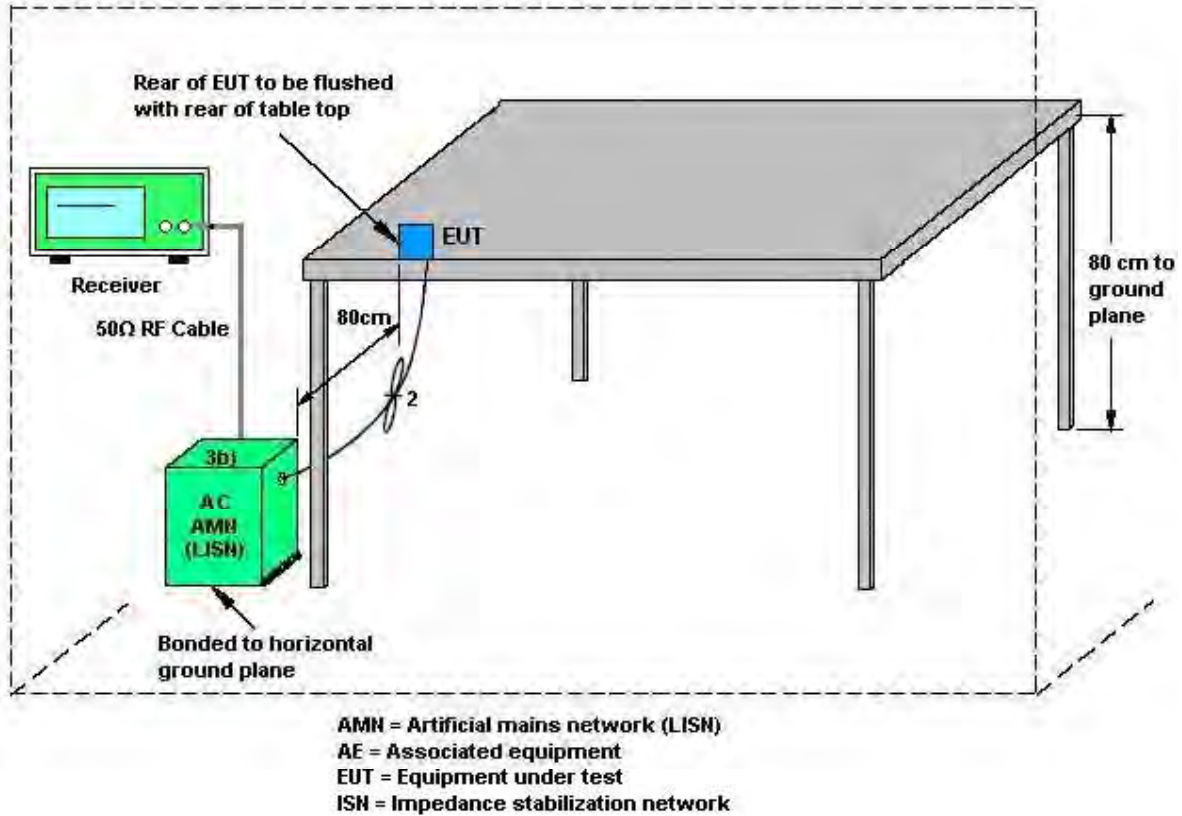

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	May 01, 2022	Apr. 08, 2023	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	May 01, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	May 01, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 14, 2021	Jul. 07, 2022	Jul. 13, 2022	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2022	Jul. 07, 2022	Jun. 21, 2023	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	Jul. 07, 2022	Sep. 27, 2022	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 18, 2021	Jul. 07, 2022	Jul. 18, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 13, 2021	Jul. 07, 2022	Jul. 13, 2022	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 10, 2022	Jul. 07, 2022	Apr. 10, 2023	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 22, 2021	Jul. 07, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Jul. 07, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 22, 2021	Jul. 07, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002470	N/A	NCR	Jul. 07, 2022	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jul. 07, 2022	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jul. 07, 2022	NCR	Radiation (03CH02-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 14, 2021	Jul. 07, 2022	Jul. 13, 2022	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Sep. 01, 2021	Jul. 14, 2022	Aug. 31, 2022	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 01, 2021	Jul. 14, 2022	Aug. 31, 2022	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 29, 2021	Jul. 14, 2022	Oct. 28, 2022	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 14, 2022	Jul. 14, 2022	Jul. 13, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %
Conducted Power Spectral Density	±1.32 dB

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

----- THE END -----





## **Appendix A. Conducted Test Results**

## Appendix A. Test Result of Conducted Test Items

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2022/5/1	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.033	0.682	0.50	Pass
BLE	1Mbps	1	19	2440	1.033	0.680	0.50	Pass
BLE	1Mbps	1	39	2480	1.033	0.684	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.12	4.60	30.00	4.00	8.60	36.00	Pass
BLE	1Mbps	1	19	2440	2.12	4.90	30.00	4.00	8.90	36.00	Pass
BLE	1Mbps	1	39	2480	2.12	4.90	30.00	4.00	8.90	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	4.09	-10.24	4.00	8.00	Pass
BLE	1Mbps	1	19	2440	4.45	-9.90	4.00	8.00	Pass
BLE	1Mbps	1	39	2480	4.47	-9.87	4.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Zhang Xue Yi	Temperature:	21~25	°C
Test Date:	2022/5/1	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.054	1.175	0.50	Pass
BLE	2Mbps	1	19	2440	2.054	1.175	0.50	Pass
BLE	2Mbps	1	39	2480	2.058	1.171	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.44	4.50	30.00	4.00	8.50	36.00	Pass
BLE	2Mbps	1	19	2440	2.44	4.80	30.00	4.00	8.80	36.00	Pass
BLE	2Mbps	1	39	2480	2.44	4.80	30.00	4.00	8.80	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**


Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	3.98	-14.05	4.00	8.00	Pass
BLE	2Mbps	1	19	2440	4.36	-13.64	4.00	8.00	Pass
BLE	2Mbps	1	39	2480	4.12	-13.89	4.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Zhang Tao	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

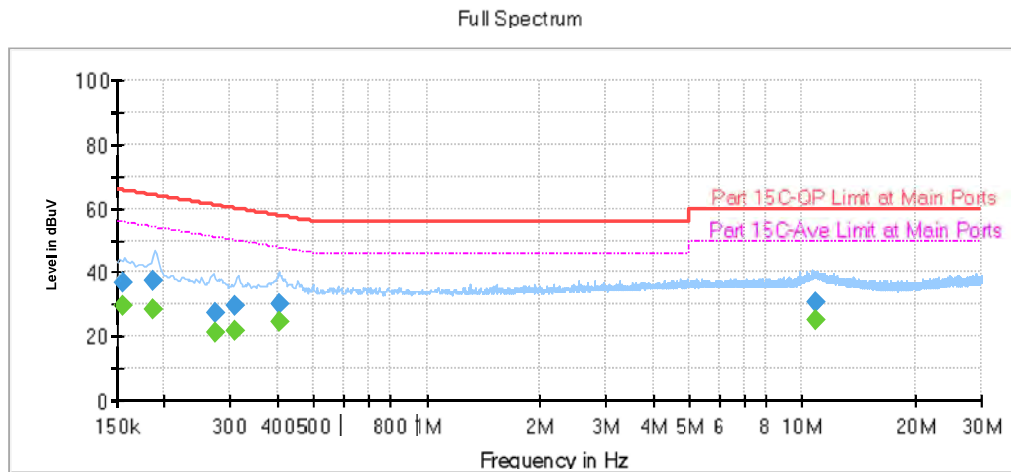


### Final Result

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.155400	36.92	---	65.71	28.78	L1	OFF	19.7
0.155400	---	29.64	55.71	26.07	L1	OFF	19.7
0.186000	37.62	---	64.21	26.59	L1	OFF	19.7
0.186000	---	28.43	54.21	25.78	L1	OFF	19.7
0.273750	27.31	---	61.00	33.70	L1	OFF	19.7
0.273750	---	21.38	51.00	29.63	L1	OFF	19.7
0.309750	29.77	---	59.98	30.20	L1	OFF	19.7
0.309750	---	21.78	49.98	28.19	L1	OFF	19.7
0.406500	29.95	---	57.72	27.77	L1	OFF	19.7
0.406500	---	24.32	47.72	23.40	L1	OFF	19.7
10.849650	30.51	---	60.00	29.49	L1	OFF	20.0
10.849650	---	25.14	50.00	24.86	L1	OFF	20.0



Test Engineer :	Zhang Tao	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

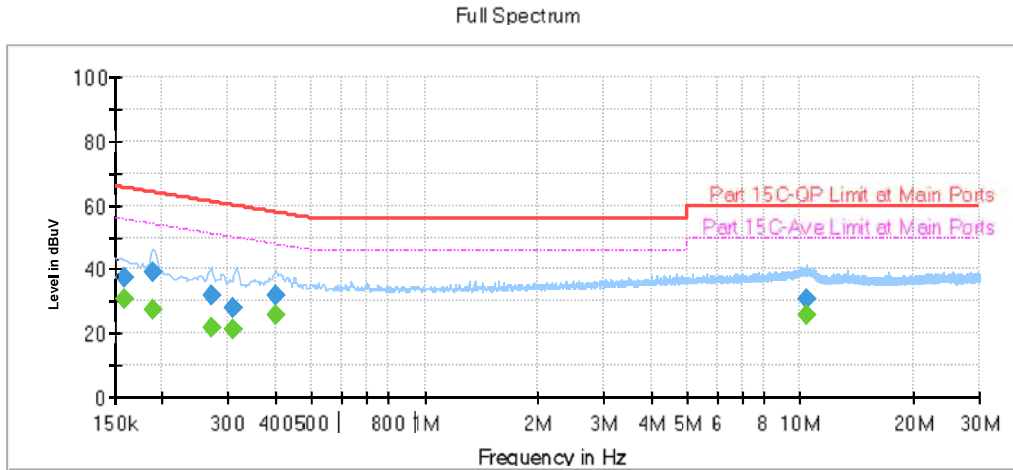

### Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	37.35	---	65.52	28.17	N	OFF	19.7
0.159000	---	30.80	55.52	24.72	N	OFF	19.7
0.188070	39.31	---	64.12	24.81	N	OFF	19.7
0.188070	---	27.33	54.12	26.79	N	OFF	19.7
0.269430	31.79	---	61.14	29.34	N	OFF	19.7
0.269430	---	21.96	51.14	29.17	N	OFF	19.7
0.309750	27.91	---	59.98	32.07	N	OFF	19.7
0.309750	---	21.30	49.98	28.68	N	OFF	19.7
0.401460	31.67	---	57.82	26.16	N	OFF	19.7
0.401460	---	25.86	47.82	21.96	N	OFF	19.7
10.349250	30.72	---	60.00	29.28	N	OFF	20.0
10.349250	---	25.51	50.00	24.49	N	OFF	20.0



## Appendix C. Radiated Spurious Emission

<Bluetooth LE 1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dB $\mu$ V/m )	( dB )	( dB $\mu$ V/m )	( dB $\mu$ V )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2339.08	50.36	-23.64	74	45.43	31.7	5.49	32.26	244	66	P	H
		2378.56	41.31	-12.69	54	36.33	31.7	5.53	32.25	244	66	A	H
	*	2402	98.32	-	-	93.31	31.7	5.55	32.24	244	66	P	H
	*	2402	97.48	-	-	92.47	31.7	5.55	32.24	244	66	A	H
		2348.74	51.27	-22.73	74	46.34	31.7	5.49	32.26	111	259	P	V
		2385.70	41.45	-12.55	54	36.45	31.7	5.55	32.25	111	259	A	V
	*	2402	97.5	-	-	92.49	31.7	5.55	32.24	111	259	P	V
	*	2402	96.55	-	-	91.54	31.7	5.55	32.24	111	259	A	V
BLE CH 19 2440MHz		2362.92	50.18	-23.82	74	45.23	31.7	5.51	32.26	100	187	P	H
		2377.76	41.2	-12.8	54	36.22	31.7	5.53	32.25	100	187	A	H
	*	2440	97.91	-	-	92.44	32	5.61	32.14	100	187	P	H
	*	2440	96.91	-	-	91.44	32	5.61	32.14	100	187	A	H
		2496.64	50.71	-23.29	74	44.78	32.1	5.68	31.85	100	187	P	H
		2485.37	42.12	-11.88	54	36.34	32.07	5.66	31.95	100	187	A	H
		2360.68	50.56	-23.44	74	45.61	31.7	5.51	32.26	100	281	P	V
		2368.52	40.96	-13.04	54	35.98	31.7	5.53	32.25	100	281	A	V
	*	2440	98.41	-	-	92.94	32	5.61	32.14	100	281	P	V
	*	2440	97.46	-	-	91.99	32	5.61	32.14	100	281	A	V
		2493.14	50.92	-23.08	74	44.99	32.1	5.68	31.85	100	281	P	V
		2497.27	42.11	-11.89	54	36.18	32.1	5.68	31.85	100	281	A	V



BLE CH 39 2480MHz	*	2480	96.62	-	-	90.84	32.07	5.66	31.95	100	180	P	H
	*	2480	95.77	-	-	89.99	32.07	5.66	31.95	100	180	A	H
		2498.56	51.11	-22.89	74	45.18	32.1	5.68	31.85	100	180	P	H
		2488.88	42.11	-11.89	54	36.28	32.1	5.68	31.95	100	180	A	H
	*	2480	98.34	-	-	92.56	32.07	5.66	31.95	100	294	P	V
	*	2480	95.52	-	-	89.74	32.07	5.66	31.95	100	294	A	V
		2486.6	51.64	-22.36	74	45.86	32.07	5.66	31.95	100	294	P	V
		2487.96	42.13	-11.87	54	36.3	32.1	5.68	31.95	100	294	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	41.59	-32.41	74	57.01	33.8	8.68	57.9	-	-	P	H
		4804	41.59	-32.41	74	57.01	33.8	8.68	57.9	-	-	P	V
BLE CH 19 2440MHz		4880	42.78	-31.22	74	58.16	33.73	8.79	57.9	-	-	P	H
		7320	45.73	-28.27	74	58.43	35.73	11.09	59.52	-	-	P	H
		4880	43.64	-30.36	74	59.02	33.73	8.79	57.9	-	-	P	V
		7320	45.53	-28.47	74	58.23	35.73	11.09	59.52	-	-	P	V
BLE CH 39 2480MHz		4960	42.2	-31.8	74	57.39	33.73	8.98	57.9	-	-	P	H
		7440	45.13	-28.87	74	58.09	35.78	11.12	59.86	-	-	P	H
		4960	44.4	-29.6	74	59.59	33.73	8.98	57.9	-	-	P	V
		7440	45.98	-28.02	74	58.94	35.78	11.12	59.86	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



<Bluetooth LE 2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		2342.65	51.84	-22.16	74	46.91	31.7	5.49	32.26	100	360	P	H
		2388.43	40.75	-13.25	54	35.75	31.7	5.55	32.25	100	360	A	H
	*	2402	95.61	-	-	90.6	31.7	5.55	32.24	100	360	P	H
	*	2402	93.21	-	-	88.2	31.7	5.55	32.24	100	360	A	H
		2380.66	50.92	-23.08	74	45.94	31.7	5.53	32.25	100	290	P	V
		2389.06	40.82	-13.18	54	35.82	31.7	5.55	32.25	100	290	A	V
	*	2402	98.59	-	-	93.58	31.7	5.55	32.24	100	290	P	V
	*	2402	95.92	-	-	90.91	31.7	5.55	32.24	100	290	A	V
BLE CH 19 2440MHz		2361.66	50.82	-23.18	74	45.87	31.7	5.51	32.26	100	183	P	H
		2379.44	40.32	-13.68	54	35.34	31.7	5.53	32.25	100	183	A	H
	*	2440	98.55	-	-	93.08	32	5.61	32.14	100	183	P	H
	*	2440	96.5	-	-	91.03	32	5.61	32.14	100	183	A	H
		2491.11	51.49	-22.51	74	45.66	32.1	5.68	31.95	100	183	P	H
		2496.43	41.23	-12.77	54	35.3	32.1	5.68	31.85	100	183	A	H
		2353.54	52.16	-21.84	74	47.21	31.7	5.51	32.26	100	295	P	V
		2372.02	40.44	-13.56	54	35.46	31.7	5.53	32.25	100	295	A	V
	*	2440	98.9	-	-	93.43	32	5.61	32.14	100	295	P	V
	*	2440	95.08	-	-	89.61	32	5.61	32.14	100	295	A	V
		2486.91	50.86	-23.14	74	45.08	32.07	5.66	31.95	100	295	P	V
		2491.04	41.21	-12.79	54	35.38	32.1	5.68	31.95	100	295	A	V





BLE CH 39 2480MHz	*	2480	96.29	-	-	90.51	32.07	5.66	31.95	100	360	P	H
	*	2480	93.15	-	-	87.37	32.07	5.66	31.95	100	360	A	H
		2484.96	52.14	-21.86	74	46.36	32.07	5.66	31.95	100	360	P	H
		2483.6	42.79	-11.21	54	37.01	32.07	5.66	31.95	100	360	A	H
	*	2480	97.85	-	-	92.07	32.07	5.66	31.95	100	290	P	V
	*	2480	95.57	-	-	89.79	32.07	5.66	31.95	100	290	A	V
		2486.44	53.04	-20.96	74	47.26	32.07	5.66	31.95	100	290	P	V
		2483.52	43.38	-10.62	54	37.6	32.07	5.66	31.95	100	290	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz**  
**BLE (Harmonic @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dB $\mu$ V/m )	Margin ( dB )	Limit Line ( dB $\mu$ V/m )	Read Level ( dB $\mu$ V )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	41.2	-32.8	74	56.62	33.8	8.68	57.9	-	-	P	H
		4804	42.37	-31.63	74	57.79	33.8	8.68	57.9	-	-	P	V
BLE CH 19 2440MHz		4880	41.95	-32.05	74	57.33	33.73	8.79	57.9	-	-	P	H
		7320	44.59	-29.41	74	57.29	35.73	11.09	59.52	-	-	P	H
		4880	41.95	-32.05	74	57.33	33.73	8.79	57.9	-	-	P	V
		7320	45.25	-28.75	74	57.95	35.73	11.09	59.52	-	-	P	V
BLE CH 39 2480MHz		4960	42.61	-31.39	74	57.8	33.73	8.98	57.9	-	-	P	H
		7440	44.66	-29.34	74	57.62	35.78	11.12	59.86	-	-	P	H
		4960	42.66	-31.34	74	57.85	33.73	8.98	57.9	-	-	P	V
		7440	44.82	-29.18	74	57.78	35.78	11.12	59.86	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2480	95.07	-	-	89.29	32.07	5.66	31.95	100	205	P	H
		2480	92.83	-	-	87.05	32.07	5.66	31.95	100	205	A	H
	*	2493.08	53.15	-20.85	74	47.22	32.1	5.68	31.85	100	205	P	H
	*	2483.52	42.2	-11.8	54	36.42	32.07	5.66	31.95	100	205	A	H
		2480	99.92	-	-	94.14	32.07	5.66	31.95	254	255	P	V
		2480	97.25	-	-	91.47	32.07	5.66	31.95	254	255	A	V
	*	2484.96	53.09	-20.91	74	47.31	32.07	5.66	31.95	254	255	P	V
	*	2483.52	43.47	-10.53	54	37.69	32.07	5.66	31.95	254	255	A	V

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 39 2480MHz		4960	43.56	-30.44	74	58.75	33.73	8.98	57.9	-	-	P	H
		7440	45.45	-28.55	74	58.41	35.78	11.12	59.86	-	-	P	H
		4960	43.2	-30.8	74	58.39	33.73	8.98	57.9	-	-	P	V
		7440	44.74	-29.26	74	57.7	35.78	11.12	59.86	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
2.4GHz BLE LF		89.17	20.04	-23.46	43.5	40.2	14.04	0.98	35.18	-	-	P	H
		196.84	23.73	-19.77	43.5	40.87	16.51	1.45	35.1	-	-	P	H
		317.12	25.19	-20.81	46	38.06	20.15	1.88	34.9	-	-	P	H
		681.84	25.57	-20.43	46	30.57	26.67	2.83	34.5	-	-	P	H
		828.31	27.62	-18.38	46	30.34	28.42	3.16	34.3	-	-	P	H
		974.78	29.12	-24.88	54	29.85	29.99	3.43	34.15	-	-	P	H
		36.79	27.86	-12.14	40	42.84	19.38	0.64	35	-	-	P	V
		196.84	29.01	-14.49	43.5	46.15	16.51	1.45	35.1	-	-	P	V
		332.64	23.29	-22.71	46	35.64	20.63	1.92	34.9	-	-	P	V
		512.09	24.04	-21.96	46	32.19	24.1	2.43	34.68	-	-	P	V
		842.86	28.45	-17.55	46	30.99	28.57	3.19	34.3	-	-	P	V
	988.36	29.84	-24.16	54	30.37	30.13	3.46	34.12	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>Margin</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix D. Radiated Spurious Emission Plots

### Note symbol





-L	Low channel location
-R	High channel location







<Bluetooth LE 1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																															
ANT	BLE CH00 2402MHz																																																															
1	Horizontal	Fundamental																																																														
Peak	 <p>Site: C3CH02-S2            Condition: PEAK, 3m, 3m HF, ANT_3117_3107 HORIZONTAL            Project: 1D0934-01            Mode: 4            IMI: #07 G00020032165001H            Plane: 1-Path-Accuracy            62/2</p> <table border="1"> <thead> <tr> <th>Frqs</th> <th>Level</th> <th>LI401</th> <th>LI402</th> <th>Residual</th> <th>Calc</th> <th>Prism</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2396.89</td> <td>56.18</td> <td>-23.04</td> <td>74.89</td> <td>43.43</td> <td>31.79</td> <td>3.48</td> <td>32.26</td> <td>244</td> <td>no overlap</td> </tr> </tbody> </table>	Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB		1	2396.89	56.18	-23.04	74.89	43.43	31.79	3.48	32.26	244	no overlap	 <p>Site: C3CH02-S2            Condition: PEAK, 3m, 3m HF, ANT_3117_3107 HORIZONTAL            Project: 1D0934-01            Mode: 4            IMI: #07 G00020032165001H            Plane: 1-Path-Accuracy            62/2</p> <table border="1"> <thead> <tr> <th>Frqs</th> <th>Level</th> <th>LI401</th> <th>LI402</th> <th>Residual</th> <th>Calc</th> <th>Prism</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2443.89</td> <td>56.12</td> <td>24.30</td> <td>74.89</td> <td>53.31</td> <td>31.79</td> <td>3.35</td> <td>32.24</td> <td>244</td> <td>no overlap</td> </tr> </tbody> </table>	Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB		1	2443.89	56.12	24.30	74.89	53.31	31.79	3.35	32.24	244	no overlap
Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark																																																							
MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB																																																								
1	2396.89	56.18	-23.04	74.89	43.43	31.79	3.48	32.26	244	no overlap																																																						
Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark																																																							
MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB																																																								
1	2443.89	56.12	24.30	74.89	53.31	31.79	3.35	32.24	244	no overlap																																																						
Avg.	 <p>Site: C3CH02-S2            Condition: AVG, 54, 3m HF, ANT_3117_3107 HORIZONTAL            Project: 1D0934-01            Mode: 4            IMI: #07 G00020032165001H            Plane: 1-Path-Accuracy            62/2</p> <table border="1"> <thead> <tr> <th>Frqs</th> <th>Level</th> <th>LI401</th> <th>LI402</th> <th>Residual</th> <th>Calc</th> <th>Prism</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2379.37</td> <td>41.41</td> <td>-12.89</td> <td>54.89</td> <td>36.51</td> <td>31.79</td> <td>3.33</td> <td>32.25</td> <td>244</td> <td>no overlap</td> </tr> </tbody> </table>	Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB		1	2379.37	41.41	-12.89	54.89	36.51	31.79	3.33	32.25	244	no overlap	 <p>Site: C3CH02-S2            Condition: AVG, 54, 3m HF, ANT_3117_3107 HORIZONTAL            Project: 1D0934-01            Mode: 4            IMI: #07 G00020032165001H            Plane: 1-Path-Accuracy            62/2</p> <table border="1"> <thead> <tr> <th>Frqs</th> <th>Level</th> <th>LI401</th> <th>LI402</th> <th>Residual</th> <th>Calc</th> <th>Prism</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2443.89</td> <td>57.43</td> <td>41.48</td> <td>54.89</td> <td>52.47</td> <td>31.79</td> <td>3.35</td> <td>32.24</td> <td>244</td> <td>no overlap</td> </tr> </tbody> </table>	Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB		1	2443.89	57.43	41.48	54.89	52.47	31.79	3.35	32.24	244	no overlap
Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark																																																							
MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB																																																								
1	2379.37	41.41	-12.89	54.89	36.51	31.79	3.33	32.25	244	no overlap																																																						
Frqs	Level	LI401	LI402	Residual	Calc	Prism	A/Pos	T/Pos	Remark																																																							
MHz	dBm	dB	dBm	dBm	dB	dB	dB	dB																																																								
1	2443.89	57.43	41.48	54.89	52.47	31.79	3.35	32.24	244	no overlap																																																						





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																									
ANT	BLE CH00 2402MHz																																									
1	Vertical	Fundamental																																								
Peak	 <p>Site : 03CH02 S2 Condition : RFCA_76.3m HF ANT_3117 0101 VERTICAL Project : 020524-01 Mode : Mode 4 RF1 : #67-G0000003216600TH Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Limit Factor</th> <th>Limit Factor</th> <th>Att/Freq</th> <th>1/Freq</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.72</td> <td>51.47</td> <td>-22.73</td> <td>74.89</td> <td>46.34</td> <td>51.78</td> <td>3.49</td> <td>32.24</td> <td>131</td> <td>259</td> <td>Pass</td> </tr> </tbody> </table>	Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark	1	2384.72	51.47	-22.73	74.89	46.34	51.78	3.49	32.24	131	259	Pass	 <p>Site : 03CH02 S2 Condition : RFCA_76.3m HF ANT_3117 0101 VERTICAL Project : 020524-01 Mode : Mode 4 RF1 : #67-G0000003216600TH Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Limit Factor</th> <th>Limit Factor</th> <th>Att/Freq</th> <th>1/Freq</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2402.89</td> <td>97.89</td> <td>23.19</td> <td>74.89</td> <td>62.46</td> <td>81.79</td> <td>3.35</td> <td>32.24</td> <td>131</td> <td>259</td> <td>Pass</td> </tr> </tbody> </table>	Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark	1 *	2402.89	97.89	23.19	74.89	62.46	81.79	3.35	32.24	131	259	Pass
Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark																																			
1	2384.72	51.47	-22.73	74.89	46.34	51.78	3.49	32.24	131	259	Pass																															
Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark																																			
1 *	2402.89	97.89	23.19	74.89	62.46	81.79	3.35	32.24	131	259	Pass																															
Avg	 <p>Site : 03CH02 S2 Condition : RFCA_76.3m HF ANT_3117 0101 VERTICAL Project : 020524-01 Mode : Mode 4 RF1 : #67-G0000003216600TH Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Limit Factor</th> <th>Limit Factor</th> <th>Att/Freq</th> <th>1/Freq</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2381.72</td> <td>42.41</td> <td>-12.93</td> <td>54.49</td> <td>36.45</td> <td>81.79</td> <td>3.35</td> <td>32.24</td> <td>131</td> <td>259</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark	1	2381.72	42.41	-12.93	54.49	36.45	81.79	3.35	32.24	131	259	Average	 <p>Site : 03CH02 S2 Condition : RFCA_76.3m HF ANT_3117 0101 VERTICAL Project : 020524-01 Mode : Mode 4 RF1 : #67-G0000003216600TH Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Limit Factor</th> <th>Limit Factor</th> <th>Att/Freq</th> <th>1/Freq</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2402.89</td> <td>96.81</td> <td>42.55</td> <td>54.49</td> <td>41.24</td> <td>81.79</td> <td>3.35</td> <td>32.24</td> <td>131</td> <td>259</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark	1 *	2402.89	96.81	42.55	54.49	41.24	81.79	3.35	32.24	131	259	Average
Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark																																			
1	2381.72	42.41	-12.93	54.49	36.45	81.79	3.35	32.24	131	259	Average																															
Freq	Level	Limit	Limit Factor	Limit Factor	Att/Freq	1/Freq	Remark																																			
1 *	2402.89	96.81	42.55	54.49	41.24	81.79	3.35	32.24	131	259	Average																															



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																									
ANT	BLE CH19 2440MHz - L																																									
1	Horizontal	Fundamental																																								
Peak	 <p>Site : SICH2-02            Condition : PEAK, 0E, 24.3m HP, ANT, 3117, 0107 HORIZONTAL            RBW 1000.0000Hz, VBW 3000.0000Hz            CARRIER 24.41            Project Name : Jione 2            Mode : #01F0020032165000H            RBW : Y with Accessory            Plane : 0202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Lim1</th> <th>Lim2</th> <th>ReadoutName</th> <th>Calc1 Param</th> <th>Al/Pos</th> <th>1/Pos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2343.82</td> <td>18.18</td> <td>-33.42</td> <td>24.46</td> <td>45.13</td> <td>51.79</td> <td>7.51</td> <td>52.25</td> <td>386</td> <td>387</td> <td>Peak</td> </tr> </tbody> </table>	Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark	1	2343.82	18.18	-33.42	24.46	45.13	51.79	7.51	52.25	386	387	Peak	 <p>Site : SICH2-02            Condition : PEAK, 24.3m HP, ANT, 3117, 0107 HORIZONTAL            RBW 1000.0000Hz, VBW 3000.0000Hz            CARRIER 24.41            Project Name : Jione 2            Mode : #01F0020032165000H            RBW : Y with Accessory            Plane : 0202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Lim1</th> <th>Lim2</th> <th>ReadoutName</th> <th>Calc1 Param</th> <th>Al/Pos</th> <th>1/Pos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>01.02</td> <td>23.93</td> <td>24.46</td> <td>42.44</td> <td>52.89</td> <td>7.41</td> <td>52.14</td> <td>386</td> <td>387</td> <td>Peak</td> </tr> </tbody> </table>	Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark	1	2440.00	01.02	23.93	24.46	42.44	52.89	7.41	52.14	386	387	Peak
Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark																																			
1	2343.82	18.18	-33.42	24.46	45.13	51.79	7.51	52.25	386	387	Peak																															
Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark																																			
1	2440.00	01.02	23.93	24.46	42.44	52.89	7.41	52.14	386	387	Peak																															
Avg.	 <p>Site : SICH2-02            Condition : AVG, 0E, 24.3m HP, ANT, 3117, 0107 HORIZONTAL            RBW 1000.0000Hz, VBW 3000.0000Hz            CARRIER 24.41            Project Name : Jione 2            Mode : #01F0020032165000H            RBW : Y with Accessory            Plane : 0202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Lim1</th> <th>Lim2</th> <th>ReadoutName</th> <th>Calc1 Param</th> <th>Al/Pos</th> <th>1/Pos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2375.76</td> <td>43.28</td> <td>-32.09</td> <td>24.46</td> <td>26.22</td> <td>51.79</td> <td>7.51</td> <td>52.25</td> <td>386</td> <td>387</td> <td>Average</td> </tr> </tbody> </table>	Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark	1	2375.76	43.28	-32.09	24.46	26.22	51.79	7.51	52.25	386	387	Average	 <p>Site : SICH2-02            Condition : AVG, 24.3m HP, ANT, 3117, 0107 HORIZONTAL            RBW 1000.0000Hz, VBW 3000.0000Hz            CARRIER 24.41            Project Name : Jione 2            Mode : #01F0020032165000H            RBW : Y with Accessory            Plane : 0202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Lim1</th> <th>Lim2</th> <th>ReadoutName</th> <th>Calc1 Param</th> <th>Al/Pos</th> <th>1/Pos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>06.95</td> <td>42.92</td> <td>24.46</td> <td>41.94</td> <td>52.89</td> <td>7.41</td> <td>52.14</td> <td>386</td> <td>387</td> <td>Average</td> </tr> </tbody> </table>	Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark	1	2440.00	06.95	42.92	24.46	41.94	52.89	7.41	52.14	386	387	Average
Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark																																			
1	2375.76	43.28	-32.09	24.46	26.22	51.79	7.51	52.25	386	387	Average																															
Freq. Level	Lim1	Lim2	ReadoutName	Calc1 Param	Al/Pos	1/Pos	Remark																																			
1	2440.00	06.95	42.92	24.46	41.94	52.89	7.41	52.14	386	387	Average																															





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 <pre> Site: 130402 02 Condition: PEAK_00_74_3m_HF_ANT_3117_0107_HORIZONTAL RFW: 100.000000Hz VBW: 300.0000Hz FS: 100.000000 Mode: 3 RF1: REF: 0.000000dBm Plane: Y with Accessory S22  Freq Level Limb Limb Level Factor Loss Factor Loss MHz dBm/dBc dB dBm/dBc dBm/dBc dB dBm/dBc dBm/dBc 1: 2440.00 58.71 -23.29 74.89 84.78 12.18 3.08 13.00 389 347 Time           </pre>	Left blank
Avg.	 <pre> Site: 130402 02 Condition: AVG_00_34_3m_HF_ANT_3117_0107_HORIZONTAL RFW: 100.000000Hz VBW: 3.0000Hz FS: 100.000000 Mode: 3 RF1: REF: 0.000000dBm Plane: Y with Accessory S22  Freq Level Limb Limb Level Factor Loss Factor Loss MHz dBm/dBc dB dBm/dBc dBm/dBc dB dBm/dBc dBm/dBc 1: 2440.37 41.12 -11.88 54.49 64.14 11.87 3.08 13.00 389 347 Average           </pre>	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																	
ANT	BLE CH19 2440MHz - L																																																	
1	Vertical	Fundamental																																																
Peak	<p>Site : ECH02 S2            Condition : FREQ: 24.3m HF ANT: 3117 5163 VERTICAL            ResW: 1000.0000Hz VBW: 3000.0000Hz            Project : 12019A-01            Mode : Mode 5            MEI : #RT-CO200203216650TH            Plane : Y with Accessory</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pwr</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2366.62</td> <td>38.76</td> <td>-13.44</td> <td>79.89</td> <td>45.45</td> <td>32.79</td> <td>3.51 32.28 389 201 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark	Freq	Level	Line	Level	Factor	Loss			1	2366.62	38.76	-13.44	79.89	45.45	32.79	3.51 32.28 389 201 Peak	<p>Site : ECH02 S2            Condition : FREQ: 24.3m HF ANT: 3117 5163 VERTICAL            ResW: 1000.0000Hz VBW: 3000.0000Hz            Project : 12019A-01            Mode : Mode 5            MEI : #RT-CO200203216650TH            Plane : Y with Accessory</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pwr</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2440.89</td> <td>95.41</td> <td>-13.41</td> <td>79.89</td> <td>51.34</td> <td>32.89</td> <td>3.51 32.34 389 201 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark	Freq	Level	Line	Level	Factor	Loss			1 *	2440.89	95.41	-13.41	79.89	51.34	32.89	3.51 32.34 389 201 Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor	Loss																																													
1	2366.62	38.76	-13.44	79.89	45.45	32.79	3.51 32.28 389 201 Peak																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor	Loss																																													
1 *	2440.89	95.41	-13.41	79.89	51.34	32.89	3.51 32.34 389 201 Peak																																											
Avg.	<p>Site : ECH02 S2            Condition : FREQ: 24.3m HF ANT: 3117 5163 VERTICAL            ResW: 1000.0000Hz VBW: 3000.0000Hz            Project : 12019A-01            Mode : Mode 5            MEI : #RT-CO200203216650TH            Plane : Y with Accessory</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pwr</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2366.52</td> <td>48.36</td> <td>-13.44</td> <td>79.89</td> <td>35.08</td> <td>31.79</td> <td>3.51 32.29 389 201 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark	Freq	Level	Line	Level	Factor	Loss			1	2366.52	48.36	-13.44	79.89	35.08	31.79	3.51 32.29 389 201 Average	<p>Site : ECH02 S2            Condition : FREQ: 24.3m HF ANT: 3117 5163 VERTICAL            ResW: 1000.0000Hz VBW: 3000.0000Hz            Project : 12019A-01            Mode : Mode 5            MEI : #RT-CO200203216650TH            Plane : Y with Accessory</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pwr</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>2440.99</td> <td>97.48</td> <td>-13.40</td> <td>79.89</td> <td>51.09</td> <td>32.89</td> <td>3.51 32.34 389 201 Average</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark	Freq	Level	Line	Level	Factor	Loss			1 *	2440.99	97.48	-13.40	79.89	51.09	32.89	3.51 32.34 389 201 Average
Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor	Loss																																													
1	2366.52	48.36	-13.44	79.89	35.08	31.79	3.51 32.29 389 201 Average																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pwr	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor	Loss																																													
1 *	2440.99	97.48	-13.40	79.89	51.09	32.89	3.51 32.34 389 201 Average																																											



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																															
ANT	BLE CH19 2440MHz - R																															
1	Vertical	Fundamental																														
Peak	<p>Site: 03CH02 02            Condition: PEAK, 90, 24, 3m, 19, ANT, 3117, 0.001 VERTICAL            Project: 12018401            Mode: 5            MEI: #07-C03020003196501H            Plane: Y-Plane-Auxiliary            4/22</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Repass/Retn</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Mask</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1: 2440.14</td> <td>118.68</td> <td>-13.00</td> <td>79.89</td> <td>44.00</td> <td>01.00</td> <td>3.00</td> <td>01.00</td> <td>000</td> <td>001 Y-axis</td> </tr> </tbody> </table>	Over	Level	Limit	Margin	Repass/Retn	Cable	Preamp	A/Pos	T/Pos	Mask	Freq	Level	Limit	Line	Level Factor	Loss Factor					1: 2440.14	118.68	-13.00	79.89	44.00	01.00	3.00	01.00	000	001 Y-axis	Left blank
Over	Level	Limit	Margin	Repass/Retn	Cable	Preamp	A/Pos	T/Pos	Mask																							
Freq	Level	Limit	Line	Level Factor	Loss Factor																											
1: 2440.14	118.68	-13.00	79.89	44.00	01.00	3.00	01.00	000	001 Y-axis																							
Avg.	<p>Site: 03CH02 02            Condition: AVG, 90, 24, 3m, 19, ANT, 3117, 0.001 VERTICAL            Project: 12018401            Mode: 5            MEI: #07-C03020003196501H            Plane: Y-Plane-Auxiliary            4/22</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Repass/Retn</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Mask</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1: 2440.27</td> <td>42.01</td> <td>-13.00</td> <td>58.69</td> <td>36.18</td> <td>01.00</td> <td>3.00</td> <td>01.00</td> <td>000</td> <td>001 Average</td> </tr> </tbody> </table>	Over	Level	Limit	Margin	Repass/Retn	Cable	Preamp	A/Pos	T/Pos	Mask	Freq	Level	Limit	Line	Level Factor	Loss Factor					1: 2440.27	42.01	-13.00	58.69	36.18	01.00	3.00	01.00	000	001 Average	Left blank
Over	Level	Limit	Margin	Repass/Retn	Cable	Preamp	A/Pos	T/Pos	Mask																							
Freq	Level	Limit	Line	Level Factor	Loss Factor																											
1: 2440.27	42.01	-13.00	58.69	36.18	01.00	3.00	01.00	000	001 Average																							



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																													
ANT	BLE CH39 2480MHz																																													
1	Horizontal	Fundamental																																												
Peak	 <p>Site : ECHO S2 Condition : BLE CH39 3m HF ANT 3117 0107 HORIZONTAL Project : 10934-01 Mode : Mode 9 RFI : #R1-G000003216000HG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>LI/SL</th> <th>Residual</th> <th>Rezone</th> <th>Calib</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>51.11</td> <td>-22.89</td> <td>74.00</td> <td>45.10</td> <td>12.10</td> <td>3.46</td> <td>11.00</td> <td>100</td> <td>348 Pass</td> </tr> </tbody> </table>	Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask	1	2480.00	51.11	-22.89	74.00	45.10	12.10	3.46	11.00	100	348 Pass	 <p>Site : ECHO S2 Condition : BLE CH39 3m HF ANT 3117 0107 HORIZONTAL Project : 10934-01 Mode : Mode 9 RFI : #R1-G000003216000HG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>LI/SL</th> <th>Residual</th> <th>Rezone</th> <th>Calib</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>50.42</td> <td>-22.82</td> <td>74.00</td> <td>49.56</td> <td>12.47</td> <td>3.46</td> <td>11.00</td> <td>100</td> <td>348 Pass</td> </tr> </tbody> </table>	Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask	1	2480.00	50.42	-22.82	74.00	49.56	12.47	3.46	11.00	100	348 Pass
Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask																																				
1	2480.00	51.11	-22.89	74.00	45.10	12.10	3.46	11.00	100	348 Pass																																				
Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask																																				
1	2480.00	50.42	-22.82	74.00	49.56	12.47	3.46	11.00	100	348 Pass																																				
Avg.	 <p>Site : ECHO S2 Condition : BLE CH39 3m HF ANT 3117 0107 HORIZONTAL Project : 10934-01 Mode : Mode 9 RFI : #R1-G000003216000HG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>LI/SL</th> <th>Residual</th> <th>Rezone</th> <th>Calib</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2482.00</td> <td>42.11</td> <td>-11.89</td> <td>54.00</td> <td>36.20</td> <td>11.10</td> <td>3.46</td> <td>11.00</td> <td>100</td> <td>348 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask	1	2482.00	42.11	-11.89	54.00	36.20	11.10	3.46	11.00	100	348 Average	 <p>Site : ECHO S2 Condition : BLE CH39 3m HF ANT 3117 0107 HORIZONTAL Project : 10934-01 Mode : Mode 9 RFI : #R1-G000003216000HG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>LI/SL</th> <th>Residual</th> <th>Rezone</th> <th>Calib</th> <th>Pramp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Mask</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>49.77</td> <td>-11.77</td> <td>54.00</td> <td>43.00</td> <td>12.47</td> <td>3.46</td> <td>11.00</td> <td>100</td> <td>348 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask	1	2480.00	49.77	-11.77	54.00	43.00	12.47	3.46	11.00	100	348 Average
Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask																																				
1	2482.00	42.11	-11.89	54.00	36.20	11.10	3.46	11.00	100	348 Average																																				
Freq	Level	Limit	LI/SL	Residual	Rezone	Calib	Pramp	A/Pos	T/Pos	Mask																																				
1	2480.00	49.77	-11.77	54.00	43.00	12.47	3.46	11.00	100	348 Average																																				



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																	
ANT	BLE CH39 2480MHz																																																	
1	Vertical	Fundamental																																																
Peak	<p>Site : E3CH02 S2            Condition : PEAK 74.3m W/ ANT 3117 0.163 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-C0202032166591G            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>31.04</td> <td>-12.10</td> <td>74.80</td> <td>45.05</td> <td>02.47</td> <td>3.46 13.00 100 204 Peak</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Loss	Factor				1	2480.00	31.04	-12.10	74.80	45.05	02.47	3.46 13.00 100 204 Peak	<p>Site : E3CH02 S2            Condition : PEAK 74.3m W/ ANT 3117 0.163 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-C0202032166591G            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>31.04</td> <td>-12.14</td> <td>74.80</td> <td>45.05</td> <td>02.47</td> <td>3.46 13.00 100 204 Peak</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Loss	Factor				1	2480.00	31.04	-12.14	74.80	45.05	02.47	3.46 13.00 100 204 Peak
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark																																											
Freq	Level	Limit	Loss	Factor																																														
1	2480.00	31.04	-12.10	74.80	45.05	02.47	3.46 13.00 100 204 Peak																																											
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark																																											
Freq	Level	Limit	Loss	Factor																																														
1	2480.00	31.04	-12.14	74.80	45.05	02.47	3.46 13.00 100 204 Peak																																											
Avg.	<p>Site : E3CH02 S2            Condition : AVG 74.3m W/ ANT 3117 0.163 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-C0202032166591G            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>42.13</td> <td>-12.47</td> <td>54.60</td> <td>35.10</td> <td>31.00</td> <td>3.46 13.00 100 204 Average</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Loss	Factor				1	2480.00	42.13	-12.47	54.60	35.10	31.00	3.46 13.00 100 204 Average	<p>Site : E3CH02 S2            Condition : AVG 74.3m W/ ANT 3117 0.163 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-C0202032166591G            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>35.12</td> <td>-12.52</td> <td>54.60</td> <td>35.14</td> <td>31.47</td> <td>3.46 13.00 100 204 Average</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Loss	Factor				1	2480.00	35.12	-12.52	54.60	35.14	31.47	3.46 13.00 100 204 Average
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark																																											
Freq	Level	Limit	Loss	Factor																																														
1	2480.00	42.13	-12.47	54.60	35.10	31.00	3.46 13.00 100 204 Average																																											
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Pos	Remark																																											
Freq	Level	Limit	Loss	Factor																																														
1	2480.00	35.12	-12.52	54.60	35.14	31.47	3.46 13.00 100 204 Average																																											





2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																					
ANT	BLE CH00 2402MHz																																					
1	Horizontal	Vertical																																				
Peak Avg.	<p>Site: 120343-02 Condition: PEAK, 7d 3m HF, ANT, 3HT, 31d7 HORIZONTAL Project: 12034-01 Mode: Mode 4 Sweep: #12 120343030318001010 Y-axis: Accessory Plane: #22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Resolution</th> <th>Calib</th> <th>Preamp</th> <th>Att</th> <th>1/100</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>4884.98</td> <td>41.59</td> <td>-12.41</td> <td>74.89</td> <td>57.81</td> <td>53.89</td> <td>8.88</td> <td>17.39</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Unit	Resolution	Calib	Preamp	Att	1/100	Remark	4884.98	41.59	-12.41	74.89	57.81	53.89	8.88	17.39	Peak	<p>Site: 120343-02 Condition: PEAK, 7d 3m HF, ANT, 3HT, 31d7 VERTICAL Project: 12034-01 Mode: Mode 4 Sweep: #12 120343030318001010 Y-axis: Accessory Plane: #22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Unit</th> <th>Resolution</th> <th>Calib</th> <th>Preamp</th> <th>Att</th> <th>1/100</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>4884.98</td> <td>41.59</td> <td>-12.41</td> <td>74.89</td> <td>57.81</td> <td>53.89</td> <td>8.88</td> <td>17.39</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Unit	Resolution	Calib	Preamp	Att	1/100	Remark	4884.98	41.59	-12.41	74.89	57.81	53.89	8.88	17.39	Peak
Freq	Level	Unit	Resolution	Calib	Preamp	Att	1/100	Remark																														
4884.98	41.59	-12.41	74.89	57.81	53.89	8.88	17.39	Peak																														
Freq	Level	Unit	Resolution	Calib	Preamp	Att	1/100	Remark																														
4884.98	41.59	-12.41	74.89	57.81	53.89	8.88	17.39	Peak																														



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																	
ANT	BLE CH19 2440MHz																																																																	
1	Horizontal	Vertical																																																																
Peak Avg.	<p>Site: ECHRD-02          Condition: PEAK_74_3m_HF_ANT_3HT_5107 HORIZONTAL          Project: 10034-01          Mode: Mode 5          SMT: #87 G08020032186001H          Plane: Y axis Accuracy          S02</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>Resolution</th> <th>Calc</th> <th>Prereq</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>4488.08</td> <td>42.78</td> <td>121.22</td> <td>78.48</td> <td>38.35</td> <td>31.73</td> <td>8.74</td> <td>Peak</td> </tr> <tr> <td>7439.08</td> <td>43.73</td> <td>121.22</td> <td>78.48</td> <td>38.43</td> <td>31.73</td> <td>13.49</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	Resolution	Calc	Prereq	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor				4488.08	42.78	121.22	78.48	38.35	31.73	8.74	Peak	7439.08	43.73	121.22	78.48	38.43	31.73	13.49	Peak	<p>Site: ECHRD-02          Condition: PEAK_74_3m_HF_ANT_3HT_5107 VERTICAL          Project: 10034-01          Mode: Mode 5          SMT: #87 G08020032186001H          Plane: Y axis Accuracy          S02</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>Resolution</th> <th>Calc</th> <th>Prereq</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>4488.08</td> <td>42.84</td> <td>121.22</td> <td>78.48</td> <td>38.35</td> <td>31.73</td> <td>8.74</td> <td>Peak</td> </tr> <tr> <td>7439.08</td> <td>43.53</td> <td>121.22</td> <td>78.48</td> <td>38.33</td> <td>31.73</td> <td>13.49</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	Resolution	Calc	Prereq	A/Pos	T/Pos	Remark	Freq	Level	Limit	Level Factor	Loss Factor				4488.08	42.84	121.22	78.48	38.35	31.73	8.74	Peak	7439.08	43.53	121.22	78.48	38.33	31.73	13.49	Peak
Over	Limit	Resolution	Calc	Prereq	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level Factor	Loss Factor																																																														
4488.08	42.78	121.22	78.48	38.35	31.73	8.74	Peak																																																											
7439.08	43.73	121.22	78.48	38.43	31.73	13.49	Peak																																																											
Over	Limit	Resolution	Calc	Prereq	A/Pos	T/Pos	Remark																																																											
Freq	Level	Limit	Level Factor	Loss Factor																																																														
4488.08	42.84	121.22	78.48	38.35	31.73	8.74	Peak																																																											
7439.08	43.53	121.22	78.48	38.33	31.73	13.49	Peak																																																											



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																			
ANT	BLE CH39 2480MHz																																																																			
1	Horizontal	Vertical																																																																		
Peak	 <p>Site: - ECHO5 S2            Condition: - RF44, 76.3m HF, ANT 3117 3167 HORIZONTAL            Project: - 102534-01            Mode: - Mode 9            MEI: - #02-0000003276669HG            Plane: - Y-Path Accessory            SIZ: - 602</p> <table border="1"> <thead> <tr> <th>Frq</th> <th>Level</th> <th>Line</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4968.00</td> <td>42.28</td> <td>-31.89</td> <td>74.09</td> <td>57.29</td> <td>31.73</td> <td>8.08</td> <td>57.08</td> <td>-</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3448.00</td> <td>45.13</td> <td>-28.67</td> <td>74.09</td> <td>59.78</td> <td>21.34</td> <td>19.56</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> </tbody> </table>	Frq	Level	Line	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	1	4968.00	42.28	-31.89	74.09	57.29	31.73	8.08	57.08	-	Peak	2	3448.00	45.13	-28.67	74.09	59.78	21.34	19.56	-	-	Peak	 <p>Site: - ECHO5 S2            Condition: - RF44, 76.3m HF, ANT 3117 3167 VERTICAL            Project: - 102534-01            Mode: - Mode 9            MEI: - #02-0000003276669HG            Plane: - Y-Path Accessory            SIZ: - 602</p> <table border="1"> <thead> <tr> <th>Frq</th> <th>Level</th> <th>Line</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4968.00</td> <td>44.44</td> <td>-29.54</td> <td>74.09</td> <td>57.29</td> <td>31.73</td> <td>8.08</td> <td>57.08</td> <td>-</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>3448.00</td> <td>45.08</td> <td>-28.65</td> <td>74.09</td> <td>59.78</td> <td>21.34</td> <td>19.56</td> <td>-</td> <td>-</td> <td>Peak</td> </tr> </tbody> </table>	Frq	Level	Line	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	1	4968.00	44.44	-29.54	74.09	57.29	31.73	8.08	57.08	-	Peak	2	3448.00	45.08	-28.65	74.09	59.78	21.34	19.56	-	-	Peak
Frq	Level	Line	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																										
1	4968.00	42.28	-31.89	74.09	57.29	31.73	8.08	57.08	-	Peak																																																										
2	3448.00	45.13	-28.67	74.09	59.78	21.34	19.56	-	-	Peak																																																										
Frq	Level	Line	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																										
1	4968.00	44.44	-29.54	74.09	57.29	31.73	8.08	57.08	-	Peak																																																										
2	3448.00	45.08	-28.65	74.09	59.78	21.34	19.56	-	-	Peak																																																										





<Bluetooth LE 2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	BLE CH00 2402MHz																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site: C3CH02-SZ            Condition: PEAK_80_74.3m HF ANT_3117_5107 HORIZONTAL            Project: 1000100-000004-V001-3000Hz            Model: 100934-01            IMEI: #87 00020032195001H            Plane: Y-Plane-Auxiliary            Plane: 6202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>LI401</th> <th>LI402</th> <th>Reception</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remarks</th> </tr> <tr> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2342.46</td> <td>51.24</td> <td>-12.10</td> <td>74.89</td> <td>46.91</td> <td>31.79</td> <td>3.49</td> <td>32.26</td> <td>100</td> <td>300 Average</td> </tr> </tbody> </table>	Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks	dBm	dBm	dBm	dBm	dBm	dB	dB	dB		1	2342.46	51.24	-12.10	74.89	46.91	31.79	3.49	32.26	100	300 Average	<p>Site: C3CH02-SZ            Condition: PEAK_74.3m HF ANT_3117_5107 HORIZONTAL            Project: 1000100-000004-V001-3000Hz            Model: 100934-01            IMEI: #87 00020032195001H            Plane: Y-Plane-Auxiliary            Plane: 6202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>LI401</th> <th>LI402</th> <th>Reception</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remarks</th> </tr> <tr> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2443.49</td> <td>95.41</td> <td>21.91</td> <td>74.89</td> <td>46.91</td> <td>31.79</td> <td>3.55</td> <td>32.24</td> <td>100</td> <td>300 Average</td> </tr> </tbody> </table>	Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks	dBm	dBm	dBm	dBm	dBm	dB	dB	dB		1	2443.49	95.41	21.91	74.89	46.91	31.79	3.55	32.24	100	300 Average
Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks																																																				
dBm	dBm	dBm	dBm	dBm	dB	dB	dB																																																					
1	2342.46	51.24	-12.10	74.89	46.91	31.79	3.49	32.26	100	300 Average																																																		
Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks																																																				
dBm	dBm	dBm	dBm	dBm	dB	dB	dB																																																					
1	2443.49	95.41	21.91	74.89	46.91	31.79	3.55	32.24	100	300 Average																																																		
Avg.	<p>Site: C3CH02-SZ            Condition: AVG_86_54.3m HF ANT_3117_5107 HORIZONTAL            Project: 1000100-000004-V001-1.0000Hz            Model: 100934-01            IMEI: #87 00020032195001H            Plane: Y-Plane-Auxiliary            Plane: 6202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>LI401</th> <th>LI402</th> <th>Reception</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remarks</th> </tr> <tr> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.44</td> <td>49.73</td> <td>-11.23</td> <td>74.89</td> <td>45.79</td> <td>31.79</td> <td>3.55</td> <td>32.27</td> <td>100</td> <td>300 Average</td> </tr> </tbody> </table>	Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks	dBm	dBm	dBm	dBm	dBm	dB	dB	dB		1	2386.44	49.73	-11.23	74.89	45.79	31.79	3.55	32.27	100	300 Average	<p>Site: C3CH02-SZ            Condition: AVG_54.3m HF ANT_3117_5107 HORIZONTAL            Project: 1000100-000004-V001-1.0000Hz            Model: 100934-01            IMEI: #87 00020032195001H            Plane: Y-Plane-Auxiliary            Plane: 6202</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>LI401</th> <th>LI402</th> <th>Reception</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remarks</th> </tr> <tr> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2443.89</td> <td>91.21</td> <td>21.91</td> <td>74.89</td> <td>45.79</td> <td>31.79</td> <td>3.55</td> <td>32.24</td> <td>100</td> <td>300 Average</td> </tr> </tbody> </table>	Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks	dBm	dBm	dBm	dBm	dBm	dB	dB	dB		1	2443.89	91.21	21.91	74.89	45.79	31.79	3.55	32.24	100	300 Average
Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks																																																				
dBm	dBm	dBm	dBm	dBm	dB	dB	dB																																																					
1	2386.44	49.73	-11.23	74.89	45.79	31.79	3.55	32.27	100	300 Average																																																		
Freq. Level	LI401	LI402	Reception	Cable	Preamp	A/Pos	T/Freq	Remarks																																																				
dBm	dBm	dBm	dBm	dBm	dB	dB	dB																																																					
1	2443.89	91.21	21.91	74.89	45.79	31.79	3.55	32.24	100	300 Average																																																		





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	<pre> Data 5 Date: 2022-05-11 Site: -SPOH02-SZ Condition: -RF54, 76.3m HF, ANT_3117_0101 VERTICAL Project: -2025A-01 Mode: Mode 7 SSE1: -RF7-000000003216000TH Plane: Y-Path_Accessory SQZ: Freq Level Over L1/L2 Resistance Cable Preamp A/P/Pos T/Freq MHz dBm/Hz dB dBm/Hz dBm/Hz dB dBm/Hz dBm/Hz 1 2399.67 58.42 -23.88 74.89 41.34 51.78 3.35 12.25 189 208 0ms           </pre>	<pre> Data 7 Date: 2022-05-11 Site: -SPOH02-SZ Condition: -RF54, 76.3m HF, ANT_3117_0101 VERTICAL Project: -2025A-01 Mode: Mode 7 SSE1: -RF7-000000003216000TH Plane: Y-Path_Accessory SQZ: Freq Level Over L1/L2 Resistance Cable Preamp A/P/Pos T/Freq MHz dBm/Hz dB dBm/Hz dBm/Hz dB dBm/Hz dBm/Hz 1 2402.00 95.03 24.50 74.89 41.34 51.78 3.35 12.24 189 208 0ms           </pre>
Avg	<pre> Data 5 Date: 2022-05-11 Site: -SPOH02-SZ Condition: -RF54, 76.3m HF, ANT_3117_0101 VERTICAL Project: -2025A-01 Mode: Mode 7 SSE1: -RF7-000000003216000TH Plane: Y-Path_Accessory SQZ: Freq Level Over L1/L2 Resistance Cable Preamp A/P/Pos T/Freq MHz dBm/Hz dB dBm/Hz dBm/Hz dB dBm/Hz dBm/Hz 1 2399.67 48.42 -13.18 54.49 41.34 51.78 3.35 12.25 189 208 Average           </pre>	<pre> Data 7 Date: 2022-05-11 Site: -SPOH02-SZ Condition: -RF54, 76.3m HF, ANT_3117_0101 VERTICAL Project: -2025A-01 Mode: Mode 7 SSE1: -RF7-000000003216000TH Plane: Y-Path_Accessory SQZ: Freq Level Over L1/L2 Resistance Cable Preamp A/P/Pos T/Freq MHz dBm/Hz dB dBm/Hz dBm/Hz dB dBm/Hz dBm/Hz 1 2402.00 49.42 41.93 54.49 41.34 51.78 3.35 12.24 189 208 Average           </pre>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																			
ANT	BLE CH19 2440MHz - L																																			
1	Horizontal	Fundamental																																		
Peak	<p>Site : SICH2-S2            Condition : PEAK, 3m, HF, ANT, 3117, 0107 HORIZONTAL            Project : Mode 2            Mode : Mode 2            SMI : #P1G202002150001G            Plane : Y with Accessory            Q22</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Level</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.88</td> <td>98.82</td> <td>-13.18</td> <td>34.88</td> <td>45.61</td> <td>51.79</td> <td>7.51</td> <td>52.28</td> <td>388</td> <td>383</td> <td>Power</td> </tr> </tbody> </table>	Freq. Level	Level	Level Factor	Loss Factor	Remark	1	2383.88	98.82	-13.18	34.88	45.61	51.79	7.51	52.28	388	383	Power	<p>Site : SICH2-S2            Condition : PEAK, 3m, HF, ANT, 3117, 0107 HORIZONTAL            Project : Mode 2            Mode : Mode 2            SMI : #P1G202002150001G            Plane : Y with Accessory            Q22</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Level</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2448.88</td> <td>98.81</td> <td>24.19</td> <td>34.88</td> <td>41.88</td> <td>51.88</td> <td>7.51</td> <td>52.34</td> <td>388</td> <td>383</td> <td>Power</td> </tr> </tbody> </table>	Freq. Level	Level	Level Factor	Loss Factor	Remark	1	2448.88	98.81	24.19	34.88	41.88	51.88	7.51	52.34	388	383	Power
Freq. Level	Level	Level Factor	Loss Factor	Remark																																
1	2383.88	98.82	-13.18	34.88	45.61	51.79	7.51	52.28	388	383	Power																									
Freq. Level	Level	Level Factor	Loss Factor	Remark																																
1	2448.88	98.81	24.19	34.88	41.88	51.88	7.51	52.34	388	383	Power																									
Avg.	<p>Site : SICH2-S2            Condition : AVG, 3m, HF, ANT, 3117, 0107 HORIZONTAL            Project : Mode 2            Mode : Mode 2            SMI : #P1G202002150001G            Plane : Y with Accessory            Q22</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Level</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2379.44</td> <td>48.52</td> <td>-13.18</td> <td>34.88</td> <td>25.34</td> <td>31.79</td> <td>7.51</td> <td>52.25</td> <td>388</td> <td>385</td> <td>Average</td> </tr> </tbody> </table>	Freq. Level	Level	Level Factor	Loss Factor	Remark	1	2379.44	48.52	-13.18	34.88	25.34	31.79	7.51	52.25	388	385	Average	<p>Site : SICH2-S2            Condition : AVG, 3m, HF, ANT, 3117, 0107 HORIZONTAL            Project : Mode 2            Mode : Mode 2            SMI : #P1G202002150001G            Plane : Y with Accessory            Q22</p> <table border="1"> <thead> <tr> <th>Freq. Level</th> <th>Level</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2448.88</td> <td>98.78</td> <td>42.18</td> <td>34.88</td> <td>41.81</td> <td>51.88</td> <td>7.51</td> <td>52.34</td> <td>388</td> <td>383</td> <td>Average</td> </tr> </tbody> </table>	Freq. Level	Level	Level Factor	Loss Factor	Remark	1	2448.88	98.78	42.18	34.88	41.81	51.88	7.51	52.34	388	383	Average
Freq. Level	Level	Level Factor	Loss Factor	Remark																																
1	2379.44	48.52	-13.18	34.88	25.34	31.79	7.51	52.25	388	385	Average																									
Freq. Level	Level	Level Factor	Loss Factor	Remark																																
1	2448.88	98.78	42.18	34.88	41.81	51.88	7.51	52.34	388	383	Average																									



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 <pre data-bbox="470 661 812 787"> Site: 03CH02 02 Condition: PEAK_06_24_3m-RP_ANT_3117_0107-HORIZONTAL RFW: 100.000000Hz VSWR: 3000.0000Hz FREQ: 10000.00 Mode: Mode 3 RFI: #02-G000000002766001G Plane: Y with Accessory S22 Freq Level Limit Limb Level Factor Loss Factor Status --- 1 2440.41 31.43 -22.41 79.89 41.04 12.10 3.04 11.00 100 343 3ms           </pre>	Left blank
Avg.	 <pre data-bbox="470 1302 812 1428"> Site: 03CH02 02 Condition: AVG_06_24_3m-RP_ANT_3117_0107-HORIZONTAL RFW: 100.000000Hz VSWR: 1.0000Hz FREQ: 10000.00 Mode: Mode 3 RFI: #02-G000000002766001G Plane: Y with Accessory S22 Freq Level Limit Limb Level Factor Loss Factor Status --- 1 2440.41 41.21 -12.71 56.49 31.39 11.10 3.04 11.00 100 343 3ms           </pre>	Left blank







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																	
ANT	BLE CH19 2440MHz - L																																																	
1	Vertical	Fundamental																																																
Peak	<p>Site : ECHO2 S2            Condition : FREQ: 24.3m HF ANT: 3117 0dB VERTICAL            Channel : RBW: 1000.000kHz VBW: 1000.000kHz            Project : 120184-01            Mode : Mode 8            MEI : #12-C0302032166691G            Plane : Y with Accessory            4/22</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/PoS</th> <th>T/Fos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2302.24</td> <td>52.16</td> <td>-11.84</td> <td>74.89</td> <td>47.13</td> <td>11.78</td> <td>3.41 12.28 100 210 Peak</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark	Freq	Level	Line	Level	Factor				1	2302.24	52.16	-11.84	74.89	47.13	11.78	3.41 12.28 100 210 Peak	<p>Site : ECHO2 S2            Condition : FREQ: 24.3m HF ANT: 3117 0dB VERTICAL            Channel : RBW: 1000.000kHz VBW: 1000.000kHz            Project : 120184-01            Mode : Mode 8            MEI : #12-C0302032166691G            Plane : Y with Accessory            4/22</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/PoS</th> <th>T/Fos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>46.00</td> <td>-14.40</td> <td>74.89</td> <td>45.43</td> <td>12.44</td> <td>100 210 Peak</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark	Freq	Level	Line	Level	Factor				1	2440.00	46.00	-14.40	74.89	45.43	12.44	100 210 Peak
Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2302.24	52.16	-11.84	74.89	47.13	11.78	3.41 12.28 100 210 Peak																																											
Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2440.00	46.00	-14.40	74.89	45.43	12.44	100 210 Peak																																											
Avg.	<p>Site : ECHO2 S2            Condition : FREQ: 24.3m HF ANT: 3117 0dB VERTICAL            Channel : RBW: 1000.000kHz VBW: 1000.000kHz            Project : 120184-01            Mode : Mode 8            MEI : #12-C0302032166691G            Plane : Y with Accessory            4/22</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/PoS</th> <th>T/Fos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2312.82</td> <td>48.44</td> <td>-13.16</td> <td>74.89</td> <td>45.44</td> <td>11.78</td> <td>3.52 12.29 100 210 Average</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark	Freq	Level	Line	Level	Factor				1	2312.82	48.44	-13.16	74.89	45.44	11.78	3.52 12.29 100 210 Average	<p>Site : ECHO2 S2            Condition : FREQ: 24.3m HF ANT: 3117 0dB VERTICAL            Channel : RBW: 1000.000kHz VBW: 1000.000kHz            Project : 120184-01            Mode : Mode 8            MEI : #12-C0302032166691G            Plane : Y with Accessory            4/22</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/PoS</th> <th>T/Fos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2440.00</td> <td>35.00</td> <td>-11.80</td> <td>74.89</td> <td>45.43</td> <td>12.44</td> <td>100 210 Average</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark	Freq	Level	Line	Level	Factor				1	2440.00	35.00	-11.80	74.89	45.43	12.44	100 210 Average
Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2312.82	48.44	-13.16	74.89	45.44	11.78	3.52 12.29 100 210 Average																																											
Over	Level	Bandwidth	Cable	Preamp	A/PoS	T/Fos	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2440.00	35.00	-11.80	74.89	45.43	12.44	100 210 Average																																											



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak		Left blank
Avg.		Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	BLE CH39 2480MHz																																																													
1	Horizontal	Fundamental																																																												
Peak	 <p>Site : 03CH02 S2 Condition : RF44_76.3m HF ANT 3117 0107 HORIZONTAL Project Mode : Mode 3 MAG : 492.00000003216000VHG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>LI441</th> <th>ReadsFrom</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Fps</th> <th>Marker</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>dBm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.26</td> <td>52.14</td> <td>-21.46</td> <td>74.89</td> <td>46.10</td> <td>32.47</td> <td>3.46</td> <td>31.89</td> <td>189</td> <td>348</td> <td>Time</td> </tr> </tbody> </table>	Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker	MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm	1	2483.26	52.14	-21.46	74.89	46.10	32.47	3.46	31.89	189	348	Time	 <p>Site : 03CH02 S2 Condition : RF44_76.3m HF ANT 3117 0107 HORIZONTAL Project Mode : Mode 3 MAG : 492.00000003216000VHG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>LI441</th> <th>ReadsFrom</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Fps</th> <th>Marker</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>dBm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.89</td> <td>56.01</td> <td>-21.23</td> <td>74.89</td> <td>49.11</td> <td>32.47</td> <td>3.46</td> <td>31.89</td> <td>189</td> <td>348</td> <td>Time</td> </tr> </tbody> </table>	Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker	MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm	1	2480.89	56.01	-21.23	74.89	49.11	32.47	3.46	31.89	189	348	Time
Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker																																																						
MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm																																																						
1	2483.26	52.14	-21.46	74.89	46.10	32.47	3.46	31.89	189	348	Time																																																			
Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker																																																						
MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm																																																						
1	2480.89	56.01	-21.23	74.89	49.11	32.47	3.46	31.89	189	348	Time																																																			
Avg.	 <p>Site : 03CH02 S2 Condition : RF44_76.3m HF ANT 3117 0107 HORIZONTAL Project Mode : Mode 3 MAG : 492.00000003216000VHG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>LI441</th> <th>ReadsFrom</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Fps</th> <th>Marker</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>dBm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.26</td> <td>42.73</td> <td>-11.23</td> <td>56.89</td> <td>37.86</td> <td>32.47</td> <td>3.46</td> <td>31.89</td> <td>189</td> <td>348</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker	MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm	1	2483.26	42.73	-11.23	56.89	37.86	32.47	3.46	31.89	189	348	Average	 <p>Site : 03CH02 S2 Condition : RF44_76.3m HF ANT 3117 0107 HORIZONTAL Project Mode : Mode 3 MAG : 492.00000003216000VHG Plane : Y with Accessory S22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>LI441</th> <th>ReadsFrom</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Fps</th> <th>Marker</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>dBm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.89</td> <td>51.13</td> <td>-16.89</td> <td>67.37</td> <td>32.47</td> <td>3.46</td> <td>31.89</td> <td>189</td> <td>348</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker	MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm	1	2480.89	51.13	-16.89	67.37	32.47	3.46	31.89	189	348	Average	
Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker																																																						
MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm																																																						
1	2483.26	42.73	-11.23	56.89	37.86	32.47	3.46	31.89	189	348	Average																																																			
Freq	Level	LI441	ReadsFrom	Cable	Preamp	A/Pos	T/Fps	Marker																																																						
MHz	dBm	dB	dBm	dBm	dB	dB	cm	dBm																																																						
1	2480.89	51.13	-16.89	67.37	32.47	3.46	31.89	189	348	Average																																																				



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																	
ANT	BLE CH39 2480MHz																																																	
1	Vertical	Fundamental																																																
Peak	<p>Site : E3CH02 S2            Condition : PEAK_09_24 3m HF ANT 3117 0103 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-020202021000010            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.04</td> <td>51.84</td> <td>18.70</td> <td>74.89</td> <td>47.26</td> <td>32.47</td> <td>3.46 31.60 100 200 200</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark	Freq	Level	Line	Level	Factor				1	2480.04	51.84	18.70	74.89	47.26	32.47	3.46 31.60 100 200 200	<p>Site : E3CH02 S2            Condition : PEAK_24 3m HF ANT 3117 0103 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-020202021000010            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.83</td> <td>23.63</td> <td>74.89</td> <td>52.87</td> <td>32.47</td> <td>3.46 31.60 100 200 200</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark	Freq	Level	Line	Level	Factor				1	2480.00	97.83	23.63	74.89	52.87	32.47	3.46 31.60 100 200 200
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2480.04	51.84	18.70	74.89	47.26	32.47	3.46 31.60 100 200 200																																											
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2480.00	97.83	23.63	74.89	52.87	32.47	3.46 31.60 100 200 200																																											
Avg.	<p>Site : E3CH02 S2            Condition : AVG_09_24 3m HF ANT 3117 0103 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-020202021000010            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2482.52</td> <td>43.16</td> <td>18.63</td> <td>54.89</td> <td>37.68</td> <td>32.47</td> <td>3.46 31.60 100 200 Average</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark	Freq	Level	Line	Level	Factor				1	2482.52	43.16	18.63	54.89	37.68	32.47	3.46 31.60 100 200 Average	<p>Site : E3CH02 S2            Condition : AVG_24 3m HF ANT 3117 0103 VERTICAL            Project : 120134-01            Mode : Mode 9            MEI : #12-020202021000010            Plane : Y with Accessory            4202</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Bandwidth</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.87</td> <td>42.57</td> <td>54.89</td> <td>54.79</td> <td>32.47</td> <td>3.46 31.60 100 200 Average</td> </tr> </tbody> </table>	Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark	Freq	Level	Line	Level	Factor				1	2480.00	97.87	42.57	54.89	54.79	32.47	3.46 31.60 100 200 Average
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2482.52	43.16	18.63	54.89	37.68	32.47	3.46 31.60 100 200 Average																																											
Over	Level	Bandwidth	Cable	Preamp	A/Pos	T/Freq	Remark																																											
Freq	Level	Line	Level	Factor																																														
1	2480.00	97.87	42.57	54.89	54.79	32.47	3.46 31.60 100 200 Average																																											





2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																					
ANT	BLE CH00 2402MHz																																					
1	Horizontal	Vertical																																				
Peak Avg.	<p>Site: SZCH01-02 Condition: PEAK, 7a 3m HF_ANT_31H7_3107 HORIZONTAL Project: 120514-01 Mode: Mode 7 Ant: G0603000001/160010 Ant Y-axis: Accessory Plane: 9022</p> <table border="1"> <thead> <tr> <th>Over Freq</th> <th>Level</th> <th>Limit</th> <th>Exceedance</th> <th>Gain</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>4884.166</td> <td>42.28</td> <td>-32.50</td> <td>74.78</td> <td>56.51</td> <td>13.00</td> <td>0.00</td> <td>17.00</td> <td>Peak</td> </tr> </tbody> </table>	Over Freq	Level	Limit	Exceedance	Gain	Preamp	A/Pos	T/Freq	Remarks	4884.166	42.28	-32.50	74.78	56.51	13.00	0.00	17.00	Peak	<p>Site: SZCH01-02 Condition: PEAK, 7a 3m HF_ANT_31H7_3107 VERTICAL Project: 120514-01 Mode: Mode 7 Ant: G0603000001/160010 Ant Y-axis: Accessory Plane: 9022</p> <table border="1"> <thead> <tr> <th>Over Freq</th> <th>Level</th> <th>Limit</th> <th>Exceedance</th> <th>Gain</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Freq</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>4884.166</td> <td>42.17</td> <td>-32.50</td> <td>74.67</td> <td>57.79</td> <td>13.00</td> <td>0.00</td> <td>17.00</td> <td>Peak</td> </tr> </tbody> </table>	Over Freq	Level	Limit	Exceedance	Gain	Preamp	A/Pos	T/Freq	Remarks	4884.166	42.17	-32.50	74.67	57.79	13.00	0.00	17.00	Peak
Over Freq	Level	Limit	Exceedance	Gain	Preamp	A/Pos	T/Freq	Remarks																														
4884.166	42.28	-32.50	74.78	56.51	13.00	0.00	17.00	Peak																														
Over Freq	Level	Limit	Exceedance	Gain	Preamp	A/Pos	T/Freq	Remarks																														
4884.166	42.17	-32.50	74.67	57.79	13.00	0.00	17.00	Peak																														



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																					
ANT	BLE CH19 2440MHz																																					
1	Horizontal	Vertical																																				
Peak Avg.	<p>Site: ECHRD02          Condition: PEAK_74_3m_HF_ANT_3HT_5107 HORIZONTAL          Project: 10034-01          Mode: Mode 8          SMT: #32 G080200321860070          Plane: Y axis Accuracy          S02</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Limit Factor</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>4488.00</td> <td>41.39</td> <td>-32.00</td> <td>74.00</td> <td>57.33</td> <td>8.76 07.00</td> </tr> <tr> <td>7539.00</td> <td>44.33</td> <td>-29.43</td> <td>74.00</td> <td>57.33</td> <td>13.49 09.32</td> </tr> </tbody> </table>	Freq	Level	Limit	Level Factor	Limit Factor	Remarks	4488.00	41.39	-32.00	74.00	57.33	8.76 07.00	7539.00	44.33	-29.43	74.00	57.33	13.49 09.32	<p>Site: ECHRD02          Condition: PEAK_74_3m_HF_ANT_3HT_5107 VERTICAL          Project: 10034-01          Mode: Mode 8          SMT: #32 G080200321860070          Plane: Y axis Accuracy          S02</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Limit Factor</th> <th>Remarks</th> </tr> </thead> <tbody> <tr> <td>4488.00</td> <td>41.39</td> <td>-32.00</td> <td>74.00</td> <td>57.33</td> <td>8.76 07.00</td> </tr> <tr> <td>7539.00</td> <td>43.25</td> <td>-28.75</td> <td>74.00</td> <td>57.33</td> <td>13.49 09.32</td> </tr> </tbody> </table>	Freq	Level	Limit	Level Factor	Limit Factor	Remarks	4488.00	41.39	-32.00	74.00	57.33	8.76 07.00	7539.00	43.25	-28.75	74.00	57.33	13.49 09.32
Freq	Level	Limit	Level Factor	Limit Factor	Remarks																																	
4488.00	41.39	-32.00	74.00	57.33	8.76 07.00																																	
7539.00	44.33	-29.43	74.00	57.33	13.49 09.32																																	
Freq	Level	Limit	Level Factor	Limit Factor	Remarks																																	
4488.00	41.39	-32.00	74.00	57.33	8.76 07.00																																	
7539.00	43.25	-28.75	74.00	57.33	13.49 09.32																																	



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																									
ANT	BLE CH39 2480MHz																																																																																																									
1	Horizontal	Vertical																																																																																																								
Peak	<p>Site : ECHO S2            Condition : BLE_CH39_2480MHz_ANT_3117_3117 HORIZONTAL            Project : ECHO S2            Mode : Mode 9            Mod : W7G6R2G633165001G            Plane : Y-axis Accuracy            Plane : R22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>CR</th> <th>CR</th> <th>Sense</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>82.52</td> <td>-11.34</td> <td>74.88</td> <td>57.33</td> <td>3.88</td> <td>57.38</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2480.00</td> <td>84.08</td> <td>-10.18</td> <td>76.88</td> <td>57.42</td> <td>35.78</td> <td>11.12</td> <td>58.88</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Line	Line	Level	Factor	Loss	Factor	dB	dB	CR	CR	Sense	MHz	dBm	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	2480.00	82.52	-11.34	74.88	57.33	3.88	57.38	---	---	---	---	---	Peak	2480.00	84.08	-10.18	76.88	57.42	35.78	11.12	58.88	---	---	---	---	Peak	<p>Site : ECHO S2            Condition : BLE_CH39_2480MHz_ANT_3117_3117 VERTICAL            Project : ECHO S2            Mode : Mode 9            Mod : W7G6R2G633165001G            Plane : Y-axis Accuracy            Plane : R22</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>CR</th> <th>CR</th> <th>Sense</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>2480.00</td> <td>82.52</td> <td>-11.34</td> <td>74.88</td> <td>57.33</td> <td>3.88</td> <td>57.38</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2480.00</td> <td>84.02</td> <td>-10.18</td> <td>76.88</td> <td>57.78</td> <td>35.78</td> <td>11.12</td> <td>58.88</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Line	Line	Level	Factor	Loss	Factor	dB	dB	CR	CR	Sense	MHz	dBm	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	2480.00	82.52	-11.34	74.88	57.33	3.88	57.38	---	---	---	---	---	Peak	2480.00	84.02	-10.18	76.88	57.78	35.78	11.12	58.88	---	---	---	---	Peak
Freq	Level	Line	Line	Level	Factor	Loss	Factor	dB	dB	CR	CR	Sense																																																																																														
MHz	dBm	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB																																																																																														
2480.00	82.52	-11.34	74.88	57.33	3.88	57.38	---	---	---	---	---	Peak																																																																																														
2480.00	84.08	-10.18	76.88	57.42	35.78	11.12	58.88	---	---	---	---	Peak																																																																																														
Freq	Level	Line	Line	Level	Factor	Loss	Factor	dB	dB	CR	CR	Sense																																																																																														
MHz	dBm	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB																																																																																														
2480.00	82.52	-11.34	74.88	57.33	3.88	57.38	---	---	---	---	---	Peak																																																																																														
2480.00	84.02	-10.18	76.88	57.78	35.78	11.12	58.88	---	---	---	---	Peak																																																																																														



2.4GHz 2400~2483.5MHz  
BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																															
ANT	BLE CH00 2402MHz																																																															
1	Horizontal	Fundamental																																																														
Peak	<p>Site: SJCH02 02 Condition: PEAK_06_74 3m HF_ANT_3117_0107 HORIZONTAL Project: 120934-01 Model: 120934-01 SN: K24 G0622M021170888 Plane: Y with Accessory K202</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Assoctance</th> <th>Calc</th> <th>Presnt</th> <th>A/P</th> <th>T/F</th> <th>Notes</th> </tr> <tr> <th>MHz</th> <th>dBm/Hz</th> <th>dB</th> <th>dBm/Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>53.13</td> <td>-36.85</td> <td>14.89</td> <td>47.22</td> <td>31.29</td> <td>3.46</td> <td>31.00</td> <td>289</td> <td>289 Ave</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes	MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB	1	2483.50	53.13	-36.85	14.89	47.22	31.29	3.46	31.00	289	289 Ave	<p>Site: SJCH02 02 Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project: 120934-01 Model: 120934-01 SN: K24 G0622M021170888 Plane: Y with Accessory K202</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Assoctance</th> <th>Calc</th> <th>Presnt</th> <th>A/P</th> <th>T/F</th> <th>Notes</th> </tr> <tr> <th>MHz</th> <th>dBm/Hz</th> <th>dB</th> <th>dBm/Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>91.87</td> <td>31.87</td> <td>14.89</td> <td>89.29</td> <td>31.87</td> <td>3.46</td> <td>31.00</td> <td>289</td> <td>289 Ave</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes	MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB	1	2483.50	91.87	31.87	14.89	89.29	31.87	3.46	31.00	289	289 Ave
Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes																																																							
MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB																																																							
1	2483.50	53.13	-36.85	14.89	47.22	31.29	3.46	31.00	289	289 Ave																																																						
Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes																																																							
MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB																																																							
1	2483.50	91.87	31.87	14.89	89.29	31.87	3.46	31.00	289	289 Ave																																																						
Avg.	<p>Site: SJCH02 02 Condition: AVG_06_54 3m HF_ANT_3117_0107 HORIZONTAL Project: 120934-01 Model: 120934-01 SN: K24 G0622M021170888 Plane: Y with Accessory K202</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Assoctance</th> <th>Calc</th> <th>Presnt</th> <th>A/P</th> <th>T/F</th> <th>Notes</th> </tr> <tr> <th>MHz</th> <th>dBm/Hz</th> <th>dB</th> <th>dBm/Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.52</td> <td>42.29</td> <td>-33.09</td> <td>34.89</td> <td>36.42</td> <td>32.87</td> <td>3.46</td> <td>31.00</td> <td>289</td> <td>289 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes	MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB	1	2483.52	42.29	-33.09	34.89	36.42	32.87	3.46	31.00	289	289 Average	<p>Site: SJCH02 02 Condition: AVG_54 3m HF_ANT_3117_0107 HORIZONTAL Project: 120934-01 Model: 120934-01 SN: K24 G0622M021170888 Plane: Y with Accessory K202</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Assoctance</th> <th>Calc</th> <th>Presnt</th> <th>A/P</th> <th>T/F</th> <th>Notes</th> </tr> <tr> <th>MHz</th> <th>dBm/Hz</th> <th>dB</th> <th>dBm/Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>82.83</td> <td>38.83</td> <td>34.89</td> <td>87.85</td> <td>32.87</td> <td>3.46</td> <td>31.00</td> <td>289</td> <td>289 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes	MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB	1	2483.50	82.83	38.83	34.89	87.85	32.87	3.46	31.00	289	289 Average
Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes																																																							
MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB																																																							
1	2483.52	42.29	-33.09	34.89	36.42	32.87	3.46	31.00	289	289 Average																																																						
Freq	Level	Over	Limit	Assoctance	Calc	Presnt	A/P	T/F	Notes																																																							
MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	dB	dB	dB																																																							
1	2483.50	82.83	38.83	34.89	87.85	32.87	3.46	31.00	289	289 Average																																																						



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak		
Avg		





2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

Table with 3 columns: BLE (2.4GHz 2400~2483.5MHz Harmonic @ 3m), ANT (BLE CH00 2402MHz), and 1 (Horizontal/Vertical). It contains two spectral plots and a table of peak data for 'Peak Avg.'.



Emission below 1GHz  
2.4GHz BLE (LF)


BLE	2.4GHz 2400~2483.5MHz																																																																																																																																	
ANT	BLE LF																																																																																																																																	
1	Horizontal	Vertical																																																																																																																																
QP / Peak	 <p>Site : ECHO5-SZ Condition : FCC CLASS-B 3m VULB168-0101 HORIZONTAL Project : T0034-01 Mode : Mode 3 Ant : 492 CDR2003218401G Plane : Y with Accessory SQU</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Resolution</th> <th>CalCo</th> <th>Prans</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remarks</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Line</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>26.17</td> <td>26.84</td> <td>-23.46</td> <td>43.58</td> <td>46.20</td> <td>14.84</td> <td>8.58 35.58 --- Peak</td> </tr> <tr> <td>2</td> <td>106.86</td> <td>25.73</td> <td>-101.79</td> <td>43.58</td> <td>46.37</td> <td>16.33</td> <td>1.45 35.58 --- Peak</td> </tr> <tr> <td>3</td> <td>127.17</td> <td>25.13</td> <td>-109.61</td> <td>46.88</td> <td>16.86</td> <td>16.13</td> <td>1.89 34.58 --- Peak</td> </tr> <tr> <td>4</td> <td>181.84</td> <td>25.17</td> <td>-104.61</td> <td>46.88</td> <td>16.17</td> <td>16.47</td> <td>2.81 34.58 --- Peak</td> </tr> <tr> <td>5</td> <td>824.11</td> <td>27.42</td> <td>-101.18</td> <td>44.88</td> <td>16.14</td> <td>16.42</td> <td>3.18 34.58 180 25 Peak</td> </tr> <tr> <td>6</td> <td>1074.78</td> <td>29.17</td> <td>-104.16</td> <td>34.88</td> <td>16.15</td> <td>16.15</td> <td>3.43 34.58 --- Peak</td> </tr> </tbody> </table>	Over	Level	Resolution	CalCo	Prans	A/Pos	T/Pos	Remarks	Freq	Level	Line	Level	Factor	Line	Factor		1	26.17	26.84	-23.46	43.58	46.20	14.84	8.58 35.58 --- Peak	2	106.86	25.73	-101.79	43.58	46.37	16.33	1.45 35.58 --- Peak	3	127.17	25.13	-109.61	46.88	16.86	16.13	1.89 34.58 --- Peak	4	181.84	25.17	-104.61	46.88	16.17	16.47	2.81 34.58 --- Peak	5	824.11	27.42	-101.18	44.88	16.14	16.42	3.18 34.58 180 25 Peak	6	1074.78	29.17	-104.16	34.88	16.15	16.15	3.43 34.58 --- Peak	 <p>Site : ECHO5-SZ Condition : FCC CLASS-B 3m VULB168-0101 VERTICAL Project : T0034-01 Mode : Mode 3 Ant : 492 CDR2003218401G Plane : Y with Accessory SQU</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Level</th> <th>Resolution</th> <th>CalCo</th> <th>Prans</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remarks</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Line</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>34.75</td> <td>27.88</td> <td>-12.14</td> <td>46.88</td> <td>42.84</td> <td>19.36</td> <td>8.84 35.88 180 50 Peak</td> </tr> <tr> <td>2</td> <td>106.86</td> <td>25.81</td> <td>-104.45</td> <td>43.58</td> <td>44.13</td> <td>16.13</td> <td>1.43 35.58 --- Peak</td> </tr> <tr> <td>3</td> <td>132.34</td> <td>25.13</td> <td>-112.73</td> <td>46.88</td> <td>15.24</td> <td>16.53</td> <td>1.92 34.58 --- Peak</td> </tr> <tr> <td>4</td> <td>182.87</td> <td>24.48</td> <td>-111.08</td> <td>46.88</td> <td>12.18</td> <td>16.18</td> <td>2.43 34.58 --- Peak</td> </tr> <tr> <td>5</td> <td>842.88</td> <td>28.43</td> <td>-111.19</td> <td>44.88</td> <td>16.16</td> <td>16.17</td> <td>3.19 34.58 --- Peak</td> </tr> <tr> <td>6</td> <td>1084.31</td> <td>29.48</td> <td>-105.14</td> <td>34.88</td> <td>16.17</td> <td>16.13</td> <td>3.44 34.58 --- Peak</td> </tr> </tbody> </table>	Over	Level	Resolution	CalCo	Prans	A/Pos	T/Pos	Remarks	Freq	Level	Line	Level	Factor	Line	Factor		1	34.75	27.88	-12.14	46.88	42.84	19.36	8.84 35.88 180 50 Peak	2	106.86	25.81	-104.45	43.58	44.13	16.13	1.43 35.58 --- Peak	3	132.34	25.13	-112.73	46.88	15.24	16.53	1.92 34.58 --- Peak	4	182.87	24.48	-111.08	46.88	12.18	16.18	2.43 34.58 --- Peak	5	842.88	28.43	-111.19	44.88	16.16	16.17	3.19 34.58 --- Peak	6	1084.31	29.48	-105.14	34.88	16.17	16.13	3.44 34.58 --- Peak
Over	Level	Resolution	CalCo	Prans	A/Pos	T/Pos	Remarks																																																																																																																											
Freq	Level	Line	Level	Factor	Line	Factor																																																																																																																												
1	26.17	26.84	-23.46	43.58	46.20	14.84	8.58 35.58 --- Peak																																																																																																																											
2	106.86	25.73	-101.79	43.58	46.37	16.33	1.45 35.58 --- Peak																																																																																																																											
3	127.17	25.13	-109.61	46.88	16.86	16.13	1.89 34.58 --- Peak																																																																																																																											
4	181.84	25.17	-104.61	46.88	16.17	16.47	2.81 34.58 --- Peak																																																																																																																											
5	824.11	27.42	-101.18	44.88	16.14	16.42	3.18 34.58 180 25 Peak																																																																																																																											
6	1074.78	29.17	-104.16	34.88	16.15	16.15	3.43 34.58 --- Peak																																																																																																																											
Over	Level	Resolution	CalCo	Prans	A/Pos	T/Pos	Remarks																																																																																																																											
Freq	Level	Line	Level	Factor	Line	Factor																																																																																																																												
1	34.75	27.88	-12.14	46.88	42.84	19.36	8.84 35.88 180 50 Peak																																																																																																																											
2	106.86	25.81	-104.45	43.58	44.13	16.13	1.43 35.58 --- Peak																																																																																																																											
3	132.34	25.13	-112.73	46.88	15.24	16.53	1.92 34.58 --- Peak																																																																																																																											
4	182.87	24.48	-111.08	46.88	12.18	16.18	2.43 34.58 --- Peak																																																																																																																											
5	842.88	28.43	-111.19	44.88	16.16	16.17	3.19 34.58 --- Peak																																																																																																																											
6	1084.31	29.48	-105.14	34.88	16.17	16.13	3.44 34.58 --- Peak																																																																																																																											



### Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	61.40	0.383	2.614	3KHz
Bluetooth LE 2Mbps	57.07	1.071	0.934	1KHz

Bluetooth LE 1Mbps

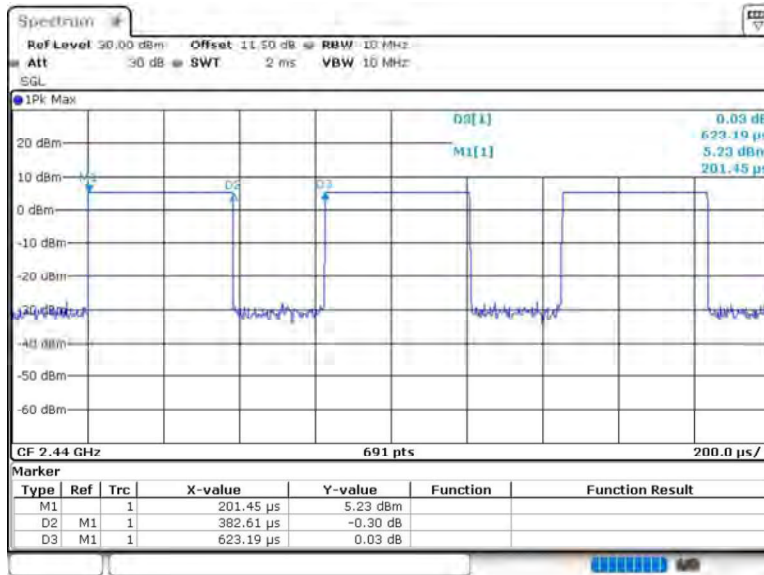


Date: 27.APR.2022 15:46:09





Bluetooth LE 2Mbps

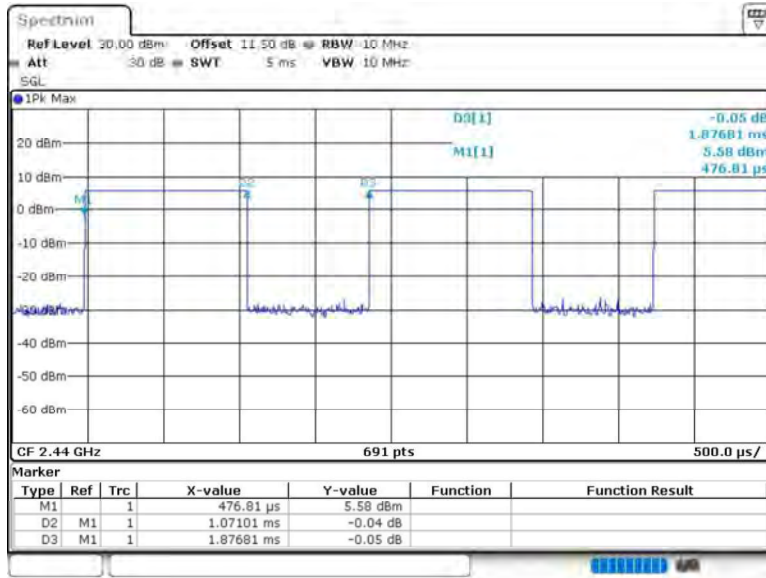

Date: 27.APR.2022 15:47:22