



**V2 MAX WIRELESS MECHANICAL KEYBOARD
USER MANUAL**

Knob
Version

Fully Assembled Version

Keyboard

1x Fully Assembled Keyboard

Including

1x Case

1x PCB

1x PC Plate

1x PET Foam


1x Case Foam

1x Sound Absorbing Foam

4 Sets x Stabilizers

1 Set x Keycaps (PBT Double-shot)

1 Set x Switches

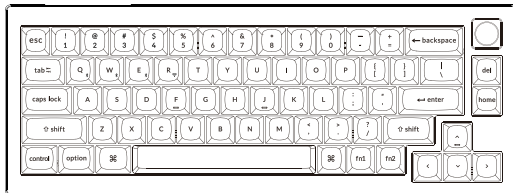

Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter

1x Extension Adapter For Receiver

Receiver

1x Type-A 2.4GHz Receiver


1x Type-C 2.4GHz Receiver

Tools

1x Keycap & Switch Puller

1x Screwdriver

1x Hex Key

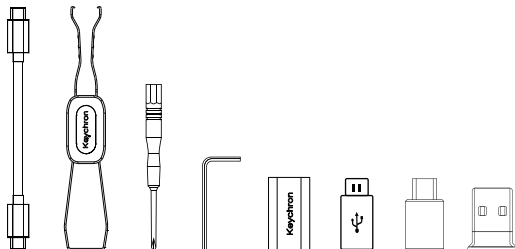

Barebone Version

Keyboard Kit

1x Keyboard Kit (Without Keycaps & Switches)

Including

1x Case

1x PCB


1x PC Plate

1x PET Foam

1x Case Foam

1x Sound Absorbing Foam

4 Sets x Stabilizers

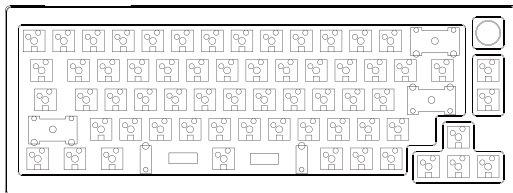

Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter

1x Extension Adapter For Receiver

Receiver

1x Type-A 2.4GHz Receiver


1x Type-C 2.4GHz Receiver

Tools

1x Keycap & Switch Puller

1x Screwdriver


1x Hex Key

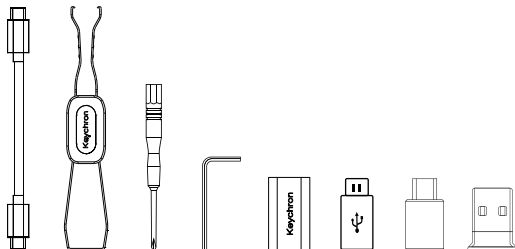

Quick Start Guide


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

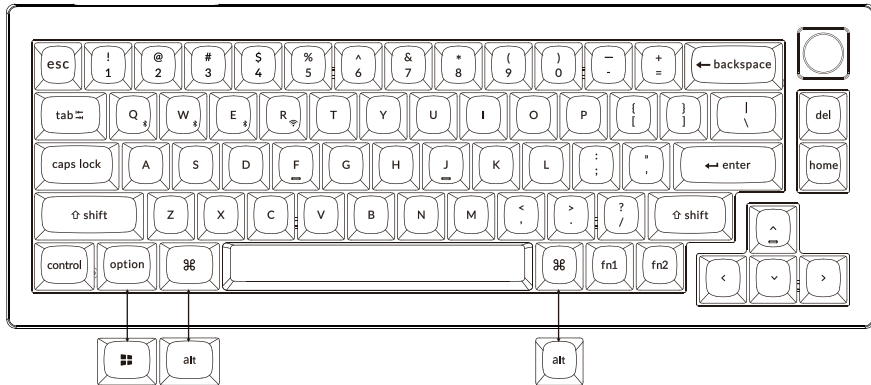


1 Switch To The Right System

Please make sure the system toggle on the top left corner has been switched to the same system as your computer's operating system.




2 Connect 2.4GHz Receiver



Connect the 2.4GHz receiver to the device USB port.



Switch toggle to 2.4GHz mode




G = 2.4GHz




Note: For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences.


3 Connect Bluetooth




Switch toggle to Bluetooth




Press **fn1 + Q** (for 4 seconds) and pair with device named Keychron V2 Max.



4 Connect Cable



Switch toggle to Cable



5 The VIA Key Remapping Software

Please visit usevia.app to use the online VIA software to remap the keys.
If the VIA cannot recognize your keyboard, please reach our support to get the instruction.




*The online VIA software can only run on the latest version of Chrome, Edge, and Opera browsers yet.


*VIA only works when the keyboard is connected by wire to the computer.

6 The Layers

There are five layers of key settings on the keyboard.
The layer 0 is for the Mac system.
The layer 1 is for the Windows system.
The layer 2 is for the Mac Multimedia keys.
The layer 3 is for the Windows Multimedia keys.
The layer 4 is for function keys.



If your system toggle is switched to Mac, then the layer 0 will be activated.



If your system toggle is switched to Windows, then the layer 1 will be activated.

