



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																							
ANT	802.11a CH48 5240MHz - L																																																																							
1	Vertical	Fundamental																																																																						
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 In 3117 SN 00218642 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 3 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.58</td> <td>55.99</td> <td>-18.01</td> <td>74.00</td> <td>41.92</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>252</td> <td>267</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5351.58	55.99	-18.01	74.00	41.92	35.22	10.78	31.93	252	267	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 In 3117 SN 00218642 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 3 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5242.00</td> <td>110.72</td> <td>42.49</td> <td>68.30</td> <td>96.79</td> <td>35.11</td> <td>10.74</td> <td>31.85</td> <td>252</td> <td>267</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5242.00</td> <td>103.75</td> <td>-----</td> <td>89.75</td> <td>35.11</td> <td>10.74</td> <td>31.85</td> <td>252</td> <td>267</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5242.00	110.72	42.49	68.30	96.79	35.11	10.74	31.85	252	267	Peak	VERTICAL	2	5242.00	103.75	-----	89.75	35.11	10.74	31.85	252	267	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																	
1	5351.58	55.99	-18.01	74.00	41.92	35.22	10.78	31.93	252	267	Peak	VERTICAL																																																												
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																	
1	5242.00	110.72	42.49	68.30	96.79	35.11	10.74	31.85	252	267	Peak	VERTICAL																																																												
2	5242.00	103.75	-----	89.75	35.11	10.74	31.85	252	267	Average	VERTICAL																																																													
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) In 3117 SN 00218642 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 3 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.82</td> <td>46.12</td> <td>-7.88</td> <td>54.00</td> <td>32.05</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>252</td> <td>267</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	cm	deg	1	5354.82	46.12	-7.88	54.00	32.05	35.22	10.78	31.93	252	267	Average	VERTICAL	Left blank																																									
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Level	Line	Level	Factor	Loss	Factor	cm	deg																																																																	
1	5354.82	46.12	-7.88	54.00	32.05	35.22	10.78	31.93	252	267	Average	VERTICAL																																																												



**U-NII-1 5150~5250MHz**  
**WIFI 802.11ac VHT20 (Band Edge @ 3m)**

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																								
ANT	802.11ac VHT20 CH36 5180MHz																																																																								
1	Horizontal	Fundamental																																																																							
<b>Peak</b>	<p>Site : 030806-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode : (FR) 102106-01 ME1 : 10 Plane : #12 EIF-BASE1 Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Line</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.88</td> <td>60.77</td> <td>-13.23</td> <td>74.00</td> <td>46.90</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>325</td> <td>156</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	Line	Line	Level Factor	Loss Factor	dB	dB	deg		1	5146.88	60.77	-13.23	74.00	46.90	35.03	10.65	31.81	325	156	Peak	HORIZONTAL	<p>Site : 030806-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode : (FR) 102106-01 ME1 : 10 Plane : #12 EIF-BASE1 Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Line</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5182.00</td> <td>105.45</td> <td>37.15</td> <td>68.30</td> <td>91.62</td> <td>35.04</td> <td>10.69</td> <td>31.82</td> <td>325</td> <td>156</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5182.00</td> <td>97.97</td> <td></td> <td></td> <td>84.04</td> <td>35.06</td> <td>10.69</td> <td>31.82</td> <td>325</td> <td>156</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	Line	Line	Level Factor	Loss Factor	dB	dB	deg		1	5182.00	105.45	37.15	68.30	91.62	35.04	10.69	31.82	325	156	Peak	HORIZONTAL	2	5182.00	97.97			84.04	35.06	10.69	31.82	325	156	Average	HORIZONTAL
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Line	Line	Level Factor	Loss Factor	dB	dB	deg																																																																			
1	5146.88	60.77	-13.23	74.00	46.90	35.03	10.65	31.81	325	156	Peak	HORIZONTAL																																																													
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Line	Line	Level Factor	Loss Factor	dB	dB	deg																																																																			
1	5182.00	105.45	37.15	68.30	91.62	35.04	10.69	31.82	325	156	Peak	HORIZONTAL																																																													
2	5182.00	97.97			84.04	35.06	10.69	31.82	325	156	Average	HORIZONTAL																																																													
<b>Avg.</b>	<p>Site : 030806-KS Condition : SG BAND 1-3 (AVG) @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000.0000MHz VBR 0.0200MHz SWT Auto Mode : (FR) 102106-01 ME1 : 10 Plane : #12 EIF-BASE1 Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Line</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>47.22</td> <td>-6.78</td> <td>54.00</td> <td>33.35</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>325</td> <td>156</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	Line	Line	Level Factor	Loss Factor	dB	dB	deg		1	5150.00	47.22	-6.78	54.00	33.35	35.03	10.65	31.81	325	156	Average	HORIZONTAL	<b>Left blank</b>																																										
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Line	Line	Level Factor	Loss Factor	dB	dB	deg																																																																			
1	5150.00	47.22	-6.78	54.00	33.35	35.03	10.65	31.81	325	156	Average	HORIZONTAL																																																													



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																						
ANT	802.11ac VHT20 CH36 5180MHz																																																																						
1	Vertical	Fundamental																																																																					
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1----3 In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 10 Plane : #12 E1F-BASE1 Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5142.72</td> <td>65.52</td> <td>-8.48</td> <td>74.00</td> <td>51.65</td> <td>35.01</td> <td>10.65</td> <td>31.79</td> <td>128</td> <td>184 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	deg	deg	deg	1 5142.72	65.52	-8.48	74.00	51.65	35.01	10.65	31.79	128	184 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1----3 In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 10 Plane : #12 E1F-BASE1 Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5182.00</td> <td>110.42</td> <td>42.32</td> <td>68.30</td> <td>96.69</td> <td>35.06</td> <td>10.69</td> <td>31.82</td> <td>128</td> <td>184 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 5182.00</td> <td>102.99</td> <td>-----</td> <td>-----</td> <td>89.06</td> <td>35.06</td> <td>10.69</td> <td>31.82</td> <td>128</td> <td>184 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	deg	deg	deg	1 * 5182.00	110.42	42.32	68.30	96.69	35.06	10.69	31.82	128	184 Peak	VERTICAL	2 5182.00	102.99	-----	-----	89.06	35.06	10.69	31.82	128	184 Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dB	dB	deg	deg	deg																																																															
1 5142.72	65.52	-8.48	74.00	51.65	35.01	10.65	31.79	128	184 Peak	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dB	dB	deg	deg	deg																																																															
1 * 5182.00	110.42	42.32	68.30	96.69	35.06	10.69	31.82	128	184 Peak	VERTICAL																																																													
2 5182.00	102.99	-----	-----	89.06	35.06	10.69	31.82	128	184 Average	VERTICAL																																																													
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1----3 (AVG) In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:0,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 10 Plane : #12 E1F-BASE1 Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5150.00</td> <td>49.55</td> <td>-4.45</td> <td>54.00</td> <td>35.68</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>128</td> <td>184 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	deg	deg	deg	1 5150.00	49.55	-4.45	54.00	35.68	35.03	10.65	31.81	128	184 Average	VERTICAL	Left blank																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBV/m	dB	dBV/m	dB	dB	deg	deg	deg																																																															
1 5150.00	49.55	-4.45	54.00	35.68	35.03	10.65	31.81	128	184 Average	VERTICAL																																																													



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																											
ANT	802.11ac VHT20 CH44 5220MHz - L																																																																											
1	Horizontal	Fundamental																																																																										
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FR1:102106-01 Mode : 11 MSEI : #39 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5128.64</td> <td>57.92</td> <td>-16.08</td> <td>74.00</td> <td>44.07</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>100</td> <td>299</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	5128.64	57.92	-16.08	74.00	44.07	35.01	10.63	31.79	100	299	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FR1:102106-01 Mode : 11 MSEI : #39 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5218.00</td> <td>107.21</td> <td>39.01</td> <td>68.30</td> <td>93.34</td> <td>35.09</td> <td>10.72</td> <td>31.84</td> <td>100</td> <td>299</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5218.00</td> <td>99.99</td> <td>-----</td> <td>86.01</td> <td>35.09</td> <td>10.72</td> <td>31.84</td> <td>100</td> <td>299</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	5218.00	107.21	39.01	68.30	93.34	35.09	10.72	31.84	100	299	Peak	HORIZONTAL	2	5218.00	99.99	-----	86.01	35.09	10.72	31.84	100	299	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																																					
1	5128.64	57.92	-16.08	74.00	44.07	35.01	10.63	31.79	100	299	Peak	HORIZONTAL																																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																																					
1	5218.00	107.21	39.01	68.30	93.34	35.09	10.72	31.84	100	299	Peak	HORIZONTAL																																																																
2	5218.00	99.99	-----	86.01	35.09	10.72	31.84	100	299	Average	HORIZONTAL																																																																	
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FR1:102106-01 Mode : 11 MSEI : #39 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5123.28</td> <td>47.61</td> <td>-6.39</td> <td>54.00</td> <td>33.76</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>100</td> <td>299</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	5123.28	47.61	-6.39	54.00	33.76	35.01	10.63	31.79	100	299	Average	HORIZONTAL	<p><b>Left blank</b></p>																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																																																																					
1	5123.28	47.61	-6.39	54.00	33.76	35.01	10.63	31.79	100	299	Average	HORIZONTAL																																																																



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11ac VHT20 CH44 5220MHz - R																																
1	Horizontal	Fundamental																															
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1----3 In 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 3000, 0000Hz, SMT: Auto FR1: 102106-01 Mod : 11 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.82</td> <td>55.49</td> <td>-18.51</td> <td>74.00</td> <td>41.42</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>100</td> <td>299</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg		1	5354.82	55.49	-18.51	74.00	41.42	35.22	10.78	31.93	100	299	Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																										
1	5354.82	55.49	-18.51	74.00	41.42	35.22	10.78	31.93	100	299	Peak	HORIZONTAL																					
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1----3 (AVG) In 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 0, 0000Hz, SMT: Auto FR1: 102106-01 Mod : 11 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5369.22</td> <td>46.18</td> <td>-7.82</td> <td>54.00</td> <td>32.08</td> <td>35.24</td> <td>10.79</td> <td>31.93</td> <td>100</td> <td>299</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg		1	5369.22	46.18	-7.82	54.00	32.08	35.24	10.79	31.93	100	299	Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																										
1	5369.22	46.18	-7.82	54.00	32.08	35.24	10.79	31.93	100	299	Average	HORIZONTAL																					






WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																																
ANT	802.11ac VHT20 CH44 5220MHz - L																																																																																
1	Vertical	Fundamental																																																																															
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102100-01 Mode : 11 MEI : #3F EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>PowerSetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5103.52</td> <td>58.66</td> <td>-15.35</td> <td>74.00</td> <td>44.86</td> <td>34.98</td> <td>10.59</td> <td>31.78</td> <td>182</td> <td>231</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dB	dB	cm	deg			1	5103.52	58.66	-15.35	74.00	44.86	34.98	10.59	31.78	182	231	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102100-01 Mode : 11 MEI : #3F EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>PowerSetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5218.00</td> <td>111.50</td> <td>43.20</td> <td>68.30</td> <td>97.53</td> <td>35.09</td> <td>10.72</td> <td>31.84</td> <td>182</td> <td>231</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5218.00</td> <td>104.51</td> <td>-----</td> <td>-----</td> <td>90.54</td> <td>35.09</td> <td>10.72</td> <td>31.84</td> <td>182</td> <td>231</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dB	dB	cm	deg			1	5218.00	111.50	43.20	68.30	97.53	35.09	10.72	31.84	182	231	Peak	VERTICAL	2	5218.00	104.51	-----	-----	90.54	35.09	10.72	31.84	182	231	Average	VERTICAL
PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBm/100m	dB	dBm/100m	dB	dB	cm	deg																																																																										
1	5103.52	58.66	-15.35	74.00	44.86	34.98	10.59	31.78	182	231	Peak	VERTICAL																																																																					
PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBm/100m	dB	dBm/100m	dB	dB	cm	deg																																																																										
1	5218.00	111.50	43.20	68.30	97.53	35.09	10.72	31.84	182	231	Peak	VERTICAL																																																																					
2	5218.00	104.51	-----	-----	90.54	35.09	10.72	31.84	182	231	Average	VERTICAL																																																																					
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102100-01 Mode : 11 MEI : #3F EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>PowerSetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.92</td> <td>48.90</td> <td>-5.10</td> <td>54.00</td> <td>35.03</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>182</td> <td>231</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dB	dB	cm	deg			1	5145.92	48.90	-5.10	54.00	35.03	35.03	10.65	31.81	182	231	Average	VERTICAL	Left blank																																														
PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBm/100m	dB	dBm/100m	dB	dB	cm	deg																																																																										
1	5145.92	48.90	-5.10	54.00	35.03	35.03	10.65	31.81	182	231	Average	VERTICAL																																																																					



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																									
ANT	802.11ac VHT20 CH44 5220MHz - R																																									
1	Vertical	Fundamental																																								
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1---3 In 3117 SN 00218642 VERTICAL Project : RRM 1000.000MHz VSW:3000.000kHz SMT:Auto IMEI : (FR)102106-01 Mod : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5364.36</td> <td>55.21</td> <td>-18.79</td> <td>74.00</td> <td>41.13</td> <td>35.22</td> <td>10.79</td> <td>31.93</td> <td>182</td> <td>231</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg	1	5364.36	55.21	-18.79	74.00	41.13	35.22	10.79	31.93	182	231	Peak	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																		
1	5364.36	55.21	-18.79	74.00	41.13	35.22	10.79	31.93	182	231	Peak	VERTICAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1---3 (AVG) In 3117 SN 00218642 VERTICAL Project : RRM 1000.000MHz VSW:3000.000kHz SMT:Auto IMEI : (FR)102106-01 Mod : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.40</td> <td>46.46</td> <td>-7.54</td> <td>54.00</td> <td>32.39</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>182</td> <td>231</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg	1	5351.40	46.46	-7.54	54.00	32.39	35.22	10.78	31.93	182	231	Average	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																		
1	5351.40	46.46	-7.54	54.00	32.39	35.22	10.78	31.93	182	231	Average	VERTICAL																														

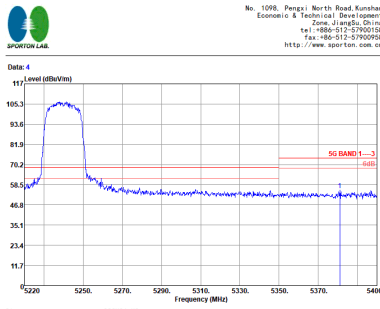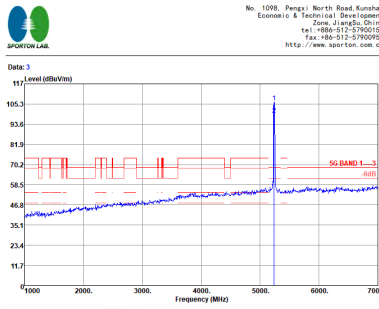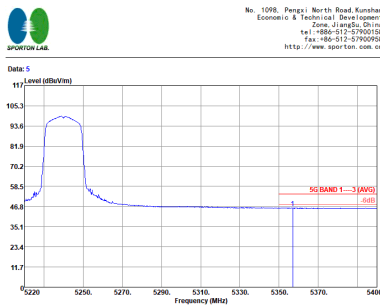

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																					
ANT	802.11ac VHT20 CH48 5240MHz																																																																					
1	Horizontal	Fundamental																																																																				
<p><b>Peak</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : 12 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5381.10</td> <td>55.55</td> <td>-18.45</td> <td>74.00</td> <td>41.46</td> <td>35.24</td> <td>10.80</td> <td>31.95</td> <td>107</td> <td>297</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg	1 5381.10	55.55	-18.45	74.00	41.46	35.24	10.80	31.95	107	297	Peak	HORIZONTAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : 12 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5236.00</td> <td>106.30</td> <td>38.00</td> <td>68.30</td> <td>92.31</td> <td>35.11</td> <td>10.73</td> <td>31.85</td> <td>107</td> <td>297</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5236.00</td> <td>99.04</td> <td>-----</td> <td>85.05</td> <td>35.11</td> <td>10.73</td> <td>31.85</td> <td>107</td> <td>297</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg	1 * 5236.00	106.30	38.00	68.30	92.31	35.11	10.73	31.85	107	297	Peak	HORIZONTAL	2	5236.00	99.04	-----	85.05	35.11	10.73	31.85	107	297	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg																																																															
1 5381.10	55.55	-18.45	74.00	41.46	35.24	10.80	31.95	107	297	Peak	HORIZONTAL																																																											
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg																																																															
1 * 5236.00	106.30	38.00	68.30	92.31	35.11	10.73	31.85	107	297	Peak	HORIZONTAL																																																											
2	5236.00	99.04	-----	85.05	35.11	10.73	31.85	107	297	Average	HORIZONTAL																																																											
<p><b>Avg.</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : 12 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5356.98</td> <td>46.06</td> <td>-7.94</td> <td>54.00</td> <td>31.99</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>107</td> <td>297</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg	1 5356.98	46.06	-7.94	54.00	31.99	35.22	10.78	31.93	107	297	Average	HORIZONTAL	<p><b>Left blank</b></p>																																								
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg																																																															
1 5356.98	46.06	-7.94	54.00	31.99	35.22	10.78	31.93	107	297	Average	HORIZONTAL																																																											







WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																																										
ANT	802.11ac VHT20 CH48 5240MHz																																																																																										
1	Vertical	Fundamental																																																																																									
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 12 MEI : #39 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.08</td> <td>55.89</td> <td>-18.11</td> <td>74.00</td> <td>41.79</td> <td>35.24</td> <td>10.79</td> <td>31.93</td> <td>199</td> <td>202</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	ca	deg	1	5365.08	55.89	-18.11	74.00	41.79	35.24	10.79	31.93	199	202	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 12 MEI : #39 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5242.00</td> <td>110.51</td> <td>42.21</td> <td>68.30</td> <td>96.51</td> <td>35.11</td> <td>10.74</td> <td>31.85</td> <td>199</td> <td>202</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5242.00</td> <td>103.48</td> <td>-----</td> <td>-----</td> <td>89.48</td> <td>35.11</td> <td>10.74</td> <td>31.85</td> <td>199</td> <td>202</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	ca	deg	1	5242.00	110.51	42.21	68.30	96.51	35.11	10.74	31.85	199	202	Peak	VERTICAL	2	5242.00	103.48	-----	-----	89.48	35.11	10.74	31.85	199	202	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	ca	deg																																																																																			
1	5365.08	55.89	-18.11	74.00	41.79	35.24	10.79	31.93	199	202	Peak	VERTICAL																																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	ca	deg																																																																																			
1	5242.00	110.51	42.21	68.30	96.51	35.11	10.74	31.85	199	202	Peak	VERTICAL																																																																															
2	5242.00	103.48	-----	-----	89.48	35.11	10.74	31.85	199	202	Average	VERTICAL																																																																															
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 12 MEI : #39 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5364.04</td> <td>46.68</td> <td>-7.32</td> <td>54.00</td> <td>32.61</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>199</td> <td>202</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	ca	deg	1	5364.04	46.68	-7.32	54.00	32.61	35.22	10.78	31.93	199	202	Average	VERTICAL	Left blank																																																			
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	ca	deg																																																																																			
1	5364.04	46.68	-7.32	54.00	32.61	35.22	10.78	31.93	199	202	Average	VERTICAL																																																																															



**U-NII-1 5150~5250MHz  
WIFI 802.11ac VHT40 (Band Edge @ 3m)**

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																																	
ANT	802.11ac VHT40 CH38 5190MHz - L																																																																																	
1	Horizontal	Fundamental																																																																																
<b>Peak</b>	<p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000KHz VBR 3000.0000KHz SWT Auto Mode: FR1 102106-01 MNF: 19 Plane: #12 EIF-BASE1 Full-directivity: full-directivity Powersetting: 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5128.80</td> <td>58.08</td> <td>-15.92</td> <td>74.00</td> <td>44.23</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>326</td> <td>156 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5128.80	58.08	-15.92	74.00	44.23	35.01	10.63	31.79	326	156 Peak	HORIZONTAL	<p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000KHz VBR 3000.0000KHz SWT Auto Mode: FR1 102106-01 MNF: 19 Plane: #12 EIF-BASE1 Full-directivity: full-directivity Powersetting: 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5188.00</td> <td>99.92</td> <td>31.62</td> <td>68.30</td> <td>85.99</td> <td>35.04</td> <td>10.69</td> <td>31.82</td> <td>326</td> <td>156 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5188.00</td> <td>102.75</td> <td></td> <td></td> <td>78.82</td> <td>35.06</td> <td>10.69</td> <td>31.82</td> <td>326</td> <td>156 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5188.00	99.92	31.62	68.30	85.99	35.04	10.69	31.82	326	156 Peak	HORIZONTAL	2	5188.00	102.75			78.82	35.06	10.69	31.82	326	156 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5128.80	58.08	-15.92	74.00	44.23	35.01	10.63	31.79	326	156 Peak	HORIZONTAL																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5188.00	99.92	31.62	68.30	85.99	35.04	10.69	31.82	326	156 Peak	HORIZONTAL																																																																							
2	5188.00	102.75			78.82	35.06	10.69	31.82	326	156 Average	HORIZONTAL																																																																							
<b>Avg.</b>	<p>Site: 030906-KS Condition: SG BAND 1---3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000KHz VBR 1.0000KHz SWT Auto Mode: FR1 102106-01 MNF: 19 Plane: #12 EIF-BASE1 Full-directivity: full-directivity Powersetting: 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.16</td> <td>47.43</td> <td>-6.57</td> <td>54.00</td> <td>33.56</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>326</td> <td>156 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5148.16	47.43	-6.57	54.00	33.56	35.03	10.65	31.81	326	156 Average	HORIZONTAL	<b>Left blank</b>																																														
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5148.16	47.43	-6.57	54.00	33.56	35.03	10.65	31.81	326	156 Average	HORIZONTAL																																																																							

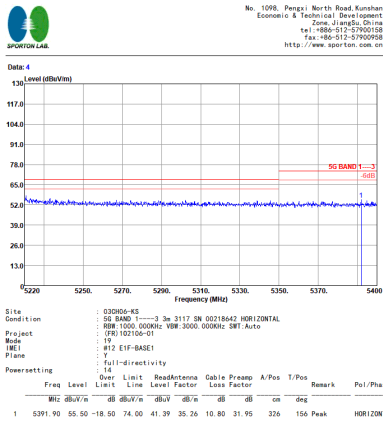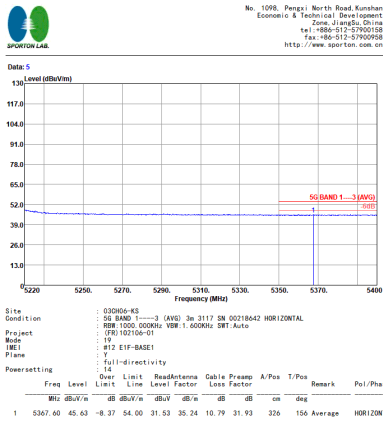

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11ac VHT40 CH38 5190MHz - R																																
1	Horizontal	Fundamental																															
<p><b>Peak</b></p>	 <p>Site : 032005-KS          Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL          Project : RRM 1000 0000Hz VBR 3000 0000Hz SRT:Auto          (FR) 102106-01          Mode : #12 EIF-BASE1          MEI : Y          Plane : Y          Powersetting : 14          Over Limit : 14          ReadAntenna : 14          Cable Preamp : 14          A/Pos : 14          T/Pos : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/10m</th> <th>dB</th> <th>dBm/10m</th> <th>dBm/10m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5391.90</td> <td>55.50</td> <td>-18.50</td> <td>74.00</td> <td>41.39</td> <td>35.26</td> <td>10.80</td> <td>31.95</td> <td>326</td> <td>156 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phas	MHz	dBm/10m	dB	dBm/10m	dBm/10m	dB	dB	dB	cm	deg	1 5391.90	55.50	-18.50	74.00	41.39	35.26	10.80	31.95	326	156 Peak	HORIZONTAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phas																								
MHz	dBm/10m	dB	dBm/10m	dBm/10m	dB	dB	dB	cm	deg																								
1 5391.90	55.50	-18.50	74.00	41.39	35.26	10.80	31.95	326	156 Peak	HORIZONTAL																							
<p><b>Avg.</b></p>	 <p>Site : 032005-KS          Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL          Project : RRM 1000 0000Hz VBR 1 0000Hz SRT:Auto          (FR) 102106-01          Mode : #12 EIF-BASE1          MEI : Y          Plane : Y          Powersetting : 14          Over Limit : 14          ReadAntenna : 14          Cable Preamp : 14          A/Pos : 14          T/Pos : 14</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/10m</th> <th>dB</th> <th>dBm/10m</th> <th>dBm/10m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5367.00</td> <td>45.63</td> <td>-8.37</td> <td>54.00</td> <td>31.53</td> <td>35.24</td> <td>10.79</td> <td>31.93</td> <td>326</td> <td>156 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phas	MHz	dBm/10m	dB	dBm/10m	dBm/10m	dB	dB	dB	cm	deg	1 5367.00	45.63	-8.37	54.00	31.53	35.24	10.79	31.93	326	156 Average	HORIZONTAL	<p>Left blank</p>
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phas																								
MHz	dBm/10m	dB	dBm/10m	dBm/10m	dB	dB	dB	cm	deg																								
1 5367.00	45.63	-8.37	54.00	31.53	35.24	10.79	31.93	326	156 Average	HORIZONTAL																							






WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																													
ANT	802.11ac VHT40 CH38 5190MHz - L																																																																													
1	Vertical	Fundamental																																																																												
<b>Peak</b>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : 5G BAND 1-3 @ 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FR1:102106-01 Mode : 1P MEI : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5110.40</td> <td>58.69</td> <td>-15.31</td> <td>74.00</td> <td>44.86</td> <td>35.00</td> <td>10.41</td> <td>31.78</td> <td>258</td> <td>341</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	5110.40	58.69	-15.31	74.00	44.86	35.00	10.41	31.78	258	341	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : 5G BAND 1-3 @ 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FR1:102106-01 Mode : 1P MEI : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5194.00</td> <td>104.58</td> <td>36.29</td> <td>68.30</td> <td>90.43</td> <td>35.00</td> <td>10.71</td> <td>31.82</td> <td>258</td> <td>341</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5194.00</td> <td>97.25</td> <td>-----</td> <td>83.30</td> <td>35.00</td> <td>10.71</td> <td>31.82</td> <td>258</td> <td>341</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	5194.00	104.58	36.29	68.30	90.43	35.00	10.71	31.82	258	341	Peak	VERTICAL	2	5194.00	97.25	-----	83.30	35.00	10.71	31.82	258	341	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																					
1	5110.40	58.69	-15.31	74.00	44.86	35.00	10.41	31.78	258	341	Peak	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																					
1	5194.00	104.58	36.29	68.30	90.43	35.00	10.71	31.82	258	341	Peak	VERTICAL																																																																		
2	5194.00	97.25	-----	83.30	35.00	10.71	31.82	258	341	Average	VERTICAL																																																																			
<b>Avg.</b>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:1,000kHz SRT:Auto FR1:102106-01 Mode : 1P MEI : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.12</td> <td>48.88</td> <td>-5.12</td> <td>54.00</td> <td>35.01</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>258</td> <td>341</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	5149.12	48.88	-5.12	54.00	35.01	35.03	10.65	31.81	258	341	Average	VERTICAL	<b>Left blank</b>																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																					
1	5149.12	48.88	-5.12	54.00	35.01	35.03	10.65	31.81	258	341	Average	VERTICAL																																																																		



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																
ANT	802.11ac VHT40 CH38 5190MHz - R																																
1	Vertical	Fundamental																															
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : RRM 1000 0000Hz VBR 3000 0000Hz SRT:Auto Freq 102100-01 Mod : #12 EIF-BASE1 IMEI : Plane : Y Powersetting : full-directivity 18</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dBm/100m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5392.62</td> <td>55.80</td> <td>-18.20</td> <td>74.00</td> <td>41.69</td> <td>35.26</td> <td>10.80</td> <td>31.95</td> <td>258</td> <td>341</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	cm	deg		1	5392.62	55.80	-18.20	74.00	41.69	35.26	10.80	31.95	258	341	Peak	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	cm	deg																										
1	5392.62	55.80	-18.20	74.00	41.69	35.26	10.80	31.95	258	341	Peak	VERTICAL																					
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1---3 (AVG) 3m 3117 SN 00218642 VERTICAL Project : RRM 1000 0000Hz VBR 1 0000Hz SRT:Auto Freq 102100-01 Mod : #12 EIF-BASE1 IMEI : Plane : Y Powersetting : full-directivity 18</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dBm/100m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5375.70</td> <td>45.69</td> <td>-8.31</td> <td>54.00</td> <td>31.61</td> <td>35.24</td> <td>10.79</td> <td>31.95</td> <td>258</td> <td>341</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	cm	deg		1	5375.70	45.69	-8.31	54.00	31.61	35.24	10.79	31.95	258	341	Average	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBm/100m	dB	dBm/100m	dBm/100m	dB	cm	deg																										
1	5375.70	45.69	-8.31	54.00	31.61	35.24	10.79	31.95	258	341	Average	VERTICAL																					

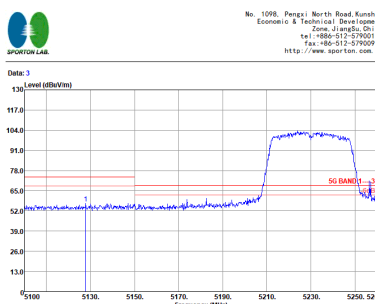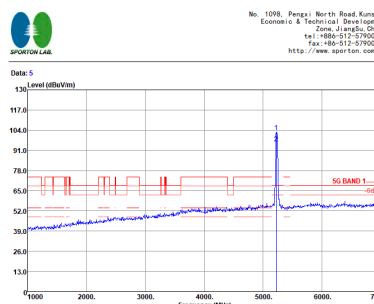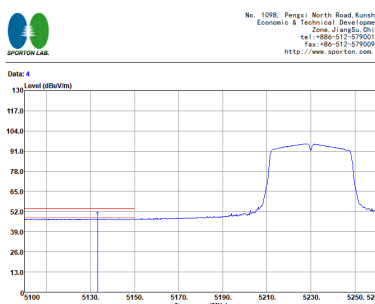

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																							
ANT	802.11ac VHT40 CH46 5230MHz - L																																																																							
1	Horizontal	Fundamental																																																																						
<p><b>Peak</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : 20 MEI : #3F EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5127.84</td> <td>56.83</td> <td>-17.17</td> <td>74.00</td> <td>42.98</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>100</td> <td>303 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	cm	deg	1 5127.84	56.83	-17.17	74.00	42.98	35.01	10.63	31.79	100	303 Peak	HORIZONTAL	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : 20 MEI : #3F EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5224.00</td> <td>102.74</td> <td>34.44</td> <td>68.30</td> <td>88.78</td> <td>35.09</td> <td>10.72</td> <td>31.85</td> <td>100</td> <td>303 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5224.00</td> <td>95.61</td> <td>-----</td> <td>81.65</td> <td>35.09</td> <td>10.72</td> <td>31.85</td> <td>100</td> <td>303 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	cm	deg	1 *	5224.00	102.74	34.44	68.30	88.78	35.09	10.72	31.85	100	303 Peak	HORIZONTAL	2	5224.00	95.61	-----	81.65	35.09	10.72	31.85	100	303 Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	cm	deg																																																																
1 5127.84	56.83	-17.17	74.00	42.98	35.01	10.63	31.79	100	303 Peak	HORIZONTAL																																																														
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	cm	deg																																																																
1 *	5224.00	102.74	34.44	68.30	88.78	35.09	10.72	31.85	100	303 Peak	HORIZONTAL																																																													
2	5224.00	95.61	-----	81.65	35.09	10.72	31.85	100	303 Average	HORIZONTAL																																																														
<p><b>Avg.</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : 20 MEI : #3F EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5133.28</td> <td>47.42</td> <td>-6.58</td> <td>54.00</td> <td>33.57</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>100</td> <td>303 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	cm	deg	1	5133.28	47.42	-6.58	54.00	33.57	35.01	10.63	31.79	100	303 Average	HORIZONTAL	<p><b>Left blank</b></p>																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	cm	deg																																																																
1	5133.28	47.42	-6.58	54.00	33.57	35.01	10.63	31.79	100	303 Average	HORIZONTAL																																																													



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																									
ANT	802.11ac VHT40 CH46 5230MHz - R																																									
1	Horizontal	Fundamental																																								
<p><b>Peak</b></p>	<p>Site : 032805-KS          Condition : 5G BAND 1----3 3m 3117 SN 00218642 HORIZONTAL          Project : RRM 1000 000000 VBR 3000 000000 SRT:Auto          (FR) 102106-01          Mode : 20          MEI : #39 EIF-BASE1          Plane : Y          Powersetting : full-directivity          10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.58</td> <td>54.61</td> <td>-19.29</td> <td>74.00</td> <td>40.54</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>100</td> <td>303</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Loss	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	dB	deg	1	5351.58	54.61	-19.29	74.00	40.54	35.22	10.78	31.93	100	303	Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Loss																																		
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	dB	deg																																		
1	5351.58	54.61	-19.29	74.00	40.54	35.22	10.78	31.93	100	303	Peak	HORIZONTAL																														
<p><b>Avg.</b></p>	<p>Site : 032805-KS          Condition : 5G BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL          Project : RRM 1000 000000 VBR 1 000000 SRT:Auto          (FR) 102106-01          Mode : 20          MEI : #39 EIF-BASE1          Plane : Y          Powersetting : full-directivity          10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5373.54</td> <td>46.29</td> <td>-7.71</td> <td>54.00</td> <td>32.21</td> <td>35.24</td> <td>10.79</td> <td>31.95</td> <td>100</td> <td>303</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Loss	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	dB	deg	1	5373.54	46.29	-7.71	54.00	32.21	35.24	10.79	31.95	100	303	Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Loss																																		
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	dB	deg																																		
1	5373.54	46.29	-7.71	54.00	32.21	35.24	10.79	31.95	100	303	Average	HORIZONTAL																														



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																																														
ANT	802.11ac VHT40 CH46 5230MHz - L																																																																																														
1	Vertical	Fundamental																																																																																													
Peak	<p>Site : 030906-KS            Condition : 5G BAND 1----3 3m 3117 SN 00218442 VERTICAL            Project : RRM-1000_000MHz_VBR-3000_000MHz_SRT-Auto            Mode : FR1-102106-01            MEI : #39 EIF-BASE1            Plane : full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.44</td> <td>58.92</td> <td>-15.08</td> <td>74.00</td> <td>45.05</td> <td>35.01</td> <td>10.65</td> <td>31.79</td> <td>219</td> <td>213</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	1	5141.44	58.92	-15.08	74.00	45.05	35.01	10.65	31.79	219	213	Peak	VERTICAL	<p>Site : 030906-KS            Condition : 5G BAND 1----3 3m 3117 SN 00218442 VERTICAL            Project : RRM-1000_000MHz_VBR-3000_000MHz_SRT-Auto            Mode : FR1-102106-01            MEI : #39 EIF-BASE1            Plane : full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>102.76</td> <td>39.46</td> <td>68.30</td> <td>93.77</td> <td>35.11</td> <td>10.73</td> <td>31.85</td> <td>219</td> <td>213</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5230.00</td> <td>100.81</td> <td>-----</td> <td>-----</td> <td>86.82</td> <td>35.11</td> <td>10.73</td> <td>31.85</td> <td>219</td> <td>213</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	1	5230.00	102.76	39.46	68.30	93.77	35.11	10.73	31.85	219	213	Peak	VERTICAL	2	5230.00	100.81	-----	-----	86.82	35.11	10.73	31.85	219	213	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																							
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg																																																																																							
1	5141.44	58.92	-15.08	74.00	45.05	35.01	10.65	31.79	219	213	Peak	VERTICAL																																																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																							
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg																																																																																							
1	5230.00	102.76	39.46	68.30	93.77	35.11	10.73	31.85	219	213	Peak	VERTICAL																																																																																			
2	5230.00	100.81	-----	-----	86.82	35.11	10.73	31.85	219	213	Average	VERTICAL																																																																																			
Avg.	<p>Site : 030906-KS            Condition : 5G BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL            Project : RRM-1000_000MHz_VBR-1_000MHz_SRT-Auto            Mode : FR1-102106-01            MEI : #39 EIF-BASE1            Plane : full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.84</td> <td>48.99</td> <td>-5.01</td> <td>54.00</td> <td>35.12</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>219</td> <td>213</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	1	5147.84	48.99	-5.01	54.00	35.12	35.03	10.65	31.81	219	213	Average	VERTICAL	Left blank																																																					
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																							
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg																																																																																							
1	5147.84	48.99	-5.01	54.00	35.12	35.03	10.65	31.81	219	213	Average	VERTICAL																																																																																			





WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																							
ANT	802.11ac VHT40 CH46 5230MHz - R																																							
1	Vertical	Fundamental																																						
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site: 032805-KS Condition: 5G BAND 1----3 3m 3117 SN 00218642 VERTICAL Project: RRM 1000, 0000Hz, VBR 3000, 0000Hz, SRT: Auto FR1: 102106-01 Mode: 20 MEI: #39 EIF-BASE1 Plane: Y Powersetting: full-directivity 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5378.24</td> <td>56.53</td> <td>-12.47</td> <td>74.00</td> <td>42.45</td> <td>35.24</td> <td>10.79</td> <td>31.95</td> <td>219</td> <td>213 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg	1 5378.24	56.53	-12.47	74.00	42.45	35.24	10.79	31.95	219	213 Peak	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																
MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg																																
1 5378.24	56.53	-12.47	74.00	42.45	35.24	10.79	31.95	219	213 Peak	VERTICAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site: 032805-KS Condition: 5G BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Project: RRM 1000, 0000Hz, VBR 1, 0000Hz, SRT: Auto FR1: 102106-01 Mode: 20 MEI: #39 EIF-BASE1 Plane: Y Powersetting: full-directivity 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5378.76</td> <td>46.91</td> <td>-7.09</td> <td>54.00</td> <td>32.82</td> <td>35.24</td> <td>10.80</td> <td>31.95</td> <td>219</td> <td>213 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg	1 5378.76	46.91	-7.09	54.00	32.82	35.24	10.80	31.95	219	213 Average	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																
MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg																																
1 5378.76	46.91	-7.09	54.00	32.82	35.24	10.80	31.95	219	213 Average	VERTICAL																														



**U-NII-1 5150~5250MHz  
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																																																																	
ANT	802.11ac VHT80 CH42 5210MHz - L																																																																																	
1	Horizontal	Fundamental																																																																																
<b>Peak</b>	<p><b>Horizontal</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000KHz VBR 3000.0000KHz SWT Auto Mode: FR1 102106-01 MFE: 26 Plane: #12 EIF-BASE1 Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.80</td> <td>56.79</td> <td>-17.21</td> <td>74.00</td> <td>42.92</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>320</td> <td>55 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBm	dB	dB	on	deg			1	5144.80	56.79	-17.21	74.00	42.92	35.03	10.65	31.81	320	55 Peak	HORIZONTAL	<p><b>Fundamental</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000KHz VBR 3000.0000KHz SWT Auto Mode: FR1 102106-01 MFE: 26 Plane: #12 EIF-BASE1 Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5206.00</td> <td>91.92</td> <td>23.62</td> <td>68.30</td> <td>77.92</td> <td>35.08</td> <td>10.71</td> <td>31.84</td> <td>320</td> <td>55 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5206.00</td> <td>84.07</td> <td></td> <td></td> <td>70.72</td> <td>35.08</td> <td>10.71</td> <td>31.84</td> <td>320</td> <td>55 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBm	dB	dB	on	deg			1	5206.00	91.92	23.62	68.30	77.92	35.08	10.71	31.84	320	55 Peak	HORIZONTAL	2	5206.00	84.07			70.72	35.08	10.71	31.84	320	55 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBm	dB	dB	on	deg																																																																										
1	5144.80	56.79	-17.21	74.00	42.92	35.03	10.65	31.81	320	55 Peak	HORIZONTAL																																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBm	dB	dB	on	deg																																																																										
1	5206.00	91.92	23.62	68.30	77.92	35.08	10.71	31.84	320	55 Peak	HORIZONTAL																																																																							
2	5206.00	84.07			70.72	35.08	10.71	31.84	320	55 Average	HORIZONTAL																																																																							
<b>Avg.</b>	<p><b>Horizontal</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000KHz VBR 3.3000KHz SWT Auto Mode: FR1 102106-01 MFE: 26 Plane: #12 EIF-BASE1 Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.96</td> <td>47.20</td> <td>-6.80</td> <td>54.00</td> <td>33.33</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>320</td> <td>55 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBm	dB	dB	on	deg			1	5148.96	47.20	-6.80	54.00	33.33	35.03	10.65	31.81	320	55 Average	HORIZONTAL	<b>Left blank</b>																																														
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dBm	dB	dB	on	deg																																																																										
1	5148.96	47.20	-6.80	54.00	33.33	35.03	10.65	31.81	320	55 Average	HORIZONTAL																																																																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																									
ANT	802.11ac VHT80 CH42 5210MHz - R																																									
1	Horizontal	Fundamental																																								
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 14</p> <p>Site: 032805-KS Condition: 5G BAND 1---3 3m 3117 SN 00218642 HORIZONTAL RFR: 1000, 0000Hz, VSW: 3.000Hz, SWI: Auto Project: (FR) 102106-01 Mod: 25 MEI: #12 EIF-BASE1 Plane: Y Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.62</td> <td>54.57</td> <td>-19.43</td> <td>74.00</td> <td>40.50</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>320</td> <td>55</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg	1	5356.62	54.57	-19.43	74.00	40.50	35.22	10.78	31.93	320	55	Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg																																		
1	5356.62	54.57	-19.43	74.00	40.50	35.22	10.78	31.93	320	55	Peak	HORIZONTAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 15</p> <p>Site: 032805-KS Condition: 5G BAND 1---3 (AVG) 3m 3117 SN 00218642 HORIZONTAL RFR: 1000, 0000Hz, VSW: 3.3000Hz, SWI: Auto Project: (FR) 102106-01 Mod: 25 MEI: #12 EIF-BASE1 Plane: Y Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5389.02</td> <td>45.93</td> <td>-8.07</td> <td>54.00</td> <td>31.82</td> <td>35.26</td> <td>10.80</td> <td>31.95</td> <td>320</td> <td>55</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg	1	5389.02	45.93	-8.07	54.00	31.82	35.26	10.80	31.95	320	55	Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg																																		
1	5389.02	45.93	-8.07	54.00	31.82	35.26	10.80	31.95	320	55	Average	HORIZONTAL																														



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m																																							
ANT	802.11ac VHT80 CH42 5210MHz - L																																							
1	Vertical	Fundamental																																						
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto IMEI : FRS102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5142.40 59.64 -14.36 74.00 45.77 35.01 10.65 31.79 214 283 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBμV/m	dB	dBμV/m	dB	cm	deg			1 5142.40 59.64 -14.36 74.00 45.77 35.01 10.65 31.79 214 283 Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto IMEI : FRS102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 5206.00 109.46 32.16 68.30 86.51 35.08 10.71 31.84 214 283 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 5206.00 93.43 ----- 79.48 35.08 10.71 31.84 214 283 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBμV/m	dB	dBμV/m	dB	cm	deg			1 * 5206.00 109.46 32.16 68.30 86.51 35.08 10.71 31.84 214 283 Peak	VERTICAL	2 5206.00 93.43 ----- 79.48 35.08 10.71 31.84 214 283 Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
dBμV/m	dB	dBμV/m	dB	cm	deg																																			
1 5142.40 59.64 -14.36 74.00 45.77 35.01 10.65 31.79 214 283 Peak	VERTICAL																																							
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
dBμV/m	dB	dBμV/m	dB	cm	deg																																			
1 * 5206.00 109.46 32.16 68.30 86.51 35.08 10.71 31.84 214 283 Peak	VERTICAL																																							
2 5206.00 93.43 ----- 79.48 35.08 10.71 31.84 214 283 Average	VERTICAL																																							
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000.000kHz VBW:3.3000kHz SMT:Auto IMEI : FRS102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5149.44 50.52 -3.48 54.00 36.65 35.03 10.65 31.81 214 283 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBμV/m	dB	dBμV/m	dB	cm	deg			1 5149.44 50.52 -3.48 54.00 36.65 35.03 10.65 31.81 214 283 Average	VERTICAL	Left blank																				
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
dBμV/m	dB	dBμV/m	dB	cm	deg																																			
1 5149.44 50.52 -3.48 54.00 36.65 35.03 10.65 31.81 214 283 Average	VERTICAL																																							



WIFI	U-NII-1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT80 CH42 5210MHz - R	
1	Vertical	Fundamental
<p><b>Peak</b></p>		<p>Left blank</p>
<p><b>Avg.</b></p>		<p>Left blank</p>



U-NII-1 - 5150~5250MHz  
WIFI 802.11a (Harmonic @ 3m)

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																													
ANT	802.11a CH36 5180MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03006-KS Condition : 5G BAND 1-3 @ 3117 SW 00318642 HORIZONTAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mod : FRS 102106-01 Site : #12 EIF-BASE1 Plane : Full-directivity Power setting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.21</td> <td>-22.09</td> <td>46.30</td> <td>53.20</td> <td>38.32</td> <td>15.37</td> <td>40.68</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Line	Level	Loss	Factor	Factor	dB	deg	1	10360.00	44.21	-22.09	46.30	53.20	38.32	15.37	40.68	300	0 Peak	HORIZONTAL	<p>Site : 03006-KS Condition : 5G BAND 1-3 @ 3117 SW 00318642 VERTICAL Project : RRM 1000.000kHz VBR 3000.000kHz SRT:Auto Mod : FRS 102106-01 Site : #12 EIF-BASE1 Plane : Full-directivity Power setting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>47.07</td> <td>-21.23</td> <td>48.30</td> <td>54.06</td> <td>38.32</td> <td>15.37</td> <td>40.68</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Line	Level	Loss	Factor	Factor	dB	deg	1	10360.00	47.07	-21.23	48.30	54.06	38.32	15.37	40.68	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Level	Level	Line	Level	Loss	Factor	Factor	dB	deg																																																						
1	10360.00	44.21	-22.09	46.30	53.20	38.32	15.37	40.68	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Level	Level	Line	Level	Loss	Factor	Factor	dB	deg																																																						
1	10360.00	47.07	-21.23	48.30	54.06	38.32	15.37	40.68	100	0 Peak	VERTICAL																																																			



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																													
ANT	802.11a CH44 5220MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117 SN 00218642 HORIZONTAL            Project : RRM-1000-000KHz VBR-3000-000KHz SRT-Auto            Mode : FR102106-01            Band : 2            Plane : E1F-BASE1            Full-directivity : y            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.42</td> <td>-21.88</td> <td>68.30</td> <td>53.32</td> <td>38.34</td> <td>15.42</td> <td>60.66</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10440.00	46.42	-21.88	68.30	53.32	38.34	15.42	60.66	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117 SN 00218642 VERTICAL            Project : RRM-1000-000KHz VBR-3000-000KHz SRT-Auto            Mode : FR102106-01            Band : 2            Plane : E1F-BASE1            Full-directivity : y            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.54</td> <td>-21.76</td> <td>68.30</td> <td>53.44</td> <td>38.34</td> <td>15.42</td> <td>60.66</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10440.00	46.54	-21.76	68.30	53.44	38.34	15.42	60.66	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	10440.00	46.42	-21.88	68.30	53.32	38.34	15.42	60.66	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	10440.00	46.54	-21.76	68.30	53.44	38.34	15.42	60.66	100	0 Peak	VERTICAL																																																			



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																													
ANT	802.11a CH48 5240MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03906-KS            Condition : 5G BAND 1-3 @ 3117.5N 00218A42 HORIZONTAL            Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto            Mode : FR102106-01            Band : 3            EIRP : E1F-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.50</td> <td>-21.80</td> <td>68.30</td> <td>53.33</td> <td>38.36</td> <td>15.46</td> <td>60.65</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10480.00	46.50	-21.80	68.30	53.33	38.36	15.46	60.65	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS            Condition : 5G BAND 1-3 @ 3117.5N 00218A42 VERTICAL            Project : RRM-1000.000KHz VBR-3000.000KHz SRT-Auto            Mode : FR102106-01            Band : 3            EIRP : E1F-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.14</td> <td>-21.16</td> <td>68.30</td> <td>53.97</td> <td>38.36</td> <td>15.46</td> <td>60.65</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10480.00	47.14	-21.16	68.30	53.97	38.36	15.46	60.65	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	10480.00	46.50	-21.80	68.30	53.33	38.36	15.46	60.65	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	10480.00	47.14	-21.16	68.30	53.97	38.36	15.46	60.65	100	0 Peak	VERTICAL																																																			





**U-NII-1 5150~5250MHz  
WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT20 CH36 5180MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project : R081000-000000-V08-3000-000000-08T-Auto Mode : (FR) 102106-01 ME1 : 10 Plane : #12 E1F-BASE1 Powersetting : full-directivity T : 1</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.99</td> <td>-22.31</td> <td>68.30</td> <td>54.17</td> <td>38.32</td> <td>15.37</td> <td>61.87</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cn	deg		1 10360.00	45.99	-22.31	68.30	54.17	38.32	15.37	61.87	300	0 Peak HORIZONTAL	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : R081000-000000-V08-3000-000000-08T-Auto Mode : (FR) 102106-01 ME1 : 10 Plane : #12 E1F-BASE1 Powersetting : full-directivity T : 1</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>46.17</td> <td>-22.13</td> <td>68.30</td> <td>54.35</td> <td>38.32</td> <td>15.37</td> <td>61.87</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cn	deg		1 10360.00	46.17	-22.13	68.30	54.35	38.32	15.37	61.87	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cn	deg																																																						
1 10360.00	45.99	-22.31	68.30	54.17	38.32	15.37	61.87	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	cn	deg																																																						
1 10360.00	46.17	-22.13	68.30	54.35	38.32	15.37	61.87	100	0 Peak VERTICAL																																																					



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																												
ANT	802.11ac VHT20 CH44 5220MHz																																																												
1	Horizontal	Vertical																																																											
Peak Avg.	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117.5N 00218442 HORIZONTAL            Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto            Mode : FFS102106-01            Plane : 11            Power setting : 16</p>	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117.5N 00218442 VERTICAL            Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto            Mode : FFS102106-01            Plane : 11            Power setting : 16</p>																																																											
	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.15</td> <td>-21.15</td> <td>68.30</td> <td>55.13</td> <td>38.34</td> <td>15.42</td> <td>61.74</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg	1	10440.00	47.15	-21.15	68.30	55.13	38.34	15.42	61.74	300	0 Peak	HORIZONTAL	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>47.50</td> <td>-20.80</td> <td>68.30</td> <td>55.48</td> <td>38.34</td> <td>15.42</td> <td>61.74</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg	1	10440.00	47.50	-20.80	68.30	55.48	38.34	15.42	61.74	100	0 Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg																																																					
1	10440.00	47.15	-21.15	68.30	55.13	38.34	15.42	61.74	300	0 Peak	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg																																																					
1	10440.00	47.50	-20.80	68.30	55.48	38.34	15.42	61.74	100	0 Peak	VERTICAL																																																		



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																												
ANT	802.11ac VHT20 CH48 5240MHz																																																												
1	Horizontal	Vertical																																																											
Peak Avg.	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117.5N 00218442 HORIZONTAL            Project : RBW:1000.000kHz VBR:3000.000kHz SRT:Auto            Mode : FFS102106-01            Plane : #12 E1F-BASE1            Powersetting : full-directivity</p>	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117.5N 00218442 VERTICAL            Project : RBW:1000.000kHz VBR:3000.000kHz SRT:Auto            Mode : FFS102106-01            Plane : #12 E1F-BASE1            Powersetting : full-directivity</p>																																																											
	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.48</td> <td>-21.82</td> <td>68.30</td> <td>54.31</td> <td>38.36</td> <td>15.46</td> <td>61.65</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10480.00	46.48	-21.82	68.30	54.31	38.36	15.46	61.65	300	0 Peak	HORIZONTAL	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.53</td> <td>-20.77</td> <td>68.30</td> <td>55.36</td> <td>38.36</td> <td>15.46</td> <td>61.65</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10480.00	47.53	-20.77	68.30	55.36	38.36	15.46	61.65	100	0 Peak
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																					
1	10480.00	46.48	-21.82	68.30	54.31	38.36	15.46	61.65	300	0 Peak	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																					
1	10480.00	47.53	-20.77	68.30	55.36	38.36	15.46	61.65	100	0 Peak	VERTICAL																																																		



**U-NII-1 5150~5250MHz  
WIFI 802.11ac VHT40(Harmonic @ 3m)**

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT40 CH38 5190MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 030004-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 HORIZONTAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : (FR) 102106-01 ME1 : 19 Plane : #12 E1F-BASE1 Powersetting : full-directivity T : 1</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>47.37</td> <td>-20.93</td> <td>68.30</td> <td>55.49</td> <td>38.33</td> <td>15.39</td> <td>61.84</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1 10380.00	47.37	-20.93	68.30	55.49	38.33	15.39	61.84	300	0 Peak HORIZONTAL	<p>Site : 030004-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 VERTICAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : (FR) 102106-01 ME1 : 19 Plane : #12 E1F-BASE1 Powersetting : full-directivity T : 1</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10380.00</td> <td>45.91</td> <td>-22.39</td> <td>68.30</td> <td>54.03</td> <td>38.33</td> <td>15.39</td> <td>61.84</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1 10380.00	45.91	-22.39	68.30	54.03	38.33	15.39	61.84	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																					
1 10380.00	47.37	-20.93	68.30	55.49	38.33	15.39	61.84	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																					
1 10380.00	45.91	-22.39	68.30	54.03	38.33	15.39	61.84	100	0 Peak VERTICAL																																																					



WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT40 CH46 5230MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : 5G BAND 1-3 @ 3117.5N 00218442 HORIZONTAL Project : FR102106-01 Mode : 20 MEI : #12 E1F-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.79</td> <td>-21.51</td> <td>68.30</td> <td>54.72</td> <td>38.35</td> <td>15.43</td> <td>61.71</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	Loss	Factor	1	10440.00	46.79	-21.51	68.30	54.72	38.35	15.43	61.71	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : 5G BAND 1-3 @ 3117.5N 00218442 VERTICAL Project : FR102106-01 Mode : 20 MEI : #12 E1F-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.10</td> <td>-22.20</td> <td>68.30</td> <td>54.03</td> <td>38.35</td> <td>15.43</td> <td>61.71</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	Loss	Factor	1	10440.00	46.10	-22.20	68.30	54.03	38.35	15.43	61.71	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	Loss	Factor																																																						
1	10440.00	46.79	-21.51	68.30	54.72	38.35	15.43	61.71	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	Loss	Factor																																																						
1	10440.00	46.10	-22.20	68.30	54.03	38.35	15.43	61.71	100	0 Peak	VERTICAL																																																			



**U-NII-1 5150~5250MHz  
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	U-NII-1 5150~5250MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT80 CH42 5210MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : ZK ME1 : #12 E1F-BASE1 Plane : ZK Powersetting : Full-directivity T : 1</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>46.48</td> <td>-21.82</td> <td>68.30</td> <td>54.50</td> <td>38.34</td> <td>15.41</td> <td>61.77</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cn	deg			1 10420.00	46.48	-21.82	68.30	54.50	38.34	15.41	61.77	300	0 Peak HORIZONTAL	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : ZK ME1 : #12 E1F-BASE1 Plane : ZK Powersetting : Full-directivity T : 1</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>46.97</td> <td>-21.33</td> <td>68.30</td> <td>54.99</td> <td>38.34</td> <td>15.41</td> <td>61.77</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cn	deg			1 10420.00	46.97	-21.33	68.30	54.99	38.34	15.41	61.77	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	cn	deg																																																							
1 10420.00	46.48	-21.82	68.30	54.50	38.34	15.41	61.77	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cn	deg																																																							
1 10420.00	46.97	-21.33	68.30	54.99	38.34	15.41	61.77	100	0 Peak VERTICAL																																																					



**U-NII-2A - 5250~5350MHz**  
**WIFI 802.11a (Band Edge @ 3m)**




WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																												
ANT	802.11a CH52 5260MHz - L																																																																												
1	Horizontal	Fundamental																																																																											
<b>Peak</b>	<p>Site : 030006-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Economic &amp; Technical Development Zone, JiangSu, China Project : RRM-1000_0000MHz_VBW-3000_0000MHz_SRT-Auto IMEI : F78102100-01 Mode : #12 EIF-BASE1 Plane : Full-directivity Power setting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.04</td> <td>56.03</td> <td>-12.97</td> <td>74.00</td> <td>42.16</td> <td>35.01</td> <td>10.65</td> <td>31.79</td> <td>331</td> <td>35</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm	dBm	dBm	dB	dB	cm	deg			1	5143.04	56.03	-12.97	74.00	42.16	35.01	10.65	31.79	331	35	Peak	HORIZONTAL	<p>Site : 030006-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Economic &amp; Technical Development Zone, JiangSu, China Project : RRM-1000_0000MHz_VBW-3000_0000MHz_SRT-Auto IMEI : F78102100-01 Mode : #12 EIF-BASE1 Plane : Full-directivity Power setting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>106.43</td> <td>38.13</td> <td>68.30</td> <td>92.43</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>331</td> <td>35</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>99.02</td> <td>-----</td> <td>-----</td> <td>85.02</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>331</td> <td>35</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm	dBm	dBm	dB	dB	cm	deg			1	5260.00	106.43	38.13	68.30	92.43	35.13	10.74	31.87	331	35	Peak	HORIZONTAL	2	5260.00	99.02	-----	-----	85.02	35.13	10.74	31.87	331	35	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
dBm	dBm	dBm	dB	dB	cm	deg																																																																							
1	5143.04	56.03	-12.97	74.00	42.16	35.01	10.65	31.79	331	35	Peak	HORIZONTAL																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
dBm	dBm	dBm	dB	dB	cm	deg																																																																							
1	5260.00	106.43	38.13	68.30	92.43	35.13	10.74	31.87	331	35	Peak	HORIZONTAL																																																																	
2	5260.00	99.02	-----	-----	85.02	35.13	10.74	31.87	331	35	Average	HORIZONTAL																																																																	
<b>Avg.</b>	<p>Site : 030006-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic &amp; Technical Development Zone, JiangSu, China Project : RRM-1000_0000MHz_VBW-3000_0000MHz_SRT-Auto IMEI : F78102100-01 Mode : #12 EIF-BASE1 Plane : Full-directivity Power setting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5128.16</td> <td>46.20</td> <td>-7.80</td> <td>54.00</td> <td>32.35</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>331</td> <td>35</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dBm	dBm	dBm	dB	dB	cm	deg			1	5128.16	46.20	-7.80	54.00	32.35	35.01	10.63	31.79	331	35	Average	HORIZONTAL	<b>Left blank</b>																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
dBm	dBm	dBm	dB	dB	cm	deg																																																																							
1	5128.16	46.20	-7.80	54.00	32.35	35.01	10.63	31.79	331	35	Average	HORIZONTAL																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																								
ANT	802.11a CH52 5260MHz - L																																																																																								
1	Vertical	Fundamental																																																																																							
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FR102106-01 Mode : 4 MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5113.28</td> <td>57.44</td> <td>-16.56</td> <td>74.00</td> <td>43.61</td> <td>35.00</td> <td>10.61</td> <td>31.78</td> <td>234</td> <td>266</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	5113.28	57.44	-16.56	74.00	43.61	35.00	10.61	31.78	234	266	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FR102106-01 Mode : 4 MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>110.85</td> <td>42.55</td> <td>68.30</td> <td>96.85</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>234</td> <td>266</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>103.60</td> <td>-----</td> <td>-----</td> <td>89.60</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>234</td> <td>266</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	5260.00	110.85	42.55	68.30	96.85	35.13	10.74	31.87	234	266	Peak	VERTICAL	2	5260.00	103.60	-----	-----	89.60	35.13	10.74	31.87	234	266	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																																		
1	5113.28	57.44	-16.56	74.00	43.61	35.00	10.61	31.78	234	266	Peak	VERTICAL																																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																																		
1	5260.00	110.85	42.55	68.30	96.85	35.13	10.74	31.87	234	266	Peak	VERTICAL																																																																													
2	5260.00	103.60	-----	-----	89.60	35.13	10.74	31.87	234	266	Average	VERTICAL																																																																													
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:0,2000kHz SRT:Auto IMEI : FR102106-01 Mode : 4 MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.80</td> <td>47.11</td> <td>-6.89</td> <td>54.00</td> <td>33.24</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>234</td> <td>266</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	5148.80	47.11	-6.89	54.00	33.24	35.03	10.65	31.81	234	266	Average	VERTICAL	Left blank																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																		
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																																		
1	5148.80	47.11	-6.89	54.00	33.24	35.03	10.65	31.81	234	266	Average	VERTICAL																																																																													



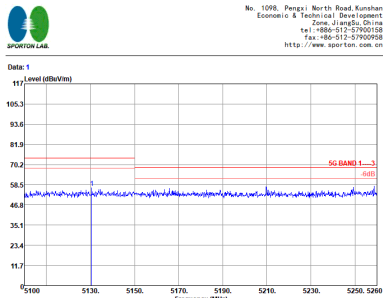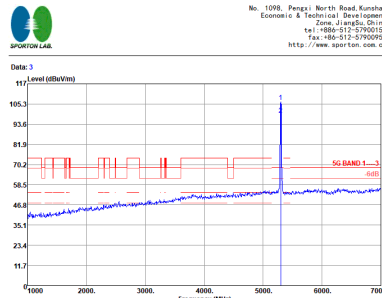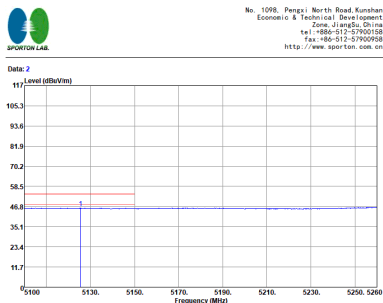

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																																									
ANT	802.11a CH60 5300MHz - L																																																																																																									
1	Horizontal	Fundamental																																																																																																								
Peak	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto FRF:102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>10</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5130.56</td> <td>56.67</td> <td>-17.23</td> <td>74.00</td> <td>42.82</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>327</td> <td>34</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Powersetting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	deg	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	deg	deg	1	5130.56	56.67	-17.23	74.00	42.82	35.01	10.63	31.79	327	34	Peak	HORIZONTAL	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto FRF:102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>10</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5302.00</td> <td>106.53</td> <td>38.23</td> <td>68.30</td> <td>92.49</td> <td>35.18</td> <td>10.76</td> <td>31.90</td> <td>327</td> <td>34</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5302.00</td> <td>99.06</td> <td>-----</td> <td>85.04</td> <td>35.18</td> <td>10.76</td> <td>31.90</td> <td>327</td> <td>34</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Powersetting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	deg	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	deg	deg	1	5302.00	106.53	38.23	68.30	92.49	35.18	10.76	31.90	327	34	Peak	HORIZONTAL	2	5302.00	99.06	-----	85.04	35.18	10.76	31.90	327	34	Average	HORIZONTAL
Powersetting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	deg	deg																																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	deg	deg																																																																																																
1	5130.56	56.67	-17.23	74.00	42.82	35.01	10.63	31.79	327	34	Peak	HORIZONTAL																																																																																														
Powersetting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	deg	deg																																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	deg	deg																																																																																																
1	5302.00	106.53	38.23	68.30	92.49	35.18	10.76	31.90	327	34	Peak	HORIZONTAL																																																																																														
2	5302.00	99.06	-----	85.04	35.18	10.76	31.90	327	34	Average	HORIZONTAL																																																																																															
Avg.	 <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000.000kHz VBW:0.2000kHz SMT:Auto FRF:102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>10</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5125.44</td> <td>45.90</td> <td>-8.10</td> <td>54.00</td> <td>32.06</td> <td>35.00</td> <td>10.63</td> <td>31.79</td> <td>327</td> <td>34</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Powersetting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	deg	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	deg	deg	1	5125.44	45.90	-8.10	54.00	32.06	35.00	10.63	31.79	327	34	Average	HORIZONTAL	Left blank																																																										
Powersetting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	deg	deg																																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	dB	deg	deg																																																																																																
1	5125.44	45.90	-8.10	54.00	32.06	35.00	10.63	31.79	327	34	Average	HORIZONTAL																																																																																														



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																								
ANT	802.11a CH60 5300MHz - R																																								
1	Horizontal	Fundamental																																							
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032805-KS Condition : 5G BAND 1-3 @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 3000, 0000Hz, SRT: Auto FR1: 102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5303.30</td> <td>55.02</td> <td>-18.98</td> <td>74.00</td> <td>40.95</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>327</td> <td>34 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg	1	5303.30	55.02	-18.98	74.00	40.95	35.22	10.78	31.93	327	34 Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																	
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																	
1	5303.30	55.02	-18.98	74.00	40.95	35.22	10.78	31.93	327	34 Peak	HORIZONTAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032805-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 0, 2000Hz, SRT: Auto FR1: 102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5379.30</td> <td>45.00</td> <td>-8.40</td> <td>54.00</td> <td>31.51</td> <td>35.24</td> <td>10.80</td> <td>31.95</td> <td>327</td> <td>34 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg	1	5379.30	45.00	-8.40	54.00	31.51	35.24	10.80	31.95	327	34 Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																	
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																	
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																	
1	5379.30	45.00	-8.40	54.00	31.51	35.24	10.80	31.95	327	34 Average	HORIZONTAL																														



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																								
ANT	802.11a CH60 5300MHz - L																																																																								
1	Vertical	Fundamental																																																																							
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto IMEI : FRS102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.28</td> <td>56.16</td> <td>-12.84</td> <td>74.00</td> <td>42.29</td> <td>35.01</td> <td>10.65</td> <td>31.79</td> <td>210</td> <td>268</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Level	Factor	Loss	Factor	deg	1	5141.28	56.16	-12.84	74.00	42.29	35.01	10.65	31.79	210	268	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto IMEI : FRS102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5296.00</td> <td>111.05</td> <td>42.75</td> <td>68.30</td> <td>97.01</td> <td>35.16</td> <td>10.76</td> <td>31.88</td> <td>210</td> <td>268</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5296.00</td> <td>103.69</td> <td>-----</td> <td>-----</td> <td>89.65</td> <td>35.16</td> <td>10.76</td> <td>31.88</td> <td>210</td> <td>268</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Level	Factor	Loss	Factor	deg	1	5296.00	111.05	42.75	68.30	97.01	35.16	10.76	31.88	210	268	Peak	VERTICAL	2	5296.00	103.69	-----	-----	89.65	35.16	10.76	31.88	210	268	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Level	Line	Level	Level	Factor	Loss	Factor	deg																																																																		
1	5141.28	56.16	-12.84	74.00	42.29	35.01	10.65	31.79	210	268	Peak	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Level	Line	Level	Level	Factor	Loss	Factor	deg																																																																		
1	5296.00	111.05	42.75	68.30	97.01	35.16	10.76	31.88	210	268	Peak	VERTICAL																																																													
2	5296.00	103.69	-----	-----	89.65	35.16	10.76	31.88	210	268	Average	VERTICAL																																																													
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:0,2000kHz SMT:Auto IMEI : FRS102106-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5124.48</td> <td>46.67</td> <td>-7.33</td> <td>54.00</td> <td>32.83</td> <td>35.00</td> <td>10.63</td> <td>31.79</td> <td>210</td> <td>268</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Level	Factor	Loss	Factor	deg	1	5124.48	46.67	-7.33	54.00	32.83	35.00	10.63	31.79	210	268	Average	VERTICAL	Left blank																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Level	Line	Level	Level	Factor	Loss	Factor	deg																																																																		
1	5124.48	46.67	-7.33	54.00	32.83	35.00	10.63	31.79	210	268	Average	VERTICAL																																																													



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11a CH60 5300MHz - R																																
1	Vertical	Fundamental																															
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320G-KS Condition : 5G BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : RRM 1000, 0000Hz, VSW: 3000, 0000Hz, SRT: Auto Freq: 102100-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/100kHz</th> <th>dB</th> <th>dBm/100kHz</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5368.50</td> <td>56.42</td> <td>-17.58</td> <td>74.00</td> <td>42.32</td> <td>35.24</td> <td>10.79</td> <td>31.93</td> <td>210</td> <td>268</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dB	cm	deg			1	5368.50	56.42	-17.58	74.00	42.32	35.24	10.79	31.93	210	268	Peak	VERTICAL	<p><b>Left blank</b></p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBm/100kHz	dB	dBm/100kHz	dB	cm	deg																											
1	5368.50	56.42	-17.58	74.00	42.32	35.24	10.79	31.93	210	268	Peak	VERTICAL																					
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320G-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218642 VERTICAL Project : RRM 1000, 0000Hz, VSW: 0, 2000Hz, SRT: Auto Freq: 102100-01 Mode : S MEI : #12 EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/100kHz</th> <th>dB</th> <th>dBm/100kHz</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.50</td> <td>47.54</td> <td>-6.46</td> <td>54.00</td> <td>33.47</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>210</td> <td>268</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/100kHz	dB	dBm/100kHz	dB	cm	deg			1	5350.50	47.54	-6.46	54.00	33.47	35.22	10.78	31.93	210	268	Average	VERTICAL	<p><b>Left blank</b></p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBm/100kHz	dB	dBm/100kHz	dB	cm	deg																											
1	5350.50	47.54	-6.46	54.00	33.47	35.22	10.78	31.93	210	268	Average	VERTICAL																					






WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																				
ANT	802.11a CH64 5320MHz																																																																				
1	Horizontal	Fundamental																																																																			
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto #FR102106-01 Mode : 6 MEI : #12 EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>58.36</td> <td>-15.64</td> <td>74.00</td> <td>44.29</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>338</td> <td>37 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	1	5350.40	58.36	-15.64	74.00	44.29	35.22	10.78	31.93	338	37 Peak	HORIZONTAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto #FR102106-01 Mode : 6 MEI : #12 EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.38</td> <td>38.08</td> <td>68.30</td> <td>92.32</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>338</td> <td>37 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>99.28</td> <td>-----</td> <td>85.22</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>338</td> <td>37 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	1	5320.00	106.38	38.08	68.30	92.32	35.19	10.77	31.90	338	37 Peak	HORIZONTAL	2	5320.00	99.28	-----	85.22	35.19	10.77	31.90	338	37 Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																														
1	5350.40	58.36	-15.64	74.00	44.29	35.22	10.78	31.93	338	37 Peak	HORIZONTAL																																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																														
1	5320.00	106.38	38.08	68.30	92.32	35.19	10.77	31.90	338	37 Peak	HORIZONTAL																																																										
2	5320.00	99.28	-----	85.22	35.19	10.77	31.90	338	37 Average	HORIZONTAL																																																											
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:0,3000kHz SMT:Auto #FR102106-01 Mode : 6 MEI : #12 EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.30</td> <td>46.98</td> <td>-7.02</td> <td>54.00</td> <td>32.91</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>338</td> <td>37 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	1	5350.30	46.98	-7.02	54.00	32.91	35.22	10.78	31.93	338	37 Average	HORIZONTAL	Left blank																																							
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																														
1	5350.30	46.98	-7.02	54.00	32.91	35.22	10.78	31.93	338	37 Average	HORIZONTAL																																																										



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																	
ANT	802.11a CH64 5320MHz																																																																																	
1	Vertical	Fundamental																																																																																
Peak	<p>Site : 030906-KS            Condition : SG BAND 1-3 @ 3117.50 00218642 VERTICAL            Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto            Model : FRS102106-01            Mode : 6            MEI : #12 EIF-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5317.50</td> <td>68.17</td> <td>-6.83</td> <td>74.00</td> <td>94.10</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>258</td> <td>267 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 5317.50	68.17	-6.83	74.00	94.10	35.22	10.78	31.93	258	267 Peak	VERTICAL	<p>Site : 030906-KS            Condition : SG BAND 1-3 @ 3117.50 00218642 VERTICAL            Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto            Model : FRS102106-01            Mode : 6            MEI : #12 EIF-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>110.81</td> <td>42.51</td> <td>68.30</td> <td>96.75</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>258</td> <td>267 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 5320.00</td> <td>103.56</td> <td>-----</td> <td>89.50</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>258</td> <td>267 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 5320.00	110.81	42.51	68.30	96.75	35.19	10.77	31.90	258	267 Peak	VERTICAL	2 5320.00	103.56	-----	89.50	35.19	10.77	31.90	258	267 Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																											
1 5317.50	68.17	-6.83	74.00	94.10	35.22	10.78	31.93	258	267 Peak	VERTICAL																																																																								
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																											
1 5320.00	110.81	42.51	68.30	96.75	35.19	10.77	31.90	258	267 Peak	VERTICAL																																																																								
2 5320.00	103.56	-----	89.50	35.19	10.77	31.90	258	267 Average	VERTICAL																																																																									
Avg.	<p>Site : 030906-KS            Condition : SG BAND 1-3 (AVG) @ 3117.50 00218642 VERTICAL            Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto            Model : FRS102106-01            Mode : 6            MEI : #12 EIF-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.00</td> <td>49.88</td> <td>-4.12</td> <td>54.00</td> <td>35.81</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>258</td> <td>267 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 5350.00	49.88	-4.12	54.00	35.81	35.22	10.78	31.93	258	267 Average	VERTICAL	Left blank																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																											
1 5350.00	49.88	-4.12	54.00	35.81	35.22	10.78	31.93	258	267 Average	VERTICAL																																																																								



**U-NII-2A 5250~5350MHz  
WIFI 802.11ac VHT20 (Band Edge @ 3m)**

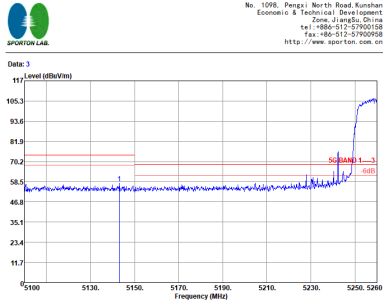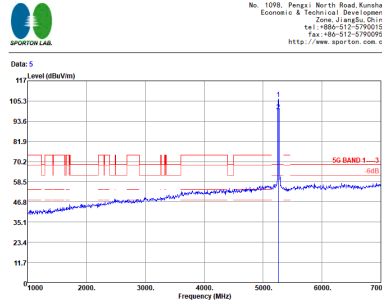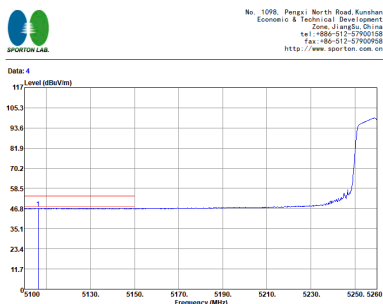WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																										
ANT	802.11ac VHT20 CH52 5260MHz - L																																																																										
1	Horizontal	Fundamental																																																																									
<b>Peak</b>	 <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: FR1 102106-01 MDE: 13 MEL: #39 EIF-BASE1 Plane: 7 Powersetting: full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.20</td> <td>57.76</td> <td>-16.24</td> <td>74.00</td> <td>43.89</td> <td>35.01</td> <td>10.65</td> <td>31.79</td> <td>103</td> <td>298</td> <td>Peak</td> <td>HOR1ZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5143.20	57.76	-16.24	74.00	43.89	35.01	10.65	31.79	103	298	Peak	HOR1ZONT	 <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: FR1 102106-01 MDE: 13 MEL: #39 EIF-BASE1 Plane: 7 Powersetting: full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>100.46</td> <td>38.16</td> <td>68.30</td> <td>92.46</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>103</td> <td>298</td> <td>Peak</td> <td>HOR1ZONT</td> </tr> <tr> <td>2</td> <td>5300.00</td> <td>99.31</td> <td></td> <td></td> <td>80.31</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>103</td> <td>298</td> <td>Average</td> <td>HOR1ZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5260.00	100.46	38.16	68.30	92.46	35.13	10.74	31.87	103	298	Peak	HOR1ZONT	2	5300.00	99.31			80.31	35.13	10.74	31.87	103	298	Average	HOR1ZONT
Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																			
1	5143.20	57.76	-16.24	74.00	43.89	35.01	10.65	31.79	103	298	Peak	HOR1ZONT																																																															
Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																			
1	5260.00	100.46	38.16	68.30	92.46	35.13	10.74	31.87	103	298	Peak	HOR1ZONT																																																															
2	5300.00	99.31			80.31	35.13	10.74	31.87	103	298	Average	HOR1ZONT																																																															
<b>Avg.</b>	 <p>Site: 030906-KS Condition: SG BAND 1---3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 0.0200MHz SWT Auto Mode: FR1 102106-01 MDE: 13 MEL: #39 EIF-BASE1 Plane: 7 Powersetting: full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5106.24</td> <td>47.07</td> <td>-6.93</td> <td>54.00</td> <td>33.26</td> <td>34.98</td> <td>10.61</td> <td>31.78</td> <td>103</td> <td>298</td> <td>Average</td> <td>HOR1ZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5106.24	47.07	-6.93	54.00	33.26	34.98	10.61	31.78	103	298	Average	HOR1ZONT	<b>Left blank</b>																																											
Over	Limit	ReadStema	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																			
1	5106.24	47.07	-6.93	54.00	33.26	34.98	10.61	31.78	103	298	Average	HOR1ZONT																																																															



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																										
ANT	802.11ac VHT20 CH52 5260MHz - L																																																																																										
1	Vertical	Fundamental																																																																																									
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000.000kHz VBR:3000.000kHz SRT:Auto FR102106-01 Mode : 13 MEI : #3F EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5135.36</td> <td>57.81</td> <td>-16.19</td> <td>74.00</td> <td>43.96</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>169</td> <td>225</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	5135.36	57.81	-16.19	74.00	43.96	35.01	10.63	31.79	169	225	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000.000kHz VBR:3000.000kHz SRT:Auto FR102106-01 Mode : 13 MEI : #3F EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>110.64</td> <td>42.34</td> <td>68.30</td> <td>96.64</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>169</td> <td>225</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5260.00</td> <td>103.66</td> <td>-----</td> <td>-----</td> <td>89.66</td> <td>35.13</td> <td>10.74</td> <td>31.87</td> <td>169</td> <td>225</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	5260.00	110.64	42.34	68.30	96.64	35.13	10.74	31.87	169	225	Peak	VERTICAL	2	5260.00	103.66	-----	-----	89.66	35.13	10.74	31.87	169	225	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																																			
1	5135.36	57.81	-16.19	74.00	43.96	35.01	10.63	31.79	169	225	Peak	VERTICAL																																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																																			
1	5260.00	110.64	42.34	68.30	96.64	35.13	10.74	31.87	169	225	Peak	VERTICAL																																																																															
2	5260.00	103.66	-----	-----	89.66	35.13	10.74	31.87	169	225	Average	VERTICAL																																																																															
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu, China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Project : RBW:1000.000kHz VBR:0.000kHz SRT:Auto FR102106-01 Mode : 13 MEI : #3F EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.44</td> <td>48.00</td> <td>-6.00</td> <td>54.00</td> <td>34.13</td> <td>35.03</td> <td>10.65</td> <td>31.81</td> <td>169</td> <td>225</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	5145.44	48.00	-6.00	54.00	34.13	35.03	10.65	31.81	169	225	Average	VERTICAL	Left blank																																																			
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																																			
1	5145.44	48.00	-6.00	54.00	34.13	35.03	10.65	31.81	169	225	Average	VERTICAL																																																																															





WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																														
ANT	802.11ac VHT20 CH60 5300MHz - L																																																																														
1	Horizontal	Fundamental																																																																													
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW 1000.000kHz VBR 3000.000kHz SRT:Auto Mod : FFS 102106-01 Mtx : #3F EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.96</td> <td>58.23</td> <td>-15.77</td> <td>74.00</td> <td>44.36</td> <td>35.01</td> <td>10.65</td> <td>31.79</td> <td>101</td> <td>307</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cn	deg	1	5140.96	58.23	-15.77	74.00	44.36	35.01	10.65	31.79	101	307	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW 1000.000kHz VBR 3000.000kHz SRT:Auto Mod : FFS 102106-01 Mtx : #3F EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5302.00</td> <td>106.58</td> <td>38.29</td> <td>68.30</td> <td>92.54</td> <td>35.18</td> <td>10.76</td> <td>31.90</td> <td>101</td> <td>307</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5302.00</td> <td>99.53</td> <td>-----</td> <td>-----</td> <td>85.49</td> <td>35.18</td> <td>10.76</td> <td>31.90</td> <td>101</td> <td>307</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cn	deg	1	5302.00	106.58	38.29	68.30	92.54	35.18	10.76	31.90	101	307	Peak	HORIZONTAL	2	5302.00	99.53	-----	-----	85.49	35.18	10.76	31.90	101	307	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cn	deg																																																																						
1	5140.96	58.23	-15.77	74.00	44.36	35.01	10.65	31.79	101	307	Peak	HORIZONTAL																																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cn	deg																																																																						
1	5302.00	106.58	38.29	68.30	92.54	35.18	10.76	31.90	101	307	Peak	HORIZONTAL																																																																			
2	5302.00	99.53	-----	-----	85.49	35.18	10.76	31.90	101	307	Average	HORIZONTAL																																																																			
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW 1000.000kHz VBR 0.000kHz SRT:Auto Mod : FFS 102106-01 Mtx : #3F EIF-BASE1 Plane : Y Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5109.44</td> <td>46.87</td> <td>-7.13</td> <td>54.00</td> <td>33.04</td> <td>35.00</td> <td>10.61</td> <td>31.78</td> <td>101</td> <td>307</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cn	deg	1	5109.44	46.87	-7.13	54.00	33.04	35.00	10.61	31.78	101	307	Average	HORIZONTAL	Left blank																																													
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cn	deg																																																																						
1	5109.44	46.87	-7.13	54.00	33.04	35.00	10.61	31.78	101	307	Average	HORIZONTAL																																																																			





WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																									
ANT	802.11ac VHT20 CH60 5300MHz - R																																									
1	Horizontal	Fundamental																																								
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 3000, 0000Hz, SMI: Auto FR1: 102106-01 Mode : 14 MEI : #39 E1F-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.00</td> <td>55.96</td> <td>-18.04</td> <td>74.00</td> <td>41.89</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>101</td> <td>307</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5362.00	55.96	-18.04	74.00	41.89	35.22	10.78	31.93	101	307	Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	5362.00	55.96	-18.04	74.00	41.89	35.22	10.78	31.93	101	307	Peak	HORIZONTAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 0, 0000Hz, SMI: Auto FR1: 102106-01 Mode : 14 MEI : #39 E1F-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.50</td> <td>47.17</td> <td>-6.93</td> <td>54.00</td> <td>33.10</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>101</td> <td>307</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5350.50	47.17	-6.93	54.00	33.10	35.22	10.78	31.93	101	307	Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	5350.50	47.17	-6.93	54.00	33.10	35.22	10.78	31.93	101	307	Average	HORIZONTAL																														



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																
ANT	802.11ac VHT20 CH60 5300MHz - L																																																																
1	Vertical	Fundamental																																																															
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FPI:102106-01 Mode : 14 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5133.76</td> <td>57.58</td> <td>-16.42</td> <td>74.00</td> <td>43.73</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>180 212 Peak VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1 5133.76	57.58	-16.42	74.00	43.73	35.01	10.63	31.79	180 212 Peak VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FPI:102106-01 Mode : 14 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 5296.00</td> <td>110.52</td> <td>42.22</td> <td>68.30</td> <td>96.48</td> <td>35.16</td> <td>10.76</td> <td>31.88</td> <td>180 212 Peak VERTICAL</td> </tr> <tr> <td>2 5296.00</td> <td>103.33</td> <td>-----</td> <td>-----</td> <td>89.29</td> <td>35.16</td> <td>10.76</td> <td>31.88</td> <td>180 212 Average VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1 * 5296.00	110.52	42.22	68.30	96.48	35.16	10.76	31.88	180 212 Peak VERTICAL	2 5296.00	103.33	-----	-----	89.29	35.16	10.76	31.88	180 212 Average VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
1 5133.76	57.58	-16.42	74.00	43.73	35.01	10.63	31.79	180 212 Peak VERTICAL																																																									
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
1 * 5296.00	110.52	42.22	68.30	96.48	35.16	10.76	31.88	180 212 Peak VERTICAL																																																									
2 5296.00	103.33	-----	-----	89.29	35.16	10.76	31.88	180 212 Average VERTICAL																																																									
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:0,000kHz SRT:Auto FPI:102106-01 Mode : 14 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5127.04</td> <td>47.46</td> <td>-6.54</td> <td>54.00</td> <td>33.61</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>180 212 Average VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1 5127.04	47.46	-6.54	54.00	33.61	35.01	10.63	31.79	180 212 Average VERTICAL	Left blank																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																										
1 5127.04	47.46	-6.54	54.00	33.61	35.01	10.63	31.79	180 212 Average VERTICAL																																																									

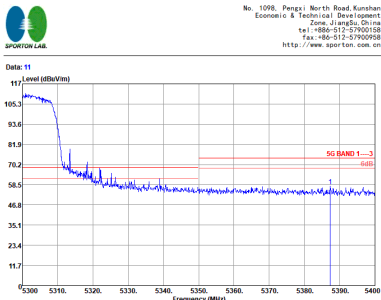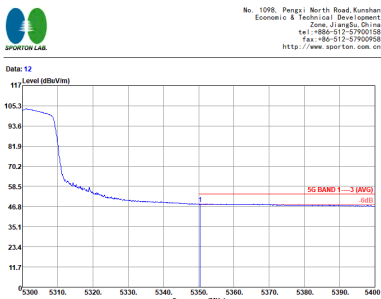

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11ac VHT20 CH60 5300MHz - R																																
1	Vertical	Fundamental																															
<p><b>Peak</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RRM 1000.000MHz VSW:3000.000kHz SRT:Auto FR102106-01 Mod : 14 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5387.30</td> <td>57.68</td> <td>-16.32</td> <td>74.00</td> <td>43.57</td> <td>35.26</td> <td>10.80</td> <td>31.95</td> <td>180</td> <td>210 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	5387.30	57.68	-16.32	74.00	43.57	35.26	10.80	31.95	180	210 Peak	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																								
1	5387.30	57.68	-16.32	74.00	43.57	35.26	10.80	31.95	180	210 Peak	VERTICAL																						
<p><b>Avg.</b></p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Project : RRM 1000.000MHz VSW:3000.000kHz SRT:Auto FR102106-01 Mod : 14 MEI : #39 EIF-BASE1 Plane : Y Powersetting : full-directivity 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>48.39</td> <td>-5.61</td> <td>54.00</td> <td>34.32</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>180</td> <td>212 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	5350.40	48.39	-5.61	54.00	34.32	35.22	10.78	31.93	180	212 Average	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																								
1	5350.40	48.39	-5.61	54.00	34.32	35.22	10.78	31.93	180	212 Average	VERTICAL																						






WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																												
ANT	802.11ac VHT20 CH64 5320MHz																																																																												
1	Horizontal	Fundamental																																																																											
Peak	<p>Site : 03906-KS Condition : SG BAND 1-3 @ 3117 SN 00218442 HORIZONTAL Project : RBW:1000.000kHz VBR:3000.000kHz SRT:Auto Mode : FRS102106-01 MEI : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5355.80</td> <td>57.98</td> <td>-16.02</td> <td>74.00</td> <td>43.91</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>299</td> <td>132</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	5355.80	57.98	-16.02	74.00	43.91	35.22	10.78	31.93	299	132	Peak	HORIZONTAL	<p>Site : 03906-KS Condition : SG BAND 1-3 @ 3117 SN 00218442 HORIZONTAL Project : RBW:1000.000kHz VBR:3000.000kHz SRT:Auto Mode : FRS102106-01 MEI : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.58</td> <td>34.28</td> <td>68.30</td> <td>88.52</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>299</td> <td>132</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>95.48</td> <td>-----</td> <td>-----</td> <td>81.42</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>299</td> <td>132</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	5320.00	102.58	34.28	68.30	88.52	35.19	10.77	31.90	299	132	Peak	HORIZONTAL	2	5320.00	95.48	-----	-----	81.42	35.19	10.77	31.90	299	132	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																						
1	5355.80	57.98	-16.02	74.00	43.91	35.22	10.78	31.93	299	132	Peak	HORIZONTAL																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																						
1	5320.00	102.58	34.28	68.30	88.52	35.19	10.77	31.90	299	132	Peak	HORIZONTAL																																																																	
2	5320.00	95.48	-----	-----	81.42	35.19	10.77	31.90	299	132	Average	HORIZONTAL																																																																	
Avg.	<p>Site : 03906-KS Condition : SG BAND 1-3 (AVG) @ 3117 SN 00218442 HORIZONTAL Project : RBW:1000.000kHz VBR:3000.000kHz SRT:Auto Mode : FRS102106-01 MEI : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>46.23</td> <td>-7.77</td> <td>54.00</td> <td>32.16</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>299</td> <td>132</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	5350.00	46.23	-7.77	54.00	32.16	35.22	10.78	31.93	299	132	Average	HORIZONTAL	Left blank																																												
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																						
1	5350.00	46.23	-7.77	54.00	32.16	35.22	10.78	31.93	299	132	Average	HORIZONTAL																																																																	



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																								
ANT	802.11ac VHT20 CH64 5320MHz																																																																								
1	Vertical	Fundamental																																																																							
Peak	<p>Site : 030906-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FPI:102106-01 Mode : 15 MEI : #12 EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5363.20</td> <td>66.74</td> <td>-7.26</td> <td>74.00</td> <td>52.67</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>201</td> <td>186</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	deg	deg	1	5363.20	66.74	-7.26	74.00	52.67	35.22	10.78	31.93	201	186	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FPI:102106-01 Mode : 15 MEI : #12 EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.23</td> <td>41.03</td> <td>68.30</td> <td>95.27</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>201</td> <td>186</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5320.00</td> <td>102.19</td> <td>-----</td> <td>-----</td> <td>88.13</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>201</td> <td>186</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	deg	deg	1	5320.00	109.23	41.03	68.30	95.27	35.19	10.77	31.90	201	186	Peak	VERTICAL	2	5320.00	102.19	-----	-----	88.13	35.19	10.77	31.90	201	186	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Level	Line	Level	Factor	Loss	Factor	deg	deg																																																																		
1	5363.20	66.74	-7.26	74.00	52.67	35.22	10.78	31.93	201	186	Peak	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Level	Line	Level	Factor	Loss	Factor	deg	deg																																																																		
1	5320.00	109.23	41.03	68.30	95.27	35.19	10.77	31.90	201	186	Peak	VERTICAL																																																													
2	5320.00	102.19	-----	-----	88.13	35.19	10.77	31.90	201	186	Average	VERTICAL																																																													
Avg.	<p>Site : 030906-KS Condition : SG BAND 1-3 (AVG) @ 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FPI:102106-01 Mode : 15 MEI : #12 EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.40</td> <td>49.93</td> <td>-4.07</td> <td>54.00</td> <td>35.86</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>201</td> <td>186</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	deg	deg	1	5350.40	49.93	-4.07	54.00	35.86	35.22	10.78	31.93	201	186	Average	VERTICAL	Left blank																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Level	Line	Level	Factor	Loss	Factor	deg	deg																																																																		
1	5350.40	49.93	-4.07	54.00	35.86	35.22	10.78	31.93	201	186	Average	VERTICAL																																																													



**U-NII-2A 5250~5350MHz  
WIFI 802.11ac VHT40 (Band Edge @ 3m)**

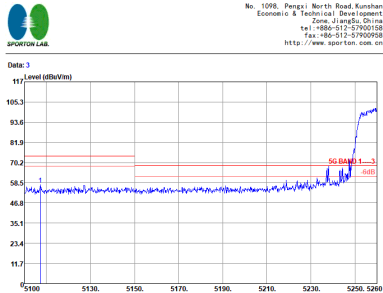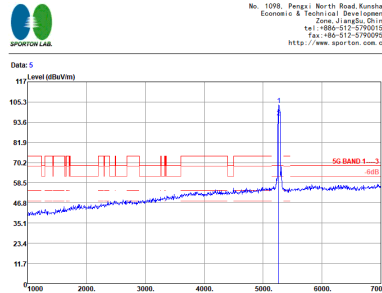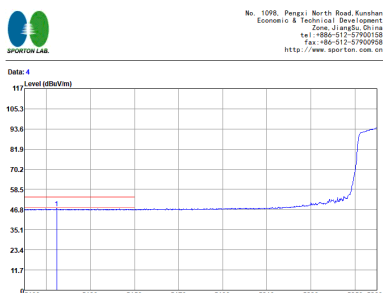WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																									
ANT	802.11ac VHT40 CH54 5270 - L																																																																									
1	Horizontal	Fundamental																																																																								
<b>Peak</b>	 <p>Site: 030806-KS Condition: SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: FR1 102106-01 ME1: 21 Plane: #39 EIF-BASE1 Powersetting: full-directivity T: 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5107.36</td> <td>57.28</td> <td>-16.72</td> <td>74.00</td> <td>43.47</td> <td>34.98</td> <td>10.61</td> <td>31.78</td> <td>103</td> <td>301</td> <td>Peak</td> <td>HOR1ZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5107.36	57.28	-16.72	74.00	43.47	34.98	10.61	31.78	103	301	Peak	HOR1ZONT	 <p>Site: 030806-KS Condition: SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: FR1 102106-01 ME1: 21 Plane: #39 EIF-BASE1 Powersetting: full-directivity T: 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5266.00</td> <td>163.72</td> <td>35.43</td> <td>68.30</td> <td>89.72</td> <td>35.14</td> <td>10.74</td> <td>31.87</td> <td>103</td> <td>301</td> <td>Peak</td> <td>HOR1ZONT</td> </tr> <tr> <td>2</td> <td>5306.00</td> <td>156.32</td> <td>-----</td> <td>82.51</td> <td>35.16</td> <td>10.74</td> <td>31.87</td> <td>103</td> <td>301</td> <td>Average</td> <td>HOR1ZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5266.00	163.72	35.43	68.30	89.72	35.14	10.74	31.87	103	301	Peak	HOR1ZONT	2	5306.00	156.32	-----	82.51	35.16	10.74	31.87	103	301	Average	HOR1ZONT
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																		
1	5107.36	57.28	-16.72	74.00	43.47	34.98	10.61	31.78	103	301	Peak	HOR1ZONT																																																														
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																		
1	5266.00	163.72	35.43	68.30	89.72	35.14	10.74	31.87	103	301	Peak	HOR1ZONT																																																														
2	5306.00	156.32	-----	82.51	35.16	10.74	31.87	103	301	Average	HOR1ZONT																																																															
<b>Avg.</b>	 <p>Site: 030806-KS Condition: SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 1.0000MHz SWT Auto Mode: FR1 102106-01 ME1: 21 Plane: #39 EIF-BASE1 Powersetting: full-directivity T: 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadStenna</th> <th>Cable Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5114.72</td> <td>47.48</td> <td>-6.52</td> <td>54.00</td> <td>33.65</td> <td>35.00</td> <td>10.61</td> <td>31.78</td> <td>103</td> <td>301</td> <td>Average</td> <td>HOR1ZONT</td> </tr> </tbody> </table>	Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	5114.72	47.48	-6.52	54.00	33.65	35.00	10.61	31.78	103	301	Average	HOR1ZONT	<b>Left blank</b>																																										
Over	Limit	ReadStenna	Cable Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																		
1	5114.72	47.48	-6.52	54.00	33.65	35.00	10.61	31.78	103	301	Average	HOR1ZONT																																																														



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																														
ANT	802.11ac VHT40 CH54 5270 - R																														
1	Horizontal	Fundamental																													
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 3000, 0000Hz, SRT: Auto (FR) 102106-01 Mode : 21 MEI : #3F EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.30</td> <td>56.07</td> <td>-12.93</td> <td>74.00</td> <td>42.00</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>103</td> <td>301</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cm	deg		1	5351.30	56.07	-12.93	74.00	42.00	35.22	10.78	31.93	103	301	Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
Freq	Level	Line	Level Factor	Loss Factor	cm	deg																									
1	5351.30	56.07	-12.93	74.00	42.00	35.22	10.78	31.93	103	301	Peak	HORIZONTAL																			
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 1, 0000Hz, SRT: Auto (FR) 102106-01 Mode : 21 MEI : #3F EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.30</td> <td>47.09</td> <td>-6.91</td> <td>54.00</td> <td>33.02</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>103</td> <td>301</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cm	deg		1	5351.30	47.09	-6.91	54.00	33.02	35.22	10.78	31.93	103	301	Average	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
Freq	Level	Line	Level Factor	Loss Factor	cm	deg																									
1	5351.30	47.09	-6.91	54.00	33.02	35.22	10.78	31.93	103	301	Average	HORIZONTAL																			








WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																
ANT	802.11ac VHT40 CH54 5270 - L																																																																
1	Vertical	Fundamental																																																															
Peak	<p>Site : 030906-KS Condition : 5G BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto Mode : (FR)102106-01 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5135.84</td> <td>58.06</td> <td>-15.95</td> <td>74.00</td> <td>44.20</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>170 225 Peak VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg			1 5135.84	58.06	-15.95	74.00	44.20	35.01	10.63	31.79	170 225 Peak VERTICAL	<p>Site : 030906-KS Condition : 5G BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto Mode : (FR)102106-01 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 5266.00</td> <td>108.56</td> <td>40.26</td> <td>68.30</td> <td>94.55</td> <td>35.14</td> <td>10.74</td> <td>31.87</td> <td>170 225 Peak VERTICAL</td> </tr> <tr> <td>2 5266.00</td> <td>101.36</td> <td>-----</td> <td>-----</td> <td>87.35</td> <td>35.14</td> <td>10.74</td> <td>31.87</td> <td>170 225 Average VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg			1 * 5266.00	108.56	40.26	68.30	94.55	35.14	10.74	31.87	170 225 Peak VERTICAL	2 5266.00	101.36	-----	-----	87.35	35.14	10.74	31.87	170 225 Average VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																											
1 5135.84	58.06	-15.95	74.00	44.20	35.01	10.63	31.79	170 225 Peak VERTICAL																																																									
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																											
1 * 5266.00	108.56	40.26	68.30	94.55	35.14	10.74	31.87	170 225 Peak VERTICAL																																																									
2 5266.00	101.36	-----	-----	87.35	35.14	10.74	31.87	170 225 Average VERTICAL																																																									
Avg.	<p>Site : 030906-KS Condition : 5G BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:1,000kHz SRT:Auto Mode : (FR)102106-01 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5122.72</td> <td>48.15</td> <td>-5.85</td> <td>54.00</td> <td>34.31</td> <td>35.00</td> <td>10.63</td> <td>31.79</td> <td>170 225 Average VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	cm	deg			1 5122.72	48.15	-5.85	54.00	34.31	35.00	10.63	31.79	170 225 Average VERTICAL	Left blank																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
MHz	dBuV/m	dB	dBuV/m	dB	cm	deg																																																											
1 5122.72	48.15	-5.85	54.00	34.31	35.00	10.63	31.79	170 225 Average VERTICAL																																																									



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																									
ANT	802.11ac VHT40 CH54 5270 - R																																									
1	Vertical	Fundamental																																								
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : RRM 1000, 0000Hz, VBR 3000, 0000Hz, SRT: Auto FR1: 102106-01 Mod : 21 MEI : #3F EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.40</td> <td>62.00</td> <td>-12.00</td> <td>74.00</td> <td>47.93</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>170</td> <td>225</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5353.40	62.00	-12.00	74.00	47.93	35.22	10.78	31.93	170	225	Peak	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	5353.40	62.00	-12.00	74.00	47.93	35.22	10.78	31.93	170	225	Peak	VERTICAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218642 VERTICAL Project : RRM 1000, 0000Hz, VBR 1, 0000Hz, SRT: Auto FR1: 102106-01 Mod : 21 MEI : #3F EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.30</td> <td>48.62</td> <td>-5.38</td> <td>54.00</td> <td>34.55</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>170</td> <td>225</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5352.30	48.62	-5.38	54.00	34.55	35.22	10.78	31.93	170	225	Average	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	5352.30	48.62	-5.38	54.00	34.55	35.22	10.78	31.93	170	225	Average	VERTICAL																														

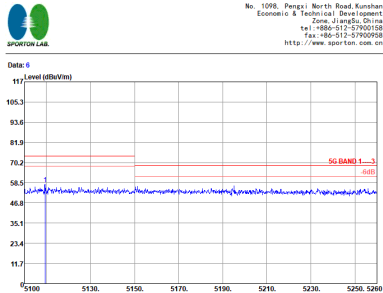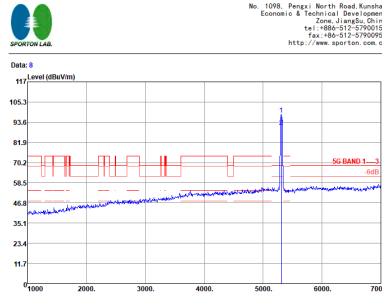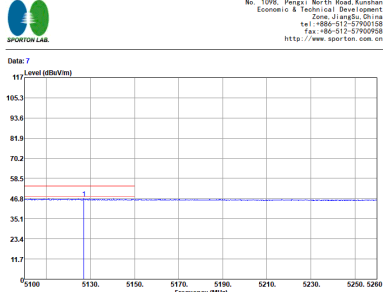

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																											
ANT	802.11ac VHT40 CH62 5310 - L																																																																											
1	Horizontal	Fundamental																																																																										
Peak	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW 1000.000kHz VBW 3000.000kHz SMT:Auto Mod : FFS 102106-01 Mtx : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBµV/m</th> <th>dB</th> <th>dBµV/m</th> <th>dBµV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5109.44</td> <td>57.52</td> <td>-16.48</td> <td>74.00</td> <td>43.69</td> <td>35.00</td> <td>10.61</td> <td>31.78</td> <td>295</td> <td>320</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBµV/m	dB	dBµV/m	dBµV	dB	cm	deg		1	5109.44	57.52	-16.48	74.00	43.69	35.00	10.61	31.78	295	320	Peak	HORIZONTAL	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW 1000.000kHz VBW 3000.000kHz SMT:Auto Mod : FFS 102106-01 Mtx : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBµV/m</th> <th>dB</th> <th>dBµV/m</th> <th>dBµV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5308.00</td> <td>98.04</td> <td>29.76</td> <td>68.30</td> <td>84.02</td> <td>35.18</td> <td>10.76</td> <td>31.90</td> <td>295</td> <td>320</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5308.00</td> <td>90.78</td> <td>-----</td> <td>76.74</td> <td>35.18</td> <td>10.76</td> <td>31.90</td> <td>295</td> <td>320</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBµV/m	dB	dBµV/m	dBµV	dB	cm	deg		1	5308.00	98.04	29.76	68.30	84.02	35.18	10.76	31.90	295	320	Peak	HORIZONTAL	2	5308.00	90.78	-----	76.74	35.18	10.76	31.90	295	320	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBµV/m	dB	dBµV/m	dBµV	dB	cm	deg																																																																					
1	5109.44	57.52	-16.48	74.00	43.69	35.00	10.61	31.78	295	320	Peak	HORIZONTAL																																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBµV/m	dB	dBµV/m	dBµV	dB	cm	deg																																																																					
1	5308.00	98.04	29.76	68.30	84.02	35.18	10.76	31.90	295	320	Peak	HORIZONTAL																																																																
2	5308.00	90.78	-----	76.74	35.18	10.76	31.90	295	320	Average	HORIZONTAL																																																																	
Avg.	 <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW 1000.000kHz VBW 1.000kHz SMT:Auto Mod : FFS 102106-01 Mtx : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBµV/m</th> <th>dB</th> <th>dBµV/m</th> <th>dBµV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5127.04</td> <td>46.86</td> <td>-7.14</td> <td>54.00</td> <td>33.01</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>295</td> <td>320</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBµV/m	dB	dBµV/m	dBµV	dB	cm	deg		1	5127.04	46.86	-7.14	54.00	33.01	35.01	10.63	31.79	295	320	Average	HORIZONTAL	Left blank																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBµV/m	dB	dBµV/m	dBµV	dB	cm	deg																																																																					
1	5127.04	46.86	-7.14	54.00	33.01	35.01	10.63	31.79	295	320	Average	HORIZONTAL																																																																



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																															
ANT	802.11ac VHT40 CH62 5310 - R																															
1	Horizontal	Fundamental																														
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 @ 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 3000, 0000Hz, SMI: Auto (FR) 102106-01 Mod : Z2 MEI : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.90</td> <td>55.16</td> <td>-18.84</td> <td>74.00</td> <td>41.09</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>295</td> <td>320 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	5350.90	55.16	-18.84	74.00	41.09	35.22	10.78	31.93	295	320 Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																									
1	5350.90	55.16	-18.84	74.00	41.09	35.22	10.78	31.93	295	320 Peak	HORIZONTAL																					
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 (AVG) @ 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 1, 0000Hz, SMI: Auto (FR) 102106-01 Mod : Z2 MEI : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.00</td> <td>46.70</td> <td>-7.30</td> <td>54.00</td> <td>32.63</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>295</td> <td>320 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg		1	5353.00	46.70	-7.30	54.00	32.63	35.22	10.78	31.93	295	320 Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																									
1	5353.00	46.70	-7.30	54.00	32.63	35.22	10.78	31.93	295	320 Average	HORIZONTAL																					



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																													
ANT	802.11ac VHT40 CH62 5310 - L																																																																																													
1	Vertical	Fundamental																																																																																												
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102100-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>deg</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5128.00</td> <td>57.16</td> <td>-16.84</td> <td>74.00</td> <td>43.31</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>217</td> <td>262</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	Factor	deg	deg	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	1	5128.00	57.16	-16.84	74.00	43.31	35.01	10.63	31.79	217	262	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102100-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>deg</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5314.00</td> <td>105.61</td> <td>37.31</td> <td>68.30</td> <td>91.55</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>217</td> <td>262</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5314.00</td> <td>98.39</td> <td>-----</td> <td>84.33</td> <td>35.19</td> <td>10.77</td> <td>31.90</td> <td>217</td> <td>262</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	Factor	deg	deg	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	1	5314.00	105.61	37.31	68.30	91.55	35.19	10.77	31.90	217	262	Peak	VERTICAL	2	5314.00	98.39	-----	84.33	35.19	10.77	31.90	217	262	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
Level	Line	Level	Factor	Loss	Factor	Factor	deg	deg																																																																																						
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg																																																																																						
1	5128.00	57.16	-16.84	74.00	43.31	35.01	10.63	31.79	217	262	Peak	VERTICAL																																																																																		
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
Level	Line	Level	Factor	Loss	Factor	Factor	deg	deg																																																																																						
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg																																																																																						
1	5314.00	105.61	37.31	68.30	91.55	35.19	10.77	31.90	217	262	Peak	VERTICAL																																																																																		
2	5314.00	98.39	-----	84.33	35.19	10.77	31.90	217	262	Average	VERTICAL																																																																																			
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1-3 (AVG) @ 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:1,000kHz SRT:Auto FREQ:102100-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>deg</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5136.32</td> <td>47.06</td> <td>-6.94</td> <td>54.00</td> <td>33.21</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>217</td> <td>262</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	Factor	Factor	deg	deg	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg	1	5136.32	47.06	-6.94	54.00	33.21	35.01	10.63	31.79	217	262	Average	VERTICAL	Left blank																																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
Level	Line	Level	Factor	Loss	Factor	Factor	deg	deg																																																																																						
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cm	deg																																																																																						
1	5136.32	47.06	-6.94	54.00	33.21	35.01	10.63	31.79	217	262	Average	VERTICAL																																																																																		



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																									
ANT	802.11ac VHT40 CH62 5310 - R																																									
1	Vertical	Fundamental																																								
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : RRM 1000, 0000Hz, VBR 3000, 0000Hz, SRT: Auto FR1: 102106-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : V Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.50</td> <td>58.67</td> <td>-15.23</td> <td>74.00</td> <td>44.60</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>217</td> <td>262</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg	1	5362.50	58.67	-15.23	74.00	44.60	35.22	10.78	31.93	217	262	Peak	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																		
1	5362.50	58.67	-15.23	74.00	44.60	35.22	10.78	31.93	217	262	Peak	VERTICAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218642 VERTICAL Project : RRM 1000, 0000Hz, VBR 1, 0000Hz, SRT: Auto FR1: 102106-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : V Powersetting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.30</td> <td>50.04</td> <td>-3.99</td> <td>54.00</td> <td>35.97</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>217</td> <td>262</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg	1	5350.30	50.04	-3.99	54.00	35.97	35.22	10.78	31.93	217	262	Average	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																		
1	5350.30	50.04	-3.99	54.00	35.97	35.22	10.78	31.93	217	262	Average	VERTICAL																														



**U-NII-2A 5250~5350MHz  
WIFI 802.11ac VHT80(Band Edge @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																
ANT	802.11ac VHT80 CH58 5290MHz - L																																																																																
1	Horizontal	Fundamental																																																																															
<b>Peak</b>	<p><b>Horizontal</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRE 1000.000MHz VBR 3000.000MHz SWT Auto Mode: 27 MUT: #12 EIF-BASE1 Plane: full-directivity Powersetting: 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5127.20</td> <td>55.89</td> <td>-18.11</td> <td>74.00</td> <td>42.04</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>328</td> <td>140 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	5127.20	55.89	-18.11	74.00	42.04	35.01	10.63	31.79	328	140 Peak	HORIZONTAL	<p><b>Fundamental</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRE 1000.000MHz VBR 3000.000MHz SWT Auto Mode: 27 MUT: #12 EIF-BASE1 Plane: full-directivity Powersetting: 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5284.00</td> <td>91.63</td> <td>23.33</td> <td>68.30</td> <td>77.60</td> <td>35.16</td> <td>10.75</td> <td>31.88</td> <td>338</td> <td>140 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5284.00</td> <td>83.75</td> <td></td> <td>69.10</td> <td>35.16</td> <td>10.75</td> <td>31.88</td> <td>338</td> <td>140 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	5284.00	91.63	23.33	68.30	77.60	35.16	10.75	31.88	338	140 Peak	HORIZONTAL	2	5284.00	83.75		69.10	35.16	10.75	31.88	338	140 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																									
1	5127.20	55.89	-18.11	74.00	42.04	35.01	10.63	31.79	328	140 Peak	HORIZONTAL																																																																						
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																									
1	5284.00	91.63	23.33	68.30	77.60	35.16	10.75	31.88	338	140 Peak	HORIZONTAL																																																																						
2	5284.00	83.75		69.10	35.16	10.75	31.88	338	140 Average	HORIZONTAL																																																																							
<b>Avg.</b>	<p><b>Horizontal</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project: RRE 1000.000MHz VBR 3.3000MHz SWT Auto Mode: 27 MUT: #12 EIF-BASE1 Plane: full-directivity Powersetting: 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5115.20</td> <td>47.09</td> <td>-6.91</td> <td>54.00</td> <td>33.26</td> <td>35.00</td> <td>10.61</td> <td>31.78</td> <td>328</td> <td>140 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg			1	5115.20	47.09	-6.91	54.00	33.26	35.00	10.61	31.78	328	140 Average	HORIZONTAL	<b>Left blank</b>																																													
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																									
1	5115.20	47.09	-6.91	54.00	33.26	35.00	10.61	31.78	328	140 Average	HORIZONTAL																																																																						



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																									
ANT	802.11ac VHT80 CH58 5290MHz - R																																									
1	Horizontal	Fundamental																																								
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 3000, 0000Hz, SRT: Auto FR1: 102106-01 Mod : 27 MEI : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5379.70</td> <td>54.78</td> <td>-19.22</td> <td>74.00</td> <td>40.69</td> <td>35.24</td> <td>10.80</td> <td>31.95</td> <td>328</td> <td>140</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5379.70	54.78	-19.22	74.00	40.69	35.24	10.80	31.95	328	140	Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	5379.70	54.78	-19.22	74.00	40.69	35.24	10.80	31.95	328	140	Peak	HORIZONTAL																														
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032005-KS Condition : 5G BAND 1-3 (AVG) @ 3117 SN 00218642 HORIZONTAL Project : RRM 1000, 0000Hz, VSW: 3, 3000Hz, SRT: Auto FR1: 102106-01 Mod : 27 MEI : #12 EIF-BASE1 Plane : Y Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5372.10</td> <td>46.08</td> <td>-7.92</td> <td>54.00</td> <td>31.98</td> <td>35.24</td> <td>10.79</td> <td>31.93</td> <td>328</td> <td>140</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5372.10	46.08	-7.92	54.00	31.98	35.24	10.79	31.93	328	140	Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	5372.10	46.08	-7.92	54.00	31.98	35.24	10.79	31.93	328	140	Average	HORIZONTAL																														





WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																																																																
ANT	802.11ac VHT80 CH58 5290MHz - L																																																																																
1	Vertical	Fundamental																																																																															
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto Freq:102100-01 Mode : 27 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>PowerSetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5115.68</td> <td>57.00</td> <td>-17.00</td> <td>74.00</td> <td>43.17</td> <td>35.00</td> <td>10.61</td> <td>31.78</td> <td>234</td> <td>266</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5115.68	57.00	-17.00	74.00	43.17	35.00	10.61	31.78	234	266	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto Freq:102100-01 Mode : 27 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>PowerSetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5296.00</td> <td>100.17</td> <td>31.87</td> <td>68.30</td> <td>86.13</td> <td>35.16</td> <td>10.76</td> <td>31.88</td> <td>234</td> <td>266</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5296.00</td> <td>92.59</td> <td>-----</td> <td>-----</td> <td>78.55</td> <td>35.16</td> <td>10.76</td> <td>31.88</td> <td>234</td> <td>266</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5296.00	100.17	31.87	68.30	86.13	35.16	10.76	31.88	234	266	Peak	VERTICAL	2	5296.00	92.59	-----	-----	78.55	35.16	10.76	31.88	234	266	Average	VERTICAL
PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1	5115.68	57.00	-17.00	74.00	43.17	35.00	10.61	31.78	234	266	Peak	VERTICAL																																																																					
PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1	5296.00	100.17	31.87	68.30	86.13	35.16	10.76	31.88	234	266	Peak	VERTICAL																																																																					
2	5296.00	92.59	-----	-----	78.55	35.16	10.76	31.88	234	266	Average	VERTICAL																																																																					
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3,300kHz SRT:Auto Freq:102100-01 Mode : 27 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>PowerSetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5133.60</td> <td>47.22</td> <td>-6.78</td> <td>54.00</td> <td>33.37</td> <td>35.01</td> <td>10.63</td> <td>31.79</td> <td>234</td> <td>266</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5133.60	47.22	-6.78	54.00	33.37	35.01	10.63	31.79	234	266	Average	VERTICAL	Left blank																																														
PowerSetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1	5133.60	47.22	-6.78	54.00	33.37	35.01	10.63	31.79	234	266	Average	VERTICAL																																																																					



WIFI	U-NII-2A 5250~5350MHz Band Edge @ 3m																																
ANT	802.11ac VHT80 CH58 5290MHz - R																																
1	Vertical	Fundamental																															
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 24</p> <p>Site: 032005-KS Condition: 5G BAND 1-3 @ 3117 SN 00218642 VERTICAL Power: 1000.0000MHz VSW: 3.0000dB SWI: Auto Project: (FR)102106-01 Mod: 27 MEI: #12 EIF-BASE1 Plane: V Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5363.80</td> <td>56.31</td> <td>-17.69</td> <td>74.00</td> <td>42.23</td> <td>35.22</td> <td>10.79</td> <td>31.93</td> <td>234</td> <td>266</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg		1	5363.80	56.31	-17.69	74.00	42.23	35.22	10.79	31.93	234	266	Peak	VERTICAL	<p><b>Left blank</b></p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																										
1	5363.80	56.31	-17.69	74.00	42.23	35.22	10.79	31.93	234	266	Peak	VERTICAL																					
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 25</p> <p>Site: 032005-KS Condition: 5G BAND 1-3 (AVG) @ 3117 SN 00218642 VERTICAL Power: 1000.0000MHz VSW: 3.0000dB SWI: Auto Project: (FR)102106-01 Mod: 27 MEI: #12 EIF-BASE1 Plane: V Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.00</td> <td>49.25</td> <td>-4.75</td> <td>54.00</td> <td>35.18</td> <td>35.22</td> <td>10.78</td> <td>31.93</td> <td>234</td> <td>266</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg		1	5350.00	49.25	-4.75	54.00	35.18	35.22	10.78	31.93	234	266	Average	VERTICAL	<p><b>Left blank</b></p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																										
1	5350.00	49.25	-4.75	54.00	35.18	35.22	10.78	31.93	234	266	Average	VERTICAL																					



**U-NII-2A - 5250~5350MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m																																																																	
ANT	802.11a CH52 5260MHz																																																																	
1	Horizontal	Vertical																																																																
Peak Avg.	<p>Site : 030906-KS            Condition : 5G BAND 1-3 3m 3117 SW 00218642 HORIZONTAL            Project : RBW 1000,000kHz VBW 3000,000kHz SMT Auto            Mode : FREQ102106-01            Band : #12 EIF-BASE1            Plane : Full-directivity            Power setting : 10</p> <table border="1"> <thead> <tr> <th>Flag</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dB</th> <th>dBm/100</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.38</td> <td>-21.92</td> <td>68.30</td> <td>53.18</td> <td>38.37</td> <td>15.48</td> <td>60.65</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Flag	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dB	dBm/100	dBm	dB	dB	dB	dB	dB	dB	deg	1	10520.00	46.38	-21.92	68.30	53.18	38.37	15.48	60.65	300	0 Peak	HORIZONTAL	<p>Site : 030906-KS            Condition : 5G BAND 1-3 3m 3117 SW 00218642 VERTICAL            Project : RBW 1000,000kHz VBW 3000,000kHz SMT Auto            Mode : FREQ102106-01            Band : #12 EIF-BASE1            Plane : Full-directivity            Power setting : 10</p> <table border="1"> <thead> <tr> <th>Flag</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>dB</th> <th>dBm/100</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10530.00</td> <td>46.86</td> <td>-21.44</td> <td>68.30</td> <td>53.66</td> <td>38.37</td> <td>15.48</td> <td>60.65</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Flag	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	dB	dBm/100	dBm	dB	dB	dB	dB	dB	dB	deg	1	10530.00	46.86	-21.44	68.30	53.66	38.37	15.48	60.65	100	0 Peak	VERTICAL
	Flag	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
dB	dBm/100	dBm	dB	dB	dB	dB	dB	dB	deg																																																									
1	10520.00	46.38	-21.92	68.30	53.18	38.37	15.48	60.65	300	0 Peak	HORIZONTAL																																																							
Flag	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																									
dB	dBm/100	dBm	dB	dB	dB	dB	dB	dB	deg																																																									
1	10530.00	46.86	-21.44	68.30	53.66	38.37	15.48	60.65	100	0 Peak	VERTICAL																																																							



WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m																																																													
ANT	802.11a CH60 5300MHZ																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03906-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SRT:Auto FRS102106-01 Mode : S MEI : #12 E1F-BASE1 Plane : Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>46.83</td> <td>-27.17</td> <td>74.00</td> <td>53.52</td> <td>38.40</td> <td>15.54</td> <td>60.63</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	10400.00	46.83	-27.17	74.00	53.52	38.40	15.54	60.63	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SRT:Auto FRS102106-01 Mode : S MEI : #12 E1F-BASE1 Plane : Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>45.69</td> <td>-28.31</td> <td>74.00</td> <td>52.38</td> <td>38.40</td> <td>15.54</td> <td>60.63</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	10400.00	45.69	-28.31	74.00	52.38	38.40	15.54	60.63	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																						
1	10400.00	46.83	-27.17	74.00	53.52	38.40	15.54	60.63	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																						
1	10400.00	45.69	-28.31	74.00	52.38	38.40	15.54	60.63	100	0 Peak	VERTICAL																																																			
	<p>Site : 03906-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SRT:Auto FRS102106-01 Mode : S MEI : #12 E1F-BASE1 Plane : Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>46.83</td> <td>-27.17</td> <td>74.00</td> <td>53.52</td> <td>38.40</td> <td>15.54</td> <td>60.63</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	10400.00	46.83	-27.17	74.00	53.52	38.40	15.54	60.63	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SRT:Auto FRS102106-01 Mode : S MEI : #12 E1F-BASE1 Plane : Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>45.69</td> <td>-28.31</td> <td>74.00</td> <td>52.38</td> <td>38.40</td> <td>15.54</td> <td>60.63</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	10400.00	45.69	-28.31	74.00	52.38	38.40	15.54	60.63	100	0 Peak	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																						
1	10400.00	46.83	-27.17	74.00	53.52	38.40	15.54	60.63	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																						
1	10400.00	45.69	-28.31	74.00	52.38	38.40	15.54	60.63	100	0 Peak	VERTICAL																																																			



WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m																																							
ANT	802.11a CH64 5320MHz																																							
1	Horizontal	Vertical																																						
Peak Avg.	<p>Site : 03906-KS            Condition : 5G BAND 1-3 @ 3117 SN 00218642 HORIZONTAL            Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto            Mode : FR102106-01            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>46.34</td> <td>-27.66</td> <td>74.00</td> <td>52.98</td> <td>38.41</td> <td>15.57</td> <td>60.62</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark	Pol/Phas	1 10640.00	46.34	-27.66	74.00	52.98	38.41	15.57	60.62	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS            Condition : 5G BAND 1-3 @ 3117 SN 00218642 VERTICAL            Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto            Mode : FR102106-01            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>46.05</td> <td>-27.95</td> <td>74.00</td> <td>52.69</td> <td>38.41</td> <td>15.57</td> <td>60.62</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark	Pol/Phas	1 10640.00	46.05	-27.95	74.00	52.69	38.41	15.57	60.62	100	0 Peak	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark	Pol/Phas																																
1 10640.00	46.34	-27.66	74.00	52.98	38.41	15.57	60.62	300	0 Peak	HORIZONTAL																														
Freq	Level	Limit	Line	Level Factor	Loss Factor	Remark	Pol/Phas																																	
1 10640.00	46.05	-27.95	74.00	52.69	38.41	15.57	60.62	100	0 Peak	VERTICAL																														



**U-NII-2A 5250~5350MHz  
WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT20 CH52 5260MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 030004-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 HORIZONTAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : 12 ME1 : #12 E1F-BASE1 Plane : 1 Powersetting : full-directivity Tc : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10020.00</td> <td>46.55</td> <td>-21.75</td> <td>68.30</td> <td>54.32</td> <td>38.37</td> <td>15.48</td> <td>61.62</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cn	deg	1 10020.00	46.55	-21.75	68.30	54.32	38.37	15.48	61.62	300	0 Peak HORIZONTAL	<p>Site : 030004-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 VERTICAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : 12 ME1 : #12 E1F-BASE1 Plane : 1 Powersetting : full-directivity Tc : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10020.00</td> <td>46.85</td> <td>-21.45</td> <td>68.30</td> <td>54.62</td> <td>38.37</td> <td>15.48</td> <td>61.62</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cn	deg	1 10020.00	46.85	-21.45	68.30	54.62	38.37	15.48	61.62	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cn	deg																																																					
1 10020.00	46.55	-21.75	68.30	54.32	38.37	15.48	61.62	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dB	cn	deg																																																					
1 10020.00	46.85	-21.45	68.30	54.62	38.37	15.48	61.62	100	0 Peak VERTICAL																																																					



WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT20 CH60 5300MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03906-KS            Condition : 5G BAND 1-3 @ 3117 SN 00218642 HORIZONTAL            Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto            Mode : FFS102106-01            Band : 14            BEC : #12 E1F-BASE1            Plane : full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>47.28</td> <td>-26.72</td> <td>74.00</td> <td>54.98</td> <td>38.40</td> <td>15.54</td> <td>61.64</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10400.00	47.28	-26.72	74.00	54.98	38.40	15.54	61.64	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS            Condition : 5G BAND 1-3 @ 3117 SN 00218642 VERTICAL            Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto            Mode : FFS102106-01            Band : 14            BEC : #12 E1F-BASE1            Plane : full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.00</td> <td>46.17</td> <td>-27.83</td> <td>74.00</td> <td>53.87</td> <td>38.40</td> <td>15.54</td> <td>61.64</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	10400.00	46.17	-27.83	74.00	53.87	38.40	15.54	61.64	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	10400.00	47.28	-26.72	74.00	54.98	38.40	15.54	61.64	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	10400.00	46.17	-27.83	74.00	53.87	38.40	15.54	61.64	100	0 Peak	VERTICAL																																																			



WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m	
ANT	802.11ac VHT20 CH64 5320MHz	
1	Horizontal	Vertical
Peak Avg.		





**U-NII-2A 5250~5350MHz  
WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m																																																															
ANT	802.11ac VHT40 CH54 5270																																																															
1	Horizontal	Vertical																																																														
Peak Avg.	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project : R081000-000000-V08-3000-000000-081-Auto Mode : FR1102106-01 MDE : 21 MFE1 : #12 E1F-BASE1 Plane : 1 PowerSetting : full-directivity T : 1 PowerSetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10540.00</td> <td>46.00</td> <td>-22.30</td> <td>68.30</td> <td>53.74</td> <td>38.38</td> <td>15.50</td> <td>61.62</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1 10540.00	46.00	-22.30	68.30	53.74	38.38	15.50	61.62	300	0 Peak	HORIZONTAL	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : R081000-000000-V08-3000-000000-081-Auto Mode : FR1102106-01 MDE : 21 MFE1 : #12 E1F-BASE1 Plane : 1 PowerSetting : full-directivity T : 1 PowerSetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10540.00</td> <td>46.47</td> <td>-21.83</td> <td>68.30</td> <td>54.21</td> <td>38.38</td> <td>15.50</td> <td>61.62</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	1 10540.00	46.47	-21.83	68.30	54.21	38.38	15.50	61.62	100	0 Peak	VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																							
1 10540.00	46.00	-22.30	68.30	53.74	38.38	15.50	61.62	300	0 Peak	HORIZONTAL																																																						
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																							
1 10540.00	46.47	-21.83	68.30	54.21	38.38	15.50	61.62	100	0 Peak	VERTICAL																																																						



WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT40 CH62 5310																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117.5N 00218642 HORIZONTAL            Project : FR102106-01            Mode : 22            BEI : E1F-BASE1            Plane : Y            Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>46.75</td> <td>-27.25</td> <td>74.00</td> <td>54.43</td> <td>38.40</td> <td>15.56</td> <td>61.64</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	10420.00	46.75	-27.25	74.00	54.43	38.40	15.56	61.64	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS            Condition : SG BAND 1-3 @ 3117.5N 00218642 VERTICAL            Project : FR102106-01            Mode : 22            BEI : E1F-BASE1            Plane : Y            Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>46.34</td> <td>-27.66</td> <td>74.00</td> <td>54.02</td> <td>38.40</td> <td>15.56</td> <td>61.64</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	10420.00	46.34	-27.66	74.00	54.02	38.40	15.56	61.64	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																						
1	10420.00	46.75	-27.25	74.00	54.43	38.40	15.56	61.64	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																						
1	10420.00	46.34	-27.66	74.00	54.02	38.40	15.56	61.64	100	0 Peak	VERTICAL																																																			



**U-NII-2A 5250~5350MHz  
WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	U-NII-2A 5250~5350MHz Harmonic @ 3m	
ANT	802.11ac VHT80 CH58 5290MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 030004-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 HORIZONTAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : 27 ME1 : #12 E1F-BASE1 Plane : T Powersetting : Full-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas 1 10580.00 46.48 -21.82 68.30 54.19 38.39 15.53 61.63 300 0 Peak HORIZONTAL</p>	<p>Site : 030004-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 VERTICAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : 27 ME1 : #12 E1F-BASE1 Plane : T Powersetting : Full-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas 1 10580.00 46.17 -22.13 68.30 53.88 38.39 15.53 61.63 100 0 Peak VERTICAL</p>



**U-NII-2C - 5470~5725MHz**  
**WIFI 802.11a(Band Edge @ 3m)**

WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																									
ANT	802.11a CH100 5500MHz																																																																																									
1	Horizontal	Fundamental																																																																																								
<b>Peak</b>	<p>Site : 030006-KS Condition : SG BAND 1----3 3e 3117 SN 00218642 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 0000MHz, SRT-Auto Mode : (FR) 102106-01 Plane : #12 EIF-BASE1 Full-directivity : Y Power setting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5479.36</td> <td>55.50</td> <td>-18.50</td> <td>74.00</td> <td>41.33</td> <td>35.29</td> <td>10.86</td> <td>31.99</td> <td>302</td> <td>32 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5464.88</td> <td>57.08</td> <td>-11.22</td> <td>68.30</td> <td>42.83</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>302</td> <td>32 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg	1 5479.36	55.50	-18.50	74.00	41.33	35.29	10.86	31.99	302	32 Peak	HORIZONTAL	2 5464.88	57.08	-11.22	68.30	42.83	35.32	10.92	31.99	302	32 Peak	HORIZONTAL	<p>Site : 030006-KS Condition : SG BAND 1----3 3e 3117 SN 00218642 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 0000MHz, SRT-Auto Mode : (FR) 102106-01 Plane : #12 EIF-BASE1 Full-directivity : Y Power setting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5500.00</td> <td>105.88</td> <td>37.68</td> <td>68.30</td> <td>91.57</td> <td>35.35</td> <td>10.97</td> <td>32.01</td> <td>302</td> <td>32 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5500.00</td> <td>98.61</td> <td>-----</td> <td>84.30</td> <td>35.35</td> <td>10.97</td> <td>32.01</td> <td>302</td> <td>32</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg	1 * 5500.00	105.88	37.68	68.30	91.57	35.35	10.97	32.01	302	32 Peak	HORIZONTAL	2 5500.00	98.61	-----	84.30	35.35	10.97	32.01	302	32	Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg																																																																																
1 5479.36	55.50	-18.50	74.00	41.33	35.29	10.86	31.99	302	32 Peak	HORIZONTAL																																																																																
2 5464.88	57.08	-11.22	68.30	42.83	35.32	10.92	31.99	302	32 Peak	HORIZONTAL																																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg																																																																																
1 * 5500.00	105.88	37.68	68.30	91.57	35.35	10.97	32.01	302	32 Peak	HORIZONTAL																																																																																
2 5500.00	98.61	-----	84.30	35.35	10.97	32.01	302	32	Average	HORIZONTAL																																																																																
<b>Avg.</b>	<p>Site : 030006-KS Condition : SG BAND 1----3 (AVG) 3e 3117 SN 00218642 HORIZONTAL Economic &amp; Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-0, 7500MHz, SRT-Auto Mode : (FR) 102106-01 Plane : #12 EIF-BASE1 Full-directivity : Y Power setting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5456.40</td> <td>46.16</td> <td>-7.84</td> <td>54.00</td> <td>31.94</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>302</td> <td>32 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg	1 5456.40	46.16	-7.84	54.00	31.94	35.32	10.89	31.99	302	32 Average	HORIZONTAL	<b>Left blank</b>																																																							
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	dB	deg																																																																																
1 5456.40	46.16	-7.84	54.00	31.94	35.32	10.89	31.99	302	32 Average	HORIZONTAL																																																																																



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																			
ANT	802.11a CH100 5500MHz																																																																																			
1	Vertical	Fundamental																																																																																		
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03905-KS Condition : SG BAND 1---3 In 3117 SN 00218442 VERTICAL Project : RBW:1000.000KHz VBW:3000.000KHz SMT:Auto Mode : (FR)102106-01 MEI : 7 Plane : #12 E1F-BASE1 Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>5432.56</td> <td>57.37</td> <td>-16.43</td> <td>74.00</td> <td>43.20</td> <td>35.29</td> <td>10.86</td> <td>253</td> <td>268</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>5470.00</td> <td>59.05</td> <td>-9.25</td> <td>68.30</td> <td>44.78</td> <td>35.34</td> <td>10.92</td> <td>253</td> <td>268</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	5432.56	57.37	-16.43	74.00	43.20	35.29	10.86	253	268	Peak	VERTICAL	5470.00	59.05	-9.25	68.30	44.78	35.34	10.92	253	268	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03905-KS Condition : SG BAND 1---3 In 3117 SN 00218442 VERTICAL Project : RBW:1000.000KHz VBW:3000.000KHz SMT:Auto Mode : (FR)102106-01 MEI : 7 Plane : #12 E1F-BASE1 Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>5500.00</td> <td>110.78</td> <td>42.48</td> <td>68.30</td> <td>96.47</td> <td>35.35</td> <td>10.97</td> <td>32.01</td> <td>253</td> <td>268</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>5500.00</td> <td>103.32</td> <td>-----</td> <td>-----</td> <td>89.01</td> <td>35.35</td> <td>10.97</td> <td>32.01</td> <td>253</td> <td>268</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	5500.00	110.78	42.48	68.30	96.47	35.35	10.97	32.01	253	268	Peak	VERTICAL	5500.00	103.32	-----	-----	89.01	35.35	10.97	32.01	253	268	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																																												
5432.56	57.37	-16.43	74.00	43.20	35.29	10.86	253	268	Peak	VERTICAL																																																																										
5470.00	59.05	-9.25	68.30	44.78	35.34	10.92	253	268	Peak	VERTICAL																																																																										
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																																												
5500.00	110.78	42.48	68.30	96.47	35.35	10.97	32.01	253	268	Peak	VERTICAL																																																																									
5500.00	103.32	-----	-----	89.01	35.35	10.97	32.01	253	268	Average	VERTICAL																																																																									
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03905-KS Condition : SG BAND 1---3 (AVG) In 3117 SN 00218442 VERTICAL Project : RBW:1000.000KHz VBW:3000.000KHz SMT:Auto Mode : (FR)102106-01 MEI : 7 Plane : #12 E1F-BASE1 Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>5469.60</td> <td>48.26</td> <td>-5.74</td> <td>54.00</td> <td>34.04</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>253</td> <td>268</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	5469.60	48.26	-5.74	54.00	34.04	35.32	10.89	31.99	253	268	Average	VERTICAL	<p><b>Left blank</b></p>																																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																																												
5469.60	48.26	-5.74	54.00	34.04	35.32	10.89	31.99	253	268	Average	VERTICAL																																																																									



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																
ANT	802.11a CH116 5580MHz - L																																																																																
1	Horizontal	Fundamental																																																																															
<b>Peak</b>	<p>Site : 030906-KS            Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL            Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto            (FR)102106-01            Mode : B            MEI : #12 EIF-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5472.12</td> <td>54.94</td> <td>-19.06</td> <td>74.00</td> <td>40.79</td> <td>35.29</td> <td>10.84</td> <td>31.98</td> <td>389</td> <td>19</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5466.48</td> <td>54.10</td> <td>-14.20</td> <td>68.30</td> <td>39.85</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>389</td> <td>19</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 5472.12	54.94	-19.06	74.00	40.79	35.29	10.84	31.98	389	19	Peak	HORIZONTAL	2 5466.48	54.10	-14.20	68.30	39.85	35.32	10.92	31.99	389	19	Peak	HORIZONTAL	<p>Site : 030906-KS            Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL            Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto            (FR)102106-01            Mode : B            MEI : #12 EIF-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5584.00</td> <td>105.30</td> <td>37.00</td> <td>68.30</td> <td>90.83</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>389</td> <td>19</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5584.00</td> <td>97.79</td> <td>-----</td> <td>83.32</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>389</td> <td>19</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 * 5584.00	105.30	37.00	68.30	90.83	35.44	11.10	32.07	389	19	Peak	HORIZONTAL	2 5584.00	97.79	-----	83.32	35.44	11.10	32.07	389	19	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1 5472.12	54.94	-19.06	74.00	40.79	35.29	10.84	31.98	389	19	Peak	HORIZONTAL																																																																						
2 5466.48	54.10	-14.20	68.30	39.85	35.32	10.92	31.99	389	19	Peak	HORIZONTAL																																																																						
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1 * 5584.00	105.30	37.00	68.30	90.83	35.44	11.10	32.07	389	19	Peak	HORIZONTAL																																																																						
2 5584.00	97.79	-----	83.32	35.44	11.10	32.07	389	19	Average	HORIZONTAL																																																																							
<b>Avg.</b>	<p>Site : 030906-KS            Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL            Project : RBW:1000,000kHz VBR:0,000kHz SRT:Auto            (FR)102106-01            Mode : B            MEI : #12 EIF-BASE1            Plane : Full-directivity            Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.52</td> <td>45.38</td> <td>-8.62</td> <td>54.00</td> <td>31.16</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>389</td> <td>19</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1 5457.52	45.38	-8.62	54.00	31.16	35.32	10.89	31.99	389	19	Average	HORIZONTAL	<p>Left blank</p>																																																			
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																										
1 5457.52	45.38	-8.62	54.00	31.16	35.32	10.89	31.99	389	19	Average	HORIZONTAL																																																																						



<b>WIFI</b>	<b>U-NII-2C 5470~5725MHz Band Edge @ 3m</b>																															
<b>ANT</b>	<b>802.11a CH116 5580MHz - R</b>																															
<b>1</b>	<b>Horizontal</b>	<b>Fundamental</b>																														
<b>Peak</b>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 039906-KS Sensitivity : SG-BAND 1----3 3m 3117.5K 00218462 HORIZONTAL Power : RRM 1000.000KHz VSW 3000.000KHz SWI:Auto Project : FR102106-01 Mode : B IMEI : Plane : Y Full-directivity : Y Powersetting : 19</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pul/Phase</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5759.64</td> <td>56.66</td> <td>-11.65</td> <td>68.30</td> <td>41.68</td> <td>35.67</td> <td>11.29</td> <td>31.99</td> <td>389</td> <td>19 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase	Freq	Level	Level	Level	Factor	Loss	Factor			1	5759.64	56.66	-11.65	68.30	41.68	35.67	11.29	31.99	389	19 Peak	HORIZONTAL	<b>Left blank</b>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase																								
Freq	Level	Level	Level	Factor	Loss	Factor																										
1	5759.64	56.66	-11.65	68.30	41.68	35.67	11.29	31.99	389	19 Peak	HORIZONTAL																					



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																																					
ANT	802.11a CH116 5580MHz - L																																																																																																					
1	Vertical	Fundamental																																																																																																				
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FR102106-01 Mode : B Plane : #12 EIF-BASE1 Full-directivity : Y Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5411.60</td> <td>55.43</td> <td>-18.57</td> <td>74.00</td> <td>41.28</td> <td>35.77</td> <td>10.84</td> <td>31.96</td> <td>257</td> <td>267</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5462.32</td> <td>55.28</td> <td>-13.02</td> <td>68.30</td> <td>41.06</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>257</td> <td>267</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5411.60	55.43	-18.57	74.00	41.28	35.77	10.84	31.96	257	267	Peak	VERTICAL	2	5462.32	55.28	-13.02	68.30	41.06	35.32	10.89	31.99	257	267	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FR102106-01 Mode : B Plane : #12 EIF-BASE1 Full-directivity : Y Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5584.00</td> <td>110.26</td> <td>41.96</td> <td>68.30</td> <td>95.79</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>257</td> <td>267</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5584.00</td> <td>102.79</td> <td>-----</td> <td>-----</td> <td>88.32</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>257</td> <td>267</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5584.00	110.26	41.96	68.30	95.79	35.44	11.10	32.07	257	267	Peak	VERTICAL	2	5584.00	102.79	-----	-----	88.32	35.44	11.10	32.07	257	267	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																																															
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																															
1	5411.60	55.43	-18.57	74.00	41.28	35.77	10.84	31.96	257	267	Peak	VERTICAL																																																																																										
2	5462.32	55.28	-13.02	68.30	41.06	35.32	10.89	31.99	257	267	Peak	VERTICAL																																																																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																																															
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																															
1	5584.00	110.26	41.96	68.30	95.79	35.44	11.10	32.07	257	267	Peak	VERTICAL																																																																																										
2	5584.00	102.79	-----	-----	88.32	35.44	11.10	32.07	257	267	Average	VERTICAL																																																																																										
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FR102106-01 Mode : B Plane : #12 EIF-BASE1 Full-directivity : Y Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.80</td> <td>46.30</td> <td>-7.70</td> <td>54.00</td> <td>32.08</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>257</td> <td>267</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	5458.80	46.30	-7.70	54.00	32.08	35.32	10.89	31.99	257	267	Average	VERTICAL	Left blank																																																															
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																																															
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																															
1	5458.80	46.30	-7.70	54.00	32.08	35.32	10.89	31.99	257	267	Average	VERTICAL																																																																																										





WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																						
ANT	802.11a CH116 5580MHz - R																						
1	Vertical	Fundamental																					
<p><b>Peak</b></p>	<p> <small>           No. 1098, Pengzi North Road, Kunshan            Economic &amp; Technological Development            Zone, Jiangsu China            Tel: +86-512-57900158            Fax: +86-512-57900958            http://www.sporton.com.cn         </small> </p> <p> <small>           Site : 039906-KS            Position : SG BAND 1---3 3m 3117 SN 00218442 VERTICAL            Project : RRM 1000.000MHz VSW 3000.000kHz SRT:Auto            Mode : FRS 102106-01            Band : B            IMEI :            Plane : Y            Full-directivity : Y            Powersetting : 16            Over Limit :            ReadAntenna :            Cable Preamp :            A/Pos :            T/Pos :            Remark :            Pol/Phase :         </small> </p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> <th>Pol/Phase</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5747.96</td> <td>56.54</td> <td>-11.76</td> <td>68.30</td> <td>41.63</td> <td>35.65</td> <td>11.27</td> <td>32.01</td> <td>257</td> <td>267 Peak VERTICAL</td> </tr> </tbody> </table>	Line	Freq	Level	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	1	5747.96	56.54	-11.76	68.30	41.63	35.65	11.27	32.01	257	267 Peak VERTICAL	<p><b>Left blank</b></p>
Line	Freq	Level	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase														
1	5747.96	56.54	-11.76	68.30	41.63	35.65	11.27	32.01	257	267 Peak VERTICAL													






WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																									
ANT	802.11a CH140 5700MHz																																																																									
1	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03906-KS            Condition : SG BAND 1-----3 3m 3117 SN 00218442 HORIZONTAL            Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto            (FR102106-01)            Mode : 9            BE1 : #12 E1F-BASE1            Plane : Y            Full-directivity            Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5728.12</td> <td>57.13</td> <td>-11.17</td> <td>68.30</td> <td>42.30</td> <td>35.62</td> <td>11.25</td> <td>32.04</td> <td>294</td> <td>28 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB	1	5728.12	57.13	-11.17	68.30	42.30	35.62	11.25	32.04	294	28 Peak	HORIZONTAL	<p>Site : 03906-KS            Condition : SG BAND 1-----3 3m 3117 SN 00218442 HORIZONTAL            Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto            (FR102106-01)            Mode : 9            BE1 : #12 E1F-BASE1            Plane : Y            Full-directivity            Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5698.00</td> <td>103.61</td> <td>35.31</td> <td>68.30</td> <td>88.87</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>294</td> <td>28 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5698.00</td> <td>96.57</td> <td>-----</td> <td>81.83</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>294</td> <td>28</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB	1	5698.00	103.61	35.31	68.30	88.87	35.58	11.22	32.06	294	28 Peak	HORIZONTAL	2	5698.00	96.57	-----	81.83	35.58	11.22	32.06	294	28	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB																																																																		
1	5728.12	57.13	-11.17	68.30	42.30	35.62	11.25	32.04	294	28 Peak	HORIZONTAL																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	dB	dB																																																																		
1	5698.00	103.61	35.31	68.30	88.87	35.58	11.22	32.06	294	28 Peak	HORIZONTAL																																																															
2	5698.00	96.57	-----	81.83	35.58	11.22	32.06	294	28	Average	HORIZONTAL																																																															



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																												
ANT	802.11a CH140 5700MHz																																																																												
1	Vertical	Fundamental																																																																											
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-----3 @ 3117.5N 00218442 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT:Auto FR102106-01 Mode : 9 MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 1</td> <td>5725.32</td> <td>63.66</td> <td>-4.44</td> <td>68.30</td> <td>48.83</td> <td>35.62</td> <td>11.25</td> <td>32.04</td> <td>251</td> <td>271</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	ca	deg	1 1	5725.32	63.66	-4.44	68.30	48.83	35.62	11.25	32.04	251	271	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-----3 @ 3117.5N 00218442 VERTICAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT:Auto FR102106-01 Mode : 9 MEI : #12 EIF-BASE1 Plane : Y Full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 *</td> <td>5698.00</td> <td>109.17</td> <td>40.87</td> <td>68.30</td> <td>94.43</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>251</td> <td>271</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5698.00</td> <td>101.82</td> <td>-----</td> <td>-----</td> <td>67.08</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>251</td> <td>271</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	ca	deg	1 *	5698.00	109.17	40.87	68.30	94.43	35.58	11.22	32.06	251	271	Peak	VERTICAL	2	5698.00	101.82	-----	-----	67.08	35.58	11.22	32.06	251	271	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Level	Factor	Loss	Factor	ca	deg																																																																					
1 1	5725.32	63.66	-4.44	68.30	48.83	35.62	11.25	32.04	251	271	Peak	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	ca	deg																																																																					
1 *	5698.00	109.17	40.87	68.30	94.43	35.58	11.22	32.06	251	271	Peak	VERTICAL																																																																	
2	5698.00	101.82	-----	-----	67.08	35.58	11.22	32.06	251	271	Average	VERTICAL																																																																	



**U-NII-2C 5470~5725MHz  
WIFI 802.11ac VHT20 (Band Edge @ 3m)**

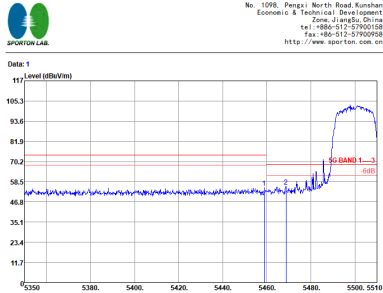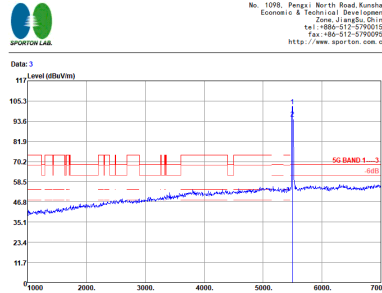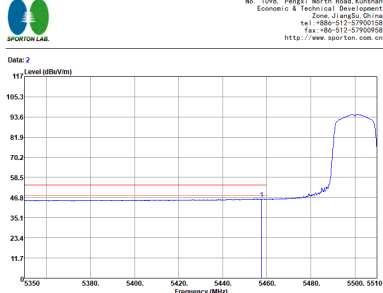WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																																																					
ANT	802.11ac VHT20 CH100 5500MHz																																																																																																																					
1	Horizontal	Fundamental																																																																																																																				
<p align="center"><b>Peak</b></p>	 <p align="center">Data: 1</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>ME1</th> <th>Plane</th> <th>Powersetting</th> </tr> </thead> <tbody> <tr> <td>030906-KS</td> <td>SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL</td> <td>FR1102106-01</td> <td>16</td> <td>#12 EIF-BASE1</td> <td>Full-directivity</td> <td>16</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable</th> <th>Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5458.80</td> <td>54.93</td> <td>-19.97</td> <td>74.00</td> <td>40.71</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>289</td> <td>126</td> <td>Peak</td> </tr> <tr> <td>5468.72</td> <td>55.90</td> <td>-12.50</td> <td>68.30</td> <td>41.53</td> <td>35.34</td> <td>10.92</td> <td>31.99</td> <td>289</td> <td>126</td> <td>Peak</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	ME1	Plane	Powersetting	030906-KS	SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL	FR1102106-01	16	#12 EIF-BASE1	Full-directivity	16	Freq	Level	Over	Limit	ReadStema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		5458.80	54.93	-19.97	74.00	40.71	35.32	10.89	31.99	289	126	Peak	5468.72	55.90	-12.50	68.30	41.53	35.34	10.92	31.99	289	126	Peak	 <p align="center">Data: 3</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>ME1</th> <th>Plane</th> <th>Powersetting</th> </tr> </thead> <tbody> <tr> <td>030906-KS</td> <td>SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL</td> <td>FR1102106-01</td> <td>16</td> <td>#12 EIF-BASE1</td> <td>Full-directivity</td> <td>16</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable</th> <th>Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5500.00</td> <td>102.39</td> <td>34.09</td> <td>68.30</td> <td>88.08</td> <td>35.35</td> <td>10.97</td> <td>32.01</td> <td>289</td> <td>126</td> <td>Peak</td> </tr> <tr> <td>5500.00</td> <td>195.01</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>Average</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	ME1	Plane	Powersetting	030906-KS	SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL	FR1102106-01	16	#12 EIF-BASE1	Full-directivity	16	Freq	Level	Over	Limit	ReadStema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		5500.00	102.39	34.09	68.30	88.08	35.35	10.97	32.01	289	126	Peak	5500.00	195.01	---	---	---	---	---	---	---	---	Average
Site	Condition	Project	Mode	ME1	Plane	Powersetting																																																																																																																
030906-KS	SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL	FR1102106-01	16	#12 EIF-BASE1	Full-directivity	16																																																																																																																
Freq	Level	Over	Limit	ReadStema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
5458.80	54.93	-19.97	74.00	40.71	35.32	10.89	31.99	289	126	Peak																																																																																																												
5468.72	55.90	-12.50	68.30	41.53	35.34	10.92	31.99	289	126	Peak																																																																																																												
Site	Condition	Project	Mode	ME1	Plane	Powersetting																																																																																																																
030906-KS	SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL	FR1102106-01	16	#12 EIF-BASE1	Full-directivity	16																																																																																																																
Freq	Level	Over	Limit	ReadStema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
5500.00	102.39	34.09	68.30	88.08	35.35	10.97	32.01	289	126	Peak																																																																																																												
5500.00	195.01	---	---	---	---	---	---	---	---	Average																																																																																																												
<p align="center"><b>Avg.</b></p>	 <p align="center">Data: 2</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>ME1</th> <th>Plane</th> <th>Powersetting</th> </tr> </thead> <tbody> <tr> <td>030906-KS</td> <td>SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL</td> <td>FR1102106-01</td> <td>16</td> <td>#12 EIF-BASE1</td> <td>Full-directivity</td> <td>16</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadStema</th> <th>Cable</th> <th>Presamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>5457.08</td> <td>46.04</td> <td>-7.96</td> <td>54.00</td> <td>31.82</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>289</td> <td>126</td> <td>Average</td> </tr> </tbody> </table>	Site	Condition	Project	Mode	ME1	Plane	Powersetting	030906-KS	SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL	FR1102106-01	16	#12 EIF-BASE1	Full-directivity	16	Freq	Level	Over	Limit	ReadStema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		5457.08	46.04	-7.96	54.00	31.82	35.32	10.89	31.99	289	126	Average	<p align="center"><b>Left blank</b></p>																																																																					
Site	Condition	Project	Mode	ME1	Plane	Powersetting																																																																																																																
030906-KS	SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL	FR1102106-01	16	#12 EIF-BASE1	Full-directivity	16																																																																																																																
Freq	Level	Over	Limit	ReadStema	Cable	Presamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																												
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
5457.08	46.04	-7.96	54.00	31.82	35.32	10.89	31.99	289	126	Average																																																																																																												



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																													
ANT	802.11ac VHT20 CH100 5500MHz																																																																													
1	Vertical	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 16 Plane : #12 E1F-BASE1 Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5453.68</td> <td>57.04</td> <td>-16.96</td> <td>74.00</td> <td>42.82</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>222 205 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 5463.12</td> <td>59.89</td> <td>-8.41</td> <td>68.30</td> <td>45.64</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>222 205 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg		1 5453.68	57.04	-16.96	74.00	42.82	35.32	10.89	31.99	222 205 Peak	VERTICAL	2 5463.12	59.89	-8.41	68.30	45.64	35.32	10.92	31.99	222 205 Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 16 Plane : #12 E1F-BASE1 Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>108.94</td> <td>40.44</td> <td>68.30</td> <td>94.43</td> <td>35.35</td> <td>10.97</td> <td>32.01</td> <td>222 205 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 5500.00</td> <td>101.55</td> <td>-----</td> <td>-----</td> <td>87.24</td> <td>35.35</td> <td>10.97</td> <td>32.01</td> <td>222 205 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg		1 5500.00	108.94	40.44	68.30	94.43	35.35	10.97	32.01	222 205 Peak	VERTICAL	2 5500.00	101.55	-----	-----	87.24	35.35	10.97	32.01	222 205 Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																							
1 5453.68	57.04	-16.96	74.00	42.82	35.32	10.89	31.99	222 205 Peak	VERTICAL																																																																					
2 5463.12	59.89	-8.41	68.30	45.64	35.32	10.92	31.99	222 205 Peak	VERTICAL																																																																					
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																							
1 5500.00	108.94	40.44	68.30	94.43	35.35	10.97	32.01	222 205 Peak	VERTICAL																																																																					
2 5500.00	101.55	-----	-----	87.24	35.35	10.97	32.01	222 205 Average	VERTICAL																																																																					
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) In 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:0,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 16 Plane : #12 E1F-BASE1 Full-directivity : Y Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5458.96</td> <td>47.95</td> <td>-6.05</td> <td>54.00</td> <td>33.73</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>222 205 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg		1 5458.96	47.95	-6.05	54.00	33.73	35.32	10.89	31.99	222 205 Average	VERTICAL	Left blank																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																																							
1 5458.96	47.95	-6.05	54.00	33.73	35.32	10.89	31.99	222 205 Average	VERTICAL																																																																					



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																																
ANT	802.11ac VHT20 CH116 5580MHz - L																																																																																																
1	Horizontal	Fundamental																																																																																															
<p><b>Peak</b></p>	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102106-01 Mode : 17 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5443.92</td> <td>55.62</td> <td>-18.28</td> <td>74.00</td> <td>41.40</td> <td>35.31</td> <td>10.89</td> <td>31.98</td> <td>100</td> <td>311</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5464.40</td> <td>55.08</td> <td>-13.22</td> <td>68.30</td> <td>40.83</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>100</td> <td>311</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	cm	deg	1 5443.92	55.62	-18.28	74.00	41.40	35.31	10.89	31.98	100	311	Peak	HORIZONTAL	2 5464.40	55.08	-13.22	68.30	40.83	35.32	10.92	31.99	100	311	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102106-01 Mode : 17 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5584.00</td> <td>104.85</td> <td>36.55</td> <td>68.30</td> <td>90.38</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>100</td> <td>311</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5584.00</td> <td>97.73</td> <td>-----</td> <td>83.26</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>100</td> <td>311</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	cm	deg	1 * 5584.00	104.85	36.55	68.30	90.38	35.44	11.10	32.07	100	311	Peak	HORIZONTAL	2 5584.00	97.73	-----	83.26	35.44	11.10	32.07	100	311	Average	HORIZONTAL
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	cm	deg																																																																																						
1 5443.92	55.62	-18.28	74.00	41.40	35.31	10.89	31.98	100	311	Peak	HORIZONTAL																																																																																						
2 5464.40	55.08	-13.22	68.30	40.83	35.32	10.92	31.99	100	311	Peak	HORIZONTAL																																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	cm	deg																																																																																						
1 * 5584.00	104.85	36.55	68.30	90.38	35.44	11.10	32.07	100	311	Peak	HORIZONTAL																																																																																						
2 5584.00	97.73	-----	83.26	35.44	11.10	32.07	100	311	Average	HORIZONTAL																																																																																							
<p><b>Avg.</b></p>	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:0,000kHz SRT:Auto FREQ:102106-01 Mode : 17 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5443.92</td> <td>46.54</td> <td>-7.40</td> <td>54.00</td> <td>32.35</td> <td>35.31</td> <td>10.86</td> <td>31.98</td> <td>100</td> <td>311</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	cm	deg	1 5443.92	46.54	-7.40	54.00	32.35	35.31	10.86	31.98	100	311	Average	HORIZONTAL	<p><b>Left blank</b></p>																																																											
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	cm	deg																																																																																						
1 5443.92	46.54	-7.40	54.00	32.35	35.31	10.86	31.98	100	311	Average	HORIZONTAL																																																																																						



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH116 5580MHz - R	
1	Horizontal	Fundamental
Peak		Left blank



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																																										
ANT	802.11ac VHT20 CH116 5580MHz - L																																																																																																										
1	Vertical	Fundamental																																																																																																									
<b>Peak</b>	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto FR102106-01 Mode : 17 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5443.76</td> <td>55.78</td> <td>-18.22</td> <td>74.00</td> <td>41.59</td> <td>35.31</td> <td>10.86</td> <td>31.98</td> <td>209</td> <td>207</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5462.00</td> <td>56.15</td> <td>-12.15</td> <td>68.30</td> <td>41.93</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>209</td> <td>207</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5443.76	55.78	-18.22	74.00	41.59	35.31	10.86	31.98	209	207	Peak	VERTICAL	2	5462.00	56.15	-12.15	68.30	41.93	35.32	10.89	31.99	209	207	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto FR102106-01 Mode : 17 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5584.00</td> <td>110.88</td> <td>42.58</td> <td>68.30</td> <td>96.41</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>209</td> <td>207</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5584.00</td> <td>103.73</td> <td>-----</td> <td>89.26</td> <td>35.44</td> <td>11.10</td> <td>32.07</td> <td>209</td> <td>207</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5584.00	110.88	42.58	68.30	96.41	35.44	11.10	32.07	209	207	Peak	VERTICAL	2	5584.00	103.73	-----	89.26	35.44	11.10	32.07	209	207	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																			
1	5443.76	55.78	-18.22	74.00	41.59	35.31	10.86	31.98	209	207	Peak	VERTICAL																																																																																															
2	5462.00	56.15	-12.15	68.30	41.93	35.32	10.89	31.99	209	207	Peak	VERTICAL																																																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																			
1	5584.00	110.88	42.58	68.30	96.41	35.44	11.10	32.07	209	207	Peak	VERTICAL																																																																																															
2	5584.00	103.73	-----	89.26	35.44	11.10	32.07	209	207	Average	VERTICAL																																																																																																
<b>Avg.</b>	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:0,000kHz SMT:Auto FR102106-01 Mode : 17 MEI : #39 EIF-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>47.21</td> <td>-6.79</td> <td>54.00</td> <td>32.99</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>209</td> <td>207</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	1	5459.92	47.21	-6.79	54.00	32.99	35.32	10.89	31.99	209	207	Average	VERTICAL	<b>Left blank</b>																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg																																																																																																			
1	5459.92	47.21	-6.79	54.00	32.99	35.32	10.89	31.99	209	207	Average	VERTICAL																																																																																															





WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																														
ANT	802.11ac VHT20 CH116 5580MHz - R																																														
1	Vertical	Fundamental																																													
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 10</p> <table border="1"> <thead> <tr> <th>Site</th> <td>: 039806-KS</td> </tr> <tr> <th>Simulation</th> <td>: SG BAND 1-----3 In 3117 SN 00218643 VERTICAL</td> </tr> <tr> <th>Project</th> <td>: RBE 1000.000MHz VBR 3000.000kHz SMT:Auto</td> </tr> <tr> <th>Model</th> <td>: FR102106-01</td> </tr> <tr> <th>Mode</th> <td>: 17</td> </tr> <tr> <th>IMEI</th> <td>: #39 E1F-BASE1</td> </tr> <tr> <th>Plane</th> <td>: Y</td> </tr> <tr> <th>Power setting</th> <td>: full-directivity</td> </tr> <tr> <td></td> <td>: 16</td> </tr> <tr> <th>Over Limit</th> <td>: ReadAntenna Cable Preamp A/Pos T/Pos</td> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Remark</th> <th>Pul/Phase</th> </tr> <tr> <td>5732.44</td> <td>-10.92</td> <td>08</td> <td>08.00</td> <td>08</td> <td>209</td> <td>Peak</td> </tr> <tr> <td>5732.44</td> <td>57.38</td> <td>-10.92</td> <td>68.30</td> <td>42.62</td> <td>35.62</td> <td>11.25</td> <td>32.01</td> <td>209</td> <td>Peak</td> <td>VERTICAL</td> </tr> </thead> </table>	Site	: 039806-KS	Simulation	: SG BAND 1-----3 In 3117 SN 00218643 VERTICAL	Project	: RBE 1000.000MHz VBR 3000.000kHz SMT:Auto	Model	: FR102106-01	Mode	: 17	IMEI	: #39 E1F-BASE1	Plane	: Y	Power setting	: full-directivity		: 16	Over Limit	: ReadAntenna Cable Preamp A/Pos T/Pos	Freq	Level	Line	Level Factor	Loss Factor	Remark	Pul/Phase	5732.44	-10.92	08	08.00	08	209	Peak	5732.44	57.38	-10.92	68.30	42.62	35.62	11.25	32.01	209	Peak	VERTICAL	Left blank
Site	: 039806-KS																																														
Simulation	: SG BAND 1-----3 In 3117 SN 00218643 VERTICAL																																														
Project	: RBE 1000.000MHz VBR 3000.000kHz SMT:Auto																																														
Model	: FR102106-01																																														
Mode	: 17																																														
IMEI	: #39 E1F-BASE1																																														
Plane	: Y																																														
Power setting	: full-directivity																																														
	: 16																																														
Over Limit	: ReadAntenna Cable Preamp A/Pos T/Pos																																														
Freq	Level	Line	Level Factor	Loss Factor	Remark	Pul/Phase																																									
5732.44	-10.92	08	08.00	08	209	Peak																																									
5732.44	57.38	-10.92	68.30	42.62	35.62	11.25	32.01	209	Peak	VERTICAL																																					






WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																											
ANT	802.11ac VHT20 CH140 5700MHz																																																																											
1	Horizontal	Fundamental																																																																										
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-----3 3m 3117.5N 0021844Z HORIZONTAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT:Auto FPI:102106-01 Mode : IS MCE : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5737.40</td> <td>57.56</td> <td>-10.75</td> <td>68.30</td> <td>42.67</td> <td>35.62</td> <td>11.27</td> <td>32.01</td> <td>298</td> <td>152</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	ca	deg	1	5737.40	57.56	-10.75	68.30	42.67	35.62	11.27	32.01	298	152	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-----3 3m 3117.5N 0021844Z HORIZONTAL Project : RRM-1000.000KHz VBR-3000.000KHz SRT:Auto FPI:102106-01 Mode : IS MCE : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5698.00</td> <td>103.74</td> <td>35.44</td> <td>68.30</td> <td>89.00</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>298</td> <td>152</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5698.00</td> <td>96.01</td> <td>-----</td> <td>81.27</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>298</td> <td>152</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	ca	deg	1	5698.00	103.74	35.44	68.30	89.00	35.58	11.22	32.06	298	152	Peak	HORIZONTAL	2	5698.00	96.01	-----	81.27	35.58	11.22	32.06	298	152	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
Freq	Level	Line	Level	Factor	Loss	Factor	ca	deg																																																																				
1	5737.40	57.56	-10.75	68.30	42.67	35.62	11.27	32.01	298	152	Peak	HORIZONTAL																																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor	ca	deg																																																																				
1	5698.00	103.74	35.44	68.30	89.00	35.58	11.22	32.06	298	152	Peak	HORIZONTAL																																																																
2	5698.00	96.01	-----	81.27	35.58	11.22	32.06	298	152	Average	HORIZONTAL																																																																	



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																											
ANT	802.11ac VHT20 CH140 5700MHz																																																																											
1	Vertical	Fundamental																																																																										
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FRS102106-01 Mode : IS MCE : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5728.04</td> <td>61.91</td> <td>-6.39</td> <td>68.30</td> <td>47.08</td> <td>35.62</td> <td>11.25</td> <td>32.04</td> <td>224</td> <td>201</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor			1	5728.04	61.91	-6.39	68.30	47.08	35.62	11.25	32.04	224	201	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FRS102106-01 Mode : IS MCE : #12 EIF-BASE1 Plane : Y full-directivity Powersetting : IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5698.00</td> <td>109.98</td> <td>41.68</td> <td>68.30</td> <td>95.24</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>224</td> <td>201</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5698.00</td> <td>102.60</td> <td>-----</td> <td>67.86</td> <td>35.58</td> <td>11.22</td> <td>32.06</td> <td>224</td> <td>201</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor			1	5698.00	109.98	41.68	68.30	95.24	35.58	11.22	32.06	224	201	Peak	VERTICAL	2	5698.00	102.60	-----	67.86	35.58	11.22	32.06	224	201	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor																																																																						
1	5728.04	61.91	-6.39	68.30	47.08	35.62	11.25	32.04	224	201	Peak	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor																																																																						
1	5698.00	109.98	41.68	68.30	95.24	35.58	11.22	32.06	224	201	Peak	VERTICAL																																																																
2	5698.00	102.60	-----	67.86	35.58	11.22	32.06	224	201	Average	VERTICAL																																																																	



**U-NII-2C 5470~5725MHz  
WIFI 802.11ac VHT40 (Band Edge @ 3m)**

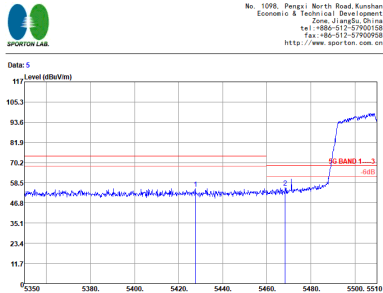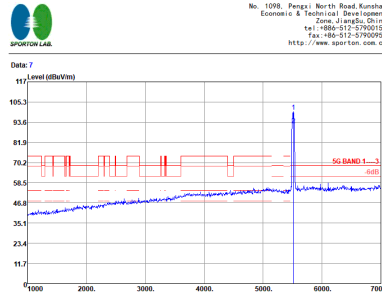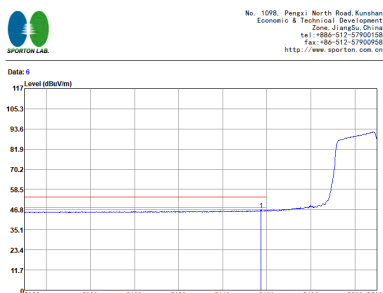WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																								
ANT	802.11ac VHT40 CH102 5510MHz - L																																																																																								
1	Horizontal	Fundamental																																																																																							
<b>Peak</b>	 <p>Site: 030906-KS Condition: SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: (FR) 102106-01 Mod: 23 ME1: #12 EIF-BASE1 Plane: 7 Powersetting: full-directivity 12</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5477.60</td> <td>55.15</td> <td>-18.85</td> <td>74.00</td> <td>41.00</td> <td>35.29</td> <td>10.84</td> <td>31.98</td> <td>305</td> <td>51 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5468.40</td> <td>55.63</td> <td>-12.07</td> <td>68.30</td> <td>41.36</td> <td>35.34</td> <td>10.92</td> <td>31.99</td> <td>305</td> <td>51 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	5477.60	55.15	-18.85	74.00	41.00	35.29	10.84	31.98	305	51 Peak	HORIZONTAL	2	5468.40	55.63	-12.07	68.30	41.36	35.34	10.92	31.99	305	51 Peak	HORIZONTAL	 <p>Site: 030906-KS Condition: SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: (FR) 102106-01 Mod: 23 ME1: #12 EIF-BASE1 Plane: 7 Powersetting: full-directivity 12</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5512.00</td> <td>99.66</td> <td>31.36</td> <td>68.30</td> <td>85.84</td> <td>35.37</td> <td>10.97</td> <td>32.02</td> <td>305</td> <td>51 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5512.00</td> <td>99.94</td> <td>-----</td> <td>77.62</td> <td>35.37</td> <td>10.97</td> <td>32.02</td> <td>305</td> <td>51 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	5512.00	99.66	31.36	68.30	85.84	35.37	10.97	32.02	305	51 Peak	HORIZONTAL	2	5512.00	99.94	-----	77.62	35.37	10.97	32.02	305	51 Average	HORIZONTAL
Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																	
1	5477.60	55.15	-18.85	74.00	41.00	35.29	10.84	31.98	305	51 Peak	HORIZONTAL																																																																														
2	5468.40	55.63	-12.07	68.30	41.36	35.34	10.92	31.99	305	51 Peak	HORIZONTAL																																																																														
Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																	
1	5512.00	99.66	31.36	68.30	85.84	35.37	10.97	32.02	305	51 Peak	HORIZONTAL																																																																														
2	5512.00	99.94	-----	77.62	35.37	10.97	32.02	305	51 Average	HORIZONTAL																																																																															
<b>Avg.</b>	 <p>Site: 030906-KS Condition: SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 1.0000MHz SWT Auto Mode: (FR) 102106-01 Mod: 23 ME1: #12 EIF-BASE1 Plane: 7 Powersetting: full-directivity 12</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.36</td> <td>46.52</td> <td>-7.48</td> <td>54.00</td> <td>32.30</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>305</td> <td>51 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	5457.36	46.52	-7.48	54.00	32.30	35.32	10.89	31.99	305	51 Average	HORIZONTAL	<b>Left blank</b>																																																							
Over	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																	
1	5457.36	46.52	-7.48	54.00	32.30	35.32	10.89	31.99	305	51 Average	HORIZONTAL																																																																														




WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																															
ANT	802.11ac VHT40 CH102 5510MHz - R																															
1	Horizontal	Fundamental																														
Peak	<p>Site : 039006-KS        Location : SG-BAND 1-----3 3m 3117 SN 00218462 HORIZONTAL        RRM: 1000, 000MHz, VSW: 3000, 000MHz, SW: Auto        Project : FCC 102106-01        Band : 23        IMN1 : #12 E1F-BASE1        Plane : Y        Power setting : Y        IS : full-directivity        IS : IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pul/Phase</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5742.36</td> <td>56.30</td> <td>-12.00</td> <td>68.30</td> <td>41.39</td> <td>35.65</td> <td>11.27</td> <td>32.01</td> <td>305</td> <td>S1 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase	Freq	Level	Line	Level	Factor	Loss	Factor			1	5742.36	56.30	-12.00	68.30	41.39	35.65	11.27	32.01	305	S1 Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase																								
Freq	Level	Line	Level	Factor	Loss	Factor																										
1	5742.36	56.30	-12.00	68.30	41.39	35.65	11.27	32.01	305	S1 Peak	HORIZONTAL																					



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																													
ANT	802.11ac VHT40 CH102 5510MHz - L																																																																																													
1	Vertical	Fundamental																																																																																												
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FR102106-01 Mode : 23 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5449.84</td> <td>56.77</td> <td>-12.23</td> <td>74.00</td> <td>42.56</td> <td>35.31</td> <td>10.89</td> <td>31.99</td> <td>242</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5469.04</td> <td>58.38</td> <td>-9.92</td> <td>68.30</td> <td>44.11</td> <td>35.34</td> <td>10.92</td> <td>31.99</td> <td>242</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5449.84	56.77	-12.23	74.00	42.56	35.31	10.89	31.99	242	270	Peak	VERTICAL	2	5469.04	58.38	-9.92	68.30	44.11	35.34	10.92	31.99	242	270	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FR102106-01 Mode : 23 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5512.00</td> <td>106.92</td> <td>38.42</td> <td>68.30</td> <td>92.40</td> <td>35.37</td> <td>10.97</td> <td>32.02</td> <td>242</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5512.00</td> <td>99.61</td> <td>-----</td> <td>-----</td> <td>85.29</td> <td>35.37</td> <td>10.97</td> <td>32.02</td> <td>242</td> <td>270</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5512.00	106.92	38.42	68.30	92.40	35.37	10.97	32.02	242	270	Peak	VERTICAL	2	5512.00	99.61	-----	-----	85.29	35.37	10.97	32.02	242	270	Average	VERTICAL
Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																							
1	5449.84	56.77	-12.23	74.00	42.56	35.31	10.89	31.99	242	270	Peak	VERTICAL																																																																																		
2	5469.04	58.38	-9.92	68.30	44.11	35.34	10.92	31.99	242	270	Peak	VERTICAL																																																																																		
Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																							
1	5512.00	106.92	38.42	68.30	92.40	35.37	10.97	32.02	242	270	Peak	VERTICAL																																																																																		
2	5512.00	99.61	-----	-----	85.29	35.37	10.97	32.02	242	270	Average	VERTICAL																																																																																		
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Economic &amp; Technical Development Zone, Jiangsu China Project : RBW:1000,000kHz VBR:1,000kHz SRT:Auto FR102106-01 Mode : 23 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.84</td> <td>49.14</td> <td>-4.86</td> <td>54.00</td> <td>34.92</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>242</td> <td>270</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	5457.84	49.14	-4.86	54.00	34.92	35.32	10.89	31.99	242	270	Average	VERTICAL	Left blank																																																											
Powersetting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																																																							
1	5457.84	49.14	-4.86	54.00	34.92	35.32	10.89	31.99	242	270	Average	VERTICAL																																																																																		

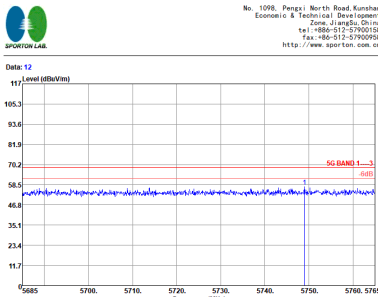

WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																
ANT	802.11ac VHT40 CH102 5510MHz - R																																
1	Vertical	Fundamental																															
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 12</p> <p>Site : 039906-KS Location : SG-BAND 1-----3 3m 3117 SN 00218442 VERTICAL RFE: 1000.000MHz VSW: 3000.000kHz SRT: Auto Project : FCC102106-01 Mode : 23 IMEI : Plane : Y Polarization : full-directivity Power setting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pul/Phase</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5749.00</td> <td>57.27</td> <td>-11.03</td> <td>68.30</td> <td>42.36</td> <td>35.65</td> <td>11.27</td> <td>32.01</td> <td>242</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase	Freq	Level	Line	Level	Factor	Loss	Factor			1	5749.00	57.27	-11.03	68.30	42.36	35.65	11.27	32.01	242	270	Peak	VERTICAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase																									
Freq	Level	Line	Level	Factor	Loss	Factor																											
1	5749.00	57.27	-11.03	68.30	42.36	35.65	11.27	32.01	242	270	Peak	VERTICAL																					



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																					
ANT	802.11ac VHT40 CH110 5550MHz - L																																																																																					
1	Horizontal	Fundamental																																																																																				
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102106-01 Mode : 24 MEI : #39 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.28</td> <td>56.06</td> <td>-12.94</td> <td>74.00</td> <td>41.89</td> <td>35.29</td> <td>10.86</td> <td>31.98</td> <td>100</td> <td>300</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5464.72</td> <td>55.19</td> <td>-13.11</td> <td>68.30</td> <td>40.94</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>100</td> <td>300</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	1	5431.28	56.06	-12.94	74.00	41.89	35.29	10.86	31.98	100	300	Peak	HORIZONTAL	2	5464.72	55.19	-13.11	68.30	40.94	35.32	10.92	31.99	100	300	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FREQ:102106-01 Mode : 24 MEI : #39 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5548.00</td> <td>100.69</td> <td>32.39</td> <td>68.30</td> <td>86.28</td> <td>35.40</td> <td>11.05</td> <td>32.04</td> <td>100</td> <td>300</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5548.00</td> <td>93.49</td> <td>-----</td> <td>79.08</td> <td>35.40</td> <td>11.05</td> <td>32.04</td> <td>-----</td> <td>100</td> <td>300</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	1	5548.00	100.69	32.39	68.30	86.28	35.40	11.05	32.04	100	300	Peak	HORIZONTAL	2	5548.00	93.49	-----	79.08	35.40	11.05	32.04	-----	100	300	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																															
1	5431.28	56.06	-12.94	74.00	41.89	35.29	10.86	31.98	100	300	Peak	HORIZONTAL																																																																										
2	5464.72	55.19	-13.11	68.30	40.94	35.32	10.92	31.99	100	300	Peak	HORIZONTAL																																																																										
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																															
1	5548.00	100.69	32.39	68.30	86.28	35.40	11.05	32.04	100	300	Peak	HORIZONTAL																																																																										
2	5548.00	93.49	-----	79.08	35.40	11.05	32.04	-----	100	300	Average	HORIZONTAL																																																																										
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBR:1,000kHz SRT:Auto FREQ:102106-01 Mode : 24 MEI : #39 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.28</td> <td>46.74</td> <td>-7.26</td> <td>54.00</td> <td>32.52</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>100</td> <td>300</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	deg	1	5451.28	46.74	-7.26	54.00	32.52	35.32	10.89	31.99	100	300	Average	HORIZONTAL	Left blank																																																							
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
Freq	Level	Line	Level	Factor	Loss	Factor	deg																																																																															
1	5451.28	46.74	-7.26	54.00	32.52	35.32	10.89	31.99	100	300	Average	HORIZONTAL																																																																										





WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH110 5550MHz - R	
1	Horizontal	Fundamental
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 039026-KS Simulation : SG BAND 1-----3 3m 3117.5N 00218462 HORIZONTAL RFE: 1000.000MHz VSW: 3000.000kHz SMT: Auto Project : FR102106-01 Bode : 24 IME1 : E1F-BASE1 Plane : Y Powersetting : full-directivity 16 Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Freq Level Level Line Level Factor Loss Factor Remark Pol/Phase 1 5757.88 58.50 -11.80 68.30 41.53 35.67 11.29 31.99 100 300 Peak HORIZONTAL</p>	Left blank






WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																																										
ANT	802.11ac VHT40 CH110 5550MHz - L																																																																																																										
1	Vertical	Fundamental																																																																																																									
<p><b>Peak</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FPS:102106-01 Mode : 24 MEI : #39 EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5469.92</td> <td>56.90</td> <td>-17.10</td> <td>74.00</td> <td>42.68</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>183</td> <td>211</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5460.00</td> <td>56.89</td> <td>-11.41</td> <td>68.30</td> <td>42.67</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>183</td> <td>211</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	5469.92	56.90	-17.10	74.00	42.68	35.32	10.89	31.99	183	211	Peak	VERTICAL	2	5460.00	56.89	-11.41	68.30	42.67	35.32	10.89	31.99	183	211	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto FPS:102106-01 Mode : 24 MEI : #39 EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5554.00</td> <td>102.23</td> <td>39.03</td> <td>68.30</td> <td>92.91</td> <td>35.42</td> <td>11.05</td> <td>32.05</td> <td>183</td> <td>211</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5554.00</td> <td>100.31</td> <td>-----</td> <td>85.89</td> <td>35.42</td> <td>11.05</td> <td>32.05</td> <td>183</td> <td>211</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	5554.00	102.23	39.03	68.30	92.91	35.42	11.05	32.05	183	211	Peak	VERTICAL	2	5554.00	100.31	-----	85.89	35.42	11.05	32.05	183	211	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																			
1	5469.92	56.90	-17.10	74.00	42.68	35.32	10.89	31.99	183	211	Peak	VERTICAL																																																																																															
2	5460.00	56.89	-11.41	68.30	42.67	35.32	10.89	31.99	183	211	Peak	VERTICAL																																																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																			
1	5554.00	102.23	39.03	68.30	92.91	35.42	11.05	32.05	183	211	Peak	VERTICAL																																																																																															
2	5554.00	100.31	-----	85.89	35.42	11.05	32.05	183	211	Average	VERTICAL																																																																																																
<p><b>Avg.</b></p>	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:1,000kHz SRT:Auto FPS:102106-01 Mode : 24 MEI : #39 EIF-BASE1 Plane : Y full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5469.92</td> <td>48.10</td> <td>-5.90</td> <td>54.00</td> <td>33.88</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>183</td> <td>211</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	5469.92	48.10	-5.90	54.00	33.88	35.32	10.89	31.99	183	211	Average	VERTICAL	<p><b>Left blank</b></p>																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																			
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																			
1	5469.92	48.10	-5.90	54.00	33.88	35.32	10.89	31.99	183	211	Average	VERTICAL																																																																																															



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																									
ANT	802.11ac VHT40 CH110 5550MHz - R																																									
1	Vertical	Fundamental																																								
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Date: 10</p> <p>Site : 039906-KS Sensitivity : SG-BAND 1-----3 3m 3117 SN 00218442 VERTICAL RFE: 1000.000MHz VSW: 3000.000kHz SMT: Auto Project : FR102106-01 Bode : 24 IMEI : Plane : Y Power setting : full-directivity 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pul/Phase</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5739.96</td> <td>57.10</td> <td>-11.20</td> <td>68.30</td> <td>42.19</td> <td>35.66</td> <td>11.27</td> <td>32.01</td> <td>183</td> <td>211</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg	1	5739.96	57.10	-11.20	68.30	42.19	35.66	11.27	32.01	183	211	Peak	VERTICAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pul/Phase																																		
Freq	Level	Line	Level	Factor	Loss	Factor																																				
MHz	dBm/100m	dB	dBm/100m	dB	dB	dB	cm	deg																																		
1	5739.96	57.10	-11.20	68.30	42.19	35.66	11.27	32.01	183	211	Peak	VERTICAL																														

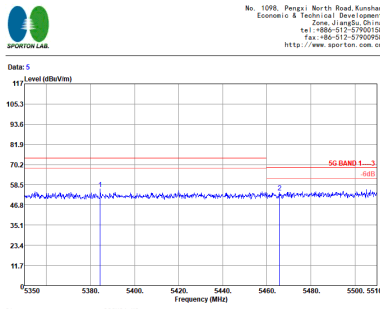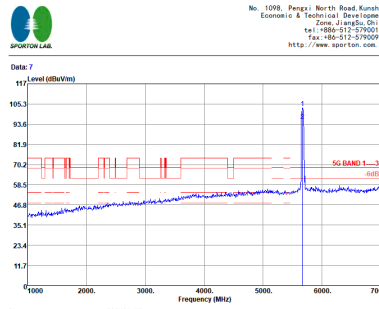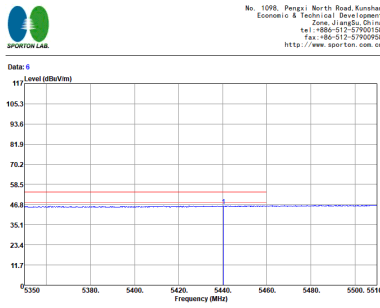

WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																												
ANT	802.11ac VHT40 CH134 5670MHz - L																																																																												
1	Horizontal	Fundamental																																																																											
<p><b>Peak</b></p>	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBW:3000,000kHz SMT:Auto Freq:102100-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5384.40</td> <td>56.01</td> <td>-17.99</td> <td>74.00</td> <td>41.90</td> <td>35.26</td> <td>10.80</td> <td>31.95</td> <td>297 59 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5465.84</td> <td>54.10</td> <td>-14.20</td> <td>68.30</td> <td>39.85</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>297 59 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg		1 5384.40	56.01	-17.99	74.00	41.90	35.26	10.80	31.95	297 59 Peak	HORIZONTAL	2 5465.84	54.10	-14.20	68.30	39.85	35.32	10.92	31.99	297 59 Peak	HORIZONTAL	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBW:3000,000kHz SMT:Auto Freq:102100-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5668.00</td> <td>103.01</td> <td>34.71</td> <td>68.30</td> <td>88.36</td> <td>35.53</td> <td>11.20</td> <td>32.08</td> <td>297 59 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5668.00</td> <td>95.30</td> <td>-----</td> <td>80.73</td> <td>35.53</td> <td>11.20</td> <td>32.08</td> <td>297 59 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg		1 5668.00	103.01	34.71	68.30	88.36	35.53	11.20	32.08	297 59 Peak	HORIZONTAL	2 5668.00	95.30	-----	80.73	35.53	11.20	32.08	297 59 Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																																						
1 5384.40	56.01	-17.99	74.00	41.90	35.26	10.80	31.95	297 59 Peak	HORIZONTAL																																																																				
2 5465.84	54.10	-14.20	68.30	39.85	35.32	10.92	31.99	297 59 Peak	HORIZONTAL																																																																				
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																																						
1 5668.00	103.01	34.71	68.30	88.36	35.53	11.20	32.08	297 59 Peak	HORIZONTAL																																																																				
2 5668.00	95.30	-----	80.73	35.53	11.20	32.08	297 59 Average	HORIZONTAL																																																																					
<p><b>Avg.</b></p>	 <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBW:1,000kHz SMT:Auto Freq:102100-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5440.40</td> <td>46.11</td> <td>-7.89</td> <td>54.00</td> <td>31.92</td> <td>35.31</td> <td>10.86</td> <td>31.98</td> <td>297 59 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg		1 5440.40	46.11	-7.89	54.00	31.92	35.31	10.86	31.98	297 59 Average	HORIZONTAL	<p><b>Left blank</b></p>																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	deg	deg																																																																						
1 5440.40	46.11	-7.89	54.00	31.92	35.31	10.86	31.98	297 59 Average	HORIZONTAL																																																																				



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m	
ANT	802.11ac VHT40 CH134 5670MHz - R	
1	Horizontal	Fundamental
Peak		Left blank



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																																											
ANT	802.11ac VHT40 CH134 5670MHz - L																																																																																																											
1	Vertical	Fundamental																																																																																																										
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FR102106-01 Mode : 25 Plane : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.60</td> <td>55.55</td> <td>-18.35</td> <td>74.00</td> <td>41.48</td> <td>35.29</td> <td>10.86</td> <td>31.98</td> <td>240</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5463.28</td> <td>54.45</td> <td>-13.85</td> <td>68.30</td> <td>40.20</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>240</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	5431.60	55.55	-18.35	74.00	41.48	35.29	10.86	31.98	240	286	Peak	VERTICAL	2	5463.28	54.45	-13.85	68.30	40.20	35.32	10.92	31.99	240	286	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FR102106-01 Mode : 25 Plane : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5474.00</td> <td>108.45</td> <td>40.15</td> <td>68.30</td> <td>93.78</td> <td>35.55</td> <td>11.20</td> <td>32.08</td> <td>240</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5674.00</td> <td>101.12</td> <td>-----</td> <td>86.45</td> <td>35.55</td> <td>11.20</td> <td>32.08</td> <td>240</td> <td>286</td> <td>286</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	5474.00	108.45	40.15	68.30	93.78	35.55	11.20	32.08	240	286	Peak	VERTICAL	2	5674.00	101.12	-----	86.45	35.55	11.20	32.08	240	286	286	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																				
1	5431.60	55.55	-18.35	74.00	41.48	35.29	10.86	31.98	240	286	Peak	VERTICAL																																																																																																
2	5463.28	54.45	-13.85	68.30	40.20	35.32	10.92	31.99	240	286	Peak	VERTICAL																																																																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																				
1	5474.00	108.45	40.15	68.30	93.78	35.55	11.20	32.08	240	286	Peak	VERTICAL																																																																																																
2	5674.00	101.12	-----	86.45	35.55	11.20	32.08	240	286	286	Average	VERTICAL																																																																																																
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:1,000kHz SRT:Auto IMEI : FR102106-01 Mode : 25 Plane : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.88</td> <td>46.45</td> <td>-7.55</td> <td>54.00</td> <td>32.23</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>240</td> <td>286</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg	1	5456.88	46.45	-7.55	54.00	32.23	35.32	10.89	31.99	240	286	Average	VERTICAL	Left blank																																																																		
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	dB	cm	deg																																																																																																				
1	5456.88	46.45	-7.55	54.00	32.23	35.32	10.89	31.99	240	286	Average	VERTICAL																																																																																																



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																									
ANT	802.11ac VHT40 CH134 5670MHz - R																																									
1	Vertical	Fundamental																																								
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 039906-KS Simulation : SG-BAND 1-----3 3m 3117 SN 00218442 VERTICAL RRE: 1000.000MHz VSW: 3000.000MHz SRT: Auto Project : FCC 102106-01 Bode : 25 IMEI : Plane : Y Full-directivity : Y Powersetting : IS IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm/100MHz</th> <th>dB</th> <th>dBm/100MHz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>ca</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.32</td> <td>60.66</td> <td>-7.64</td> <td>68.30</td> <td>45.83</td> <td>35.62</td> <td>11.25</td> <td>32.04</td> <td>240</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBm/100MHz	dB	dBm/100MHz	dB	dB	dB	ca	deg	1	5725.32	60.66	-7.64	68.30	45.83	35.62	11.25	32.04	240	286	Peak	VERTICAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor																																				
MHz	dBm/100MHz	dB	dBm/100MHz	dB	dB	dB	ca	deg																																		
1	5725.32	60.66	-7.64	68.30	45.83	35.62	11.25	32.04	240	286	Peak	VERTICAL																														



**U-NII-2C 5470~5725MHz  
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																													
ANT	802.11ac VHT80 CH106 5530MHz - L																																																																																													
1	Horizontal	Fundamental																																																																																												
<b>Peak</b>	<p><b>Horizontal</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: FR1 102106-01 MFE: 28 Plane: #12 E1F-BASE1 Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5392.88</td> <td>54.25</td> <td>-19.25</td> <td>74.00</td> <td>40.64</td> <td>35.26</td> <td>10.80</td> <td>31.95</td> <td>53</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5464.40</td> <td>55.59</td> <td>-12.71</td> <td>68.30</td> <td>41.34</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>53</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg			1	5392.88	54.25	-19.25	74.00	40.64	35.26	10.80	31.95	53	Peak	HORIZONTAL	2	5464.40	55.59	-12.71	68.30	41.34	35.32	10.92	31.99	53	Peak	HORIZONTAL	<p><b>Fundamental</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3000.0000MHz SWT Auto Mode: FR1 102106-01 MFE: 28 Plane: #12 E1F-BASE1 Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5524.00</td> <td>95.52</td> <td>27.22</td> <td>68.30</td> <td>81.15</td> <td>35.39</td> <td>11.00</td> <td>32.02</td> <td>53</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>5524.00</td> <td>88.02</td> <td></td> <td></td> <td>73.66</td> <td>35.39</td> <td>11.00</td> <td>32.02</td> <td>53</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg			1	5524.00	95.52	27.22	68.30	81.15	35.39	11.00	32.02	53	Peak	HORIZONTAL	2	5524.00	88.02			73.66	35.39	11.00	32.02	53	Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																																						
1	5392.88	54.25	-19.25	74.00	40.64	35.26	10.80	31.95	53	Peak	HORIZONTAL																																																																																			
2	5464.40	55.59	-12.71	68.30	41.34	35.32	10.92	31.99	53	Peak	HORIZONTAL																																																																																			
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																																						
1	5524.00	95.52	27.22	68.30	81.15	35.39	11.00	32.02	53	Peak	HORIZONTAL																																																																																			
2	5524.00	88.02			73.66	35.39	11.00	32.02	53	Average	HORIZONTAL																																																																																			
<b>Avg.</b>	<p><b>Horizontal</b></p> <p>Site: 030906-KS Condition: SG BAND 1---3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project: RRM 1000.0000MHz VBR 3.3000MHz SWT Auto Mode: FR1 102106-01 MFE: 28 Plane: #12 E1F-BASE1 Powersetting: full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.84</td> <td>46.85</td> <td>-7.15</td> <td>54.00</td> <td>32.63</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>53</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg			1	5453.84	46.85	-7.15	54.00	32.63	35.32	10.89	31.99	53	Average	HORIZONTAL	<b>Left blank</b>																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	deg																																																																																						
1	5453.84	46.85	-7.15	54.00	32.63	35.32	10.89	31.99	53	Average	HORIZONTAL																																																																																			





WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																													
ANT	802.11ac VHT80 CH106 5530MHz - R																													
1	Horizontal	Fundamental																												
Peak	<p>Site : 039906-KS        Position : SG-BAND 1-----3 3m 3117 SN 00218462 HORIZONTAL        RRM: 1000.000MHz VSW: 3000.000kHz SRT: Auto        Project : FCC102106-01        Mode : 29        IMN1 : E1F-BASE1        Plane : Y        Power setting :        IS        IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>5754.92</td> <td>56.39</td> <td>-11.91</td> <td>68.30</td> <td>41.46</td> <td>35.65</td> <td>11.29</td> <td>32.01</td> <td>301</td> <td>S3 Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	Freq	Level	Line	Level	Factor	Loss	Factor			5754.92	56.39	-11.91	68.30	41.46	35.65	11.29	32.01	301	S3 Peak	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																						
Freq	Level	Line	Level	Factor	Loss	Factor																								
5754.92	56.39	-11.91	68.30	41.46	35.65	11.29	32.01	301	S3 Peak																					






WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																																											
ANT	802.11ac VHT80 CH106 5530MHz - L																																																																																																											
1	Vertical	Fundamental																																																																																																										
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto IMEI : FRS102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.28</td> <td>58.89</td> <td>-15.11</td> <td>74.00</td> <td>44.67</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>229</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5469.04</td> <td>58.85</td> <td>-9.45</td> <td>68.30</td> <td>44.58</td> <td>35.34</td> <td>10.92</td> <td>31.99</td> <td>229</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5455.28	58.89	-15.11	74.00	44.67	35.32	10.89	31.99	229	270	Peak	VERTICAL	2	5469.04	58.85	-9.45	68.30	44.58	35.34	10.92	31.99	229	270	Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SMT:Auto IMEI : FRS102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>101.82</td> <td>33.62</td> <td>68.30</td> <td>87.47</td> <td>35.39</td> <td>11.00</td> <td>32.04</td> <td>229</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5530.00</td> <td>94.45</td> <td>-----</td> <td>80.10</td> <td>35.39</td> <td>11.00</td> <td>32.04</td> <td>-----</td> <td>229</td> <td>270</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5530.00	101.82	33.62	68.30	87.47	35.39	11.00	32.04	229	270	Peak	VERTICAL	2	5530.00	94.45	-----	80.10	35.39	11.00	32.04	-----	229	270	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																																				
1	5455.28	58.89	-15.11	74.00	44.67	35.32	10.89	31.99	229	270	Peak	VERTICAL																																																																																																
2	5469.04	58.85	-9.45	68.30	44.58	35.34	10.92	31.99	229	270	Peak	VERTICAL																																																																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																																				
1	5530.00	101.82	33.62	68.30	87.47	35.39	11.00	32.04	229	270	Peak	VERTICAL																																																																																																
2	5530.00	94.45	-----	80.10	35.39	11.00	32.04	-----	229	270	Average	VERTICAL																																																																																																
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 VERTICAL Project : RBW:1000,000kHz VBR:3,3000kHz SMT:Auto IMEI : FRS102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.68</td> <td>50.21</td> <td>-3.79</td> <td>54.00</td> <td>35.99</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>229</td> <td>270</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	5457.68	50.21	-3.79	54.00	35.99	35.32	10.89	31.99	229	270	Average	VERTICAL	Left blank																																																																		
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	deg																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																																																																																				
1	5457.68	50.21	-3.79	54.00	35.99	35.32	10.89	31.99	229	270	Average	VERTICAL																																																																																																




WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																
ANT	802.11ac VHT80 CH106 5530MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>Site : 039906-KS            Location : SG-BAND 1-----3 3m 3117 SN 00218462 VERTICAL            Project : RRM 1000 000MHz VSW 3000 000MHz SRT:Auto            Model : CPE102106-01            Mode : 28            IMN1 : #12 E1F-BASE1            Plane : Y            Power setting : full-directivity            IS            IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5747.64</td> <td>57.15</td> <td>-11.15</td> <td>68.30</td> <td>42.24</td> <td>35.65</td> <td>11.27</td> <td>32.01</td> <td>229</td> <td>270</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	Freq	Level	Line	Level	Factor	Loss	Factor			1	5747.64	57.15	-11.15	68.30	42.24	35.65	11.27	32.01	229	270	Peak	VERTICAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																									
Freq	Level	Line	Level	Factor	Loss	Factor																											
1	5747.64	57.15	-11.15	68.30	42.24	35.65	11.27	32.01	229	270	Peak	VERTICAL																					

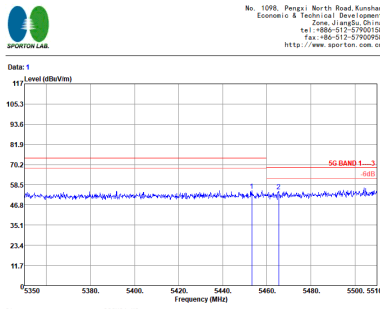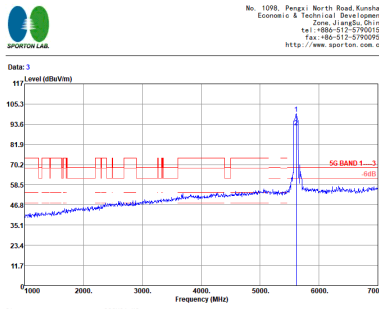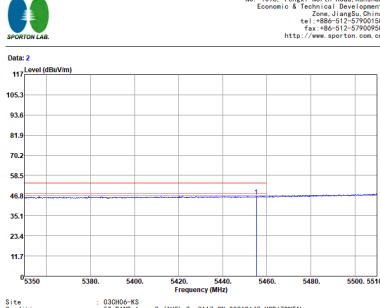

WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																
ANT	802.11ac VHT80 CH122 5610MHz - L																																																																																
1	Horizontal	Fundamental																																																																															
<p><b>Peak</b></p>	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBW:3000,000kHz SMT:Auto Freq:102100-01 Mode : 29 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBµV/m</th> <th>dB</th> <th>dBµV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5453.20</td> <td>55.24</td> <td>-18.76</td> <td>74.00</td> <td>41.02</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>309</td> <td>64 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5465.36</td> <td>54.74</td> <td>-13.56</td> <td>68.30</td> <td>40.49</td> <td>35.32</td> <td>10.92</td> <td>31.99</td> <td>309</td> <td>64 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBµV/m	dB	dBµV/m	dB	dB	deg	deg	deg	1 5453.20	55.24	-18.76	74.00	41.02	35.32	10.89	31.99	309	64 Peak	HORIZONTAL	2 5465.36	54.74	-13.56	68.30	40.49	35.32	10.92	31.99	309	64 Peak	HORIZONTAL	 <p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBW:3000,000kHz SMT:Auto Freq:102100-01 Mode : 29 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBµV/m</th> <th>dB</th> <th>dBµV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 * 5614.00</td> <td>99.57</td> <td>31.27</td> <td>68.30</td> <td>85.05</td> <td>35.47</td> <td>11.13</td> <td>32.08</td> <td>309</td> <td>64 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 5614.00</td> <td>91.87</td> <td>-----</td> <td>77.35</td> <td>35.47</td> <td>11.13</td> <td>32.08</td> <td>309</td> <td>64 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBµV/m	dB	dBµV/m	dB	dB	deg	deg	deg	1 * 5614.00	99.57	31.27	68.30	85.05	35.47	11.13	32.08	309	64 Peak	HORIZONTAL	2 5614.00	91.87	-----	77.35	35.47	11.13	32.08	309	64 Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																									
MHz	dBµV/m	dB	dBµV/m	dB	dB	deg	deg	deg																																																																									
1 5453.20	55.24	-18.76	74.00	41.02	35.32	10.89	31.99	309	64 Peak	HORIZONTAL																																																																							
2 5465.36	54.74	-13.56	68.30	40.49	35.32	10.92	31.99	309	64 Peak	HORIZONTAL																																																																							
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																									
MHz	dBµV/m	dB	dBµV/m	dB	dB	deg	deg	deg																																																																									
1 * 5614.00	99.57	31.27	68.30	85.05	35.47	11.13	32.08	309	64 Peak	HORIZONTAL																																																																							
2 5614.00	91.87	-----	77.35	35.47	11.13	32.08	309	64 Average	HORIZONTAL																																																																								
<p><b>Avg.</b></p>	 <p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RBW:1000,000kHz VBW:3,3000kHz SMT:Auto Freq:102100-01 Mode : 29 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBµV/m</th> <th>dB</th> <th>dBµV/m</th> <th>dB</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5455.28</td> <td>46.35</td> <td>-7.65</td> <td>54.00</td> <td>32.13</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>309</td> <td>64 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBµV/m	dB	dBµV/m	dB	dB	deg	deg	deg	1 5455.28	46.35	-7.65	54.00	32.13	35.32	10.89	31.99	309	64 Average	HORIZONTAL	<p><b>Left blank</b></p>																																																		
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																									
MHz	dBµV/m	dB	dBµV/m	dB	dB	deg	deg	deg																																																																									
1 5455.28	46.35	-7.65	54.00	32.13	35.32	10.89	31.99	309	64 Average	HORIZONTAL																																																																							

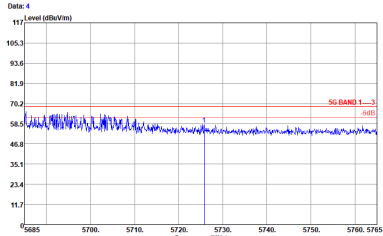


WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																									
ANT	802.11ac VHT80 CH122 5610MHz - R																																									
1	Horizontal	Fundamental																																								
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-KS Sensitivity : 5G BAND 1----3 3m 3117 SN 00218462 HORIZONTAL Project : RRM 1020 000MHz VSW 3000 000kHz SRT:Auto Model : CPE 102106-01 Mode : 29 IMEI : 8132 E1F-BASE1 Plane : Y Powersetting : full-directivity 1b</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm/Hz</th> <th>dB</th> <th>dBm/Hz</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.80</td> <td>-58.11</td> <td>-10.19</td> <td>68.30</td> <td>43.28</td> <td>35.62</td> <td>11.25</td> <td>32.04</td> <td>309</td> <td>64</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor			MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	cm	deg	1	5725.80	-58.11	-10.19	68.30	43.28	35.62	11.25	32.04	309	64	Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Line	Level	Factor	Loss	Factor																																				
MHz	dBm/Hz	dB	dBm/Hz	dB	dB	dB	cm	deg																																		
1	5725.80	-58.11	-10.19	68.30	43.28	35.62	11.25	32.04	309	64	Peak	HORIZONTAL																														



WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																																																																								
ANT	802.11ac VHT80 CH122 5610MHz - L																																																																																								
1	Vertical	Fundamental																																																																																							
Peak	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 29 Plane : #12 E1F-BASE1 Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5467.20</td> <td>57.46</td> <td>-16.54</td> <td>74.00</td> <td>43.24</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>242</td> <td>278</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5468.24</td> <td>58.42</td> <td>-9.89</td> <td>68.30</td> <td>44.15</td> <td>35.34</td> <td>10.92</td> <td>31.99</td> <td>242</td> <td>278</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	dB	deg	cm	deg	1	5467.20	57.46	-16.54	74.00	43.24	35.32	10.89	31.99	242	278	Peak	VERTICAL	2	5468.24	58.42	-9.89	68.30	44.15	35.34	10.92	31.99	242	278	Peak	VERTICAL	<p>Site : 030906-KS Condition : SG BAND 1----3 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3000,000kHz SRT:Auto IMEI : FRS102106-01 Mode : 29 Plane : #12 E1F-BASE1 Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5608.00</td> <td>105.83</td> <td>37.63</td> <td>68.30</td> <td>91.31</td> <td>35.47</td> <td>11.13</td> <td>32.08</td> <td>242</td> <td>278</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>5608.00</td> <td>98.18</td> <td>-----</td> <td>83.66</td> <td>35.47</td> <td>11.13</td> <td>32.08</td> <td>242</td> <td>278</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	dB	deg	cm	deg	1	5608.00	105.83	37.63	68.30	91.31	35.47	11.13	32.08	242	278	Peak	VERTICAL	2	5608.00	98.18	-----	83.66	35.47	11.13	32.08	242	278	Average	VERTICAL
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																	
Level	Line	Level	Factor	Loss	dB	deg	cm	deg																																																																																	
1	5467.20	57.46	-16.54	74.00	43.24	35.32	10.89	31.99	242	278	Peak	VERTICAL																																																																													
2	5468.24	58.42	-9.89	68.30	44.15	35.34	10.92	31.99	242	278	Peak	VERTICAL																																																																													
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																	
Level	Line	Level	Factor	Loss	dB	deg	cm	deg																																																																																	
1	5608.00	105.83	37.63	68.30	91.31	35.47	11.13	32.08	242	278	Peak	VERTICAL																																																																													
2	5608.00	98.18	-----	83.66	35.47	11.13	32.08	242	278	Average	VERTICAL																																																																														
Avg.	<p>Site : 030906-KS Condition : SG BAND 1----3 (AVG) 3m 3117 SN 00218442 VERTICAL Project : RBW:1000,000kHz VBR:3,3000kHz SRT:Auto IMEI : FRS102106-01 Mode : 29 Plane : #12 E1F-BASE1 Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>dB</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5468.80</td> <td>47.55</td> <td>-6.45</td> <td>54.00</td> <td>33.33</td> <td>35.32</td> <td>10.89</td> <td>31.99</td> <td>242</td> <td>278</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Line	Level	Factor	Loss	dB	deg	cm	deg	1	5468.80	47.55	-6.45	54.00	33.33	35.32	10.89	31.99	242	278	Average	VERTICAL	Left blank																																																								
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																	
Level	Line	Level	Factor	Loss	dB	deg	cm	deg																																																																																	
1	5468.80	47.55	-6.45	54.00	33.33	35.32	10.89	31.99	242	278	Average	VERTICAL																																																																													

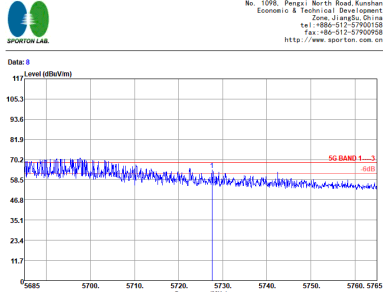

WIFI	U-NII-2C 5470~5725MHz Band Edge @ 3m																																
ANT	802.11ac VHT80 CH122 5610MHz - R																																
1	Vertical	Fundamental																															
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technological Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 039906-KS Simulation : SG-BAND 1-----3 3m 3117 SN 00218462 VERTICAL Project : RRM 1000.000MHz VSW 3000.000MHz SRT:Auto Model : CPE 102106-01 Mode : 29 IMEI : Plane : E1F-BASE1 Plane : Y Powersetting : full-directivity Polarization : V</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> </thead> <tbody> <tr> <td>1.1</td> <td>5727.56</td> <td>64.06</td> <td>-4.25</td> <td>68.30</td> <td>49.22</td> <td>35.62</td> <td>11.25</td> <td>32.04</td> <td>242</td> <td>278</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	Freq	Level	Level	Level	Level	Factor	Loss	Factor		1.1	5727.56	64.06	-4.25	68.30	49.22	35.62	11.25	32.04	242	278	Peak	VERTICAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																									
Freq	Level	Level	Level	Level	Factor	Loss	Factor																										
1.1	5727.56	64.06	-4.25	68.30	49.22	35.62	11.25	32.04	242	278	Peak	VERTICAL																					



**U-NII-2C - 5470~5725MHz**  
**WIFI 802.11a (Harmonic @ 3m)**

WIFI	U-NII-2C 5470~5725MHz Harmonic @ 3m																																																		
ANT	802.11a CH100 5500MHz																																																		
1	Horizontal	Vertical																																																	
Peak Avg.																																																			
	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>11100.00</td> <td>46.79</td> <td>-27.21</td> <td>74.00</td> <td>52.98</td> <td>38.53</td> <td>15.82</td> <td>60.54</td> <td>300</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	11100.00	46.79	-27.21	74.00	52.98	38.53	15.82	60.54	300	0	Peak	HORIZONTAL	<table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>11100.00</td> <td>46.46</td> <td>-27.54</td> <td>74.00</td> <td>52.65</td> <td>38.53</td> <td>15.82</td> <td>60.54</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	11100.00	46.46	-27.54	74.00	52.65	38.53	15.82	60.54	100	0	Peak
Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																							
11100.00	46.79	-27.21	74.00	52.98	38.53	15.82	60.54	300	0	Peak	HORIZONTAL																																								
Freq	Level	Limit	Line	ReadAntenna	Cable	Preamp	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																							
11100.00	46.46	-27.54	74.00	52.65	38.53	15.82	60.54	100	0	Peak	VERTICAL																																								





WIFI	U-NII-2C 5470~5725MHz Harmonic @ 3m																																																													
ANT	802.11a CH116 5580MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : B MEI : E1F-BASE1 Plane : Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.65</td> <td>-26.35</td> <td>74.00</td> <td>53.57</td> <td>38.59</td> <td>15.99</td> <td>60.50</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	11160.00	47.65	-26.35	74.00	53.57	38.59	15.99	60.50	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : FR102106-01 Mode : B MEI : E1F-BASE1 Plane : Full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.40</td> <td>-25.60</td> <td>74.00</td> <td>54.32</td> <td>38.59</td> <td>15.99</td> <td>60.50</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	11160.00	48.40	-25.60	74.00	54.32	38.59	15.99	60.50	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	11160.00	47.65	-26.35	74.00	53.57	38.59	15.99	60.50	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	11160.00	48.40	-25.60	74.00	54.32	38.59	15.99	60.50	100	0 Peak	VERTICAL																																																			



WIFI	U-NII-2C 5470~5725MHz Harmonic @ 3m	
ANT	802.11a CH140 5700MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03906-KS            Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL            Project : RRM-1000-000KHz VBR-3000-000KHz SRT:Auto            FR102106-01            Mode : 9            BE1 : #12 E1F-BASE1            Plane : 9            Full-directivity : 9            Powersetting : 16            Over Limit ReadAntenna Cable Preamp A/Pos T/Pos            Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas            1 11400.00 46.76 -27.24 74.00 52.32 38.67 16.22 60.45 300 0 Peak HORIZONTAL</p>	<p>Site : 03906-KS            Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL            Project : RRM-1000-000KHz VBR-3000-000KHz SRT:Auto            FR102106-01            Mode : 9            BE1 : #12 E1F-BASE1            Plane : 9            Full-directivity : 9            Powersetting : 16            Over Limit ReadAntenna Cable Preamp A/Pos T/Pos            Freq Level Limit Line Level Factor Loss Factor Remark Pol/Phas            1 11400.00 46.93 -27.07 74.00 52.49 38.67 16.22 60.45 100 0 Peak VERTICAL</p>



**U-NII-2C 5470~5725MHz  
WIFI 802.11ac VHT20 (Harmonic @ 3m)**

WIFI	U-NII-2C 5470~5725MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT20 CH100 5500MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 HORIZONTAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : FR1 102106-01 ME1 : 16 Plane : #12 E1F-BASE1 Powersetting : full-directivity T : 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>11000.00</td> <td>46.30</td> <td>-27.70</td> <td>74.00</td> <td>53.67</td> <td>38.53</td> <td>15.82</td> <td>61.72</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	11000.00	46.30	-27.70	74.00	53.67	38.53	15.82	61.72	300	0 Peak HORIZONTAL	<p>Site : 03000-KS Condition : SG BAND 1---3 3m 3117 SN 00218642 VERTICAL Project : R081000.000MHz V08.3000.000MHz CRT Auto Mode : FR1 102106-01 ME1 : 16 Plane : #12 E1F-BASE1 Powersetting : full-directivity T : 16</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>11000.00</td> <td>47.21</td> <td>-26.79</td> <td>74.00</td> <td>54.58</td> <td>38.53</td> <td>15.82</td> <td>61.72</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg	11000.00	47.21	-26.79	74.00	54.58	38.53	15.82	61.72	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																					
11000.00	46.30	-27.70	74.00	53.67	38.53	15.82	61.72	300	0 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	dB	cn	deg																																																					
11000.00	47.21	-26.79	74.00	54.58	38.53	15.82	61.72	100	0 Peak VERTICAL																																																					



WIFI	U-NII-2C 5470~5725MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT20 CH116 5580MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 HORIZONTAL Project : FR102106-01 Mode : 17 MEI : #12 E1F-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11140.00</td> <td>46.79</td> <td>-22.21</td> <td>74.00</td> <td>53.86</td> <td>38.59</td> <td>15.99</td> <td>61.65</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	11140.00	46.79	-22.21	74.00	53.86	38.59	15.99	61.65	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic &amp; Technical Development Zone, Jiangsu China Tel: +86-512-57900958 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03906-KS Condition : SG BAND 1-3 @ 3117 SN 00218642 VERTICAL Project : FR102106-01 Mode : 17 MEI : #12 E1F-BASE1 Plane : full-directivity Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11140.00</td> <td>48.38</td> <td>-25.62</td> <td>74.00</td> <td>55.45</td> <td>38.59</td> <td>15.99</td> <td>61.65</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	11140.00	48.38	-25.62	74.00	55.45	38.59	15.99	61.65	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	11140.00	46.79	-22.21	74.00	53.86	38.59	15.99	61.65	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	11140.00	48.38	-25.62	74.00	55.45	38.59	15.99	61.65	100	0 Peak	VERTICAL																																																			



WIFI	U-NII-2C 5470~5725MHz Harmonic @ 3m																																																													
ANT	802.11ac VHT20 CH140 5700MHZ																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03906-KS Condition : 5G BAND 1-3 @ 3117.5N 00218A42 HORIZONTAL Project : FR102106-01 Mode : IS MCE : #12 E1F-BASE1 Plane : Y PowerSetting : full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.19</td> <td>-25.81</td> <td>74.00</td> <td>54.85</td> <td>38.67</td> <td>16.22</td> <td>61.55</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	1	11400.00	48.19	-25.81	74.00	54.85	38.67	16.22	61.55	300	0 Peak	HORIZONTAL	<p>Site : 03906-KS Condition : 5G BAND 1-3 @ 3117.5N 00218A42 VERTICAL Project : FR102106-01 Mode : IS MCE : #12 E1F-BASE1 Plane : Y PowerSetting : full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.22</td> <td>-25.78</td> <td>74.00</td> <td>54.88</td> <td>38.67</td> <td>16.22</td> <td>61.55</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	1	11400.00	48.22	-25.78	74.00	54.88	38.67	16.22	61.55	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																																						
1	11400.00	48.19	-25.81	74.00	54.85	38.67	16.22	61.55	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																																						
1	11400.00	48.22	-25.78	74.00	54.88	38.67	16.22	61.55	100	0 Peak	VERTICAL																																																			



**U-NII-2C 5470~5725MHz  
WIFI 802.11ac VHT40 (Harmonic @ 3m)**

WIFI	U-NII-2C 5470~5725MHz Harmonic @ 3m	
ANT	802.11ac VHT40 CH102 5510MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03000-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 HORIZONTAL Project : R081000-000000-V08-3000-000000-08T-Auto Mode : Z3 ME1 : #12 E1F-BASE1 Plane : T Powersetting : Full-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phase 1 11020.00 46.20 -27.80 74.00 53.53 38.54 15.84 61.71 300 0 Peak HORIZONTAL</p>	<p>Site : 03000-KS Condition : SG BAND 1-3 3m 3117 SN 00218642 VERTICAL Project : R081000-000000-V08-3000-000000-08T-Auto Mode : Z3 ME1 : #12 E1F-BASE1 Plane : T Powersetting : Full-directivity Over Limit ReadAntenna Cable Preamp A/Pos T/Pos Remark Pol/Phase 1 11020.00 46.50 -27.50 74.00 53.83 38.54 15.84 61.71 100 0 Peak VERTICAL</p>