



Appendix B

RF Test Data for 5.2GWIFI(Conducted Measurement)

Product Name: Wifi Router

Test Model: xK 10000

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Eason Zhou
Supervised by:	Nick Peng





B.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	22.029	>=0.5	Pass
NVNT	a	5200	Ant1	22.792	>=0.5	Pass
NVNT	a	5240	Ant1	24.776	>=0.5	Pass
NVNT	n20	5180	Ant1	27.46	>=0.5	Pass
NVNT	n20	5200	Ant1	27.777	>=0.5	Pass
NVNT	n20	5240	Ant1	28.073	>=0.5	Pass
NVNT	n40	5190	Ant1	40.477	>=0.5	Pass
NVNT	n40	5230	Ant1	45.632	>=0.5	Pass
NVNT	ac20	5180	Ant1	26.872	>=0.5	Pass
NVNT	ac20	5200	Ant1	27.66	>=0.5	Pass
NVNT	ac20	5240	Ant1	27.266	>=0.5	Pass
NVNT	ac40	5190	Ant1	42.268	>=0.5	Pass
NVNT	ac40	5230	Ant1	44.351	>=0.5	Pass
NVNT	ac80	5210	Ant1	81.298	>=0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

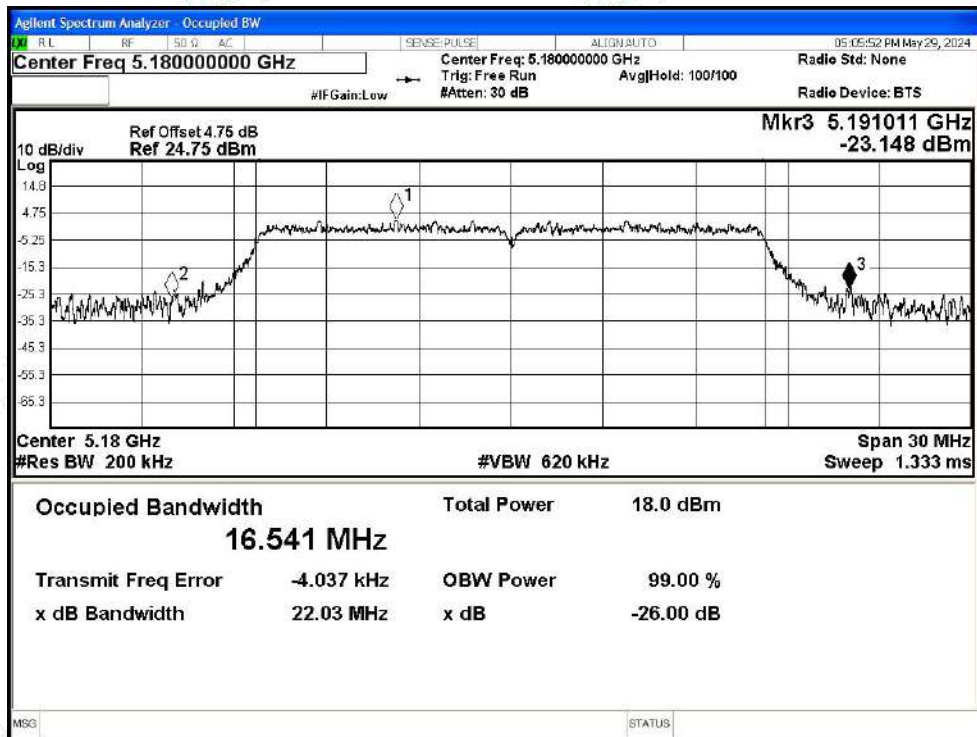


-26dB Bandwidth NVNT a 5200MHz Ant1

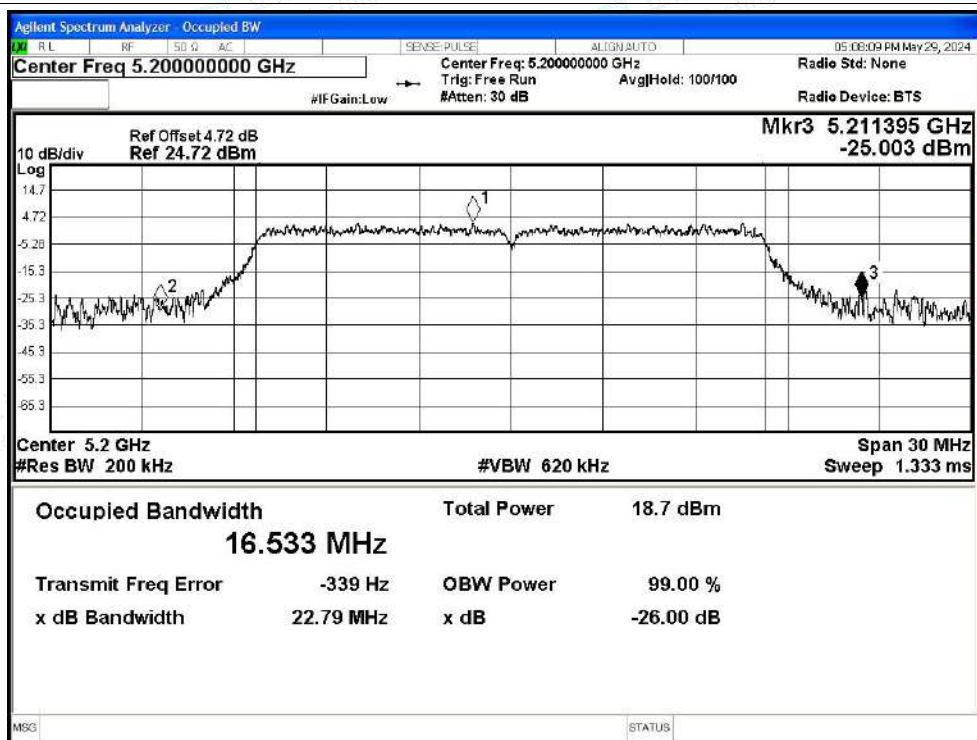




-26dB Bandwidth NVNT a 5240MHz Ant1

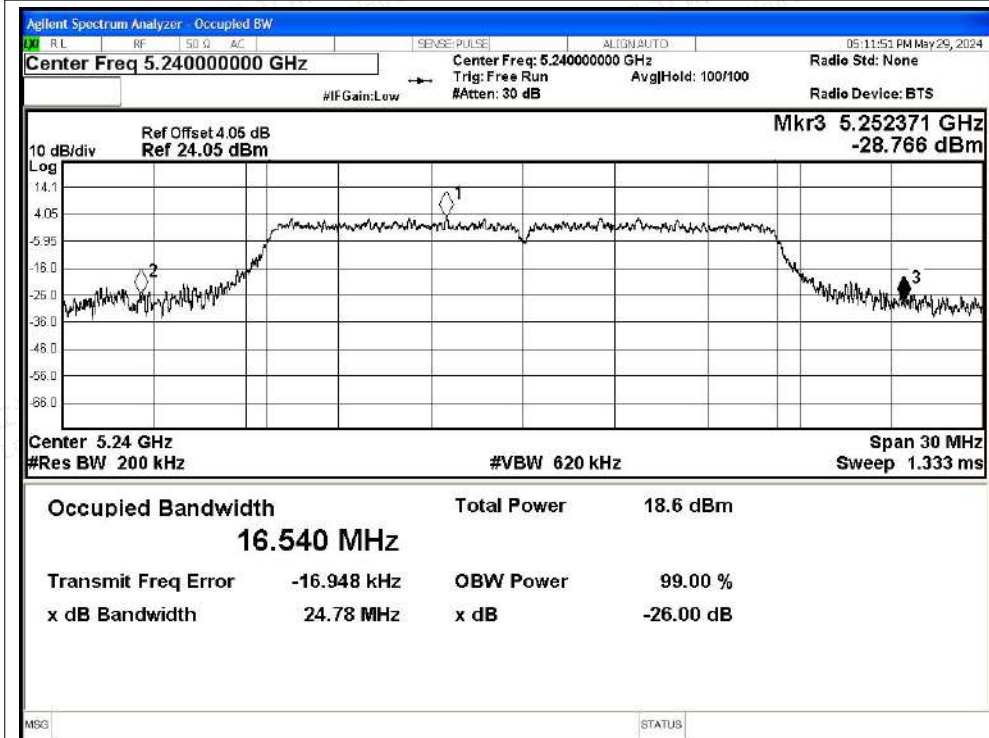


-26dB Bandwidth NVNT n20 5180MHz Ant1

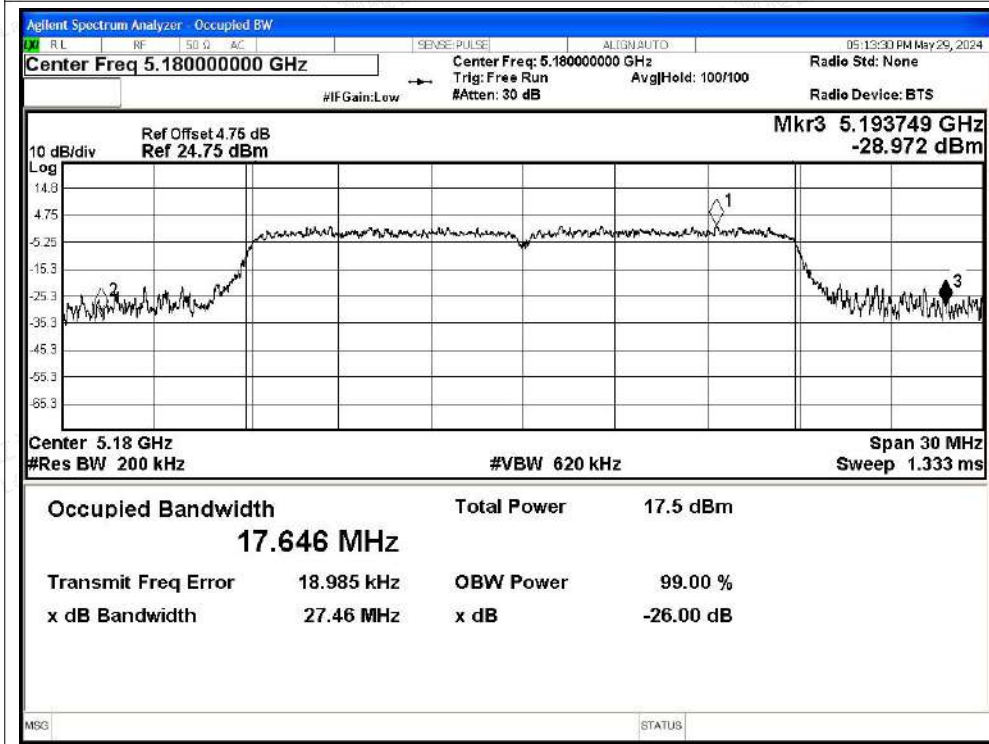




-26dB Bandwidth NVNT n20 5200MHz Ant1

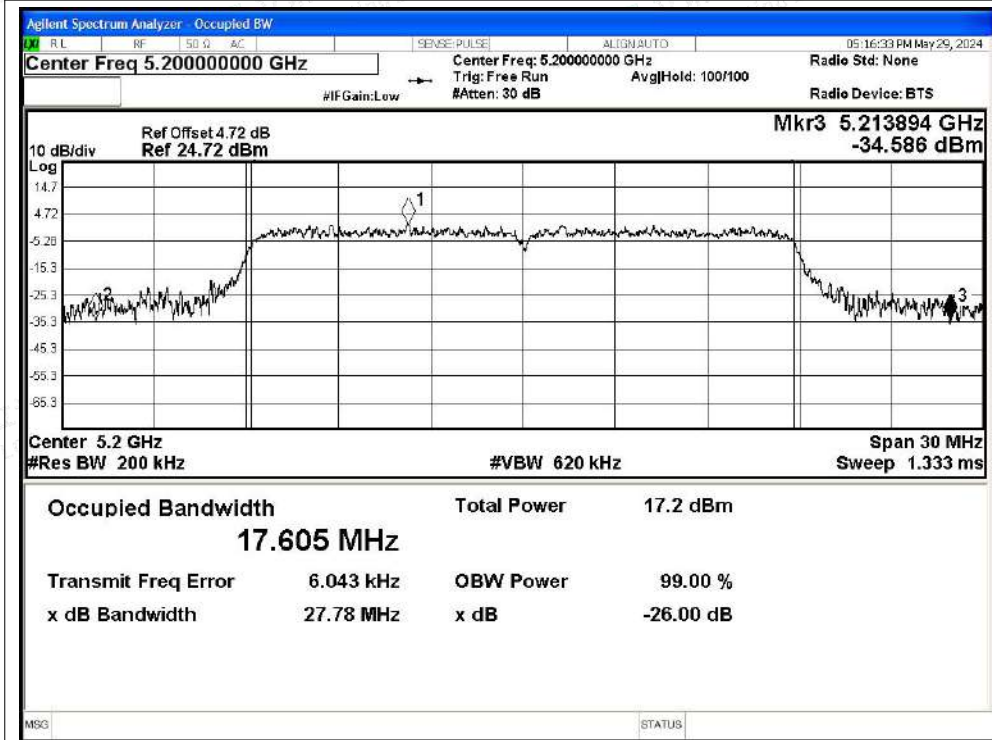


-26dB Bandwidth NVNT n20 5240MHz Ant1

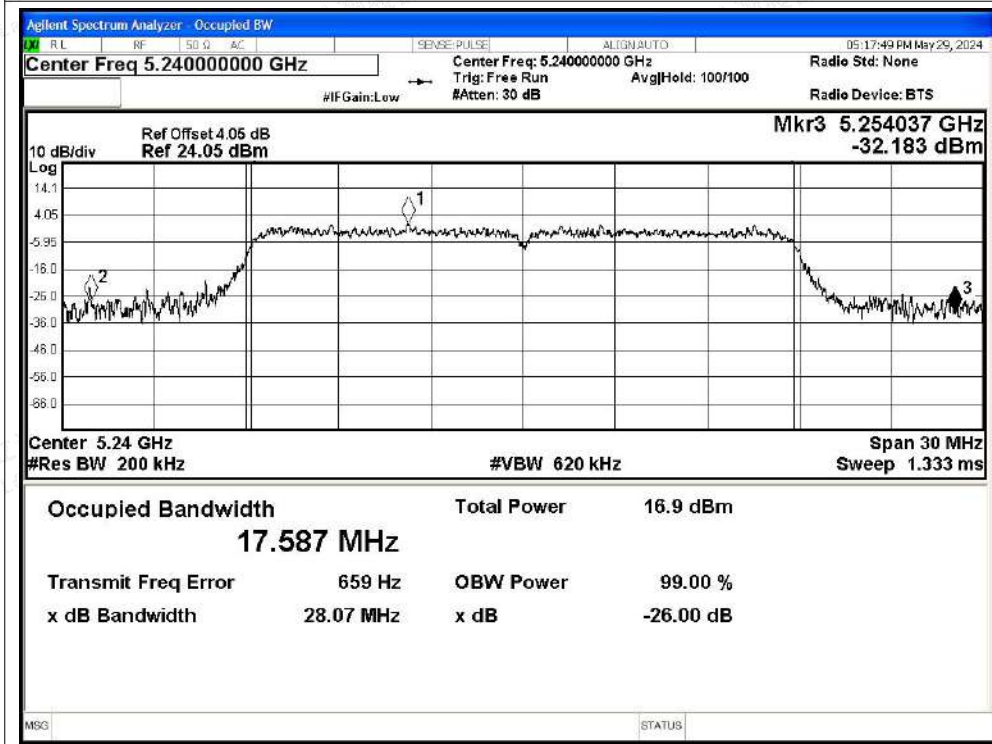




-26dB Bandwidth NVNT n40 5190MHz Ant1

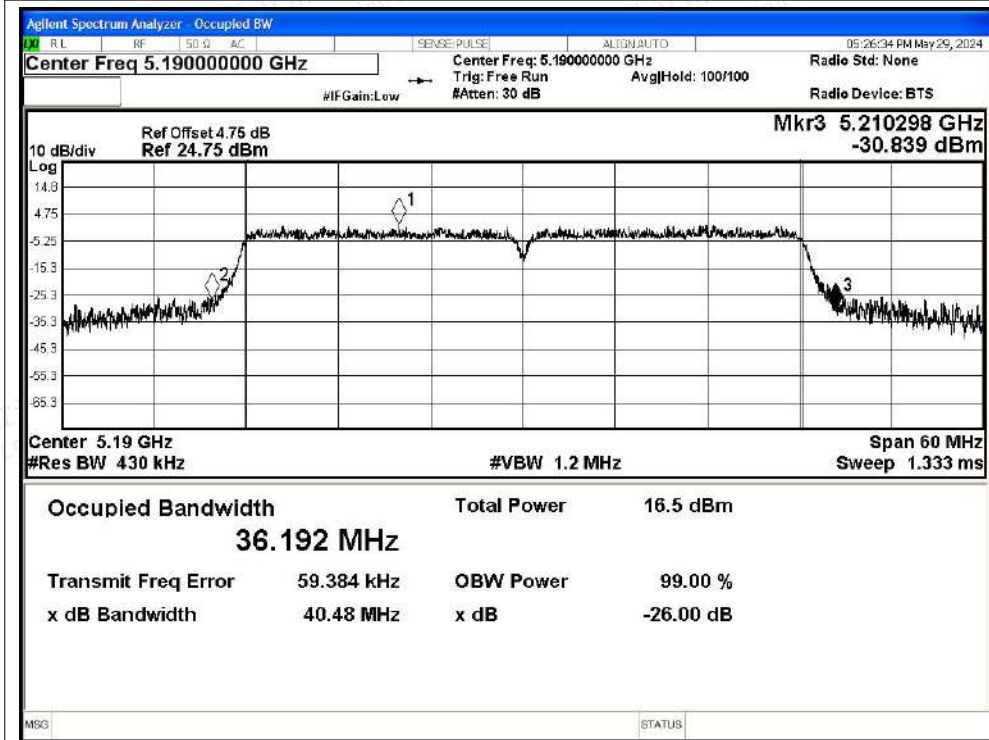


-26dB Bandwidth NVNT n40 5230MHz Ant1

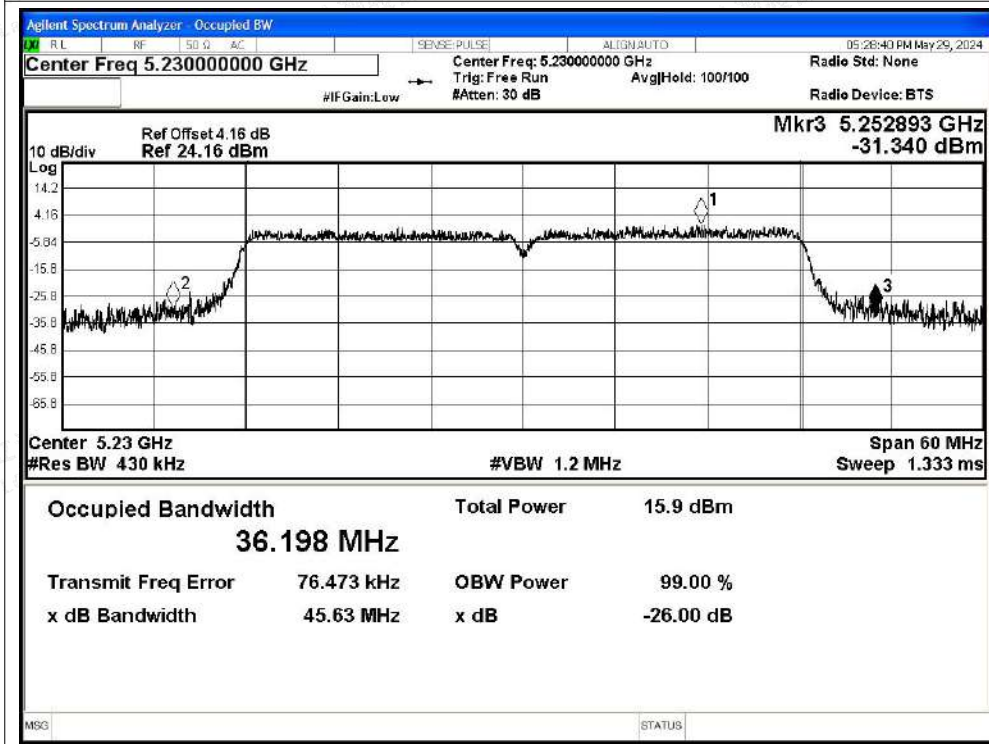




-26dB Bandwidth NVNT ac20 5180MHz Ant1

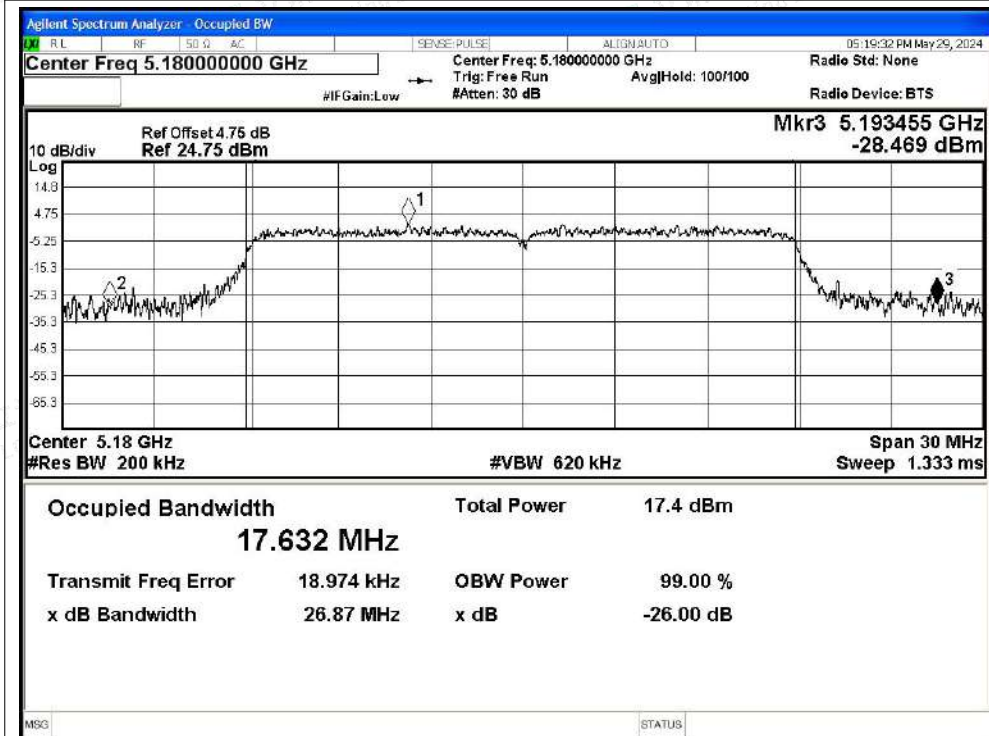


-26dB Bandwidth NVNT ac20 5200MHz Ant1

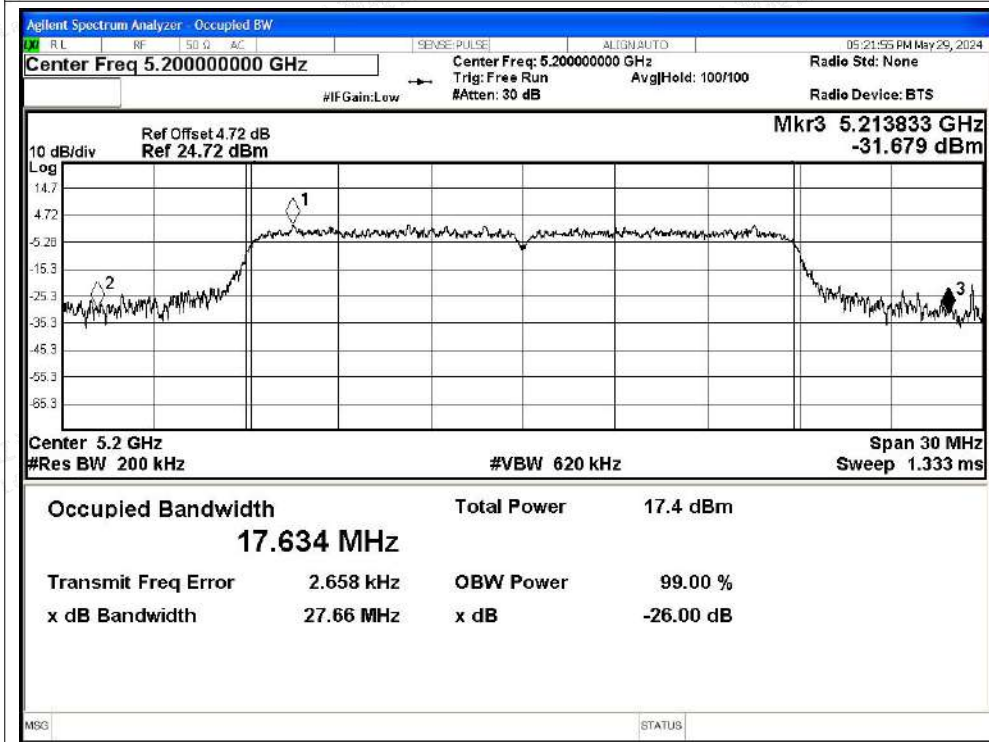




-26dB Bandwidth NVNT ac20 5240MHz Ant1

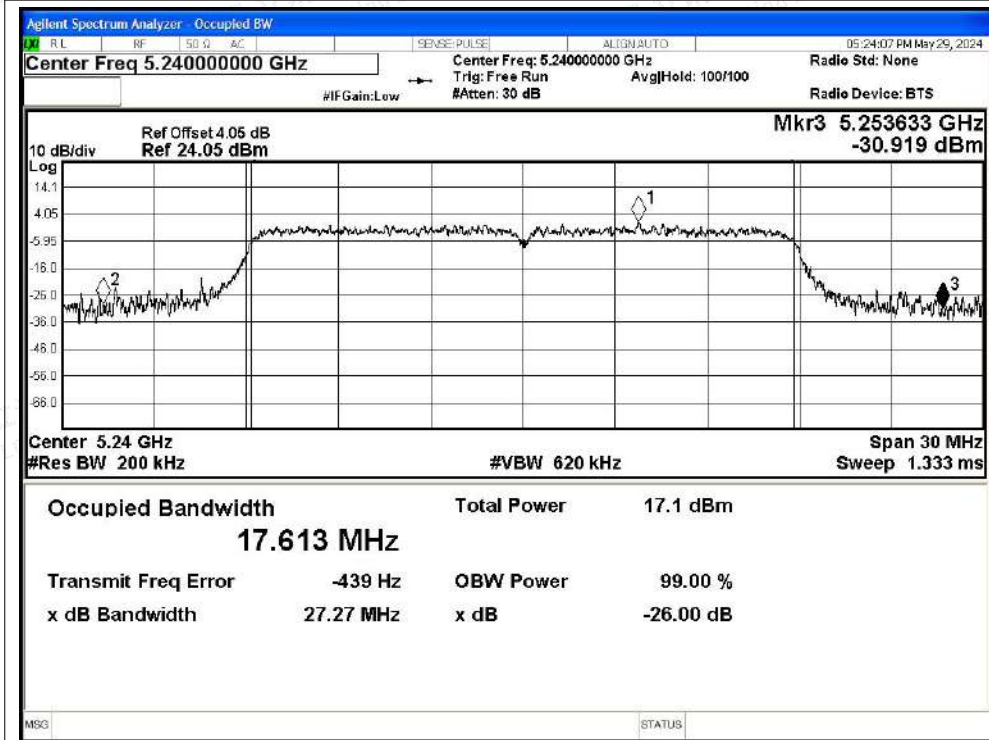


-26dB Bandwidth NVNT ac40 5190MHz Ant1

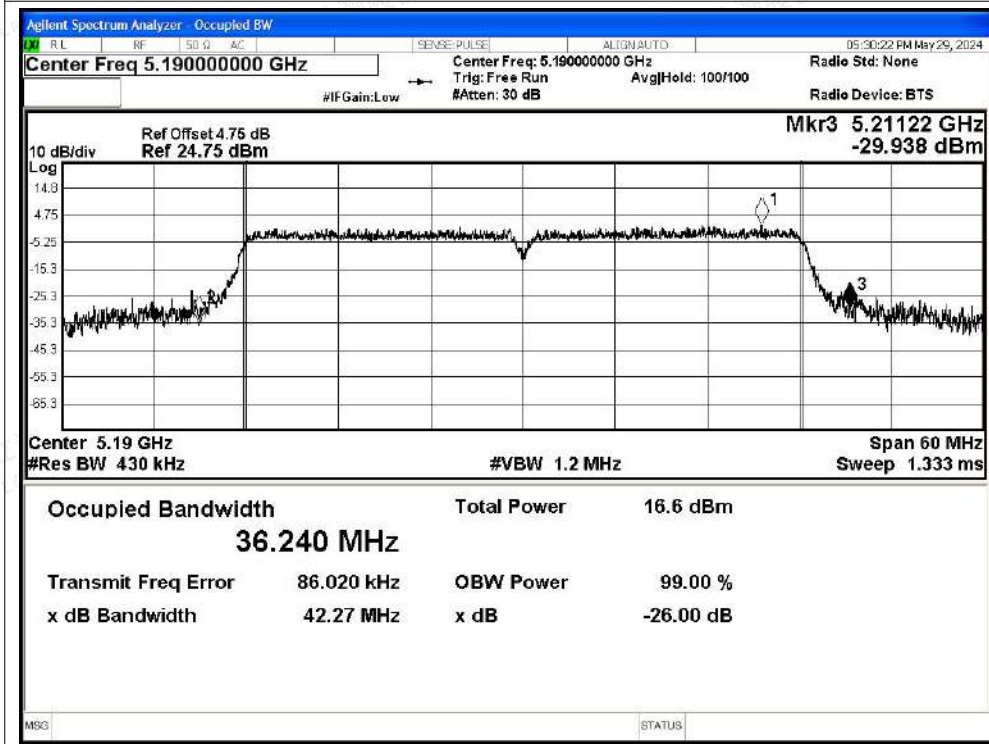




-26dB Bandwidth NVNT ac40 5230MHz Ant1

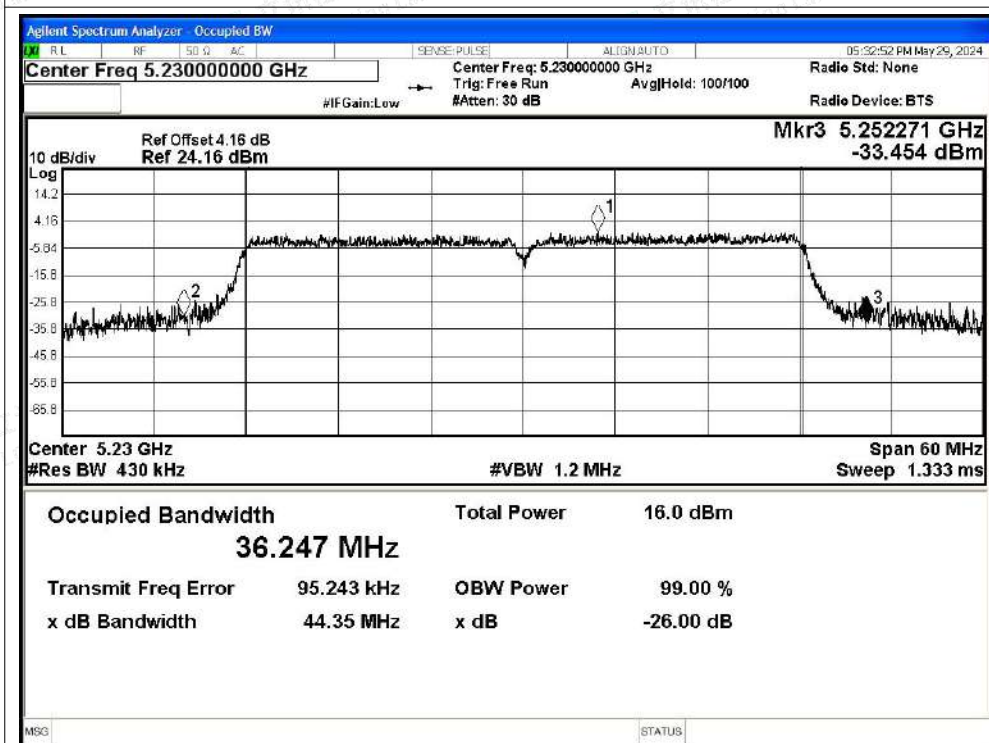

-26dB Bandwidth NVNT ac80 5210MHz Ant1

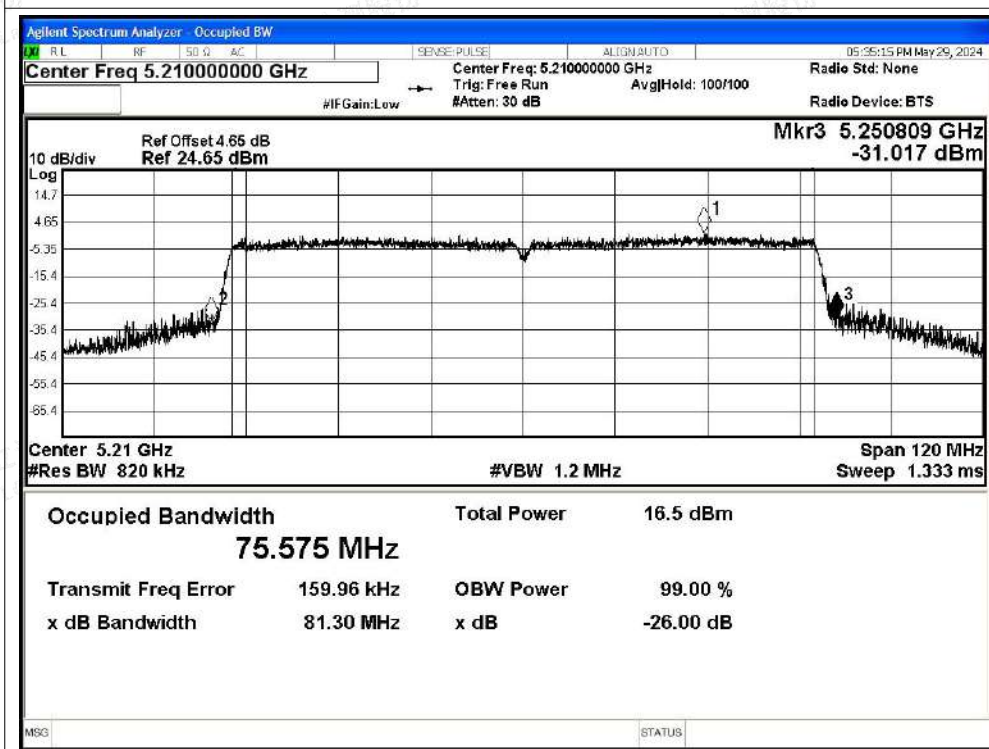



Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant2	21.992	>=0.5	Pass
NVNT	a	5200	Ant2	21.37	>=0.5	Pass
NVNT	a	5240	Ant2	23.176	>=0.5	Pass
NVNT	n20	5180	Ant2	26.302	>=0.5	Pass
NVNT	n20	5200	Ant2	27.205	>=0.5	Pass
NVNT	n20	5240	Ant2	26.751	>=0.5	Pass
NVNT	n40	5190	Ant2	42.636	>=0.5	Pass
NVNT	n40	5230	Ant2	45.788	>=0.5	Pass
NVNT	ac20	5180	Ant2	26.995	>=0.5	Pass
NVNT	ac20	5200	Ant2	28.884	>=0.5	Pass
NVNT	ac20	5240	Ant2	24.916	>=0.5	Pass
NVNT	ac40	5190	Ant2	45	>=0.5	Pass
NVNT	ac40	5230	Ant2	43.207	>=0.5	Pass
NVNT	ac80	5210	Ant2	81.882	>=0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant2

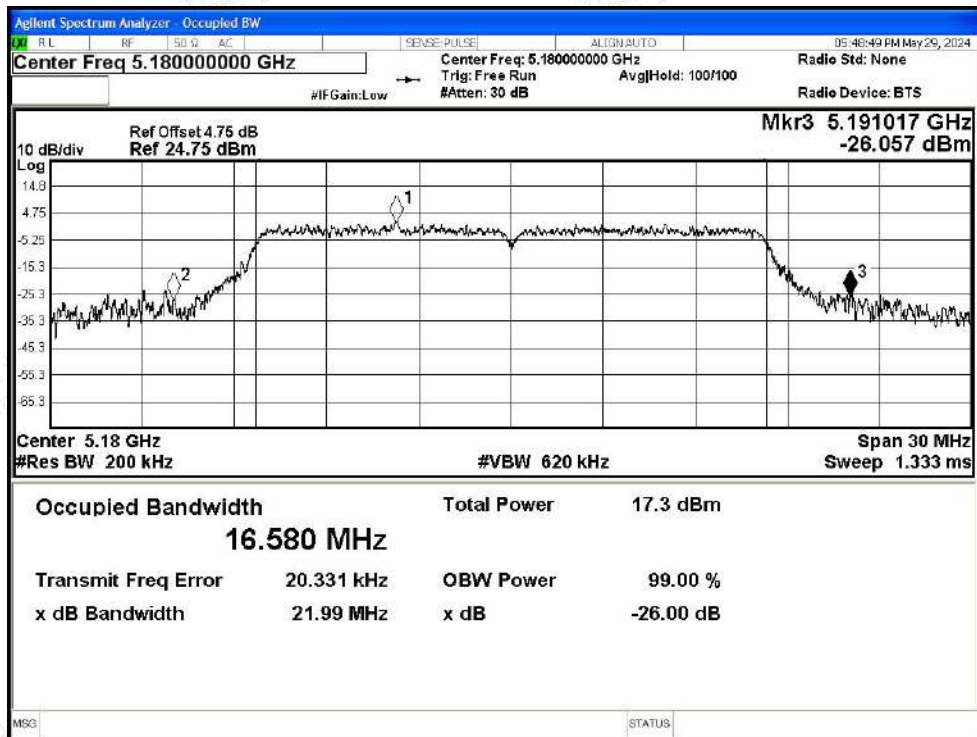


-26dB Bandwidth NVNT a 5200MHz Ant2

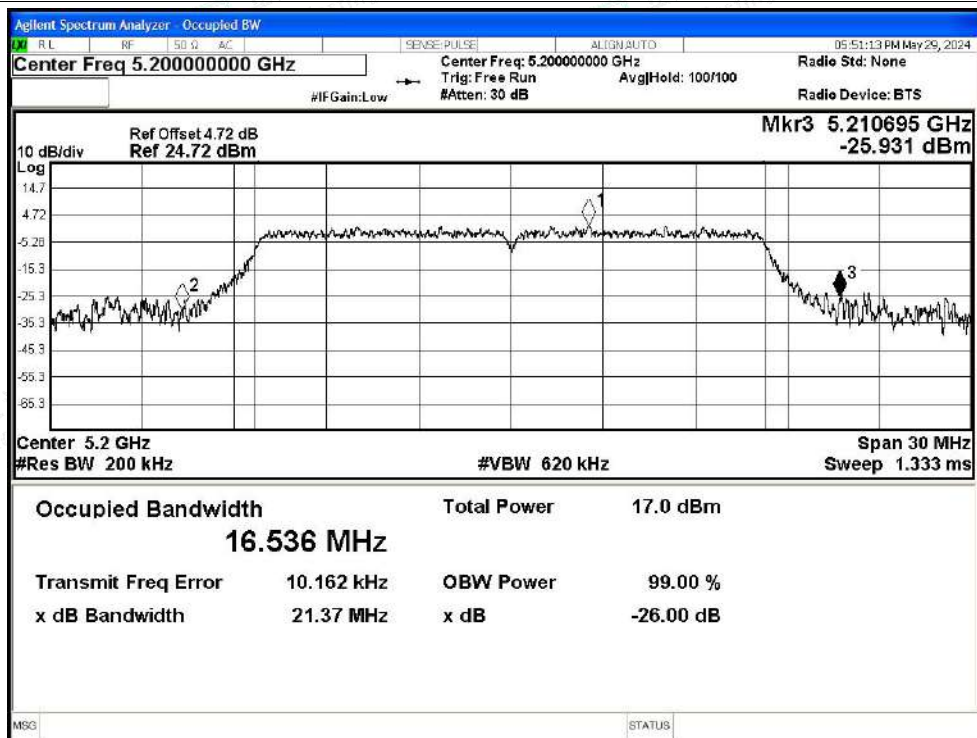




-26dB Bandwidth NVNT a 5240MHz Ant2

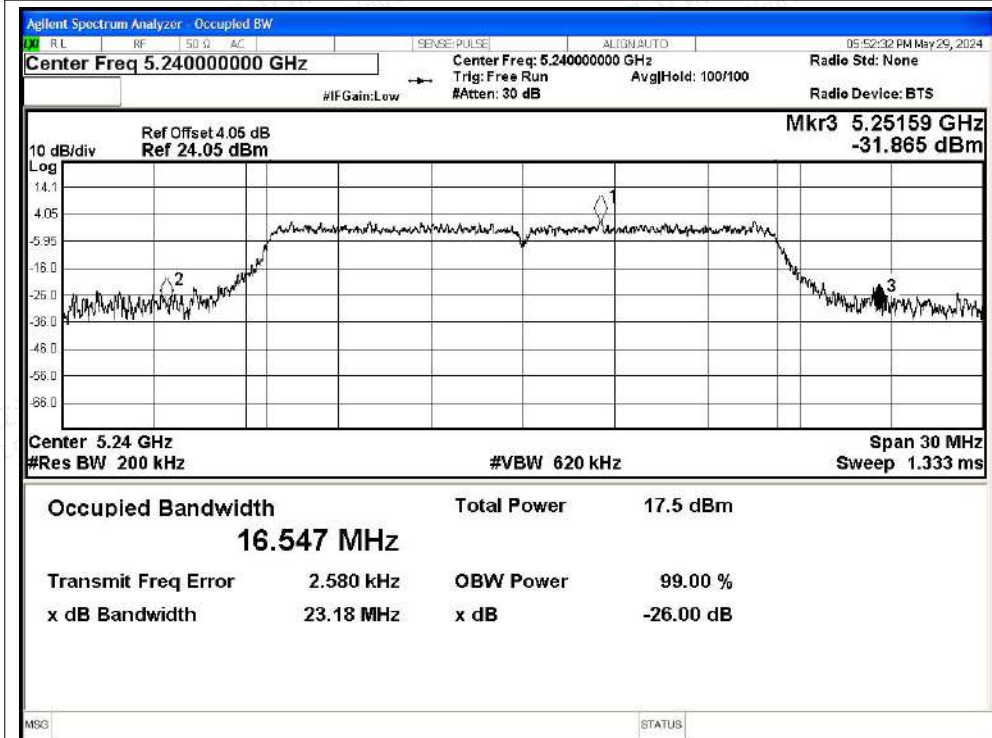


-26dB Bandwidth NVNT n20 5180MHz Ant2

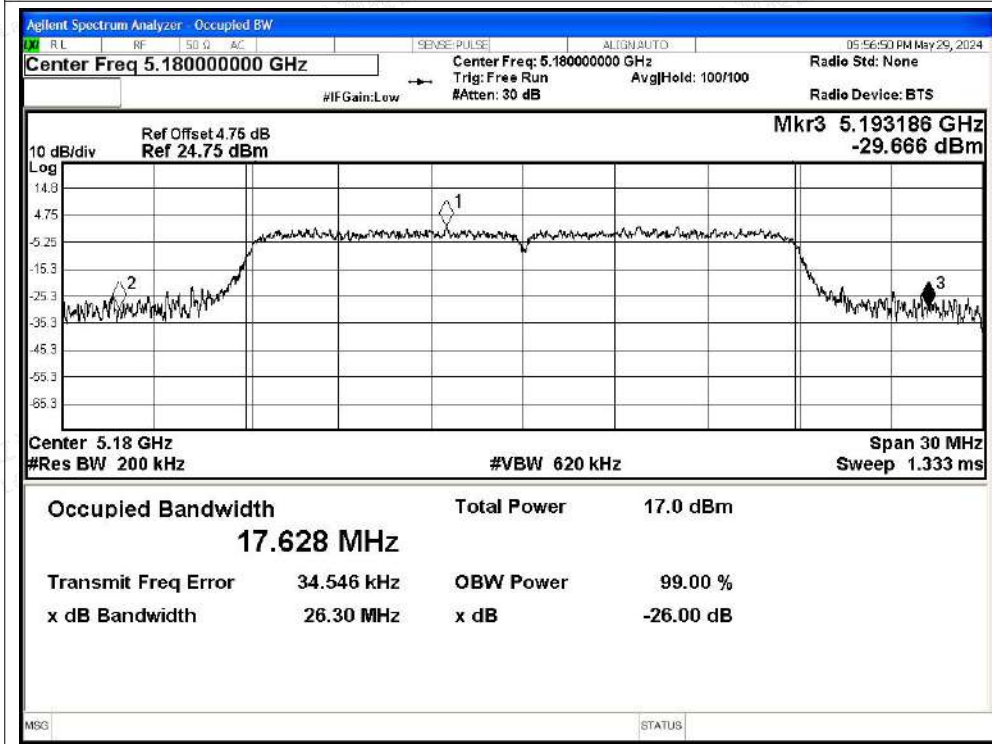




-26dB Bandwidth NVNT n20 5200MHz Ant2

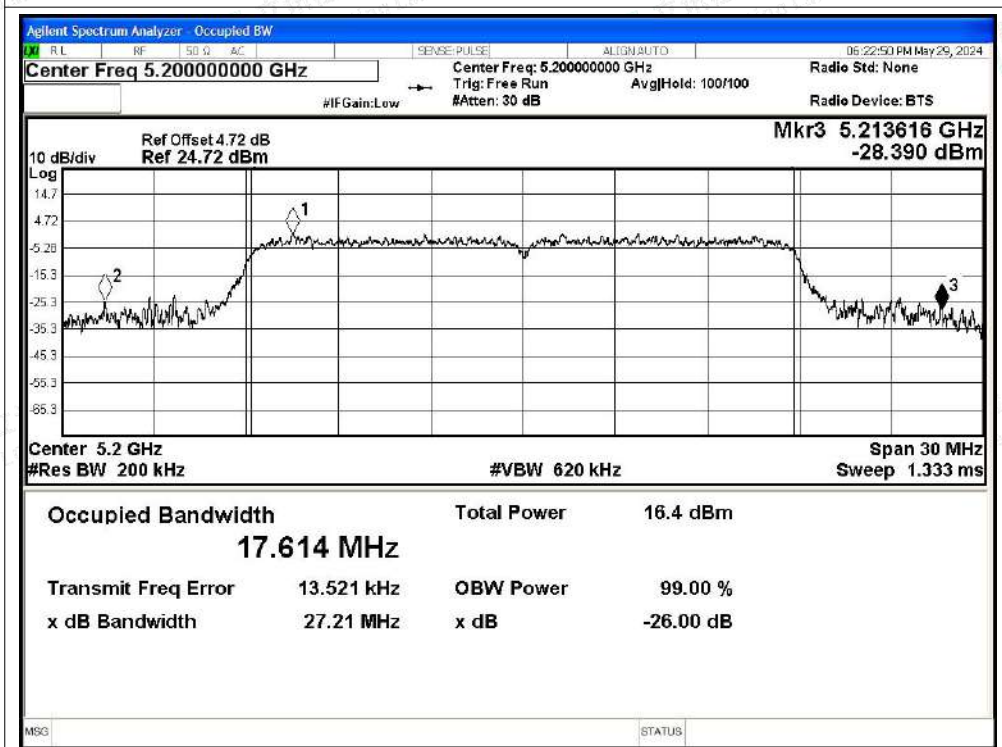


-26dB Bandwidth NVNT n20 5240MHz Ant2

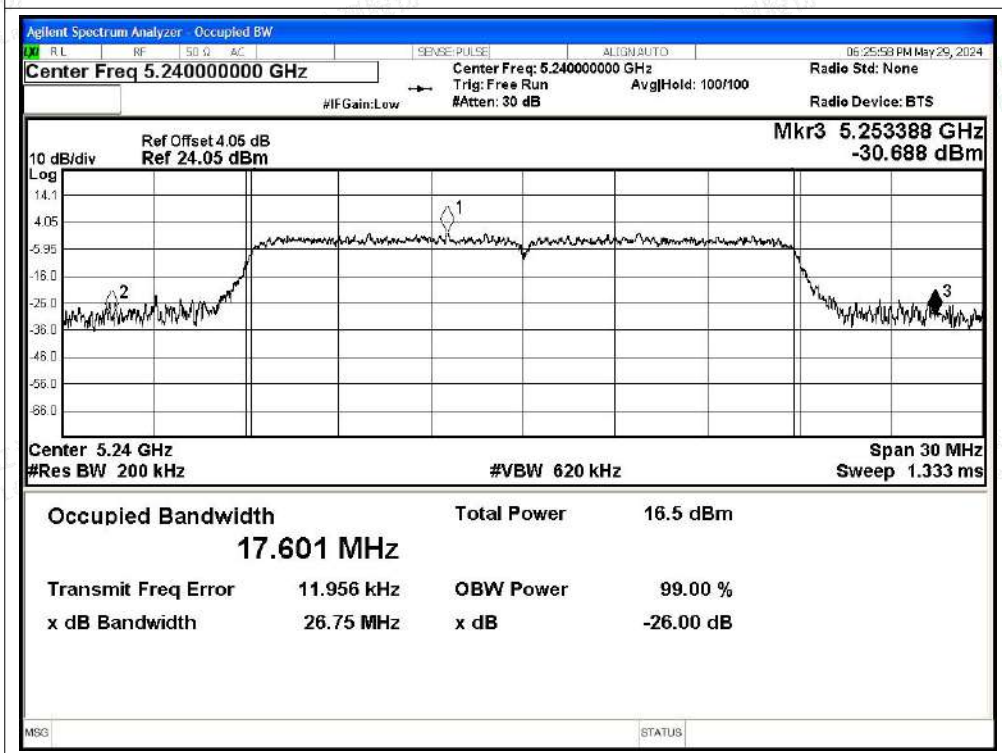




-26dB Bandwidth NVNT n40 5190MHz Ant2

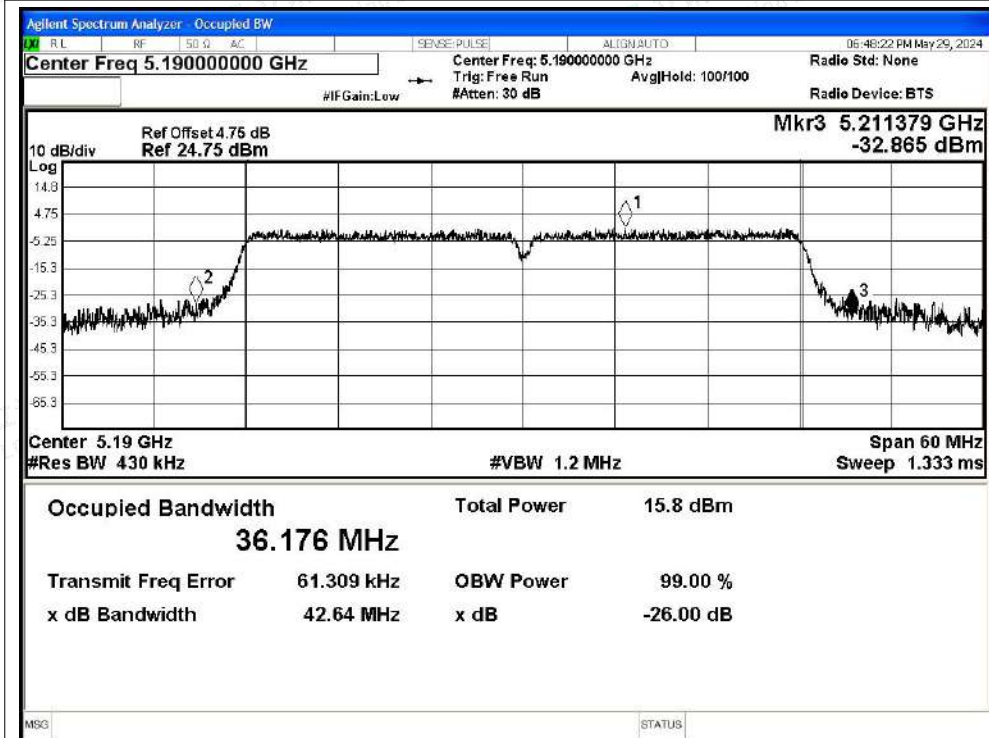


-26dB Bandwidth NVNT n40 5230MHz Ant2

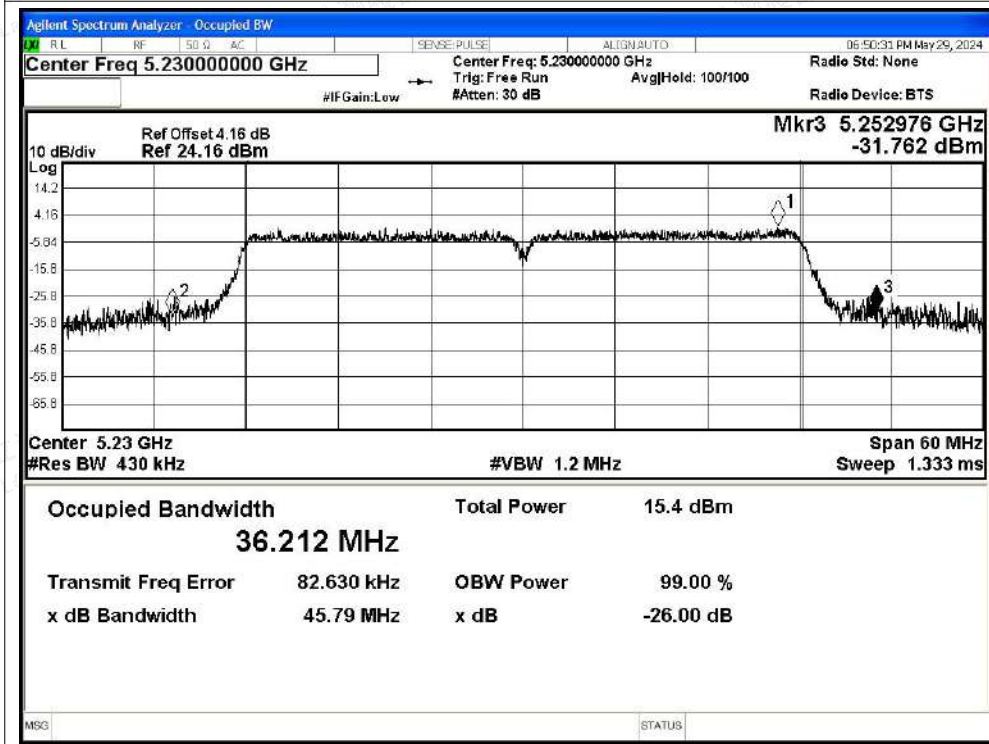




-26dB Bandwidth NVNT ac20 5180MHz Ant2

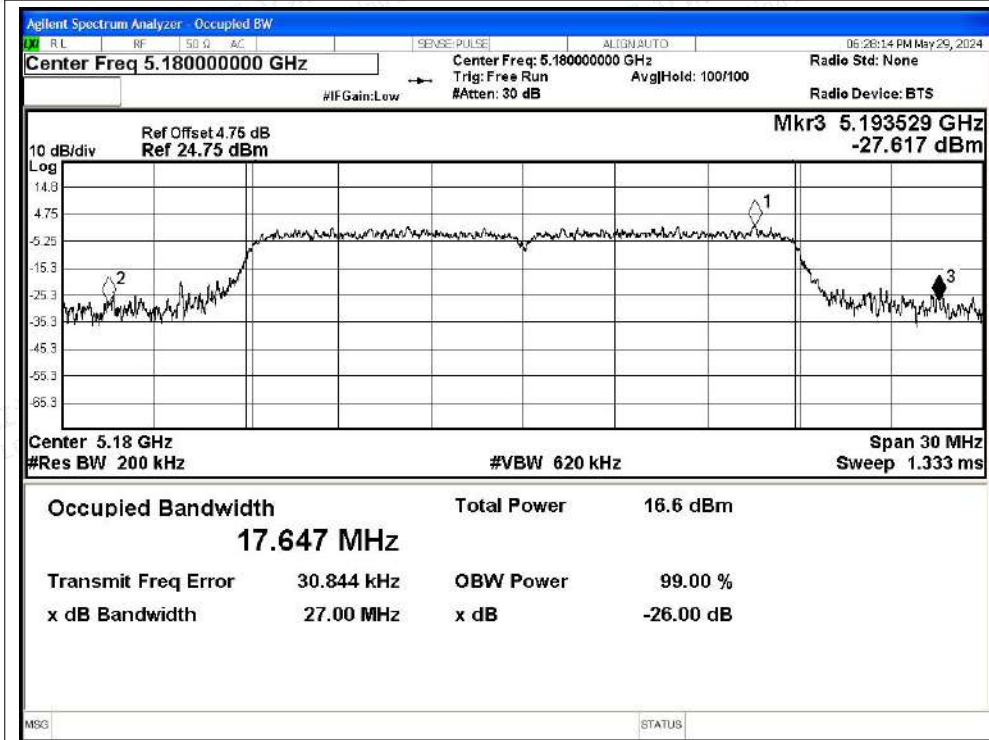


-26dB Bandwidth NVNT ac20 5200MHz Ant2

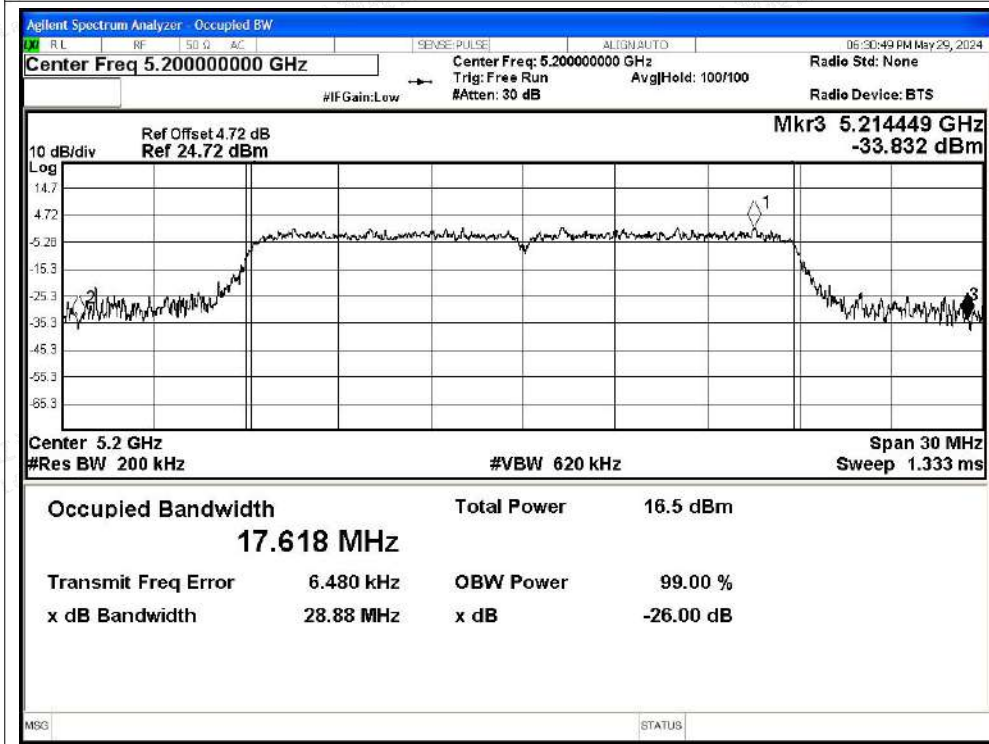




-26dB Bandwidth NVNT ac20 5240MHz Ant2

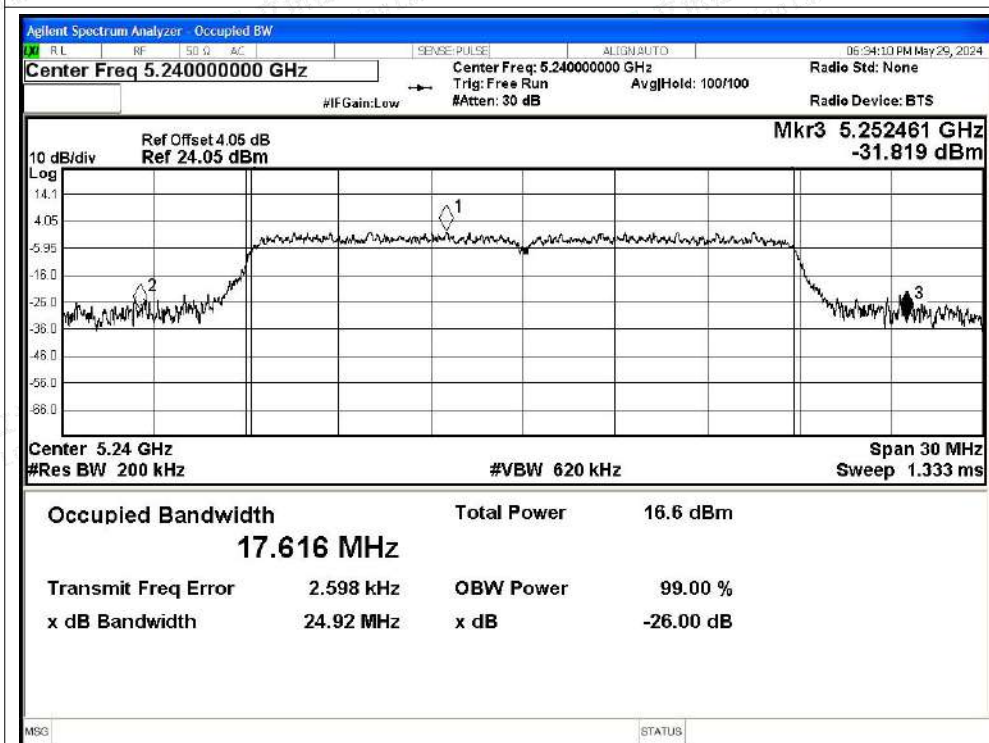


-26dB Bandwidth NVNT ac40 5190MHz Ant2

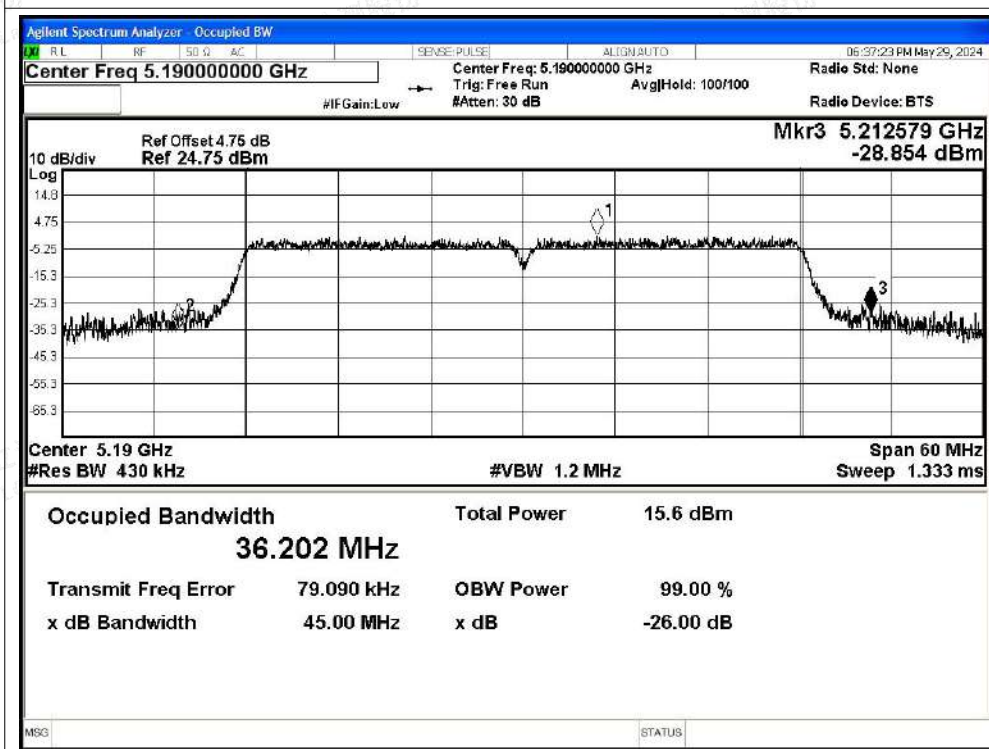




-26dB Bandwidth NVNT ac40 5230MHz Ant2

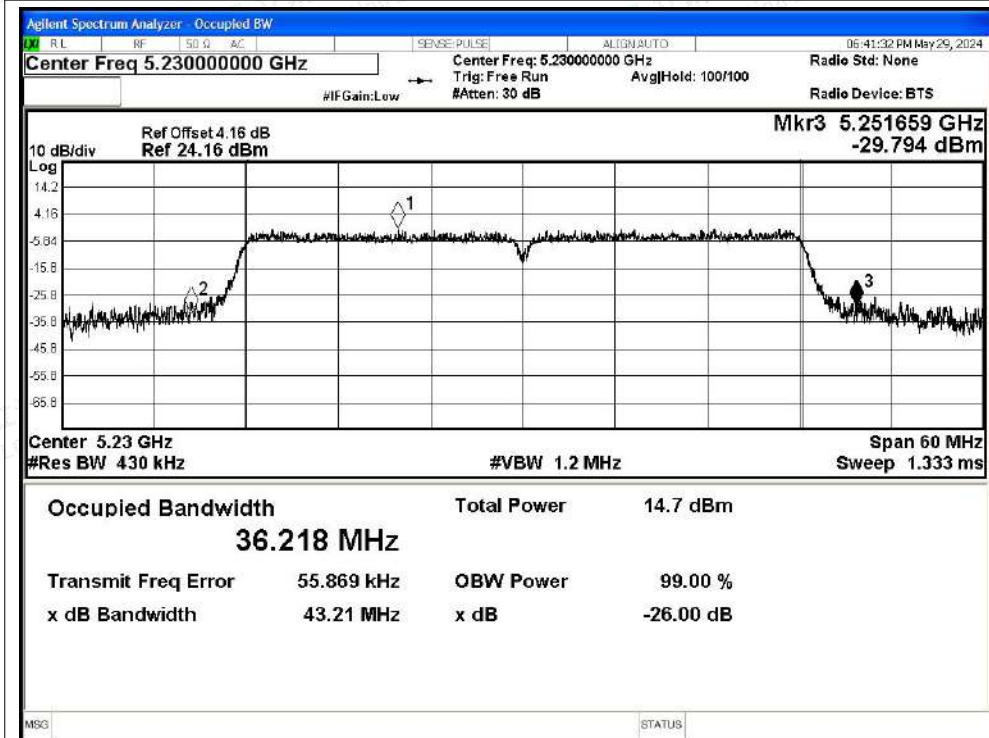

-26dB Bandwidth NVNT ac80 5210MHz Ant2

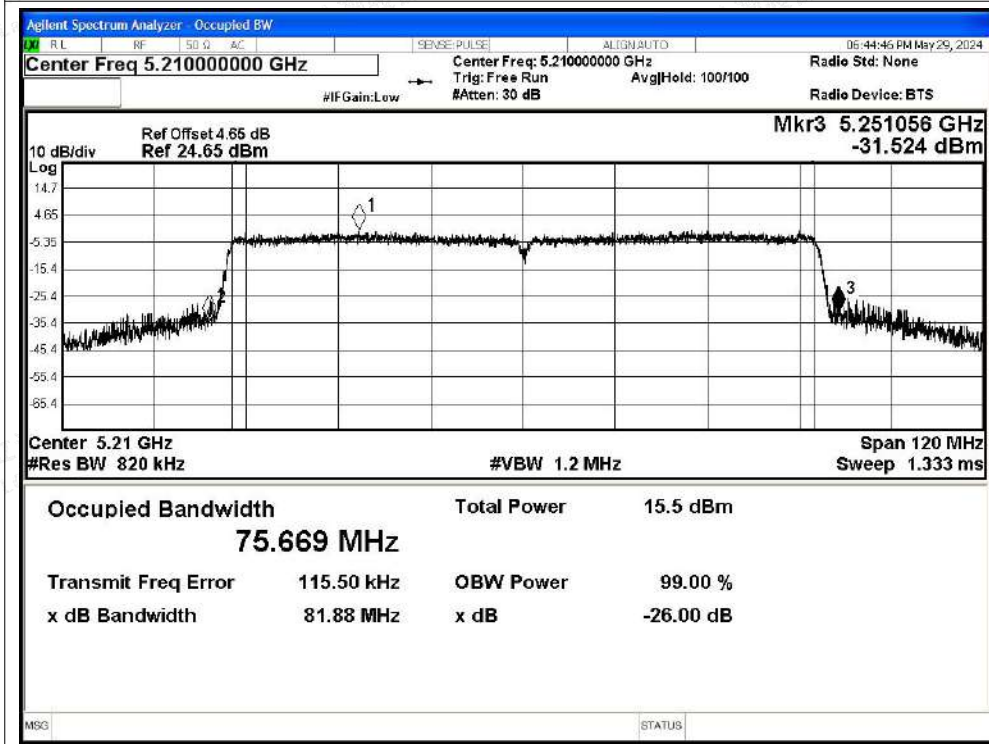



B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.26	0.24	12.5	24	Pass
NVNT	a	5200	Ant1	12.96	0.24	13.2	24	Pass
NVNT	a	5240	Ant1	12.73	0.24	12.97	24	Pass
NVNT	n20	5180	Ant1	11.88	0.28	12.16	24	Pass
NVNT	n20	5200	Ant1	11.43	0.28	11.71	24	Pass
NVNT	n20	5240	Ant1	11.19	0.28	11.47	24	Pass
NVNT	n40	5190	Ant1	10.65	0.12	10.77	24	Pass
NVNT	n40	5230	Ant1	10.1	0.12	10.22	24	Pass
NVNT	ac20	5180	Ant1	11.76	0.28	12.04	24	Pass
NVNT	ac20	5200	Ant1	11.56	0.28	11.84	24	Pass
NVNT	ac20	5240	Ant1	11.34	0.28	11.62	24	Pass
NVNT	ac40	5190	Ant1	10.74	0.12	10.86	24	Pass
NVNT	ac40	5230	Ant1	10.15	0.12	10.27	24	Pass
NVNT	ac80	5210	Ant1	9.68	0.25	9.93	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant2	11.46	0.24	11.7	24	Pass
NVNT	a	5200	Ant2	11.29	0.24	11.53	24	Pass
NVNT	a	5240	Ant2	11.86	0.24	12.1	24	Pass
NVNT	n20	5180	Ant2	10.78	0.28	11.06	24	Pass
NVNT	n20	5200	Ant2	10.65	0.28	10.93	24	Pass
NVNT	n20	5240	Ant2	10.8	0.28	11.08	24	Pass
NVNT	n40	5190	Ant2	9.87	0.12	9.99	24	Pass
NVNT	n40	5230	Ant2	9.47	0.12	9.59	24	Pass
NVNT	ac20	5180	Ant2	10.82	0.28	11.1	24	Pass
NVNT	ac20	5200	Ant2	10.81	0.28	11.09	24	Pass
NVNT	ac20	5240	Ant2	10.91	0.28	11.19	24	Pass
NVNT	ac40	5190	Ant2	9.8	0.12	9.92	24	Pass
NVNT	ac40	5230	Ant2	9.57	0.12	9.69	24	Pass
NVNT	ac80	5210	Ant2	8.72	0.25	8.97	24	Pass





ant1+ant2

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5180	12.16	11.06	14.66	24.00	Pass
NVNT	n20	5200	11.71	10.93	14.35	24.00	Pass
NVNT	n20	5240	11.47	11.08	14.29	24.01	Pass
NVNT	n40	5190	10.77	9.99	13.41	24.00	Pass
NVNT	n40	5230	10.22	9.59	12.93	24.00	Pass
NVNT	ac20	5180	12.04	11.1	14.61	24.00	Pass
NVNT	ac20	5200	11.84	11.09	14.49	24.00	Pass
NVNT	ac20	5240	11.62	11.19	14.42	24.00	Pass
NVNT	ac40	5190	10.86	9.92	13.43	24.00	Pass
NVNT	ac40	5230	10.27	9.69	13.00	24.00	Pass
NVNT	ac80	5210	9.93	8.97	12.49	24.00	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD(dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	1.74	0.24	1.98	11	Pass
NVNT	a	5200	Ant1	2.63	0.24	2.87	11	Pass
NVNT	a	5240	Ant1	2.31	0.24	2.55	11	Pass
NVNT	n20	5180	Ant1	1.41	0.28	1.69	11	Pass
NVNT	n20	5200	Ant1	0.79	0.28	1.07	11	Pass
NVNT	n20	5240	Ant1	0.45	0.28	0.73	11	Pass
NVNT	n40	5190	Ant1	-3.04	0.12	-2.92	11	Pass
NVNT	n40	5230	Ant1	-3.42	0.12	-3.3	11	Pass
NVNT	ac20	5180	Ant1	0.93	0.28	1.21	11	Pass
NVNT	ac20	5200	Ant1	1.09	0.28	1.37	11	Pass
NVNT	ac20	5240	Ant1	0.93	0.28	1.21	11	Pass
NVNT	ac40	5190	Ant1	-2.92	0.12	-2.8	11	Pass
NVNT	ac40	5230	Ant1	-3.31	0.12	-3.19	11	Pass
NVNT	ac80	5210	Ant1	-6.38	0.25	-6.13	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant2	1.07	0.24	1.31	11	Pass
NVNT	a	5200	Ant2	0.9	0.24	1.14	11	Pass
NVNT	a	5240	Ant2	1.19	0.24	1.43	11	Pass
NVNT	n20	5180	Ant2	0.15	0.28	0.43	11	Pass
NVNT	n20	5200	Ant2	-0.23	0.28	0.05	11	Pass
NVNT	n20	5240	Ant2	0.25	0.28	0.53	11	Pass
NVNT	n40	5190	Ant2	-3.88	0.12	-3.76	11	Pass
NVNT	n40	5230	Ant2	-4.18	0.12	-4.06	11	Pass
NVNT	ac20	5180	Ant2	-0.05	0.28	0.23	11	Pass
NVNT	ac20	5200	Ant2	0.18	0.28	0.46	11	Pass
NVNT	ac20	5240	Ant2	0.18	0.28	0.46	11	Pass
NVNT	ac40	5190	Ant2	-3.92	0.12	-3.8	11	Pass
NVNT	ac40	5230	Ant2	-4.22	0.12	-4.1	11	Pass
NVNT	ac80	5210	Ant2	-7.74	0.25	-7.49	11	Pass





ant1+ant2

Condition	Mode	Frequency (MHz)	Total PSD (dBm/MHz)			Limit (dBm/MHz)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5180	1.69	0.43	4.12	11.00	Pass
NVNT	n20	5200	1.07	0.05	3.60	11.00	Pass
NVNT	n20	5240	0.73	0.53	3.64	11.00	Pass
NVNT	n40	5190	-2.92	-3.76	-0.31	11.00	Pass
NVNT	n40	5230	-3.3	-4.06	-0.65	11.00	Pass
NVNT	ac20	5180	1.21	0.23	3.76	11.00	Pass
NVNT	ac20	5200	1.37	0.46	3.95	11.00	Pass
NVNT	ac20	5240	1.21	0.46	3.86	11.00	Pass
NVNT	ac40	5190	-2.8	-3.8	-0.26	11.00	Pass
NVNT	ac40	5230	-3.19	-4.1	-0.61	11.00	Pass
NVNT	ac80	5210	-6.13	-7.49	-3.75	11.00	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

PSD NVNT a 5180MHz Ant1

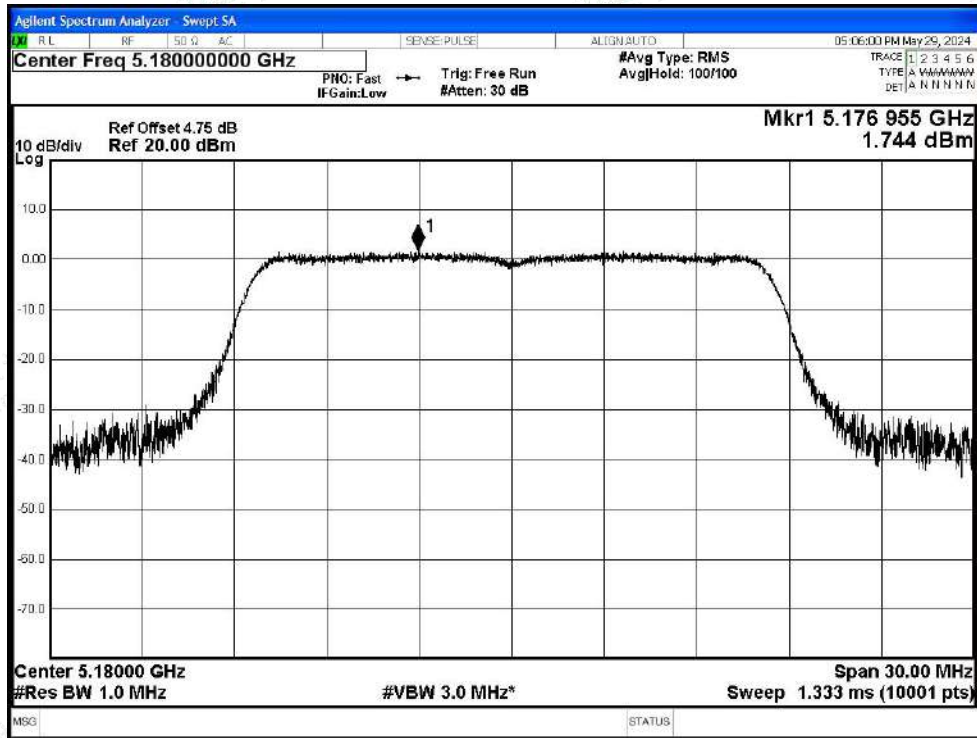


PSD NVNT a 5200MHz Ant1

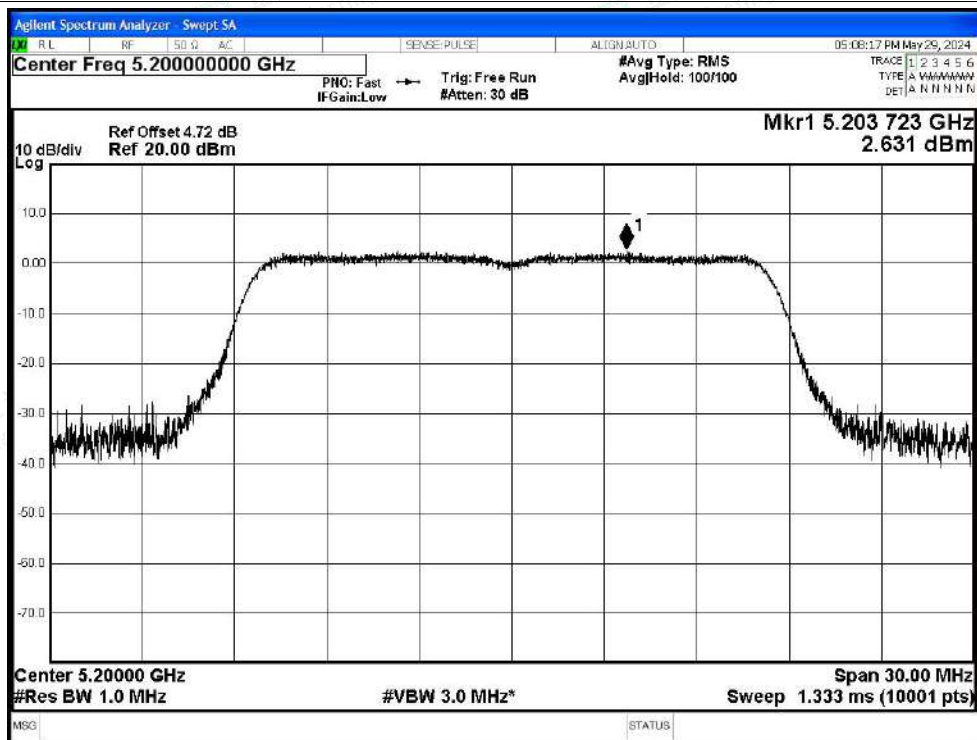








PSD NVNT a 5240MHz Ant1


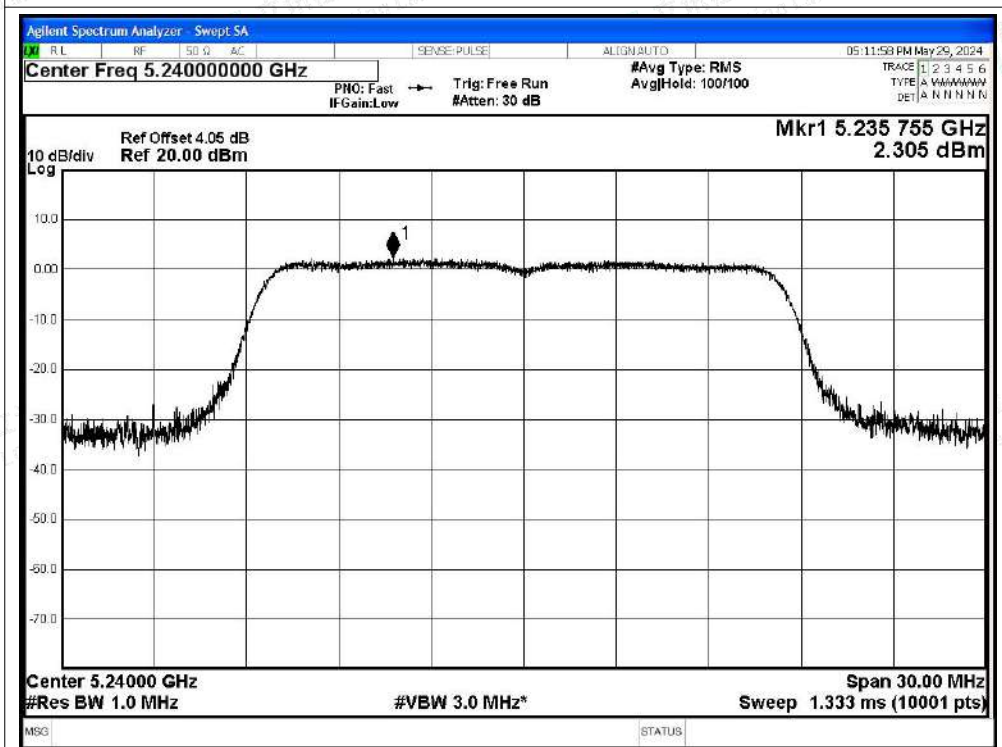


PSD NVNT n20 5180MHz Ant1

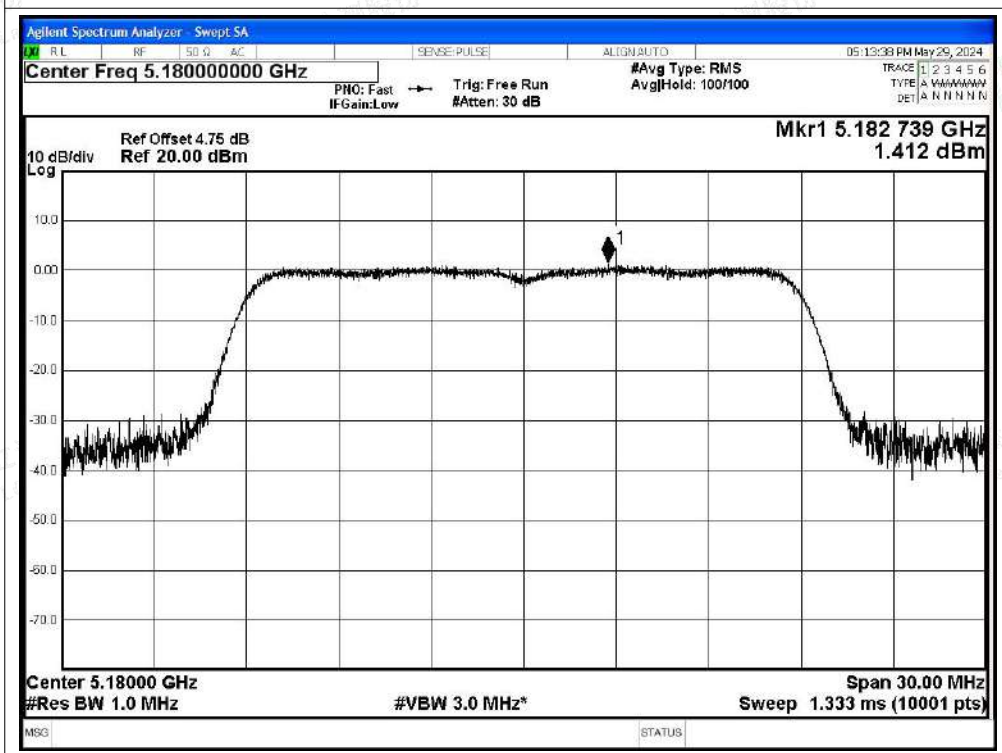

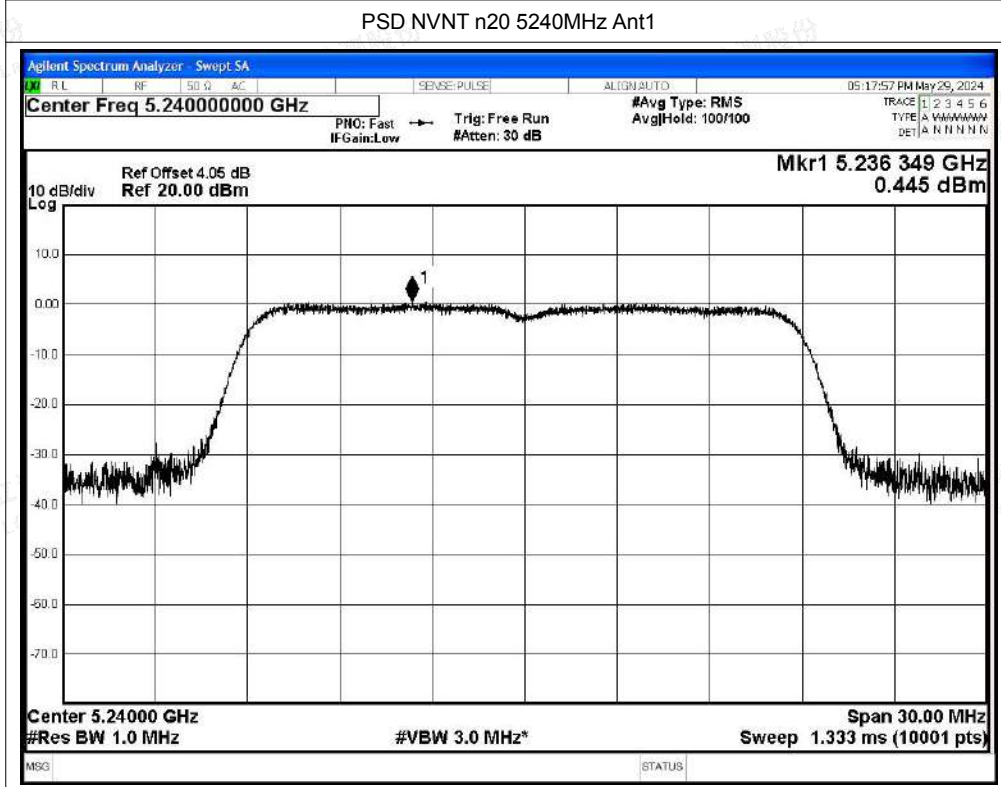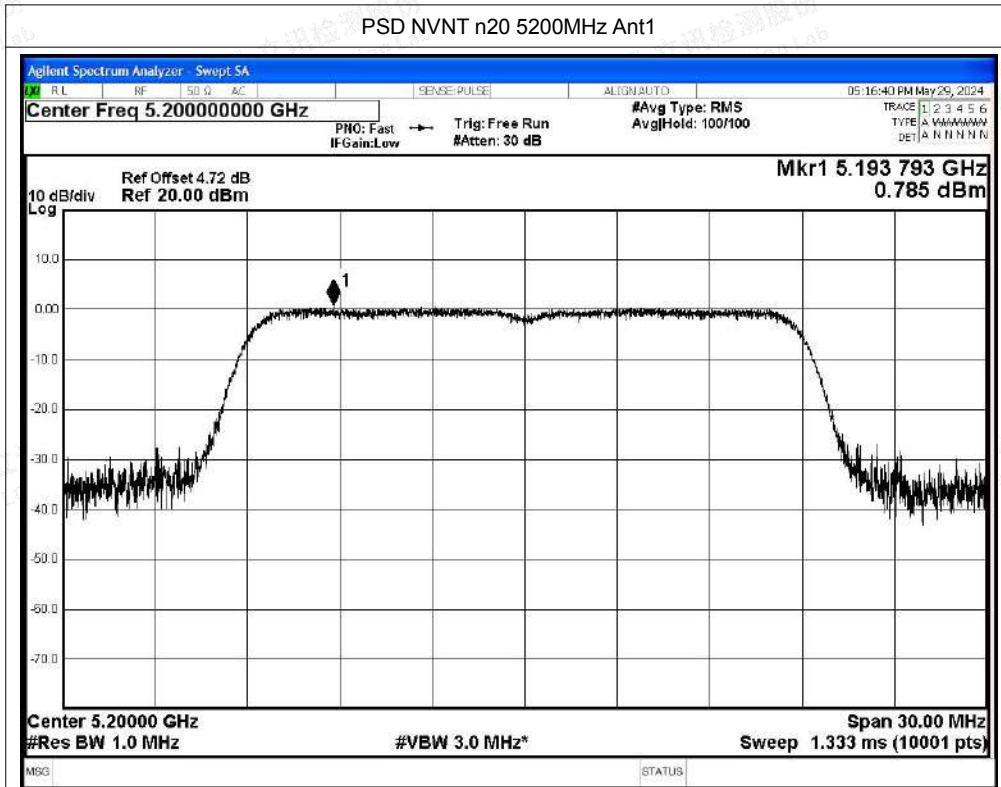


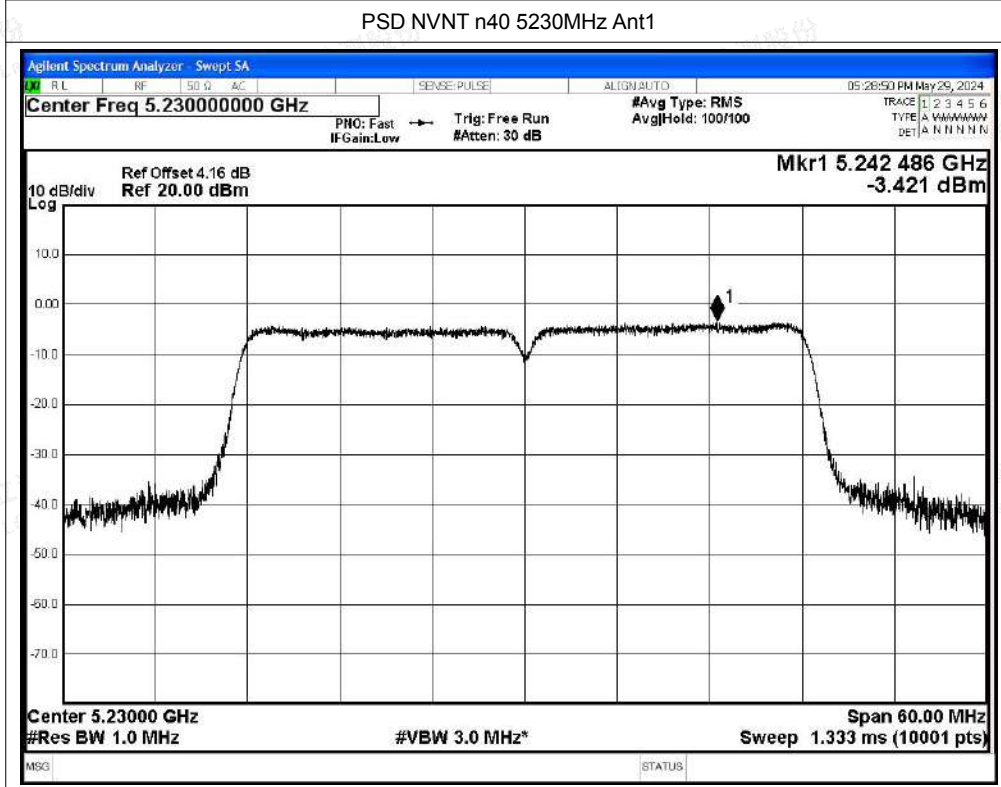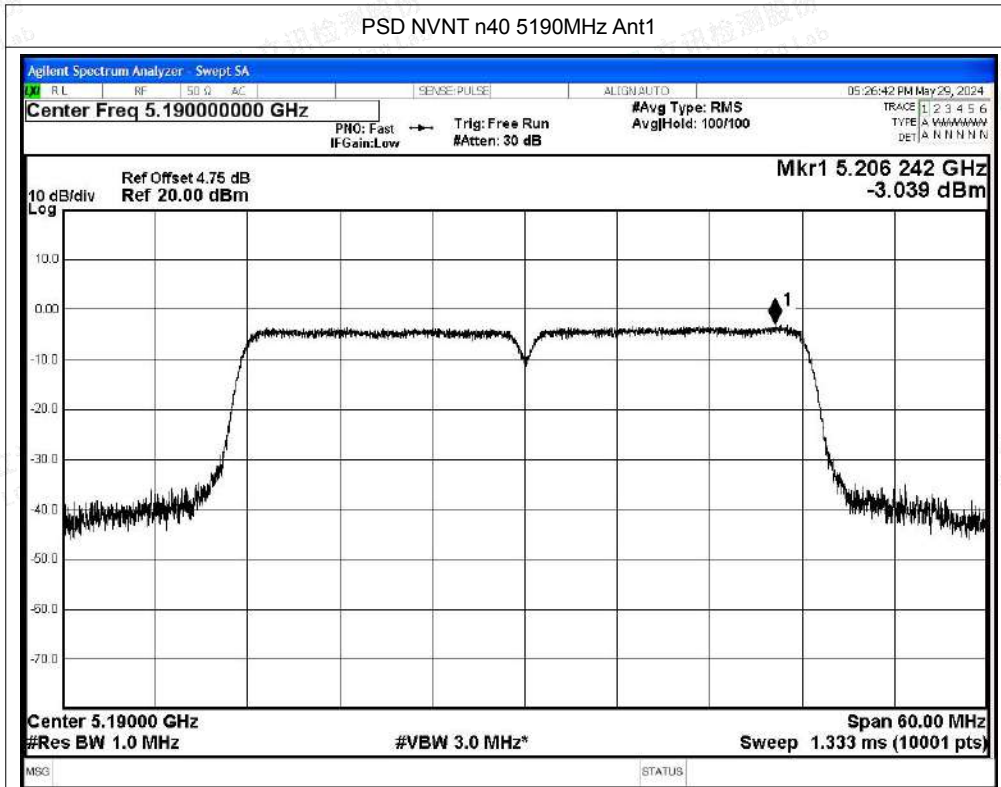

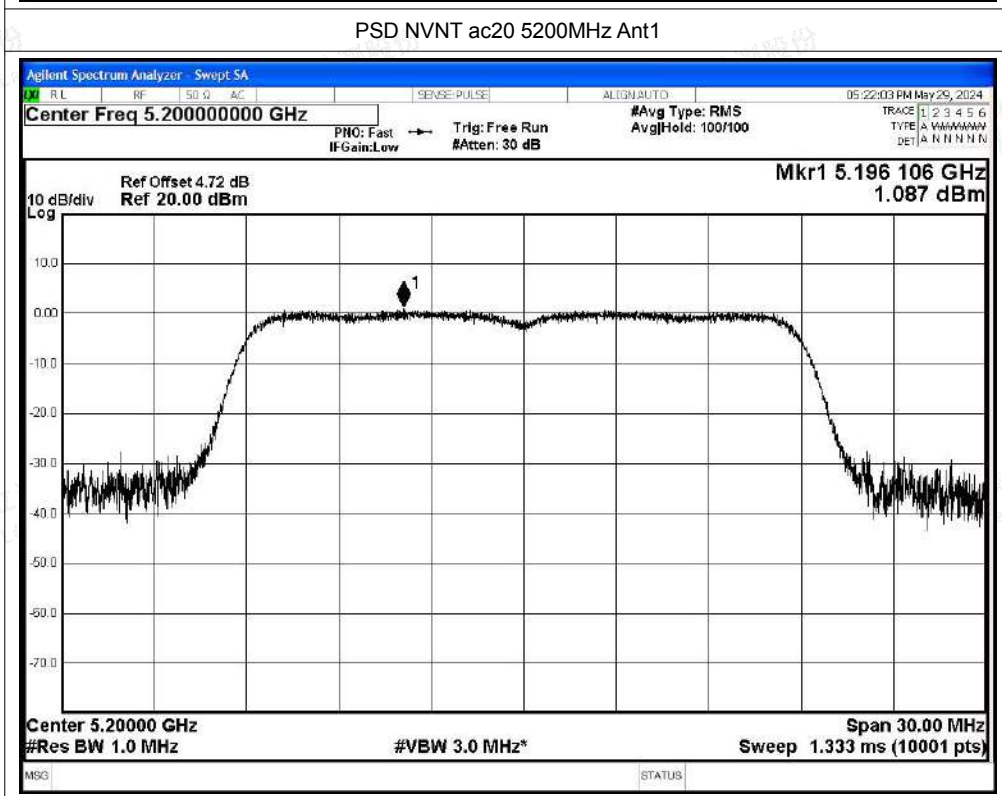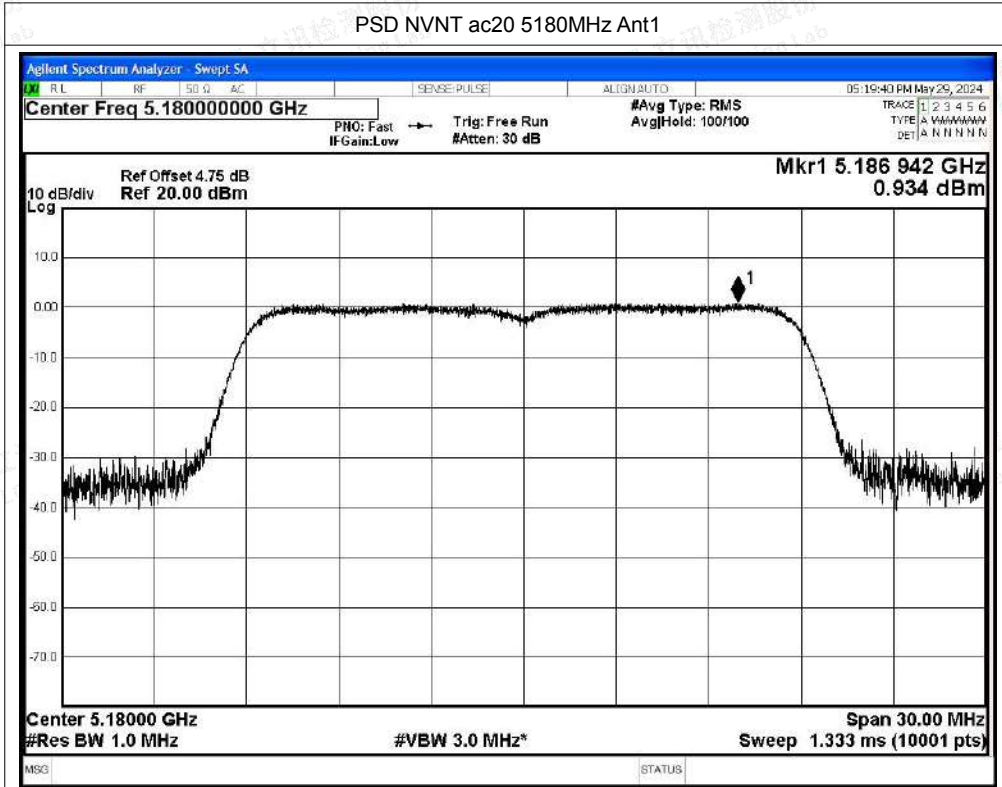






PSD NVNT ac20 5240MHz Ant1

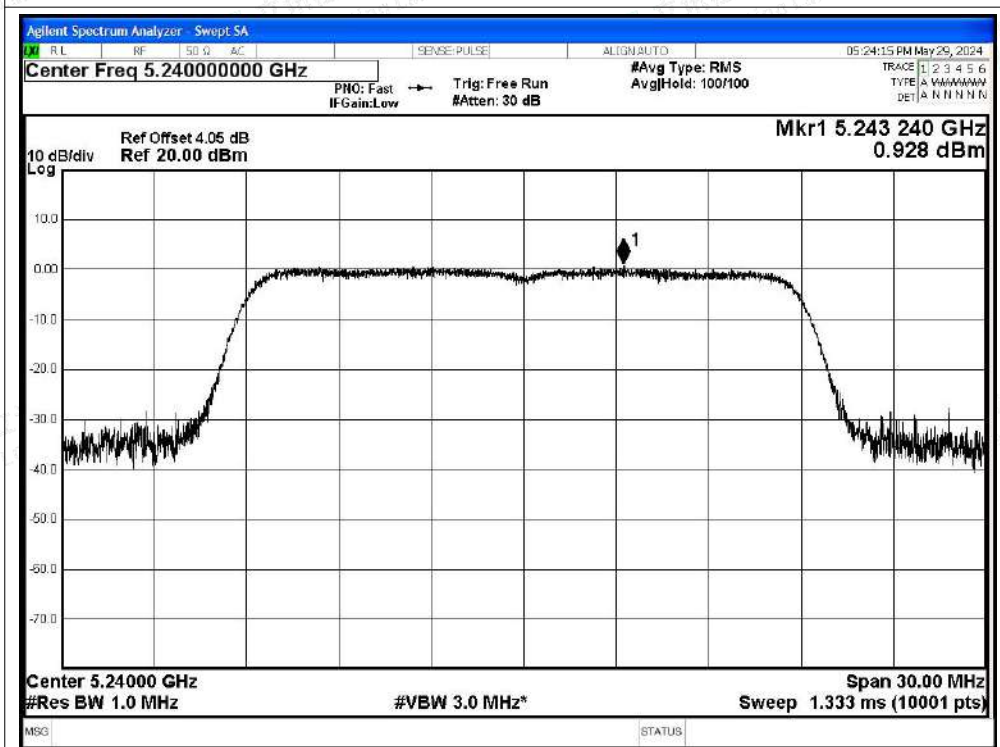

PSD NVNT ac40 5190MHz Ant1

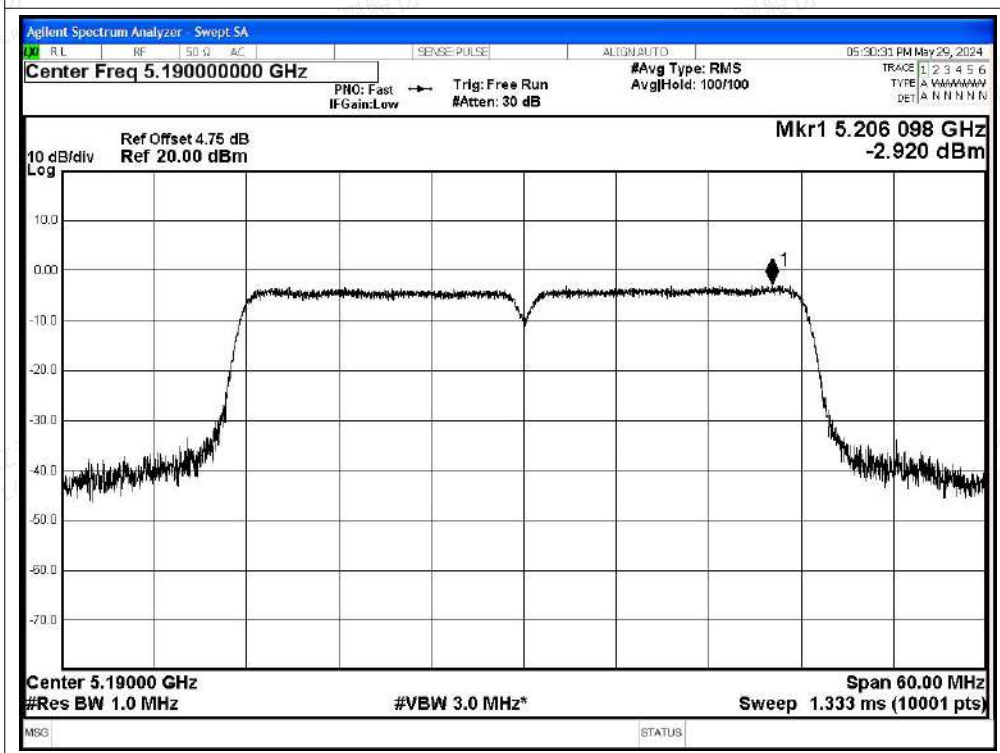

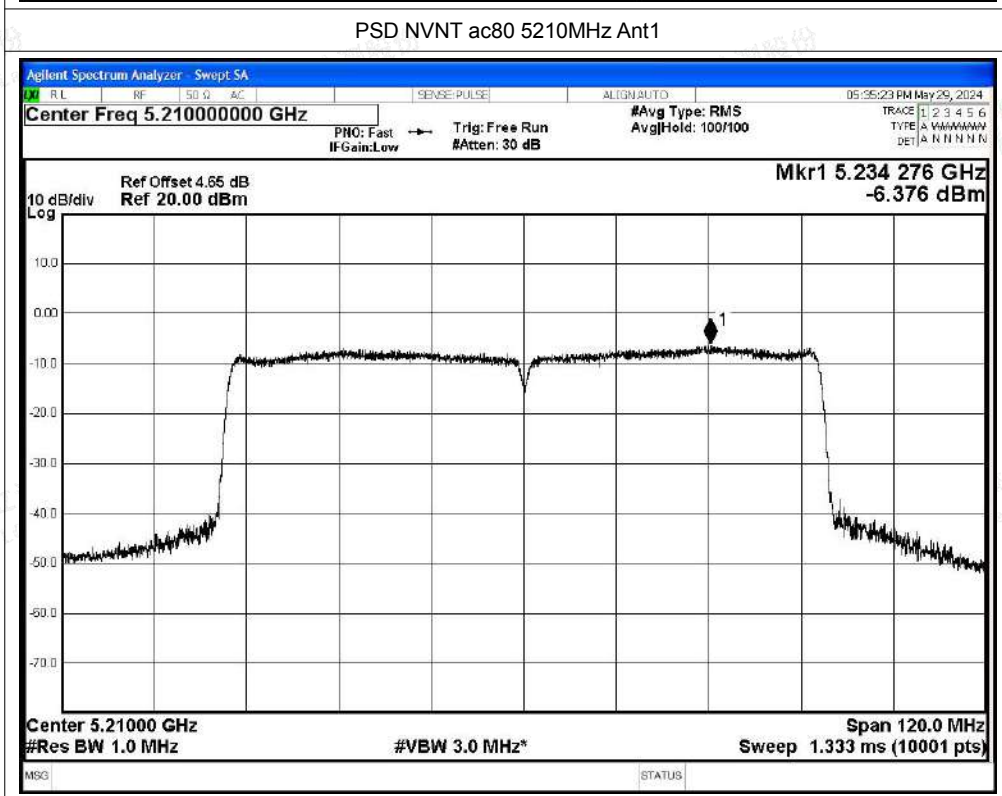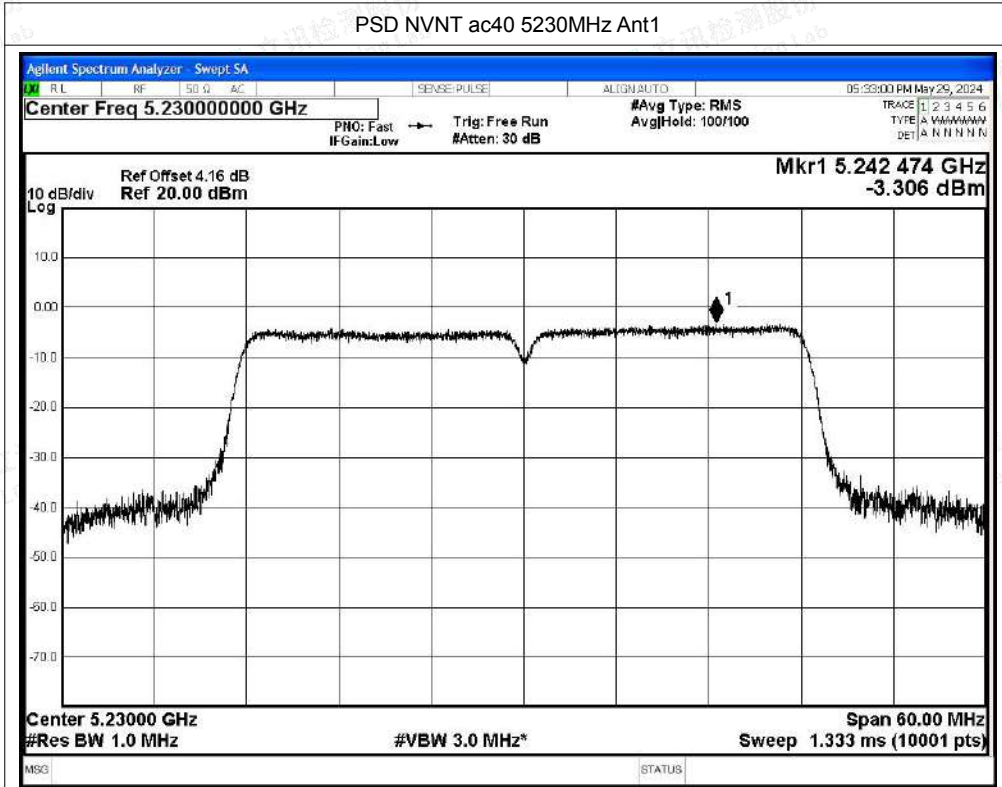



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant2	1.07	0.24	1.31	11	Pass
NVNT	a	5200	Ant2	0.9	0.24	1.14	11	Pass
NVNT	a	5240	Ant2	1.19	0.24	1.43	11	Pass
NVNT	n20	5180	Ant2	0.15	0.28	0.43	11	Pass
NVNT	n20	5200	Ant2	-0.23	0.28	0.05	11	Pass
NVNT	n20	5240	Ant2	0.25	0.28	0.53	11	Pass
NVNT	n40	5190	Ant2	-3.88	0.12	-3.76	11	Pass
NVNT	n40	5230	Ant2	-4.18	0.12	-4.06	11	Pass
NVNT	ac20	5180	Ant2	-0.05	0.28	0.23	11	Pass
NVNT	ac20	5200	Ant2	0.18	0.28	0.46	11	Pass
NVNT	ac20	5240	Ant2	0.18	0.28	0.46	11	Pass
NVNT	ac40	5190	Ant2	-3.92	0.12	-3.8	11	Pass
NVNT	ac40	5230	Ant2	-4.22	0.12	-4.1	11	Pass
NVNT	ac80	5210	Ant2	-7.74	0.25	-7.49	11	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

PSD NVNT a 5180MHz Ant2

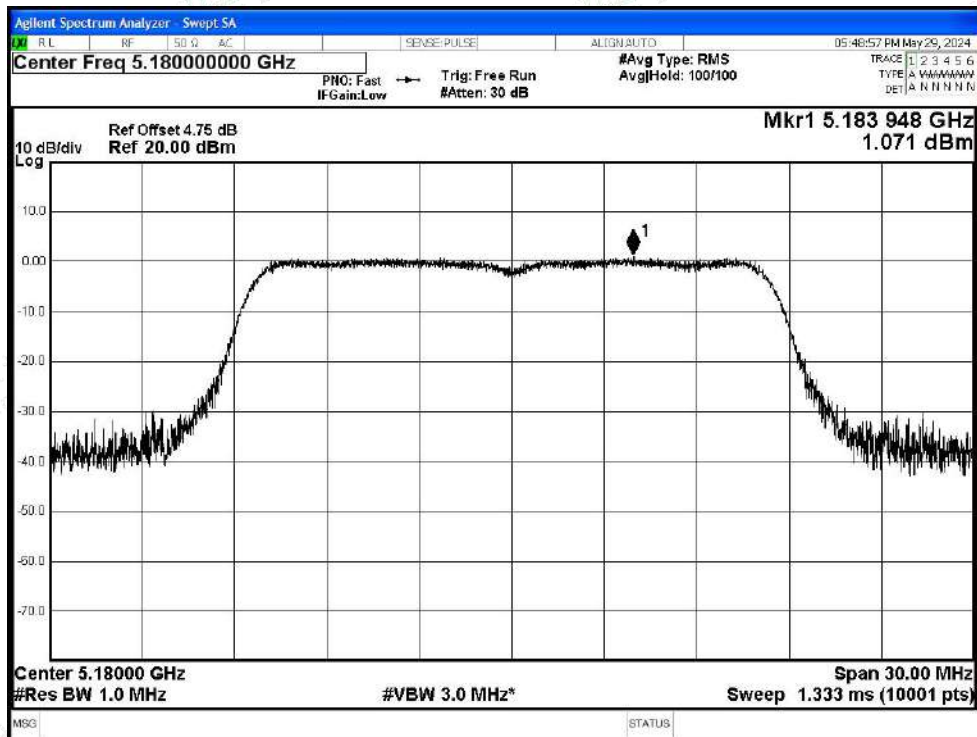


PSD NVNT a 5200MHz Ant2

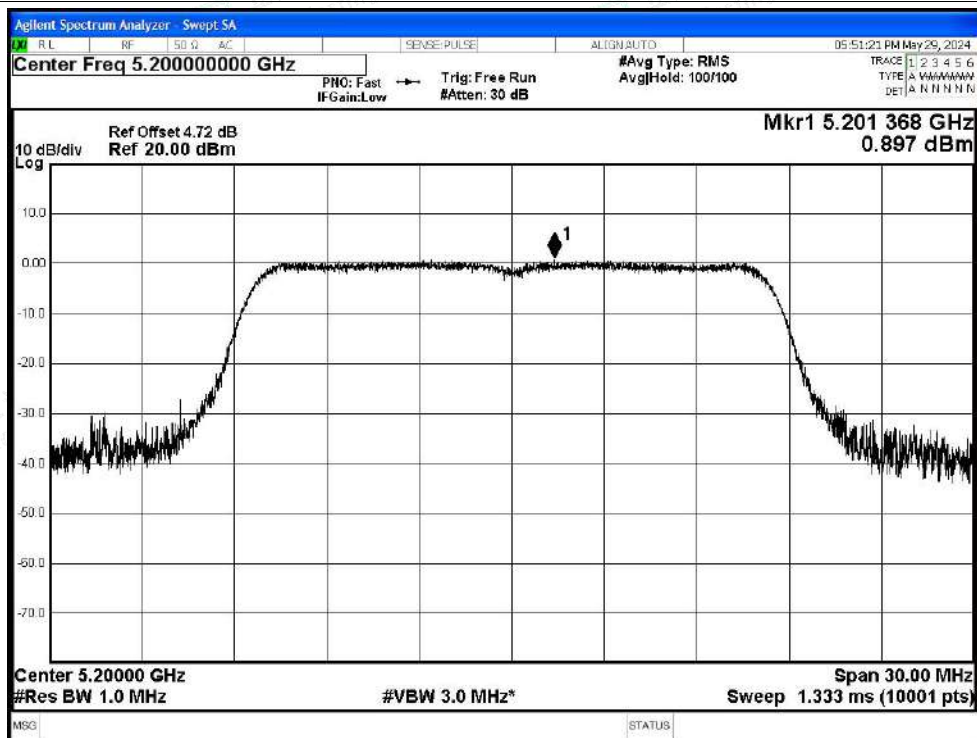








PSD NVNT a 5240MHz Ant2

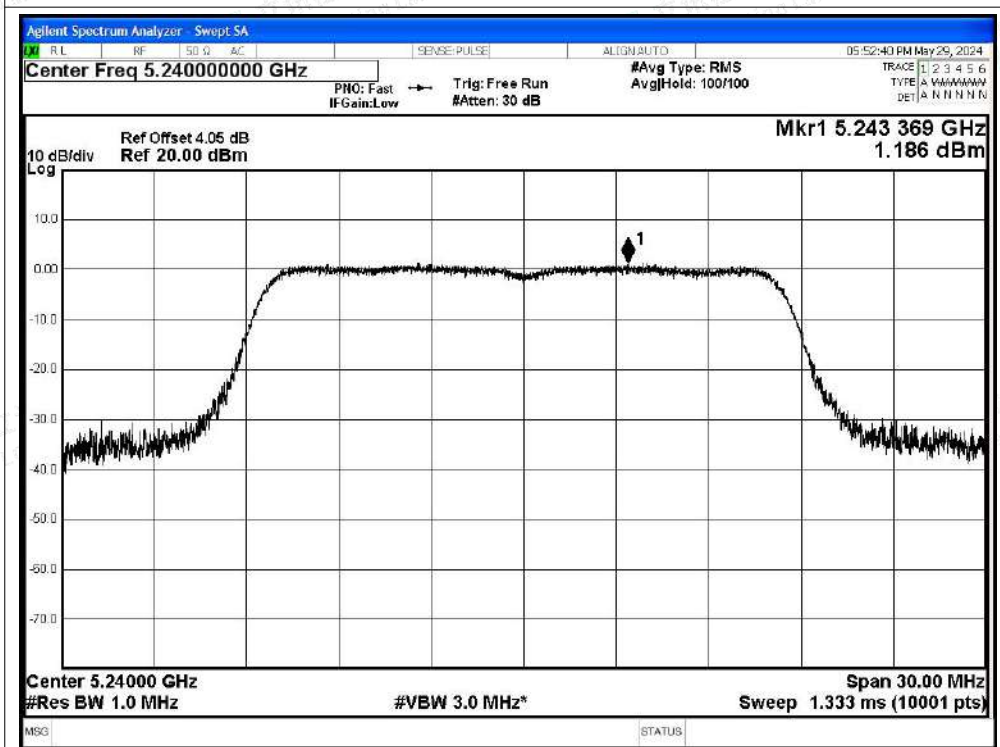

PSD NVNT n20 5180MHz Ant2

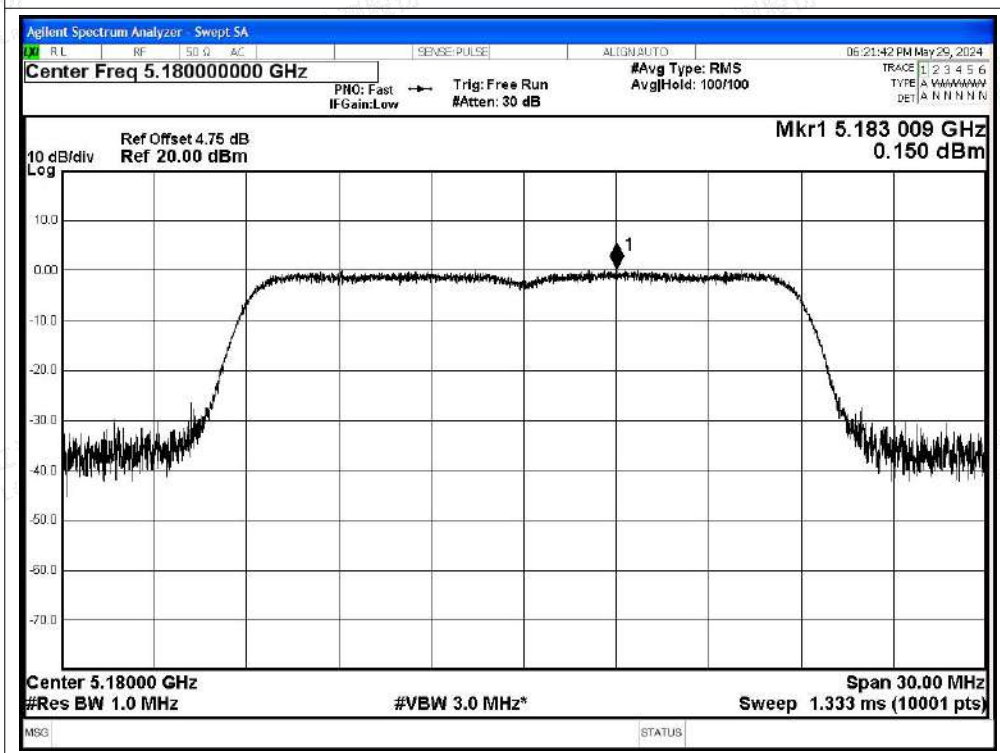


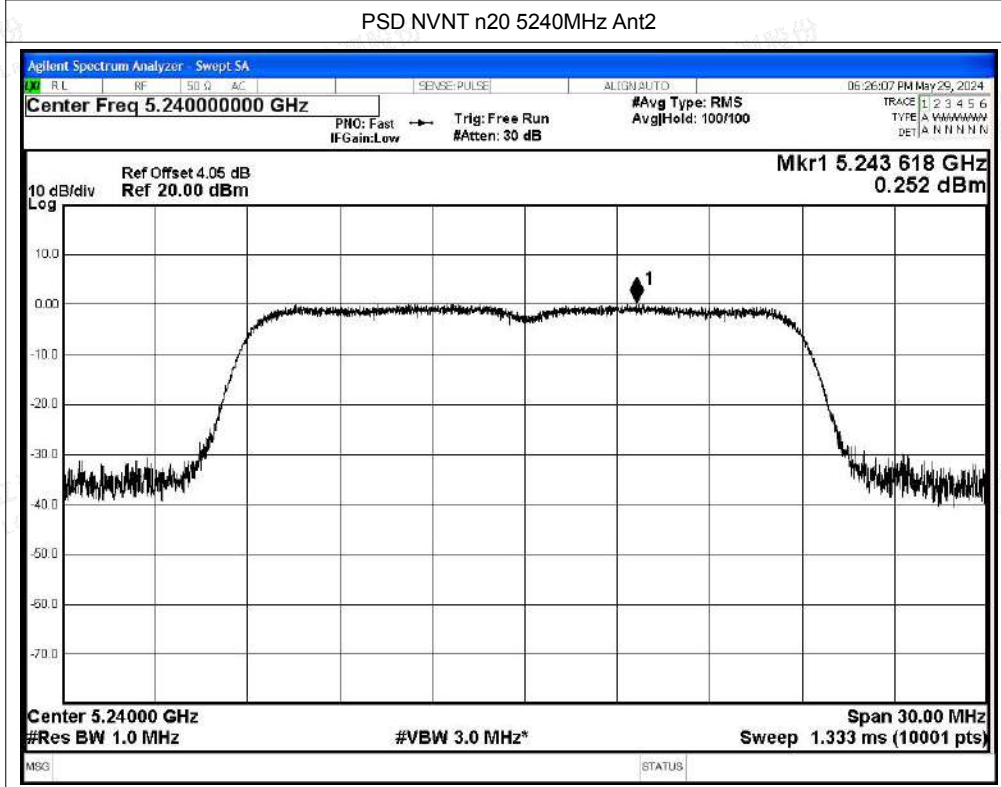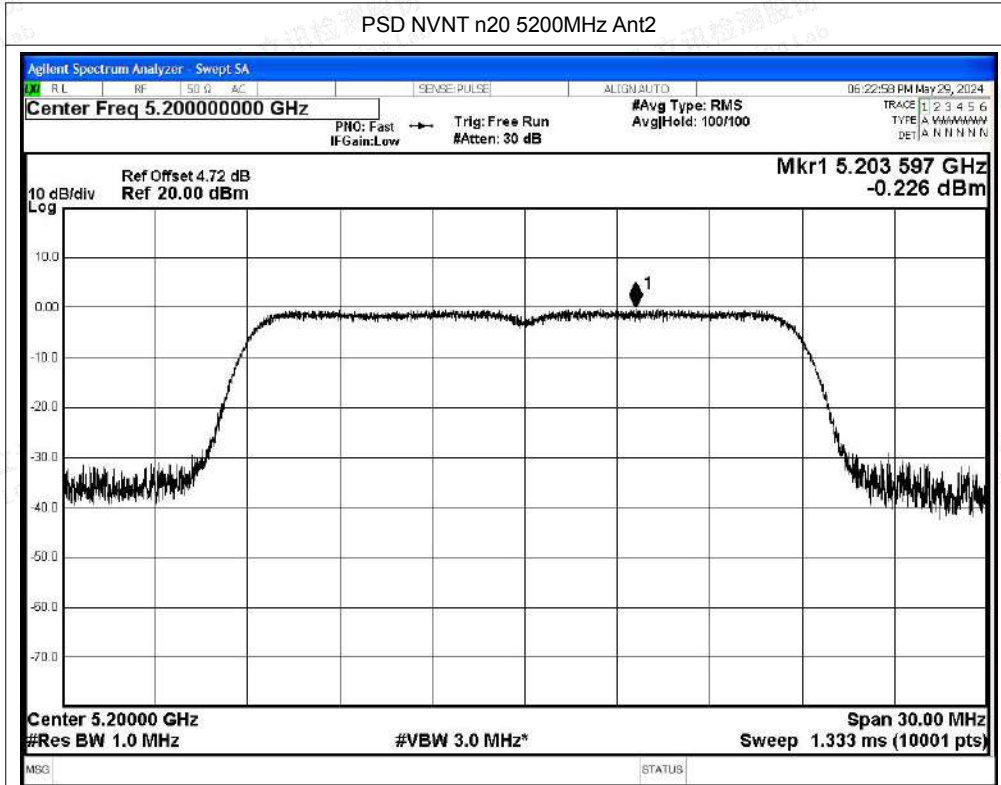

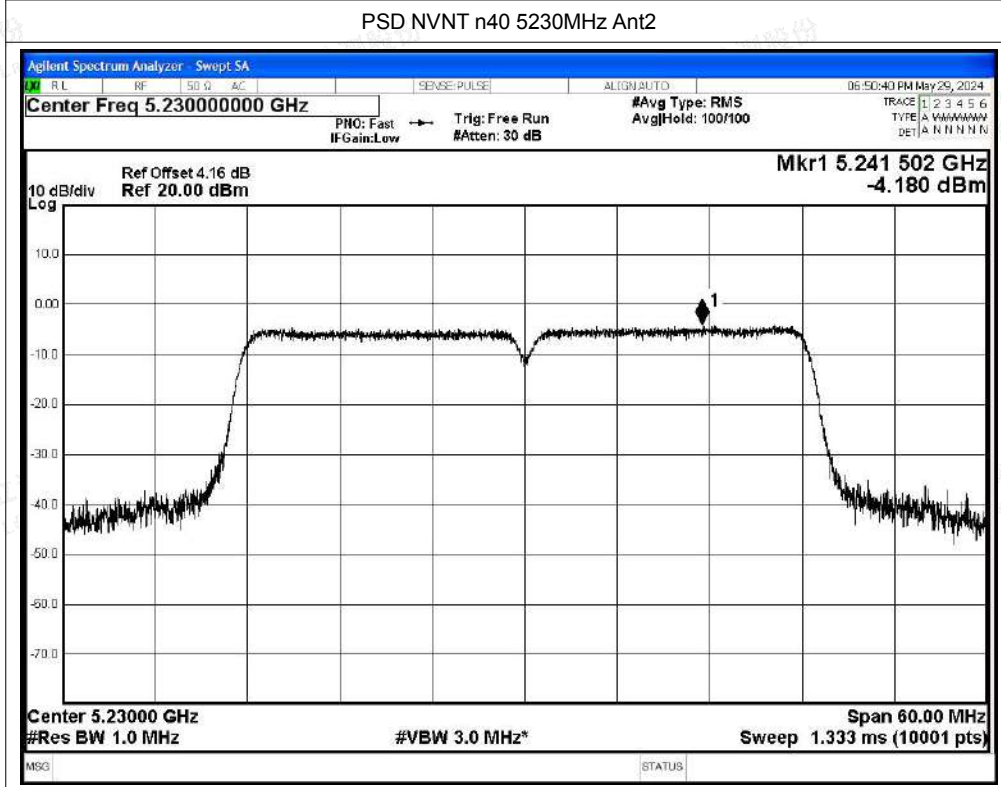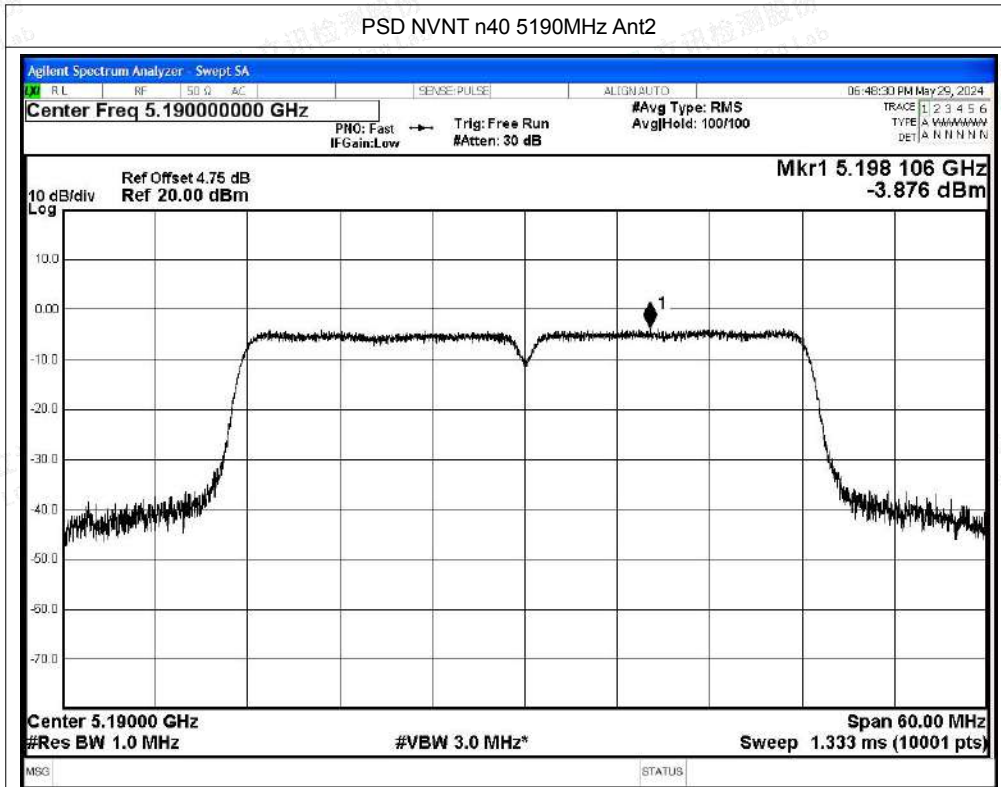




PSD NVNT ac20 5180MHz Ant2

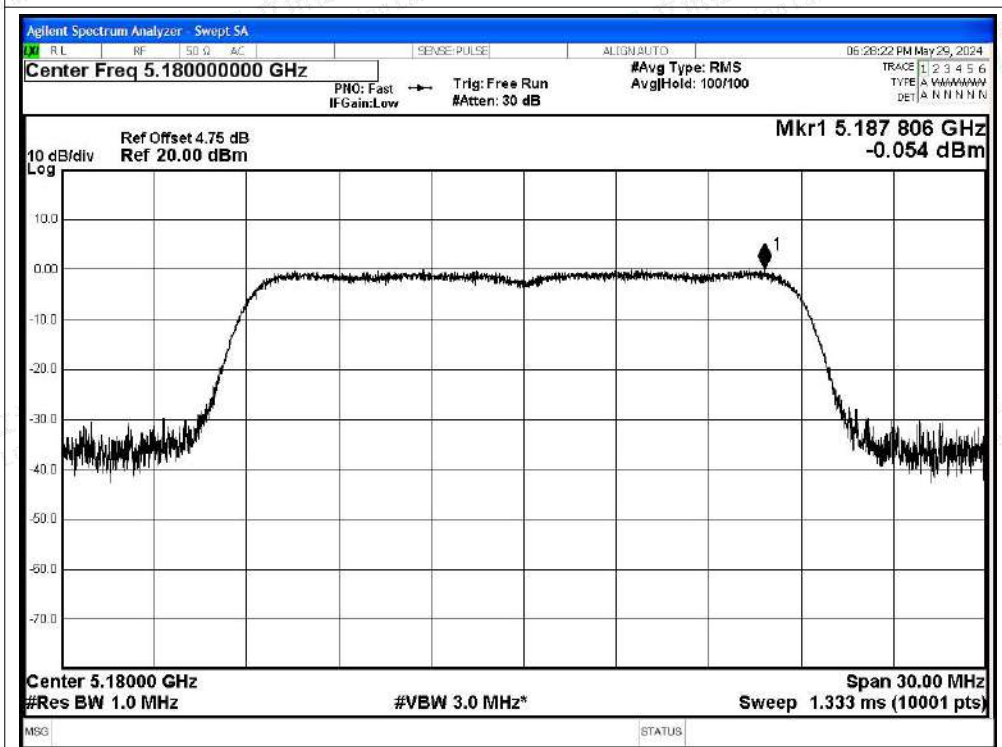


PSD NVNT ac20 5200MHz Ant2

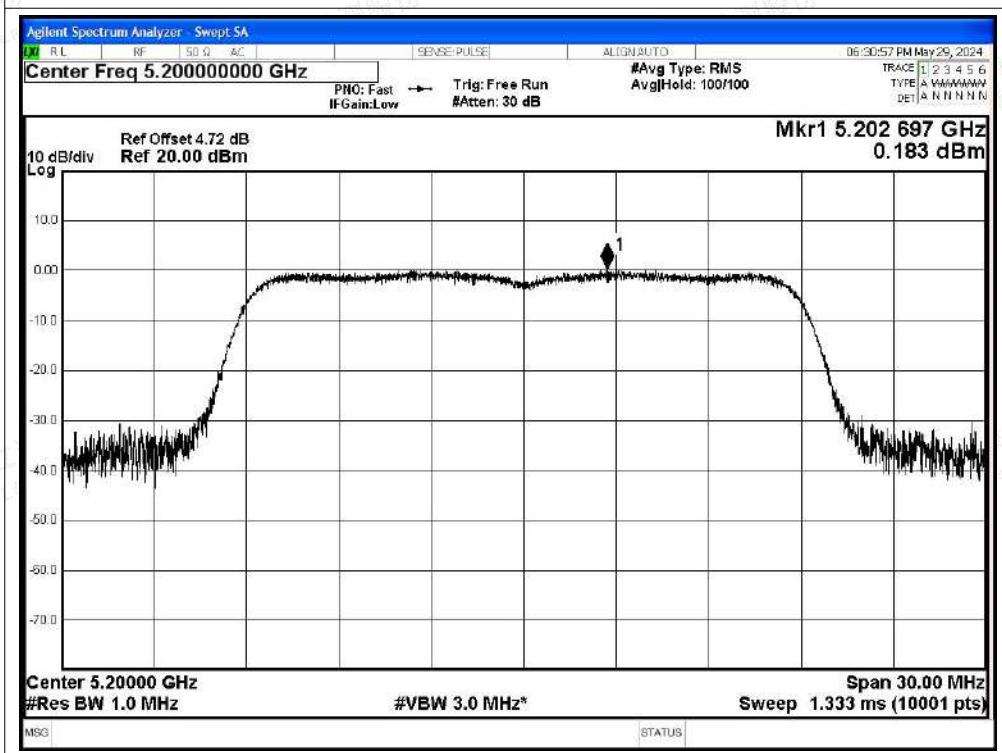




PSD NVNT ac20 5240MHz Ant2

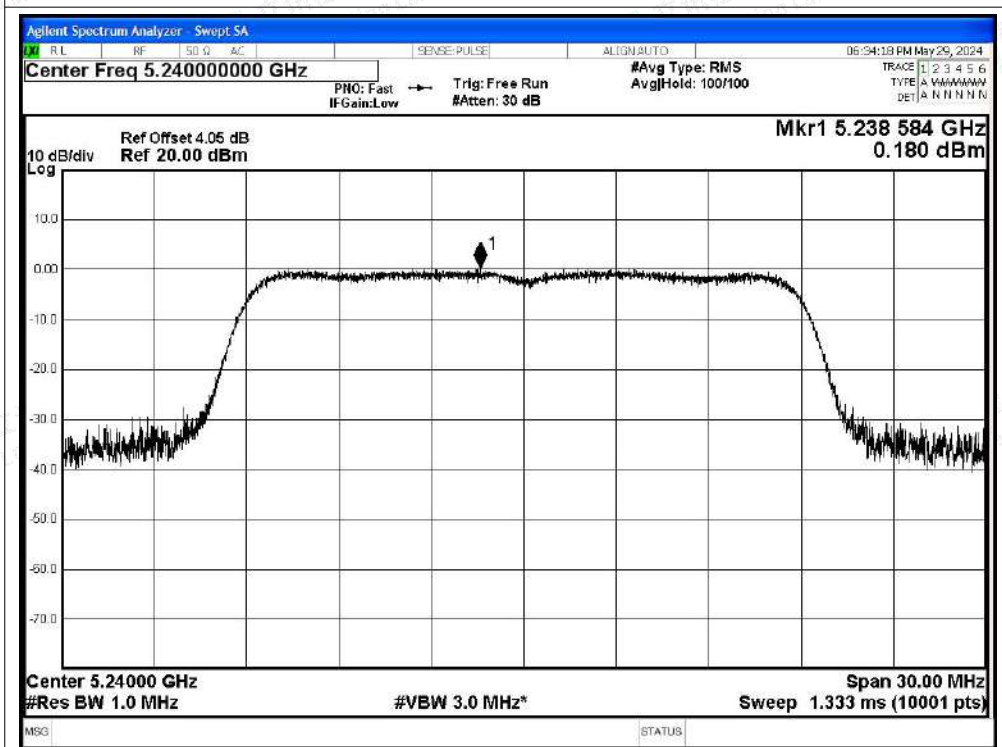


PSD NVNT ac40 5190MHz Ant2

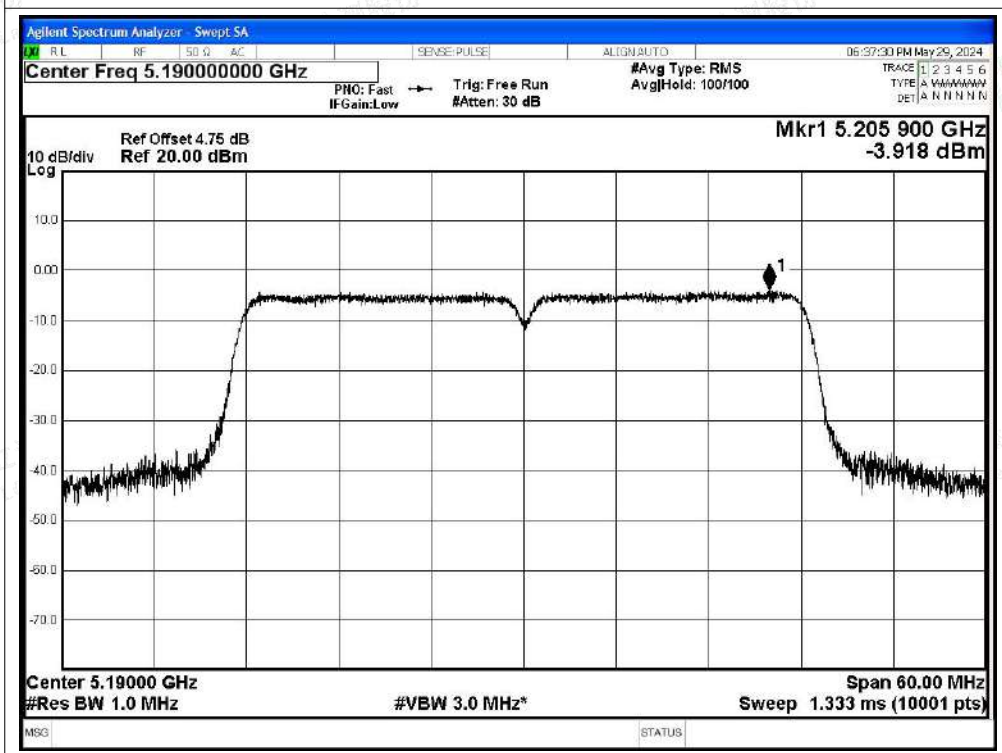




PSD NVNT ac40 5230MHz Ant2

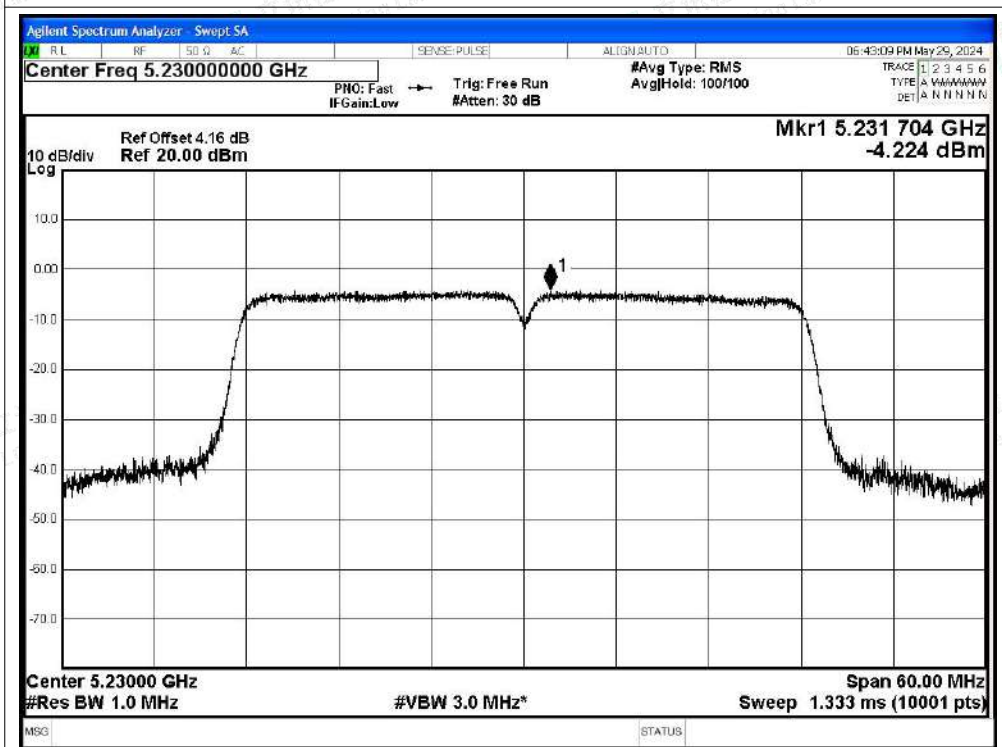

PSD NVNT ac80 5210MHz Ant2

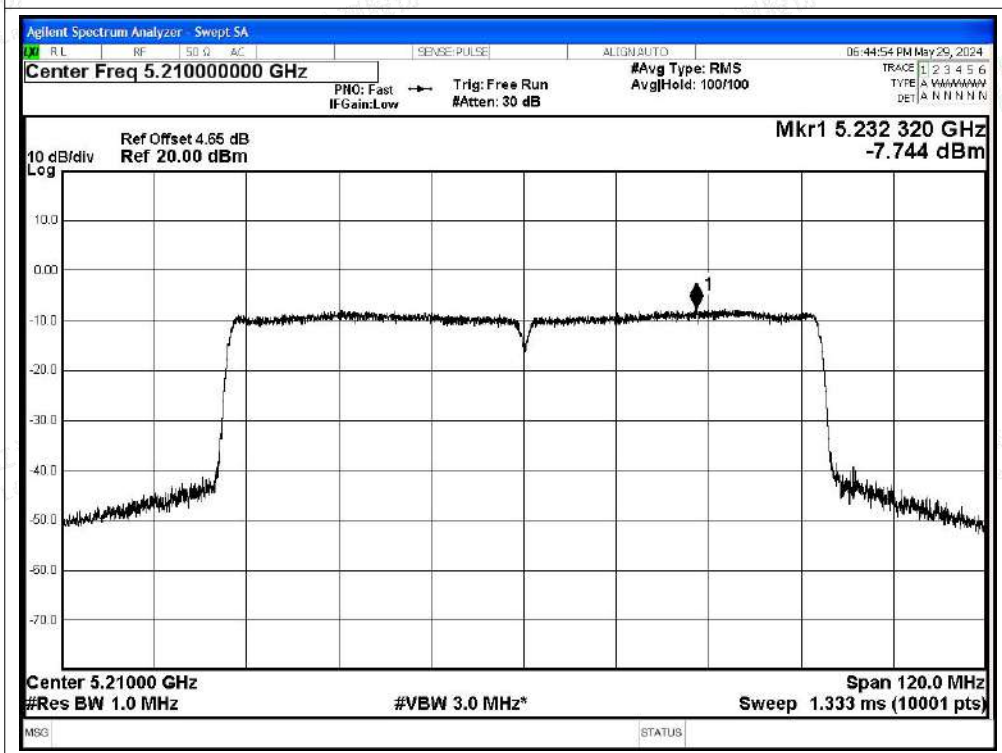



B.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-49.6	2	-	47.66	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-57.51	2	0.24	39.99	Average	54	Pass
NVNT	a	5180	Ant1	5149.6	-42.91	2	-	54.35	Peak	68.2	Pass
NVNT	a	5180	Ant1	5148.9	-53.91	2	0.24	43.59	Average	54	Pass
NVNT	a	5180	Ant1	5150	-44.55	2	-	52.71	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-53.59	2	0.24	43.91	Average	54	Pass
NVNT	a	5240	Ant1	5350	-47.86	2	-	49.4	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-55.64	2	0.24	41.86	Average	54	Pass
NVNT	a	5240	Ant1	5363.28	-45.53	2	-	51.73	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350.8	-55.55	2	0.24	41.95	Average	54	Pass
NVNT	a	5240	Ant1	5460	-47.52	2	-	49.74	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-56.84	2	0.24	40.66	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-48.99	2	-	48.27	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-57.83	2	0.28	39.71	Average	54	Pass
NVNT	n20	5180	Ant1	5149.6	-35.15	2	-	62.11	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-50.42	2	0.28	47.12	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-38.46	2	-	58.8	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-52.34	2	0.28	45.2	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-46.67	2	-	50.59	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-56.81	2	0.28	40.73	Average	54	Pass
NVNT	n20	5240	Ant1	5431.2	-45.81	2	-	51.45	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5372.64	-55.8	2	0.28	41.74	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-49.27	2	-	47.99	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-56.58	2	0.28	40.96	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-48.21	2	-	49.05	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-57.24	2	0.12	40.14	Average	54	Pass
NVNT	n40	5190	Ant1	5146.78	-39.82	2	-	57.44	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5148.97	-52.04	2	0.12	45.34	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-41.69	2	-	55.57	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-52.52	2	0.12	44.86	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-49.56	2	-	47.7	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-56.35	2	0.12	41.03	Average	54	Pass
NVNT	n40	5230	Ant1	5447.58	-46.45	2	-	50.81	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5374.14	-55.92	2	0.12	41.46	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-48.71	2	-	48.55	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity



NVNT	n40	5230	Ant1	5460	-56.71	2	0.12	40.67	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-50.22	2	-	47.04	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-56.63	2	0.28	40.91	Average	54	Pass
NVNT	ac20	5180	Ant1	5147.5	-39.97	2	-	57.29	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5149.6	-52.57	2	0.28	44.97	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-40.74	2	-	56.52	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-51.37	2	0.28	46.17	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-48.44	2	-	48.82	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-55.67	2	0.28	41.87	Average	54	Pass
NVNT	ac20	5240	Ant1	5377.2	-46.08	2	-	51.18	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350.08	-55.67	2	0.28	41.87	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-50.22	2	-	47.04	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-56.82	2	0.28	40.72	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-48.87	2	-	48.39	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-57.15	2	0.12	40.23	Average	54	Pass
NVNT	ac40	5190	Ant1	5146.05	-38.25	2	-	59.01	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5148.97	-54.1	2	0.12	43.28	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-42.77	2	-	54.49	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-54.2	2	0.12	43.18	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-48.28	2	-	48.98	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-56.26	2	0.12	41.12	Average	54	Pass
NVNT	ac40	5230	Ant1	5403.84	-46.01	2	-	51.25	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5374.95	-55.99	2	0.12	41.39	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-49.46	2	-	47.8	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-56.82	2	0.12	40.56	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-48.64	2	-	48.62	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-56.94	2	0.25	40.57	Average	54	Pass
NVNT	ac80	5210	Ant1	5419.08	-45.37	2	-	51.89	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5456.37	-55.58	2	0.25	41.93	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-48.15	2	-	49.11	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-56.56	2	0.25	40.95	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-48.45	2	-	48.81	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-57.28	2	0.25	40.23	Average	54	Pass
NVNT	ac80	5210	Ant1	5147.8	-42.86	2	-	54.4	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5146.22	-53.46	2	0.25	44.05	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-43.47	2	-	53.79	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-53.71	2	0.25	43.8	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
 Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
 Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
 Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

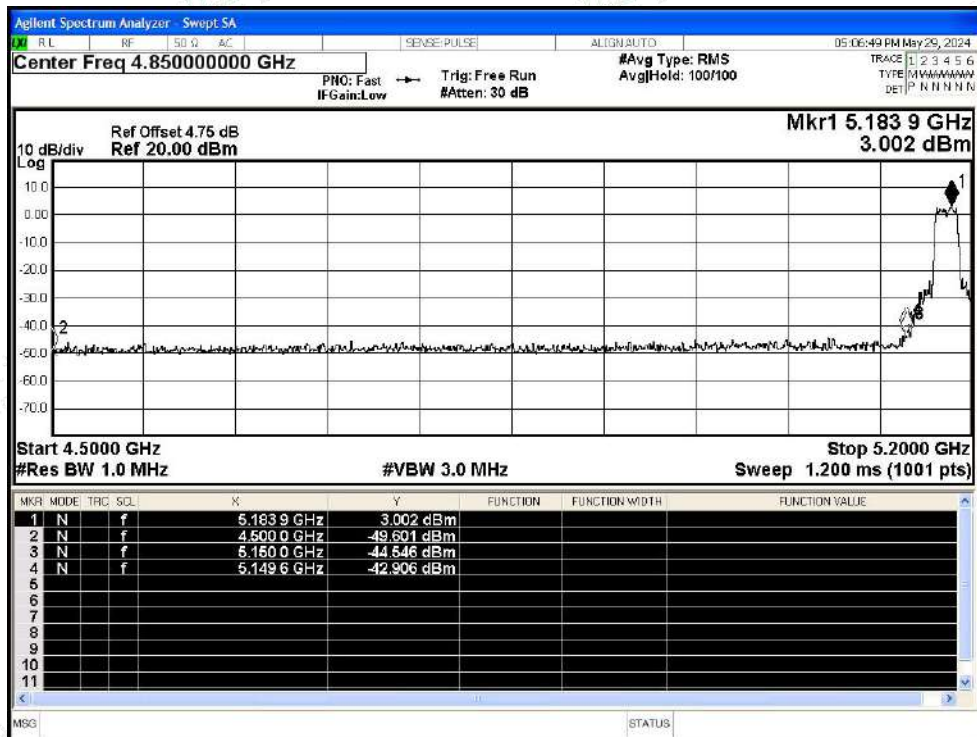


Restrict Band NVNT a 5180MHz Ant1 Average

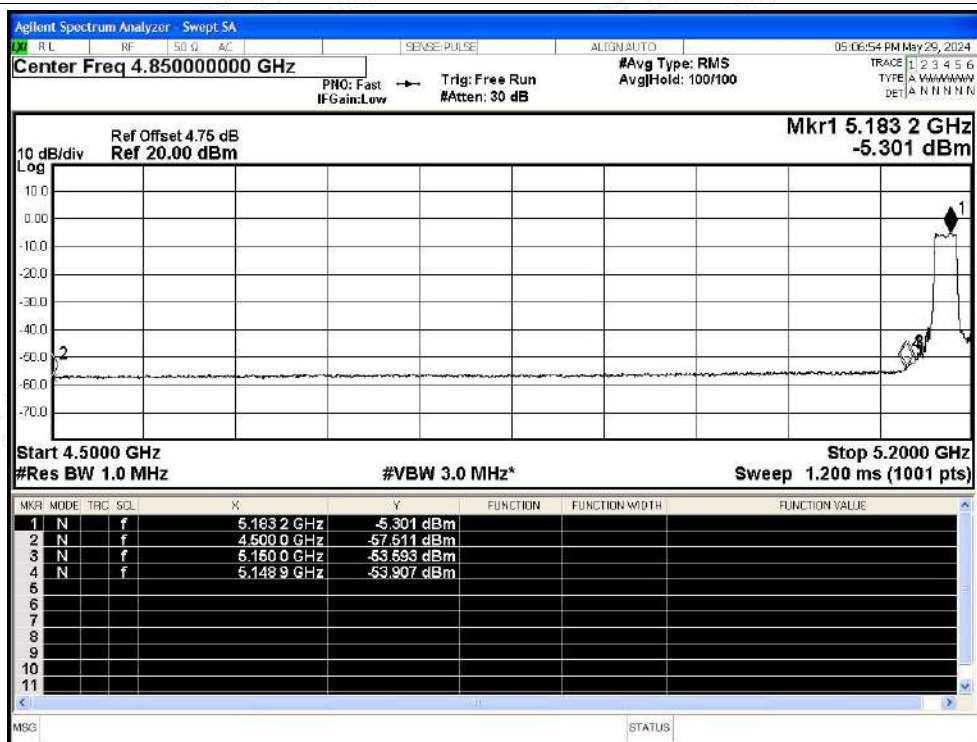




Restrict Band NVNT a 5240MHz Ant1 Peak

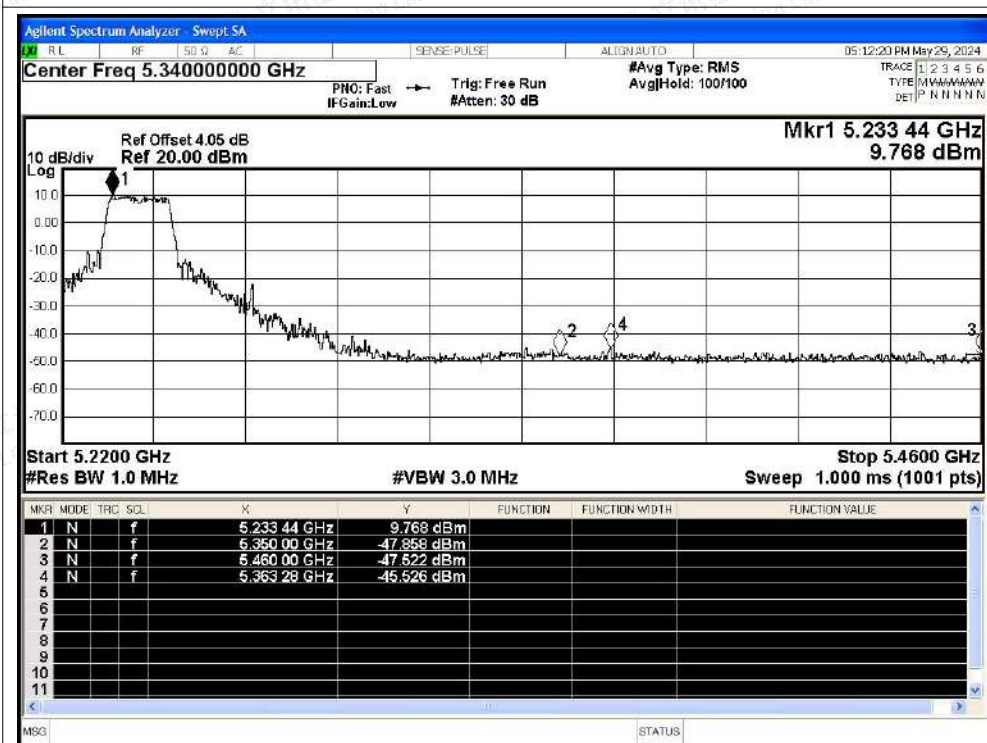


Restrict Band NVNT a 5240MHz Ant1 Average

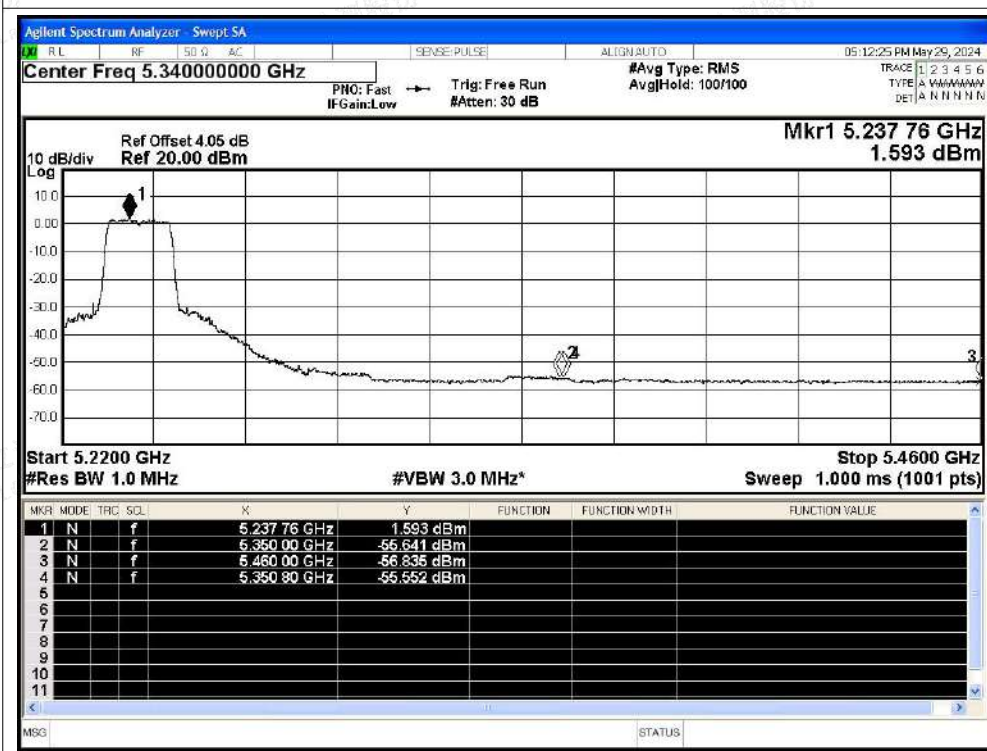




Restrict Band NVNT n20 5180MHz Ant1 Peak

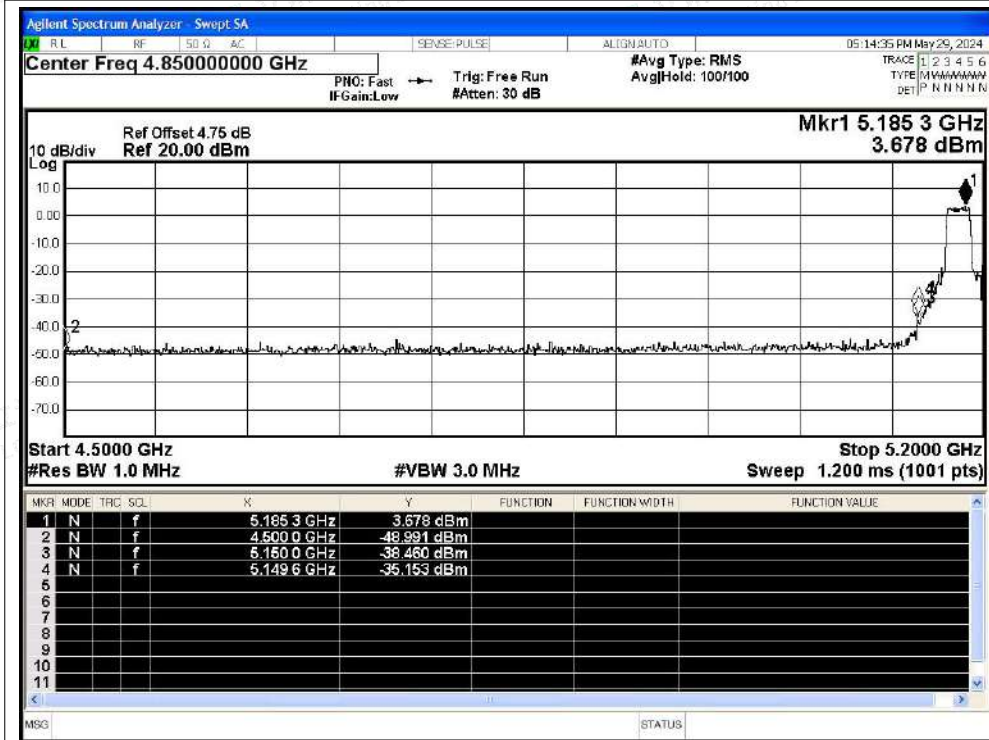


Restrict Band NVNT n20 5180MHz Ant1 Average

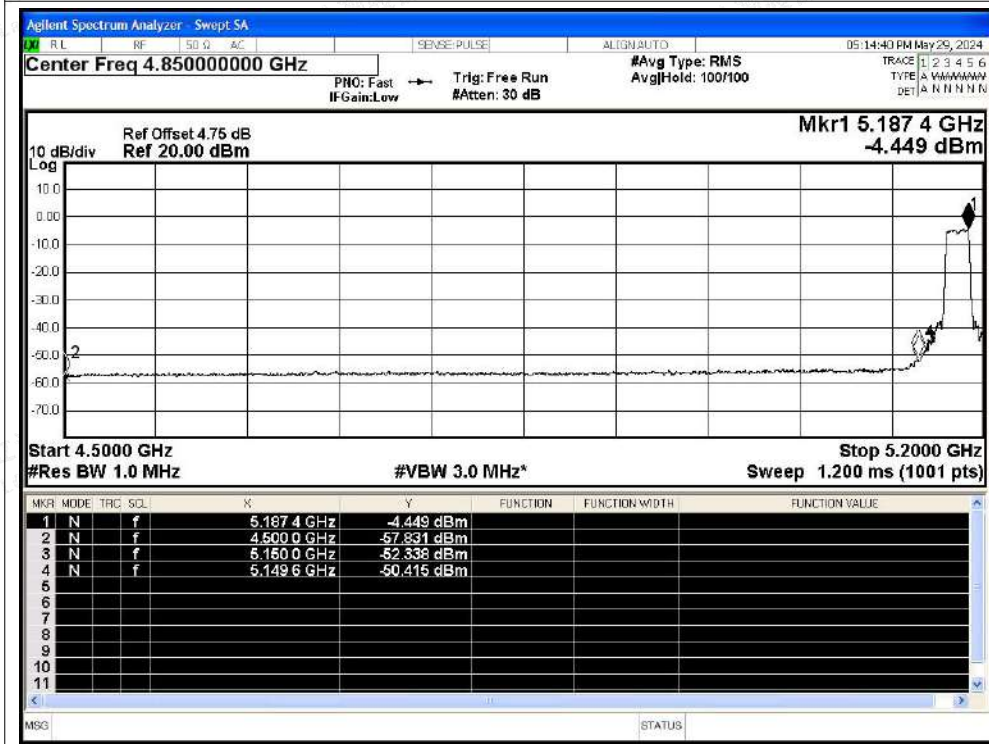




Restrict Band NVNT n20 5240MHz Ant1 Peak

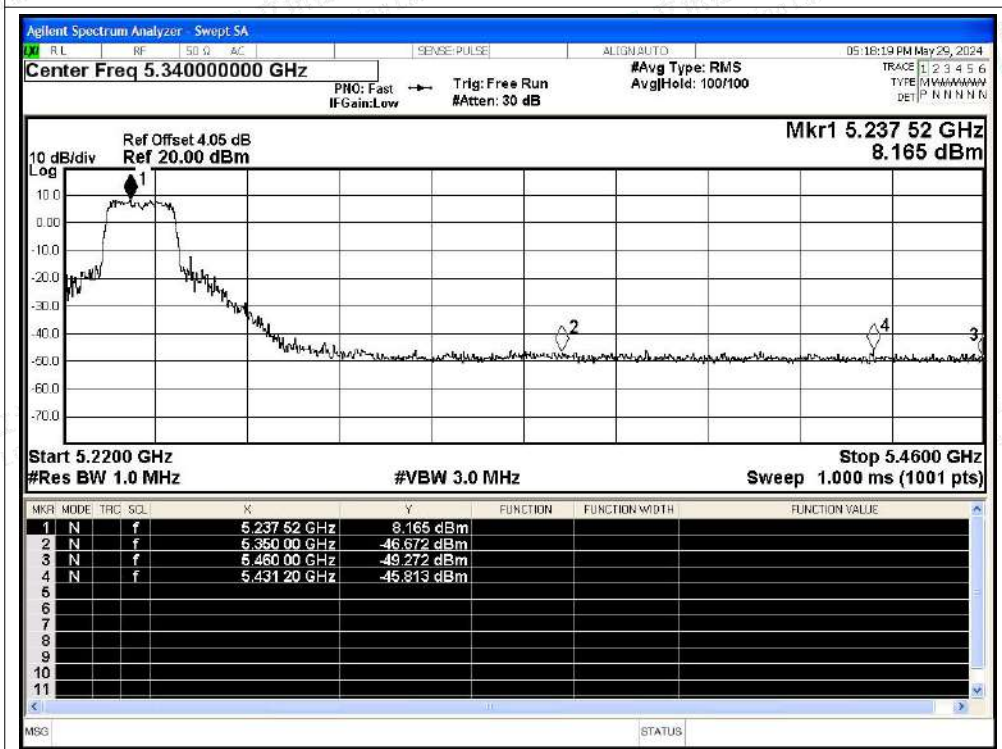


Restrict Band NVNT n20 5240MHz Ant1 Average

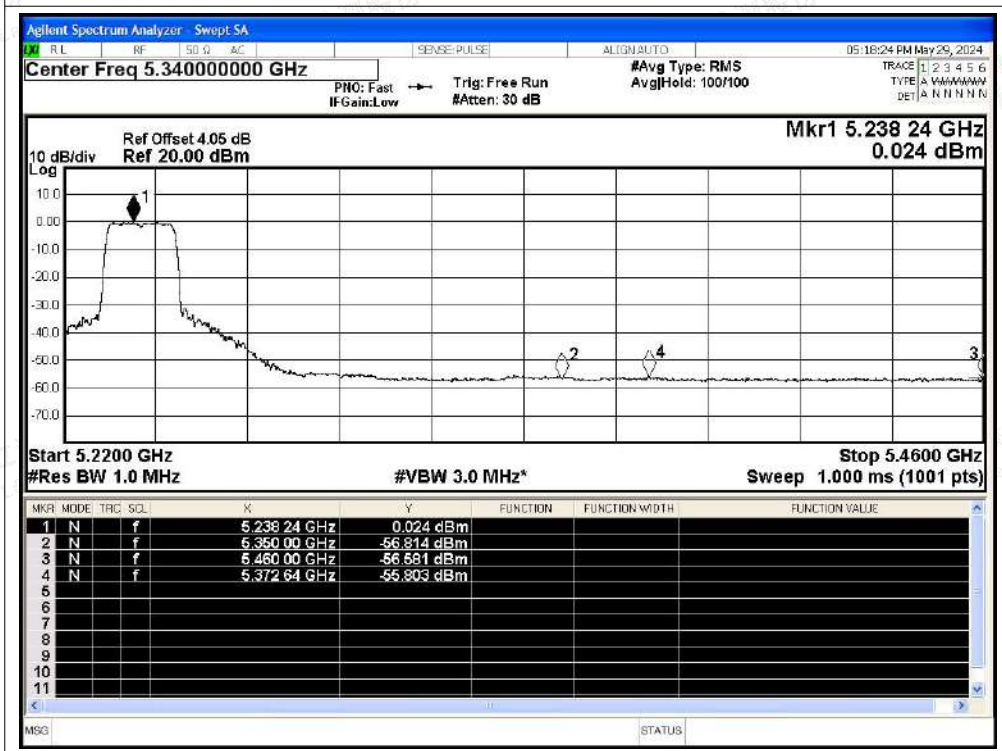




Restrict Band NVNT n40 5190MHz Ant1 Peak

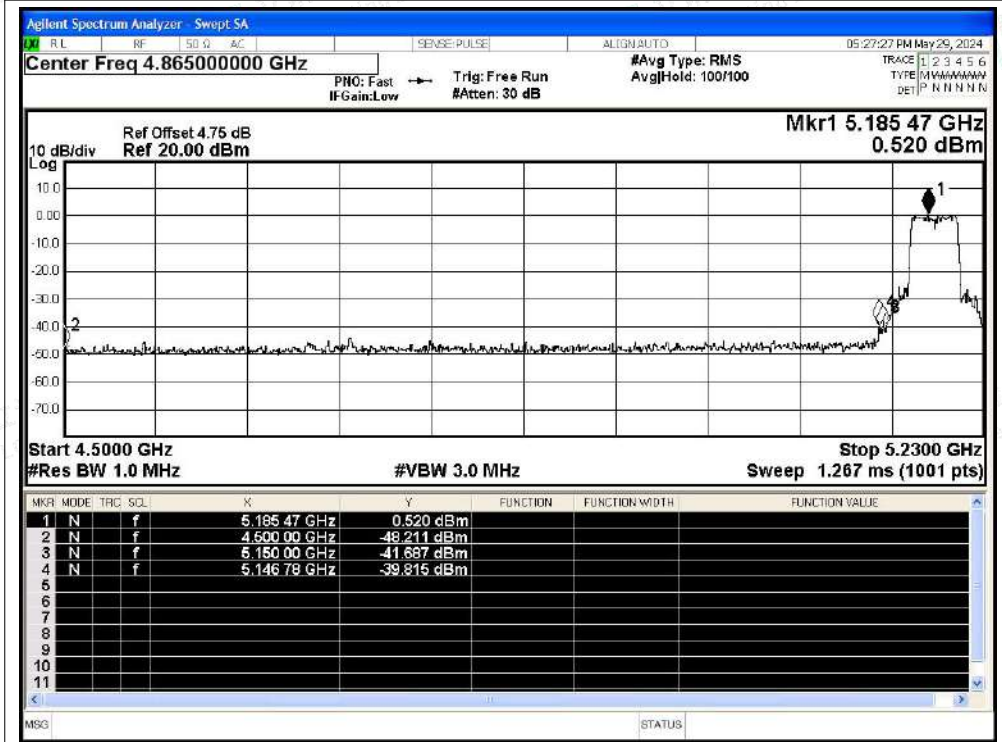


Restrict Band NVNT n40 5190MHz Ant1 Average

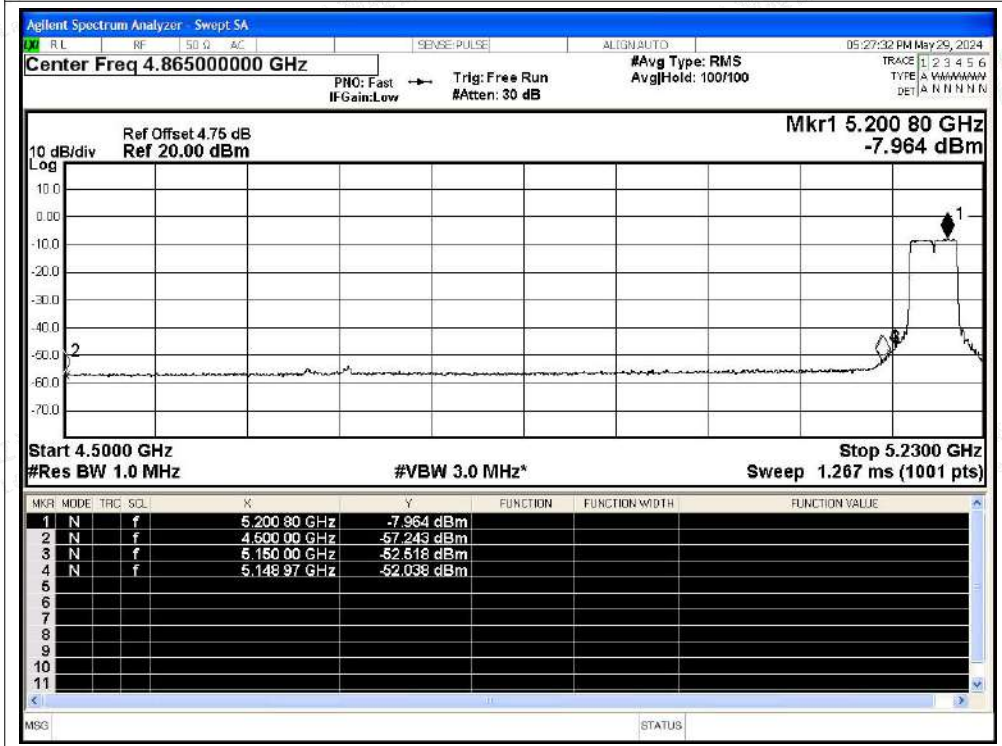




Restrict Band NVNT n40 5230MHz Ant1 Peak

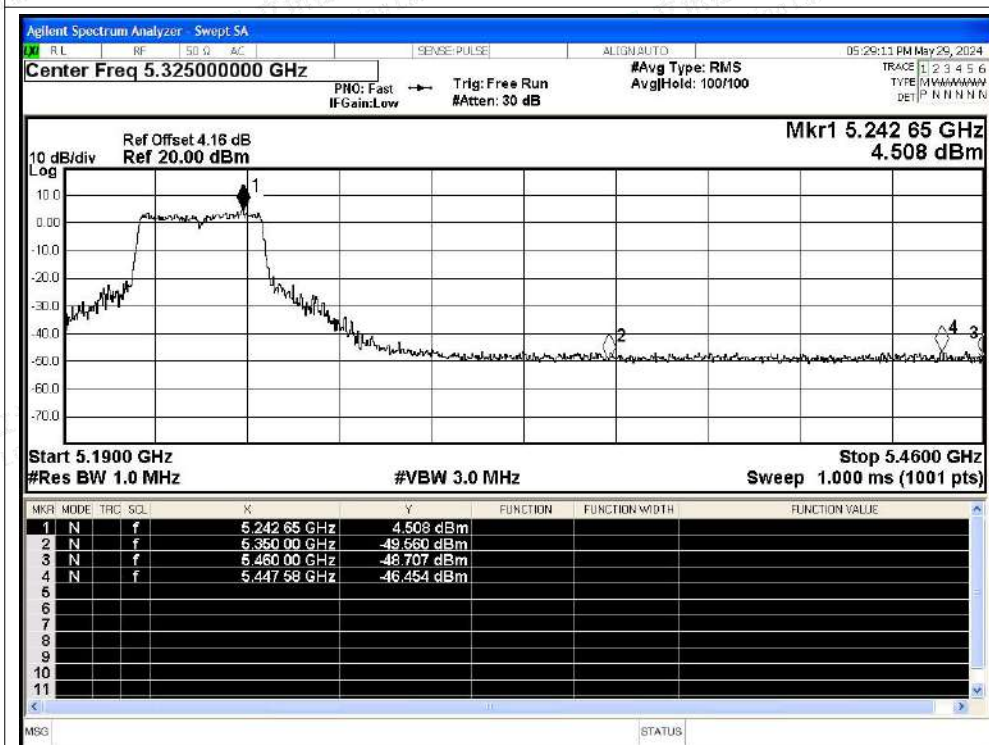


Restrict Band NVNT n40 5230MHz Ant1 Average

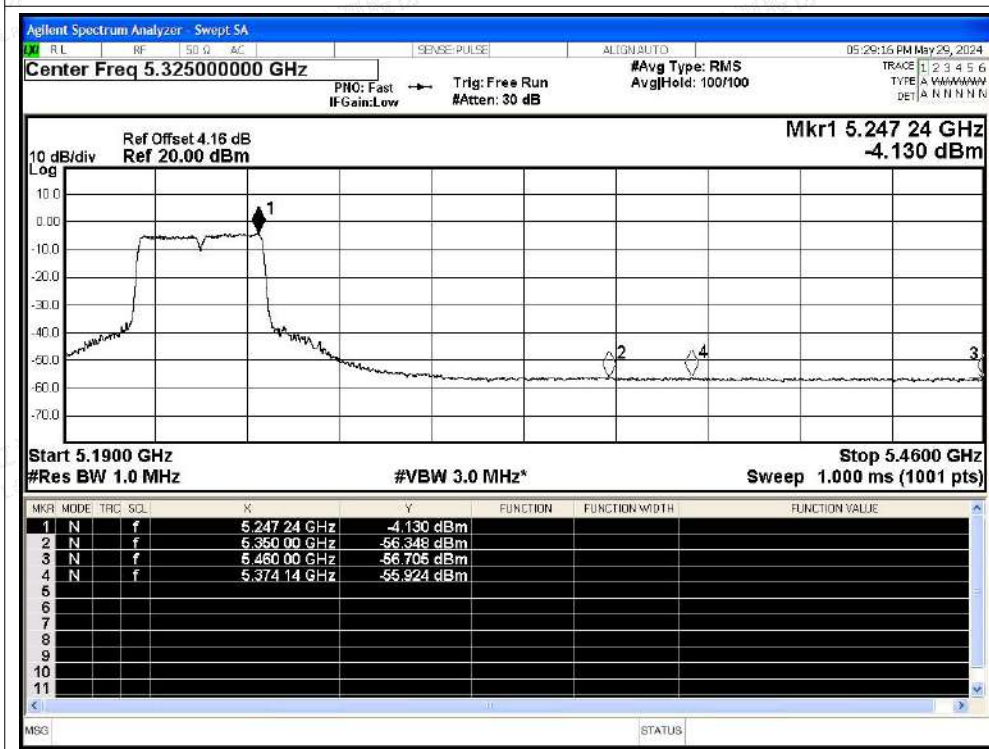




Restrict Band NVNT ac20 5180MHz Ant1 Peak

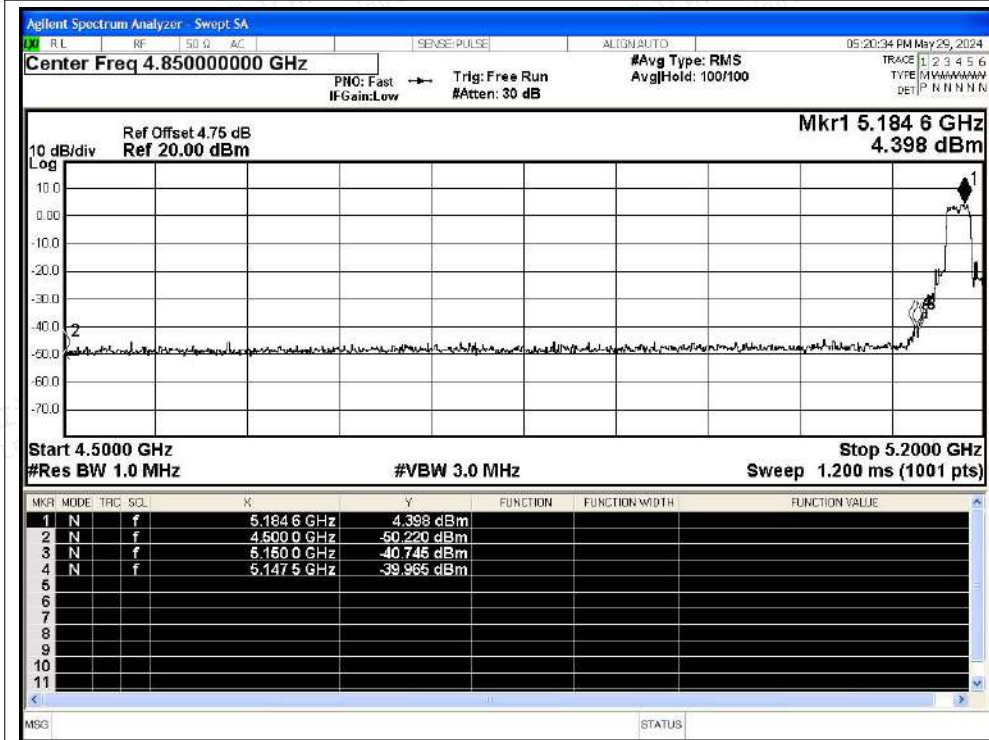


Restrict Band NVNT ac20 5180MHz Ant1 Average

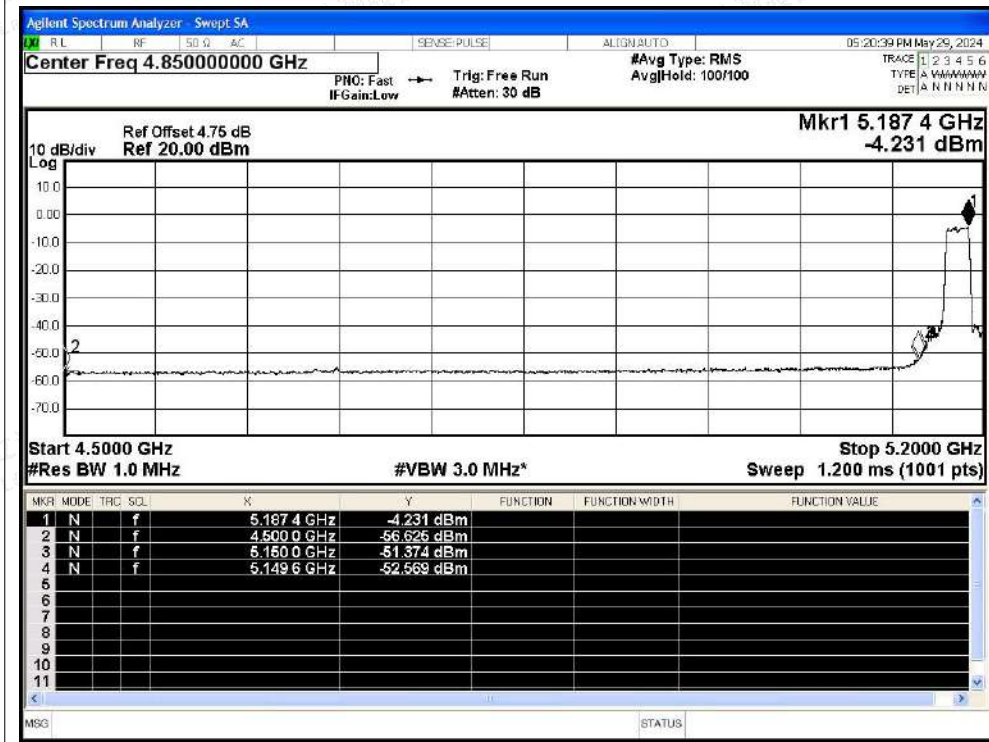




Restrict Band NVNT ac20 5240MHz Ant1 Peak

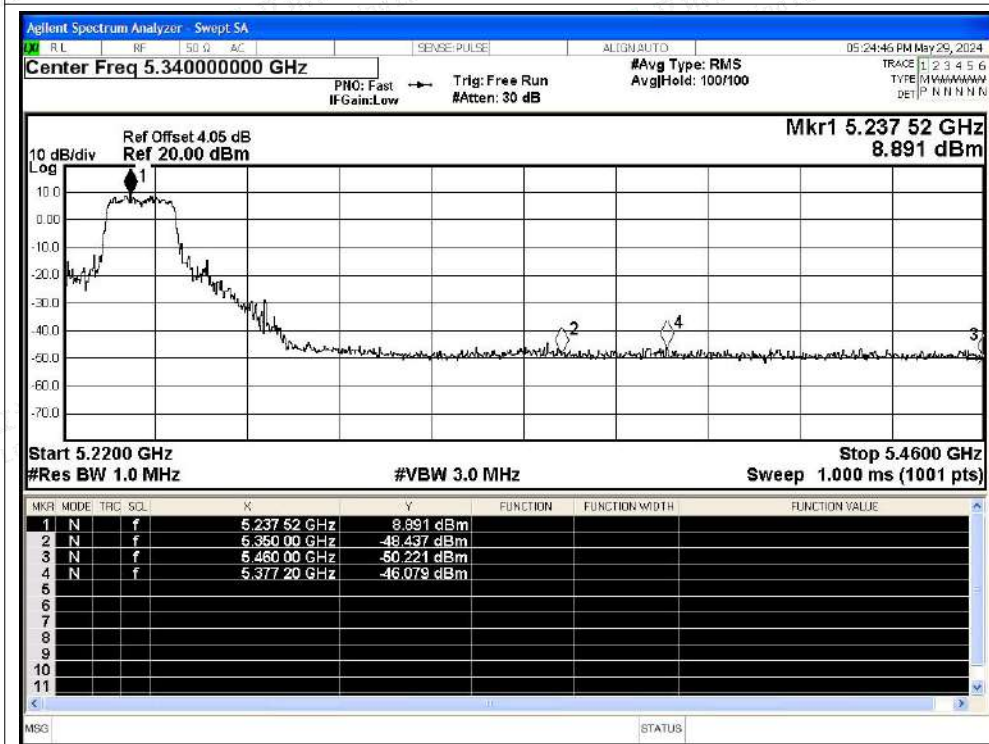


Restrict Band NVNT ac20 5240MHz Ant1 Average

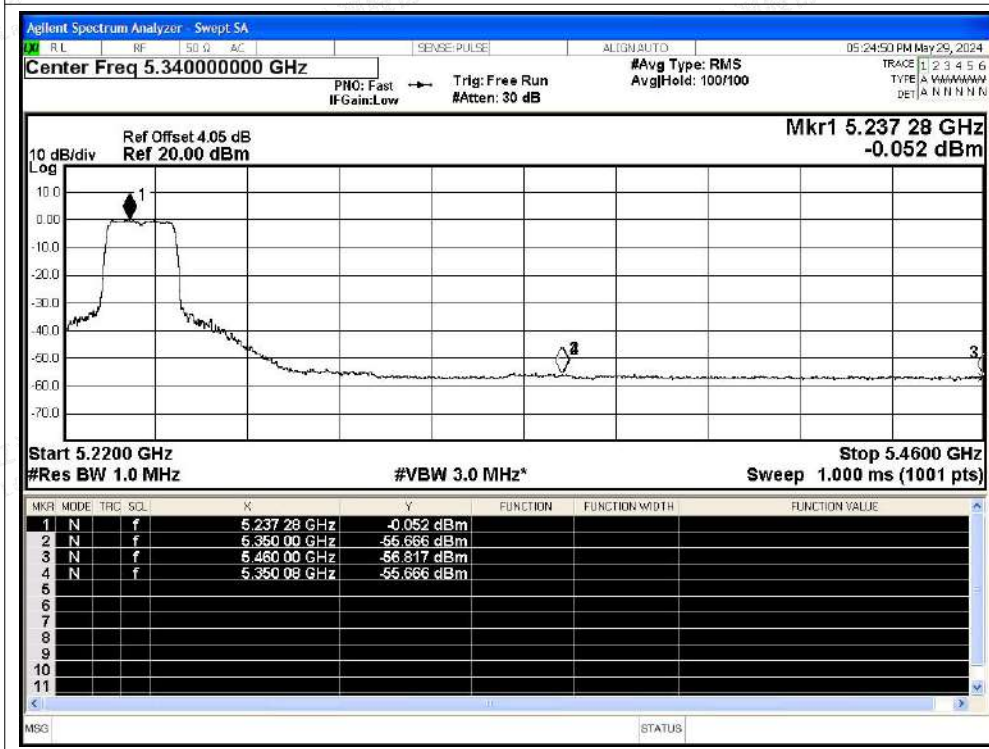




Restrict Band NVNT ac40 5190MHz Ant1 Peak

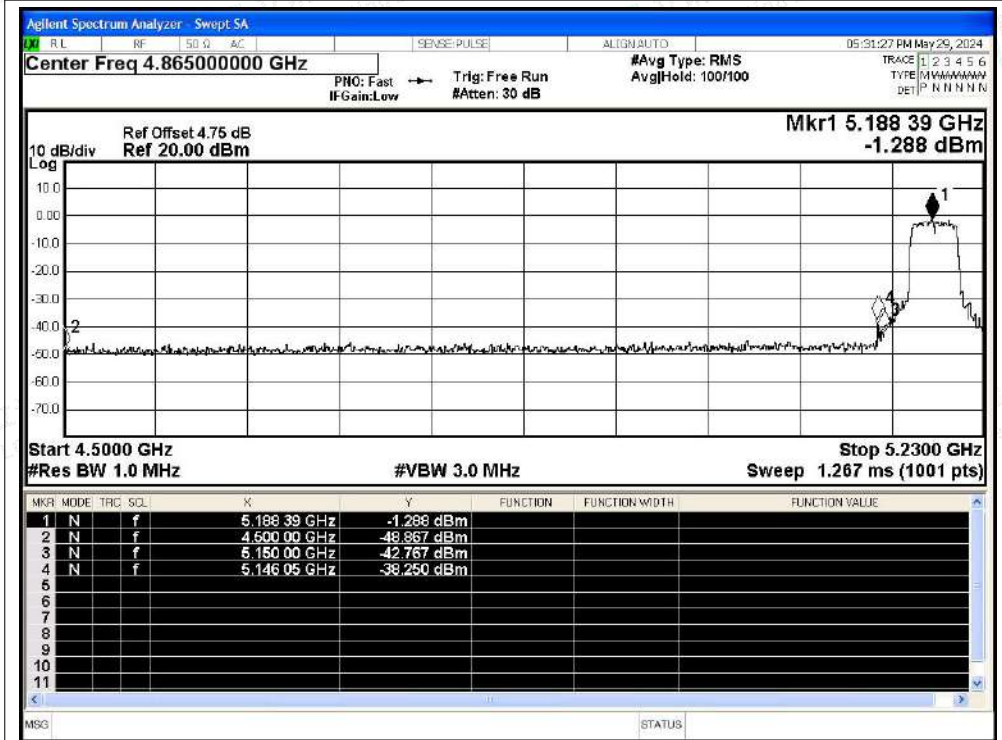


Restrict Band NVNT ac40 5190MHz Ant1 Average

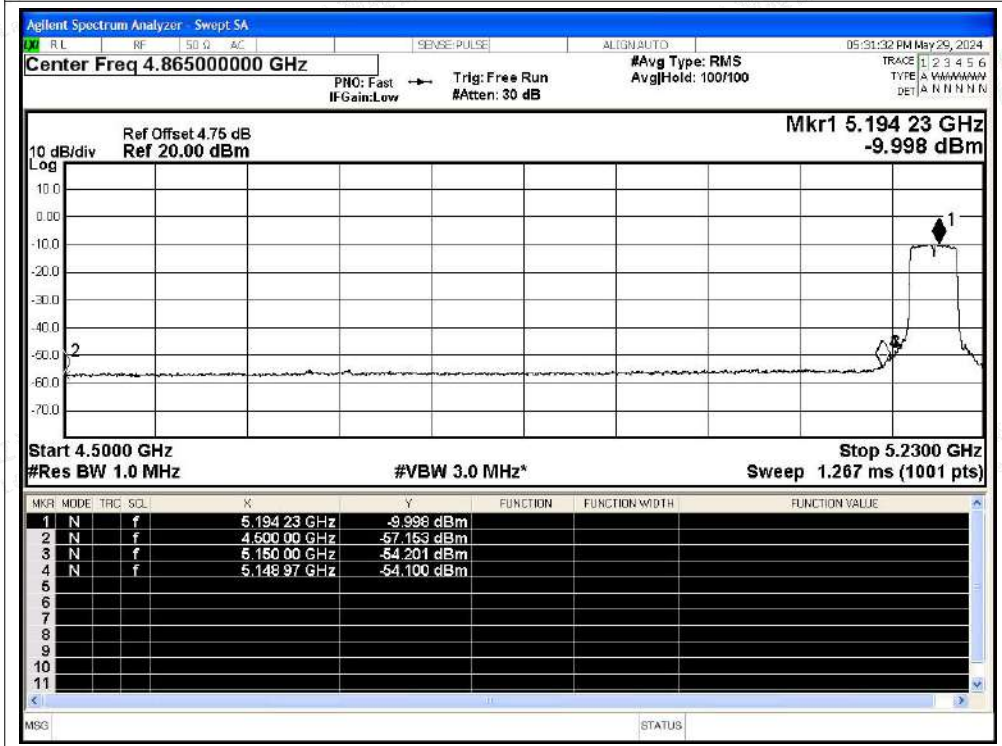




Restrict Band NVNT ac40 5230MHz Ant1 Peak

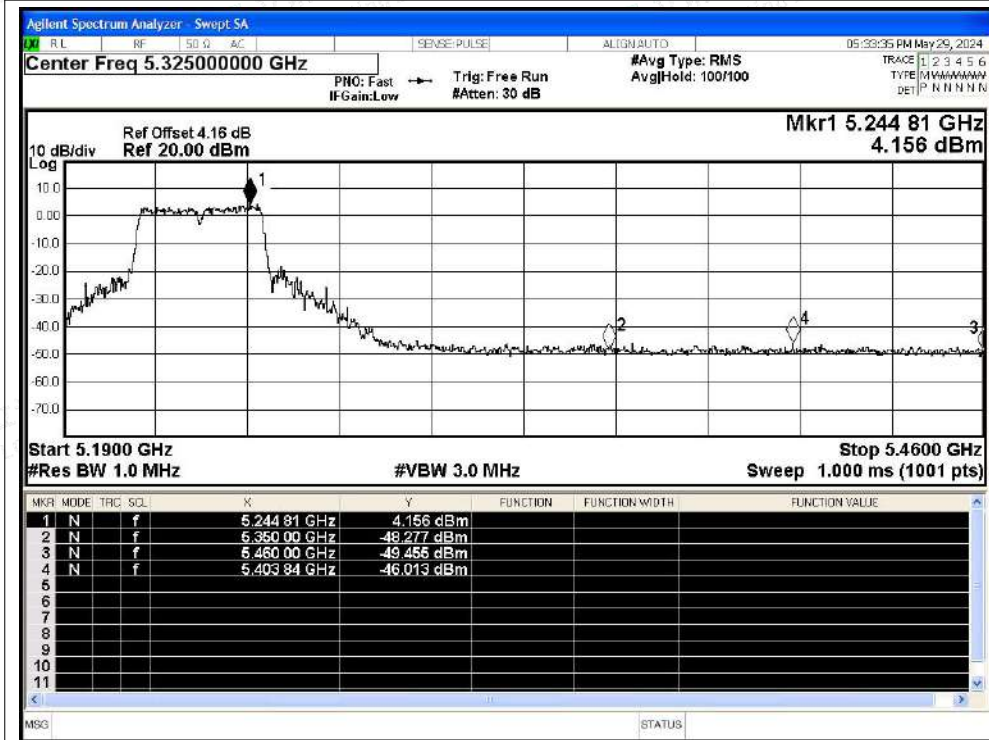


Restrict Band NVNT ac40 5230MHz Ant1 Average

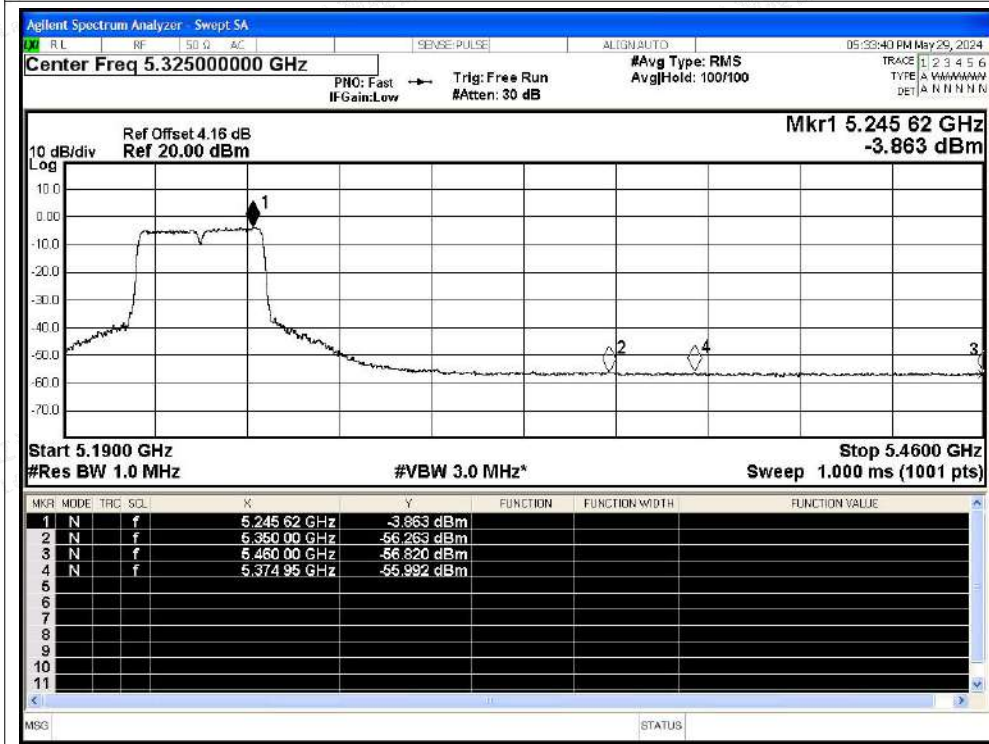




Restrict Band NVNT ac80 5210MHz Ant1 Peak

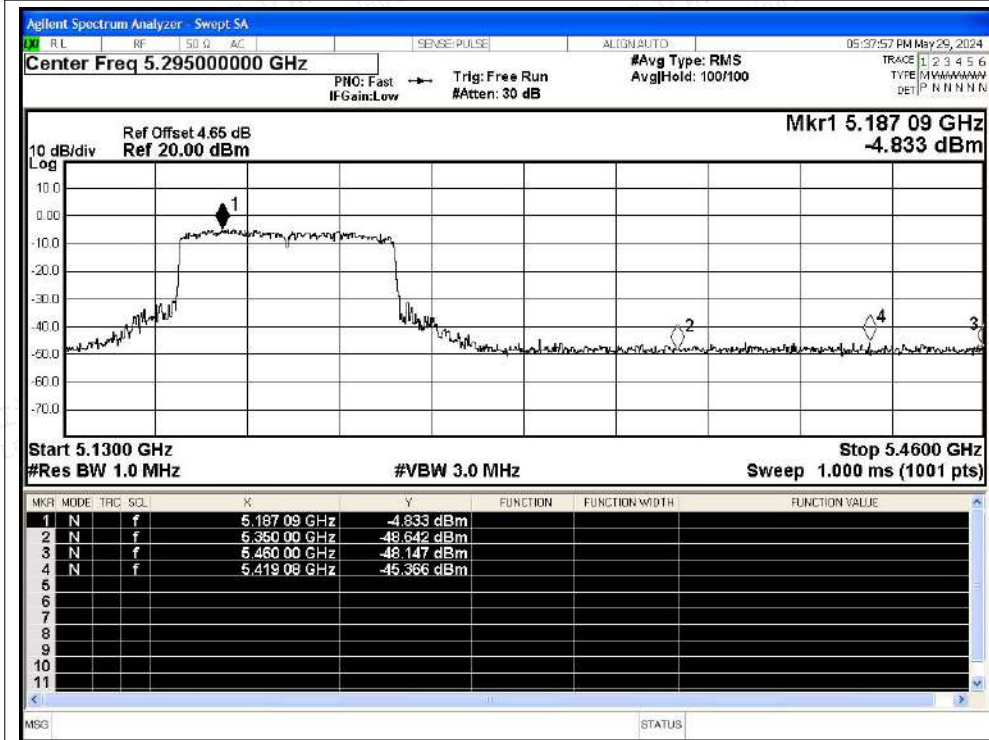


Restrict Band NVNT ac80 5210MHz Ant1 Average

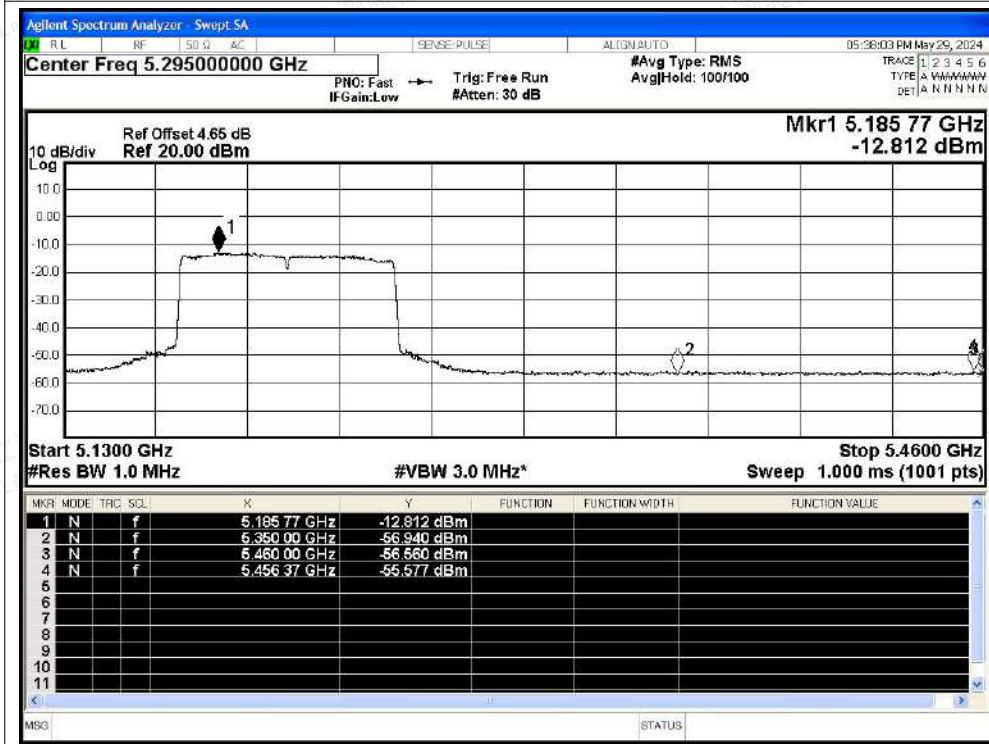



Restrict Band NVNT ac80 5210MHz Ant1 Peak

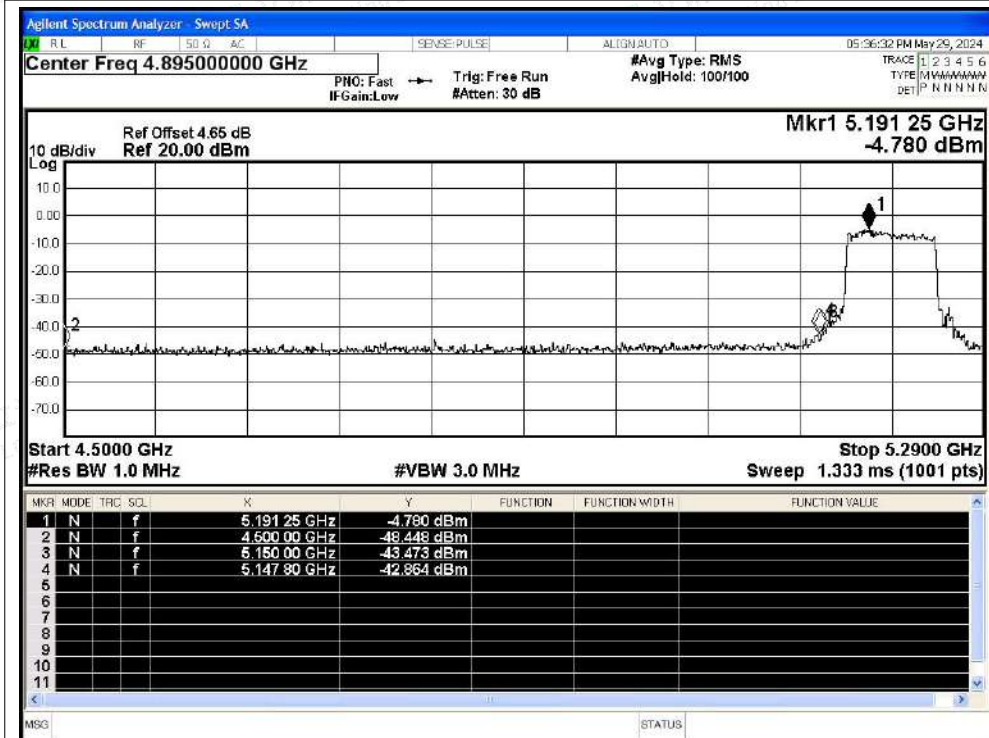

Restrict Band NVNT ac80 5210MHz Ant1 Average

