



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11b CH11 2462MHz																																																																													
1	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto (FR)102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.18</td> <td>55.71</td> <td>-18.29</td> <td>74.00</td> <td>49.88</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>147</td> <td>305</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2488.18	55.71	-18.29	74.00	49.88	31.17	7.30	32.64	147	305	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto (FR)102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.50</td> <td>31.50</td> <td>74.00</td> <td>99.86</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>147</td> <td>305</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2462.00	105.50	31.50	74.00	99.86	31.10	7.25	32.71	147	305	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2488.18	55.71	-18.29	74.00	49.88	31.17	7.30	32.64	147	305	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2462.00	105.50	31.50	74.00	99.86	31.10	7.25	32.71	147	305	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto (FR)102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.84</td> <td>44.31</td> <td>-9.69</td> <td>54.00</td> <td>38.48</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>147</td> <td>305</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2488.84	44.31	-9.69	54.00	38.48	31.17	7.30	32.64	147	305	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto (FR)102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.35</td> <td>48.35</td> <td>54.00</td> <td>96.71</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>147</td> <td>305</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2462.00	102.35	48.35	54.00	96.71	31.10	7.25	32.71	147	305	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2488.84	44.31	-9.69	54.00	38.48	31.17	7.30	32.64	147	305	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2462.00	102.35	48.35	54.00	96.71	31.10	7.25	32.71	147	305	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11b CH11 2462MHz																																																																											
1	Vertical	Fundamental																																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.38</td> <td>54.91</td> <td>-19.09</td> <td>74.00</td> <td>49.08</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>268</td> <td>287</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	1	2489.38	54.91	-19.09	74.00	49.08	31.17	7.30	32.64	268	287	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.42</td> <td>30.42</td> <td>74.00</td> <td>98.78</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>268</td> <td>287</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	1	2462.00	104.42	30.42	74.00	98.78	31.10	7.25	32.71	268	287	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg																																																																					
1	2489.38	54.91	-19.09	74.00	49.08	31.17	7.30	32.64	268	287	Peak	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg																																																																					
1	2462.00	104.42	30.42	74.00	98.78	31.10	7.25	32.71	268	287	Peak	VERTICAL																																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.00</td> <td>43.99</td> <td>-10.01</td> <td>54.00</td> <td>38.16</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>268</td> <td>287</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	1	2488.00	43.99	-10.01	54.00	38.16	31.17	7.30	32.64	268	287	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 21 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2460.00</td> <td>101.26</td> <td>47.26</td> <td>54.00</td> <td>95.62</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>268</td> <td>287</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg	1	2460.00	101.26	47.26	54.00	95.62	31.10	7.25	32.71	268	287	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg																																																																					
1	2488.00	43.99	-10.01	54.00	38.16	31.17	7.30	32.64	268	287	Average	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	deg																																																																					
1	2460.00	101.26	47.26	54.00	95.62	31.10	7.25	32.71	268	287	Average	VERTICAL																																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11b CH12 2467MHz																																																																													
1	Horizontal	Fundamental																																																																												
Peak	<p>Site Condition: 030806-KS FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL RBM 1000.000MHz VBR 3000.000kHz SRT Auto Project: (FR)102106-01 Mode: 22 MEI: #12 EIF-BASE1 Plane: 2 Full-directivity: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.34</td> <td>56.66</td> <td>-17.34</td> <td>74.00</td> <td>50.90</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>143</td> <td>301</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2484.34	56.66	-17.34	74.00	50.90	31.13	7.27	32.64	143	301	Peak	HORIZONTAL	<p>Site Condition: 030806-KS FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL RBM 1000.000MHz VBR 3000.000kHz SRT Auto Project: (FR)102106-01 Mode: 22 MEI: #12 EIF-BASE1 Plane: 2 Full-directivity: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>103.28</td> <td>29.28</td> <td>74.00</td> <td>97.64</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>143</td> <td>301</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	103.28	29.28	74.00	97.64	31.10	7.25	32.71	143	301	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2484.34	56.66	-17.34	74.00	50.90	31.13	7.27	32.64	143	301	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	103.28	29.28	74.00	97.64	31.10	7.25	32.71	143	301	Peak	HORIZONTAL																																																																		
Avg.	<p>Site Condition: 030806-KS FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL RBM 1000.000MHz VBR 0.01000kHz SRT Auto Project: (FR)102106-01 Mode: 22 MEI: #12 EIF-BASE1 Plane: 2 Full-directivity: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.37</td> <td>-7.63</td> <td>54.00</td> <td>40.61</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>143</td> <td>301</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	46.37	-7.63	54.00	40.61	31.13	7.27	32.64	143	301	Average	HORIZONTAL	<p>Site Condition: 030806-KS FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL RBM 1000.000MHz VBR 0.01000kHz SRT Auto Project: (FR)102106-01 Mode: 22 MEI: #12 EIF-BASE1 Plane: 2 Full-directivity: 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>100.11</td> <td>40.11</td> <td>54.00</td> <td>94.47</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>143</td> <td>301</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	100.11	40.11	54.00	94.47	31.10	7.25	32.71	143	301	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	46.37	-7.63	54.00	40.61	31.13	7.27	32.64	143	301	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	100.11	40.11	54.00	94.47	31.10	7.25	32.71	143	301	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11b CH12 2467MHz																																																																											
1	Vertical	Fundamental																																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.28</td> <td>55.11</td> <td>-18.89</td> <td>74.00</td> <td>49.35</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>103</td> <td>4 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2484.28	55.11	-18.89	74.00	49.35	31.13	7.27	32.64	103	4 Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>101.23</td> <td>27.23</td> <td>74.00</td> <td>95.99</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>103</td> <td>4 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	101.23	27.23	74.00	95.99	31.10	7.25	32.71	103	4 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2484.28	55.11	-18.89	74.00	49.35	31.13	7.27	32.64	103	4 Peak	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2466.00	101.23	27.23	74.00	95.99	31.10	7.25	32.71	103	4 Peak	VERTICAL																																																																	
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>44.76</td> <td>-9.24</td> <td>54.00</td> <td>39.00</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>103</td> <td>4 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	44.76	-9.24	54.00	39.00	31.13	7.27	32.64	103	4 Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 22 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 14</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>98.08</td> <td>44.08</td> <td>54.00</td> <td>92.64</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>103</td> <td>4 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	98.08	44.08	54.00	92.64	31.10	7.25	32.71	103	4 Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2483.50	44.76	-9.24	54.00	39.00	31.13	7.27	32.64	103	4 Average	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2466.00	98.08	44.08	54.00	92.64	31.10	7.25	32.71	103	4 Average	VERTICAL																																																																	



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH13 2472MHz																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : 2 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.22</td> <td>58.22</td> <td>-15.78</td> <td>74.00</td> <td>52.46</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>134</td> <td>233</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2484.22	58.22	-15.78	74.00	52.46	31.13	7.27	32.64	134	233	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : 2 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>104.28</td> <td>30.28</td> <td>74.00</td> <td>98.52</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>134</td> <td>233</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2472.00	104.28	30.28	74.00	98.52	31.13	7.27	32.64	134	233	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2484.22	58.22	-15.78	74.00	52.46	31.13	7.27	32.64	134	233	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2472.00	104.28	30.28	74.00	98.52	31.13	7.27	32.64	134	233	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.01000kHz SRT:Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : 2 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.46</td> <td>50.43</td> <td>-3.57</td> <td>54.00</td> <td>44.67</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>134</td> <td>233</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2484.46	50.43	-3.57	54.00	44.67	31.13	7.27	32.64	134	233	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.01000kHz SRT:Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : 2 Powersetting : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>101.08</td> <td>47.08</td> <td>54.00</td> <td>95.34</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>134</td> <td>233</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2470.00	101.08	47.08	54.00	95.34	31.13	7.25	32.64	134	233	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2484.46	50.43	-3.57	54.00	44.67	31.13	7.27	32.64	134	233	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2470.00	101.08	47.08	54.00	95.34	31.13	7.25	32.64	134	233	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH13 2472MHz																																																											
1	Vertical	Fundamental																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218643 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 23 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.86</td> <td>57.85</td> <td>-16.15</td> <td>74.00</td> <td>52.09</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>260</td> <td>249</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg	1	2483.86	57.85	-16.15	74.00	52.09	31.13	7.27	32.64	260	249	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218643 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 23 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>103.42</td> <td>29.42</td> <td>74.00</td> <td>97.66</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>260</td> <td>249</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg	1	2472.00	103.42	29.42	74.00	97.66	31.13	7.27	32.64	260	249	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg																																																					
1	2483.86	57.85	-16.15	74.00	52.09	31.13	7.27	32.64	260	249	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg																																																					
1	2472.00	103.42	29.42	74.00	97.66	31.13	7.27	32.64	260	249	Peak	VERTICAL																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000.000MHz VBR 0.01000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 23 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.40</td> <td>49.55</td> <td>-4.45</td> <td>54.00</td> <td>43.79</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>260</td> <td>249</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg	1	2484.40	49.55	-4.45	54.00	43.79	31.13	7.27	32.64	260	249	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000.000MHz VBR 0.01000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 23 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 16</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>100.18</td> <td>46.18</td> <td>54.00</td> <td>94.44</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>260</td> <td>249</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg	1	2470.00	100.18	46.18	54.00	94.44	31.13	7.25	32.64	260	249	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg																																																					
1	2484.40	49.55	-4.45	54.00	43.79	31.13	7.27	32.64	260	249	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV	dB/m	dB	cm	deg																																																					
1	2470.00	100.18	46.18	54.00	94.44	31.13	7.25	32.64	260	249	Average	VERTICAL																																																



2.4GHz 2400~2483.5MHz
 WIFI 802.11g(ANT 1) (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH01 2412MHz																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3.000.000kHz SRT:Auto Mode : (FR) 102106-01 ME1 : 24 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>62.23</td> <td>-11.77</td> <td>74.00</td> <td>56.97</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>100</td> <td>244</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2389.82	62.23	-11.77	74.00	56.97	30.94	7.16	32.84	100	244	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3.000.000kHz SRT:Auto Mode : (FR) 102106-01 ME1 : 24 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>103.17</td> <td>29.17</td> <td>74.00</td> <td>97.83</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>100</td> <td>244</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2410.00	103.17	29.17	74.00	97.83	31.00	7.18	32.84	100	244	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2389.82	62.23	-11.77	74.00	56.97	30.94	7.16	32.84	100	244	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2410.00	103.17	29.17	74.00	97.83	31.00	7.18	32.84	100	244	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3.000.000kHz SRT:Auto Mode : (FR) 102106-01 ME1 : 24 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>47.94</td> <td>-6.56</td> <td>54.00</td> <td>42.68</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>100</td> <td>244</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2389.95	47.94	-6.56	54.00	42.68	30.94	7.16	32.84	100	244	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3.000.000kHz SRT:Auto Mode : (FR) 102106-01 ME1 : 24 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>95.48</td> <td>41.48</td> <td>54.00</td> <td>90.14</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>100</td> <td>244</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	dB	deg		1	2410.00	95.48	41.48	54.00	90.14	31.00	7.18	32.84	100	244	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2389.95	47.94	-6.56	54.00	42.68	30.94	7.16	32.84	100	244	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level Factor	Loss Factor	dB	deg																																																						
1	2410.00	95.48	41.48	54.00	90.14	31.00	7.18	32.84	100	244	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH01 2412MHz																																																											
1	Vertical	Fundamental																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000.000kHz VBR 3000.000kHz SRT Auto Project : (FR)102106-01 Mode : 24 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>60.59</td> <td>-13.41</td> <td>74.00</td> <td>55.37</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>291</td> <td>288</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2389.56	60.59	-13.41	74.00	55.37	30.94	7.16	32.88	291	288	Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000.000kHz VBR 3000.000kHz SRT Auto Project : (FR)102106-01 Mode : 24 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>105.20</td> <td>31.20</td> <td>74.00</td> <td>99.86</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>291</td> <td>288</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2414.00	105.20	31.20	74.00	99.86	31.00	7.18	32.84	291	288	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2389.56	60.59	-13.41	74.00	55.37	30.94	7.16	32.88	291	288	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2414.00	105.20	31.20	74.00	99.86	31.00	7.18	32.84	291	288	Peak	VERTICAL																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000.000kHz VBR 0.7500kHz SRT Auto Project : (FR)102106-01 Mode : 24 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>46.34</td> <td>-7.66</td> <td>54.00</td> <td>41.08</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>291</td> <td>288</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2389.95	46.34	-7.66	54.00	41.08	30.94	7.16	32.84	291	288	Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000.000kHz VBR 0.7500kHz SRT Auto Project : (FR)102106-01 Mode : 24 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>97.03</td> <td>43.03</td> <td>54.00</td> <td>91.69</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>291</td> <td>288</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	cm	deg	1	2414.00	97.03	43.03	54.00	91.69	31.00	7.18	32.84	291	288	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2389.95	46.34	-7.66	54.00	41.08	30.94	7.16	32.84	291	288	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	dBm	cm	deg																																																					
1	2414.00	97.03	43.03	54.00	91.69	31.00	7.18	32.84	291	288	Average	VERTICAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH06 2437MHz - L																																																													
1	Horizontal	Fundamental																																																												
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBμV</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2362.26</td> <td>54.60</td> <td>-19.40</td> <td>74.00</td> <td>49.59</td> <td>30.83</td> <td>7.10</td> <td>32.92</td> <td>264</td> <td>306</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg	1	2362.26	54.60	-19.40	74.00	49.59	30.83	7.10	32.92	264	306	Peak	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBμV</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>105.31</td> <td>31.31</td> <td>74.00</td> <td>99.81</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>264</td> <td>306</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg	1	2436.00	105.31	31.31	74.00	99.81	31.07	7.20	32.77	264	306	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg																																																						
1	2362.26	54.60	-19.40	74.00	49.59	30.83	7.10	32.92	264	306	Peak	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg																																																						
1	2436.00	105.31	31.31	74.00	99.81	31.07	7.20	32.77	264	306	Peak	HORIZONTAL																																																		
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBμV</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.96</td> <td>44.52</td> <td>-9.48</td> <td>54.00</td> <td>39.30</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>264</td> <td>306</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg	1	2386.96	44.52	-9.48	54.00	39.30	30.94	7.16	32.88	264	306	Average	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBμV</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>97.71</td> <td>43.71</td> <td>54.00</td> <td>92.21</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>264</td> <td>306</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg	1	2436.00	97.71	43.71	54.00	92.21	31.07	7.20	32.77	264	306	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg																																																						
1	2386.96	44.52	-9.48	54.00	39.30	30.94	7.16	32.88	264	306	Average	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBμV/m	dB	dBμV/m	dBμV	dBμV	dB	cm	deg																																																						
1	2436.00	97.71	43.71	54.00	92.21	31.07	7.20	32.77	264	306	Average	HORIZONTAL																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																			
ANT	802.11g CH06 2437MHz - R																																			
1	Horizontal	Fundamental																																		
<p>Peak</p>	<p>Site : 032005-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRE 1000 0000Hz VSW 3000 0000Hz SWI:Auto IMEI : FR102106-01 Mod : #12 EIF-BASE1 Plane : 2 Powersetting : full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.62</td> <td>54.60</td> <td>-19.40</td> <td>74.00</td> <td>48.70</td> <td>31.17</td> <td>7.30 32.57</td> <td>264 306 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg	1	2495.62	54.60	-19.40	74.00	48.70	31.17	7.30 32.57	264 306 Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																													
Freq	Level	Limit	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg																													
1	2495.62	54.60	-19.40	74.00	48.70	31.17	7.30 32.57	264 306 Peak	HORIZONTAL																											
<p>Avg.</p>	<p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRE 1000 0000Hz VSW 0 3000Hz SWI:Auto IMEI : FR102106-01 Mod : #12 EIF-BASE1 Plane : 2 Powersetting : full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.04</td> <td>44.36</td> <td>-9.64</td> <td>54.00</td> <td>38.56</td> <td>31.17</td> <td>7.27 32.64</td> <td>264 306 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg	1	2487.04	44.36	-9.64	54.00	38.56	31.17	7.27 32.64	264 306 Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																													
Freq	Level	Limit	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm deg																													
1	2487.04	44.36	-9.64	54.00	38.56	31.17	7.27 32.64	264 306 Average	HORIZONTAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH06 2437MHz - L																																																											
1	Vertical	Fundamental																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2371.23</td> <td>54.30</td> <td>-19.70</td> <td>74.00</td> <td>49.17</td> <td>30.88</td> <td>7.13</td> <td>32.88</td> <td>100</td> <td>250</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	2371.23	54.30	-19.70	74.00	49.17	30.88	7.13	32.88	100	250	Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>104.02</td> <td>30.02</td> <td>74.00</td> <td>98.52</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>100</td> <td>250</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	2436.00	104.02	30.02	74.00	98.52	31.07	7.20	32.77	100	250	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																					
1	2371.23	54.30	-19.70	74.00	49.17	30.88	7.13	32.88	100	250	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																					
1	2436.00	104.02	30.02	74.00	98.52	31.07	7.20	32.77	100	250	Peak	VERTICAL																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.74</td> <td>44.13</td> <td>-9.87</td> <td>54.00</td> <td>38.91</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>100</td> <td>250</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	2387.74	44.13	-9.87	54.00	38.91	30.94	7.16	32.88	100	250	Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 25 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>96.54</td> <td>42.54</td> <td>54.00</td> <td>91.04</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>100</td> <td>250</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	2436.00	96.54	42.54	54.00	91.04	31.07	7.20	32.77	100	250	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																					
1	2387.74	44.13	-9.87	54.00	38.91	30.94	7.16	32.88	100	250	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																																					
1	2436.00	96.54	42.54	54.00	91.04	31.07	7.20	32.77	100	250	Average	VERTICAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																
ANT	802.11g CH06 2437MHz - R																																
1	Vertical	Fundamental																															
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : FCC PART 15C 3m 3117 SN 00218643 VERTICAL RRE 1000.000MHz VSW:3000.000kHz SRT:Auto Project : (FR)102106-01 Mod : #12 EIF-BASE1 MEI : 2 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>55.06</td> <td>-18.95</td> <td>74.00</td> <td>49.29</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>250</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg		1	2483.68	55.06	-18.95	74.00	49.29	31.13	7.27	32.64	100	250	Peak	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																										
1	2483.68	55.06	-18.95	74.00	49.29	31.13	7.27	32.64	100	250	Peak	VERTICAL																					
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL RRE 1000.000MHz VSW:0.7000kHz SRT:Auto Project : (FR)102106-01 Mod : #12 EIF-BASE1 MEI : 2 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.00</td> <td>44.27</td> <td>-9.73</td> <td>54.00</td> <td>38.44</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>100</td> <td>250</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg		1	2488.00	44.27	-9.73	54.00	38.44	31.17	7.30	32.64	100	250	Average	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	cm	deg																										
1	2488.00	44.27	-9.73	54.00	38.44	31.17	7.30	32.64	100	250	Average	VERTICAL																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH11 2462MHz																																																													
1	Horizontal	Fundamental																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : (FR) 102106-01 MEI : 26 Plane : #12 EIF-BASE1 Powersetting : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.44</td> <td>58.96</td> <td>-15.05</td> <td>74.00</td> <td>53.15</td> <td>31.17</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>302</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2486.44	58.96	-15.05	74.00	53.15	31.17	7.27	32.64	106	302	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : (FR) 102106-01 MEI : 26 Plane : #12 EIF-BASE1 Powersetting : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2460.00</td> <td>104.45</td> <td>30.45</td> <td>74.00</td> <td>98.81</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>106</td> <td>302</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2460.00	104.45	30.45	74.00	98.81	31.10	7.25	32.71	106	302	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2486.44	58.96	-15.05	74.00	53.15	31.17	7.27	32.64	106	302	Peak	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2460.00	104.45	30.45	74.00	98.81	31.10	7.25	32.71	106	302	Peak	HORIZONTAL																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.75000kHz SRT Auto Mode : (FR) 102106-01 MEI : 26 Plane : #12 EIF-BASE1 Powersetting : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>45.50</td> <td>-8.50</td> <td>54.00</td> <td>39.74</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>302</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2483.56	45.50	-8.50	54.00	39.74	31.13	7.27	32.64	106	302	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.75000kHz SRT Auto Mode : (FR) 102106-01 MEI : 26 Plane : #12 EIF-BASE1 Powersetting : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2460.00</td> <td>96.87</td> <td>42.87</td> <td>54.00</td> <td>91.23</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>106</td> <td>302</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2460.00	96.87	42.87	54.00	91.23	31.10	7.25	32.71	106	302	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2483.56	45.50	-8.50	54.00	39.74	31.13	7.27	32.64	106	302	Average	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2460.00	96.87	42.87	54.00	91.23	31.10	7.25	32.71	106	302	Average	HORIZONTAL																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11g CH11 2462MHz																																																																													
1	Vertical	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 26 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.52</td> <td>58.03</td> <td>-15.97</td> <td>74.00</td> <td>52.27</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>302</td> <td>266</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2484.52	58.03	-15.97	74.00	52.27	31.13	7.27	32.64	302	266	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 26 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.62</td> <td>31.62</td> <td>74.00</td> <td>99.98</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>302</td> <td>266</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2462.00	105.62	31.62	74.00	99.98	31.10	7.25	32.71	302	266	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2484.52	58.03	-15.97	74.00	52.27	31.13	7.27	32.64	302	266	Peak	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2462.00	105.62	31.62	74.00	99.98	31.10	7.25	32.71	302	266	Peak	VERTICAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 26 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>46.20</td> <td>-7.80</td> <td>54.00</td> <td>40.44</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>302</td> <td>266</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.56	46.20	-7.80	54.00	40.44	31.13	7.27	32.64	302	266	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 26 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>97.86</td> <td>43.86</td> <td>54.00</td> <td>92.22</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>302</td> <td>266</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2462.00	97.86	43.86	54.00	92.22	31.10	7.25	32.71	302	266	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.56	46.20	-7.80	54.00	40.44	31.13	7.27	32.64	302	266	Average	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2462.00	97.86	43.86	54.00	92.22	31.10	7.25	32.71	302	266	Average	VERTICAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11g CH12 2467MHz																																																																													
1	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>60.83</td> <td>-13.17</td> <td>74.00</td> <td>55.07</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>231</td> <td>238</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	2483.50	60.83	-13.17	74.00	55.07	31.13	7.27	32.64	231	238	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>101.42</td> <td>27.42</td> <td>74.00</td> <td>95.78</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>231</td> <td>238</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	2464.00	101.42	27.42	74.00	95.78	31.10	7.25	32.71	231	238	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																						
1	2483.50	60.83	-13.17	74.00	55.07	31.13	7.27	32.64	231	238	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																						
1	2464.00	101.42	27.42	74.00	95.78	31.10	7.25	32.71	231	238	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>47.56</td> <td>-6.44</td> <td>54.00</td> <td>41.80</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>231</td> <td>238</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	2483.50	47.56	-6.44	54.00	41.80	31.13	7.27	32.64	231	238	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>93.67</td> <td>39.67</td> <td>54.00</td> <td>88.03</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>231</td> <td>238</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg	1	2466.00	93.67	39.67	54.00	88.03	31.10	7.25	32.71	231	238	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																						
1	2483.50	47.56	-6.44	54.00	41.80	31.13	7.27	32.64	231	238	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cn	deg																																																																						
1	2466.00	93.67	39.67	54.00	88.03	31.10	7.25	32.71	231	238	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11g CH12 2467MHz																																																																													
1	Vertical	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 27 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2463.50</td> <td>62.09</td> <td>-11.91</td> <td>74.00</td> <td>56.33</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>234</td> <td>280</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg	1	2463.50	62.09	-11.91	74.00	56.33	31.13	7.27	32.64	234	280	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 27 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>102.79</td> <td>28.79</td> <td>74.00</td> <td>97.15</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>234</td> <td>280</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg	1	2464.00	102.79	28.79	74.00	97.15	31.10	7.25	32.71	234	280	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg																																																																						
1	2463.50	62.09	-11.91	74.00	56.33	31.13	7.27	32.64	234	280	Peak	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg																																																																						
1	2464.00	102.79	28.79	74.00	97.15	31.10	7.25	32.71	234	280	Peak	VERTICAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 27 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2463.56</td> <td>48.28</td> <td>-5.72</td> <td>54.00</td> <td>42.52</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>234</td> <td>280</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg	1	2463.56	48.28	-5.72	54.00	42.52	31.13	7.27	32.64	234	280	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 27 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>95.07</td> <td>41.07</td> <td>54.00</td> <td>89.43</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>234</td> <td>280</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg	1	2466.00	95.07	41.07	54.00	89.43	31.10	7.25	32.71	234	280	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg																																																																						
1	2463.56	48.28	-5.72	54.00	42.52	31.13	7.27	32.64	234	280	Average	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBm	dBm	dB	dBm	dB	dB	cn	deg																																																																						
1	2466.00	95.07	41.07	54.00	89.43	31.10	7.25	32.71	234	280	Average	VERTICAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH13 2472MHz																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.64</td> <td>57.52</td> <td>-16.48</td> <td>74.00</td> <td>51.76</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>309</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2484.64	57.52	-16.48	74.00	51.76	31.13	7.27	32.64	100	309	Peak	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>96.51</td> <td>22.51</td> <td>74.00</td> <td>90.75</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>309</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2472.00	96.51	22.51	74.00	90.75	31.13	7.27	32.64	100	309	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2484.64	57.52	-16.48	74.00	51.76	31.13	7.27	32.64	100	309	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2472.00	96.51	22.51	74.00	90.75	31.13	7.27	32.64	100	309	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.76</td> <td>-7.24</td> <td>54.00</td> <td>41.00</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>309</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2483.50	46.76	-7.24	54.00	41.00	31.13	7.27	32.64	100	309	Average	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>88.59</td> <td>34.59</td> <td>54.00</td> <td>82.85</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>100</td> <td>309</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2470.00	88.59	34.59	54.00	82.85	31.13	7.25	32.64	100	309	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2483.50	46.76	-7.24	54.00	41.00	31.13	7.27	32.64	100	309	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2470.00	88.59	34.59	54.00	82.85	31.13	7.25	32.64	100	309	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11g CH13 2472MHz																																																																			
1	Vertical	Fundamental																																																																		
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity Powersetting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.32</td> <td>40.81</td> <td>-13.19</td> <td>74.00</td> <td>55.01</td> <td>31.17</td> <td>7.27</td> <td>32.64</td> <td>282</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2483.32	40.81	-13.19	74.00	55.01	31.17	7.27	32.64	282	286	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity Powersetting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>99.79</td> <td>25.79</td> <td>74.00</td> <td>94.05</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>282</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2470.00	99.79	25.79	74.00	94.05	31.13	7.25	32.64	282	286	Peak	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2483.32	40.81	-13.19	74.00	55.01	31.17	7.27	32.64	282	286	Peak	VERTICAL																																																								
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2470.00	99.79	25.79	74.00	94.05	31.13	7.25	32.64	282	286	Peak	VERTICAL																																																								
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity Powersetting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.80</td> <td>-5.20</td> <td>54.00</td> <td>43.04</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>282</td> <td>286</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2483.50	48.80	-5.20	54.00	43.04	31.13	7.27	32.64	282	286	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 28 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity Powersetting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>92.36</td> <td>38.36</td> <td>54.00</td> <td>86.62</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>282</td> <td>286</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg			1	2470.00	92.36	38.36	54.00	86.62	31.13	7.25	32.64	282	286	Average	VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2483.50	48.80	-5.20	54.00	43.04	31.13	7.27	32.64	282	286	Average	VERTICAL																																																								
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																											
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																																													
1	2470.00	92.36	38.36	54.00	86.62	31.13	7.25	32.64	282	286	Average	VERTICAL																																																								



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20(ANT 1) (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11n HT20 CH01 2412MHz																																																																											
1	Horizontal	Fundamental																																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW 3.000 0.000dB SRT Auto Mode : (FR) 102106-01 ME1 : #12 EIF-BASE1 Plane : Z Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>62.41</td> <td>-11.59</td> <td>74.00</td> <td>57.19</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>123</td> <td>310</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg	1	2389.30	62.41	-11.59	74.00	57.19	30.94	7.16	32.88	123	310	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW 3.000 0.000dB SRT Auto Mode : (FR) 102106-01 ME1 : #12 EIF-BASE1 Plane : Z Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2416.00</td> <td>101.99</td> <td>27.99</td> <td>74.00</td> <td>96.56</td> <td>31.00</td> <td>7.18</td> <td>32.77</td> <td>123</td> <td>310</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg	1	2416.00	101.99	27.99	74.00	96.56	31.00	7.18	32.77	123	310	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg																																																																					
1	2389.30	62.41	-11.59	74.00	57.19	30.94	7.16	32.88	123	310	Peak	HORIZONTAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg																																																																					
1	2416.00	101.99	27.99	74.00	96.56	31.00	7.18	32.77	123	310	Peak	HORIZONTAL																																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW 3.000 0.000dB SRT Auto Mode : (FR) 102106-01 ME1 : #12 EIF-BASE1 Plane : Z Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>46.69</td> <td>-7.31</td> <td>54.00</td> <td>41.43</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>123</td> <td>310</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg	1	2389.95	46.69	-7.31	54.00	41.43	30.94	7.16	32.84	123	310	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW 3.000 0.000dB SRT Auto Mode : (FR) 102106-01 ME1 : #12 EIF-BASE1 Plane : Z Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2416.00</td> <td>94.33</td> <td>40.33</td> <td>54.00</td> <td>88.99</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>123</td> <td>310</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor				MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg	1	2416.00	94.33	40.33	54.00	88.99	31.00	7.18	32.84	123	310	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg																																																																					
1	2389.95	46.69	-7.31	54.00	41.43	30.94	7.16	32.84	123	310	Average	HORIZONTAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Line	Level Factor	Loss Factor																																																																								
MHz	dBm/Vm	dB	dBm/Vm	dB	dB	on	deg																																																																					
1	2416.00	94.33	40.33	54.00	88.99	31.00	7.18	32.84	123	310	Average	HORIZONTAL																																																																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																									
ANT	802.11n HT20 CH01 2412MHz																																																																									
1	Vertical	Fundamental																																																																								
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL RBM: 1000.000MHz VBR: 3000.000kHz SRT: Auto Project : (FR)102106-01 Mode : 29 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>65.06</td> <td>-8.94</td> <td>74.00</td> <td>69.84</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>295</td> <td>289 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg			1	2389.43	65.06	-8.94	74.00	69.84	30.94	7.16	32.88	295	289 Peak	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL RBM: 1000.000MHz VBR: 3000.000kHz SRT: Auto Project : (FR)102106-01 Mode : 29 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.88</td> <td>29.88</td> <td>74.00</td> <td>98.54</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>295</td> <td>289 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg			1	2412.00	103.88	29.88	74.00	98.54	31.00	7.18	32.84	295	289 Peak	VERTICAL
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																														
MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg																																																																	
1	2389.43	65.06	-8.94	74.00	69.84	30.94	7.16	32.88	295	289 Peak	VERTICAL																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg																																																																	
1	2412.00	103.88	29.88	74.00	98.54	31.00	7.18	32.84	295	289 Peak	VERTICAL																																																															
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL RBM: 1000.000MHz VBR: 0.75000kHz SRT: Auto Project : (FR)102106-01 Mode : 29 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>48.78</td> <td>-5.22</td> <td>54.00</td> <td>43.52</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>295</td> <td>289 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg			1	2389.95	48.78	-5.22	54.00	43.52	30.94	7.16	32.84	295	289 Average	VERTICAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL RBM: 1000.000MHz VBR: 0.75000kHz SRT: Auto Project : (FR)102106-01 Mode : 29 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>96.12</td> <td>42.12</td> <td>54.00</td> <td>90.78</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>295</td> <td>289 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg			1	2414.00	96.12	42.12	54.00	90.78	31.00	7.18	32.84	295	289 Average	VERTICAL
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																														
MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg																																																																	
1	2389.95	48.78	-5.22	54.00	43.52	30.94	7.16	32.84	295	289 Average	VERTICAL																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																															
MHz	dBm	dBm	dBm	dBm	dB	dB	dB	cm	deg																																																																	
1	2414.00	96.12	42.12	54.00	90.78	31.00	7.18	32.84	295	289 Average	VERTICAL																																																															



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT20 CH06 2437MHz - L																																																											
1	Horizontal	Fundamental																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000Hz VBR 3000, 0000Hz SRT Auto FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2360.83</td> <td>55.11</td> <td>-18.89</td> <td>74.00</td> <td>50.10</td> <td>30.83</td> <td>7.10</td> <td>32.92</td> <td>264</td> <td>307</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2360.83	55.11	-18.89	74.00	50.10	30.83	7.10	32.92	264	307	Peak	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000Hz VBR 3000, 0000Hz SRT Auto FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2434.00</td> <td>105.20</td> <td>31.20</td> <td>74.00</td> <td>99.70</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>264</td> <td>307</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2434.00	105.20	31.20	74.00	99.70	31.07	7.20	32.77	264	307	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2360.83	55.11	-18.89	74.00	50.10	30.83	7.10	32.92	264	307	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2434.00	105.20	31.20	74.00	99.70	31.07	7.20	32.77	264	307	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000Hz VBR 0, 0000Hz SRT Auto FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>44.81</td> <td>-9.19</td> <td>54.00</td> <td>39.55</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>264</td> <td>307</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2389.82	44.81	-9.19	54.00	39.55	30.94	7.16	32.84	264	307	Average	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000Hz VBR 0, 0000Hz SRT Auto FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>97.46</td> <td>43.46</td> <td>54.00</td> <td>91.96</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>264</td> <td>307</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg	1	2436.00	97.46	43.46	54.00	91.96	31.07	7.20	32.77	264	307	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2389.82	44.81	-9.19	54.00	39.55	30.94	7.16	32.84	264	307	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	cm	deg																																																					
1	2436.00	97.46	43.46	54.00	91.96	31.07	7.20	32.77	264	307	Average	HORIZONTAL																																																

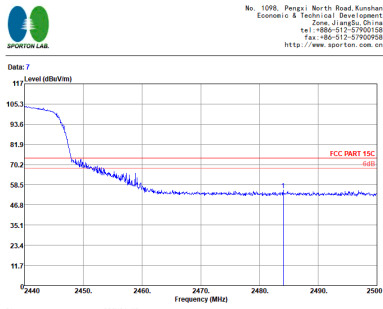
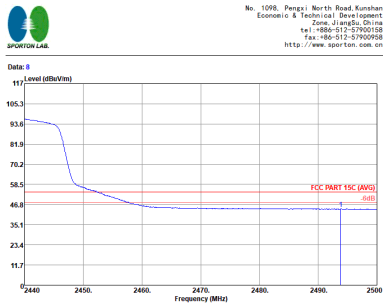


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																									
ANT	802.11n HT20 CH06 2437MHz - R																																									
1	Horizontal	Fundamental																																								
Peak	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : FCC PART 15C 3e 3117.5M 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW:3000.000kHz SW:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : 2 Plane : 2 Powersetting : Full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.04</td> <td>55.41</td> <td>-18.59</td> <td>74.00</td> <td>49.65</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>264</td> <td>307</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2484.04	55.41	-18.59	74.00	49.65	31.13	7.27	32.64	264	307	Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																		
1	2484.04	55.41	-18.59	74.00	49.65	31.13	7.27	32.64	264	307	Peak	HORIZONTAL																														
Avg.	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 0320H6-KS Condition : FCC PART 15C (AVG) 3e 3117.5M 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW:0.000kHz SW:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : 2 Plane : 2 Powersetting : Full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2493.82</td> <td>44.41</td> <td>-9.59</td> <td>54.00</td> <td>38.51</td> <td>31.17</td> <td>7.30</td> <td>32.57</td> <td>264</td> <td>307</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2493.82	44.41	-9.59	54.00	38.51	31.17	7.30	32.57	264	307	Average	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																		
1	2493.82	44.41	-9.59	54.00	38.51	31.17	7.30	32.57	264	307	Average	HORIZONTAL																														



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT20 CH06 2437MHz - L																																																											
1	Vertical	Fundamental																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2379.29</td> <td>54.35</td> <td>-19.65</td> <td>74.00</td> <td>49.22</td> <td>30.88</td> <td>7.13</td> <td>32.88</td> <td>100</td> <td>250</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2379.29	54.35	-19.65	74.00	49.22	30.88	7.13	32.88	100	250	Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>104.01</td> <td>30.01</td> <td>74.00</td> <td>98.51</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>100</td> <td>250</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2436.00	104.01	30.01	74.00	98.51	31.07	7.20	32.77	100	250	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2379.29	54.35	-19.65	74.00	49.22	30.88	7.13	32.88	100	250	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2436.00	104.01	30.01	74.00	98.51	31.07	7.20	32.77	100	250	Peak	VERTICAL																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>44.25</td> <td>-9.75</td> <td>54.00</td> <td>39.03</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>100</td> <td>250</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2389.69	44.25	-9.75	54.00	39.03	30.94	7.16	32.88	100	250	Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>deg</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>94.21</td> <td>42.21</td> <td>54.00</td> <td>90.71</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>100</td> <td>250</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	deg	cm	deg	1	2436.00	94.21	42.21	54.00	90.71	31.07	7.20	32.77	100	250	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2389.69	44.25	-9.75	54.00	39.03	30.94	7.16	32.88	100	250	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	deg	cm	deg																																																					
1	2436.00	94.21	42.21	54.00	90.71	31.07	7.20	32.77	100	250	Average	VERTICAL																																																

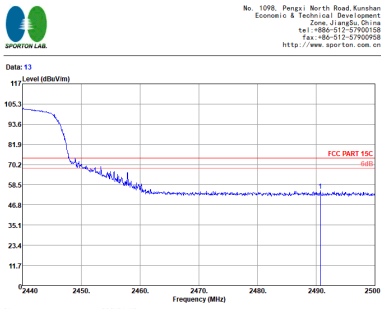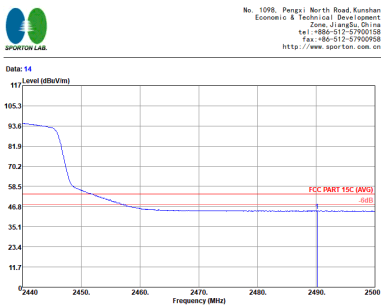

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																									
ANT	802.11n HT20 CH06 2437MHz - R																																									
1	Vertical	Fundamental																																								
<p>Peak</p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : FCC PART 15C 3e 3117.5M 00218643 VERTICAL RRE 1000.000KHz VSW 3000.000KHz SWI:Auto Project : (FR) 102106-01 Mod : #12 EIF-BASE1 MEI : 2 Plane : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.70</td> <td>55.01</td> <td>-18.99</td> <td>74.00</td> <td>49.18</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>100</td> <td>250</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2490.70	55.01	-18.99	74.00	49.18	31.17	7.30	32.64	100	250	Peak	VERTICAL	<p>Left Blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	2490.70	55.01	-18.99	74.00	49.18	31.17	7.30	32.64	100	250	Peak	VERTICAL																														
<p>Avg.</p>	 <p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : FCC PART 15C (AVG) 3e 3117.5M 00218642 VERTICAL RRE 1000.000KHz VSW 0.000KHz SWI:Auto Project : (FR) 102106-01 Mod : #12 EIF-BASE1 MEI : 2 Plane : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.16</td> <td>44.32</td> <td>-9.68</td> <td>54.00</td> <td>38.49</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>100</td> <td>250</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg	1	2490.16	44.32	-9.68	54.00	38.49	31.17	7.30	32.64	100	250	Average	VERTICAL	<p>Left Blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																		
Freq	Level	Limit	Level	Factor	Loss	Factor	cm	deg																																		
MHz	dBuV/m	dB	dBuV/m	dB	dB	dB	cm	deg																																		
1	2490.16	44.32	-9.68	54.00	38.49	31.17	7.30	32.64	100	250	Average	VERTICAL																														



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11n HT20 CH11 2462MHz																																																																													
1	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto FR102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>65.29</td> <td>-8.71</td> <td>74.00</td> <td>69.53</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>167</td> <td>239</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.68	65.29	-8.71	74.00	69.53	31.13	7.27	32.64	167	239	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto FR102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>104.82</td> <td>30.82</td> <td>74.00</td> <td>99.18</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>167</td> <td>239</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.00	104.82	30.82	74.00	99.18	31.10	7.25	32.71	167	239	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.68	65.29	-8.71	74.00	69.53	31.13	7.27	32.64	167	239	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.00	104.82	30.82	74.00	99.18	31.10	7.25	32.71	167	239	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto FR102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>47.71</td> <td>-8.29</td> <td>54.00</td> <td>41.95</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>167</td> <td>239</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.56	47.71	-8.29	54.00	41.95	31.13	7.27	32.64	167	239	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto FR102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>97.10</td> <td>43.10</td> <td>54.00</td> <td>91.66</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>167</td> <td>239</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.00	97.10	43.10	54.00	91.66	31.10	7.25	32.71	167	239	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.56	47.71	-8.29	54.00	41.95	31.13	7.27	32.64	167	239	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.00	97.10	43.10	54.00	91.66	31.10	7.25	32.71	167	239	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m																																																													
ANT	802.11n HT20 CH11 2462MHz																																																													
1	Vertical	Fundamental																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 000MHz VBR 3000, 000kHz SRT Auto (FR) 102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2463.50</td> <td>64.76</td> <td>-9.24</td> <td>74.00</td> <td>69.00</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>268</td> <td>281</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2463.50	64.76	-9.24	74.00	69.00	31.13	7.27	32.64	268	281	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 000MHz VBR 3000, 000kHz SRT Auto (FR) 102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.45</td> <td>32.45</td> <td>74.00</td> <td>100.81</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>268</td> <td>281</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2462.00	104.45	32.45	74.00	100.81	31.10	7.25	32.71	268	281	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2463.50	64.76	-9.24	74.00	69.00	31.13	7.27	32.64	268	281	Peak	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2462.00	104.45	32.45	74.00	100.81	31.10	7.25	32.71	268	281	Peak	VERTICAL																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 000MHz VBR 0, 7500kHz SRT Auto (FR) 102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2463.50</td> <td>48.45</td> <td>-5.55</td> <td>54.00</td> <td>42.69</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>268</td> <td>281</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2463.50	48.45	-5.55	54.00	42.69	31.13	7.27	32.64	268	281	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 000MHz VBR 0, 7500kHz SRT Auto (FR) 102106-01 Mode : 31 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>98.66</td> <td>44.66</td> <td>54.00</td> <td>93.02</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>268</td> <td>281</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2462.00	98.66	44.66	54.00	93.02	31.10	7.25	32.71	268	281	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2463.50	48.45	-5.55	54.00	42.69	31.13	7.27	32.64	268	281	Average	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2462.00	98.66	44.66	54.00	93.02	31.10	7.25	32.71	268	281	Average	VERTICAL																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11n HT20 CH12 2467MHz																																																																													
1	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-3000-000000-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.18</td> <td>59.02</td> <td>-14.98</td> <td>74.00</td> <td>53.22</td> <td>31.17</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>249</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2485.18	59.02	-14.98	74.00	53.22	31.17	7.27	32.64	100	249	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-3000-000000-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>99.99</td> <td>25.99</td> <td>74.00</td> <td>94.35</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>100</td> <td>249</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	99.99	25.99	74.00	94.35	31.10	7.25	32.71	100	249	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2485.18	59.02	-14.98	74.00	53.22	31.17	7.27	32.64	100	249	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	99.99	25.99	74.00	94.35	31.10	7.25	32.71	100	249	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-3000-000000-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.80</td> <td>-7.20</td> <td>54.00</td> <td>41.04</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>249</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	46.80	-7.20	54.00	41.04	31.13	7.27	32.64	100	249	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-3000-000000-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>92.23</td> <td>38.23</td> <td>54.00</td> <td>86.59</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>100</td> <td>249</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	92.23	38.23	54.00	86.59	31.10	7.25	32.71	100	249	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	46.80	-7.20	54.00	41.04	31.13	7.27	32.64	100	249	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	92.23	38.23	54.00	86.59	31.10	7.25	32.71	100	249	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11n HT20 CH12 2467MHz																																																																													
1	Vertical	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>62.54</td> <td>-11.46</td> <td>74.00</td> <td>56.78</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>295</td> <td>278</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.62	62.54	-11.46	74.00	56.78	31.13	7.27	32.64	295	278	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>102.87</td> <td>28.87</td> <td>74.00</td> <td>97.23</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>295</td> <td>278</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	102.87	28.87	74.00	97.23	31.10	7.25	32.71	295	278	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.62	62.54	-11.46	74.00	56.78	31.13	7.27	32.64	295	278	Peak	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	102.87	28.87	74.00	97.23	31.10	7.25	32.71	295	278	Peak	VERTICAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.87</td> <td>-5.13</td> <td>54.00</td> <td>43.11</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>295</td> <td>278</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	48.87	-5.13	54.00	43.11	31.13	7.27	32.64	295	278	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>95.26</td> <td>41.26</td> <td>54.00</td> <td>89.62</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>295</td> <td>278</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	95.26	41.26	54.00	89.62	31.10	7.25	32.71	295	278	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	48.87	-5.13	54.00	43.11	31.13	7.27	32.64	295	278	Average	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	95.26	41.26	54.00	89.62	31.10	7.25	32.71	295	278	Average	VERTICAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11n HT20 CH13 2472MHz																																																																													
1	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-3000-0000KHz-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>61.92</td> <td>-12.08</td> <td>74.00</td> <td>56.16</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>167</td> <td>237</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.56	61.92	-12.08	74.00	56.16	31.13	7.27	32.64	167	237	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-3000-0000KHz-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>98.16</td> <td>24.16</td> <td>74.00</td> <td>92.40</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>167</td> <td>237</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2472.00	98.16	24.16	74.00	92.40	31.13	7.27	32.64	167	237	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.56	61.92	-12.08	74.00	56.16	31.13	7.27	32.64	167	237	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2472.00	98.16	24.16	74.00	92.40	31.13	7.27	32.64	167	237	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-0-750000-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>50.62</td> <td>-3.38</td> <td>54.00</td> <td>44.86</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>167</td> <td>237</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	50.62	-3.38	54.00	44.86	31.13	7.27	32.64	167	237	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM-1000-000000-VBR-0-750000-SRT-Auto Mode : (FR)102106-01 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2474.00</td> <td>90.54</td> <td>36.54</td> <td>54.00</td> <td>84.78</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>167</td> <td>237</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2474.00	90.54	36.54	54.00	84.78	31.13	7.27	32.64	167	237	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	50.62	-3.38	54.00	44.86	31.13	7.27	32.64	167	237	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2474.00	90.54	36.54	54.00	84.78	31.13	7.27	32.64	167	237	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH13 2472MHz																																																													
1	Vertical	Fundamental																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>61.82</td> <td>-12.18</td> <td>74.00</td> <td>56.06</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>299</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.56	61.82	-12.18	74.00	56.06	31.13	7.27	32.64	299	286	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2474.00</td> <td>98.23</td> <td>24.23</td> <td>74.00</td> <td>92.47</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>299</td> <td>286</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2474.00	98.23	24.23	74.00	92.47	31.13	7.27	32.64	299	286	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.56	61.82	-12.18	74.00	56.06	31.13	7.27	32.64	299	286	Peak	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2474.00	98.23	24.23	74.00	92.47	31.13	7.27	32.64	299	286	Peak	VERTICAL																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>50.78</td> <td>-3.22</td> <td>54.00</td> <td>45.02</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>299</td> <td>286</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	50.78	-3.22	54.00	45.02	31.13	7.27	32.64	299	286	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 30 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2474.00</td> <td>90.60</td> <td>36.60</td> <td>54.00</td> <td>84.84</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>299</td> <td>286</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2474.00	90.60	36.60	54.00	84.84	31.13	7.27	32.64	299	286	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2483.50	50.78	-3.22	54.00	45.02	31.13	7.27	32.64	299	286	Average	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																						
1	2474.00	90.60	36.60	54.00	84.84	31.13	7.27	32.64	299	286	Average	VERTICAL																																																		



2.4GHz 2400~2483.5MHz
 WIFI 802.11b(ANT 1) (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																									
ANT	802.11b CH01 2412MHz																																																																									
1	Horizontal	Vertical																																																																								
Peak Avg.	<p>Site : 03D06-KS Condition : FCC PART 15C 3m 3117.0M 0018A2 HORIZONTAL Project : R98 1000.000KHz VBR 3000.000KHz SRT Auto Mode : FR102106-01 ME1 : #12 E1F-BASE1 Plane : Z Full-directivity : Z Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>53.35</td> <td>-20.45</td> <td>74.00</td> <td>48.56</td> <td>34.57</td> <td>10.26</td> <td>40.04</td> <td>268</td> <td>191 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4830.00</td> <td>50.61</td> <td>-3.39</td> <td>54.00</td> <td>65.82</td> <td>34.57</td> <td>10.26</td> <td>60.04</td> <td>268</td> <td>191 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	1	4830.00	53.35	-20.45	74.00	48.56	34.57	10.26	40.04	268	191 Peak	HORIZONTAL	2	4830.00	50.61	-3.39	54.00	65.82	34.57	10.26	60.04	268	191 Average	HORIZONTAL	<p>Site : 03D06-KS Condition : FCC PART 15C 3m 3117.0M 0018A2 VERTICAL Project : R98 1000.000KHz VBR 3000.000KHz SRT Auto Mode : FR102106-01 ME1 : #12 E1F-BASE1 Plane : Z Full-directivity : Z Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>49.17</td> <td>-24.83</td> <td>74.00</td> <td>44.38</td> <td>34.57</td> <td>10.26</td> <td>40.04</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB	1	4830.00	49.17	-24.83	74.00	44.38	34.57	10.26	40.04	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																	
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB																																																																		
1	4830.00	53.35	-20.45	74.00	48.56	34.57	10.26	40.04	268	191 Peak	HORIZONTAL																																																															
2	4830.00	50.61	-3.39	54.00	65.82	34.57	10.26	60.04	268	191 Average	HORIZONTAL																																																															
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																		
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	dB																																																																		
1	4830.00	49.17	-24.83	74.00	44.38	34.57	10.26	40.04	100	0 Peak	VERTICAL																																																															



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																														
ANT	802.11b CH06 2437MHz																																																																																														
1	Horizontal	Vertical																																																																																													
Peak Avg.	<p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00718643 HORIZONTAL Project : R98-1000 500KHz VBR-3000 000KHz SRT-Auto Mode : EFS102106-01 Plane : #12 E1F-BASE1 Power setting : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>53.13</td> <td>-20.87</td> <td>74.00</td> <td>48.18</td> <td>34.66</td> <td>10.32</td> <td>262</td> <td>193 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4875.00</td> <td>55.01</td> <td>-3.99</td> <td>54.00</td> <td>65.00</td> <td>34.66</td> <td>10.32</td> <td>262</td> <td>193 Average</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7305.00</td> <td>44.13</td> <td>-20.87</td> <td>74.00</td> <td>55.33</td> <td>36.56</td> <td>12.75</td> <td>60.51</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	4875.00	53.13	-20.87	74.00	48.18	34.66	10.32	262	193 Peak	HORIZONTAL	2	4875.00	55.01	-3.99	54.00	65.00	34.66	10.32	262	193 Average	HORIZONTAL	3	7305.00	44.13	-20.87	74.00	55.33	36.56	12.75	60.51	0 Peak	HORIZONTAL	<p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00718643 VERTICAL Project : R98-1000 500KHz VBR-3000 000KHz SRT-Auto Mode : EFS102106-01 Plane : #12 E1F-BASE1 Power setting : 2 Full-directivity : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>48.57</td> <td>-25.43</td> <td>74.00</td> <td>63.43</td> <td>34.66</td> <td>10.32</td> <td>60.03</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7305.00</td> <td>43.84</td> <td>-30.16</td> <td>74.00</td> <td>55.04</td> <td>36.56</td> <td>12.75</td> <td>60.51</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	4875.00	48.57	-25.43	74.00	63.43	34.66	10.32	60.03	100	0 Peak	VERTICAL	2	7305.00	43.84	-30.16	74.00	55.04	36.56	12.75	60.51	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																																																							
1	4875.00	53.13	-20.87	74.00	48.18	34.66	10.32	262	193 Peak	HORIZONTAL																																																																																					
2	4875.00	55.01	-3.99	54.00	65.00	34.66	10.32	262	193 Average	HORIZONTAL																																																																																					
3	7305.00	44.13	-20.87	74.00	55.33	36.56	12.75	60.51	0 Peak	HORIZONTAL																																																																																					
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																																																							
1	4875.00	48.57	-25.43	74.00	63.43	34.66	10.32	60.03	100	0 Peak	VERTICAL																																																																																				
2	7305.00	43.84	-30.16	74.00	55.04	36.56	12.75	60.51	100	0 Peak	VERTICAL																																																																																				



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																									
ANT	802.11b CH11 2462MHz																																																																																																									
1	Horizontal	Vertical																																																																																																								
Peak Avg.	<p>Site : 030904-K5 Condition : FCC PART 15C 3m 3117 5800740138 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Model : E911 Mode : #13 EIF-BASE1 Plane : Z Full-directivity : Full-directivity</p> <table border="1"> <thead> <tr> <th>Power setting</th> <th>10</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>53.72</td> <td>-20.28</td> <td>74.00</td> <td>70.51</td> <td>34.56</td> <td>10.39</td> <td>61.74</td> <td>275</td> <td>167 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4920.00</td> <td>50.78</td> <td>-3.22</td> <td>54.00</td> <td>67.57</td> <td>34.56</td> <td>10.39</td> <td>61.74</td> <td>275</td> <td>167 Average</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7380.00</td> <td>42.78</td> <td>-31.22</td> <td>74.00</td> <td>56.33</td> <td>35.90</td> <td>12.81</td> <td>62.06</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Power setting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Factor	Factor	Factor	1	4920.00	53.72	-20.28	74.00	70.51	34.56	10.39	61.74	275	167 Peak	HORIZONTAL	2	4920.00	50.78	-3.22	54.00	67.57	34.56	10.39	61.74	275	167 Average	HORIZONTAL	3	7380.00	42.78	-31.22	74.00	56.33	35.90	12.81	62.06	300	0 Peak	HORIZONTAL	<p>Site : 030904-K5 Condition : FCC PART 15C 3m 3117 5800740138 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Model : E911 Mode : #13 EIF-BASE1 Plane : Z Full-directivity : Full-directivity</p> <table border="1"> <thead> <tr> <th>Power setting</th> <th>10</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>48.30</td> <td>-25.70</td> <td>74.00</td> <td>65.09</td> <td>34.56</td> <td>10.39</td> <td>61.74</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7380.00</td> <td>42.65</td> <td>-31.35</td> <td>74.00</td> <td>56.00</td> <td>35.90</td> <td>12.81</td> <td>62.06</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Power setting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Factor	Factor	Factor	1	4920.00	48.30	-25.70	74.00	65.09	34.56	10.39	61.74	100	0 Peak	VERTICAL	2	7380.00	42.65	-31.35	74.00	56.00	35.90	12.81	62.06	100	0 Peak	VERTICAL
	Power setting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																															
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																																																
1	4920.00	53.72	-20.28	74.00	70.51	34.56	10.39	61.74	275	167 Peak	HORIZONTAL																																																																																															
2	4920.00	50.78	-3.22	54.00	67.57	34.56	10.39	61.74	275	167 Average	HORIZONTAL																																																																																															
3	7380.00	42.78	-31.22	74.00	56.33	35.90	12.81	62.06	300	0 Peak	HORIZONTAL																																																																																															
Power setting	10	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Factor	Factor	Factor																																																																																																
1	4920.00	48.30	-25.70	74.00	65.09	34.56	10.39	61.74	100	0 Peak	VERTICAL																																																																																															
2	7380.00	42.65	-31.35	74.00	56.00	35.90	12.81	62.06	100	0 Peak	VERTICAL																																																																																															



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																												
ANT	802.11b CH12 2467MHz																																																																												
1	Horizontal	Vertical																																																																											
Peak Avg.	<p>Site : 030904-K5 Condition : FCC PART 15C 3m 3117 5800740138 HORIZONTAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Model : 813 EIF-BASE1 Plane : 2 Full-directivity : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4935.00</td> <td>53.66</td> <td>-20.34</td> <td>74.00</td> <td>70.45</td> <td>34.56</td> <td>10.39</td> <td>61.74</td> <td>308</td> <td>7 Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4935.00</td> <td>50.71</td> <td>-3.29</td> <td>54.00</td> <td>67.50</td> <td>34.56</td> <td>10.39</td> <td>61.74</td> <td>308</td> <td>7 Average HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7395.00</td> <td>43.40</td> <td>-30.60</td> <td>74.00</td> <td>56.74</td> <td>35.90</td> <td>12.83</td> <td>62.07</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	1	4935.00	53.66	-20.34	74.00	70.45	34.56	10.39	61.74	308	7 Peak HORIZONTAL	2	4935.00	50.71	-3.29	54.00	67.50	34.56	10.39	61.74	308	7 Average HORIZONTAL	3	7395.00	43.40	-30.60	74.00	56.74	35.90	12.83	62.07	300	0 Peak HORIZONTAL	<p>Site : 030904-K5 Condition : FCC PART 15C 3m 3117 5800740138 VERTICAL Project : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Model : 813 EIF-BASE1 Plane : 2 Full-directivity : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4935.00</td> <td>48.47</td> <td>-25.53</td> <td>74.00</td> <td>65.26</td> <td>34.56</td> <td>10.39</td> <td>61.74</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>7395.00</td> <td>43.37</td> <td>-30.63</td> <td>74.00</td> <td>56.71</td> <td>35.90</td> <td>12.83</td> <td>62.07</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas	1	4935.00	48.47	-25.53	74.00	65.26	34.56	10.39	61.74	100	0 Peak VERTICAL	2	7395.00	43.37	-30.63	74.00	56.71	35.90	12.83	62.07	100	0 Peak VERTICAL
	Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																			
1	4935.00	53.66	-20.34	74.00	70.45	34.56	10.39	61.74	308	7 Peak HORIZONTAL																																																																			
2	4935.00	50.71	-3.29	54.00	67.50	34.56	10.39	61.74	308	7 Average HORIZONTAL																																																																			
3	7395.00	43.40	-30.60	74.00	56.74	35.90	12.83	62.07	300	0 Peak HORIZONTAL																																																																			
Freq	Level	Limit	Line	Level Factor	Loss Factor	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
1	4935.00	48.47	-25.53	74.00	65.26	34.56	10.39	61.74	100	0 Peak VERTICAL																																																																			
2	7395.00	43.37	-30.63	74.00	56.71	35.90	12.83	62.07	100	0 Peak VERTICAL																																																																			



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																						
ANT	802.11b CH13 2472MHz																																																																																																						
1	Horizontal	Vertical																																																																																																					
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117.5M 00218643 HORIZONTAL Project : FR102106-01 Mode : 23 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.00</td> <td>52.10</td> <td>-21.90</td> <td>74.00</td> <td>68.64</td> <td>34.78</td> <td>10.41</td> <td>61.73</td> <td>267</td> <td>360</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4950.00</td> <td>49.61</td> <td>-4.39</td> <td>54.00</td> <td>66.15</td> <td>34.78</td> <td>10.41</td> <td>61.73</td> <td>267</td> <td>360</td> <td>Average</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7410.00</td> <td>44.46</td> <td>-29.54</td> <td>74.00</td> <td>57.10</td> <td>36.58</td> <td>12.88</td> <td>62.07</td> <td>300</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg	1	4950.00	52.10	-21.90	74.00	68.64	34.78	10.41	61.73	267	360	Peak	HORIZONTAL	2	4950.00	49.61	-4.39	54.00	66.15	34.78	10.41	61.73	267	360	Average	HORIZONTAL	3	7410.00	44.46	-29.54	74.00	57.10	36.58	12.88	62.07	300	0	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117.5M 00218643 VERTICAL Project : FR102106-01 Mode : 23 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.00</td> <td>47.11</td> <td>-26.89</td> <td>74.00</td> <td>63.65</td> <td>34.78</td> <td>10.41</td> <td>61.73</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7410.00</td> <td>43.68</td> <td>-30.32</td> <td>74.00</td> <td>56.32</td> <td>36.58</td> <td>12.85</td> <td>62.07</td> <td>100</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg	1	4950.00	47.11	-26.89	74.00	63.65	34.78	10.41	61.73	100	0	Peak	VERTICAL	2	7410.00	43.68	-30.32	74.00	56.32	36.58	12.85	62.07	100	0	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																														
Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg																																																																																															
1	4950.00	52.10	-21.90	74.00	68.64	34.78	10.41	61.73	267	360	Peak	HORIZONTAL																																																																																											
2	4950.00	49.61	-4.39	54.00	66.15	34.78	10.41	61.73	267	360	Average	HORIZONTAL																																																																																											
3	7410.00	44.46	-29.54	74.00	57.10	36.58	12.88	62.07	300	0	Peak	HORIZONTAL																																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																															
Freq	Level	Limit	Level	Factor	Loss	Factor	dB	deg																																																																																															
1	4950.00	47.11	-26.89	74.00	63.65	34.78	10.41	61.73	100	0	Peak	VERTICAL																																																																																											
2	7410.00	43.68	-30.32	74.00	56.32	36.58	12.85	62.07	100	0	Peak	VERTICAL																																																																																											



2.4GHz 2400~2483.5MHz
 WIFI 802.11g(ANT 1) (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																													
ANT	802.11g CH01 2412MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 03D06-KS Condition : FCC PART 15C 3m 317.5M 00718A2 HORIZONTAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 24 Plan : 872 E1F-BASE1 Plane : Z Full-directivity : Z Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.00</td> <td>42.98</td> <td>-31.02</td> <td>74.00</td> <td>09.96</td> <td>34.57</td> <td>10.26</td> <td>61.81</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB	1	48.00	42.98	-31.02	74.00	09.96	34.57	10.26	61.81	300	0 Peak	HORIZONTAL	<p>Site : 03D06-KS Condition : FCC PART 15C 3m 317.5M 00718A2 VERTICAL Project : RSM 1000.000KHz VBR 3000.000KHz SRT Auto Mode : 24 Plan : 872 E1F-BASE1 Plane : Z Full-directivity : Z Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.00</td> <td>42.24</td> <td>-31.76</td> <td>74.00</td> <td>09.22</td> <td>34.57</td> <td>10.26</td> <td>61.81</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB	1	48.00	42.24	-31.76	74.00	09.22	34.57	10.26	61.81	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB																																																						
1	48.00	42.98	-31.02	74.00	09.96	34.57	10.26	61.81	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB																																																						
1	48.00	42.24	-31.76	74.00	09.22	34.57	10.26	61.81	100	0 Peak	VERTICAL																																																			



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	802.11g CH06 2437MHz																																																																																					
1	Horizontal	Vertical																																																																																				
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-5790098 fax: +86-512-5790098 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00218643 HORIZONTAL Project : RRM-1000-000MHz VBR-3000-000MHz SRT-Auto Mode : EFS102106-01 Plane : 25 MSE1 : #12 E1F-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>45.75</td> <td>-28.25</td> <td>74.00</td> <td>62.54</td> <td>34.66</td> <td>10.32</td> <td>65.77</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7305.00</td> <td>43.97</td> <td>-30.03</td> <td>74.00</td> <td>56.72</td> <td>36.56</td> <td>12.75</td> <td>62.06</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor			1	4875.00	45.75	-28.25	74.00	62.54	34.66	10.32	65.77	300	0 Peak	HORIZONTAL	2	7305.00	43.97	-30.03	74.00	56.72	36.56	12.75	62.06	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-5790098 fax: +86-512-5790098 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00218643 VERTICAL Project : RRM-1000-000MHz VBR-3000-000MHz SRT-Auto Mode : EFS102106-01 Plane : 25 MSE1 : #12 E1F-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>43.97</td> <td>-30.08</td> <td>74.00</td> <td>60.71</td> <td>34.66</td> <td>10.32</td> <td>61.77</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7305.00</td> <td>44.08</td> <td>-29.92</td> <td>74.00</td> <td>56.83</td> <td>36.56</td> <td>12.75</td> <td>62.06</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor			1	4875.00	43.97	-30.08	74.00	60.71	34.66	10.32	61.77	100	0 Peak	VERTICAL	2	7305.00	44.08	-29.92	74.00	56.83	36.56	12.75	62.06	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																													
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																
1	4875.00	45.75	-28.25	74.00	62.54	34.66	10.32	65.77	300	0 Peak	HORIZONTAL																																																																											
2	7305.00	43.97	-30.03	74.00	56.72	36.56	12.75	62.06	300	0 Peak	HORIZONTAL																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																														
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																																
1	4875.00	43.97	-30.08	74.00	60.71	34.66	10.32	61.77	100	0 Peak	VERTICAL																																																																											
2	7305.00	44.08	-29.92	74.00	56.83	36.56	12.75	62.06	100	0 Peak	VERTICAL																																																																											



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																													
ANT	802.11g CH11 2462MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00218643 HORIZONTAL Project : R8W-1000-000MHz VBR-3000-000MHz SRT-Auto Mode : FR102106-01 Plane : 25 Power setting : Full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1 4920.00</td> <td>46.90</td> <td>-22.10</td> <td>74.00</td> <td>63.53</td> <td>34.72</td> <td>10.39</td> <td>61.74</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> <tr> <td>2 7380.00</td> <td>43.94</td> <td>-30.06</td> <td>74.00</td> <td>56.61</td> <td>36.58</td> <td>12.81</td> <td>62.06</td> <td>100</td> <td>300 Peak HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1 4920.00	46.90	-22.10	74.00	63.53	34.72	10.39	61.74	300	0 Peak HORIZONTAL	2 7380.00	43.94	-30.06	74.00	56.61	36.58	12.81	62.06	100	300 Peak HORIZONTAL	<p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00218643 VERTICAL Project : R8W-1000-000MHz VBR-3000-000MHz SRT-Auto Mode : FR102106-01 Plane : 25 Power setting : Full-directivity</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> </thead> <tbody> <tr> <td>1 4920.00</td> <td>44.85</td> <td>-29.15</td> <td>74.00</td> <td>61.48</td> <td>34.72</td> <td>10.39</td> <td>61.74</td> <td>300</td> <td>0 Peak VERTICAL</td> </tr> <tr> <td>2 7380.00</td> <td>43.59</td> <td>-30.41</td> <td>74.00</td> <td>56.26</td> <td>36.58</td> <td>12.81</td> <td>62.06</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	1 4920.00	44.85	-29.15	74.00	61.48	34.72	10.39	61.74	300	0 Peak VERTICAL	2 7380.00	43.59	-30.41	74.00	56.26	36.58	12.81	62.06	100	0 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
1 4920.00	46.90	-22.10	74.00	63.53	34.72	10.39	61.74	300	0 Peak HORIZONTAL																																																					
2 7380.00	43.94	-30.06	74.00	56.61	36.58	12.81	62.06	100	300 Peak HORIZONTAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
1 4920.00	44.85	-29.15	74.00	61.48	34.72	10.39	61.74	300	0 Peak VERTICAL																																																					
2 7380.00	43.59	-30.41	74.00	56.26	36.58	12.81	62.06	100	0 Peak VERTICAL																																																					



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																												
ANT	802.11g CH12 2467MHz																																																																																												
1	Horizontal	Vertical																																																																																											
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117.5M 00218643 HORIZONTAL Project : FR102106-01 Mode : 27 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4932.00</td> <td>43.34</td> <td>-30.66</td> <td>74.00</td> <td>59.94</td> <td>34.75</td> <td>10.39</td> <td>61.74</td> <td>100</td> <td>360</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7404.00</td> <td>43.09</td> <td>-30.91</td> <td>74.00</td> <td>55.73</td> <td>36.58</td> <td>12.85</td> <td>62.07</td> <td>100</td> <td>360</td> <td>0</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor			1	4932.00	43.34	-30.66	74.00	59.94	34.75	10.39	61.74	100	360	0	Peak	HORIZONTAL	2	7404.00	43.09	-30.91	74.00	55.73	36.58	12.85	62.07	100	360	0	Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117.5M 00218643 VERTICAL Project : FR102106-01 Mode : 27 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4932.00</td> <td>43.31</td> <td>-30.69</td> <td>74.00</td> <td>59.91</td> <td>34.75</td> <td>10.39</td> <td>61.74</td> <td>300</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7404.00</td> <td>42.25</td> <td>-31.75</td> <td>74.00</td> <td>54.89</td> <td>36.58</td> <td>12.85</td> <td>62.07</td> <td>100</td> <td>360</td> <td>0</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor			1	4932.00	43.31	-30.69	74.00	59.91	34.75	10.39	61.74	300	0	Peak	VERTICAL	2	7404.00	42.25	-31.75	74.00	54.89	36.58	12.85	62.07	100	360	0	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																							
1	4932.00	43.34	-30.66	74.00	59.94	34.75	10.39	61.74	100	360	0	Peak	HORIZONTAL																																																																																
2	7404.00	43.09	-30.91	74.00	55.73	36.58	12.85	62.07	100	360	0	Peak	HORIZONTAL																																																																																
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																							
1	4932.00	43.31	-30.69	74.00	59.91	34.75	10.39	61.74	300	0	Peak	VERTICAL																																																																																	
2	7404.00	42.25	-31.75	74.00	54.89	36.58	12.85	62.07	100	360	0	Peak	VERTICAL																																																																																



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																									
ANT	802.11g CH13 2472MHz																																																																																									
1	Horizontal	Vertical																																																																																								
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030902-AS Condition : FCC PART 15C 3m 3117.5M 00218643 HORIZONTAL Project : FR102106-01 Mode : 28 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity Powersetting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4950.00</td> <td>40.77</td> <td>-33.23</td> <td>74.00</td> <td>57.31</td> <td>34.78</td> <td>10.41</td> <td>65.73</td> <td>100</td> <td>300 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2 7476.00</td> <td>43.05</td> <td>-30.95</td> <td>74.00</td> <td>55.69</td> <td>36.58</td> <td>12.85</td> <td>62.07</td> <td>100</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	dB	cm	deg			1 4950.00	40.77	-33.23	74.00	57.31	34.78	10.41	65.73	100	300 Peak	HORIZONTAL	2 7476.00	43.05	-30.95	74.00	55.69	36.58	12.85	62.07	100	0 Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030902-AS Condition : FCC PART 15C 3m 3117.5M 00218643 VERTICAL Project : FR102106-01 Mode : 28 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity Powersetting : 9</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/1m</th> <th>dB</th> <th>dBm/1m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 4944.00</td> <td>41.04</td> <td>-32.96</td> <td>74.00</td> <td>57.58</td> <td>34.78</td> <td>10.41</td> <td>61.73</td> <td>100</td> <td>300 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2 7410.00</td> <td>42.27</td> <td>-31.73</td> <td>74.00</td> <td>54.91</td> <td>36.58</td> <td>12.85</td> <td>62.07</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/1m	dB	dBm/1m	dB	dB	dB	cm	deg			1 4944.00	41.04	-32.96	74.00	57.58	34.78	10.41	61.73	100	300 Peak	VERTICAL	2 7410.00	42.27	-31.73	74.00	54.91	36.58	12.85	62.07	100	0 Peak	VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																															
MHz	dBm/1m	dB	dBm/1m	dB	dB	dB	cm	deg																																																																																		
1 4950.00	40.77	-33.23	74.00	57.31	34.78	10.41	65.73	100	300 Peak	HORIZONTAL																																																																																
2 7476.00	43.05	-30.95	74.00	55.69	36.58	12.85	62.07	100	0 Peak	HORIZONTAL																																																																																
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
MHz	dBm/1m	dB	dBm/1m	dB	dB	dB	cm	deg																																																																																		
1 4944.00	41.04	-32.96	74.00	57.58	34.78	10.41	61.73	100	300 Peak	VERTICAL																																																																																
2 7410.00	42.27	-31.73	74.00	54.91	36.58	12.85	62.07	100	0 Peak	VERTICAL																																																																																



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20(ANT 1) (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																													
ANT	802.11n HT20 CH01 2412MHz																																																													
1	Horizontal	Vertical																																																												
Peak Avg.	<p>No. 1098, Pengji North Road, Kunshan Economic & Technological Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D06-KS Condition : FCC PART 15C 3m 3117 SW 0018A2 HORIZONTAL Project : RSM 1000, 5000Hz VBR 3000, 000Hz SRT Auto Mode : 29 PWR : 0.12 E1F-BASE1 Plane : Z Full-directivity : Z Power setting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>43.12</td> <td>-30.88</td> <td>74.00</td> <td>40.10</td> <td>34.57</td> <td>10.26</td> <td>63.81</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB	1	4830.00	43.12	-30.88	74.00	40.10	34.57	10.26	63.81	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengji North Road, Kunshan Economic & Technological Development Zone, Jiangsu, China Tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 03D06-KS Condition : FCC PART 15C 3m 3117 SW 0018A2 VERTICAL Project : RSM 1000, 5000Hz VBR 3000, 000Hz SRT Auto Mode : 29 PWR : 0.12 E1F-BASE1 Plane : Z Full-directivity : Z Power setting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4830.00</td> <td>42.44</td> <td>-31.56</td> <td>74.00</td> <td>59.42</td> <td>34.57</td> <td>10.26</td> <td>61.81</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB	1	4830.00	42.44	-31.56	74.00	59.42	34.57	10.26	61.81	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB																																																						
1	4830.00	43.12	-30.88	74.00	40.10	34.57	10.26	63.81	300	0 Peak	HORIZONTAL																																																			
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Level	Level	Level	Factor	Loss Factor	dB	dB	dB	dB																																																						
1	4830.00	42.44	-31.56	74.00	59.42	34.57	10.26	61.81	100	0 Peak	VERTICAL																																																			



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	802.11n HT20 CH06 2437MHz																																																																																					
1	Horizontal	Vertical																																																																																				
Peak Avg.	<p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00218643 HORIZONTAL Project : FR102106-01 Mode : 30 MSE1 : #12 E1F-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>43.83</td> <td>-30.17</td> <td>74.00</td> <td>40.62</td> <td>34.66</td> <td>10.32</td> <td>65.77</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7305.00</td> <td>44.05</td> <td>-29.95</td> <td>74.00</td> <td>56.80</td> <td>36.56</td> <td>12.75</td> <td>62.06</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Loss	Factor	cn	deg	1	4875.00	43.83	-30.17	74.00	40.62	34.66	10.32	65.77	300	0 Peak	HORIZONTAL	2	7305.00	44.05	-29.95	74.00	56.80	36.56	12.75	62.06	300	0 Peak	HORIZONTAL	<p>Site : 030906-AS Condition : FCC PART 15C 3m 3117 SW 00218643 VERTICAL Project : FR102106-01 Mode : 30 MSE1 : #12 E1F-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Level</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4875.00</td> <td>43.08</td> <td>-30.92</td> <td>74.00</td> <td>59.87</td> <td>34.66</td> <td>10.32</td> <td>61.77</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7305.00</td> <td>43.69</td> <td>-30.31</td> <td>74.00</td> <td>56.44</td> <td>36.56</td> <td>12.75</td> <td>62.06</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Level	Level	Factor	Loss	Factor	cn	deg	1	4875.00	43.08	-30.92	74.00	59.87	34.66	10.32	61.77	100	0 Peak	VERTICAL	2	7305.00	43.69	-30.31	74.00	56.44	36.56	12.75	62.06	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																													
Freq	Level	Level	Level	Factor	Loss	Factor	cn	deg																																																																														
1	4875.00	43.83	-30.17	74.00	40.62	34.66	10.32	65.77	300	0 Peak	HORIZONTAL																																																																											
2	7305.00	44.05	-29.95	74.00	56.80	36.56	12.75	62.06	300	0 Peak	HORIZONTAL																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																														
Freq	Level	Level	Level	Factor	Loss	Factor	cn	deg																																																																														
1	4875.00	43.08	-30.92	74.00	59.87	34.66	10.32	61.77	100	0 Peak	VERTICAL																																																																											
2	7305.00	43.69	-30.31	74.00	56.44	36.56	12.75	62.06	100	0 Peak	VERTICAL																																																																											



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																					
ANT	802.11n HT20 CH11 2462MHz																																																																																					
1	Horizontal	Vertical																																																																																				
Peak Avg.	<p>Site : 030902-AS Condition : FCC PART 15C 3m 3117 SW 00218643 HORIZONTAL Project : FR102106-01 Mode : 31 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>44.96</td> <td>-29.04</td> <td>74.00</td> <td>61.59</td> <td>34.72</td> <td>10.39</td> <td>61.74</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7380.00</td> <td>43.64</td> <td>-30.36</td> <td>74.00</td> <td>56.31</td> <td>36.58</td> <td>12.81</td> <td>62.06</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	4920.00	44.96	-29.04	74.00	61.59	34.72	10.39	61.74	300	0 Peak	HORIZONTAL	2	7380.00	43.64	-30.36	74.00	56.31	36.58	12.81	62.06	300	0 Peak	HORIZONTAL	<p>Site : 030902-AS Condition : FCC PART 15C 3m 3117 SW 00218643 VERTICAL Project : FR102106-01 Mode : 31 MEI : #12 E1F-BASE1 Plane : 2 Full-directivity : 15 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4920.00</td> <td>44.10</td> <td>-29.90</td> <td>74.00</td> <td>60.73</td> <td>34.72</td> <td>10.39</td> <td>61.74</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7380.00</td> <td>43.66</td> <td>-30.34</td> <td>74.00</td> <td>56.33</td> <td>36.58</td> <td>12.81</td> <td>62.06</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg	1	4920.00	44.10	-29.90	74.00	60.73	34.72	10.39	61.74	100	0 Peak	VERTICAL	2	7380.00	43.66	-30.34	74.00	56.33	36.58	12.81	62.06	100	0 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																													
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																																														
1	4920.00	44.96	-29.04	74.00	61.59	34.72	10.39	61.74	300	0 Peak	HORIZONTAL																																																																											
2	7380.00	43.64	-30.36	74.00	56.31	36.58	12.81	62.06	300	0 Peak	HORIZONTAL																																																																											
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																														
Freq	Level	Line	Level	Factor	Loss	Factor	cn	deg																																																																														
1	4920.00	44.10	-29.90	74.00	60.73	34.72	10.39	61.74	100	0 Peak	VERTICAL																																																																											
2	7380.00	43.66	-30.34	74.00	56.33	36.58	12.81	62.06	100	0 Peak	VERTICAL																																																																											



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																					
ANT	802.11n HT20 CH12 2462MHz																																																																																																					
1	Horizontal	Vertical																																																																																																				
Peak Avg.	<div style="display: flex; justify-content: space-around;"> <div style="width: 48%;"> <p>Horizontal Data:</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>MEI</th> <th>Plane</th> </tr> </thead> <tbody> <tr> <td>030906-AS</td> <td>FCC PART 15C 3m 3117 SW 00218643 HORIZONTAL</td> <td>FR102106-01</td> <td>37</td> <td>#12 E1F-BASE1</td> <td>2</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4935.00</td> <td>43.71</td> <td>-30.29</td> <td>74.00</td> <td>60.31</td> <td>34.75</td> <td>10.39</td> <td>61.74</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> <tr> <td>2 7395.00</td> <td>43.20</td> <td>-30.80</td> <td>74.00</td> <td>55.86</td> <td>36.58</td> <td>12.83</td> <td>62.07</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Vertical Data:</p> <table border="1"> <thead> <tr> <th>Site</th> <th>Condition</th> <th>Project</th> <th>Mode</th> <th>MEI</th> <th>Plane</th> </tr> </thead> <tbody> <tr> <td>030906-AS</td> <td>FCC PART 15C 3m 3117 SW 00218643 VERTICAL</td> <td>FR102106-01</td> <td>37</td> <td>#12 E1F-BASE1</td> <td>2</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 4935.00</td> <td>42.66</td> <td>-31.34</td> <td>74.00</td> <td>59.26</td> <td>34.75</td> <td>10.39</td> <td>61.74</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> <tr> <td>2 7395.00</td> <td>44.16</td> <td>-29.84</td> <td>74.00</td> <td>56.82</td> <td>36.58</td> <td>12.83</td> <td>62.07</td> <td>100</td> <td>0 Peak VERTICAL</td> </tr> </tbody> </table> </div> </div>		Site	Condition	Project	Mode	MEI	Plane	030906-AS	FCC PART 15C 3m 3117 SW 00218643 HORIZONTAL	FR102106-01	37	#12 E1F-BASE1	2	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor	dB	dB	cm	deg	1 4935.00	43.71	-30.29	74.00	60.31	34.75	10.39	61.74	300	0 Peak HORIZONTAL	2 7395.00	43.20	-30.80	74.00	55.86	36.58	12.83	62.07	300	0 Peak HORIZONTAL	Site	Condition	Project	Mode	MEI	Plane	030906-AS	FCC PART 15C 3m 3117 SW 00218643 VERTICAL	FR102106-01	37	#12 E1F-BASE1	2	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor	dB	dB	cm	deg	1 4935.00	42.66	-31.34	74.00	59.26	34.75	10.39	61.74	100	0 Peak VERTICAL	2 7395.00	44.16	-29.84	74.00	56.82	36.58	12.83	62.07	100	0 Peak VERTICAL
Site	Condition	Project	Mode	MEI	Plane																																																																																																	
030906-AS	FCC PART 15C 3m 3117 SW 00218643 HORIZONTAL	FR102106-01	37	#12 E1F-BASE1	2																																																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																														
Freq	Level	Limit	Level Factor	Loss Factor	dB	dB	cm	deg																																																																																														
1 4935.00	43.71	-30.29	74.00	60.31	34.75	10.39	61.74	300	0 Peak HORIZONTAL																																																																																													
2 7395.00	43.20	-30.80	74.00	55.86	36.58	12.83	62.07	300	0 Peak HORIZONTAL																																																																																													
Site	Condition	Project	Mode	MEI	Plane																																																																																																	
030906-AS	FCC PART 15C 3m 3117 SW 00218643 VERTICAL	FR102106-01	37	#12 E1F-BASE1	2																																																																																																	
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																														
Freq	Level	Limit	Level Factor	Loss Factor	dB	dB	cm	deg																																																																																														
1 4935.00	42.66	-31.34	74.00	59.26	34.75	10.39	61.74	100	0 Peak VERTICAL																																																																																													
2 7395.00	44.16	-29.84	74.00	56.82	36.58	12.83	62.07	100	0 Peak VERTICAL																																																																																													



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																									
ANT	802.11n HT20 CH13 2472MHz																																																																																									
1	Horizontal	Vertical																																																																																								
Peak Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117.5M 00218643 HORIZONTAL RBM: 1000.000KHz VBR: 3000.000KHz SRT: Auto Project : FR102106-01 Mode : 33 BEC1 : E1F-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Power setting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.00</td> <td>42.39</td> <td>-31.61</td> <td>74.00</td> <td>58.93</td> <td>34.78</td> <td>10.41</td> <td>61.73</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7410.00</td> <td>43.58</td> <td>-30.42</td> <td>74.00</td> <td>56.22</td> <td>36.58</td> <td>12.85</td> <td>62.07</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Power setting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	4950.00	42.39	-31.61	74.00	58.93	34.78	10.41	61.73	300	0 Peak	HORIZONTAL	2	7410.00	43.58	-30.42	74.00	56.22	36.58	12.85	62.07	300	0 Peak	HORIZONTAL	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900958 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 030906-AS Condition : FCC PART 15C 3m 3117.5M 00218643 VERTICAL RBM: 1000.000KHz VBR: 3000.000KHz SRT: Auto Project : FR102106-01 Mode : 33 BEC1 : E1F-BASE1 Plane : 2 Full-directivity : 0</p> <table border="1"> <thead> <tr> <th>Power setting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4950.00</td> <td>42.12</td> <td>-31.88</td> <td>74.00</td> <td>58.66</td> <td>34.78</td> <td>10.41</td> <td>61.73</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>7410.00</td> <td>44.56</td> <td>-29.44</td> <td>74.00</td> <td>57.20</td> <td>36.58</td> <td>12.85</td> <td>62.07</td> <td>100</td> <td>0 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Power setting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	4950.00	42.12	-31.88	74.00	58.66	34.78	10.41	61.73	100	0 Peak	VERTICAL	2	7410.00	44.56	-29.44	74.00	57.20	36.58	12.85	62.07	100	0 Peak	VERTICAL
	Power setting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																																	
1	4950.00	42.39	-31.61	74.00	58.93	34.78	10.41	61.73	300	0 Peak	HORIZONTAL																																																																															
2	7410.00	43.58	-30.42	74.00	56.22	36.58	12.85	62.07	300	0 Peak	HORIZONTAL																																																																															
Power setting	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																	
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																																	
1	4950.00	42.12	-31.88	74.00	58.66	34.78	10.41	61.73	100	0 Peak	VERTICAL																																																																															
2	7410.00	44.56	-29.44	74.00	57.20	36.58	12.85	62.07	100	0 Peak	VERTICAL																																																																															

Note: Pre-scanned for 18GHz to 26GHz, there are no signals, thus only test data below 18GHz are shown in the report.

2.4GHz 2400~2483.5MHz
WIFI 802.11b(ANT 2) (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH01 2412MHz																																																											
2	Horizontal	Fundamental																																																										
Peak	<p>Site : 030806-KS Condition : FCC PART 15C 3a 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu, China Project : RSM 1000, 000MHz VSW 3000, 000kHz SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Z Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2374.09</td> <td>54.12</td> <td>-19.88</td> <td>74.00</td> <td>48.99</td> <td>30.88</td> <td>7.13</td> <td>32.88</td> <td>206</td> <td>43</td> <td>Peak</td> <td>HORI20MT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cn	deg		1	2374.09	54.12	-19.88	74.00	48.99	30.88	7.13	32.88	206	43	Peak	HORI20MT	<p>Site : 030806-KS Condition : FCC PART 15C 3a 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu, China Project : RSM 1000, 000MHz VSW 3000, 000kHz SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Z Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>101.30</td> <td>27.30</td> <td>74.00</td> <td>95.96</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>206</td> <td>43</td> <td>Peak</td> <td>HORI20MT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cn	deg		1	2412.00	101.30	27.30	74.00	95.96	31.00	7.18	32.84	206	43	Peak	HORI20MT
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
Freq	Level	Line	Level Factor	Loss Factor	cn	deg																																																						
1	2374.09	54.12	-19.88	74.00	48.99	30.88	7.13	32.88	206	43	Peak	HORI20MT																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level Factor	Loss Factor	cn	deg																																																						
1	2412.00	101.30	27.30	74.00	95.96	31.00	7.18	32.84	206	43	Peak	HORI20MT																																																
Avg.	<p>Site : 030806-KS Condition : FCC PART 15C (AVG) 3a 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu, China Project : RSM 1000, 000MHz VSW 0, 01000kHz SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Z Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.09</td> <td>42.94</td> <td>-11.06</td> <td>54.00</td> <td>37.72</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>206</td> <td>43</td> <td>Average</td> <td>HORI20MT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cn	deg		1	2387.09	42.94	-11.06	54.00	37.72	30.94	7.16	32.88	206	43	Average	HORI20MT	<p>Site : 030806-KS Condition : FCC PART 15C (AVG) 3a 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu, China Project : RSM 1000, 000MHz VSW 0, 01000kHz SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Z Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level Factor</th> <th>Loss Factor</th> <th>cn</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>98.12</td> <td>44.12</td> <td>54.00</td> <td>92.78</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>206</td> <td>43</td> <td>Average</td> <td>HORI20MT</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level Factor	Loss Factor	cn	deg		1	2410.00	98.12	44.12	54.00	92.78	31.00	7.18	32.84	206	43	Average	HORI20MT
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
Freq	Level	Line	Level Factor	Loss Factor	cn	deg																																																						
1	2387.09	42.94	-11.06	54.00	37.72	30.94	7.16	32.88	206	43	Average	HORI20MT																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
Freq	Level	Line	Level Factor	Loss Factor	cn	deg																																																						
1	2410.00	98.12	44.12	54.00	92.78	31.00	7.18	32.84	206	43	Average	HORI20MT																																																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11b CH01 2412MHz																																																																											
2	Vertical	Fundamental																																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto IMEI : (FR)102106-01 Mode : 34 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2365.77</td> <td>54.28</td> <td>-19.72</td> <td>74.00</td> <td>49.23</td> <td>30.83</td> <td>7.10</td> <td>32.88</td> <td>335</td> <td>130</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	cn deg	1	2365.77	54.28	-19.72	74.00	49.23	30.83	7.10	32.88	335	130	Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto IMEI : (FR)102106-01 Mode : 34 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>104.59</td> <td>30.59</td> <td>74.00</td> <td>99.25</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>335</td> <td>130</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	cn deg	1	2412.00	104.59	30.59	74.00	99.25	31.00	7.18	32.84	335	130	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	cn deg																																																																					
1	2365.77	54.28	-19.72	74.00	49.23	30.83	7.10	32.88	335	130	Peak	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	cn deg																																																																					
1	2412.00	104.59	30.59	74.00	99.25	31.00	7.18	32.84	335	130	Peak	VERTICAL																																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto IMEI : (FR)102106-01 Mode : 34 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.96</td> <td>43.39</td> <td>-10.61</td> <td>54.00</td> <td>38.17</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>335</td> <td>130</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	cn deg	1	2386.96	43.39	-10.61	54.00	38.17	30.94	7.16	32.88	335	130	Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto IMEI : (FR)102106-01 Mode : 34 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>101.59</td> <td>47.59</td> <td>54.00</td> <td>96.25</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>335</td> <td>130</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	cn deg	1	2414.00	101.59	47.59	54.00	96.25	31.00	7.18	32.84	335	130	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	cn deg																																																																					
1	2386.96	43.39	-10.61	54.00	38.17	30.94	7.16	32.88	335	130	Average	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	cn deg																																																																					
1	2414.00	101.59	47.59	54.00	96.25	31.00	7.18	32.84	335	130	Average	VERTICAL																																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11b CH06 2437MHz - L																																																																													
2	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2386.05</td> <td>53.84</td> <td>-20.16</td> <td>74.00</td> <td>48.62</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>102</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2386.05	53.84	-20.16	74.00	48.62	30.94	7.16	32.88	102	123	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>105.16</td> <td>31.16</td> <td>74.00</td> <td>99.66</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>102</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2436.00	105.16	31.16	74.00	99.66	31.07	7.20	32.77	102	123	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2386.05	53.84	-20.16	74.00	48.62	30.94	7.16	32.88	102	123	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2436.00	105.16	31.16	74.00	99.66	31.07	7.20	32.77	102	123	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>42.82</td> <td>-11.18</td> <td>54.00</td> <td>37.60</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>102</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2389.30	42.82	-11.18	54.00	37.60	30.94	7.16	32.88	102	123	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2438.00</td> <td>102.06</td> <td>48.00</td> <td>54.00</td> <td>96.53</td> <td>31.07</td> <td>7.23</td> <td>32.77</td> <td>102</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2438.00	102.06	48.00	54.00	96.53	31.07	7.23	32.77	102	123	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2389.30	42.82	-11.18	54.00	37.60	30.94	7.16	32.88	102	123	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2438.00	102.06	48.00	54.00	96.53	31.07	7.23	32.77	102	123	Average	HORIZONTAL																																																																		

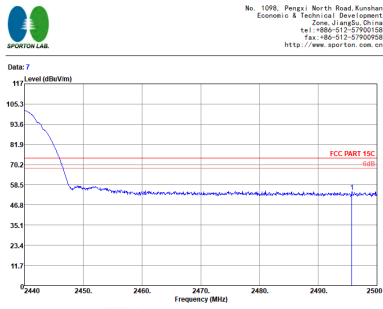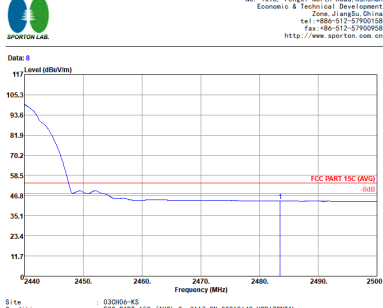

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																														
ANT	802.11b CH06 2437MHz - R																														
2	Horizontal	Fundamental																													
Peak	 <p>Site : 032005-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW:3000.000kHz SW:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : X Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2495.74</td> <td>54.46</td> <td>-19.54</td> <td>74.00</td> <td>48.56</td> <td>31.17</td> <td>7.30</td> <td>32.57</td> <td>102</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2495.74	54.46	-19.54	74.00	48.56	31.17	7.30	32.57	102	123	Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																								
1	2495.74	54.46	-19.54	74.00	48.56	31.17	7.30	32.57	102	123	Peak	HORIZONTAL																			
Avg.	 <p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VSW:0.0100dB SW:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : X Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>43.60</td> <td>-10.40</td> <td>54.00</td> <td>37.84</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>102</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2483.50	43.60	-10.40	54.00	37.84	31.13	7.27	32.64	102	123	Average	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																								
1	2483.50	43.60	-10.40	54.00	37.84	31.13	7.27	32.64	102	123	Average	HORIZONTAL																			



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH06 2437MHz - L																																																													
2	Vertical	Fundamental																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 RBE : 1000.000MHz VBR:3000.000kHz SRT:Auto Mode : 35 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2382.41</td> <td>54.50</td> <td>-19.50</td> <td>74.00</td> <td>49.37</td> <td>30.88</td> <td>7.13</td> <td>32.88</td> <td>384</td> <td>45 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	cm	deg			1 2382.41	54.50	-19.50	74.00	49.37	30.88	7.13	32.88	384	45 Peak VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 RBE : 1000.000MHz VBR:3000.000kHz SRT:Auto Mode : 35 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2438.00</td> <td>104.95</td> <td>30.95</td> <td>74.00</td> <td>99.42</td> <td>31.07</td> <td>7.23</td> <td>32.77</td> <td>384</td> <td>45 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	cm	deg			1 * 2438.00	104.95	30.95	74.00	99.42	31.07	7.23	32.77	384	45 Peak VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	dB	cm	deg																																																							
1 2382.41	54.50	-19.50	74.00	49.37	30.88	7.13	32.88	384	45 Peak VERTICAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	dB	cm	deg																																																							
1 * 2438.00	104.95	30.95	74.00	99.42	31.07	7.23	32.77	384	45 Peak VERTICAL																																																					
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 RBE : 1000.000MHz VBR:0.01000MHz SRT:Auto Mode : 35 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2387.87</td> <td>42.74</td> <td>-11.26</td> <td>54.00</td> <td>37.52</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>384</td> <td>45 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	cm	deg			1 2387.87	42.74	-11.26	54.00	37.52	30.94	7.16	32.88	384	45 Average VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 RBE : 1000.000MHz VBR:0.01000MHz SRT:Auto Mode : 35 MEI : #12 EIF-BASE1 Plane : X Full-directivity : X Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2438.00</td> <td>101.91</td> <td>47.91</td> <td>54.00</td> <td>96.38</td> <td>31.07</td> <td>7.23</td> <td>32.77</td> <td>384</td> <td>45 Average VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dB	cm	deg			1 * 2438.00	101.91	47.91	54.00	96.38	31.07	7.23	32.77	384	45 Average VERTICAL
	Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBm	dBm	dBm	dBm	dB	cm	deg																																																							
1 2387.87	42.74	-11.26	54.00	37.52	30.94	7.16	32.88	384	45 Average VERTICAL																																																					
Freq	Level	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBm	dBm	dBm	dBm	dB	cm	deg																																																							
1 * 2438.00	101.91	47.91	54.00	96.38	31.07	7.23	32.77	384	45 Average VERTICAL																																																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																
ANT	802.11b CH06 2437MHz - R																																
2	Vertical	Fundamental																															
<p>Peak</p>	<p>Site : 032005-KS Condition : FCC PART 15C 3m 3117 SN 00218643 VERTICAL Project : RRM 1000.000MHz VSW:3000.000kHz SRT:Auto Model : FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2497.42</td> <td>54.50</td> <td>-19.50</td> <td>74.00</td> <td>48.60</td> <td>31.17</td> <td>7.30</td> <td>32.57</td> <td>384</td> <td>45</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	2497.42	54.50	-19.50	74.00	48.60	31.17	7.30	32.57	384	45	Peak	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																										
1	2497.42	54.50	-19.50	74.00	48.60	31.17	7.30	32.57	384	45	Peak	VERTICAL																					
<p>Avg.</p>	<p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Project : RRM 1000.000MHz VSW:0.0100kHz SRT:Auto Model : FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : X Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2491.60</td> <td>43.38</td> <td>-10.62</td> <td>54.00</td> <td>37.55</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>384</td> <td>45</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg		1	2491.60	43.38	-10.62	54.00	37.55	31.17	7.30	32.64	384	45	Average	VERTICAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	cm	deg																										
1	2491.60	43.38	-10.62	54.00	37.55	31.17	7.30	32.64	384	45	Average	VERTICAL																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH11 2462MHz																																																											
2	Horizontal	Fundamental																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : (FR) 102106-01 MEI : 35 Plane : #12 EIF-BASE1 Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.72</td> <td>55.09</td> <td>-18.91</td> <td>74.00</td> <td>49.19</td> <td>31.17</td> <td>7.30</td> <td>32.57</td> <td>100</td> <td>127</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2494.72	55.09	-18.91	74.00	49.19	31.17	7.30	32.57	100	127	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : (FR) 102106-01 MEI : 35 Plane : #12 EIF-BASE1 Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.24</td> <td>31.24</td> <td>74.00</td> <td>99.60</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>100</td> <td>127</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2462.00	105.24	31.24	74.00	99.60	31.10	7.25	32.71	100	127	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2494.72	55.09	-18.91	74.00	49.19	31.17	7.30	32.57	100	127	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2462.00	105.24	31.24	74.00	99.60	31.10	7.25	32.71	100	127	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.01000kHz SRT Auto Mode : (FR) 102106-01 MEI : 35 Plane : #12 EIF-BASE1 Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.40</td> <td>43.86</td> <td>-10.14</td> <td>54.00</td> <td>38.06</td> <td>31.17</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>127</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2487.40	43.86	-10.14	54.00	38.06	31.17	7.27	32.64	100	127	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.01000kHz SRT Auto Mode : (FR) 102106-01 MEI : 35 Plane : #12 EIF-BASE1 Powersetting : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>102.24</td> <td>48.24</td> <td>54.00</td> <td>96.60</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>100</td> <td>127</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2464.00	102.24	48.24	54.00	96.60	31.10	7.25	32.71	100	127	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2487.40	43.86	-10.14	54.00	38.06	31.17	7.27	32.64	100	127	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2464.00	102.24	48.24	54.00	96.60	31.10	7.25	32.71	100	127	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11b CH11 2462MHz																																																																											
2	Vertical	Fundamental																																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.58</td> <td>54.79</td> <td>-19.21</td> <td>74.00</td> <td>48.96</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>379</td> <td>32</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	deg	1	2490.58	54.79	-19.21	74.00	48.96	31.17	7.30	32.64	379	32	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>103.80</td> <td>29.80</td> <td>74.00</td> <td>98.16</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>379</td> <td>32</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	deg	1	2462.00	103.80	29.80	74.00	98.16	31.10	7.25	32.71	379	32	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	deg																																																																					
1	2490.58	54.79	-19.21	74.00	48.96	31.17	7.30	32.64	379	32	Peak	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	deg																																																																					
1	2462.00	103.80	29.80	74.00	98.16	31.10	7.25	32.71	379	32	Peak	VERTICAL																																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>43.64</td> <td>-10.36</td> <td>54.00</td> <td>37.88</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>379</td> <td>32</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	deg	1	2483.50	43.64	-10.36	54.00	37.88	31.13	7.27	32.64	379	32	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 35 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>100.66</td> <td>46.66</td> <td>54.00</td> <td>95.02</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>379</td> <td>32</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBm	dB	dBm	dB	dB	dB	deg	1	2462.00	100.66	46.66	54.00	95.02	31.10	7.25	32.71	379	32	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	deg																																																																					
1	2483.50	43.64	-10.36	54.00	37.88	31.13	7.27	32.64	379	32	Average	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																						
MHz	dBm	dB	dBm	dB	dB	dB	deg																																																																					
1	2462.00	100.66	46.66	54.00	95.02	31.10	7.25	32.71	379	32	Average	VERTICAL																																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11b CH12 2467MHz																																																																													
2	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>56.97</td> <td>-17.03</td> <td>74.00</td> <td>51.21</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>158</td> <td>125</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg	1	2483.50	56.97	-17.03	74.00	51.21	31.13	7.27	32.64	158	125	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>105.82</td> <td>31.82</td> <td>74.00</td> <td>100.18</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>158</td> <td>125</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg	1	2466.00	105.82	31.82	74.00	100.18	31.10	7.25	32.71	158	125	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg																																																																						
1	2483.50	56.97	-17.03	74.00	51.21	31.13	7.27	32.64	158	125	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg																																																																						
1	2466.00	105.82	31.82	74.00	100.18	31.10	7.25	32.71	158	125	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.80</td> <td>46.61</td> <td>-7.39</td> <td>54.00</td> <td>40.85</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>158</td> <td>125</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg	1	2483.80	46.61	-7.39	54.00	40.85	31.13	7.27	32.64	158	125	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : full-directivity Powersetting : 17</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>102.64</td> <td>48.64</td> <td>54.00</td> <td>97.00</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>158</td> <td>125</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg	1	2466.00	102.64	48.64	54.00	97.00	31.10	7.25	32.71	158	125	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg																																																																						
1	2483.80	46.61	-7.39	54.00	40.85	31.13	7.27	32.64	158	125	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBV/m	dB	dBV/m	dBV/m	dB	dB	cn	deg																																																																						
1	2466.00	102.64	48.64	54.00	97.00	31.10	7.25	32.71	158	125	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11b CH12 2467MHz																																																													
2	Vertical	Fundamental																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000MHz VBR, 3000, 000kHz SRT:Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : X full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.04</td> <td>55.43</td> <td>-18.57</td> <td>74.00</td> <td>49.67</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>378</td> <td>35 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2484.04	55.43	-18.57	74.00	49.67	31.13	7.27	32.64	378	35 Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000MHz VBR, 3000, 000kHz SRT:Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : X full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>104.14</td> <td>30.14</td> <td>74.00</td> <td>98.50</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>378</td> <td>35 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2466.00	104.14	30.14	74.00	98.50	31.10	7.25	32.71	378	35 Peak	VERTICAL
	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																						
1	2484.04	55.43	-18.57	74.00	49.67	31.13	7.27	32.64	378	35 Peak	VERTICAL																																																			
Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																						
1	2466.00	104.14	30.14	74.00	98.50	31.10	7.25	32.71	378	35 Peak	VERTICAL																																																			
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000MHz VBR, 0, 01000Hz SRT:Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : X full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>46.19</td> <td>-7.91</td> <td>54.00</td> <td>40.43</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>378</td> <td>35 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2483.68	46.19	-7.91	54.00	40.43	31.13	7.27	32.64	378	35 Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM 1000, 0000MHz VBR, 0, 01000Hz SRT:Auto FR102106-01 Mode : 37 MEI : #12 EIF-BASE1 Plane : X full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>101.00</td> <td>47.00</td> <td>54.00</td> <td>95.36</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>378</td> <td>35 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2466.00	101.00	47.00	54.00	95.36	31.10	7.25	32.71	378	35 Average	VERTICAL
	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																						
1	2483.68	46.19	-7.91	54.00	40.43	31.13	7.27	32.64	378	35 Average	VERTICAL																																																			
Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																						
1	2466.00	101.00	47.00	54.00	95.36	31.10	7.25	32.71	378	35 Average	VERTICAL																																																			



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH13 2472MHz																																																											
2	Horizontal	Fundamental																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : FR102106-01 ME1 : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.46</td> <td>58.58</td> <td>-15.42</td> <td>74.00</td> <td>52.82</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>126</td> <td>126</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg	1	2484.46	58.58	-15.42	74.00	52.82	31.13	7.27	32.64	126	126	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : FR102106-01 ME1 : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>105.27</td> <td>31.27</td> <td>74.00</td> <td>99.51</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>126</td> <td>126</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg	1	2472.00	105.27	31.27	74.00	99.51	31.13	7.27	32.64	126	126	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg																																																					
1	2484.46	58.58	-15.42	74.00	52.82	31.13	7.27	32.64	126	126	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg																																																					
1	2472.00	105.27	31.27	74.00	99.51	31.13	7.27	32.64	126	126	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 0.01000kHz SRT Auto Mode : FR102106-01 ME1 : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.58</td> <td>50.89</td> <td>-2.11</td> <td>54.00</td> <td>45.13</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>126</td> <td>126</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg	1	2484.58	50.89	-2.11	54.00	45.13	31.13	7.27	32.64	126	126	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 0.01000kHz SRT Auto Mode : FR102106-01 ME1 : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>deg</th> <th>deg</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2474.00</td> <td>102.10</td> <td>48.10</td> <td>54.00</td> <td>96.34</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>126</td> <td>126</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg	1	2474.00	102.10	48.10	54.00	96.34	31.13	7.27	32.64	126	126	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg																																																					
1	2484.58	50.89	-2.11	54.00	45.13	31.13	7.27	32.64	126	126	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBuV/m	dB	dBuV/m	dB	deg	deg	deg																																																					
1	2474.00	102.10	48.10	54.00	96.34	31.13	7.27	32.64	126	126	Average	HORIZONTAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11b CH13 2472MHz																																																											
2	Vertical	Fundamental																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 38 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.34</td> <td>56.72</td> <td>-12.28</td> <td>74.00</td> <td>50.96</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>373</td> <td>49</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2484.34	56.72	-12.28	74.00	50.96	31.13	7.27	32.64	373	49	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 38 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>104.57</td> <td>30.57</td> <td>74.00</td> <td>98.81</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>373</td> <td>49</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2472.00	104.57	30.57	74.00	98.81	31.13	7.27	32.64	373	49	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2484.34	56.72	-12.28	74.00	50.96	31.13	7.27	32.64	373	49	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2472.00	104.57	30.57	74.00	98.81	31.13	7.27	32.64	373	49	Peak	VERTICAL																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 38 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.58</td> <td>49.26</td> <td>-4.74</td> <td>54.00</td> <td>43.50</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>373</td> <td>49</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2484.58	49.26	-4.74	54.00	43.50	31.13	7.27	32.64	373	49	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 38 MEI : #12 EIF-BASE1 Plane : full-directivity</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>101.36</td> <td>47.36</td> <td>54.00</td> <td>95.62</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>373</td> <td>49</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2470.00	101.36	47.36	54.00	95.62	31.13	7.25	32.64	373	49	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2484.58	49.26	-4.74	54.00	43.50	31.13	7.27	32.64	373	49	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2470.00	101.36	47.36	54.00	95.62	31.13	7.25	32.64	373	49	Average	VERTICAL																																																



2.4GHz 2400~2483.5MHz
WIFI 802.11g(ANT 2) (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.11g CH01 2412MHz																																																																			
2	Horizontal	Fundamental																																																																		
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VSW 3.000 dB SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.56</td> <td>56.42</td> <td>-17.68</td> <td>74.00</td> <td>51.20</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>213</td> <td>125 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg			1	2389.56	56.42	-17.68	74.00	51.20	30.94	7.16	32.88	213	125 Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VSW 3.000 dB SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>105.31</td> <td>31.31</td> <td>74.00</td> <td>99.97</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>213</td> <td>125 Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg			1	2410.00	105.31	31.31	74.00	99.97	31.00	7.18	32.84	213	125 Peak
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg																																																												
1	2389.56	56.42	-17.68	74.00	51.20	30.94	7.16	32.88	213	125 Peak																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg																																																												
1	2410.00	105.31	31.31	74.00	99.97	31.00	7.18	32.84	213	125 Peak																																																										
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VSW 3.000 dB SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>45.93</td> <td>-8.07</td> <td>54.00</td> <td>40.67</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>213</td> <td>125 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg			1	2389.95	45.93	-8.07	54.00	40.67	30.94	7.16	32.84	213	125 Average	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VSW 3.000 dB SRT Auto Mode : (FR) 102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>97.29</td> <td>43.29</td> <td>54.00</td> <td>91.95</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>213</td> <td>125 Average</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg			1	2410.00	97.29	43.29	54.00	91.95	31.00	7.18	32.84	213	125 Average
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg																																																												
1	2389.95	45.93	-8.07	54.00	40.67	30.94	7.16	32.84	213	125 Average																																																										
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																										
MHz	dBm/Vm	dB	dBm/Vm	dBm	dB	dB	on	deg																																																												
1	2410.00	97.29	43.29	54.00	91.95	31.00	7.18	32.84	213	125 Average																																																										



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
ANT	802.11g CH01 2412MHz																																																																					
2	Vertical	Fundamental																																																																				
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 3P MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>58.52</td> <td>-15.48</td> <td>74.00</td> <td>53.26</td> <td>30.94</td> <td>7.16 32.84</td> <td>392 40 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg	1	2389.95	58.52	-15.48	74.00	53.26	30.94	7.16 32.84	392 40 Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 3P MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>104.13</td> <td>30.13</td> <td>74.00</td> <td>98.79</td> <td>31.00</td> <td>7.18 32.84</td> <td>392 40 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg	1	2414.00	104.13	30.13	74.00	98.79	31.00	7.18 32.84	392 40 Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg																																																															
1	2389.95	58.52	-15.48	74.00	53.26	30.94	7.16 32.84	392 40 Peak	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg																																																															
1	2414.00	104.13	30.13	74.00	98.79	31.00	7.18 32.84	392 40 Peak	VERTICAL																																																													
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 3P MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>45.04</td> <td>-8.36</td> <td>54.00</td> <td>40.38</td> <td>30.94</td> <td>7.16 32.84</td> <td>392 40 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg	1	2389.95	45.04	-8.36	54.00	40.38	30.94	7.16 32.84	392 40 Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 3P MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cn deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>96.45</td> <td>42.45</td> <td>54.00</td> <td>91.11</td> <td>31.00</td> <td>7.18 32.84</td> <td>392 40 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor		MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg	1	2414.00	96.45	42.45	54.00	91.11	31.00	7.18 32.84	392 40 Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg																																																															
1	2389.95	45.04	-8.36	54.00	40.38	30.94	7.16 32.84	392 40 Average	VERTICAL																																																													
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																															
Freq	Level	Limit	Level	Factor	Loss	Factor																																																																
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cn deg																																																															
1	2414.00	96.45	42.45	54.00	91.11	31.00	7.18 32.84	392 40 Average	VERTICAL																																																													



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH06 2437MHz - L																																																													
2	Horizontal	Fundamental																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3e 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto Mode : (FR) 102106-01 MEI : 41 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2366.42</td> <td>54.72</td> <td>-19.28</td> <td>74.00</td> <td>49.62</td> <td>30.88</td> <td>7.10</td> <td>32.88</td> <td>100</td> <td>116</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg	1	2366.42	54.72	-19.28	74.00	49.62	30.88	7.10	32.88	100	116	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3e 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto Mode : (FR) 102106-01 MEI : 41 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2438.00</td> <td>105.29</td> <td>31.29</td> <td>74.00</td> <td>99.76</td> <td>31.07</td> <td>7.23</td> <td>32.77</td> <td>100</td> <td>116</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg	1	2438.00	105.29	31.29	74.00	99.76	31.07	7.23	32.77	100	116	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg																																																						
1	2366.42	54.72	-19.28	74.00	49.62	30.88	7.10	32.88	100	116	Peak	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg																																																						
1	2438.00	105.29	31.29	74.00	99.76	31.07	7.23	32.77	100	116	Peak	HORIZONTAL																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3e 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.7500kHz SRT:Auto Mode : (FR) 102106-01 MEI : 41 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>43.64</td> <td>-10.36</td> <td>54.00</td> <td>38.38</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>100</td> <td>116</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg	1	2389.95	43.64	-10.36	54.00	38.38	30.94	7.16	32.84	100	116	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3e 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.7500kHz SRT:Auto Mode : (FR) 102106-01 MEI : 41 Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>97.59</td> <td>43.59</td> <td>54.00</td> <td>92.09</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>100</td> <td>116</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg	1	2436.00	97.59	43.59	54.00	92.09	31.07	7.20	32.77	100	116	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg																																																						
1	2389.95	43.64	-10.36	54.00	38.38	30.94	7.16	32.84	100	116	Average	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBm	dBm	dBm	dBm	dBm	dB	cm	deg																																																						
1	2436.00	97.59	43.59	54.00	92.09	31.07	7.20	32.77	100	116	Average	HORIZONTAL																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																														
ANT	802.11g CH06 2437MHz - R																														
2	Horizontal	Fundamental																													
<p>Peak</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032106-KS Condition : FCC PART 15C 3m 3117 SN 00218643 HORIZONTAL Project : RBE 1000.000MHz VSW:3000.000kHz SW:Auto FR102106-01 Model : 41 Mod : #12 EIF-BASE1 Plane : Z Powersetting : Full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.04</td> <td>55.03</td> <td>-18.97</td> <td>74.00</td> <td>49.20</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>100</td> <td>116</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2490.04	55.03	-18.97	74.00	49.20	31.17	7.30	32.64	100	116	Peak	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																								
1	2490.04	55.03	-18.97	74.00	49.20	31.17	7.30	32.64	100	116	Peak	HORIZONTAL																			
<p>Avg.</p>	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 Fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032106-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218643 HORIZONTAL Project : RBE 1000.000MHz VSW:0.7000kHz SW:Auto FR102106-01 Model : 41 Mod : #12 EIF-BASE1 Plane : Z Powersetting : Full-directivity IS</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.22</td> <td>44.51</td> <td>-9.49</td> <td>54.00</td> <td>38.75</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>100</td> <td>116</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2484.22	44.51	-9.49	54.00	38.75	31.13	7.27	32.64	100	116	Average	HORIZONTAL	<p>Left blank</p>
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																								
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																								
1	2484.22	44.51	-9.49	54.00	38.75	31.13	7.27	32.64	100	116	Average	HORIZONTAL																			



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH06 2437MHz - L																																																													
2	Vertical	Fundamental																																																												
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2337.17</td> <td>54.33</td> <td>-19.67</td> <td>74.00</td> <td>49.45</td> <td>30.77</td> <td>7.07</td> <td>32.96</td> <td>384</td> <td>43</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg	1	2337.17	54.33	-19.67	74.00	49.45	30.77	7.07	32.96	384	43	Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2438.00</td> <td>104.95</td> <td>30.95</td> <td>74.00</td> <td>99.42</td> <td>31.07</td> <td>7.23</td> <td>32.77</td> <td>384</td> <td>42</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg	1	2438.00	104.95	30.95	74.00	99.42	31.07	7.23	32.77	384	42	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																						
1	2337.17	54.33	-19.67	74.00	49.45	30.77	7.07	32.96	384	43	Peak	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																						
1	2438.00	104.95	30.95	74.00	99.42	31.07	7.23	32.77	384	42	Peak	VERTICAL																																																		
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.00</td> <td>43.60</td> <td>-10.40</td> <td>54.00</td> <td>38.38</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>384</td> <td>42</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg	1	2388.00	43.60	-10.40	54.00	38.38	30.94	7.16	32.88	384	42	Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>97.17</td> <td>43.17</td> <td>54.00</td> <td>91.67</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>384</td> <td>42</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg	1	2436.00	97.17	43.17	54.00	91.67	31.07	7.20	32.77	384	42	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																						
1	2388.00	43.60	-10.40	54.00	38.38	30.94	7.16	32.88	384	42	Average	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBV/m	dB	dBV/m	dBV	dB/m	dB	cm	deg																																																						
1	2436.00	97.17	43.17	54.00	91.67	31.07	7.20	32.77	384	42	Average	VERTICAL																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																
ANT	802.11g CH06 2437MHz - R																																
2	Vertical	Fundamental																															
Peak	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : FCC PART 15C 3m 3117 SN 00218643 VERTICAL Project : RRM 1000.000MHz VSW:3000.000kHz SRT:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : # Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2492.32</td> <td>55.03</td> <td>-18.97</td> <td>74.00</td> <td>49.13</td> <td>31.17</td> <td>7.30</td> <td>32.57</td> <td>384</td> <td>43</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg		1	2492.32	55.03	-18.97	74.00	49.13	31.17	7.30	32.57	384	43	Peak	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																										
1	2492.32	55.03	-18.97	74.00	49.13	31.17	7.30	32.57	384	43	Peak	VERTICAL																					
Avg.	<p>No. 1098, Pengzi North Road, Kunshan Economic & Technical Development Zone, Jiangsu China tel: +86-512-57900158 fax: +86-512-57900958 http://www.sporton.com.cn</p> <p>Site : 032065-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Project : RRM 1000.000MHz VSW:0.7000kHz SRT:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : # Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.52</td> <td>44.23</td> <td>-9.77</td> <td>54.00</td> <td>38.40</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>384</td> <td>42</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg		1	2487.52	44.23	-9.77	54.00	38.40	31.17	7.30	32.64	384	42	Average	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																									
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																										
1	2487.52	44.23	-9.77	54.00	38.40	31.17	7.30	32.64	384	42	Average	VERTICAL																					



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11g CH11 2462MHz																																																																													
2	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto IMEI : (FR)102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.62</td> <td>60.36</td> <td>-13.64</td> <td>74.00</td> <td>94.60</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.62	60.36	-13.64	74.00	94.60	31.13	7.27	32.64	106	123	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000KHz, SRT-Auto IMEI : (FR)102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2460.00</td> <td>106.60</td> <td>32.60</td> <td>74.00</td> <td>100.96</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>106</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2460.00	106.60	32.60	74.00	100.96	31.10	7.25	32.71	106	123	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.62	60.36	-13.64	74.00	94.60	31.13	7.27	32.64	106	123	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2460.00	106.60	32.60	74.00	100.96	31.10	7.25	32.71	106	123	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-0, 75000Hz, SRT-Auto IMEI : (FR)102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.79</td> <td>-7.21</td> <td>54.00</td> <td>41.03</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	46.79	-7.21	54.00	41.03	31.13	7.27	32.64	106	123	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-0, 75000Hz, SRT-Auto IMEI : (FR)102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : X Full-directivity : Y Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>98.78</td> <td>44.78</td> <td>54.00</td> <td>93.14</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>106</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.00	98.78	44.78	54.00	93.14	31.10	7.25	32.71	106	123	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	46.79	-7.21	54.00	41.03	31.13	7.27	32.64	106	123	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.00	98.78	44.78	54.00	93.14	31.10	7.25	32.71	106	123	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11g CH11 2462MHz																																																																													
2	Vertical	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.34</td> <td>57.23</td> <td>-16.77</td> <td>74.00</td> <td>51.47</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>371</td> <td>38</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.34	57.23	-16.77	74.00	51.47	31.13	7.27	32.64	371	38	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>103.54</td> <td>29.64</td> <td>74.00</td> <td>97.90</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>371</td> <td>38</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.00	103.54	29.64	74.00	97.90	31.10	7.25	32.71	371	38	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.34	57.23	-16.77	74.00	51.47	31.13	7.27	32.64	371	38	Peak	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.00	103.54	29.64	74.00	97.90	31.10	7.25	32.71	371	38	Peak	VERTICAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>45.77</td> <td>-8.23</td> <td>54.00</td> <td>40.01</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>371</td> <td>38</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.56	45.77	-8.23	54.00	40.01	31.13	7.27	32.64	371	38	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 41 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>95.89</td> <td>41.89</td> <td>54.00</td> <td>90.25</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>371</td> <td>38</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.00	95.89	41.89	54.00	90.25	31.10	7.25	32.71	371	38	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.56	45.77	-8.23	54.00	40.01	31.13	7.27	32.64	371	38	Average	VERTICAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.00	95.89	41.89	54.00	90.25	31.10	7.25	32.71	371	38	Average	VERTICAL																																																																		







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11g CH12 2467MHz																																																																													
2	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-00000-VBR-3000-000KHz-SRT-Auto Mode : FR102106-01 MEI : 42 Plane : #12 EIF-BASE1 Full-directivity : 2</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>60.39</td> <td>-13.61</td> <td>74.00</td> <td>54.63</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>124</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	60.39	-13.61	74.00	54.63	31.13	7.27	32.64	106	124	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-00000-VBR-3000-000KHz-SRT-Auto Mode : FR102106-01 MEI : 42 Plane : #12 EIF-BASE1 Full-directivity : 2</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>103.73</td> <td>29.73</td> <td>74.00</td> <td>98.09</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>106</td> <td>124</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	103.73	29.73	74.00	98.09	31.10	7.25	32.71	106	124	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	60.39	-13.61	74.00	54.63	31.13	7.27	32.64	106	124	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	103.73	29.73	74.00	98.09	31.10	7.25	32.71	106	124	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-00000-VBR-3000-000KHz-SRT-Auto Mode : FR102106-01 MEI : 42 Plane : #12 EIF-BASE1 Full-directivity : 2</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>47.08</td> <td>-6.92</td> <td>54.00</td> <td>41.32</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>124</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	47.08	-6.92	54.00	41.32	31.13	7.27	32.64	106	124	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-00000-VBR-3000-000KHz-SRT-Auto Mode : FR102106-01 MEI : 42 Plane : #12 EIF-BASE1 Full-directivity : 2</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>96.11</td> <td>42.11</td> <td>54.00</td> <td>90.47</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>106</td> <td>124</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	96.11	42.11	54.00	90.47	31.10	7.25	32.71	106	124	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	47.08	-6.92	54.00	41.32	31.13	7.27	32.64	106	124	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	96.11	42.11	54.00	90.47	31.10	7.25	32.71	106	124	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																															
ANT	802.11g CH12 2467MHz																																																															
2	Vertical	Fundamental																																																														
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 42 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.98</td> <td>58.34</td> <td>-15.66</td> <td>74.00</td> <td>52.58</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>371</td> <td>57</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2483.98	58.34	-15.66	74.00	52.58	31.13	7.27	32.64	371	57	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 42 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>101.00</td> <td>27.00</td> <td>74.00</td> <td>95.36</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>371</td> <td>57</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2466.00	101.00	27.00	74.00	95.36	31.10	7.25	32.71	371	57	Peak	VERTICAL
	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																								
1	2483.98	58.34	-15.66	74.00	52.58	31.13	7.27	32.64	371	57	Peak	VERTICAL																																																				
Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																								
1	2466.00	101.00	27.00	74.00	95.36	31.10	7.25	32.71	371	57	Peak	VERTICAL																																																				
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 42 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.56</td> <td>45.78</td> <td>-8.22</td> <td>54.00</td> <td>40.02</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>371</td> <td>57</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2483.56	45.78	-8.22	54.00	40.02	31.13	7.27	32.64	371	57	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000MHz, VBR-3000, 000kHz, SRT-Auto FR102106-01 Mode : 42 MEI : #12 EIF-BASE1 Plane : Full-directivity</p> <table border="1"> <thead> <tr> <th>Powersetting</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>93.27</td> <td>39.27</td> <td>54.00</td> <td>87.63</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>371</td> <td>57</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg	1	2466.00	93.27	39.27	54.00	87.63	31.10	7.25	32.71	371	57	Average	VERTICAL
	Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																								
1	2483.56	45.78	-8.22	54.00	40.02	31.13	7.27	32.64	371	57	Average	VERTICAL																																																				
Powersetting	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																								
MHz	dBμV/m	dB	dBμV/m	dBμV	dB/m	dB	cm	deg																																																								
1	2466.00	93.27	39.27	54.00	87.63	31.10	7.25	32.71	371	57	Average	VERTICAL																																																				

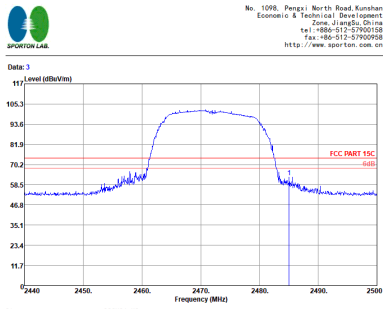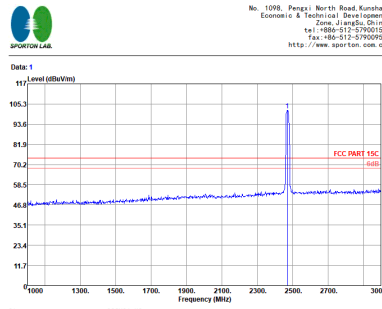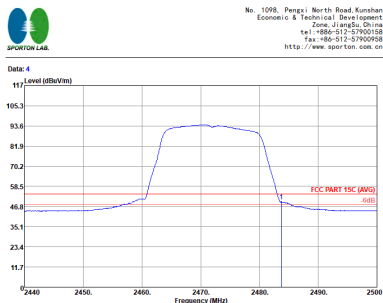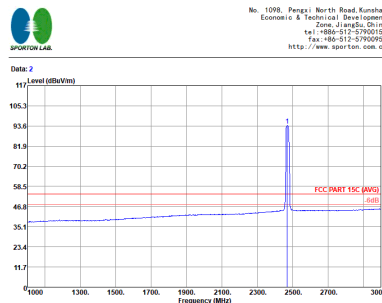

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11g CH13 2472MHz																																																													
2	Horizontal	Fundamental																																																												
Peak	 <p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto IMEI : (FR)102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.06</td> <td>63.01</td> <td>-10.99</td> <td>74.00</td> <td>57.25</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg	1	2485.06	63.01	-10.99	74.00	57.25	31.13	7.27	32.64	106	123	Peak	HORIZONTAL	 <p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto IMEI : (FR)102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>101.60</td> <td>27.60</td> <td>74.00</td> <td>95.84</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg	1	2472.00	101.60	27.60	74.00	95.84	31.13	7.27	32.64	106	123	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg																																																						
1	2485.06	63.01	-10.99	74.00	57.25	31.13	7.27	32.64	106	123	Peak	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg																																																						
1	2472.00	101.60	27.60	74.00	95.84	31.13	7.27	32.64	106	123	Peak	HORIZONTAL																																																		
Avg.	 <p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto IMEI : (FR)102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.74</td> <td>49.80</td> <td>-4.20</td> <td>54.00</td> <td>44.04</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>106</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg	1	2483.74	49.80	-4.20	54.00	44.04	31.13	7.27	32.64	106	123	Average	HORIZONTAL	 <p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : RRM-1000, 0000Hz, VBR-3000, 0000Hz, SRT-Auto IMEI : (FR)102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dBm</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>93.92</td> <td>39.92</td> <td>54.00</td> <td>88.18</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>106</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg	1	2470.00	93.92	39.92	54.00	88.18	31.13	7.25	32.64	106	123	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg																																																						
1	2483.74	49.80	-4.20	54.00	44.04	31.13	7.27	32.64	106	123	Average	HORIZONTAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dBm	dB	cm	deg																																																						
1	2470.00	93.92	39.92	54.00	88.18	31.13	7.25	32.64	106	123	Average	HORIZONTAL																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11g CH13 2472MHz																																																											
2	Vertical	Fundamental																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.28</td> <td>62.93</td> <td>-11.07</td> <td>74.00</td> <td>57.17</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>373</td> <td>38</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2484.28	62.93	-11.07	74.00	57.17	31.13	7.27	32.64	373	38	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2470.00</td> <td>99.26</td> <td>25.26</td> <td>74.00</td> <td>93.52</td> <td>31.13</td> <td>7.25</td> <td>32.64</td> <td>373</td> <td>38</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2470.00	99.26	25.26	74.00	93.52	31.13	7.25	32.64	373	38	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2484.28	62.93	-11.07	74.00	57.17	31.13	7.27	32.64	373	38	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2470.00	99.26	25.26	74.00	93.52	31.13	7.25	32.64	373	38	Peak	VERTICAL																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.33</td> <td>-5.67</td> <td>54.00</td> <td>42.57</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>373</td> <td>38</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2483.50	48.33	-5.67	54.00	42.57	31.13	7.27	32.64	373	38	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 43 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 10</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2472.00</td> <td>91.45</td> <td>37.45</td> <td>54.00</td> <td>85.69</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>373</td> <td>38</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg	1	2472.00	91.45	37.45	54.00	85.69	31.13	7.27	32.64	373	38	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																				
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2483.50	48.33	-5.67	54.00	42.57	31.13	7.27	32.64	373	38	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dB	dB	cm	deg																																																					
1	2472.00	91.45	37.45	54.00	85.69	31.13	7.27	32.64	373	38	Average	VERTICAL																																																



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20(ANT 2) (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
ANT	802.11n HT20 CH01 2412MHz																																																																					
2	Horizontal	Fundamental																																																																				
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : (FR) 102106-01 ME1 : 44 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.91</td> <td>60.49</td> <td>-13.61</td> <td>74.00</td> <td>55.27</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>212</td> <td>125 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg			1	2388.91	60.49	-13.61	74.00	55.27	30.94	7.16	32.88	212	125 Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 3000.000kHz SRT Auto Mode : (FR) 102106-01 ME1 : 44 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>104.88</td> <td>30.88</td> <td>74.00</td> <td>99.54</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>212</td> <td>125 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg			1	2410.00	104.88	30.88	74.00	99.54	31.00	7.18	32.84	212	125 Peak	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg																																																														
1	2388.91	60.49	-13.61	74.00	55.27	30.94	7.16	32.88	212	125 Peak	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg																																																														
1	2410.00	104.88	30.88	74.00	99.54	31.00	7.18	32.84	212	125 Peak	HORIZONTAL																																																											
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 0.000MHz SRT Auto Mode : (FR) 102106-01 ME1 : 44 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>46.73</td> <td>-7.27</td> <td>54.00</td> <td>41.47</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>212</td> <td>125 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg			1	2389.95	46.73	-7.27	54.00	41.47	30.94	7.16	32.84	212	125 Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RSM 1000.000MHz VBR 0.000MHz SRT Auto Mode : (FR) 102106-01 ME1 : 44 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBm/Vm</th> <th>dB</th> <th>dBm/Vm</th> <th>dBm/Vm</th> <th>dB</th> <th>dB</th> <th>on</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2410.00</td> <td>97.16</td> <td>43.16</td> <td>54.00</td> <td>91.82</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>212</td> <td>125 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg			1	2410.00	97.16	43.16	54.00	91.82	31.00	7.18	32.84	212	125 Average	HORIZONTAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg																																																														
1	2389.95	46.73	-7.27	54.00	41.47	30.94	7.16	32.84	212	125 Average	HORIZONTAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBm/Vm	dB	dBm/Vm	dBm/Vm	dB	dB	on	deg																																																														
1	2410.00	97.16	43.16	54.00	91.82	31.00	7.18	32.84	212	125 Average	HORIZONTAL																																																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT20 CH01 2412MHz																																																											
2	Vertical	Fundamental																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000kHz VBR 3000, 000kHz SRT Auto Project : (FR)102106-01 Mode : 44 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.87</td> <td>40.10</td> <td>-13.90</td> <td>74.00</td> <td>54.88</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>393</td> <td>38</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg	1	2387.87	40.10	-13.90	74.00	54.88	30.94	7.16	32.88	393	38	Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000kHz VBR 3000, 000kHz SRT Auto Project : (FR)102106-01 Mode : 44 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>103.68</td> <td>29.68</td> <td>74.00</td> <td>98.34</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>393</td> <td>38</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg	1	2414.00	103.68	29.68	74.00	98.34	31.00	7.18	32.84	393	38	Peak	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg																																																					
1	2387.87	40.10	-13.90	74.00	54.88	30.94	7.16	32.88	393	38	Peak	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg																																																					
1	2414.00	103.68	29.68	74.00	98.34	31.00	7.18	32.84	393	38	Peak	VERTICAL																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000kHz VBR 0, 000kHz SRT Auto Project : (FR)102106-01 Mode : 44 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>46.91</td> <td>-7.09</td> <td>54.00</td> <td>41.65</td> <td>30.94</td> <td>7.16</td> <td>32.84</td> <td>393</td> <td>38</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg	1	2389.82	46.91	-7.09	54.00	41.65	30.94	7.16	32.84	393	38	Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000kHz VBR 0, 000kHz SRT Auto Project : (FR)102106-01 Mode : 44 MEI : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV</th> <th>dB/m</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2414.00</td> <td>96.06</td> <td>42.06</td> <td>54.00</td> <td>90.72</td> <td>31.00</td> <td>7.18</td> <td>32.84</td> <td>393</td> <td>38</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg	1	2414.00	96.06	42.06	54.00	90.72	31.00	7.18	32.84	393	38	Average	VERTICAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg																																																					
1	2389.82	46.91	-7.09	54.00	41.65	30.94	7.16	32.84	393	38	Average	VERTICAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBV/m	dB	dBV/m	dBV	dB/m	cm	deg																																																					
1	2414.00	96.06	42.06	54.00	90.72	31.00	7.18	32.84	393	38	Average	VERTICAL																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																											
ANT	802.11n HT20 CH06 2437MHz - L																																																											
2	Horizontal	Fundamental																																																										
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2339.51</td> <td>54.09</td> <td>-19.91</td> <td>74.00</td> <td>49.17</td> <td>30.77</td> <td>7.07</td> <td>32.92</td> <td>101</td> <td>117</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg	1	2339.51	54.09	-19.91	74.00	49.17	30.77	7.07	32.92	101	117	Peak	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>104.99</td> <td>30.99</td> <td>74.00</td> <td>99.49</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>101</td> <td>117</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg	1	2436.00	104.99	30.99	74.00	99.49	31.07	7.20	32.77	101	117	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg																																																					
1	2339.51	54.09	-19.91	74.00	49.17	30.77	7.07	32.92	101	117	Peak	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg																																																					
1	2436.00	104.99	30.99	74.00	99.49	31.07	7.20	32.77	101	117	Peak	HORIZONTAL																																																
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.03000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.26</td> <td>43.77</td> <td>-10.23</td> <td>54.00</td> <td>38.55</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>101</td> <td>117</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg	1	2388.26	43.77	-10.23	54.00	38.55	30.94	7.16	32.88	101	117	Average	HORIZONTAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.03000kHz SRT:Auto IMEI : (FR)102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBμV/m</th> <th>dB</th> <th>dBμV/m</th> <th>dBμV</th> <th>dBm</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>97.36</td> <td>43.36</td> <td>54.00</td> <td>91.86</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>101</td> <td>117</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg	1	2436.00	97.36	43.36	54.00	91.86	31.07	7.20	32.77	101	117	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg																																																					
1	2388.26	43.77	-10.23	54.00	38.55	30.94	7.16	32.88	101	117	Average	HORIZONTAL																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																					
MHz	dBμV/m	dB	dBμV/m	dBμV	dBm	cm	deg																																																					
1	2436.00	97.36	43.36	54.00	91.86	31.07	7.20	32.77	101	117	Average	HORIZONTAL																																																





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																						
ANT	802.11n HT20 CH06 2437MHz - R																																						
2	Horizontal	Fundamental																																					
Peak	<p>Site : 032005-KS Condition : FCC PART 15C 3e 3117.5M 00218642 HORIZONTAL Project : RRE 1000.000KHz VSW:3000.000KHz SWT:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : # Plane : # Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.72</td> <td>55.10</td> <td>-18.90</td> <td>74.00</td> <td>49.30</td> <td>31.17</td> <td>7.27</td> <td>32.64</td> <td>101</td> <td>117</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	2485.72	55.10	-18.90	74.00	49.30	31.17	7.27	32.64	101	117	Peak	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor																																	
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																
1	2485.72	55.10	-18.90	74.00	49.30	31.17	7.27	32.64	101	117	Peak	HORIZONTAL																											
Avg.	<p>Site : 032005-KS Condition : FCC PART 15C (AVG) 3e 3117.5M 00218642 HORIZONTAL Project : RRE 1000.000KHz VSW:0.000KHz SWT:Auto FR102106-01 Mod : #12 EIF-BASE1 MEI : # Plane : # Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.04</td> <td>44.62</td> <td>-9.38</td> <td>54.00</td> <td>38.86</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>101</td> <td>117</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg	1	2484.04	44.62	-9.38	54.00	38.86	31.13	7.27	32.64	101	117	Average	HORIZONTAL	Left blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor																																	
MHz	dBV/m	dB	dBV/m	dB	dB	cm	deg																																
1	2484.04	44.62	-9.38	54.00	38.86	31.13	7.27	32.64	101	117	Average	HORIZONTAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.11n HT20 CH06 2437MHz - L																																																													
2	Vertical	Fundamental																																																												
Peak	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2355.76</td> <td>54.16</td> <td>-19.84</td> <td>74.00</td> <td>49.15</td> <td>30.83</td> <td>7.10</td> <td>32.92</td> <td>384</td> <td>40</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2355.76	54.16	-19.84	74.00	49.15	30.83	7.10	32.92	384	40	Peak	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2438.00</td> <td>104.21</td> <td>30.31</td> <td>74.00</td> <td>98.78</td> <td>31.07</td> <td>7.23</td> <td>32.77</td> <td>384</td> <td>40</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2438.00	104.21	30.31	74.00	98.78	31.07	7.23	32.77	384	40	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2355.76	54.16	-19.84	74.00	49.15	30.83	7.10	32.92	384	40	Peak	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2438.00	104.21	30.31	74.00	98.78	31.07	7.23	32.77	384	40	Peak	VERTICAL																																																		
Avg.	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.61</td> <td>43.52</td> <td>-10.48</td> <td>54.00</td> <td>38.30</td> <td>30.94</td> <td>7.16</td> <td>32.88</td> <td>384</td> <td>40</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2387.61	43.52	-10.48	54.00	38.30	30.94	7.16	32.88	384	40	Average	VERTICAL	<p>Site : 030905-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cn</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2436.00</td> <td>94.70</td> <td>42.70</td> <td>54.00</td> <td>91.20</td> <td>31.07</td> <td>7.20</td> <td>32.77</td> <td>384</td> <td>40</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg	1	2436.00	94.70	42.70	54.00	91.20	31.07	7.20	32.77	384	40	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																						
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2387.61	43.52	-10.48	54.00	38.30	30.94	7.16	32.88	384	40	Average	VERTICAL																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																							
Freq	Level	Limit	Level	Factor	Loss	Factor	cn	deg																																																						
1	2436.00	94.70	42.70	54.00	91.20	31.07	7.20	32.77	384	40	Average	VERTICAL																																																		

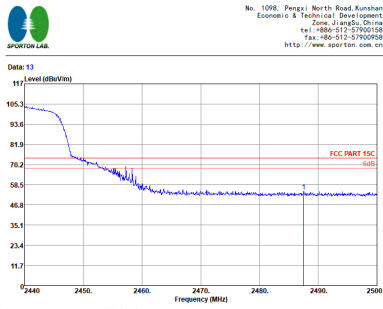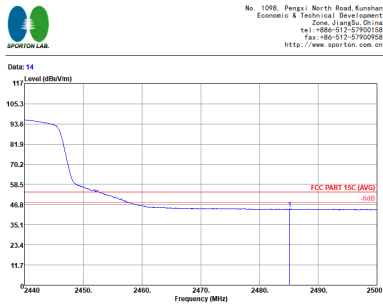

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																						
ANT	802.11n HT20 CH06 2437MHz - R																																						
2	Vertical	Fundamental																																					
Peak	 <p>Site : 032006-KS Condition : FCC PART 15C 3e 3117.5M 00218643 VERTICAL Project : RRM 1000.000MHz VSW:3000.000kHz SRT:Auto IMEI : FR102106-01 Mod : 4e Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2487.52</td> <td>54.83</td> <td>-19.17</td> <td>74.00</td> <td>49.00</td> <td>31.17</td> <td>7.30</td> <td>32.64</td> <td>384</td> <td>40</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2487.52	54.83	-19.17	74.00	49.00	31.17	7.30	32.64	384	40	Peak	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2487.52	54.83	-19.17	74.00	49.00	31.17	7.30	32.64	384	40	Peak	VERTICAL																											
Avg.	 <p>Site : 032006-KS Condition : FCC PART 15C (AVG) 3e 3117.5M 00218642 VERTICAL Project : RRM 1000.000MHz VSW:0.000kHz SRT:Auto IMEI : FR102106-01 Mod : 4e Plane : #12 EIF-BASE1 Plane : 2 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.12</td> <td>44.21</td> <td>-9.79</td> <td>54.00</td> <td>38.41</td> <td>31.17</td> <td>7.27</td> <td>32.64</td> <td>384</td> <td>40</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Line	Level	Factor	Loss	Factor		MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg	1	2485.12	44.21	-9.79	54.00	38.41	31.17	7.27	32.64	384	40	Average	VERTICAL	Left Blank
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																
Freq	Level	Line	Level	Factor	Loss	Factor																																	
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg																																
1	2485.12	44.21	-9.79	54.00	38.41	31.17	7.27	32.64	384	40	Average	VERTICAL																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11n HT20 CH11 2462MHz																																																																													
2	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT Auto MEI : FR102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>64.61</td> <td>-9.39</td> <td>74.00</td> <td>58.85</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>107</td> <td>124</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.68	64.61	-9.39	74.00	58.85	31.13	7.27	32.64	107	124	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 3000.000kHz SRT Auto MEI : FR102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>106.32</td> <td>32.32</td> <td>74.00</td> <td>100.68</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>107</td> <td>124</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.00	106.32	32.32	74.00	100.68	31.10	7.25	32.71	107	124	Peak	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.68	64.61	-9.39	74.00	58.85	31.13	7.27	32.64	107	124	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.00	106.32	32.32	74.00	100.68	31.10	7.25	32.71	107	124	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.03000kHz SRT Auto MEI : FR102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>48.43</td> <td>-5.57</td> <td>54.00</td> <td>42.67</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>107</td> <td>124</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	48.43	-5.57	54.00	42.67	31.13	7.27	32.64	107	124	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Project : RRM 1000.000MHz VBR 0.03000kHz SRT Auto MEI : FR102106-01 Mode : 40 Plane : #12 EIF-BASE1 Full-directivity : 2 Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.00</td> <td>98.59</td> <td>44.59</td> <td>54.00</td> <td>92.95</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>107</td> <td>124</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2464.00	98.59	44.59	54.00	92.95	31.10	7.25	32.71	107	124	Average	HORIZONTAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																						
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	48.43	-5.57	54.00	42.67	31.13	7.27	32.64	107	124	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2464.00	98.59	44.59	54.00	92.95	31.10	7.25	32.71	107	124	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m																																																																											
ANT	802.11n HT20 CH11 2462MHz																																																																											
2	Vertical	Fundamental																																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2464.76</td> <td>61.21</td> <td>-12.79</td> <td>74.00</td> <td>55.45</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>371</td> <td>54</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg	1	2464.76	61.21	-12.79	74.00	55.45	31.13	7.27	32.64	371	54	Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>103.54</td> <td>29.64</td> <td>74.00</td> <td>97.90</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>371</td> <td>54</td> <td>Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg	1	2462.00	103.54	29.64	74.00	97.90	31.10	7.25	32.71	371	54	Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Level Factor	Loss Factor																																																																								
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																																																																					
1	2464.76	61.21	-12.79	74.00	55.45	31.13	7.27	32.64	371	54	Peak	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Level Factor	Loss Factor																																																																								
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																																																																					
1	2462.00	103.54	29.64	74.00	97.90	31.10	7.25	32.71	371	54	Peak	VERTICAL																																																																
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.00</td> <td>-7.40</td> <td>54.00</td> <td>40.84</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>371</td> <td>54</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg	1	2483.50	46.00	-7.40	54.00	40.84	31.13	7.27	32.64	371	54	Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR102106-01 Mode : 40 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 15</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dBV/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2460.00</td> <td>95.93</td> <td>41.93</td> <td>54.00</td> <td>90.29</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>371</td> <td>54</td> <td>Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level Factor	Loss Factor				MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg	1	2460.00	95.93	41.93	54.00	90.29	31.10	7.25	32.71	371	54	Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Level Factor	Loss Factor																																																																								
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																																																																					
1	2483.50	46.00	-7.40	54.00	40.84	31.13	7.27	32.64	371	54	Average	VERTICAL																																																																
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Level Factor	Loss Factor																																																																								
MHz	dBV/m	dB	dBV/m	dBV/m	dB	cm	deg																																																																					
1	2460.00	95.93	41.93	54.00	90.29	31.10	7.25	32.71	371	54	Average	VERTICAL																																																																



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																													
ANT	802.11n HT20 CH12 2467MHz																																																																													
2	Horizontal	Fundamental																																																																												
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.74</td> <td>66.40</td> <td>-7.40</td> <td>74.00</td> <td>60.64</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>105</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.74	66.40	-7.40	74.00	60.64	31.13	7.27	32.64	105	123	Peak	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>104.39</td> <td>30.39</td> <td>74.00</td> <td>98.75</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>105</td> <td>123</td> <td>Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	104.39	30.39	74.00	98.75	31.10	7.25	32.71	105	123	Peak	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.74	66.40	-7.40	74.00	60.64	31.13	7.27	32.64	105	123	Peak	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	104.39	30.39	74.00	98.75	31.10	7.25	32.71	105	123	Peak	HORIZONTAL																																																																		
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>49.91</td> <td>-4.09</td> <td>54.00</td> <td>44.15</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>105</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	49.91	-4.09	54.00	44.15	31.13	7.27	32.64	105	123	Average	HORIZONTAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 HORIZONTAL Economic & Technical Development Zone, Jiangsu China Project : R88-1000-000000 VBR-3000-000000 SRT-Auto Mode : FR102106-01 MEI : #12 EIF-BASE1 Plane : Full-directivity Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>96.81</td> <td>42.81</td> <td>54.00</td> <td>91.17</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>105</td> <td>123</td> <td>Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	96.81	42.81	54.00	91.17	31.10	7.25	32.71	105	123	Average	HORIZONTAL
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2483.50	49.91	-4.09	54.00	44.15	31.13	7.27	32.64	105	123	Average	HORIZONTAL																																																																		
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																							
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																						
1	2466.00	96.81	42.81	54.00	91.17	31.10	7.25	32.71	105	123	Average	HORIZONTAL																																																																		



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																											
ANT	802.11n HT20 CH12 2467MHz																																																																											
2	Vertical	Fundamental																																																																										
Peak	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000MHz VBR 3000, 000kHz SRT Auto Project : FR102106-01 Mode : 47 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 2 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.80</td> <td>64.03</td> <td>+9.97</td> <td>74.00</td> <td>58.27</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>370</td> <td>SS Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.80	64.03	+9.97	74.00	58.27	31.13	7.27	32.64	370	SS Peak	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000MHz VBR 3000, 000kHz SRT Auto Project : FR102106-01 Mode : 47 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 2 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>101.68</td> <td>27.68</td> <td>74.00</td> <td>96.04</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>370</td> <td>SS Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	101.68	27.68	74.00	96.04	31.10	7.25	32.71	370	SS Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2483.80	64.03	+9.97	74.00	58.27	31.13	7.27	32.64	370	SS Peak	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2466.00	101.68	27.68	74.00	96.04	31.10	7.25	32.71	370	SS Peak	VERTICAL																																																																	
Avg.	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000MHz VBR 0, 000MHz SRT Auto Project : FR102106-01 Mode : 47 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 2 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>47.67</td> <td>+6.33</td> <td>54.00</td> <td>41.91</td> <td>31.13</td> <td>7.27</td> <td>32.64</td> <td>370</td> <td>SS Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2483.50	47.67	+6.33	54.00	41.91	31.13	7.27	32.64	370	SS Average	VERTICAL	<p>Site : 030906-KS Condition : FCC PART 15C (AVG) 3m 3117 SN 00218642 VERTICAL Economic & Technical Development Zone, Jiangsu China RBM 1000, 000MHz VBR 0, 000MHz SRT Auto Project : FR102106-01 Mode : 47 MEI : #12 EIF-BASE1 Plane : X Full-directivity : 2 Powersetting : 13</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2466.00</td> <td>94.00</td> <td>40.00</td> <td>54.00</td> <td>88.36</td> <td>31.10</td> <td>7.25</td> <td>32.71</td> <td>370</td> <td>SS Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	2466.00	94.00	40.00	54.00	88.36	31.10	7.25	32.71	370	SS Average	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2483.50	47.67	+6.33	54.00	41.91	31.13	7.27	32.64	370	SS Average	VERTICAL																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
Freq	Level	Limit	Line	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																				
1	2466.00	94.00	40.00	54.00	88.36	31.10	7.25	32.71	370	SS Average	VERTICAL																																																																	