




APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX N(HT20) Mode Channel 01 ANT1+ANT2	Phase	Line
-----------	--------------------------------------	-------	------

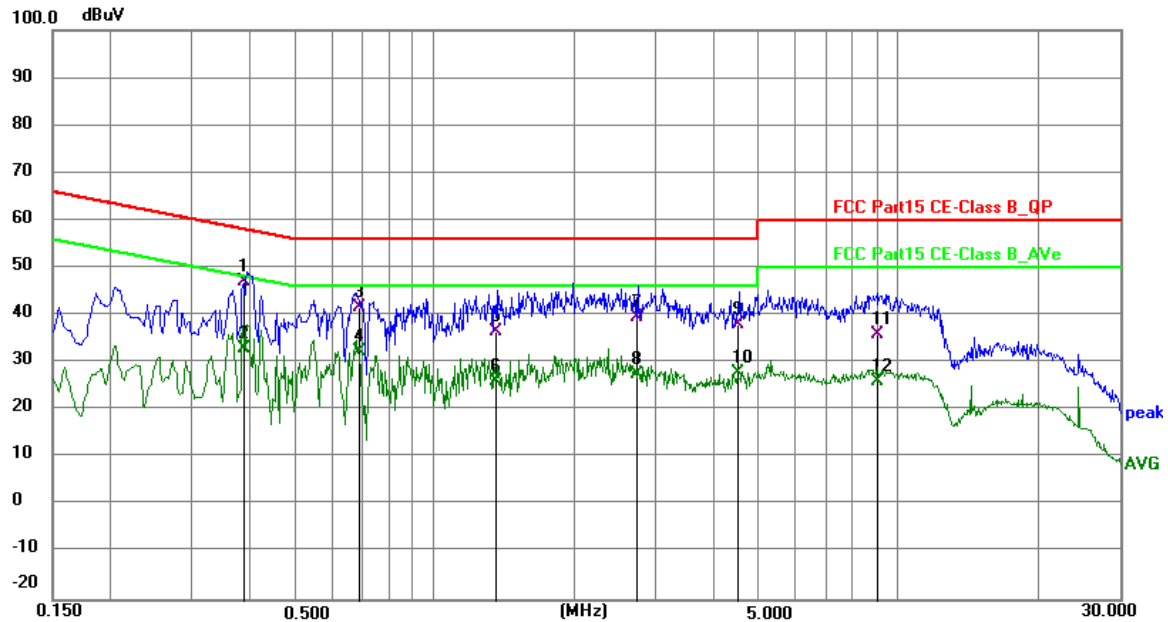


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.3874	37.31	9.63	46.94	58.12	-11.18	QP	P	
2	0.3874	23.39	9.63	33.02	48.12	-15.10	AVG	P	
3	0.6877	31.89	9.63	41.52	56.00	-14.48	QP	P	
4	0.6877	22.85	9.63	32.48	46.00	-13.52	AVG	P	
5	1.3643	27.02	9.64	36.66	56.00	-19.34	QP	P	
6	1.3643	16.28	9.64	25.92	46.00	-20.08	AVG	P	
7	2.7270	29.91	9.65	39.56	56.00	-16.44	QP	P	
8	2.7270	18.04	9.65	27.69	46.00	-18.31	AVG	P	
9	4.5413	28.27	9.67	37.94	56.00	-18.06	QP	P	
10	4.5413	18.11	9.67	27.78	46.00	-18.22	AVG	P	
11	8.9822	26.26	9.72	35.98	60.00	-24.02	QP	P	
12	8.9822	16.44	9.72	26.16	50.00	-23.84	AVG	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 01 ANT1+ANT2	Phase	Neutral
-----------	--------------------------------------	-------	---------

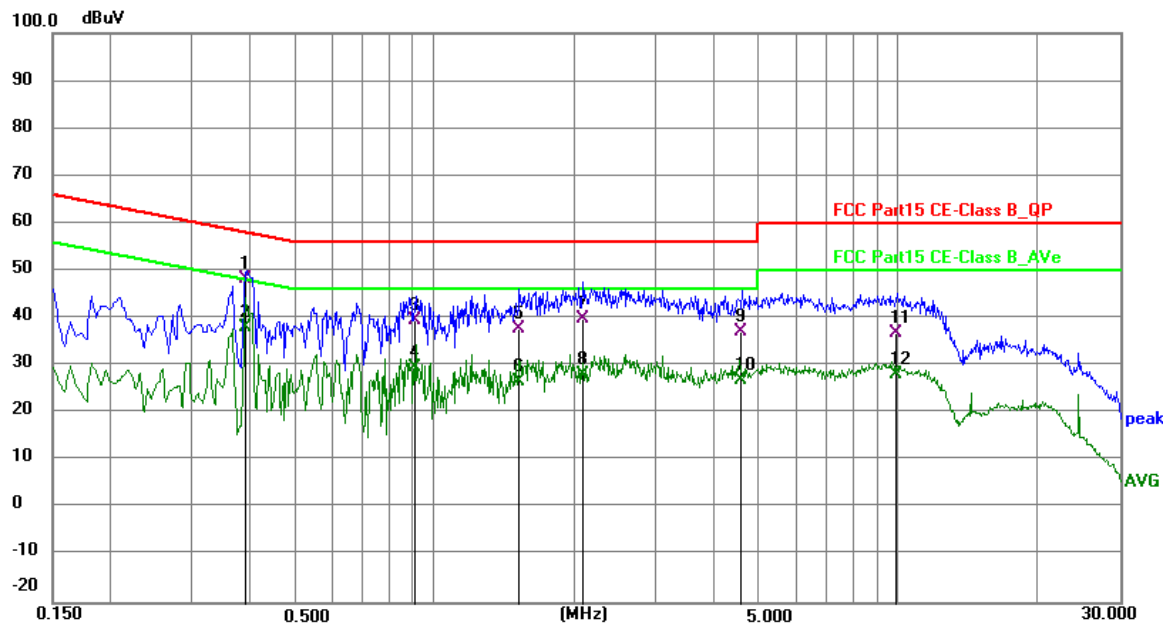

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.3908	38.67	9.62	48.29	58.05	-9.76	QP	P	
2	0.3908	28.49	9.62	38.11	48.05	-9.94	AVG	P	
3	0.9083	30.05	9.64	39.69	56.00	-16.31	QP	P	
4	0.9083	20.01	9.64	29.65	46.00	-16.35	AVG	P	
5	1.5227	28.15	9.65	37.80	56.00	-18.20	QP	P	
6	1.5227	16.86	9.65	26.51	46.00	-19.49	AVG	P	
7	2.0878	30.24	9.65	39.89	56.00	-16.11	QP	P	
8	2.0878	18.43	9.65	28.08	46.00	-17.92	AVG	P	
9	4.6006	27.49	9.67	37.16	56.00	-18.84	QP	P	
10	4.6006	17.36	9.67	27.03	46.00	-18.97	AVG	P	
11	9.9280	27.24	9.73	36.97	60.00	-23.03	QP	P	
12	9.9280	18.48	9.73	28.21	50.00	-21.79	AVG	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX N(HT20) Mode Channel 01 ANT1+ANT2	Polarization	Vertical
-----------	--------------------------------------	--------------	----------

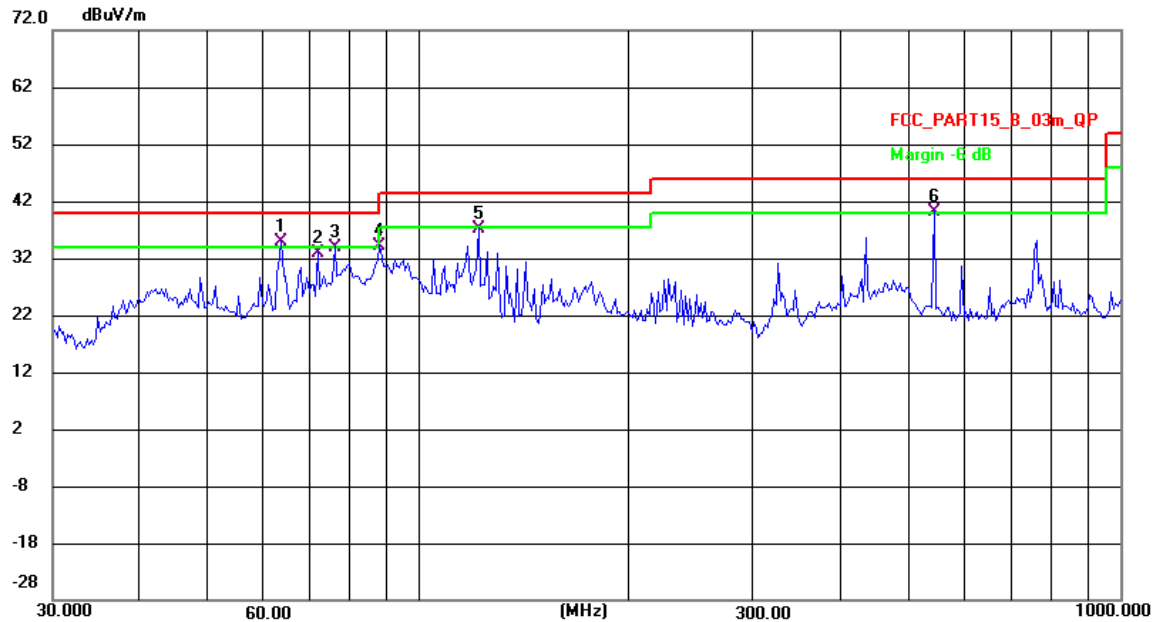


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	63.6312	57.97	-23.07	34.90	40.00	-5.10	QP	209	62	P	
2	71.7054	57.21	-24.34	32.87	40.00	-7.13	QP	147	54	P	
3	75.8520	58.96	-25.11	33.85	40.00	-6.15	QP	100	90	P	
4 !	87.9136	60.00	-25.76	34.24	40.00	-5.76	QP	113	206	P	
5	121.4623	59.90	-22.67	37.23	43.50	-6.27	QP	100	83	P	
6 !	542.6104	55.86	-15.75	40.11	46.00	-5.89	QP	199	15	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode Channel 01 ANT1+ANT2	Polarization	Horizontal
-----------	--------------------------------------	--------------	------------

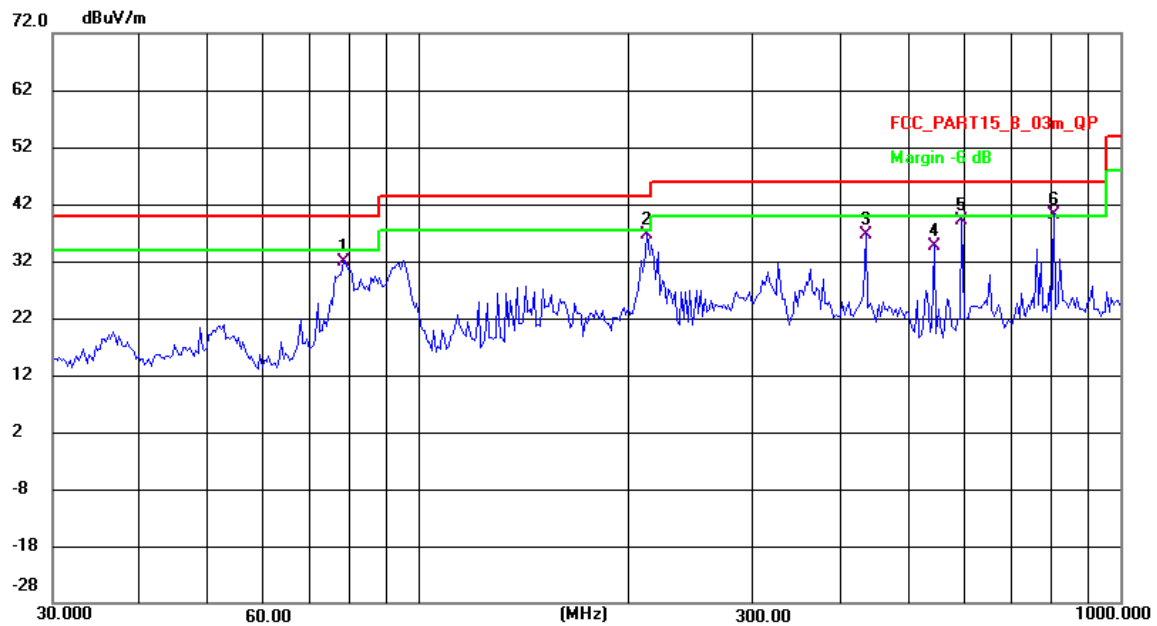

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	78.0143	57.49	-25.52	31.97	40.00	-8.03	QP	209	196	P	
2	211.6112	61.70	-25.12	36.58	43.50	-6.92	QP	100	50	P	
3	433.3397	54.80	-18.19	36.61	46.00	-9.39	QP	152	310	P	
4	542.6104	50.47	-15.75	34.72	46.00	-11.28	QP	100	180	P	
5	594.5143	53.00	-13.95	39.05	46.00	-6.95	QP	199	26	P	
6 *	804.2523	49.86	-9.82	40.04	46.00	-5.96	QP	199	349	P	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIXD -RADIATED EMISSION- ABOVE 1000MHZ

Test Result of Radiated Spurious at Band edges.

Note: All test plots below include both horizontal and vertical

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX B Mode 2412 MHz ANT1+ANT2			
N o.	Freq MHz	Polarity	Reading (dBUV/m)	Correct Factor	Result (dBUV/m)	Limit (dBUV/m)	Margin	Remark
1	2390	H	73.56	-21.47	52.09	74.00	-21.91	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	72.25	-26.12	46.13	74.00	-27.87	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	73.51	-21.47	52.04	74.00	-21.96	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	71.86	-26.12	45.74	74.00	-28.26	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX B Mode 2462 MHz ANT1+ANT2			
1	2483.5	H	74.27	-25.29	48.98	74.00	-25.02	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	73.47	-25.29	48.18	74.00	-25.82	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg

Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.

2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.

Result=Reading + Correct Factor.

Margin= Result-Limit.

3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX G Mode 2412 MHz ANT1+ANT2			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	73.48	-21.47	52.01	74.00	-21.99	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	72.17	-26.12	46.05	74.00	-27.95	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	74.04	-21.47	52.57	74.00	-21.43	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	73.31	-26.12	47.19	74.00	-26.81	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX G Mode 2462 MHz ANT1+ANT2			
1	2483.5	H	78.91	-25.29	53.62	74.00	-20.38	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	77.97	-25.29	52.68	74.00	-21.32	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Test Results					PASS			
Frequency Range					2310MHz~2410MHz			
Test Mode					TX N(HT20) Mode 2412 MHz ANT1+ANT2			
N o.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	75.11	-21.47	53.64	74.00	-20.36	Peak
2	2390	H	--	-21.47	--	54.00	--	Avg
3	2400	H	74.19	-26.12	48.07	74.00	-25.93	Peak
4	2400	H	--	-26.12	--	54.00	--	Avg
1	2390	V	75.04	-21.47	53.57	74.00	-20.43	Peak
2	2390	V	--	-21.47	--	54.00	--	Avg
3	2400	V	73.88	-26.12	47.76	74.00	-26.24	Peak
4	2400	V	--	-26.12	--	54.00	--	Avg
Test Results					PASS			
Frequency Range					2450MHz~2550MHz			
Test Mode					TX N(HT20) Mode 2462 MHz ANT1+ANT2			
1	2483.5	H	77.08	-25.29	51.79	74.00	-22.21	Peak
2	2483.5	H	--	-25.29	--	54.00	--	Avg
1	2483.5	V	78.01	-25.29	52.72	74.00	-21.28	Peak
2	2483.5	V	--	-25.29	--	54.00	--	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

ABOVE 1000 MHz

Note: All the modes have been tested and recorded worst mode in the report.

Modulation Type:802.11 N(HT20) ANT1+ANT2

Channel 1 / 2412 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4824.00	H	53.74	51.3	-1.88	51.86	49.42	74	54	-22.14
7236.00	H	44.01	---	7.8	51.81	---	74	54	-22.19
---	H	---	---	---	---	---	---	---	---
4824.00	V	55.37	---	-1.88	53.49	---	74	54	-20.51
7236.00	V	42.74	---	7.8	50.54	---	74	54	-23.46
---	V	---	---	---	---	---	---	---	---

Channel 6 / 2437 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4874.00	H	57.14	52.31	-1.59	55.55	50.72	74	54	-18.45
7311.00	H	41.35	---	8.1	49.45	---	74	54	-24.55
---	H	---	---	---	---	---	---	---	---
4874.00	V	54.01	---	-1.59	52.42	---	74	54	-21.58
7311.00	V	42.85	---	8.1	50.95	---	74	54	-23.05
---	V	---	---	---	---	---	---	---	---

Channel 11 / 2462 MHz									
Frequency	Ant.Pol. H/V	Peak reading (dBuV)	AV reading (dBuV)	Correction Factor	Emission Level		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)			
4924.00	H	55.05	52	-1.3	53.75	50.7	74	54	-20.25
7386.00	H	40.85	---	9	49.85	---	74	54	-24.15
---	H	---	---	---	---	---	---	---	---
4924.00	V	54.89	---	-1.3	53.59	---	74	54	-20.41
7386.00	V	42.98	---	9	51.98	---	74	54	-22.02
---	V	---	---	---	---	---	---	---	---

Notes:

- 1). Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 2). Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 3). Worst case data at 1Mbps at IEEE 802.11b.
- 4). Measured Level = Reading Level + Factor, Margin = Measured Level – Limit


APPENDIXE - BANDWIDTH

1. DTS Bandwidth

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.12	2408.44	2415.56	0.5	PASS
	Ant2	2412	8.04	2407.96	2416.00	0.5	PASS
	Ant1	2437	8.00	2433.00	2441.00	0.5	PASS
	Ant2	2437	7.12	2433.44	2440.56	0.5	PASS
	Ant1	2462	7.56	2457.96	2465.52	0.5	PASS
	Ant2	2462	7.12	2458.44	2465.56	0.5	PASS
11G	Ant1	2412	17.36	2403.48	2420.84	0.5	PASS
	Ant2	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant1	2437	17.32	2428.48	2445.80	0.5	PASS
	Ant2	2437	16.36	2428.80	2445.16	0.5	PASS
	Ant1	2462	16.32	2453.84	2470.16	0.5	PASS
	Ant2	2462	16.32	2453.84	2470.16	0.5	PASS
11N20MIMO	Ant1	2412	17.64	2403.24	2420.88	0.5	PASS
	Ant2	2412	17.76	2403.12	2420.88	0.5	PASS
	Ant1	2437	17.72	2428.16	2445.88	0.5	PASS
	Ant2	2437	17.76	2428.12	2445.88	0.5	PASS
	Ant1	2462	17.64	2453.24	2470.88	0.5	PASS
	Ant2	2462	17.76	2453.12	2470.88	0.5	PASS


Test Graphs

11B_Ant1_2412

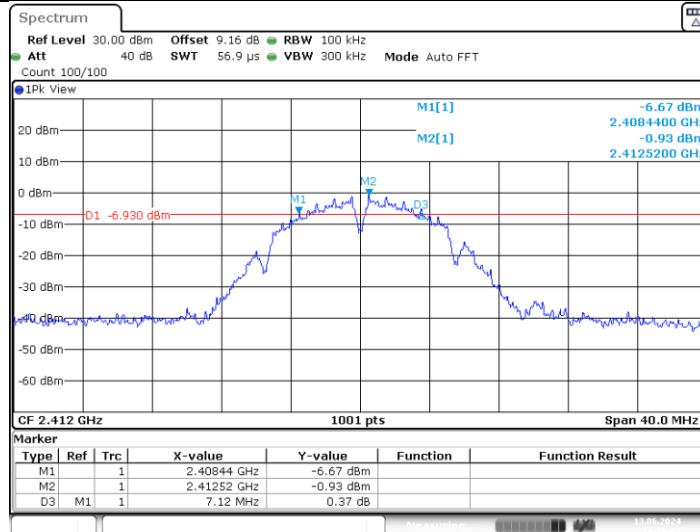


Date: 13.JUN.2024 18:19:04

11B_Ant2_2412

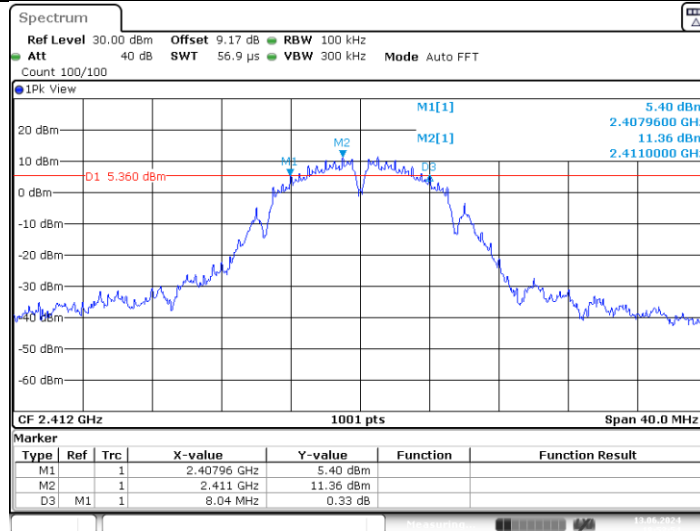


Date: 13.JUN.2024 18:53:54

11B_Ant1_2437

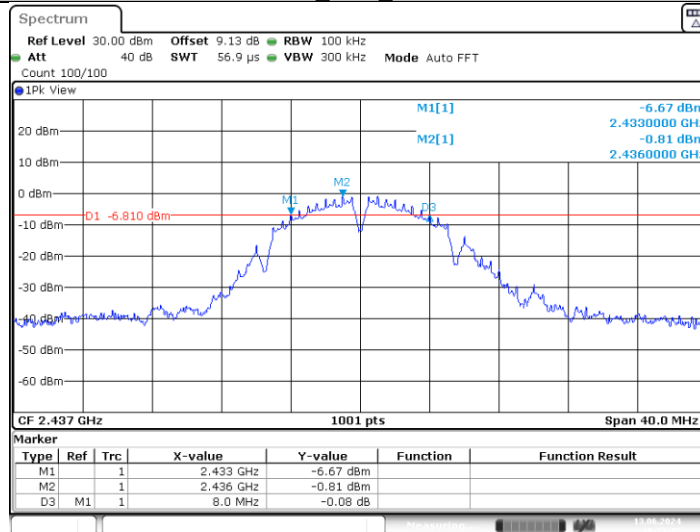


Date: 13.JUN.2024 18:22:32

11B_Ant2_2437

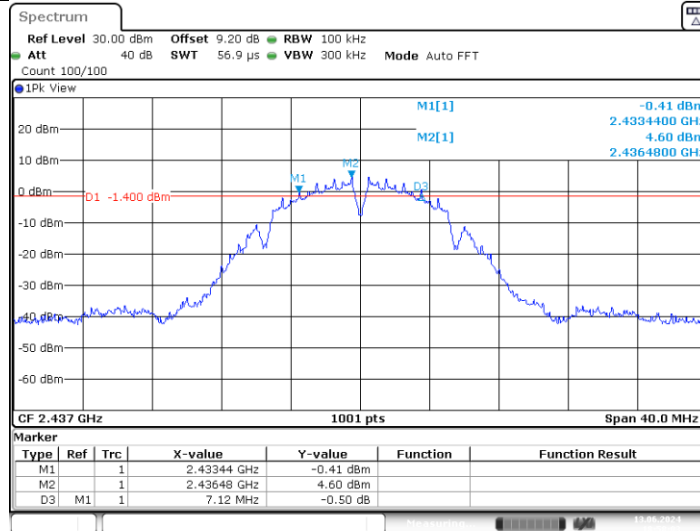


Date: 13.JUN.2024 18:58:04

11B_Ant1_2462

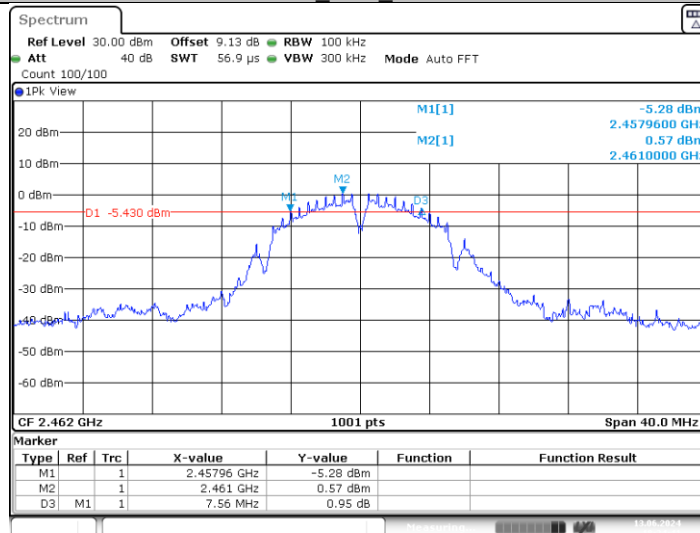


Date: 13.JUN.2024 18:24:41

11B_Ant2_2462

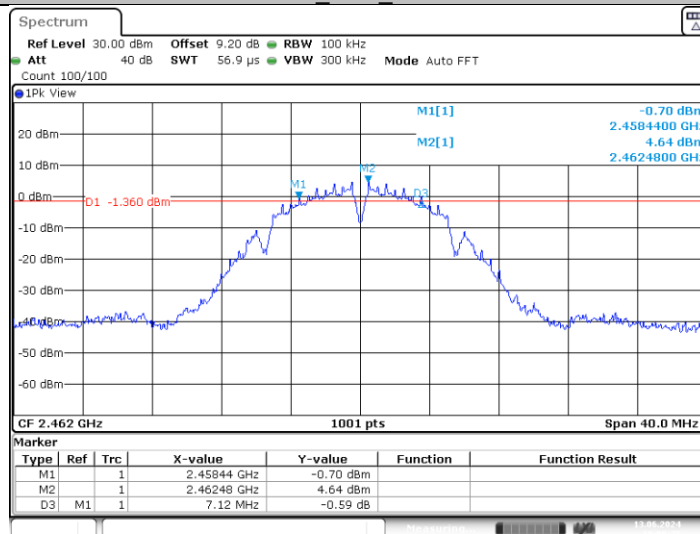


Date: 13.JUN.2024 19:00:26

11G_Ant1_2412

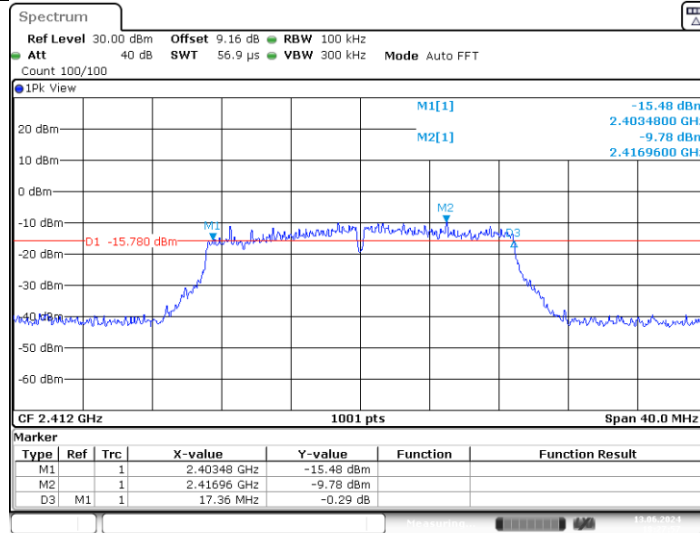


Date: 13.JUN.2024 18:27:57

11G_Ant2_2412

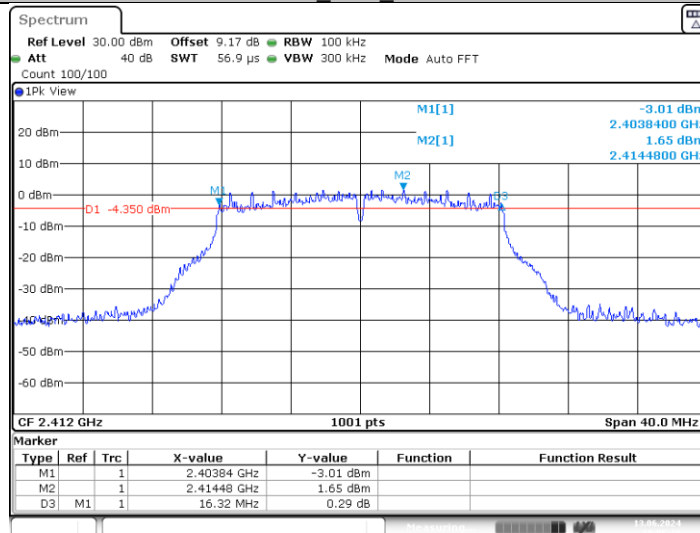


Date: 13.JUN.2024 19:05:19

11G_Ant1_2437

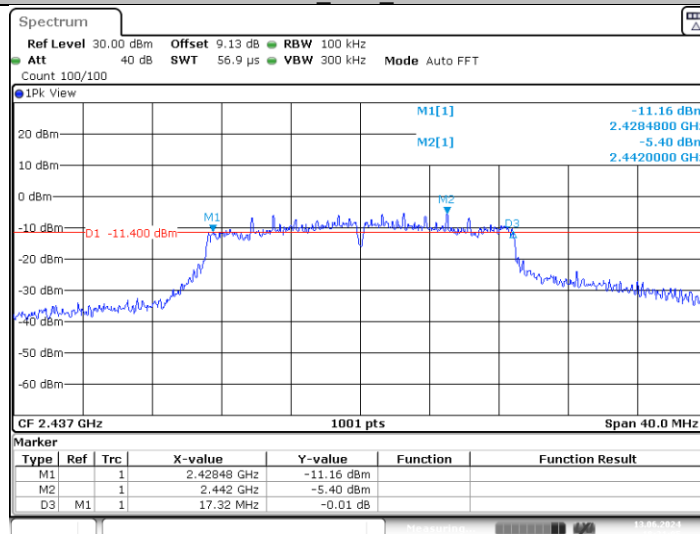


Date: 13.JUN.2024 18:31:05


11G_Ant2_2437

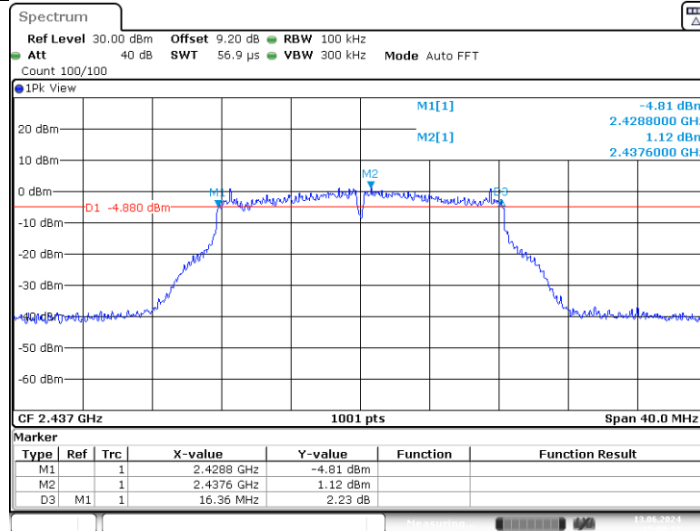


11G_Ant1_2462

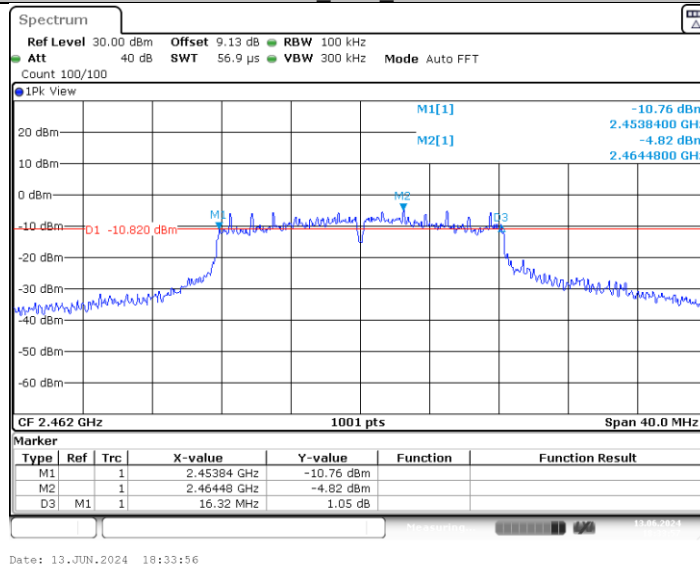


11G_Ant2_2462

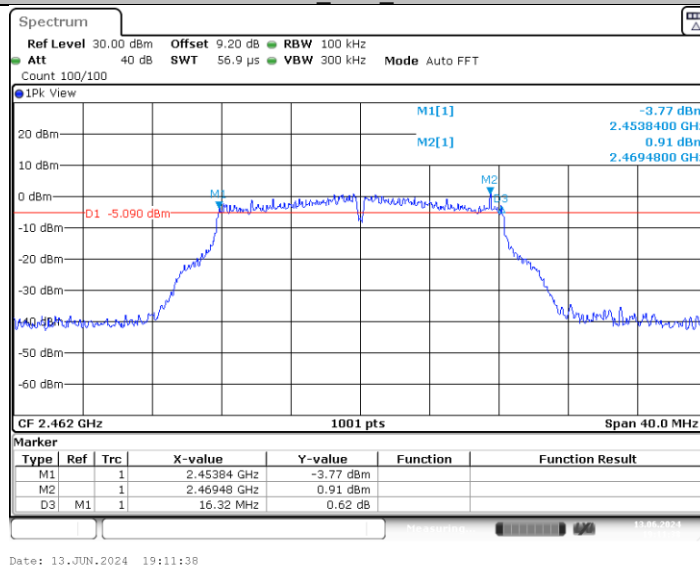


11N20MIMO_Ant1_2412

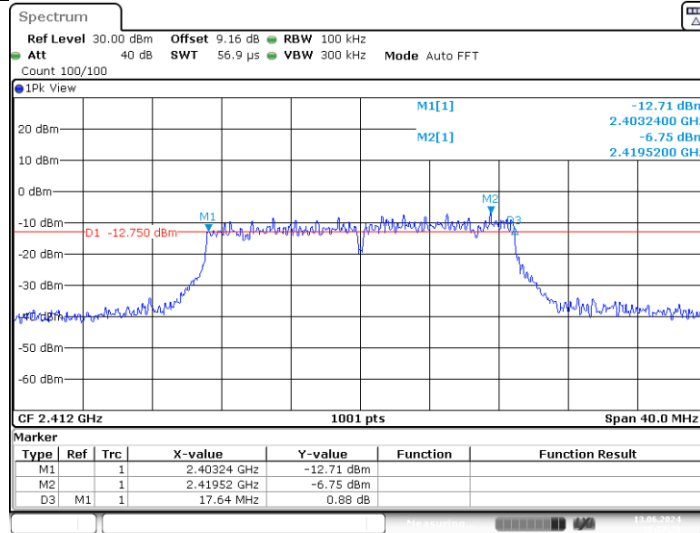


11N20MIMO_Ant2_2412

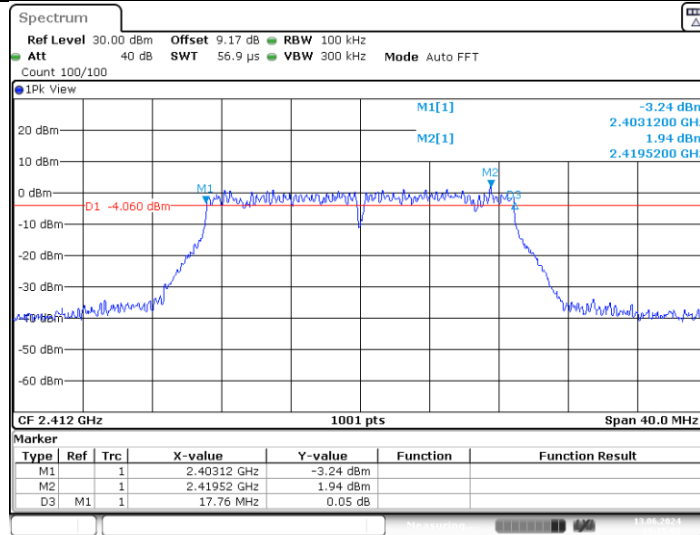


11N20MIMO_Ant1_2437

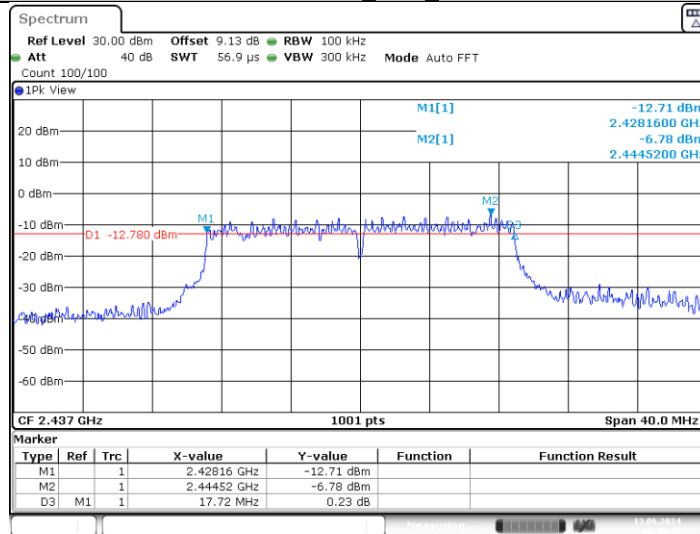


11N20MIMO_Ant2_2437

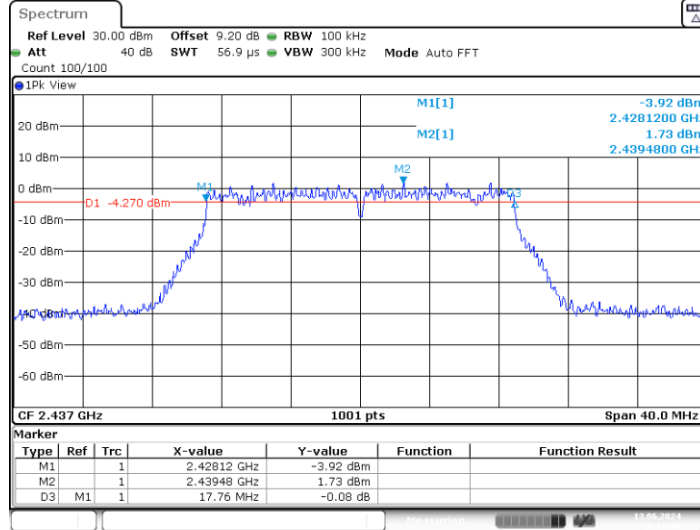

11N20MIMO_Ant1_2462

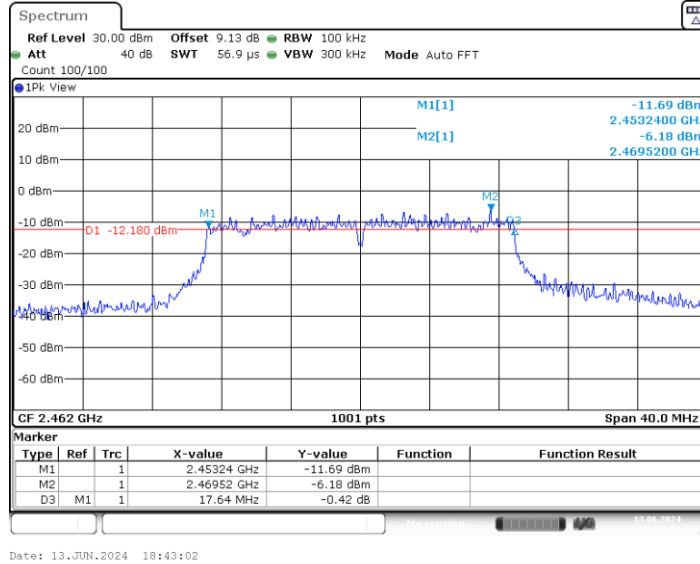

11N20MIMO_Ant2_2462

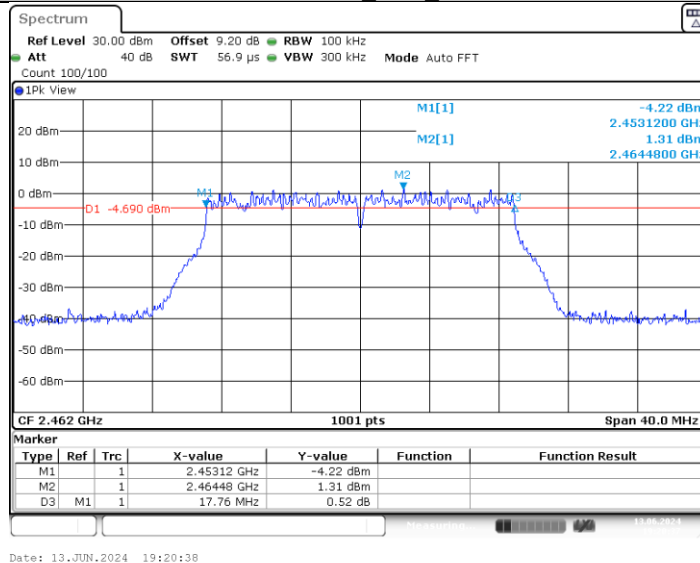

APPENDIX F - MAXIMUM OUTPUT POWER


Test Mode	Antenna	Frequency[MHz]	Average power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	8.50	98.94	0.05	8.55	≤30.00	PASS
	Ant2	2412	13.97	98.94	0.05	14.02	≤30.00	PASS
	Ant1	2437	8.52	98.94	0.05	8.57	≤30.00	PASS
	Ant2	2437	13.74	98.94	0.05	13.79	≤30.00	PASS
	Ant1	2462	8.90	98.94	0.05	8.95	≤30.00	PASS
	Ant2	2462	13.28	98.94	0.05	13.33	≤30.00	PASS
11G	Ant1	2412	0.68	92.91	0.32	1.00	≤30.00	PASS
	Ant2	2412	14.34	93.29	0.30	14.64	≤30.00	PASS
	Ant1	2437	6.36	92.91	0.32	6.68	≤30.00	PASS
	Ant2	2437	14.13	93.33	0.30	14.43	≤30.00	PASS
	Ant1	2462	1.68	93.29	0.30	1.98	≤30.00	PASS
	Ant2	2462	13.79	93.29	0.30	14.09	≤30.00	PASS
11N20MIMO	Ant1	2412	2.78	61.54	2.11	4.89	≤30.00	PASS
	Ant2	2412	12.57	61.54	2.11	14.68	≤30.00	PASS
	total	2412	---	---	---	15.11	≤30.00	PASS
	Ant1	2437	3.16	61.54	2.11	5.27	≤30.00	PASS
	Ant2	2437	12.47	61.54	2.11	14.58	≤30.00	PASS
	total	2437	---	---	---	15.06	≤30.00	PASS
	Ant1	2462	1.93	62.96	2.01	3.94	≤30.00	PASS
	Ant2	2462	12.16	61.54	2.11	14.27	≤30.00	PASS
	total	2462	---	---	---	14.65	≤30.00	PASS

DC Factor = $10 \cdot \log(1/\text{Duty Cycle})$


The measure-and-sum technique shall be used for measuring in-band transmit power of a device. Total power is the sum of the conducted power levels measured at the various output ports.

(First measure the power (mW) of each antenna separately, and the total power is equal to Ant1mW + Ant2mW+....)


TEST GRAPHS AVERAGE

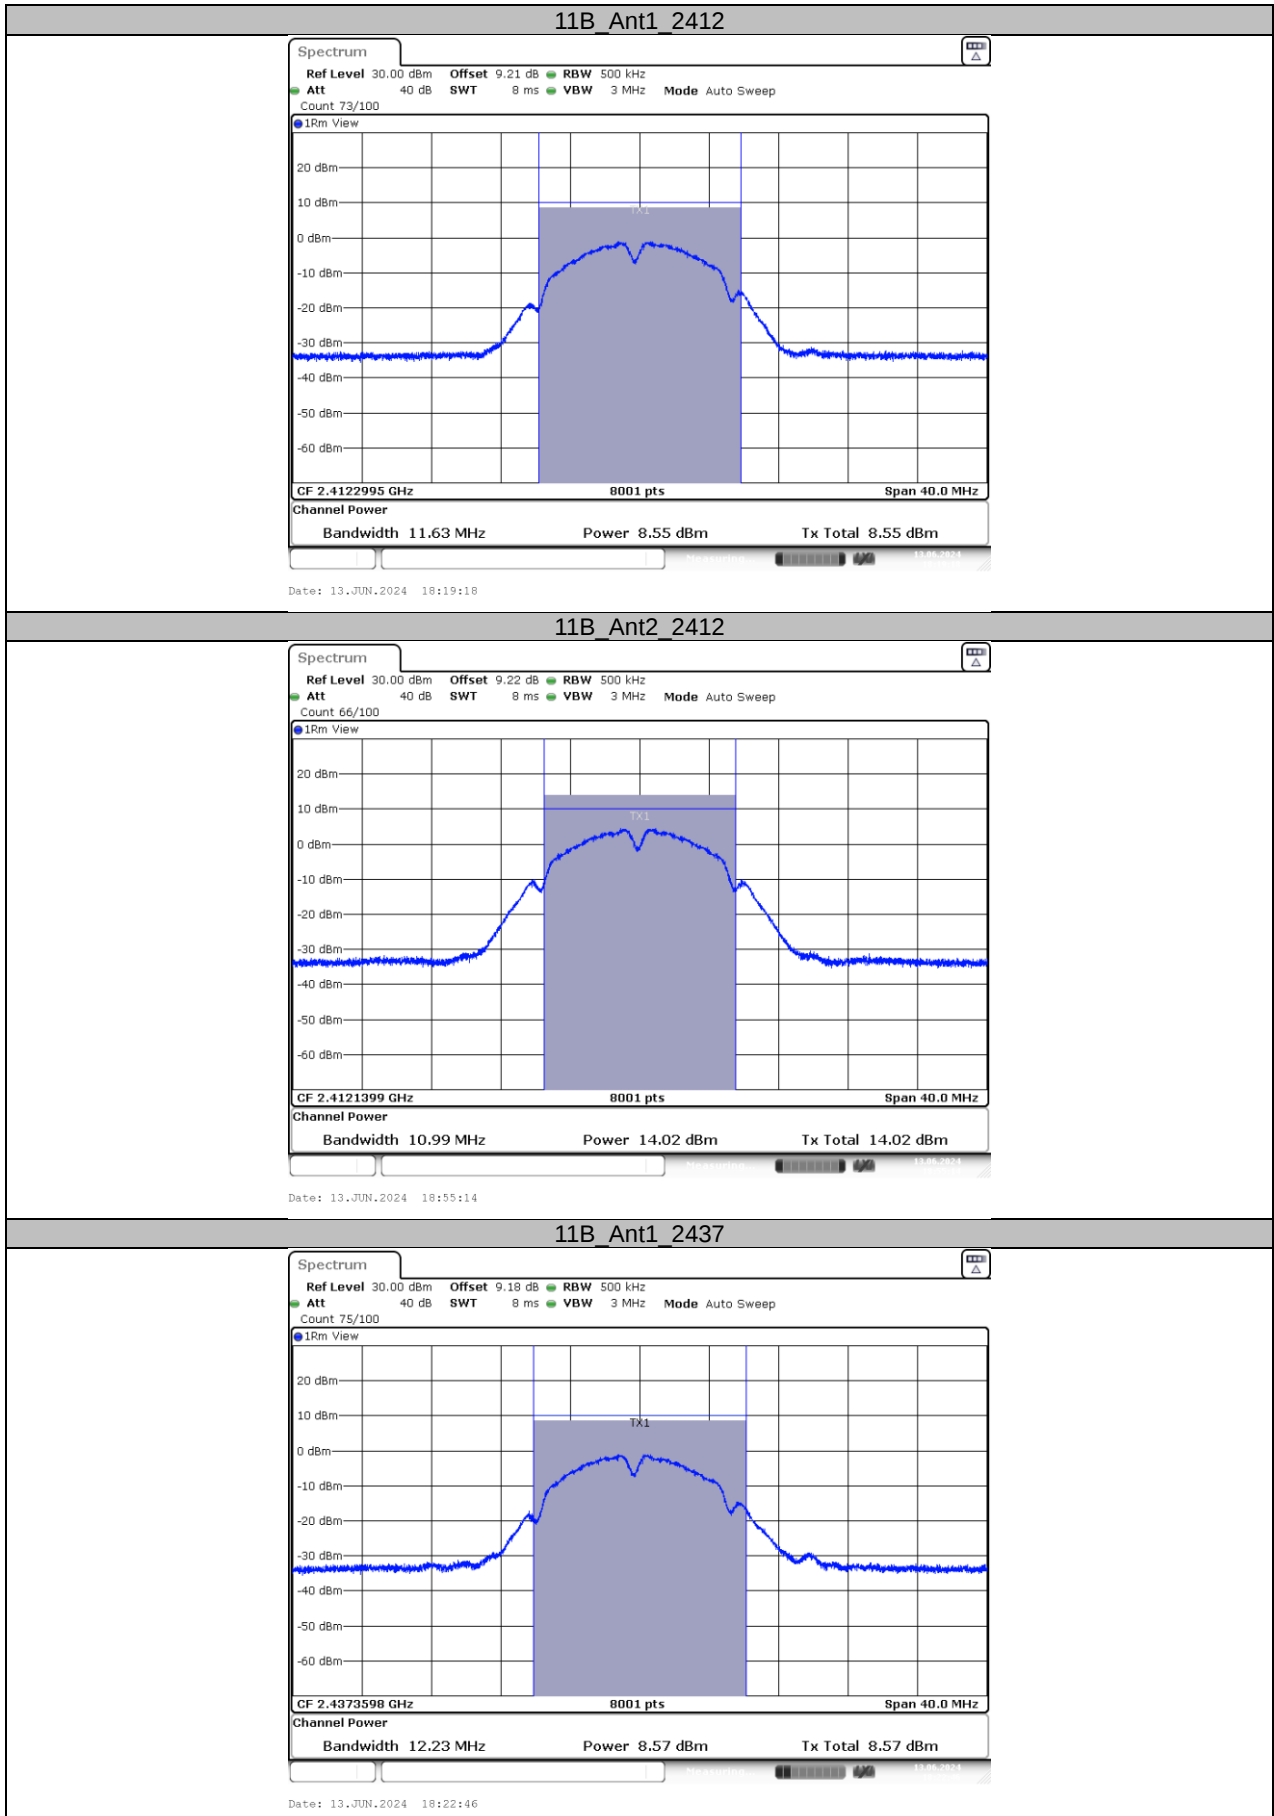


11B_Ant2_2437

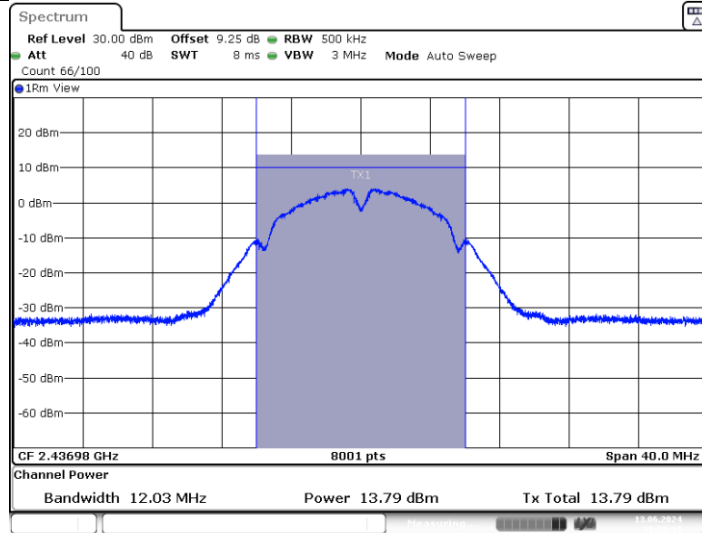


11B_Ant1_2462

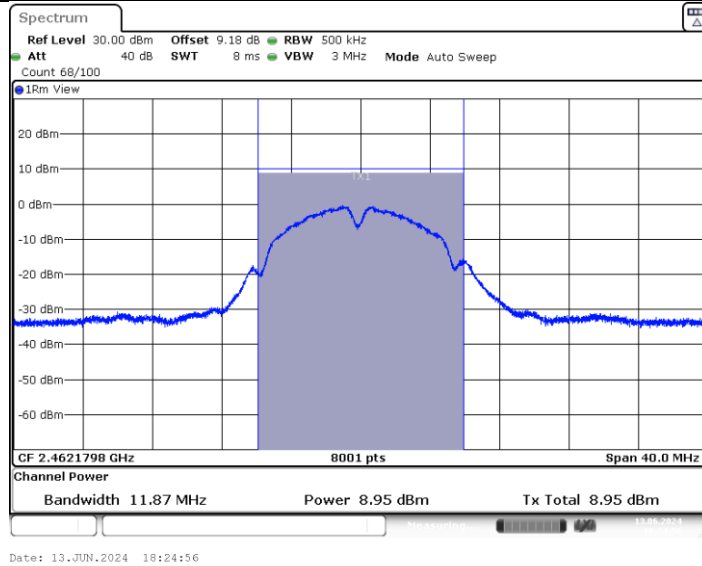


11B_Ant2_2462

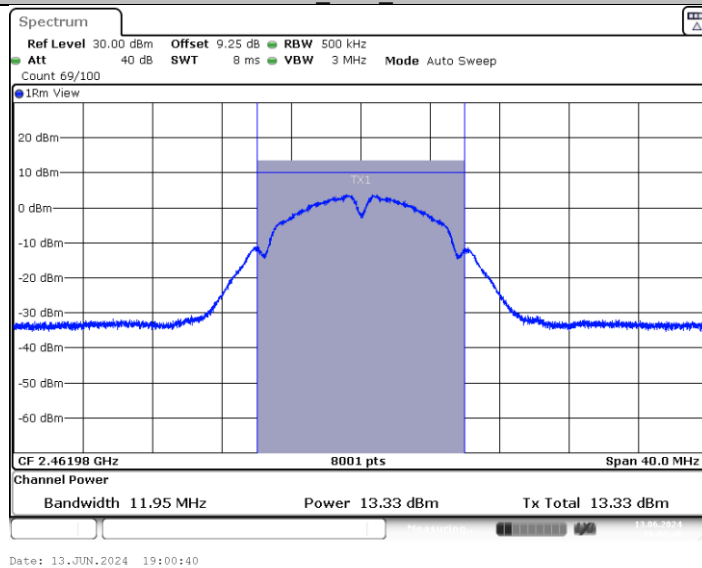

11G_Ant1_2412

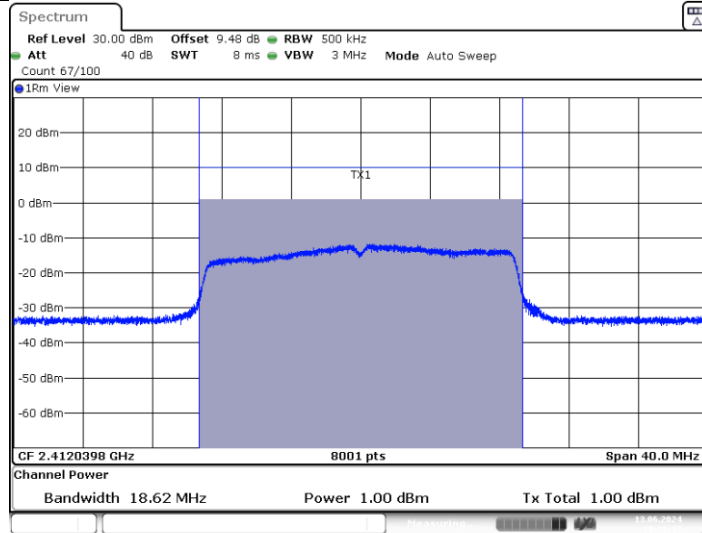


11G_Ant2_2412

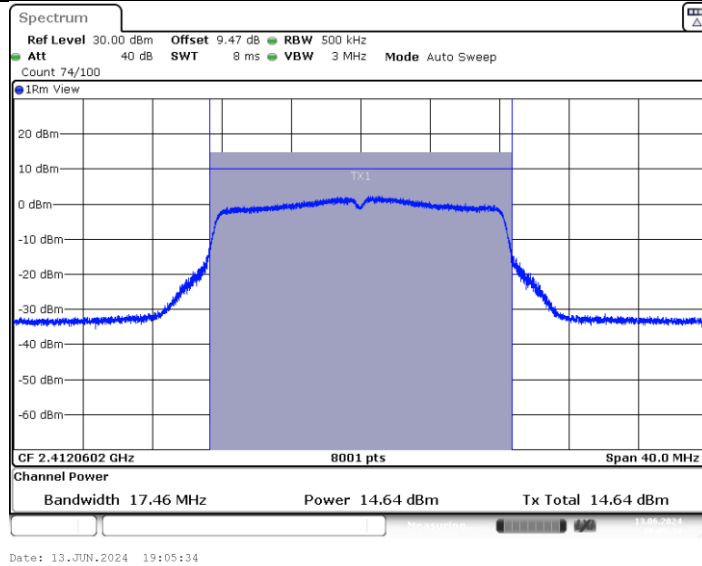


11G_Ant1_2437




11G_Ant2_2437

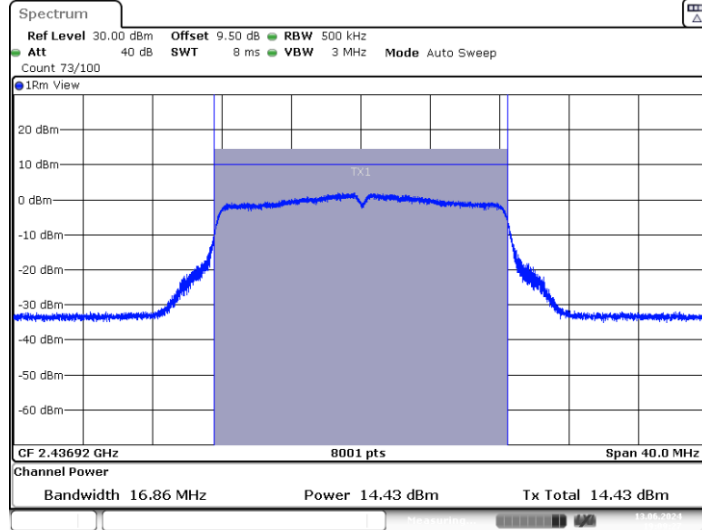


11G_Ant1_2462

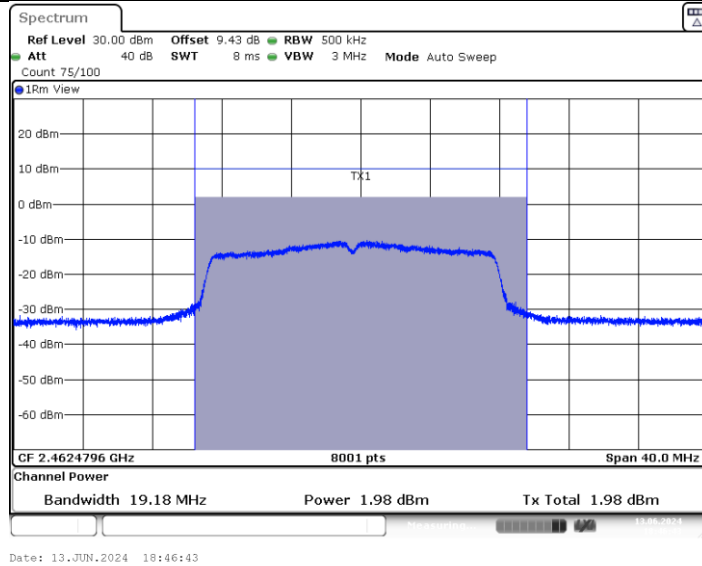


11G_Ant2_2462

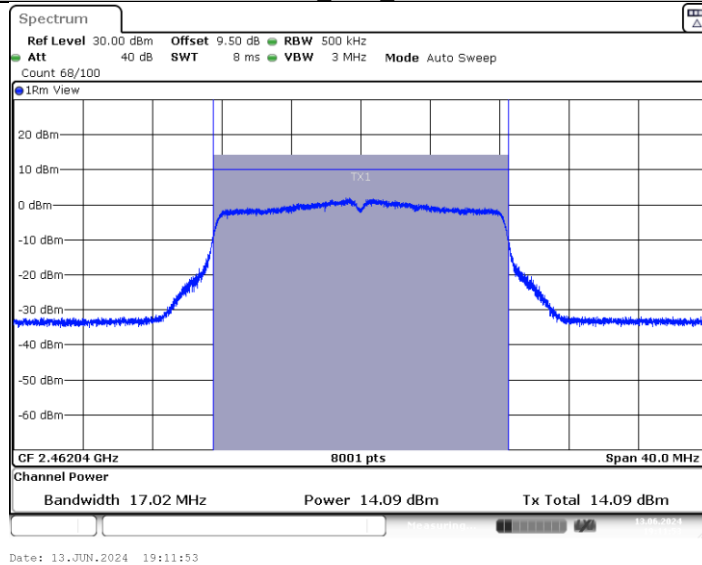


11N20MIMO_Ant1_2412

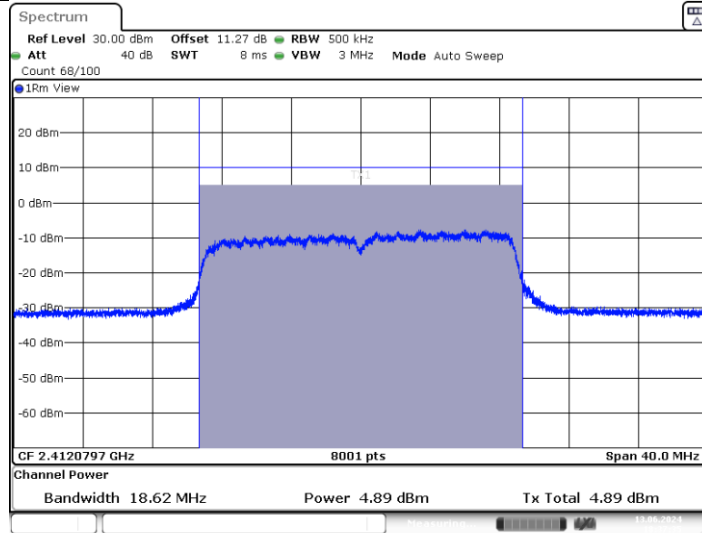


11N20MIMO_Ant2_2412

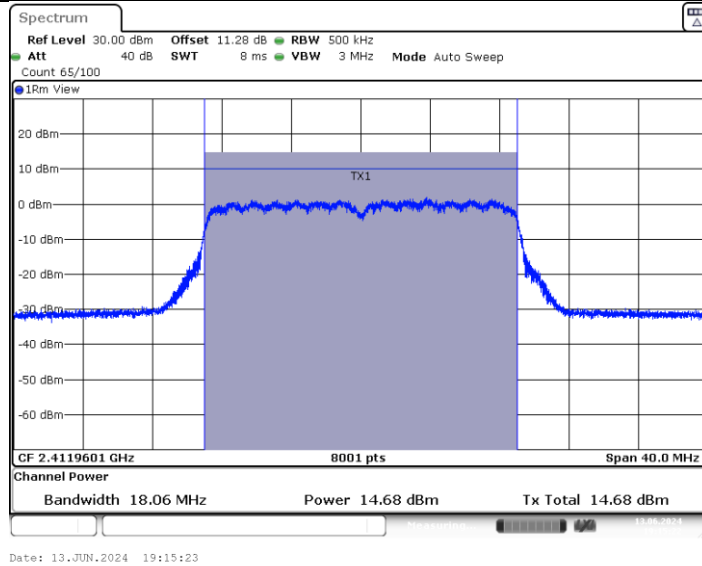


11N20MIMO_Ant1_2437

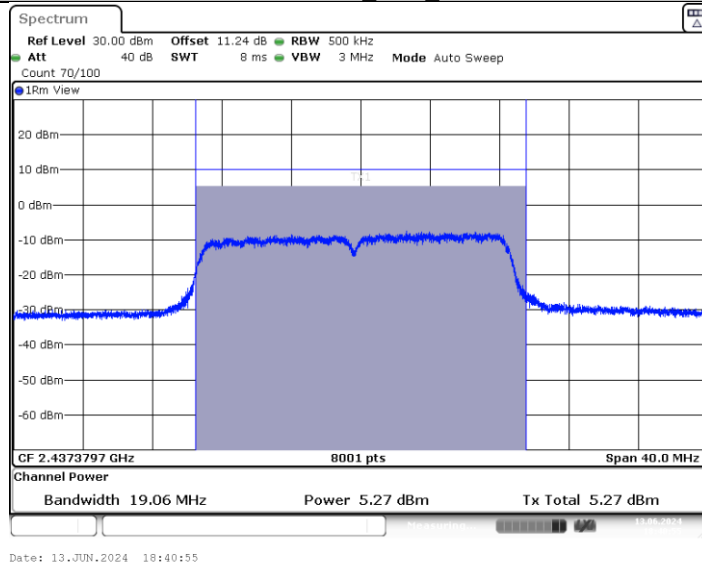


11N20MIMO_Ant2_2437

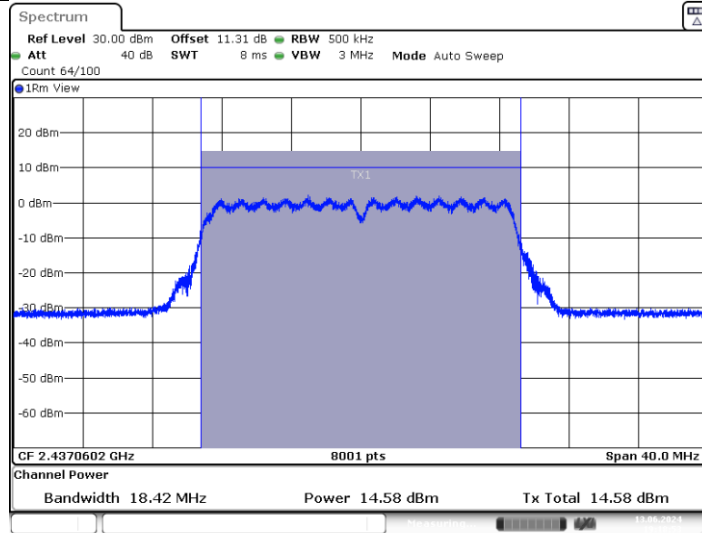

11N20MIMO_Ant1_2462

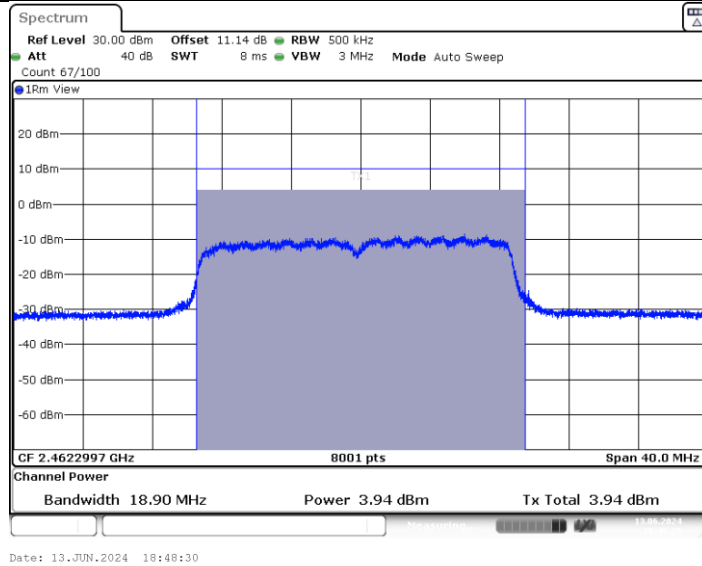

11N20MIMO_Ant2_2462

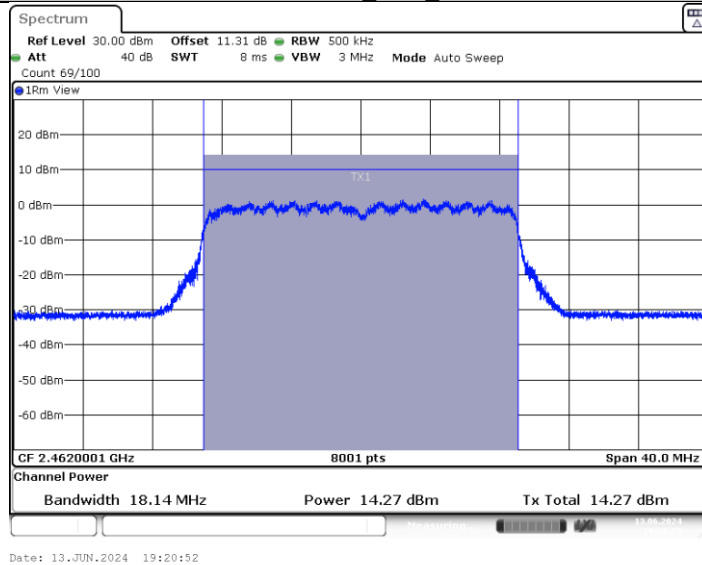


APPENDIXG - CONDUCTED SPURIOUS EMISSIONS

1. Conducted Spurious Emission


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	30~1000	0.50	-58.23	≤-29.5	PASS
			1000~26500	0.50	-44.54	≤-29.5	PASS
	Ant2	2412	30~1000	5.87	-58.32	≤-24.13	PASS
			1000~26500	5.87	-44.73	≤-24.13	PASS
	Ant1	2437	30~1000	0.25	-58.33	≤-29.75	PASS
			1000~26500	0.25	-44.83	≤-29.75	PASS
	Ant2	2437	30~1000	5.55	-58.5	≤-24.45	PASS
			1000~26500	5.55	-45.32	≤-24.45	PASS
	Ant1	2462	30~1000	0.76	-59.11	≤-29.24	PASS
			1000~26500	0.76	-43.76	≤-29.24	PASS
	Ant2	2462	30~1000	5.10	-59.22	≤-24.9	PASS
			1000~26500	5.10	-45.1	≤-24.9	PASS
11G	Ant1	2412	30~1000	-11.57	-58.66	≤-41.57	PASS
			1000~26500	-11.57	-45.11	≤-41.57	PASS
	Ant2	2412	30~1000	1.87	-59.24	≤-28.13	PASS
			1000~26500	1.87	-45.41	≤-28.13	PASS
	Ant1	2437	30~1000	-5.17	-58.61	≤-35.17	PASS
			1000~26500	-5.17	-45.19	≤-35.17	PASS
	Ant2	2437	30~1000	1.59	-59.06	≤-28.41	PASS
			1000~26500	1.59	-44.58	≤-28.41	PASS
	Ant1	2462	30~1000	-4.91	-58.45	≤-34.91	PASS
			1000~26500	-4.91	-45.07	≤-34.91	PASS
	Ant2	2462	30~1000	1.63	-58.93	≤-28.37	PASS
			1000~26500	1.63	-45.26	≤-28.37	PASS
11N20MIMO	Ant1	2412	30~1000	-6.70	-58.6	≤-36.7	PASS
			1000~26500	-6.70	-45.16	≤-36.7	PASS
	Ant2	2412	30~1000	2.07	-57.56	≤-27.93	PASS
			1000~26500	2.07	-45.01	≤-27.93	PASS
	Ant1	2437	30~1000	-6.61	-58.83	≤-36.61	PASS
			1000~26500	-6.61	-45.1	≤-36.61	PASS
	Ant2	2437	30~1000	1.92	-58.84	≤-28.08	PASS
			1000~26500	1.92	-44.98	≤-28.08	PASS
	Ant1	2462	30~1000	-6.43	-57.58	≤-36.43	PASS
			1000~26500	-6.43	-45.56	≤-36.43	PASS
	Ant2	2462	30~1000	1.48	-58.44	≤-28.52	PASS
			1000~26500	1.48	-45.54	≤-28.52	PASS

Test Graphs


11B_Ant1_2412_30~1000



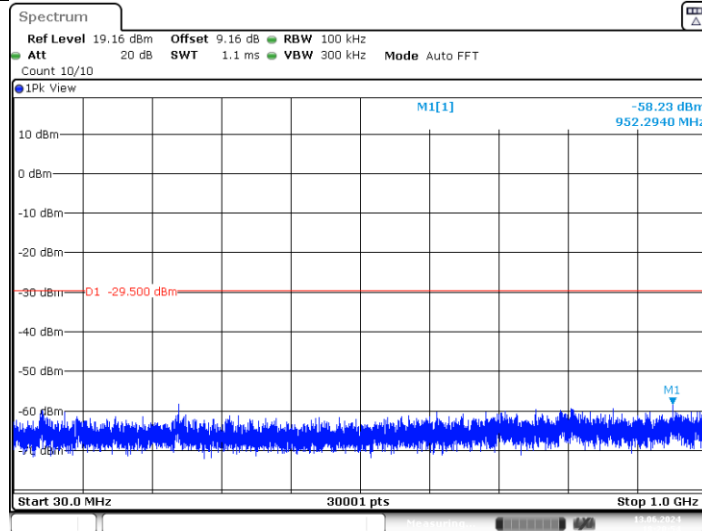



11B_Ant1_2412_1000~26500



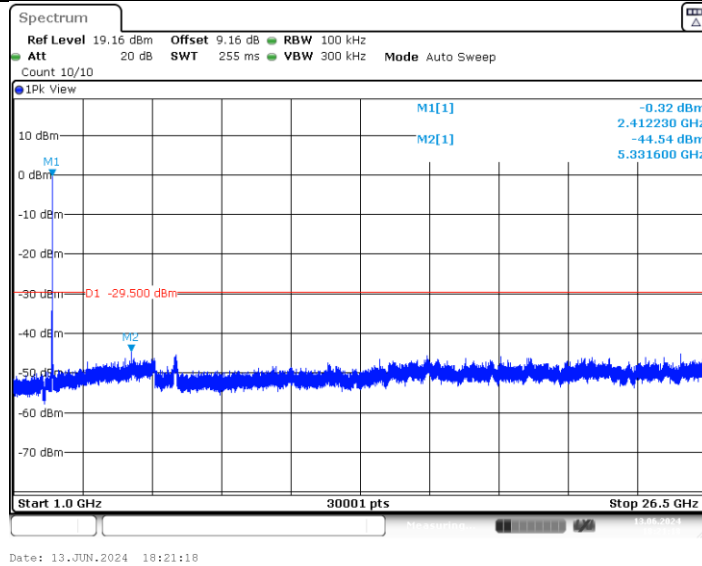



11B_Ant2_2412_30~1000



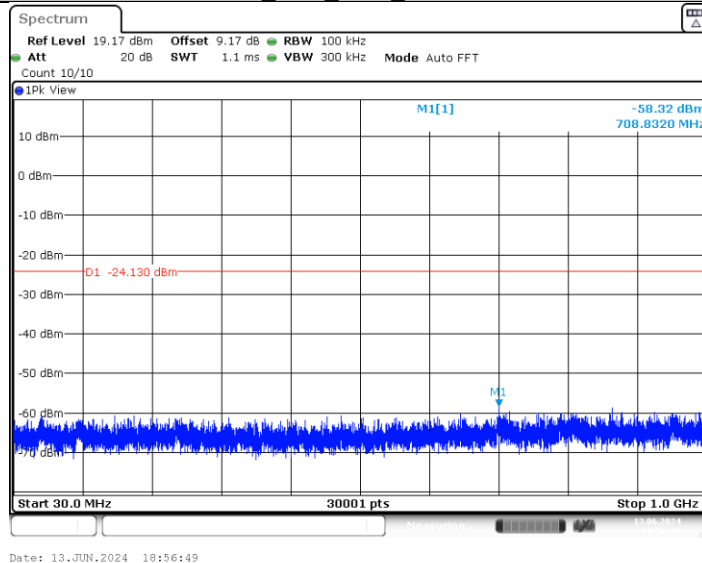


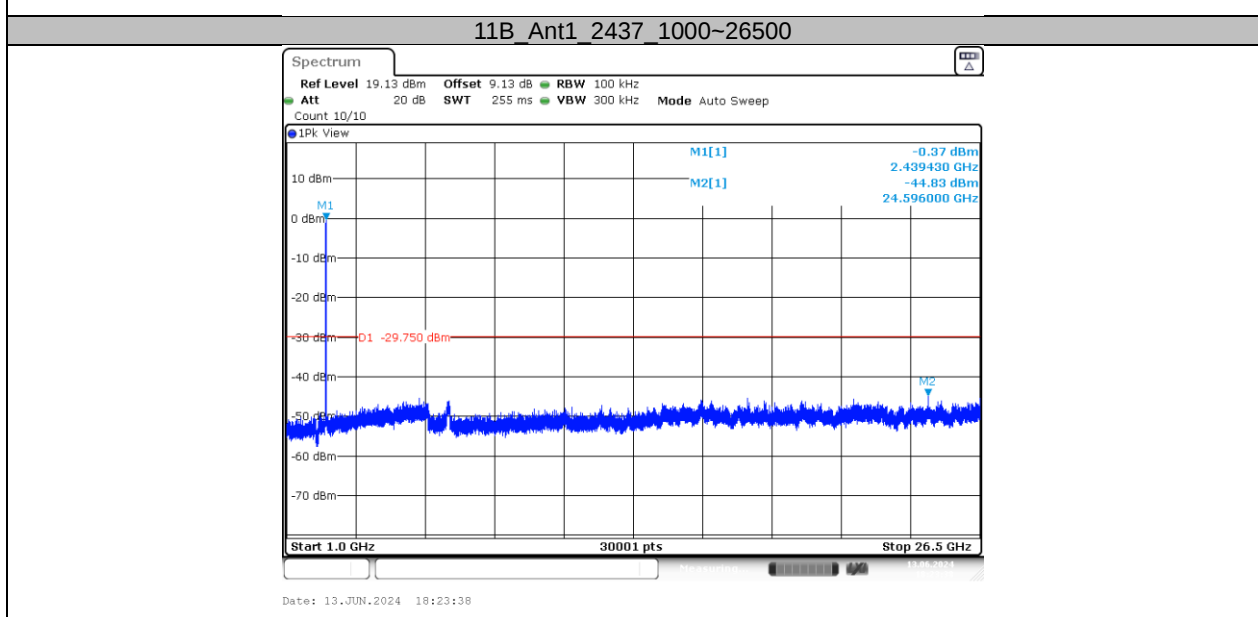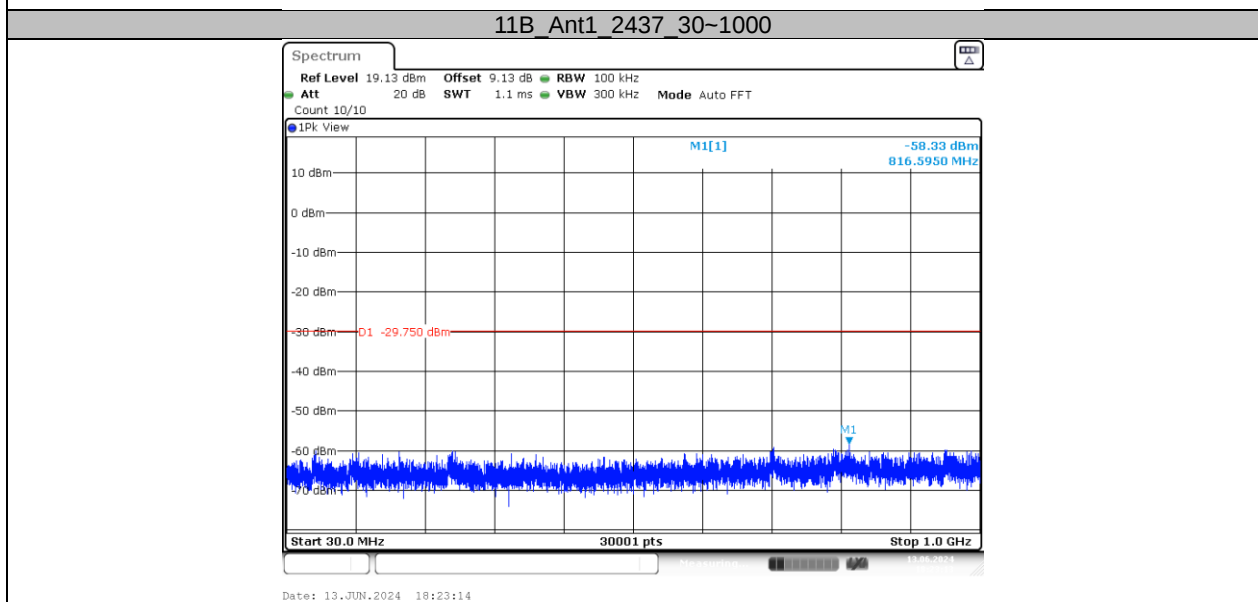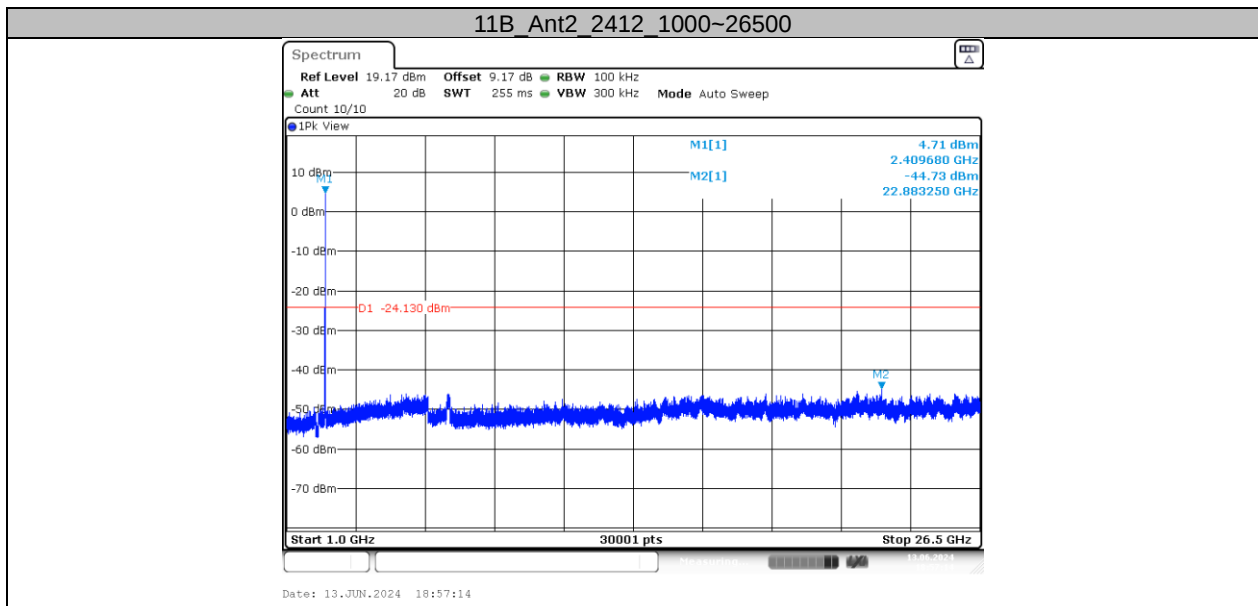




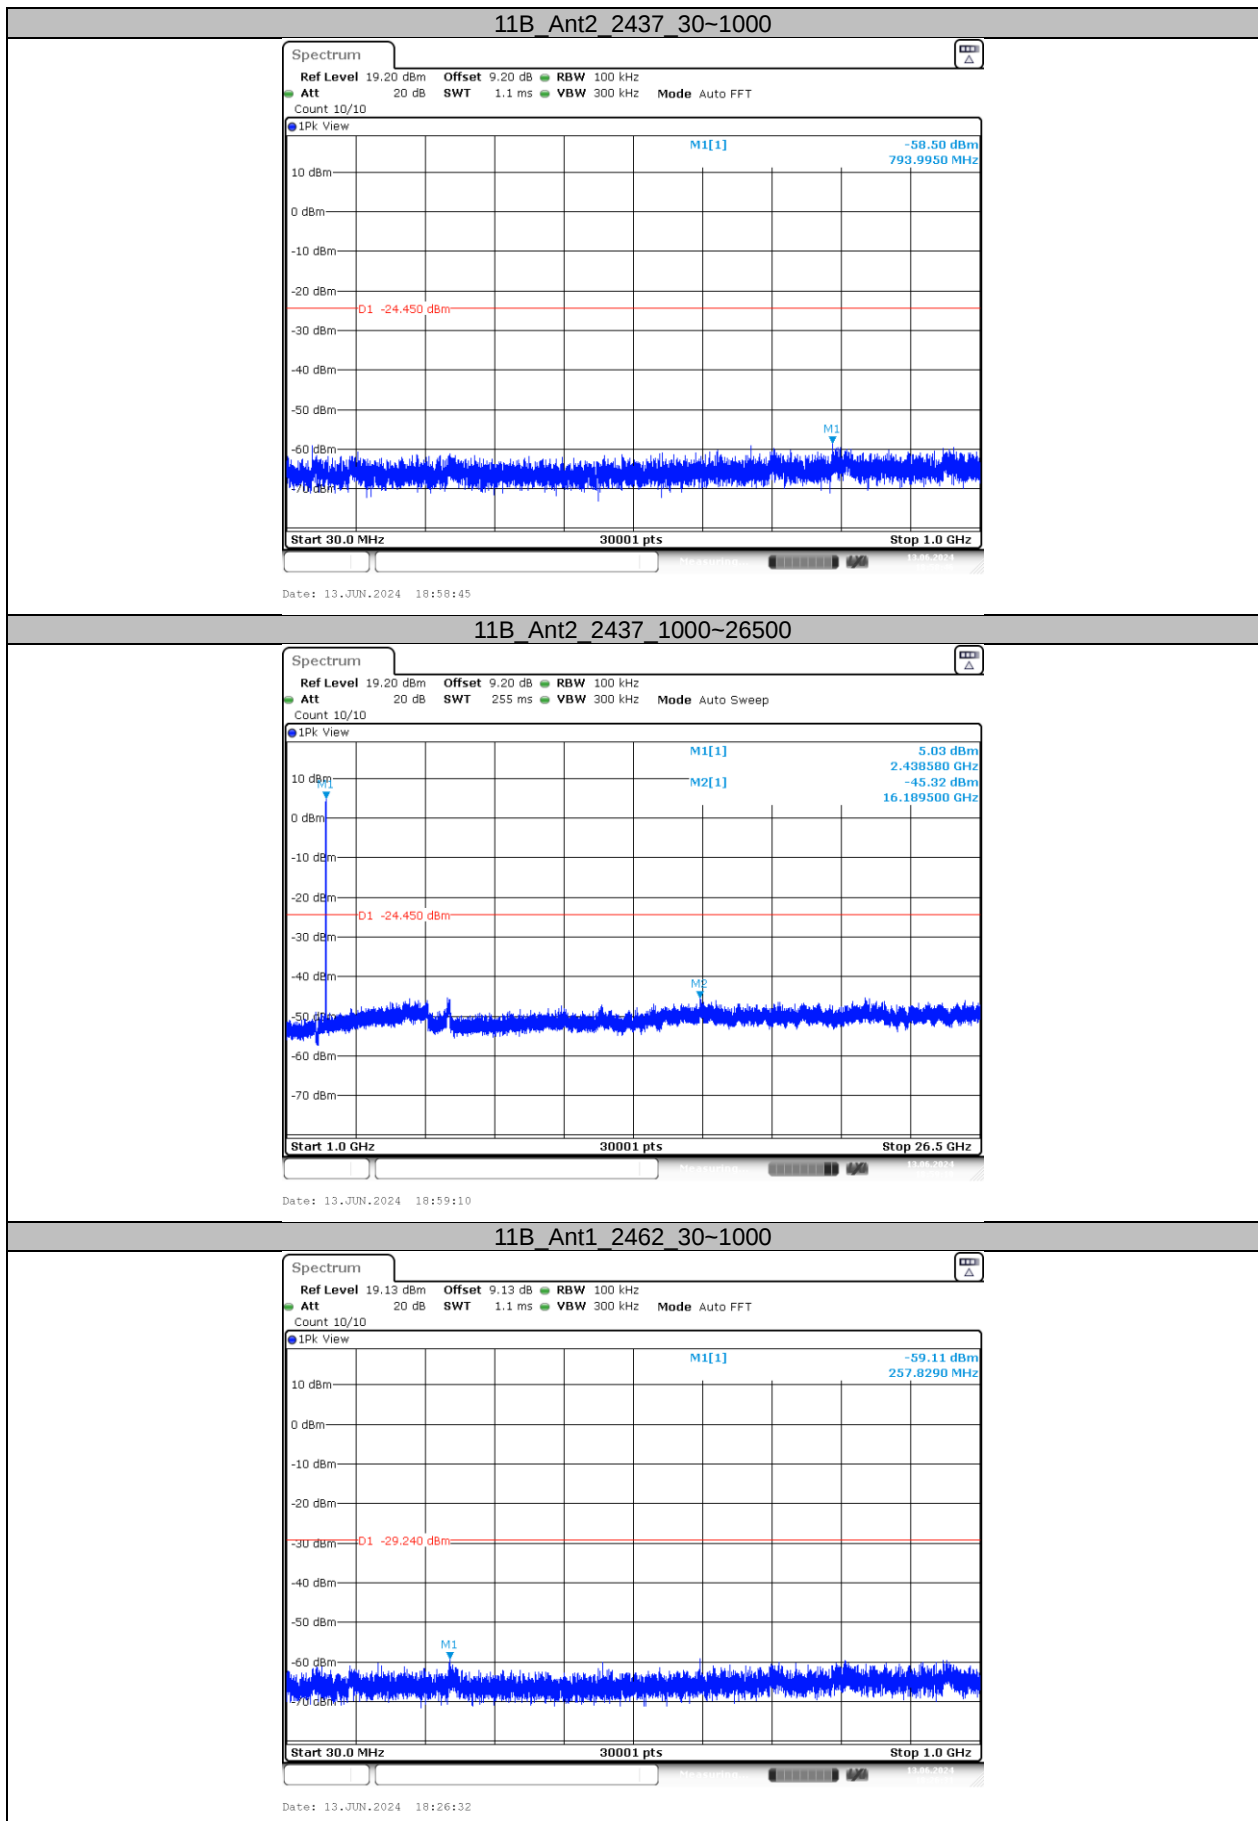


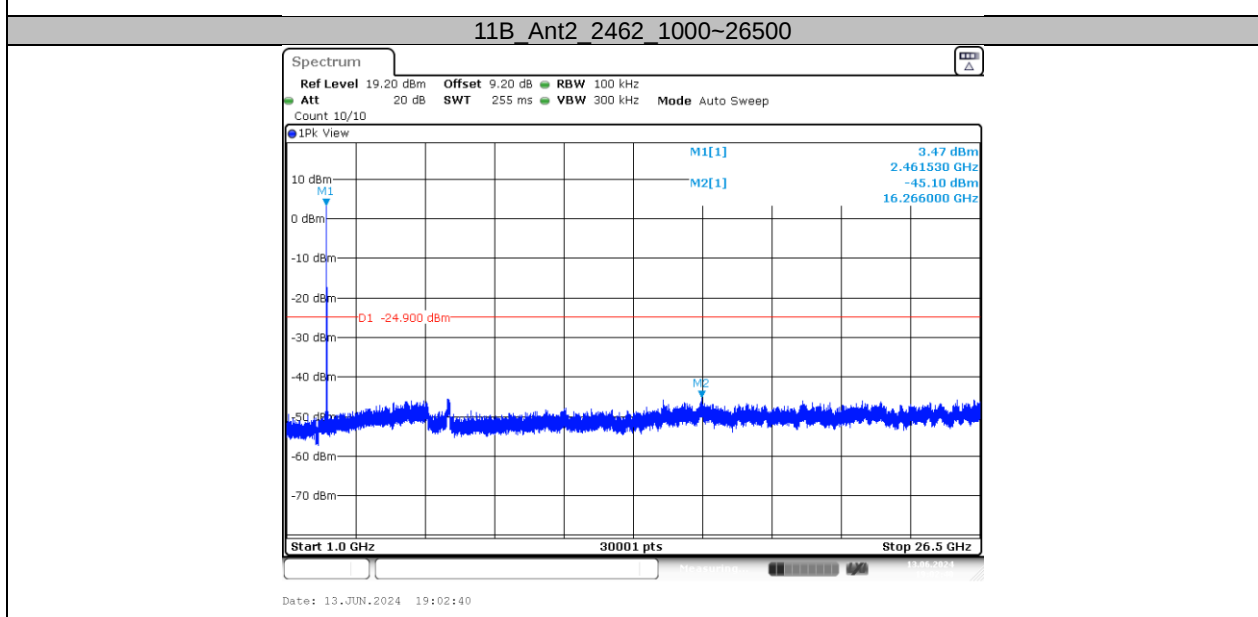
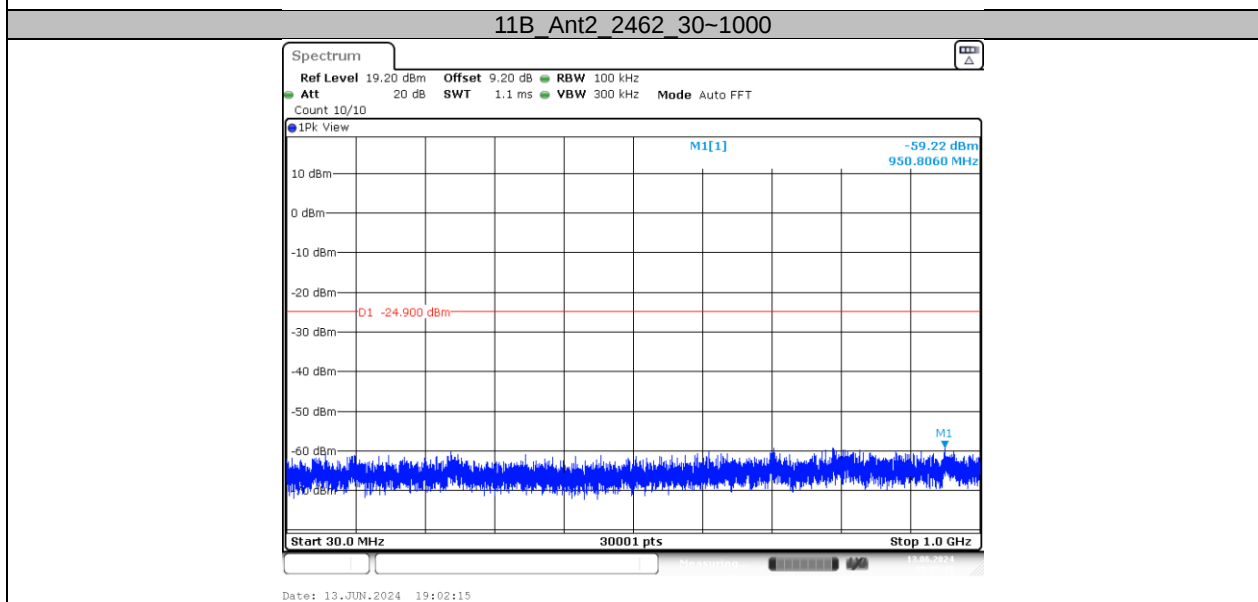
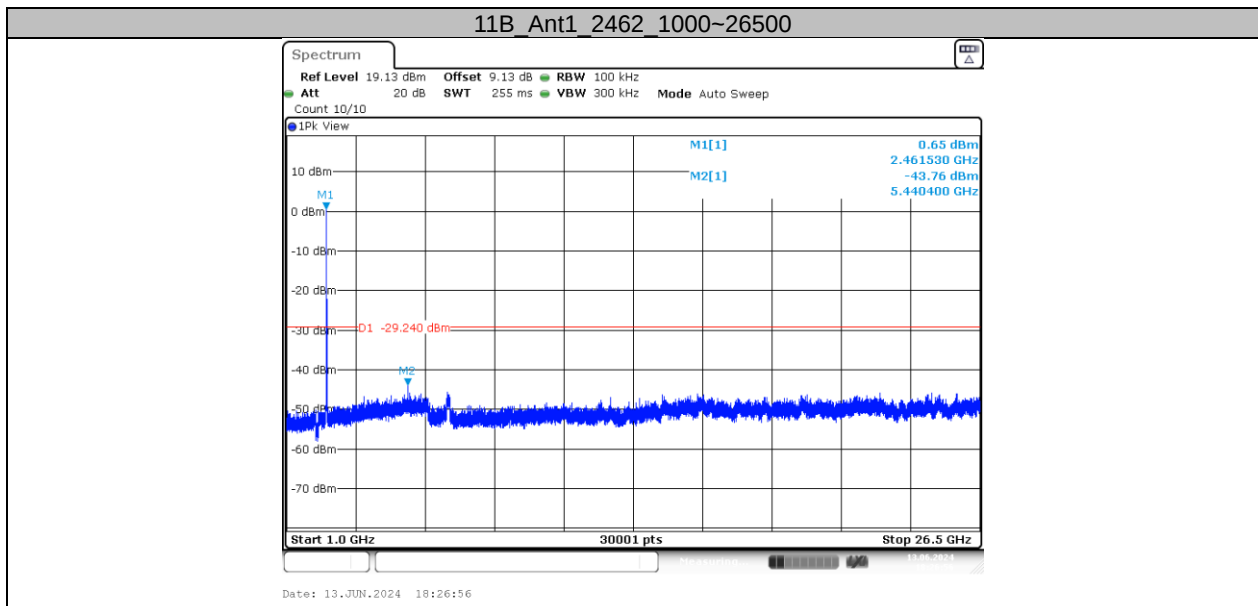




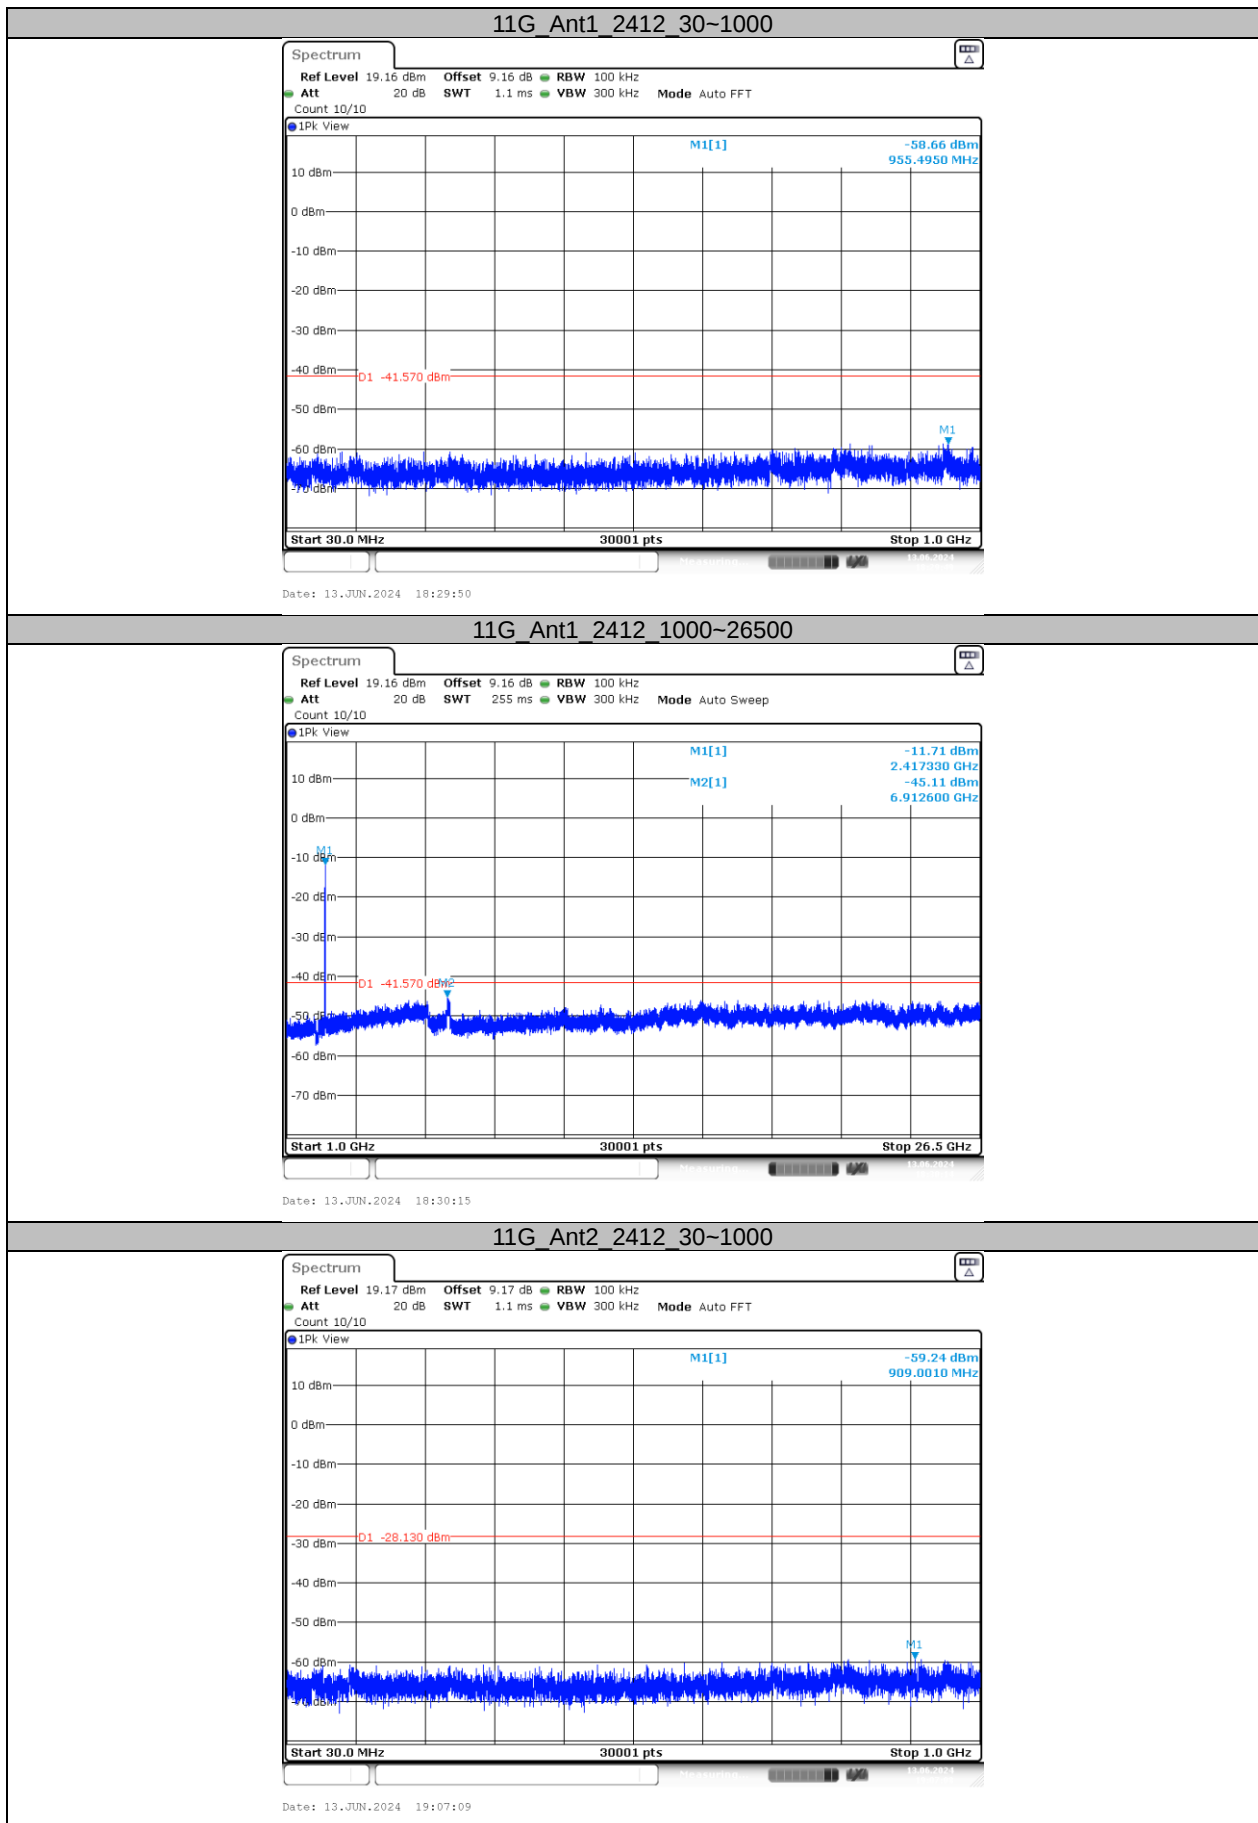


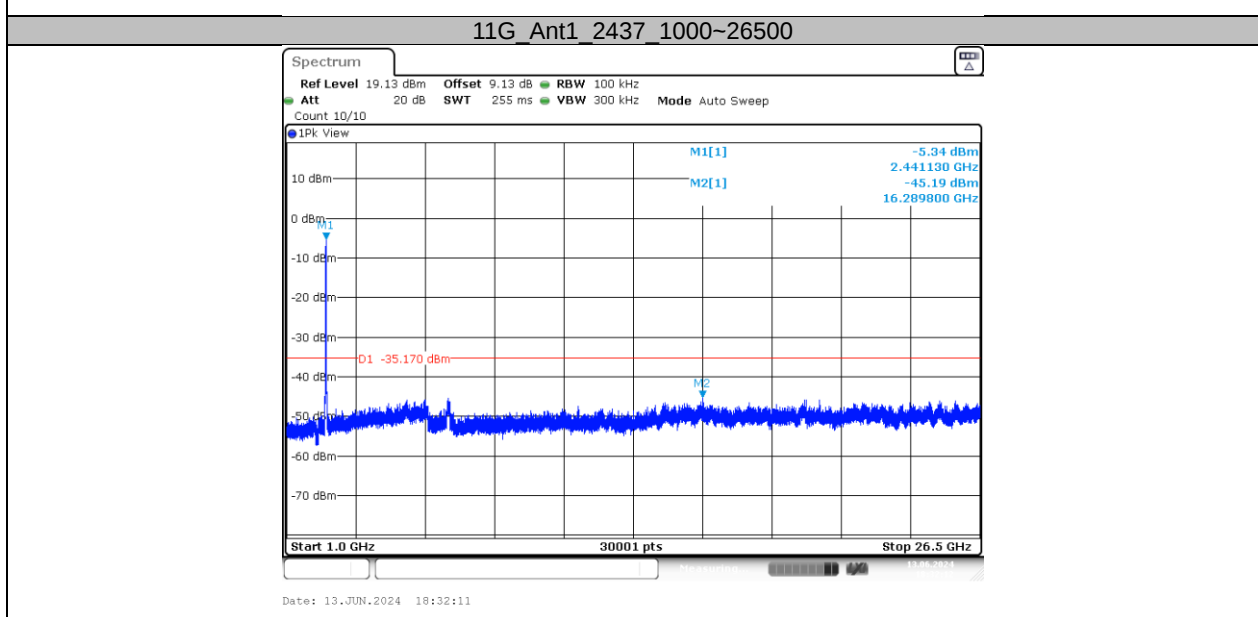
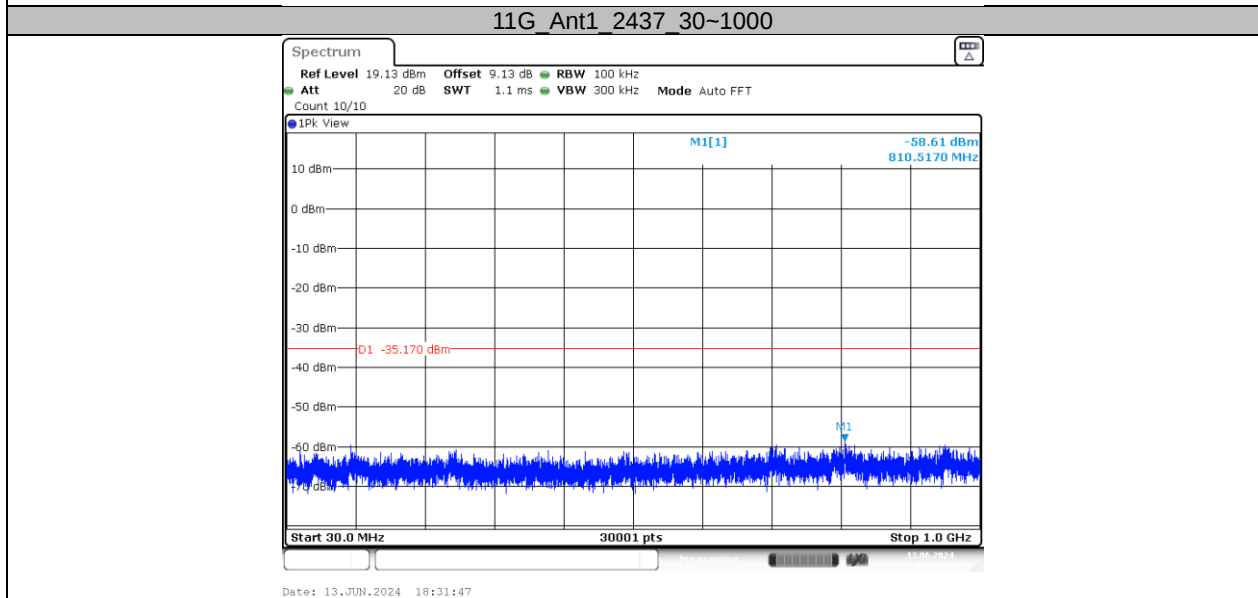
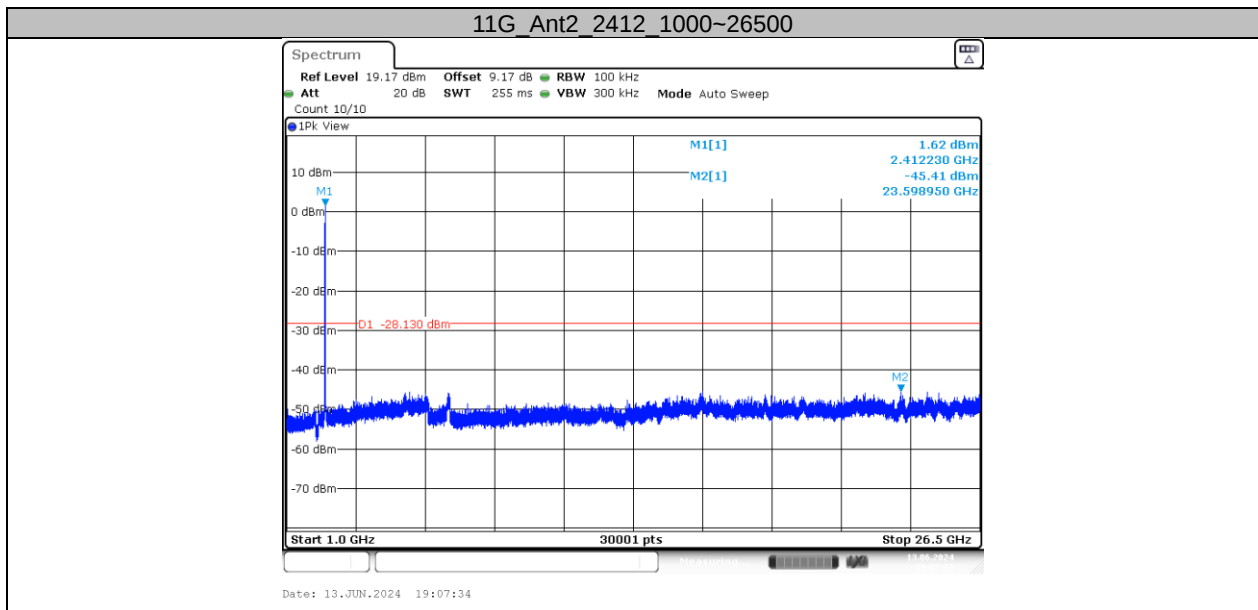




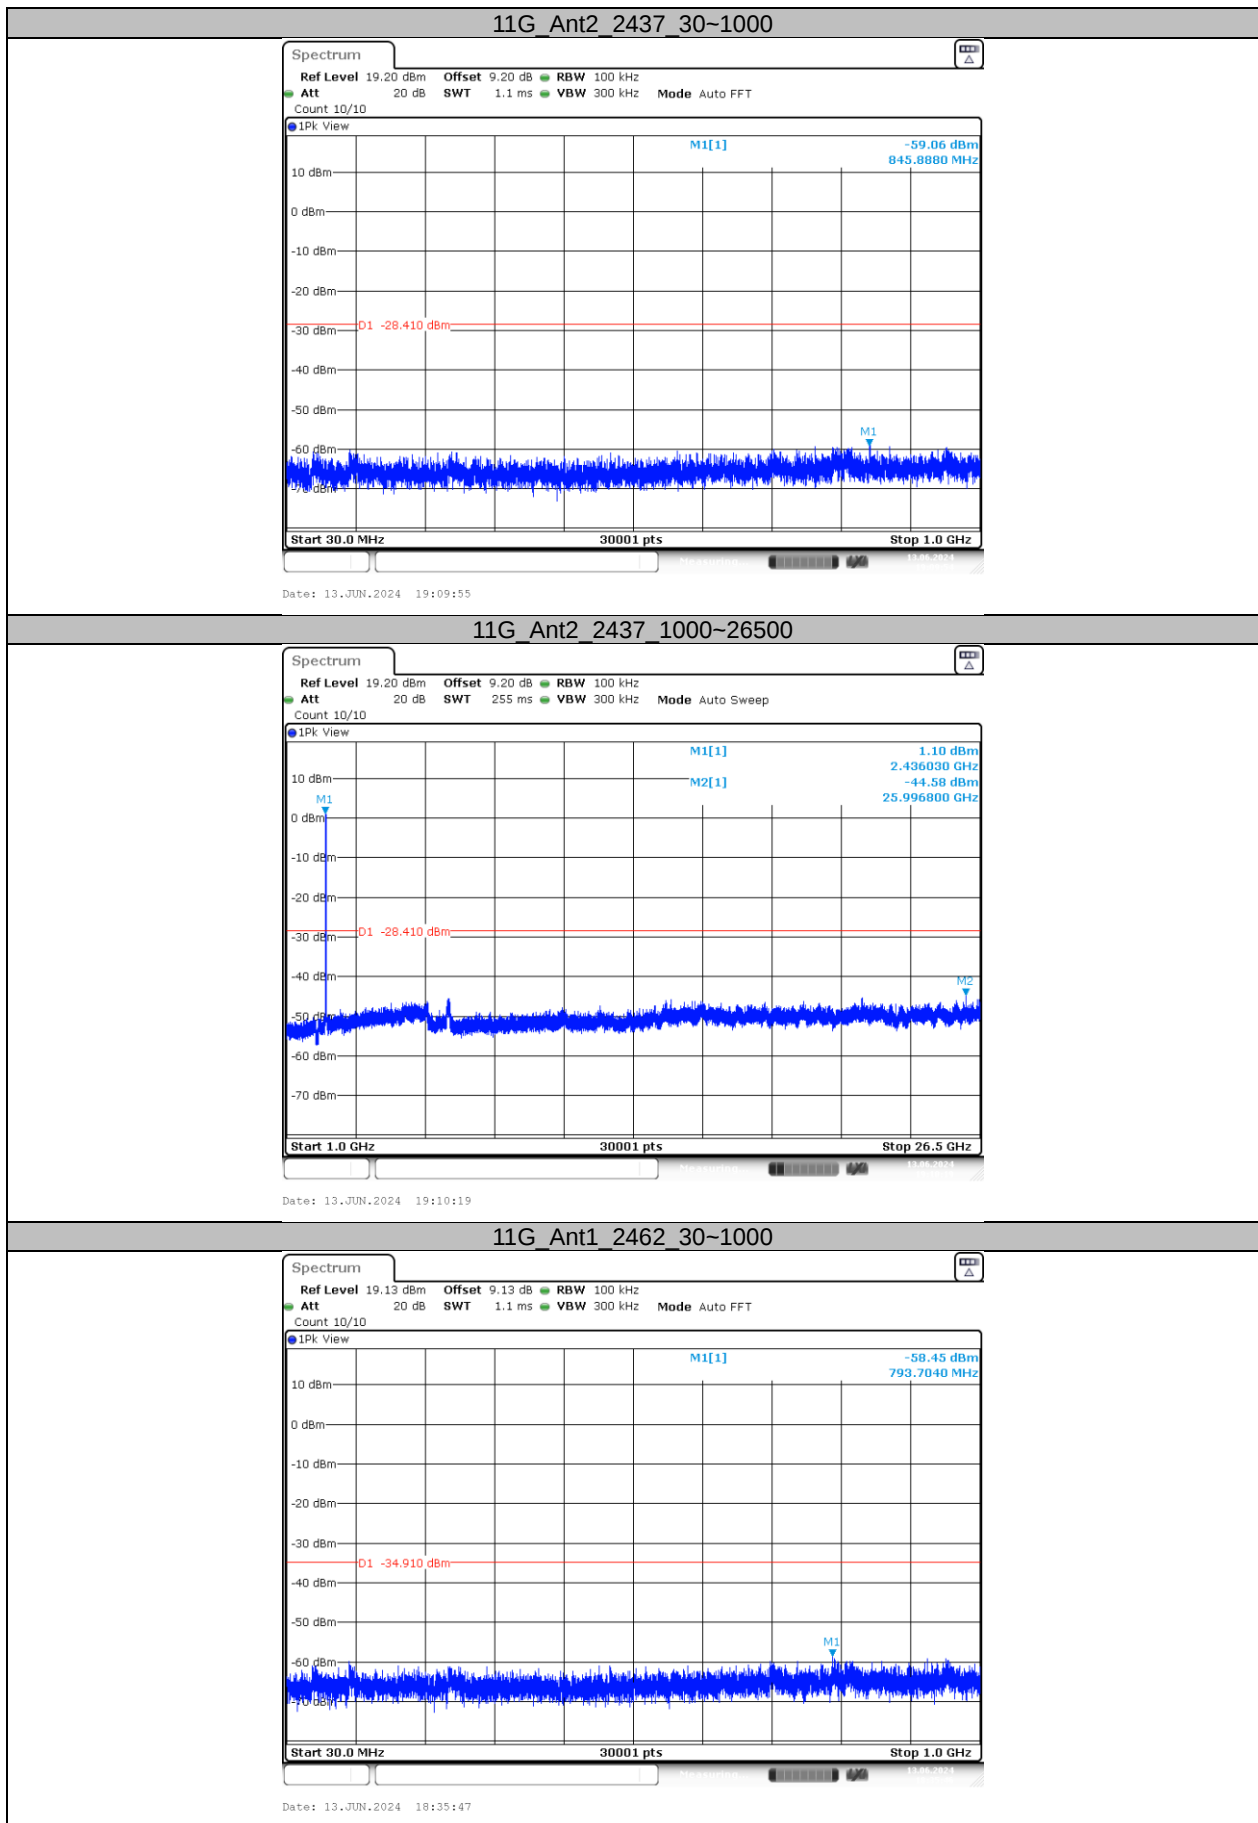


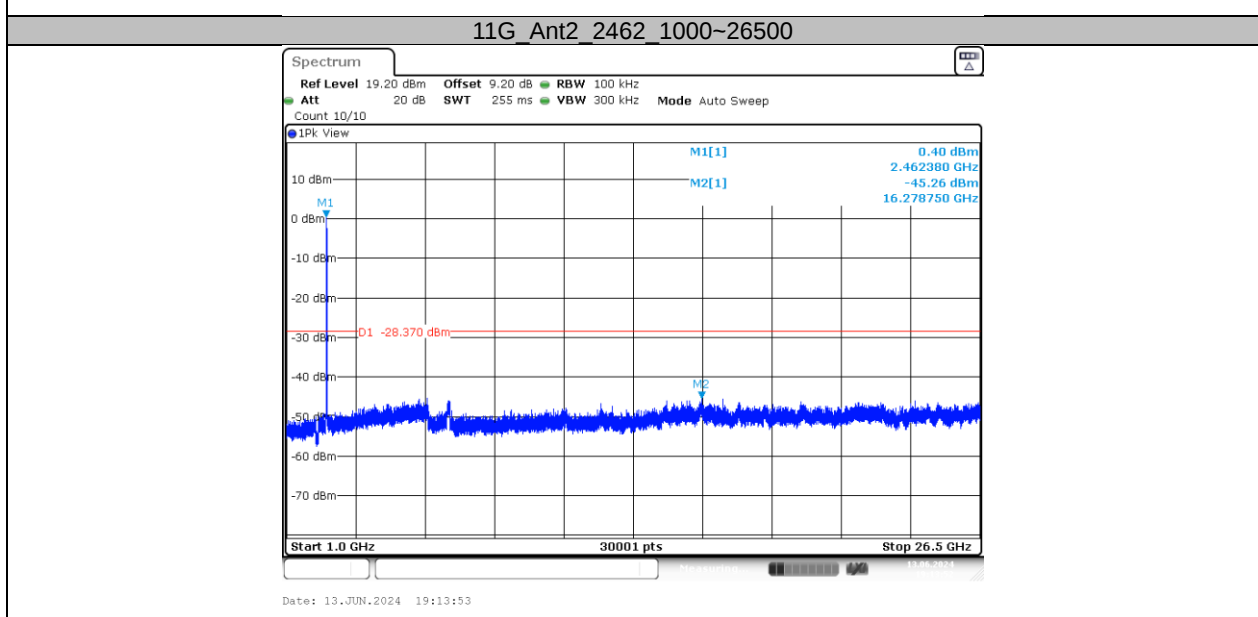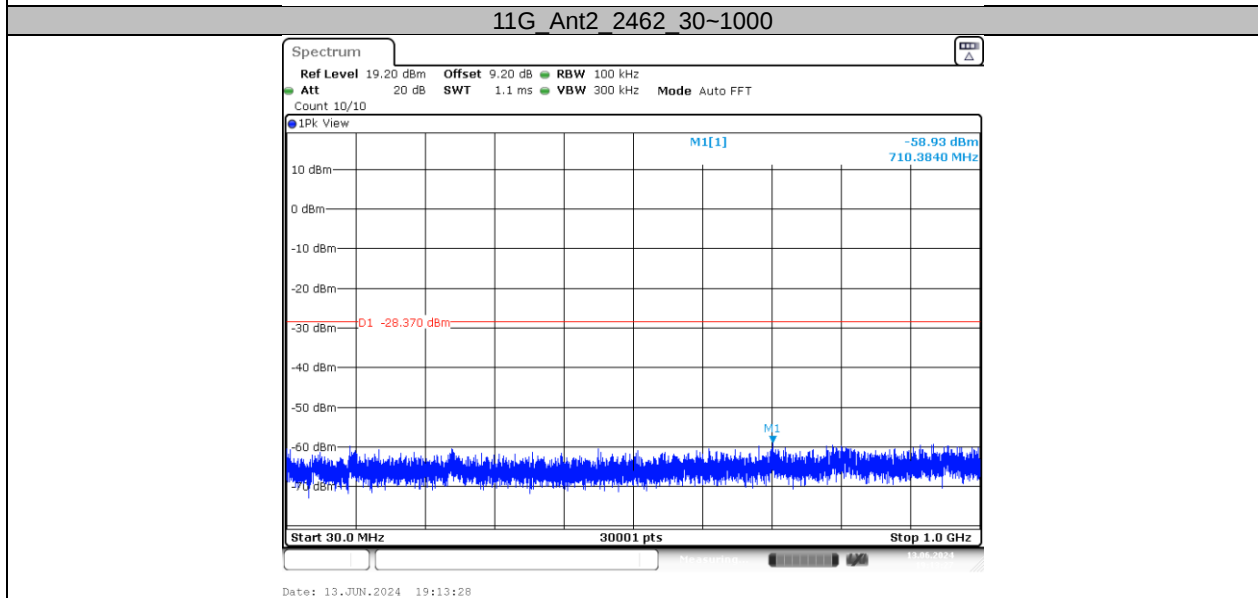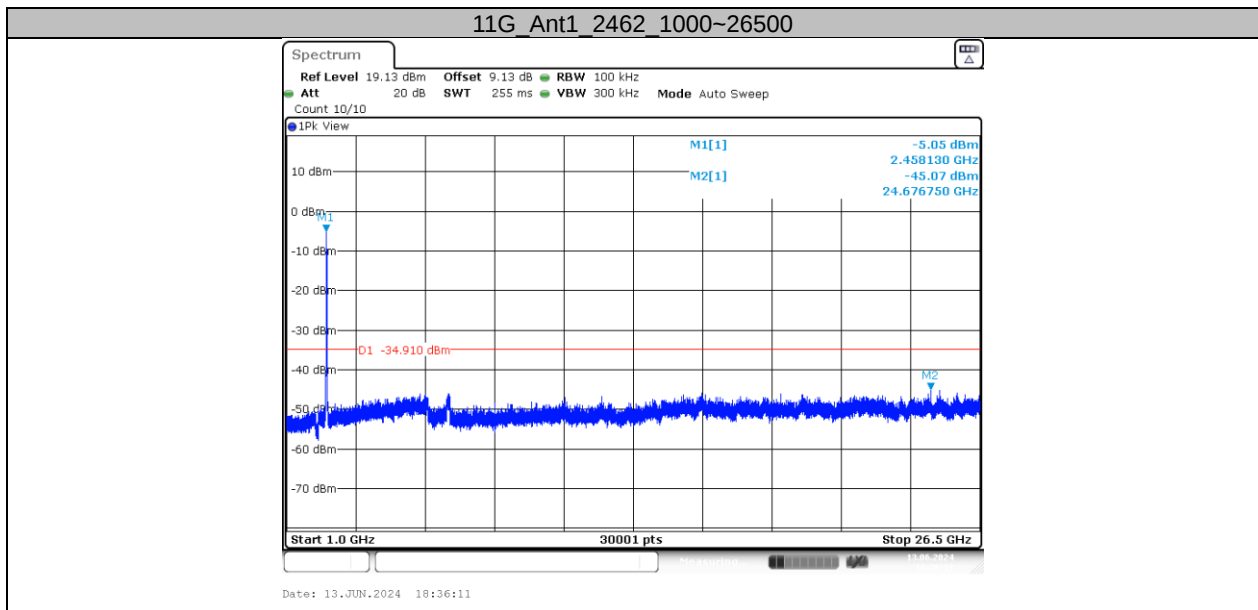

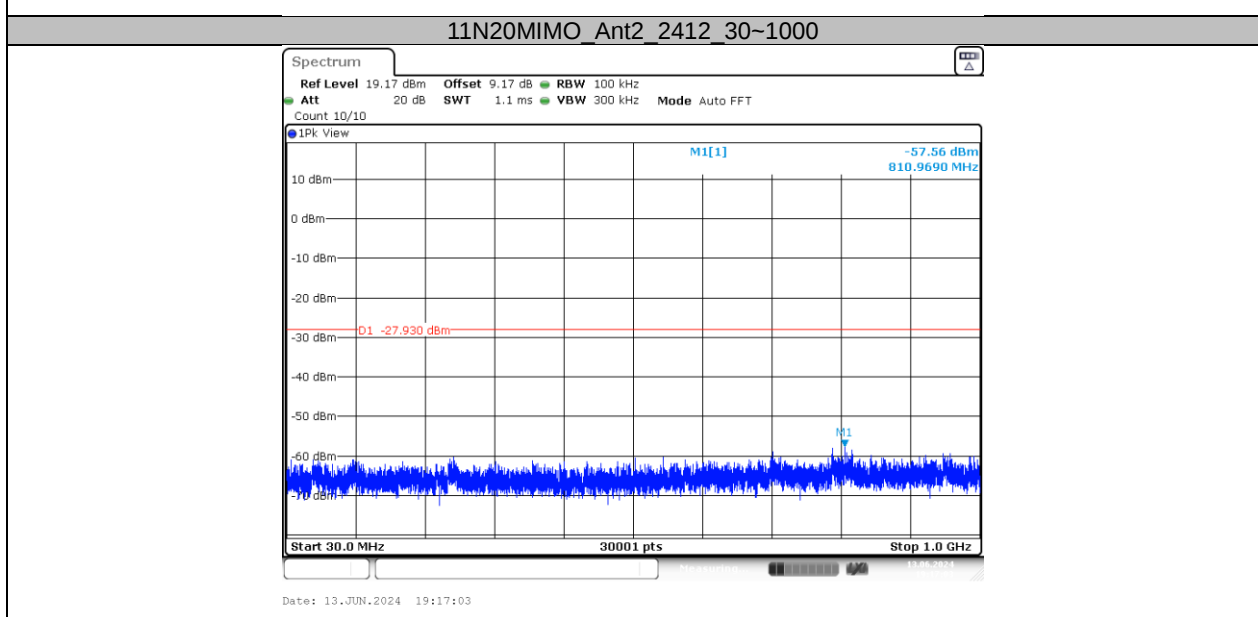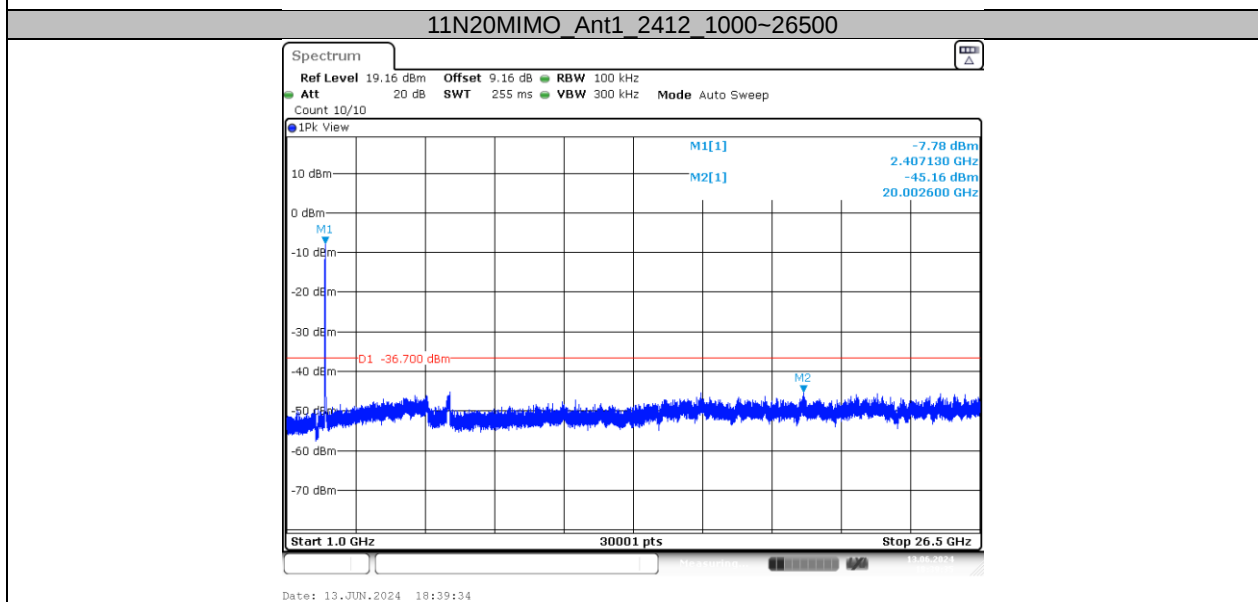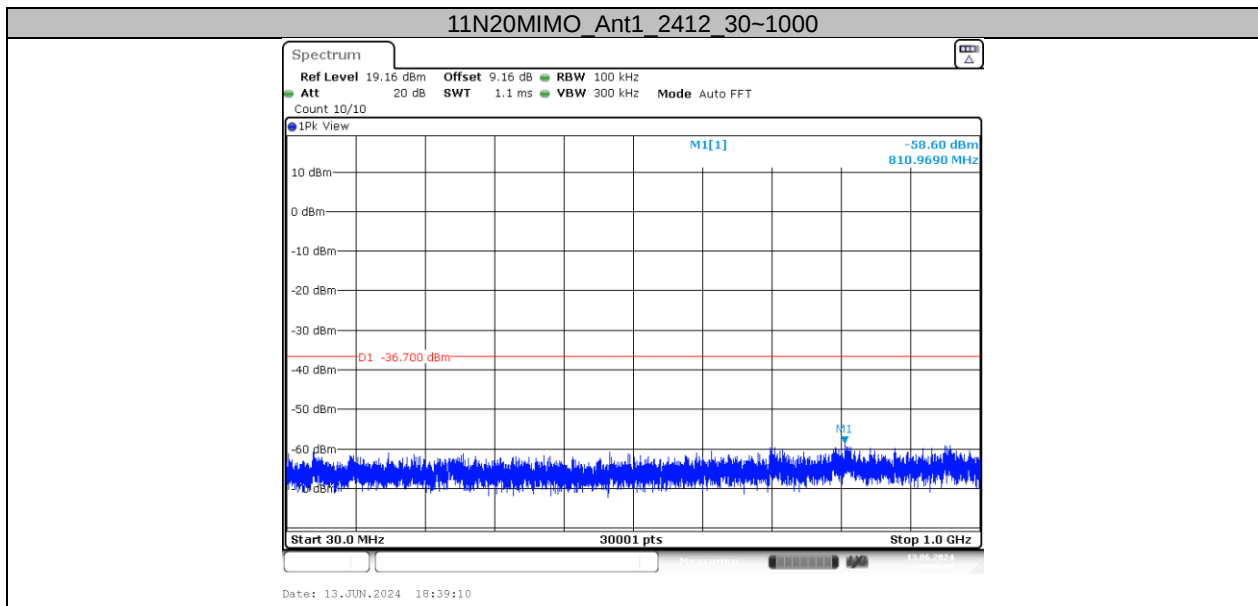

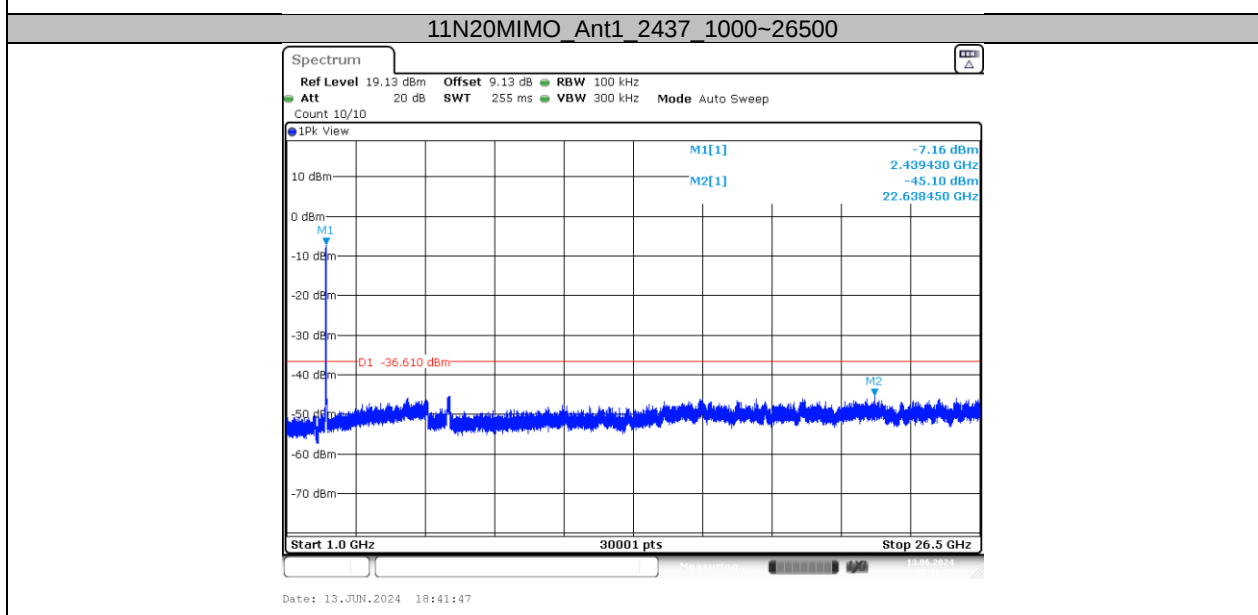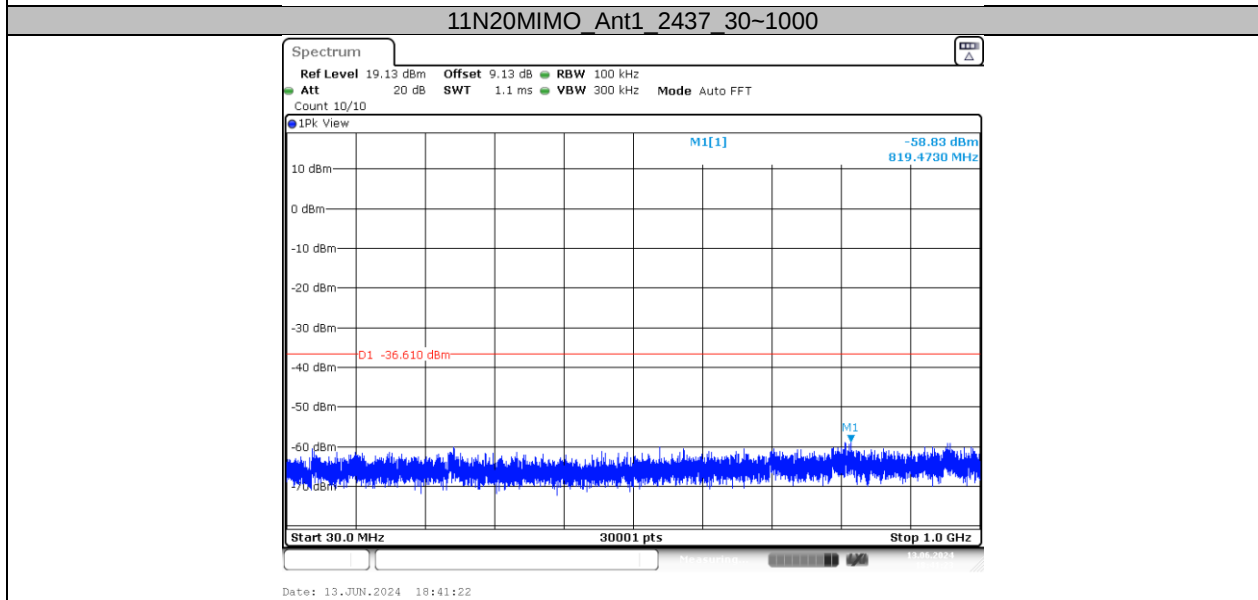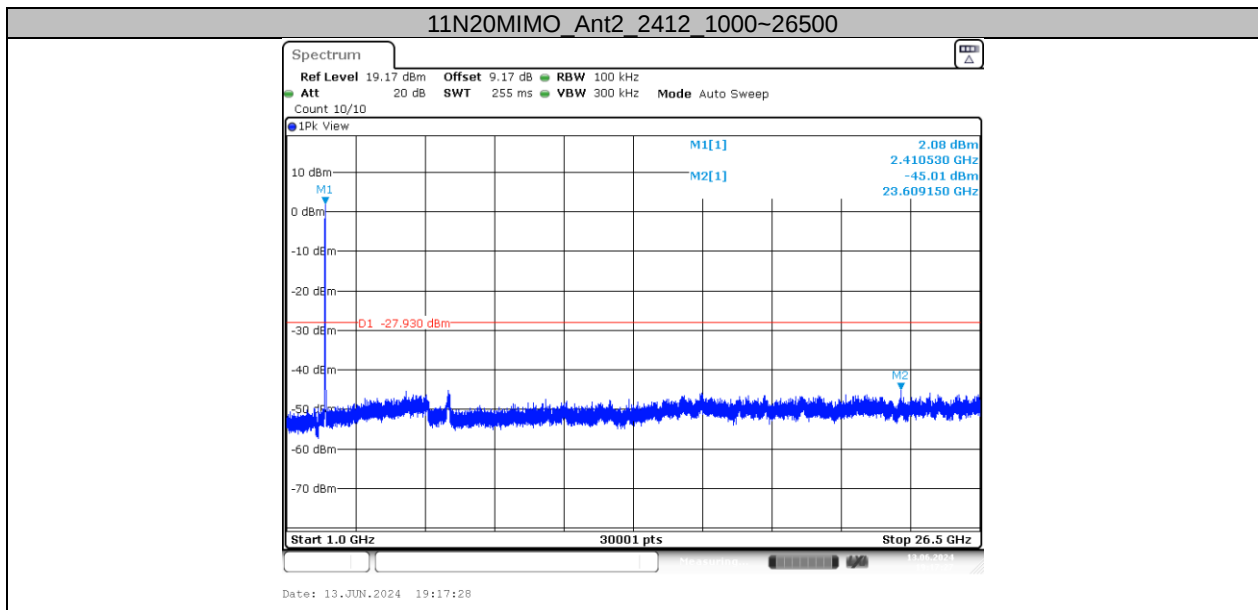

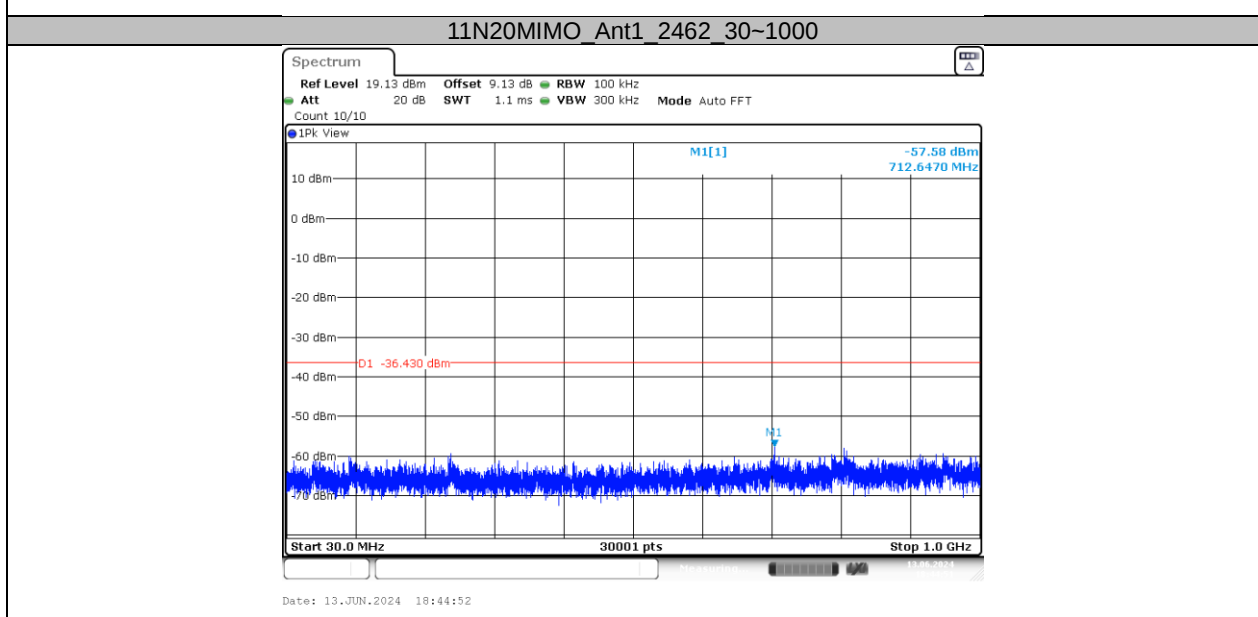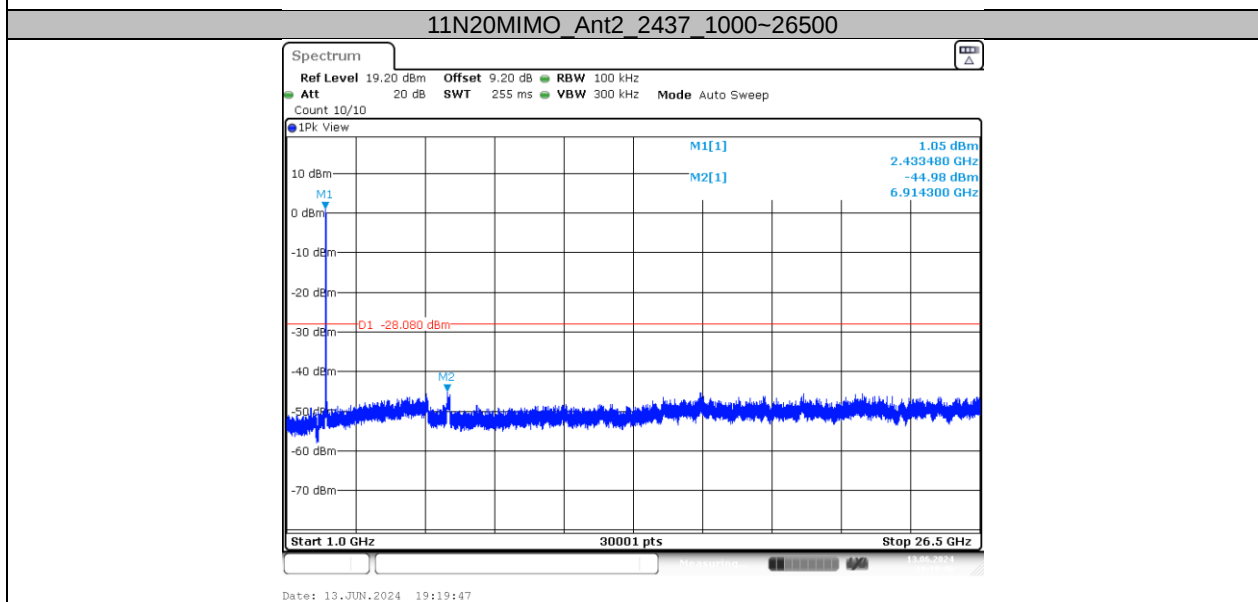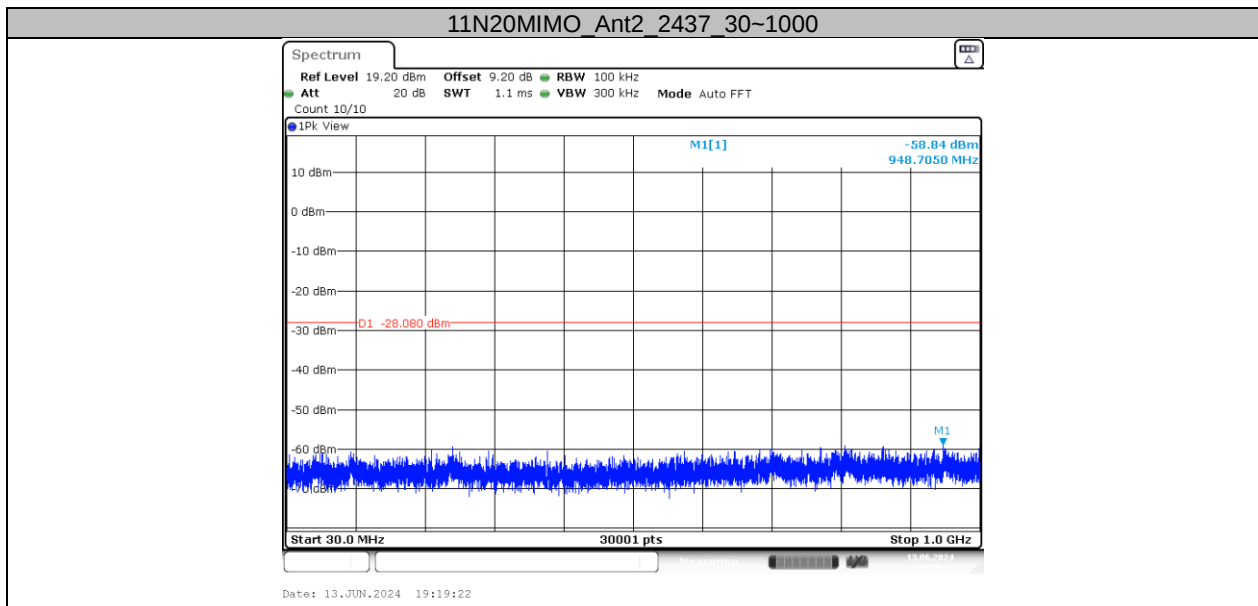

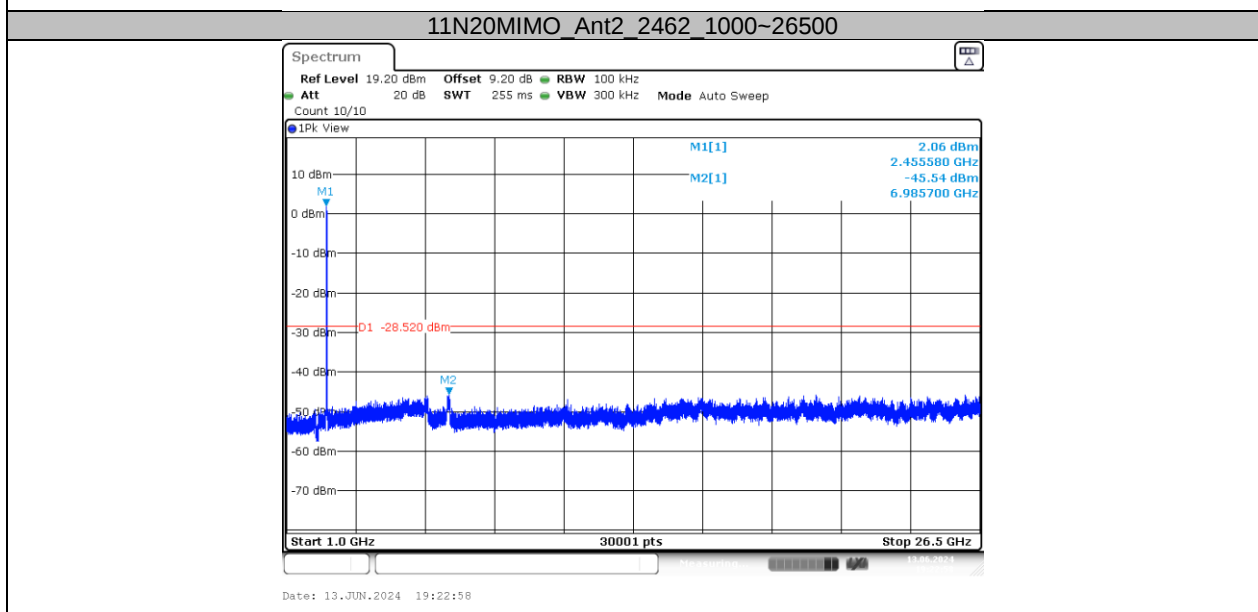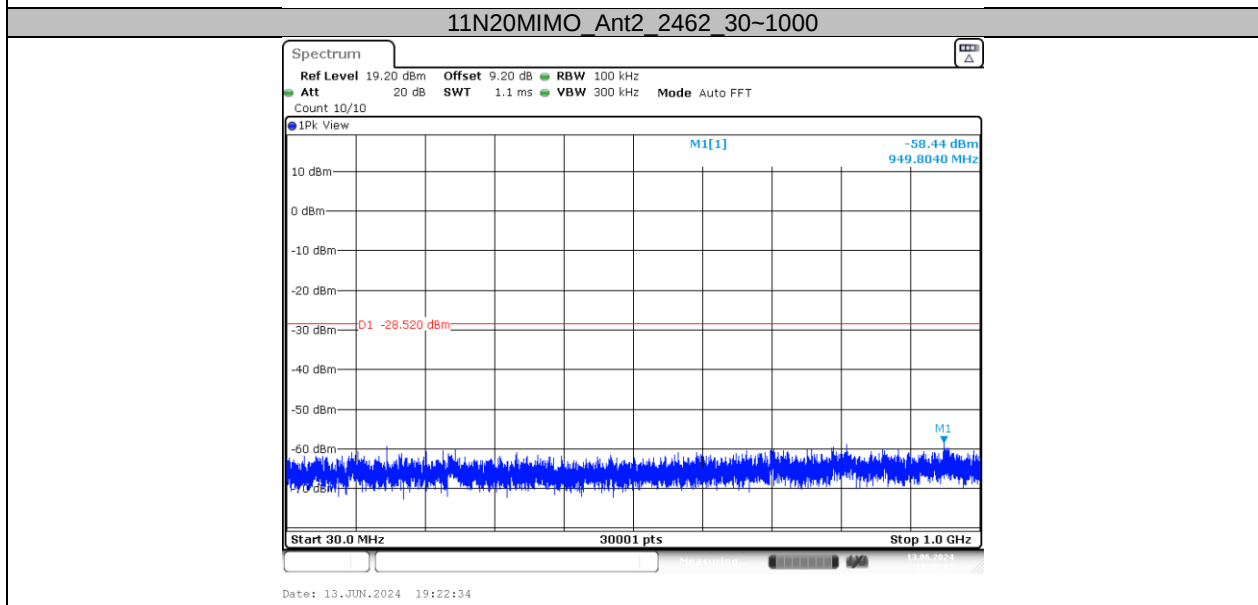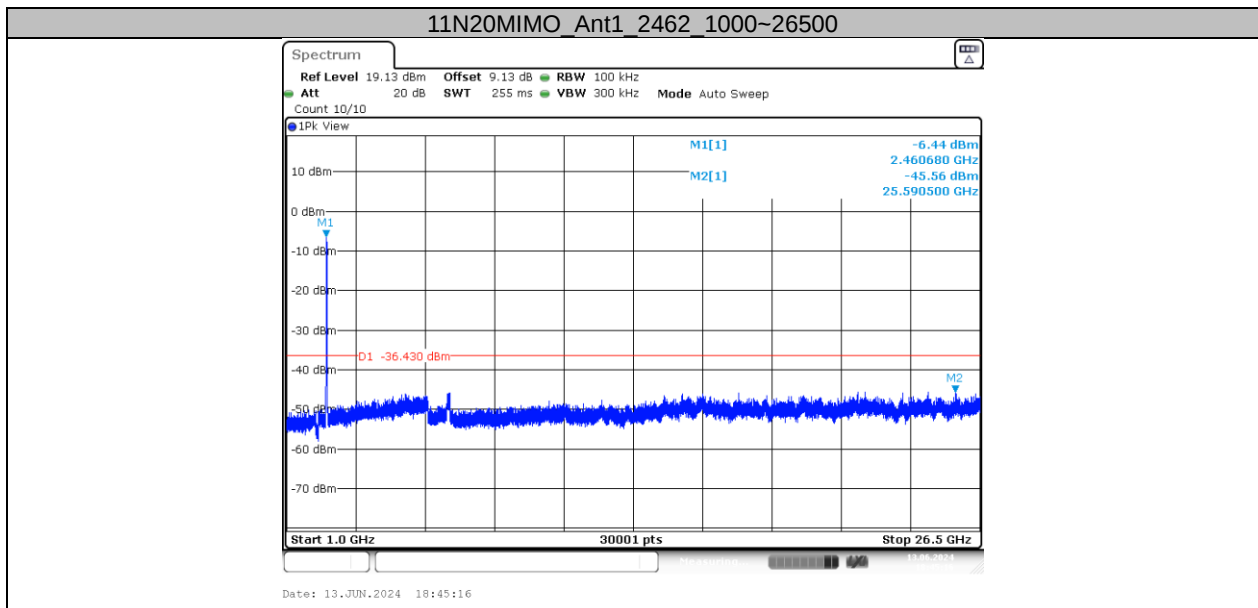


2. Band edge measurements

Reference level measurement

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	Ant1	2412	2412.99	0.50
	Ant2	2412	2412.49	5.87
	Ant1	2437	2437.49	0.25
	Ant2	2437	2437.50	5.55
	Ant1	2462	2461.49	0.76
	Ant2	2462	2462.99	5.10
11G	Ant1	2412	2419.50	-11.57
	Ant2	2412	2414.48	1.87
	Ant1	2437	2444.48	-5.17
	Ant2	2437	2430.75	1.59
	Ant1	2462	2464.48	-4.91
	Ant2	2462	2464.48	1.63
11N20MIMO	Ant1	2412	2419.51	-6.70
	Ant2	2412	2419.17	2.07
	Ant1	2437	2444.19	-6.61
	Ant2	2437	2444.48	1.92
	Ant1	2462	2469.51	-6.43
	Ant2	2462	2464.51	1.48


TEST GRAPHS

11B_Ant1_2412

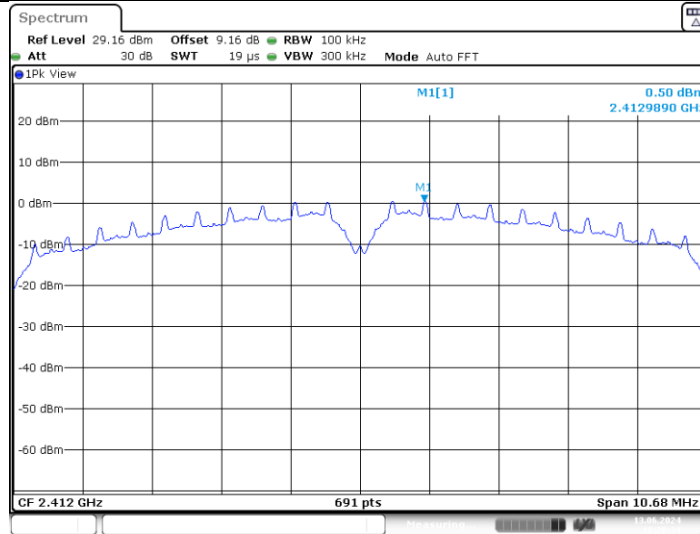


Date: 13.JUN.2024 18:20:35

11B_Ant2_2412

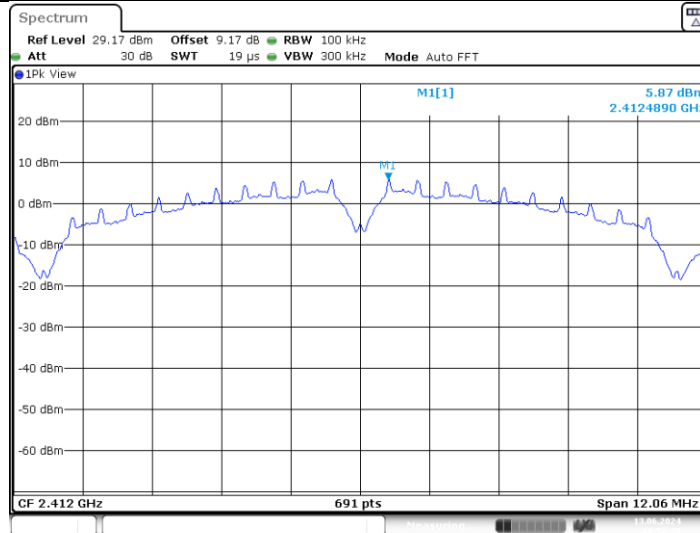


Date: 13.JUN.2024 18:56:30

11B_Ant1_2437

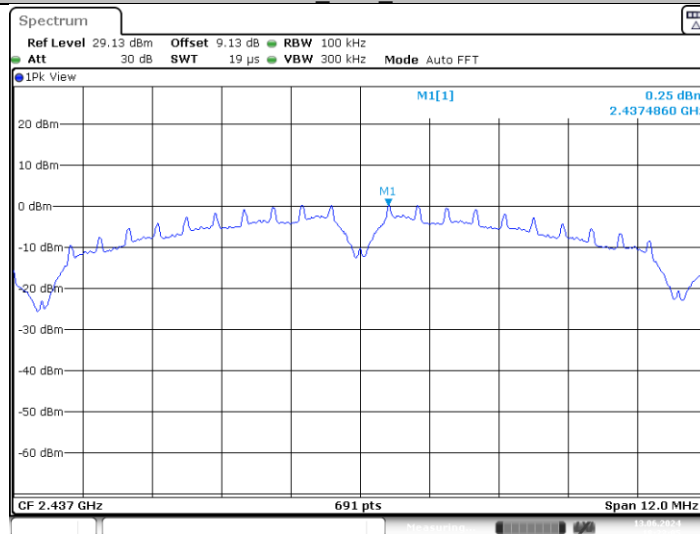


Date: 13.JUN.2024 18:23:05

11B_Ant2_2437

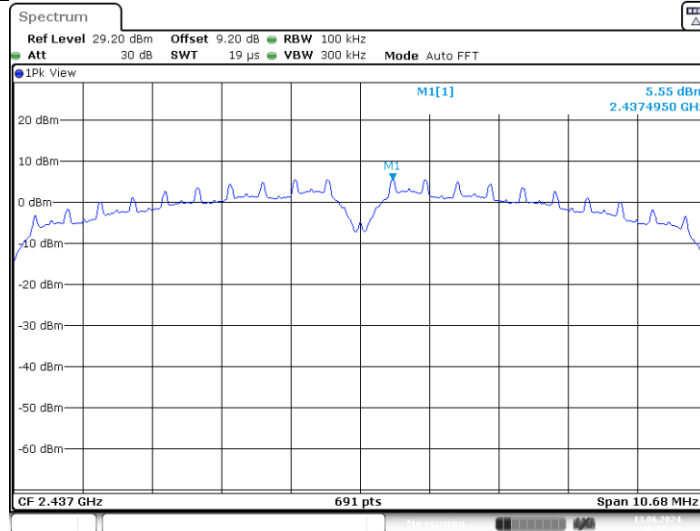

11B_Ant1_2462

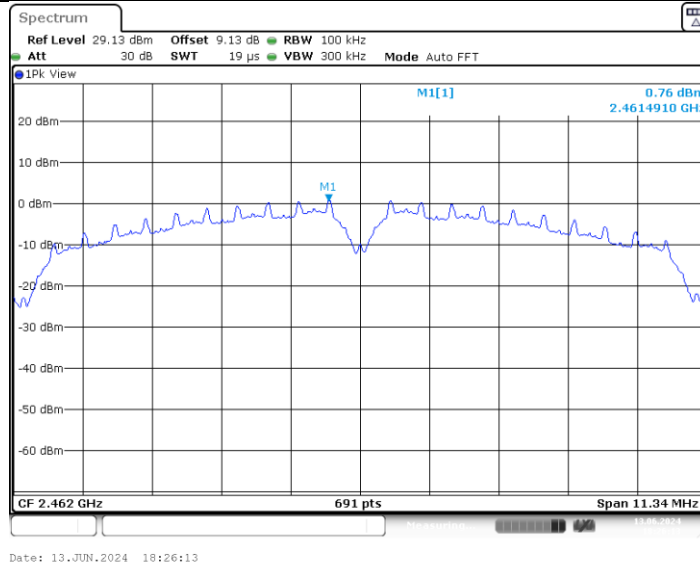

11B_Ant2_2462

