

Quick Start Guide

Smart Wi-Fi Power Strip

©2025 TP-Link 7106511902 REV1.0.0

*Images may differ from your actual product.

Getting Started

STEP 1 Download Tapo

Get the **Tapo** app from the App Store or Google Play, and log in.




OR




STEP 2 Set Up


Tap the ⊕ button in the app. Select **Plugs** and then your model. Follow the step-by-step app instructions to set up your smart power strip.



How to Wall-Mount Your Device

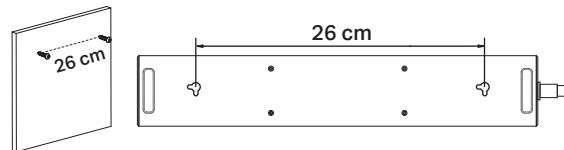

1. Mark the screw hole locations on the wall, with a 26 cm spacing between the two screws.
2. Use a drill to insert the screws into the marked locations and securely attach the power strip.



For a smooth installation, use screws with a diameter range of 4-8 mm for the screw cap
(Screw 4# or 6# recommended).

Note:
A < 2.5 mm
B > 6 mm
2 mm < C < 3 mm
4 mm < D ≤ 6 mm




Need some help?

Visit <https://www.tapo.com/support/> for technical support, the user guide, FAQs, warranty & more



Appearance

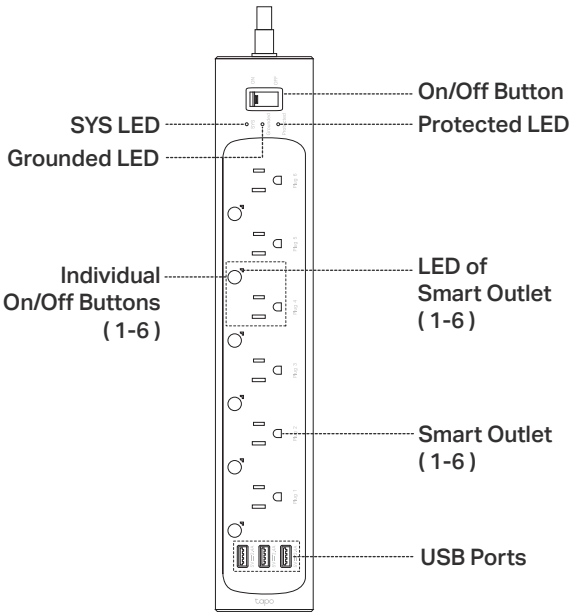

LED

• SYS LED

Blinking Green & Red	Ready for setup
Blinking Green Quickly	Setting up; Resetting Wi-Fi
White	Completed setup and connected to the cloud
Orange	Completed setup and disconnected to the cloud
Blinking Orange Quickly	Resetting to factory default settings
Red	Disconnected from Wi-Fi
Blinking Green Slowly	Updating the firmware
Blinking White 3 Times	Enter Matter pairing mode
Off	The device is in Night mode; LED set to OFF in the Tapo APP

- **Grounded LED:** Lit up when it is grounded normally.
- **Protected LED:** Lit up when it is under surge protection.
- **LED of Smart Outlet:** Lit up when the corresponding smart outlet is on.

Button & Port

On/Off Button	Turn on or off your Smart Power Strip. * Your Smart Power Strip turns off automatically when it's overloaded in electricity.
Smart Outlet	Plug in your device and control it from your phone. Each outlet is independent.
Individual On/Off Buttons	<ul style="list-style-type: none">• Press the on/off button to turn on or off the corresponding outlet.• Press and hold any on/off button for about 5 seconds to reset Wi-Fi while keeping previous settings.• Press and hold any on/off button for 10 seconds to restore your Smart Power Strip to factory default settings.
USB Ports	Charge your tablet, phone or other devices. Output: 5V/2.4A each; 5V/2.4A total

Supported Load Types

Load Type	Max Current	Max Power (at 120V~)
Iron	15 A	1800 W
Kettle	15 A	1800 W
Heater	15 A	1800 W
Toaster	15 A	1500 W
Coffee Maker	15 A	1200 W
Desk Lamp	1.2 A	80 W
TV	4 A	350 W
PC	7 A	600 W
Fan	1.4 A	120 W
Water Pump	1.4 A	120 W(1/6HP)
Power Adapter/ USB Charger	2.4 A	200 W

Note:

1. Power Adapters/USB Chargers rated under 75W do not support PFC (Power Factor Correction). PFC can reduce the inrush current generated when the relay is turned on. Therefore, using a 60-75W Power Adapter/USB Charger may damage the device due to inrush currents.
2. Avoid plugging your appliances with a motor/compressor higher than 1HP, such as an air conditioner. Frequent on/off switching may damage the compressor. You can check the motor/compressor value listed on your appliances or consult their customer support.
3. EV charging is not supported as it demands higher power and a charging current that surpasses the plug's rated capacity.

Rating:

125V~, 15A max General/Resistive Load; 1/6HP, Motor Load
Construction of Switch: Micro-gap Switch(μ)
Operating control, Type 1.B action
Pollution degree 2, Rated Impulse Voltage 1500V
Software Class A, NEMA Type 1

Safety Information

- Keep the device away from water, fire, humidity or hot environments.
 - Do not attempt to disassemble, repair, or modify the device.
 - Do not use the device where wireless devices are not allowed.
 - The socket-outlet shall be installed near the equipment and shall be easily accessible.
 - The devices are not intended for use in locations where the temperature may be less than actual room conditions, such as unheated warehouses or garages.
 - Plug the product into the wall outlets with earthing connection through the power supply cord.
- Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.
- **CAUTION:**
To Reduce the Risk of Electric Shock – Use Only Indoors.
USE ONLY IN DRY LOCATIONS.
 - Risk of electric shock. Do not plug into another relocatable power tap or an extension cord.
 - USB ports are suitable for charging audio/video, information and communication technology equipment.
 - Timer could turn-on unexpectedly without the user being present. To Reduce the Hazardous Condition – Unplug the appliance from the receptacle before servicing.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.