



HELMET BLUETOOTH HEADSET

TN ICER-T5




Product Introduction

Thank you for choosing the **TNICER T5** helmet Bluetooth intercom headset, which is designed for motorcycle riders to meet the needs of people in the process of riding, such as intercom, answering phone calls, listening to music, listening to FM radio and receiving GPS navigation voice prompts. Provide you with a clear, safe and comfortable experience during the ride.

TNICER T5 has the latest version 5.2 Bluetooth, stable system operation, dual intelligent noise cancellation, low power consumption, with 40MM high quality speakers and intelligent pickup microphone, support two devices connected to achieve two people intercom. The T5 is a high-tech Bluetooth headset that combines light weight, energy saving and humanized design.

Product Introduction Diagram

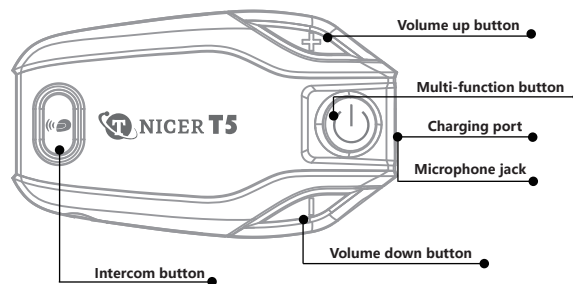

Function Description


- Qualcomm version 5.2 Bluetooth chip
- Intelligent DSP audio processing, the 12th generation of CVC noise reduction processing, 16K voice bandwidth transmission rate
- 500m 2-way intercom Bluetooth headset
- High pairing speed
- Fast charging
- 3 EQ sound effects
- Music sharing
- Voice assistant
- Automatic answer, support last dialed number redial
- Intelligent microphone
- Support voice communication at 120 km/h speed
- 40mm tuning speaker, wonderful sound experience
- IP67 level waterproof
- 600mAh battery capacity, supports 25 hours intercom/phone call
- Support pairing with other brand headsets

Button Functions and Operations

Power on/off

Power on: Press and hold the [multi-function button + intercom button] for 3 seconds, the power-on prompt will sound, and the blue light will be on.

Power off: Press and hold the [multi-function button + intercom button] for 3 seconds, the power off prompt sounds, and the red light is on.



About 3 sec

Reset: Press and hold the [multi-function button + volume down button + volume up button] for 5 seconds in the power-on state, reset after the red and blue lights come on at the same time.

Answering Function

Answer incoming calls: When there is an incoming call, short press [Multi-function button] to answer the call.



Automatic answer: In standby mode, long press [multi-function button + volume down button] for 2 seconds to turn on auto-answer.

Reject: Press and hold [multi-function button] for 2 seconds to reject the call when you hear an incoming call ringing.

End call: During a call, short press [multi-function button] to end the call.

Last redial: In standby mode, quickly double-click [multi-function button] to automatically dial the last number dialed.

Cancel auto-answer: If you don't need the auto-answer function, you can long press [multi-function button + volume down button] for 3 seconds to cancel the auto answer.



About 3 sec

Music Control

① **Play/Pause:** Intercom Bluetooth connection state, short press [multi-function button] to play music, short press [multi-function button] again to pause the music.

② **Next song:** Long press the [volume up button] for 2 seconds to select the next song.

③ **Previous song:** Long press the [volume down button] for 2 seconds to return to the previous song.

Volume Adjustment

Short press the [volume up button] to increase the volume, short press the [volume down button] to decrease the volume.

EQ Sound

EQ sound effects switching: In the music playing state, short press [volume up button] 2 times to switch EQ sound effects. Each short press [volume up button] twice to switch different sound effects, and accompanied by voice prompts like DJ music, popular music and pure vocals.

Music Sharing

Turn on sharing:

When two devices are on, music sharing must be done by the device that initiates intercom in order to share to each other, such as specifying device A to share to device B. The operation steps are as follows:

- 1) Device A connects to the Bluetooth of the cell phone (keep the music on and the music is paused).
- 2) Pair the two devices A and B (keep the two devices in non-intercom state).
- 3) After successful pairing, press and hold the [intercom button+volume up button] of device A for 3 seconds to turn on music sharing.

Turn off sharing:

In the process of music sharing, press and hold the [intercom button+volume up button] of device A for 3 seconds to turn off music sharing.


When sharing music, the A headset that initiates music sharing can pause/start sharing by short pressing [multi-function button].

Pairing Operation

Bluetooth pairing with cell phone

1) Turn on Bluetooth: In the power-on state, press and hold the [multi-function button] for 5 seconds, until the red and blue lights flash alternately. At this time the device has entered the Bluetooth waiting to connect state. If you have connected to other cell phones, the blue light will flash slowly. Please reset and turn on the device again.

2) Search cell phone Bluetooth: In the state of red and blue lights alternately flashing, open the cell phone Bluetooth settings, search for nearby Bluetooth devices, select "Tnicer-T5" for connection pairing, after successful connection there will be a voice prompt "device has been connected", then the Bluetooth pairing success.

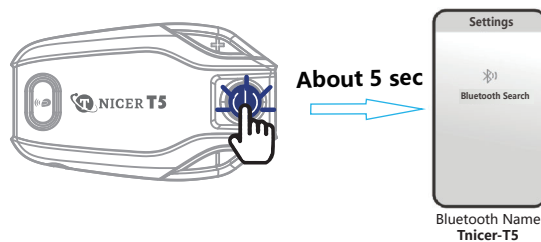

Attention:


1. If you have connected to other phones, the blue light will flash slowly, please reset and turn on the device again.
2. Search for cell phone Bluetooth, select "Tnicer-T5" connection pairing, click to connect. When the pairing is successful, it will be accompanied by the voice prompt "device is connected", and the Bluetooth connection is successful. If the connection fails, you can clear the memory of Bluetooth and search for the connection again.

Pairing and intercom between headsets

1. Pairing and intercom between two Bluetooth intercoms (A,B)

Active/passive pairing operation:

- 1) Turn on the two Bluetooth intercoms (A,B), press and hold the B intercom [multi-function button] for 3 seconds. At this time, red and blue lights alternately flashing, passive pairing mode on.
- 2) Short press the [intercom button] of A for 3 seconds, red and blue lights alternately slow flashing, into the active pairing mode. When you hear the "search" prompt voice, active pairing is on.
- (3) voice prompt "device has been connected", the two intercoms connected successfully, the blue light flashes slowly.

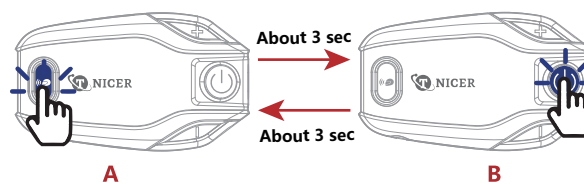

Attention:

1. After the intercom pairing is successful, when intercom, if there is a cell phone call, the device will automatically cut off intercom. After the call is over, it will automatically connect back to the intercom state.
2. In the process of intercom, because of distance or environmental factors such as disconnection, you can manually short press the [intercom button] once, manually back to connect.
3. When the device is in standby mode, short press the [intercom button] to turn on the intercom; short press the [intercom button] to turn off the intercom in the intercom state. Short press the volume up/down button to adjust the call volume.

Voice assistant

In standby state, short press [intercom button+ volume down button] to enter the voice assistant function. At this time, the blue light flashes slowly.

Last number redial

In standby mode, short press [Multi-function button] twice to redial the last number. At this time, the blue light flashes quickly.

Reset

In the power on state, long press [intercom button+volume down button+ volume up button] for 5 seconds, the red and blue lights up at this time the reset is complete.

Battery level reminder

In standby mode, short press [volume up button + volume down button], the voice will announce the battery level of the device. When the battery level is too low, there will also be a low battery reminder.

Auto-answer phone call

In the power on state, press and hold the [multi-function button + volume down