



# FCC RADIO TEST REPORT

FCC ID : 2A4DH-3967  
Equipment : Digital Media Receiver  
Model Name : GA5Z9L  
Applicant : Amazon.com Services LLC  
410 Terry Avenue N, Seattle, WA  
98109-5210 United States  
Standard : FCC Part 15 Subpart E §15.407

The product was received on Apr. 26, 2022 and testing was performed from May 31, 2022 to Jun. 29, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT .....	6
1.4 Testing Location .....	7
1.5 Applicable Standards.....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Carrier Frequency and Channel .....	8
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system .....	14
2.5 EUT Operation Test Setup .....	14
2.6 Measurement Results Explanation Example.....	14
<b>3 Test Result .....</b>	<b>15</b>
3.1 26dB & 99% Occupied Bandwidth Measurement .....	15
3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement.....	21
3.3 Fundamental Power Spectral Density Measurement.....	22
3.4 In-Band Emissions (Channel Mask) .....	28
3.5 Contention Based Protocol.....	88
3.6 Unwanted Emissions Measurement.....	111
3.7 AC Conducted Emission Measurement.....	116
3.8 Antenna Requirements.....	118
<b>4 List of Measuring Equipment.....</b>	<b>120</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>122</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. AC Conducted Emission Test Result</b>	
<b>Appendix C. Radiated Spurious Emission</b>	
<b>Appendix D. Radiated Spurious Emission Plots</b>	
<b>Appendix E. Duty Cycle Plots</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.1	15.403(i) 15.407(a)(10)	26dB Emission Bandwidth	Pass
3.1	2.1049	99% Occupied Bandwidth	Reporting only
3.2	15.407(a)(8)	Maximum Conducted Output Power	Reporting only
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass
3.5	15.407(d)(6)	Contention Based Protocol	Pass
3.6	15.407(b)	Unwanted Emissions	Pass
3.7	15.207	AC Conducted Emission	Pass
3.8	15.203 15.407(a)	Antenna Requirement	Pass

**Declaration of Conformity:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.  
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

**Comments and Explanations:**

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Alan Liu**

**Report Producer: Vivian Hsu**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	GA5Z9L
FCC ID	2A4DH-3967
EUT supports Radios application	WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	5925 MHz ~ 6425 MHz 6425 MHz ~ 6525 MHz 6525 MHz ~ 6875 MHz 6875 MHz ~ 7125 MHz
Maximum Output Power	<p><b>&lt;Ant. 0&gt;:</b></p> <p><b>&lt;5925 MHz ~ 6425 MHz&gt;</b> 802.11a: 1.90 dBm / 0.0015 W</p> <p><b>&lt;6425 MHz ~ 6525 MHz&gt;</b> 802.11a: 2.80 dBm / 0.0019 W</p> <p><b>&lt;6525 MHz ~ 6875 MHz&gt;</b> 802.11a: 2.80 dBm / 0.0019 W</p> <p><b>&lt;6875 MHz ~ 7125 MHz&gt;</b> 802.11a: 3.30 dBm / 0.0021 W</p> <p><b>MIMO &lt;Ant. 0+1&gt;:</b></p> <p><b>&lt;5925 MHz ~ 6425 MHz&gt;</b> 802.11a: -1.13 dBm / 0.0008 W 802.11ax: HE20: -0.29 dBm / 0.0009 W 802.11ax: HE40: 1.56 dBm / 0.0014 W 802.11ax: HE80: 4.37 dBm / 0.0027 W</p> <p><b>&lt;6425 MHz ~ 6525 MHz&gt;</b> 802.11a: -0.49 dBm / 0.0009 W 802.11ax: HE20: 0.16 dBm / 0.0010 W 802.11ax: HE40: 2.41 dBm / 0.0017 W 802.11ax: HE80: 5.16 dBm / 0.0033 W</p> <p><b>&lt;6525 MHz ~ 6875 MHz&gt;</b> 802.11a: -0.34 dBm / 0.0009 W 802.11ax: HE20: 0.36 dBm / 0.0011 W 802.11ax: HE40: 2.31 dBm / 0.0017 W 802.11ax: HE80: 5.66 dBm / 0.0037 W</p> <p><b>&lt;6875 MHz ~ 7125 MHz&gt;</b> 802.11a: 0.41 dBm / 0.0011 W 802.11ax: HE20: 0.41 dBm / 0.0011 W 802.11ax: HE40: 2.37 dBm / 0.0017 W 802.11ax: HE80: 5.01 dBm / 0.0032 W</p>

Product Specification is subject to this standard								
<b>99% Occupied Bandwidth</b>	<p><b>&lt;Ant. 0&gt;</b>            802.11a: 17.63 MHz  <b>MIMO &lt;Ant. 0&gt;</b>            802.11a: 17.93 MHz            802.11ax: HE20: 19.18 MHz            802.11ax: HE40: 37.76 MHz            802.11ax: HE80: 77.20 MHz  <b>MIMO &lt;Ant. 1&gt;</b>            802.11a: 17.13 MHz            802.11ax: HE20: 19.13 MHz            802.11ax: HE40: 37.66 MHz            802.11ax: HE80: 77.08 MHz</p>							
<b>Antenna Type / Gain</b>	<p><b>&lt;5925 MHz ~ 6425 MHz&gt;</b>            &lt;Ant. 0&gt;: PCB Inv F Antenna with gain 6.64 dBi            &lt;Ant. 1&gt;: PCB Inv F Antenna with gain 6.59 dBi  <b>&lt;6425 MHz ~ 6525 MHz&gt;</b>            &lt;Ant. 0&gt;: PCB Inv F Antenna with gain 5.19 dBi            &lt;Ant. 1&gt;: PCB Inv F Antenna with gain 5.26 dBi  <b>&lt;6525 MHz ~ 6875 MHz&gt;</b>            &lt;Ant. 0&gt;: PCB Inv F Antenna with gain 5.09 dBi            &lt;Ant. 1&gt;: PCB Inv F Antenna with gain 5.18 dBi  <b>&lt;6875 MHz ~ 7125 MHz&gt;</b>            &lt;Ant. 0&gt;: PCB Inv F Antenna with gain 5.28 dBi            &lt;Ant. 1&gt;: PCB Inv F Antenna with gain 4.04 dBi</p>							
<b>Type of Modulation</b>	802.11a : OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ax : OFDMA (BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM)							
<b>Antenna Function Description</b>	<table border="1"> <thead> <tr> <th></th> <th>Ant. 0</th> <th>Ant. 1</th> </tr> </thead> <tbody> <tr> <td>802.11ax MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>			Ant. 0	Ant. 1	802.11ax MIMO	V	V
	Ant. 0	Ant. 1						
802.11ax MIMO	V	V						

**Remark:**

1. MIMO Ant. 0+1 Directional Gain is a calculated result from MIMO Ant. 0 and MIMO Ant. 1. The formula used in calculation is documented in section 3.8.
2. Power of MIMO Ant. 0 + Ant. 1 is a calculated result from sum of the power MIMO Ant. 0 and MIMO Ant. 1.
3. The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

### 1.3 Modification of EUT

No modifications made to the EUT during the testing.



### 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> CO05-HY, DF02-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, 03CH11-HY (TAF Code: 3786)
<b>Remark</b>	The Radiated Spurious Emission and Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory.

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

### 1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							





BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							



<b>BW 20M</b>	<b>Channel</b>	193	197	201	205	209	213	217	221
	<b>Freq. (MHz)</b>	6915	6935	6955	6975	6995	7015	7035	7055
<b>BW 40M</b>	<b>Channel</b>	195		203		211		219	
	<b>Freq. (MHz)</b>	6925		6965		7005		7045	
<b>BW 80M</b>	<b>Channel</b>	199				215			
	<b>Freq. (MHz)</b>	6945				7025			
<b>BW 160M</b>	<b>Channel</b>	207							
	<b>Freq. (MHz)</b>	6985							
<b>BW 20M</b>	<b>Channel</b>	225				229			
	<b>Freq. (MHz)</b>	7075				7095			
<b>BW 40M</b>	<b>Channel</b>	227							
	<b>Freq. (MHz)</b>	7085							

## 2.2 Test Mode

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

Final test modes are considering the modulation and worse data rates as below table.

### Single Mode

Modulation	Data Rate
802.11a	6 Mbps

### MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

### Test Cases

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : WLAN (6GHz) Link + Bluetooth Link + TV (connected to EUT via HDMI Out) + LED On + IR On + 1080p 12 bit Resolution Video Play from EUT's local Memory on TV
<b>Remark:</b> For Radiated Test Cases, the tests were performed with AP19 CR Adapter.	

### <Ant. 0>

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11a	802.11a	802.11a	802.11a
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	181	229
					233
Straddle		-	-	185	-



MIMO <Ant. 0+1>

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11a	802.11a	802.11a	802.11a
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	181	229
					233
Straddle		-	-	185	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11ax HE20	802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	001	097	117	189
M	Middle	049	105	149	209
H	High	093	113	181	229
					233
Straddle		-	-	185	-


Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	195
M	Middle	051	-	147	211
H	High	091	107	179	227
Straddle		-	115	187	-

Ch. #		UNII-5 (5925-6425 MHz)	UNII-6 (6425-6525 MHz)	UNII-7 (6525-6875 MHz)	UNII-8 (6875-7125 MHz)
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	199
M	Middle	055		151	-
H	High	087		167	215
Straddle		-	119	183	-


**Remark:** For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

## 2.3 Connection Diagram of Test System

<AC Conducted Emission>

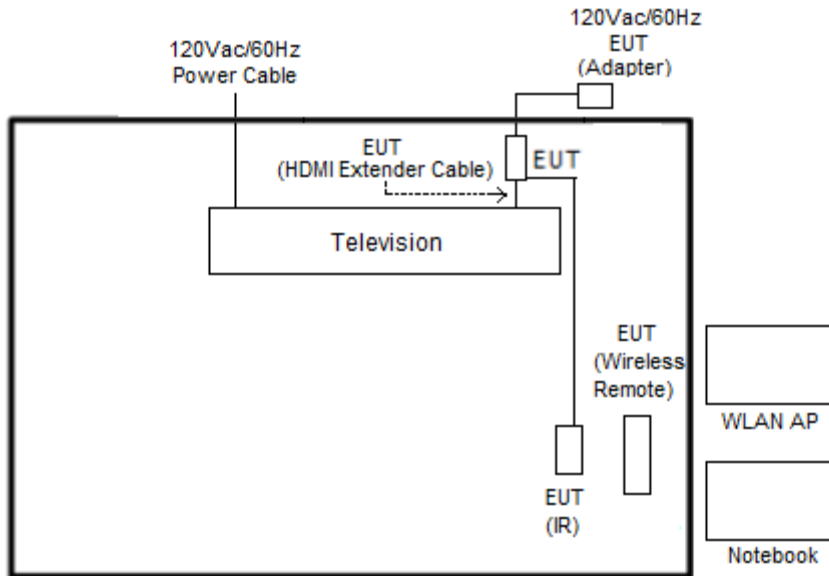

<WLAN Tx Mode>

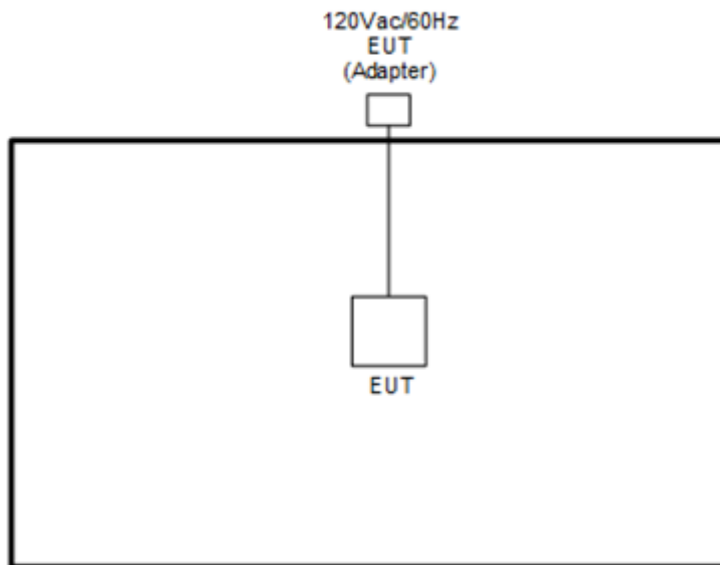



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	NETGEAR64	RAXE500	N/A	N/A	Unshielded,1.8m
2.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Television	Sharp	50UA6800T	FCC DoC	Shielded, 1.6m	Unshielded, 1.8m

## 2.5 EUT Operation Test Setup

The RF test items, utility “Compliance 1.0.1.13” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Limit of 26dB & 99% Occupied Bandwidth

<FCC 14-30 CFR 15.407>

(a)(10) The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

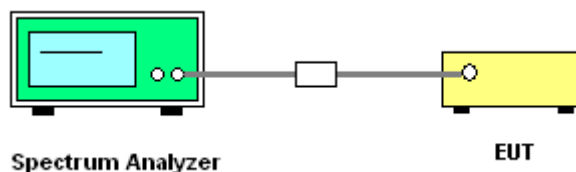



##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.



<Ant. 0>

For 802.11a

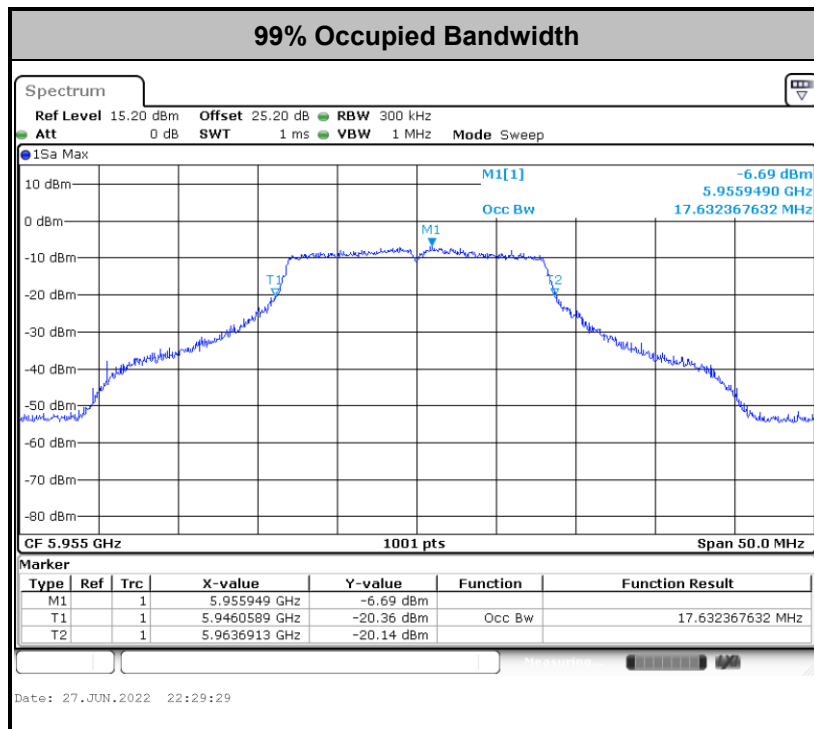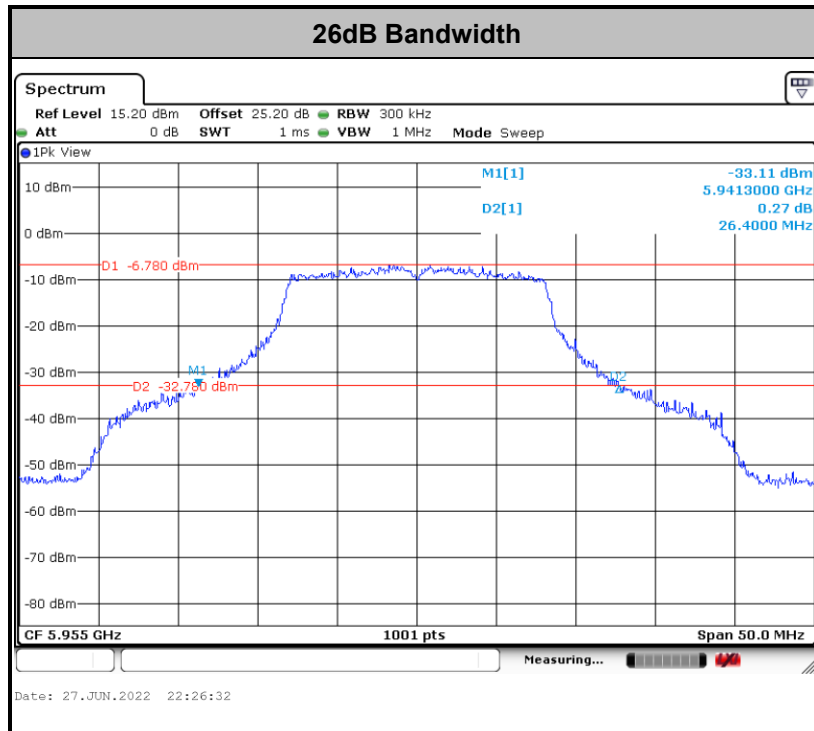



**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.





MIMO <Ant. 0+1>



For 802.11a

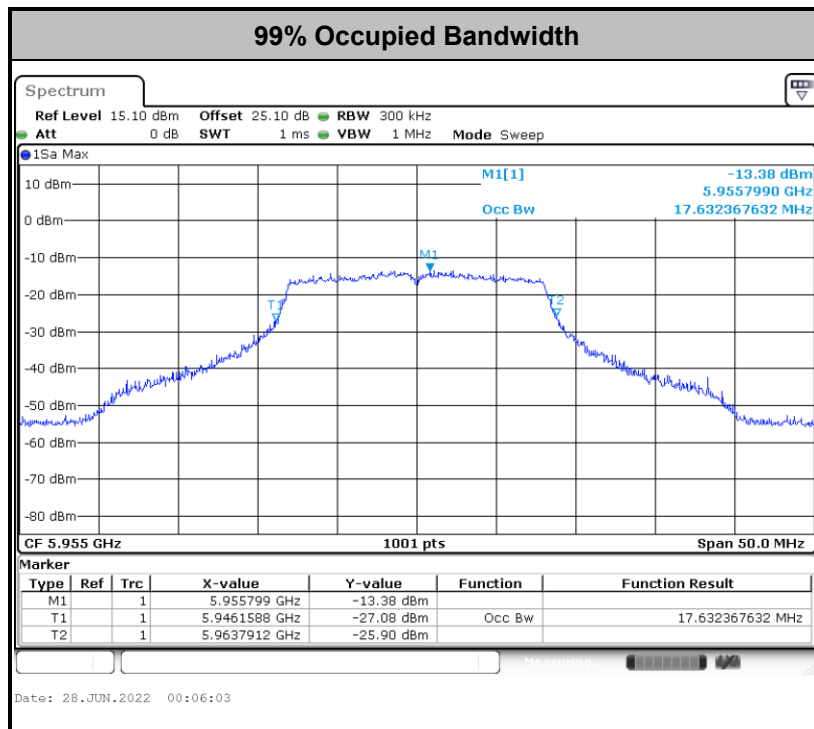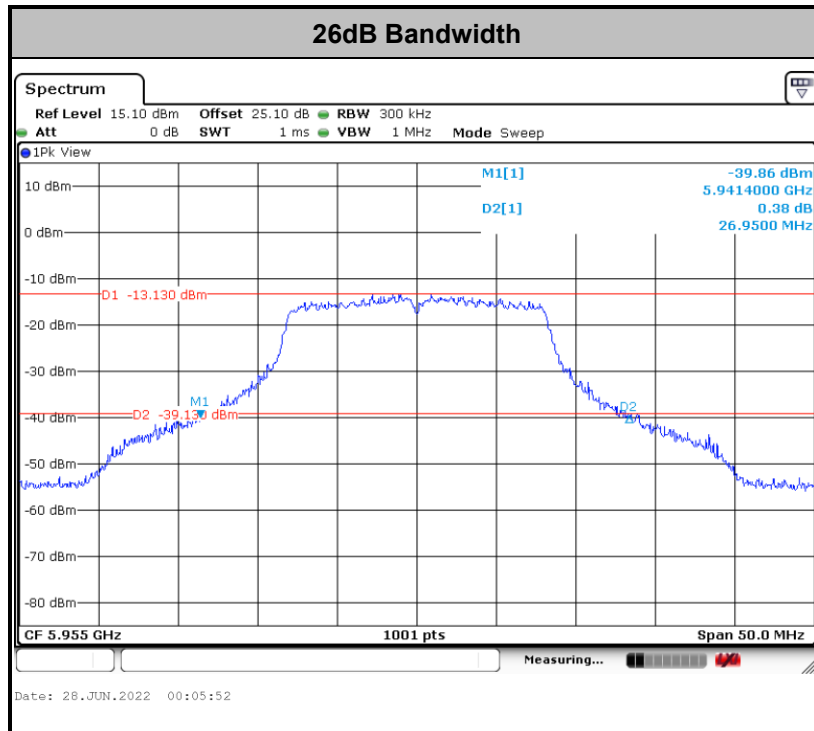

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.





For 802.11ax HE 20 MHz

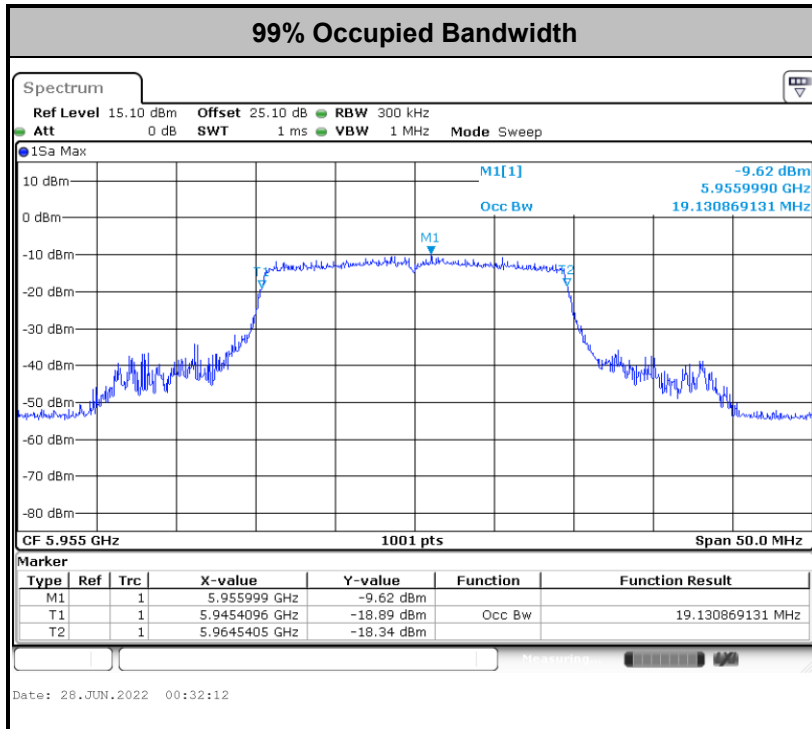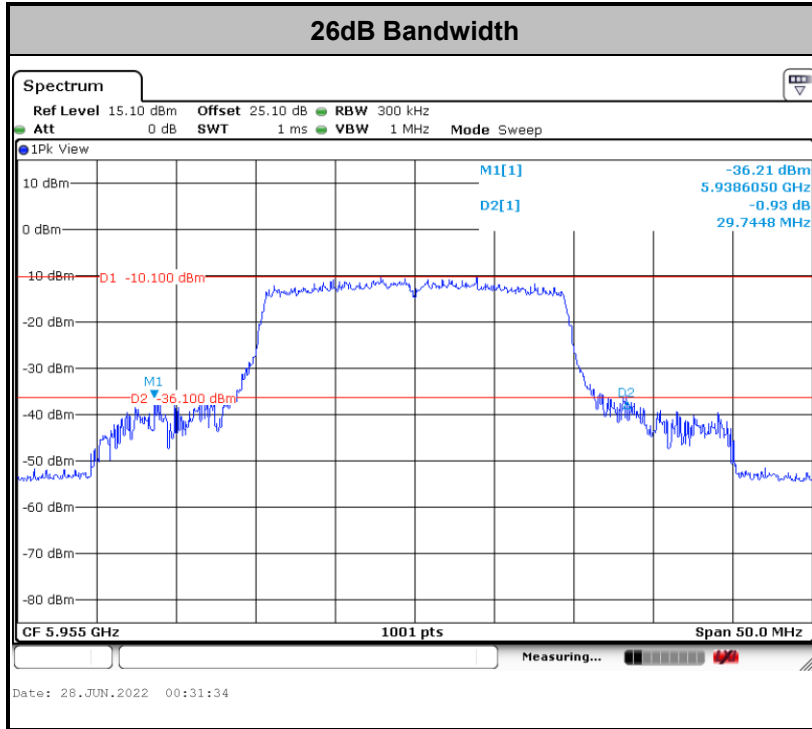

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.





For 802.11ax HE 40 MHz

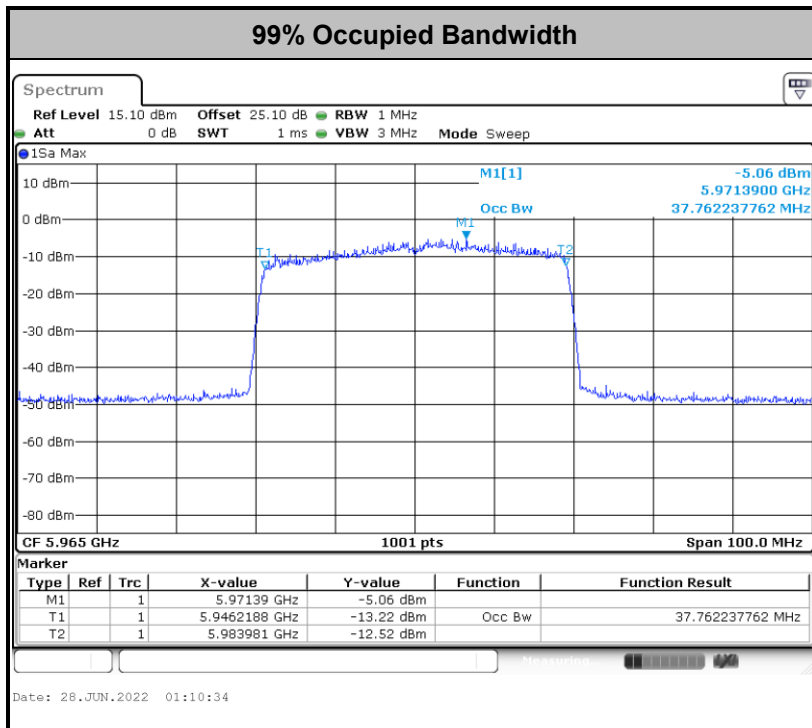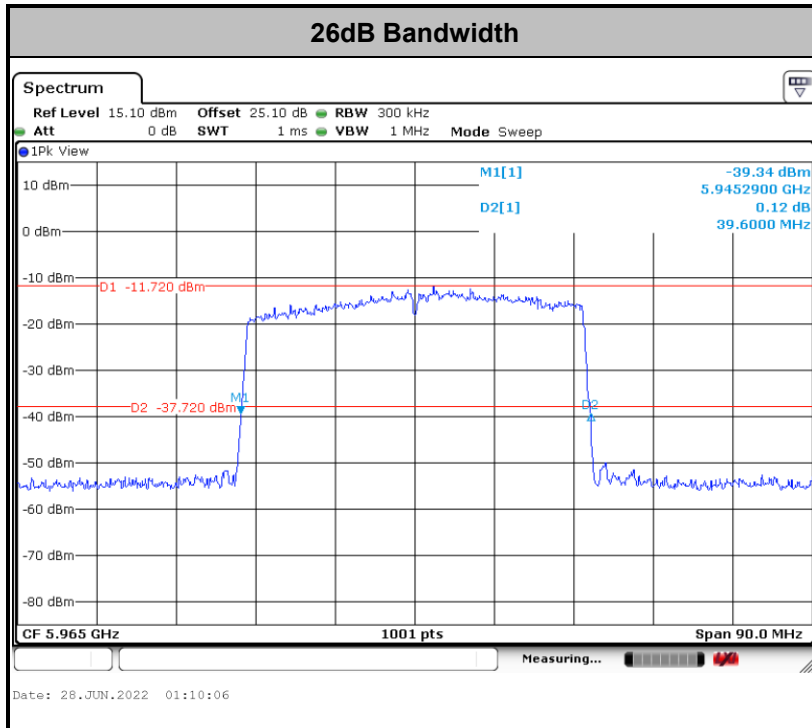

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



For 802.11ax HE 80 MHz

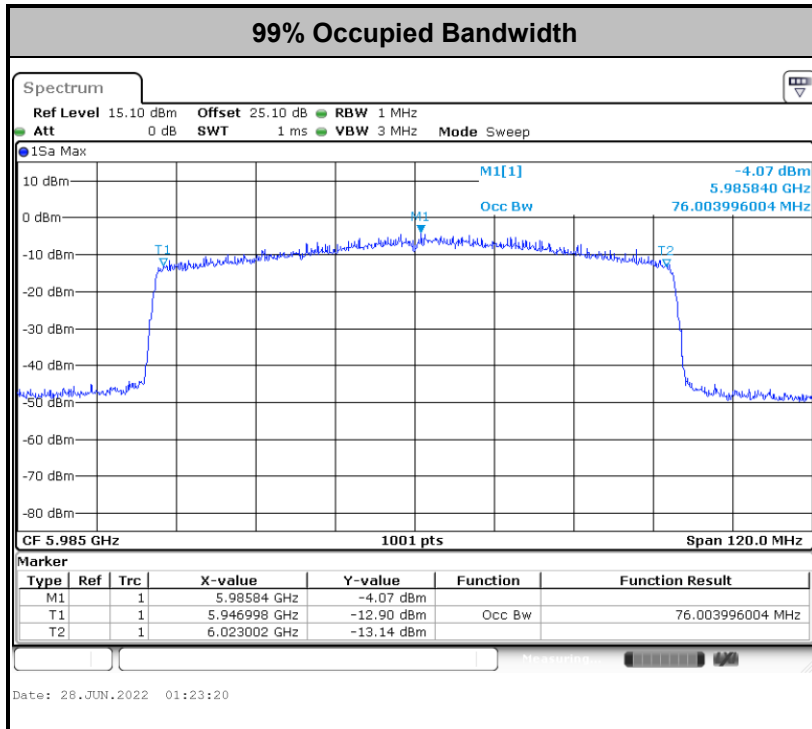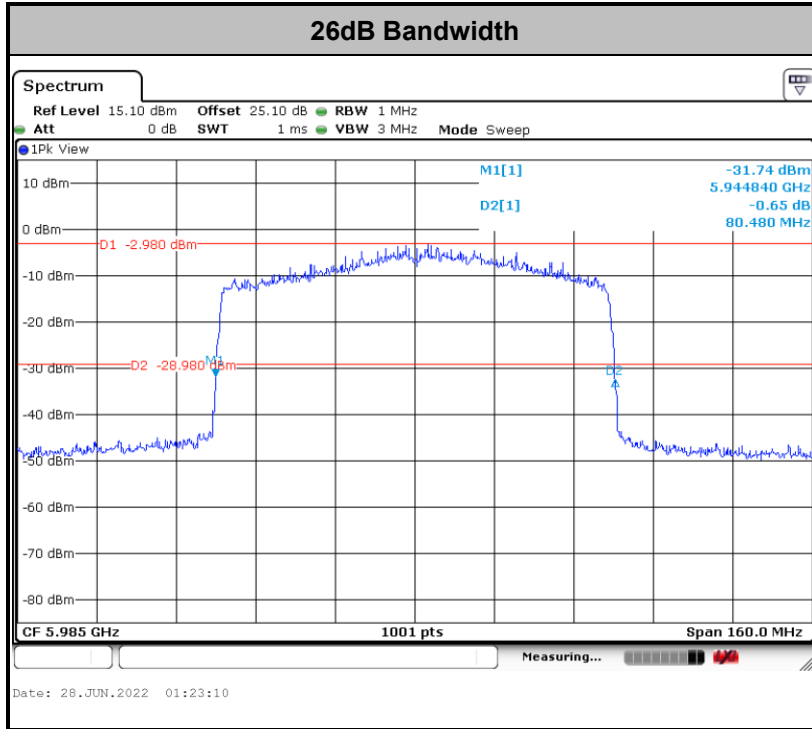

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

### 3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


### 3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

### 3.2.4 Test Setup

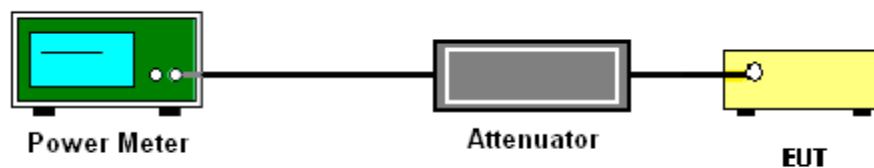

### 3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



### 3.3 Fundamental Power Spectral Density Measurement

#### 3.3.1 Limit of Fundamental Power Spectral Density

##### <FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed  $-1$  dBm e.i.r.p. in any 1-megahertz band.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

##### # Method SA-3 #


(power averaging (rms) detection with max hold):

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time  $\leq$  (number of points in sweep)  $\times$  T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.  
Detector = power averaging (rms).
  - Trace mode = max hold.
  - Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
  2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
  3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

### 3.3.4 Test Setup

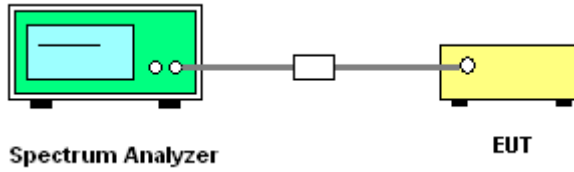


### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

<Ant. 0>


<802.11a Mode>

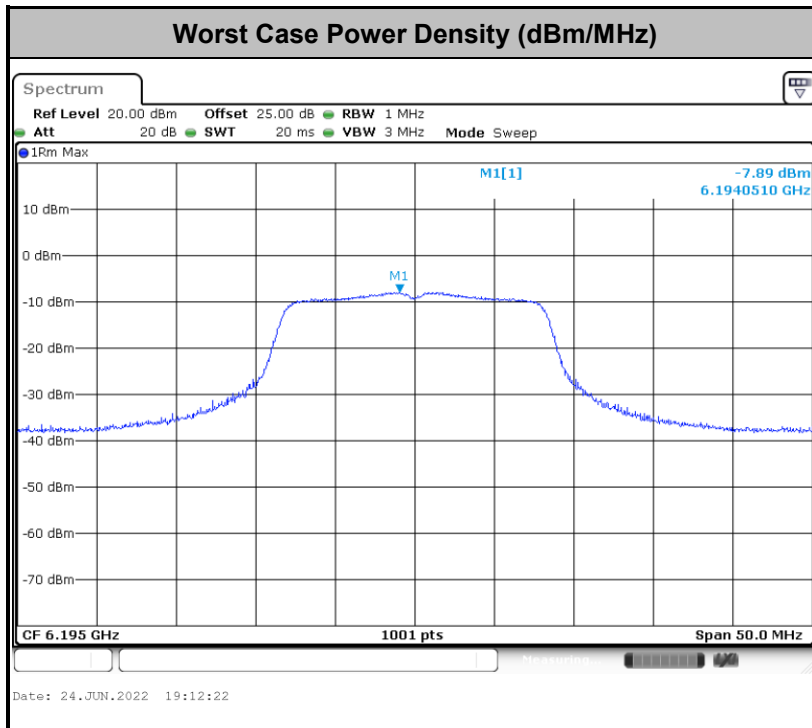


**Remark:** The test plot is showing a bin by bin combined result mathematically adds two traces.



<802.11a Mode>

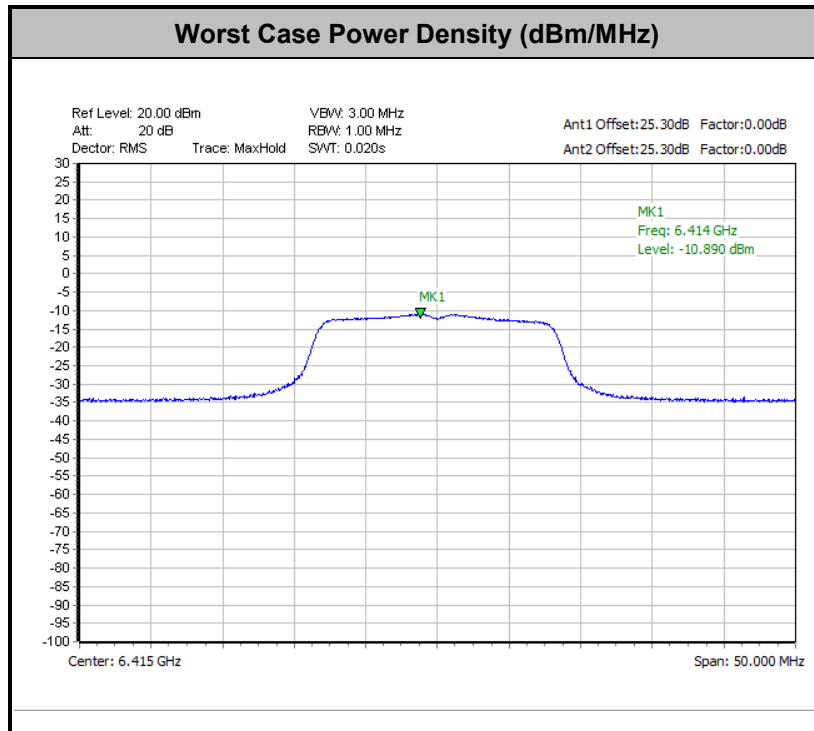


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

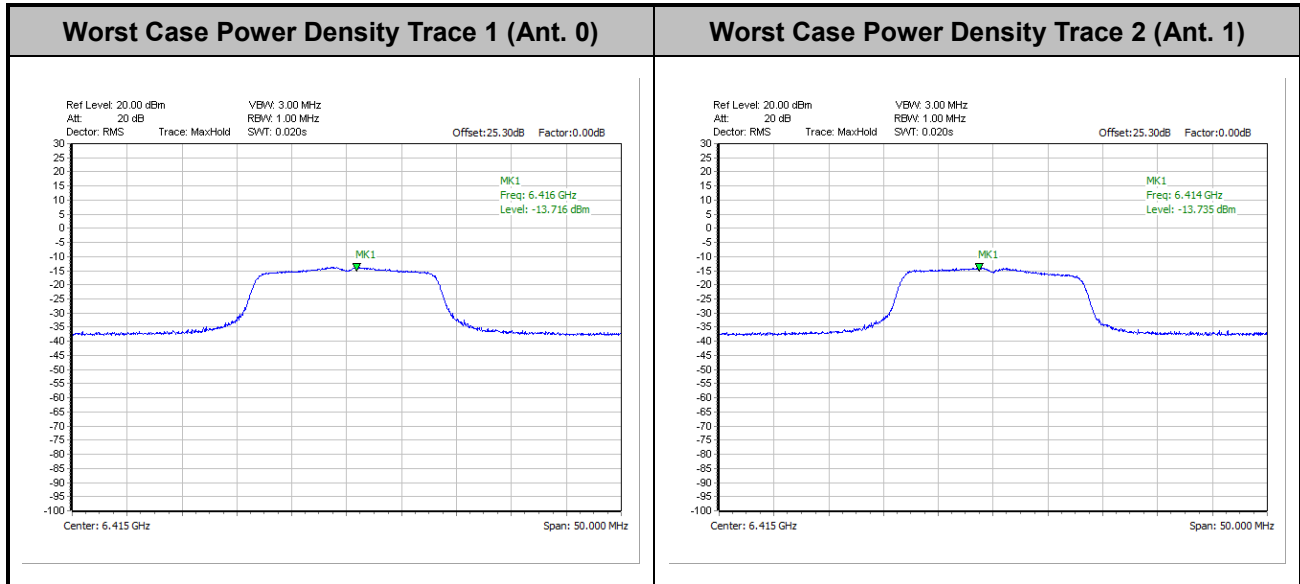






<802.11ax HE20 Mode>

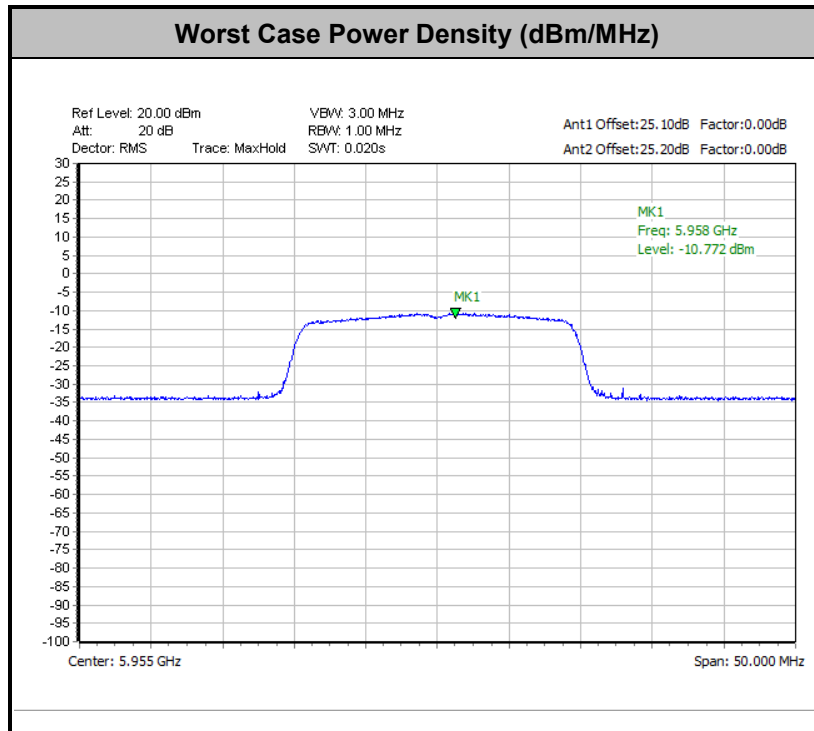


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.


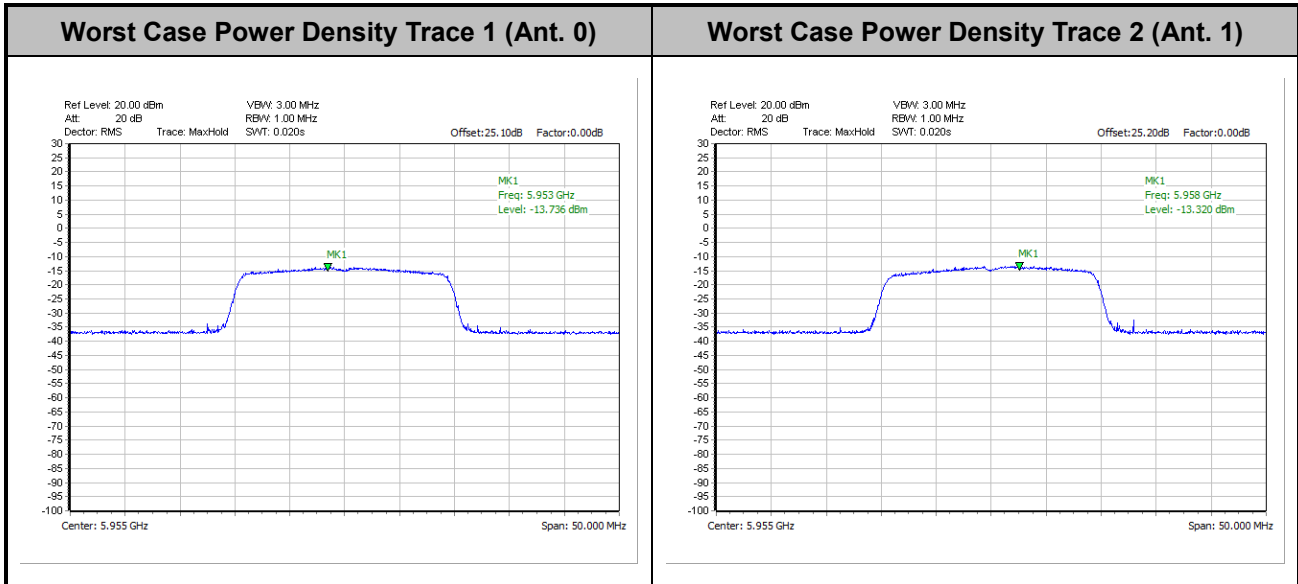




<802.11ax HE40 Mode>

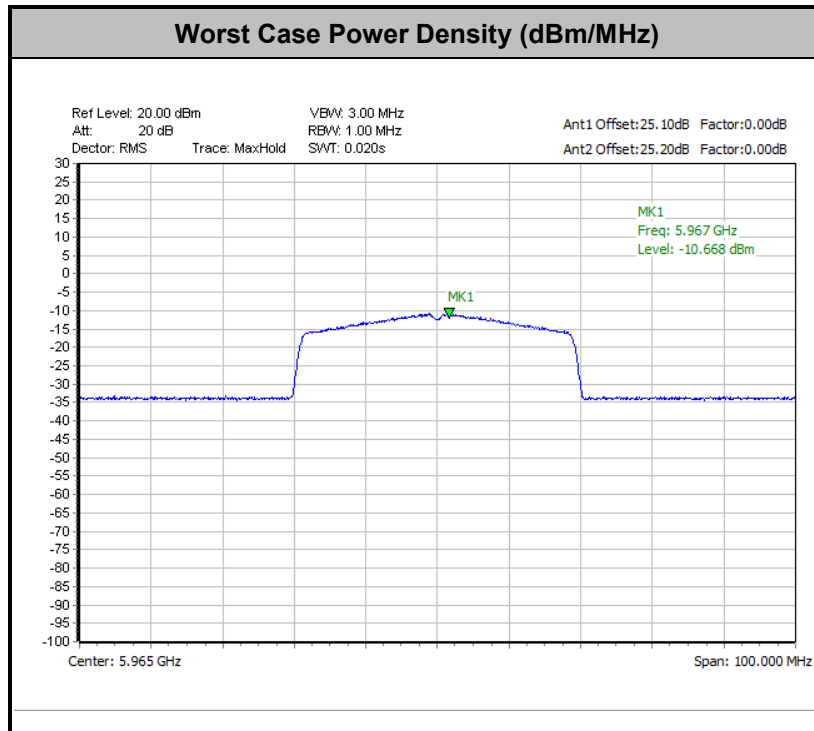


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

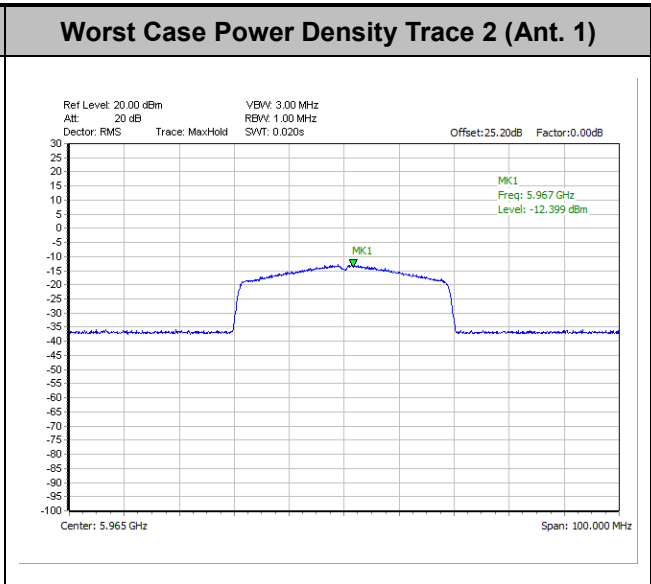
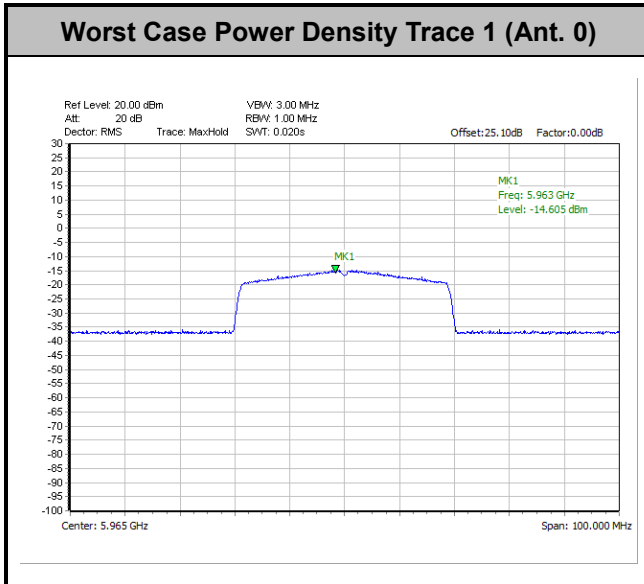




<802.11ax HE80 Mode>

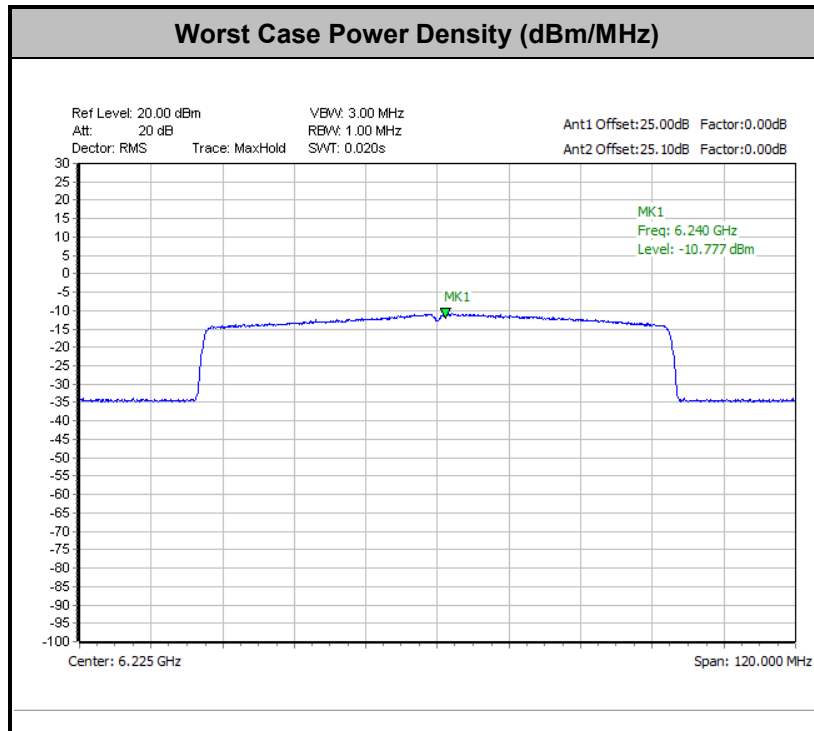

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

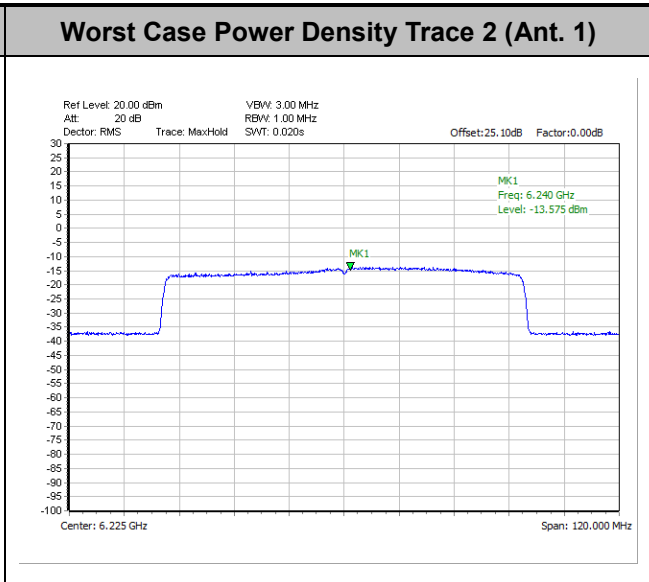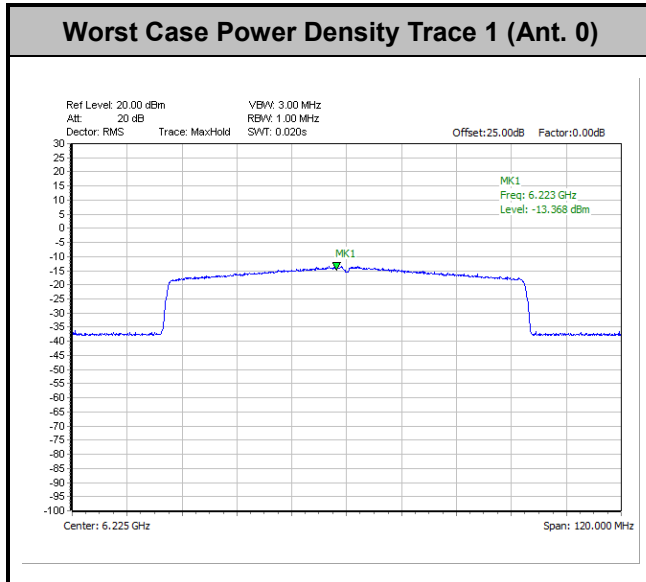



## 3.4 In-Band Emissions (Channel Mask)

### 3.4.1 Limit of Unwanted Emissions

#### <FCC 14-30 CFR 15.407>

(a)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

### 3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


### 3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v01.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a) Set the span to encompass the entire 26 dB EBW of the signal.
  - b) Set RBW = same RBW used for 26 dB EBW measurement.
  - c) Set VBW  $\geq 3 \times$  RBW
  - d) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e) Sweep time = auto.
  - f) Detector = RMS (i.e., power averaging)
  - g) Trace average at least 100 traces in power averaging (rms) mode.
  - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
  - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
  - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

### 3.4.4 Test Setup

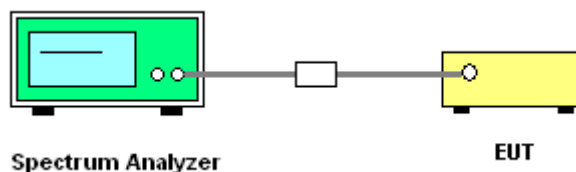




3.4.5 Test Result

<Ant. 0>


EUT Mode :	802.11a
------------	---------

Plot on Channel 5955MHz

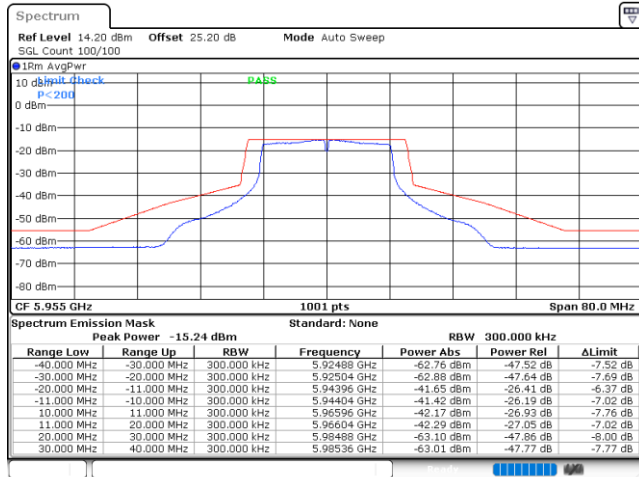


Date: 27 JUN.2022 22:34:03

Plot on Channel 6195MHz

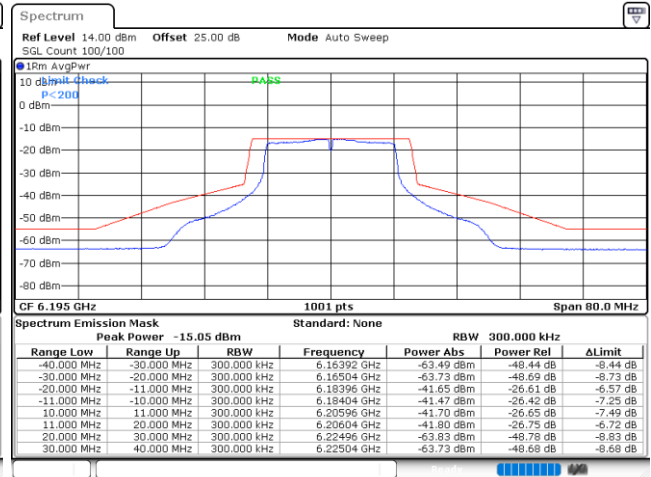


Date: 27 JUN.2022 22:38:56

Plot on Channel 6415MHz

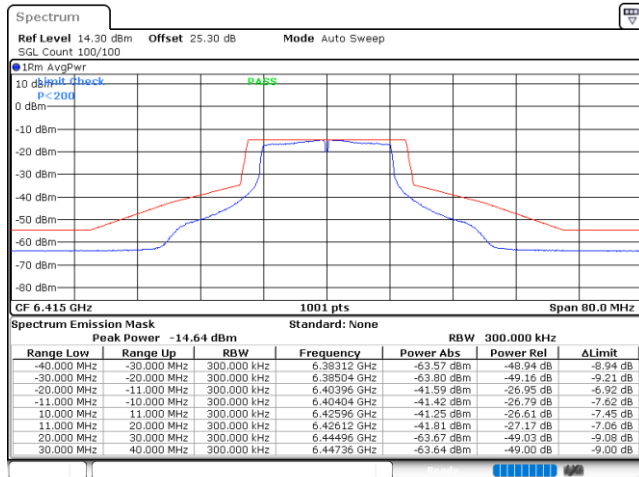

Date: 27 JUN.2022 22:42:28


Plot on Channel 6435MHz

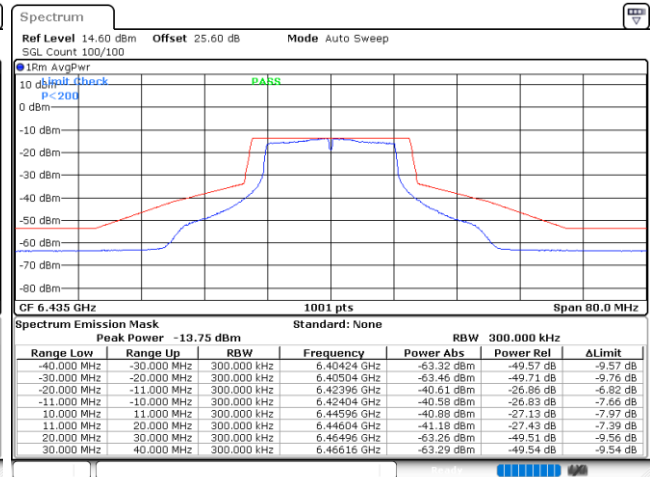

Date: 27 JUN.2022 22:45:40




Plot on Channel 6475MHz

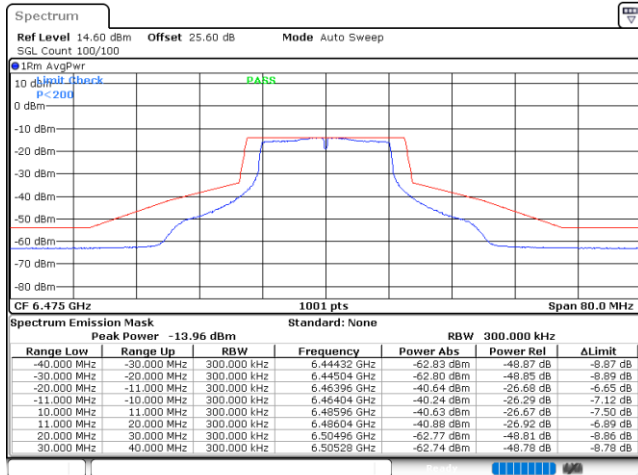


Date: 27 JUN 2022 22:47:13

Plot on Channel 6515MHz

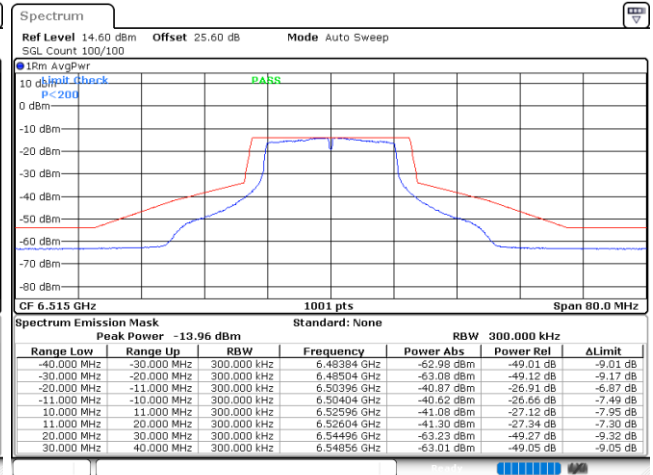


Date: 27 JUN 2022 23:00:32

Plot on Channel 6535MHz

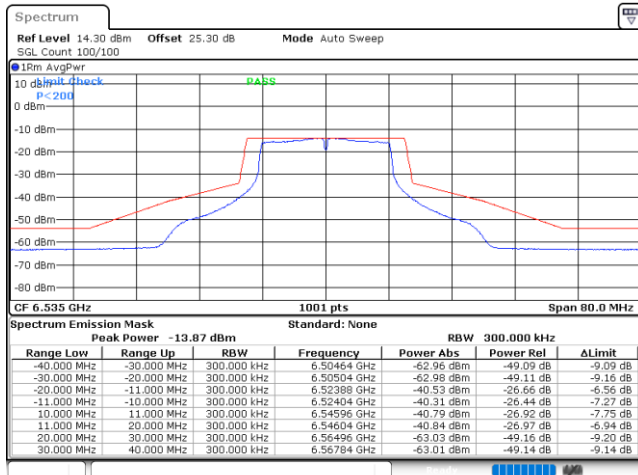

Date: 27 JUN 2022 23:02:17


Plot on Channel 6695MHz

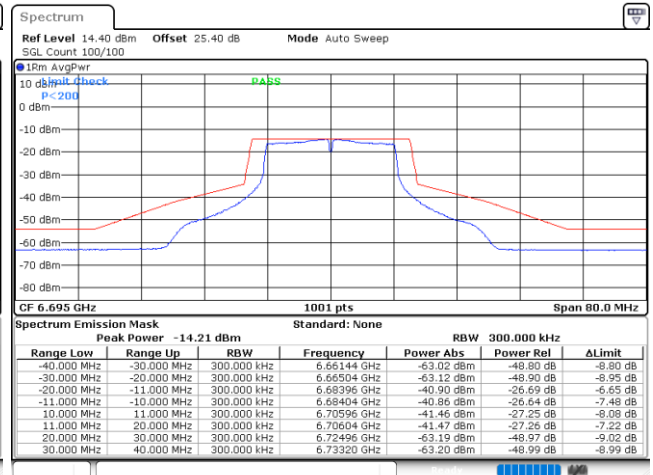

Date: 27 JUN 2022 23:03:55




Plot on Channel 6855MHz

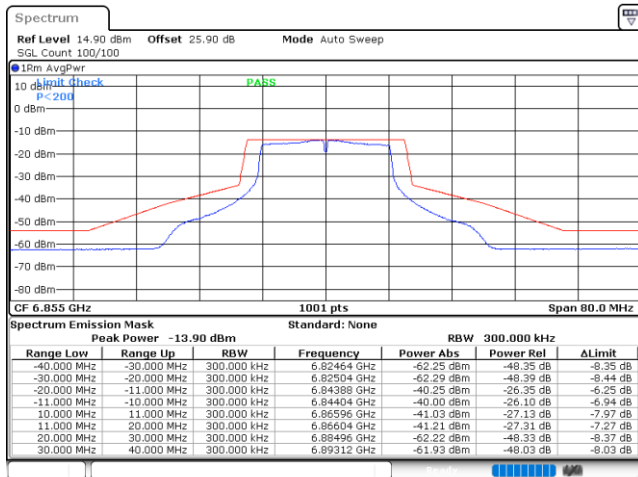


Date: 27 JUN 2022 23:05:41

Plot on Channel 6875MHz

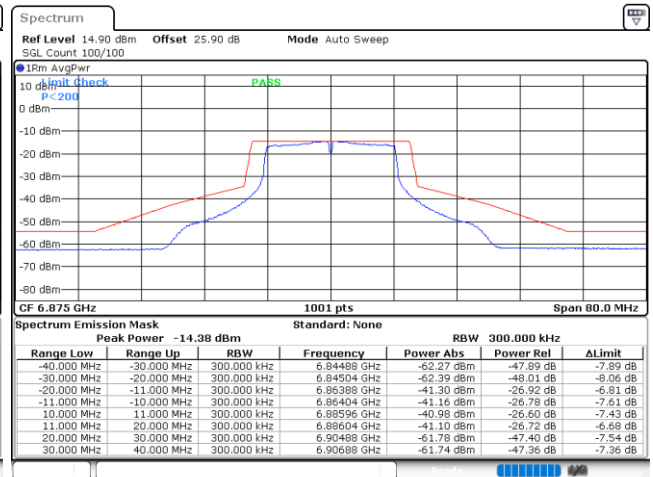


Date: 27 JUN 2022 23:08:00

Plot on Channel 6895MHz

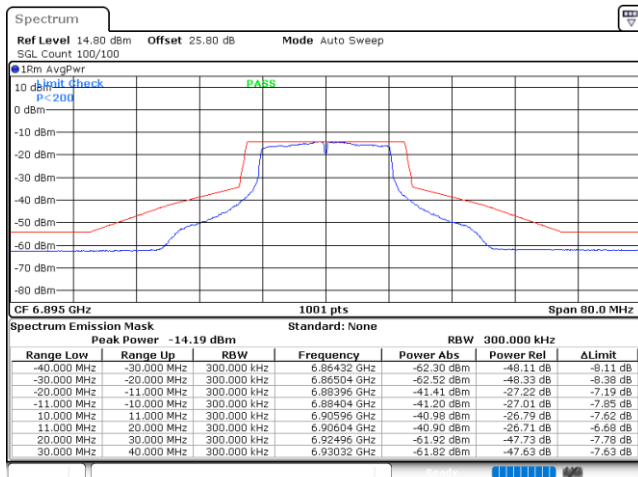

Date: 27 JUN 2022 23:31:29

Plot on Channel 6995MHz

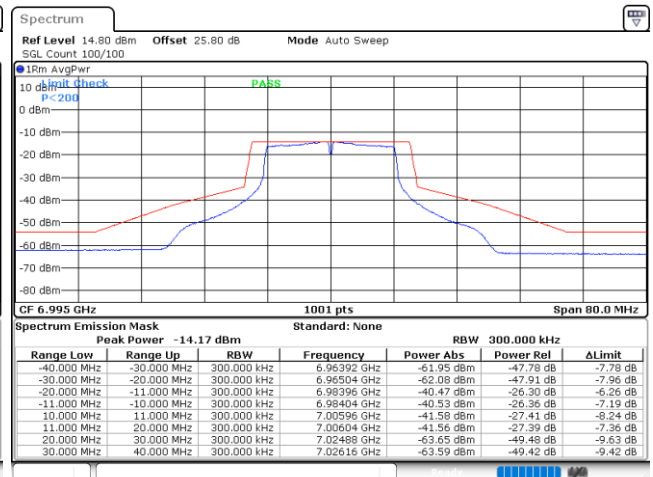


Date: 27 JUN 2022 23:33:03






Plot on Channel 7095MHz

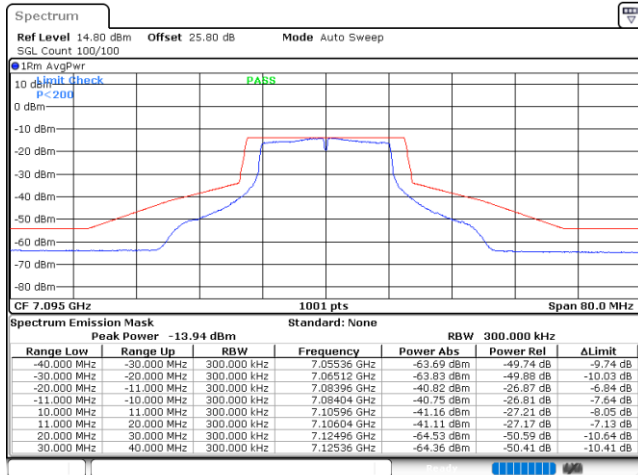

Date: 27 JUN.2022 23:34:45

Plot on Channel 7115MHz

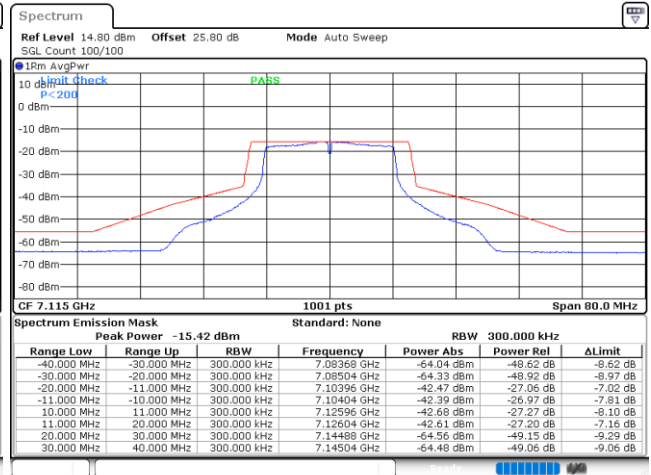


Date: 27 JUN.2022 23:36:53



MIMO <Ant. 0+1(0)>


EUT Mode : 802.11a

Plot on Channel 5955MHz

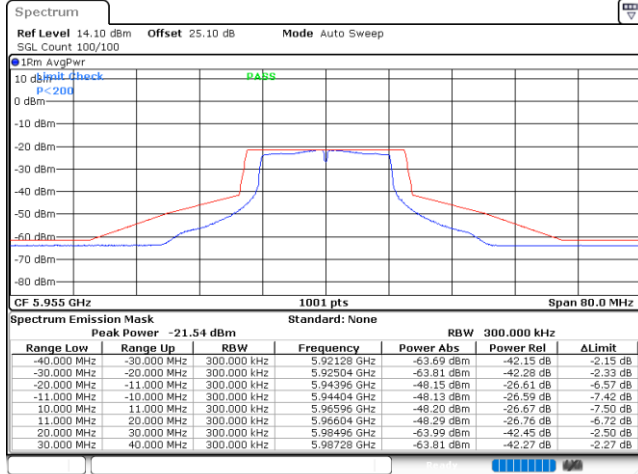


Date: 28.JUN.2022 00:06:45

Plot on Channel 6195MHz

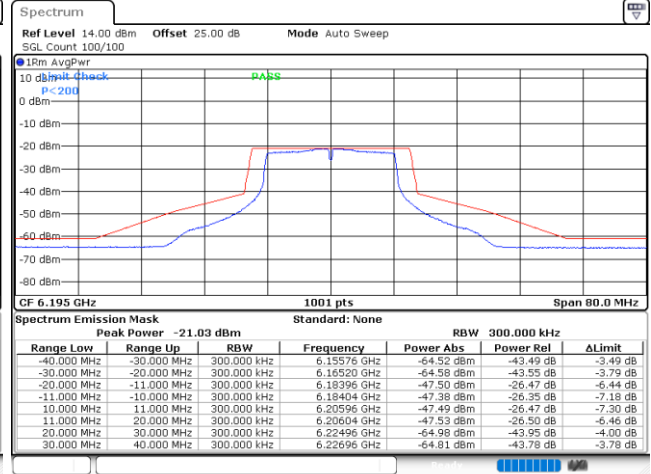


Date: 28.JUN.2022 00:14:11

Plot on Channel 6415MHz

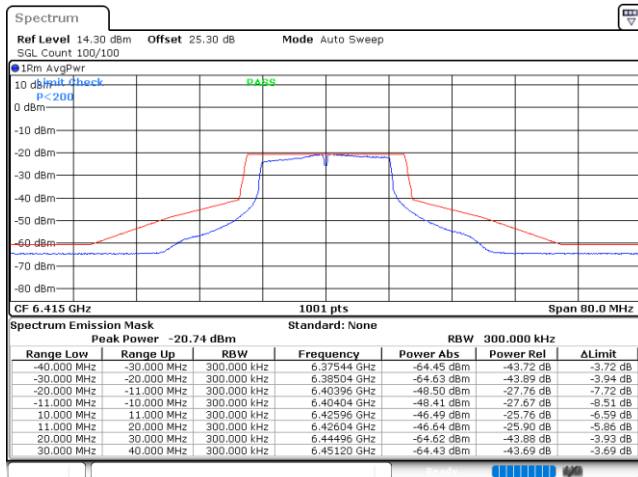

Date: 28.JUN.2022 00:17:08


Plot on Channel 6435MHz

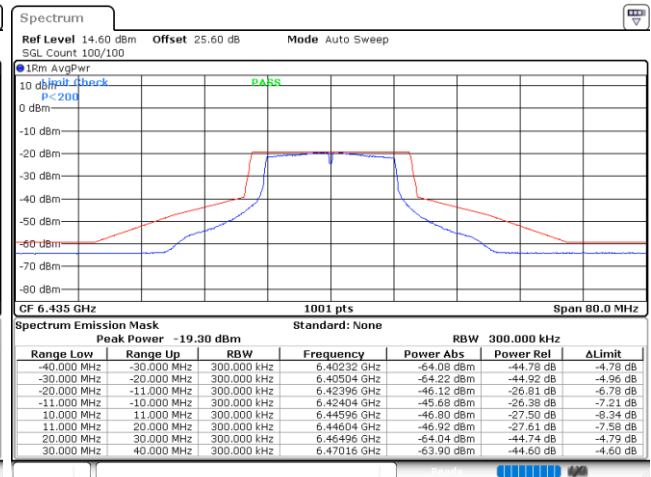

Date: 22.JUN.2022 23:24:26




Plot on Channel 6475MHz

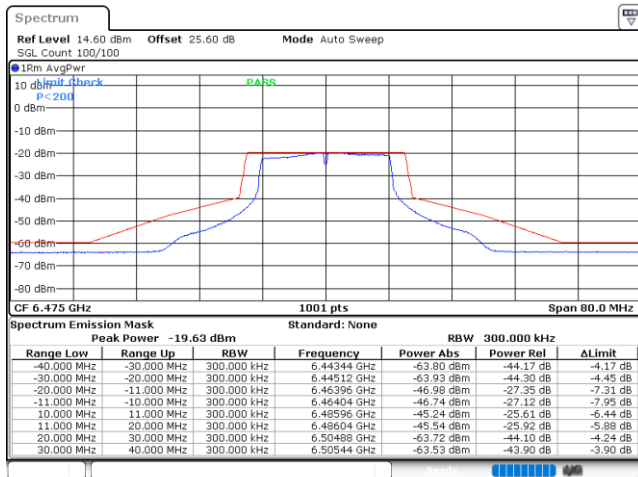


Date: 22 JUN 2022 23:30:37

Plot on Channel 6515MHz

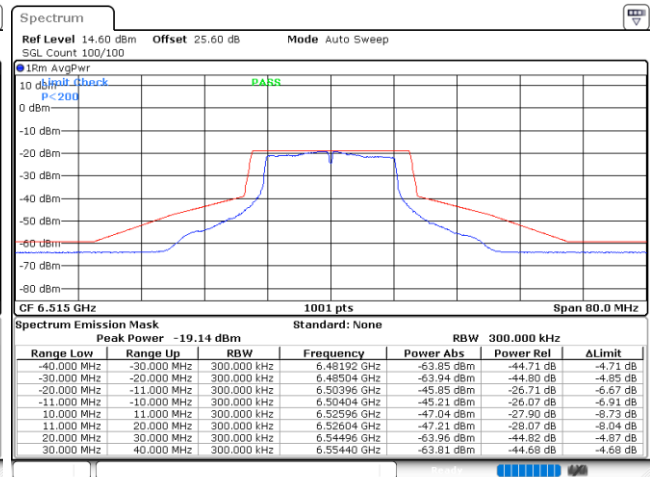


Date: 22 JUN 2022 23:34:19

Plot on Channel 6535MHz

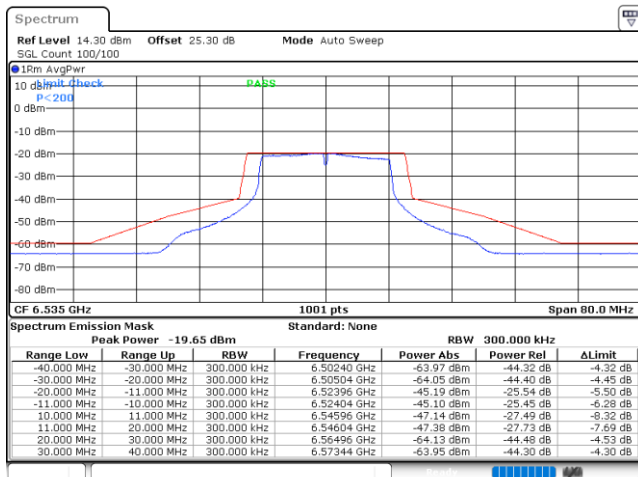

Date: 22 JUN 2022 23:37:41


Plot on Channel 6695MHz

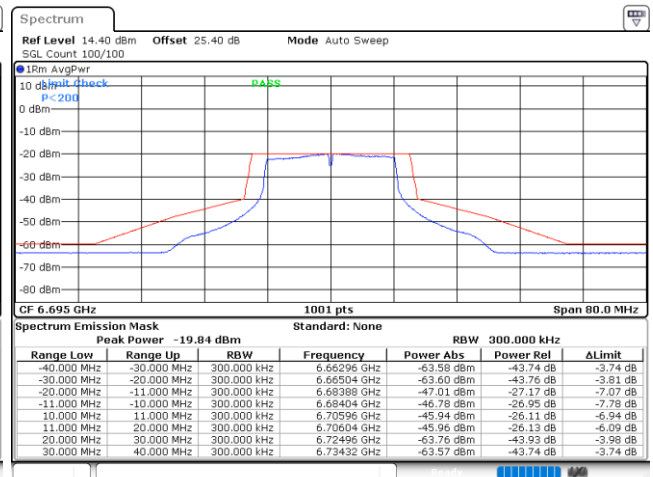

Date: 22 JUN 2022 23:42:41




Plot on Channel 6855MHz

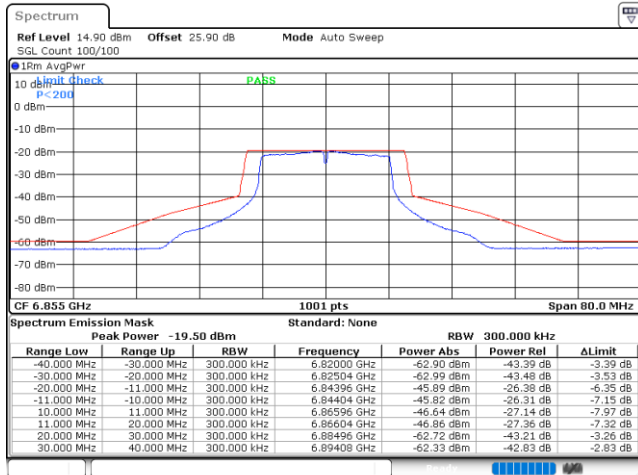


Date: 22 JUN.2022 23:47:09

Plot on Channel 6875MHz

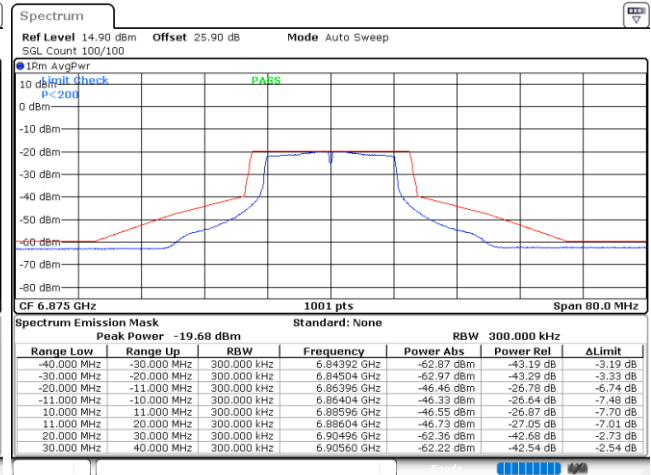


Date: 22 JUN.2022 23:50:56

Plot on Channel 6895MHz

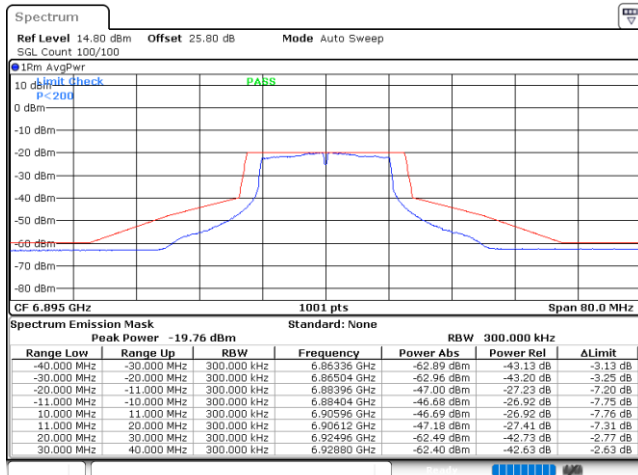

Date: 23 JUN.2022 00:05:35


Plot on Channel 6995MHz

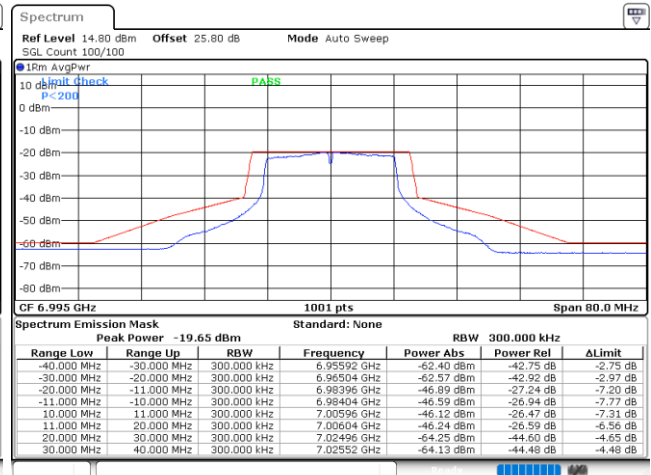

Date: 23 JUN.2022 00:08:45




Plot on Channel 7095MHz

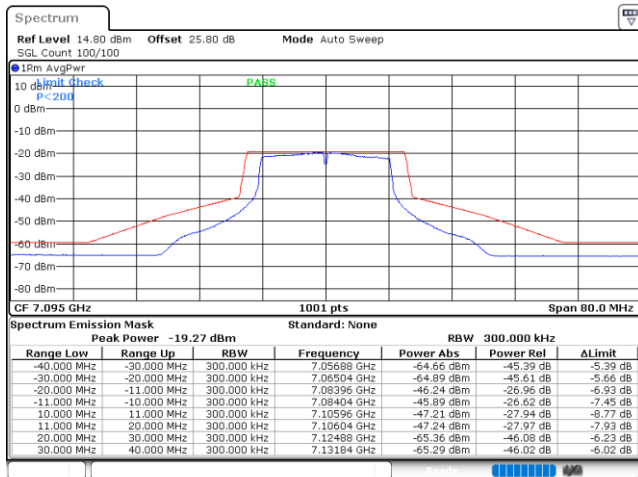

Date: 23 JUN.2022 00:13:06

Plot on Channel 7115MHz

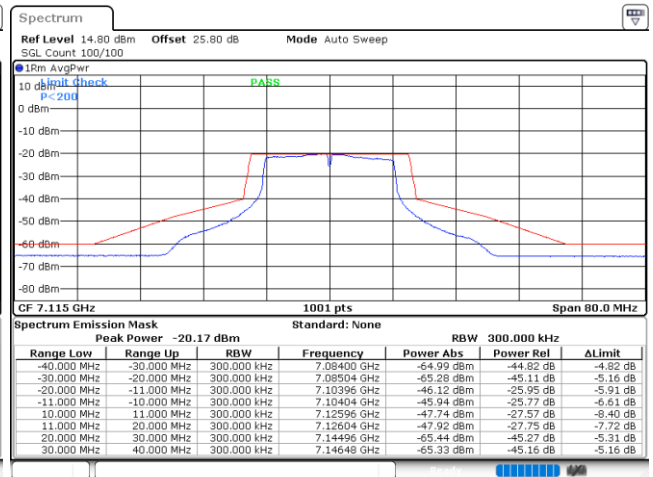


Date: 23 JUN.2022 00:16:31




EUT Mode : 802.11ax HE20 Full RU

Plot on Channel 5955MHz

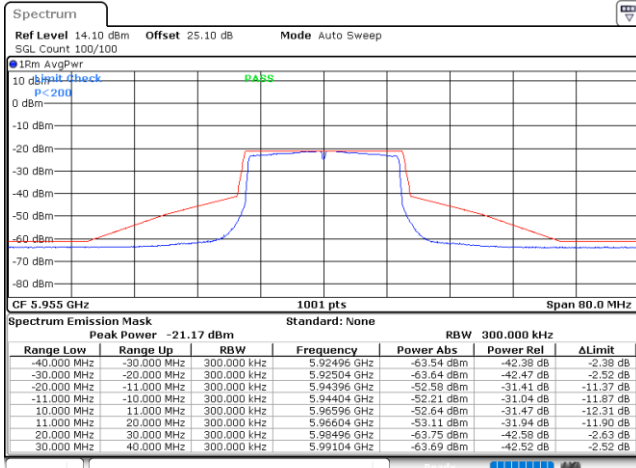


Date: 28 JUN.2022 00:32:51

Plot on Channel 6195MHz

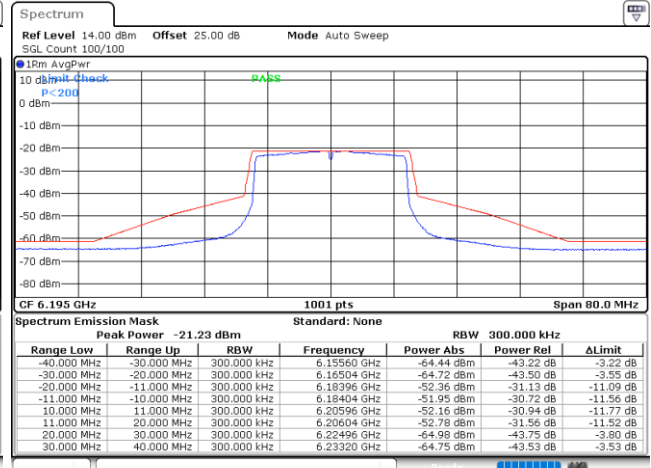


Date: 28 JUN.2022 00:42:41

Plot on Channel 6415MHz

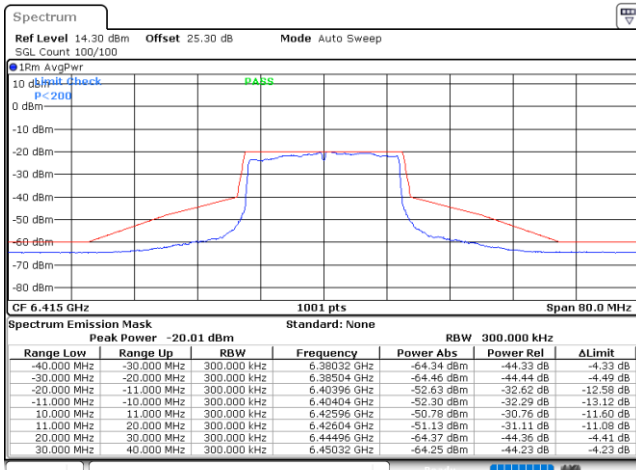

Date: 28 JUN.2022 00:53:30


Plot on Channel 6435MHz

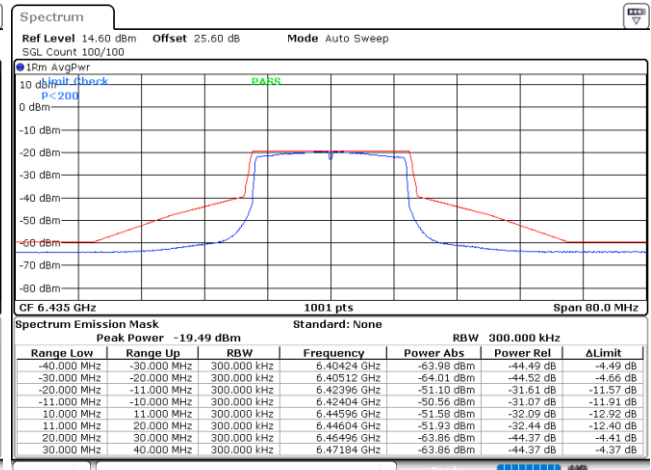

Date: 23 JUN.2022 01:20:19




Plot on Channel 6475MHz

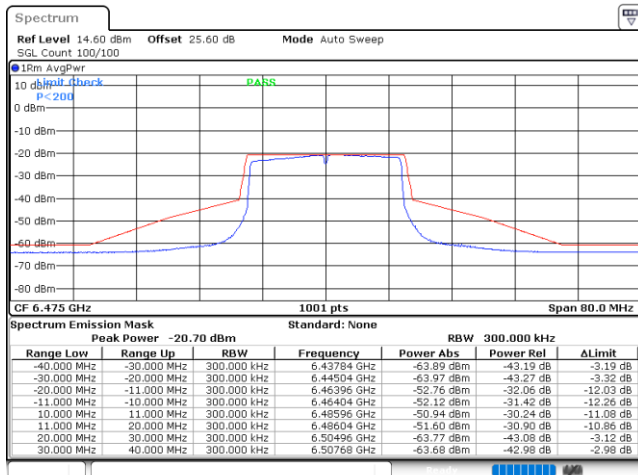


Date: 23 JUN.2022 01:30:04

Plot on Channel 6515MHz

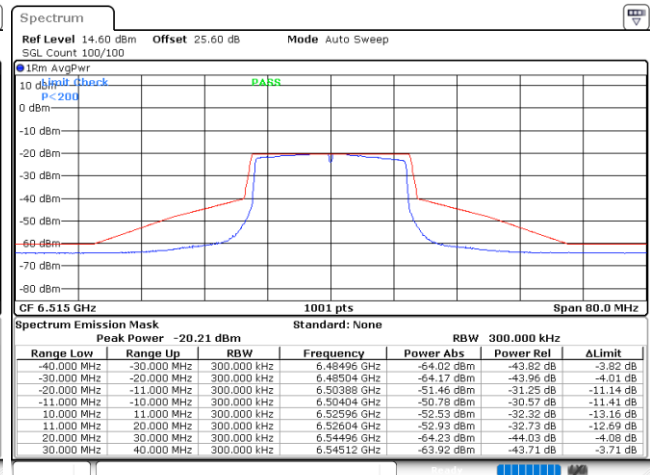


Date: 23 JUN.2022 19:11:42

Plot on Channel 6535MHz

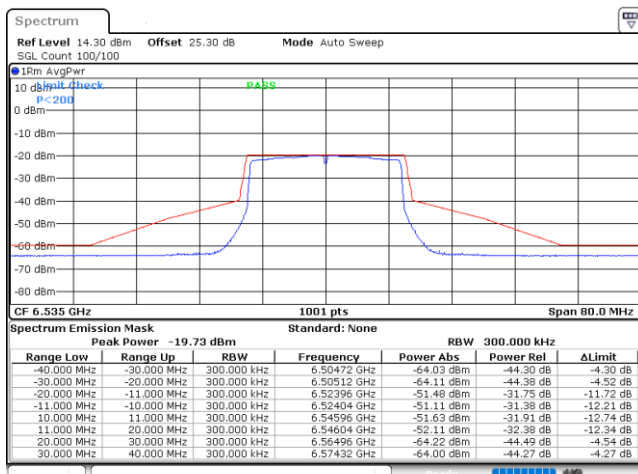

Date: 23 JUN.2022 19:27:26


Plot on Channel 6695MHz

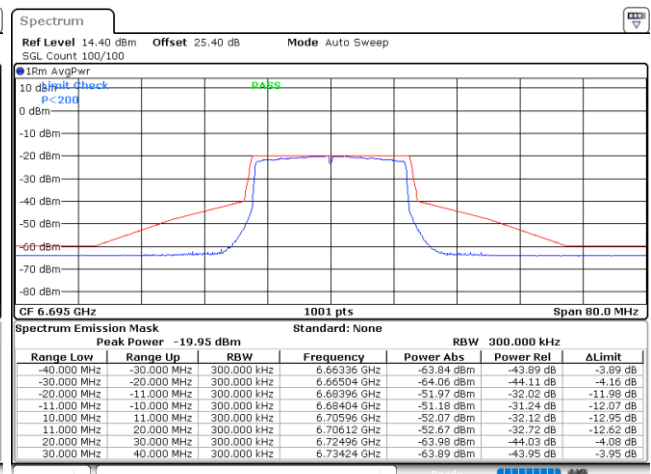

Date: 23 JUN.2022 19:35:09




Plot on Channel 6855MHz

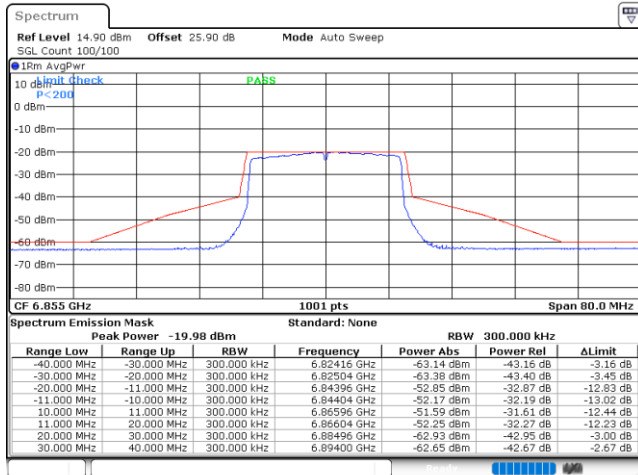


Date: 23 JUN.2022 19:54:09

Plot on Channel 6875MHz

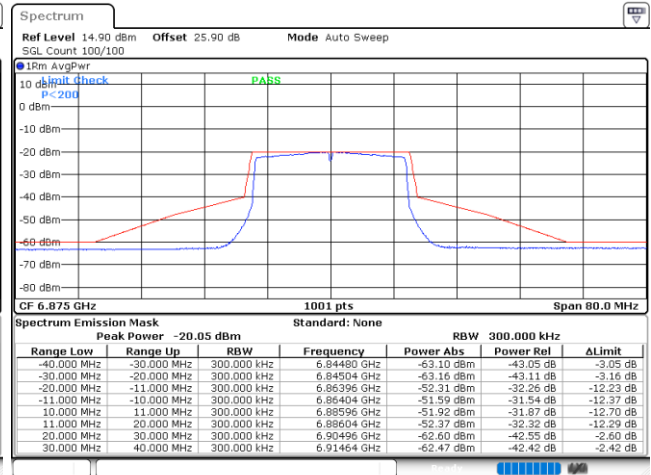


Date: 23 JUN.2022 20:10:14

Plot on Channel 6895MHz

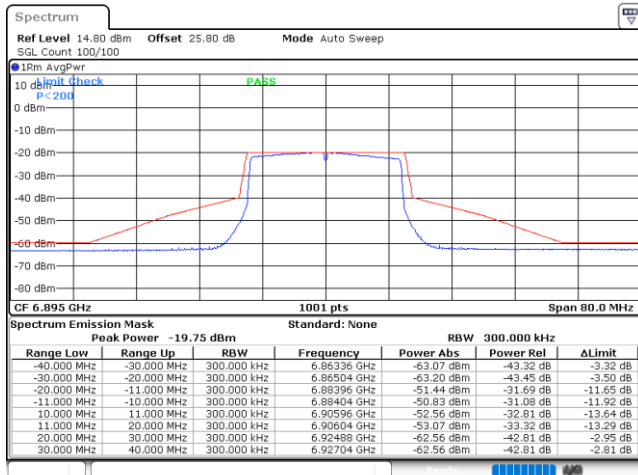

Date: 23 JUN.2022 20:19:19

Plot on Channel 6995MHz

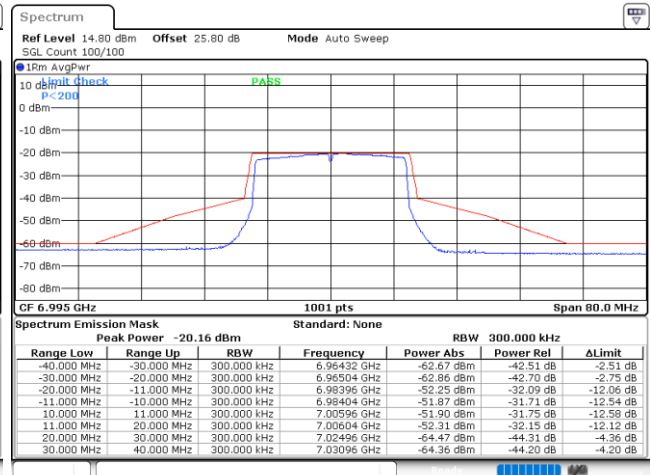


Date: 23 JUN.2022 20:27:05






Plot on Channel 7095MHz

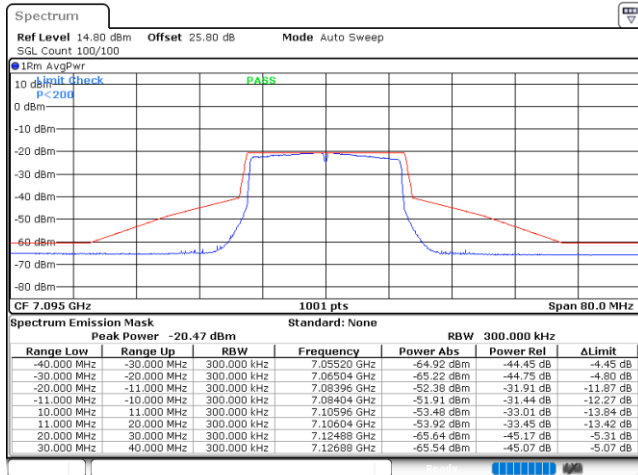

Date: 23 JUN.2022 20:30:31

Plot on Channel 7115MHz

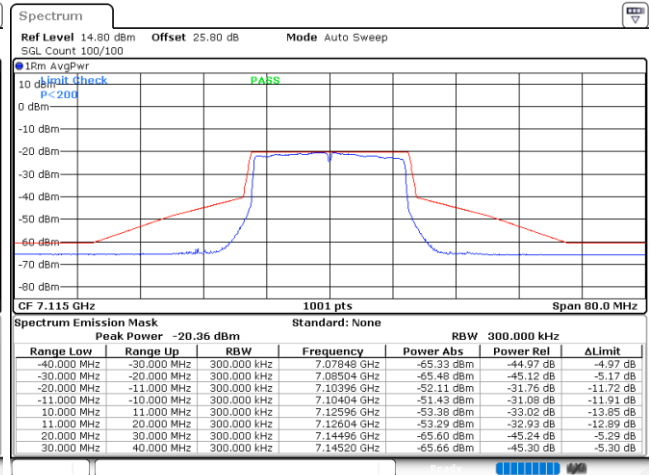


Date: 23 JUN.2022 20:58:29




EUT Mode : 802.11ax HE20 26RU

Plot on Channel 5955MHz

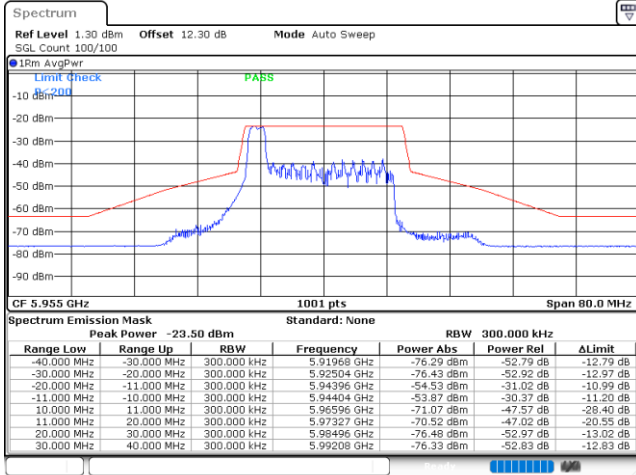


Date: 28 JUN.2022 20:36:29

Plot on Channel 6195MHz

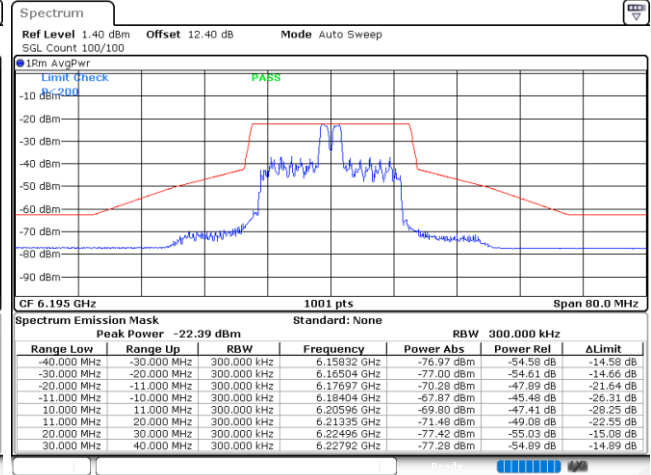


Date: 28 JUN.2022 20:51:25

Plot on Channel 6415MHz

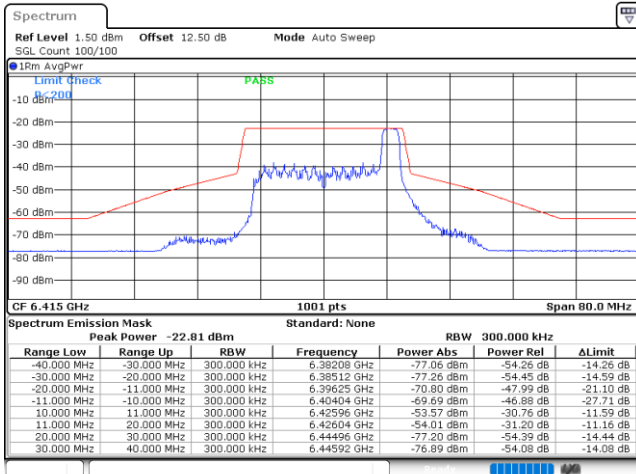

Date: 28 JUN.2022 21:00:32


Plot on Channel 6435MHz

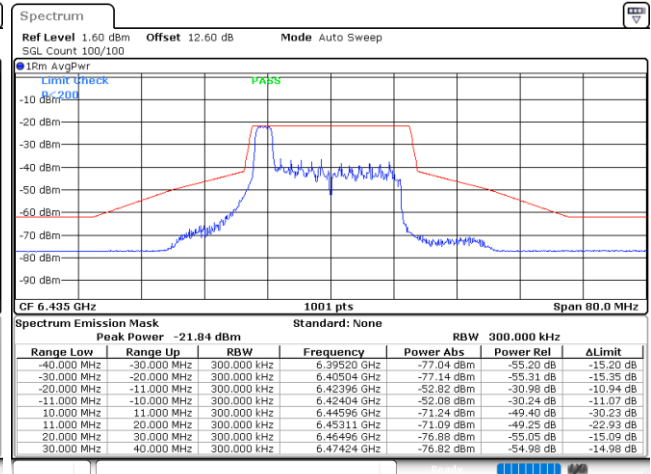

Date: 28 JUN.2022 21:10:02




Plot on Channel 6475MHz

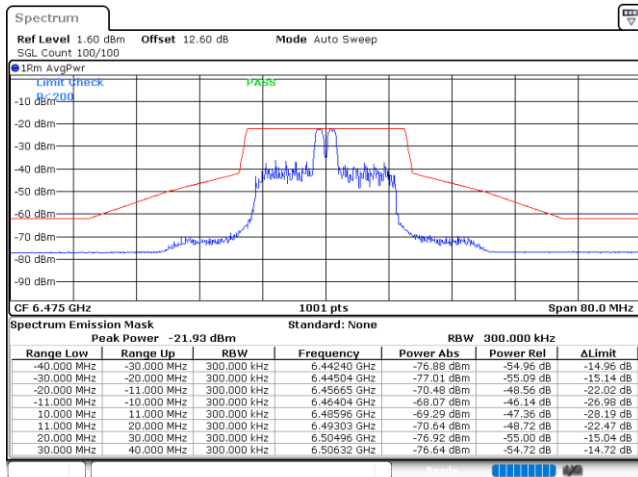


Date: 28 JUN.2022 21:28:38

Plot on Channel 6515MHz

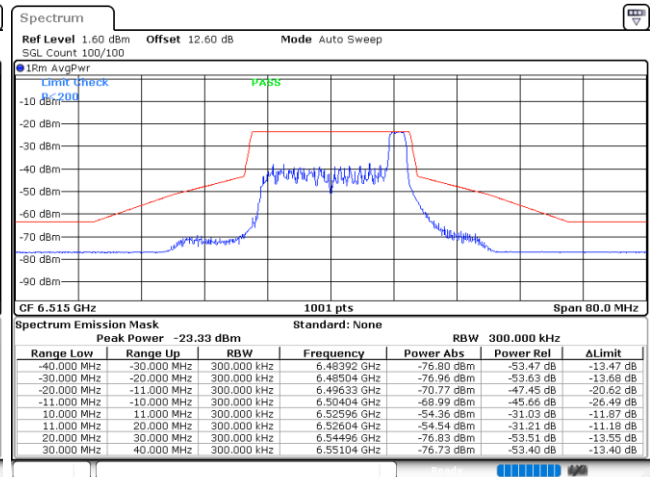


Date: 28 JUN.2022 21:43:38

Plot on Channel 6535MHz

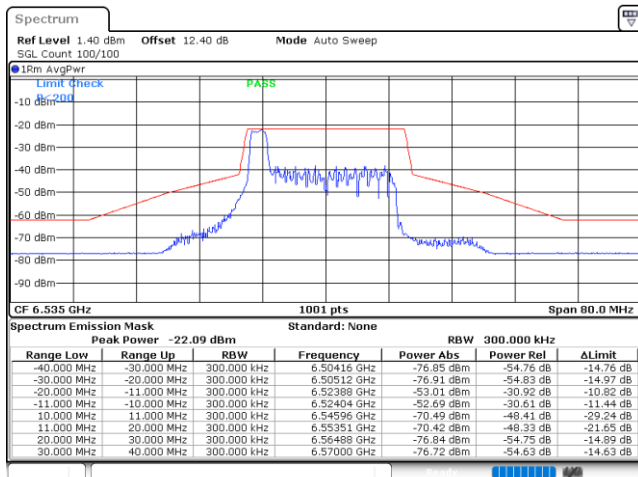

Date: 28 JUN.2022 22:21:17


Plot on Channel 6695MHz

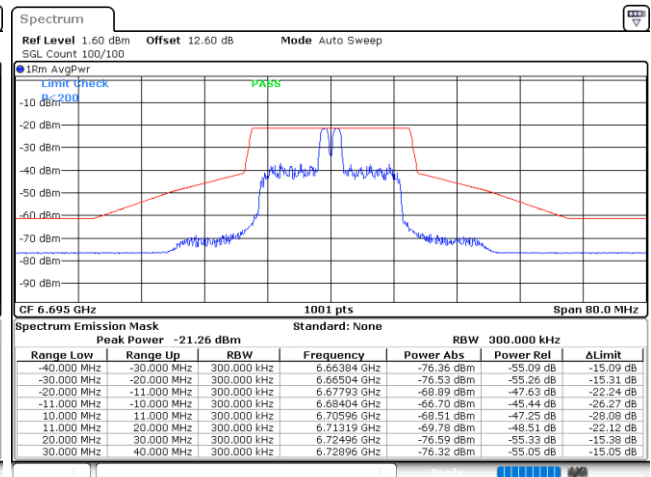

Date: 28 JUN.2022 22:34:22




Plot on Channel 6855MHz

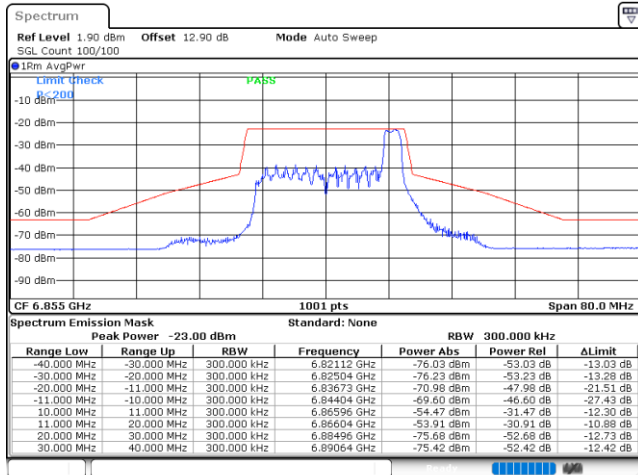


Date: 28 JUN.2022 22:46:38

Plot on Channel 6875MHz

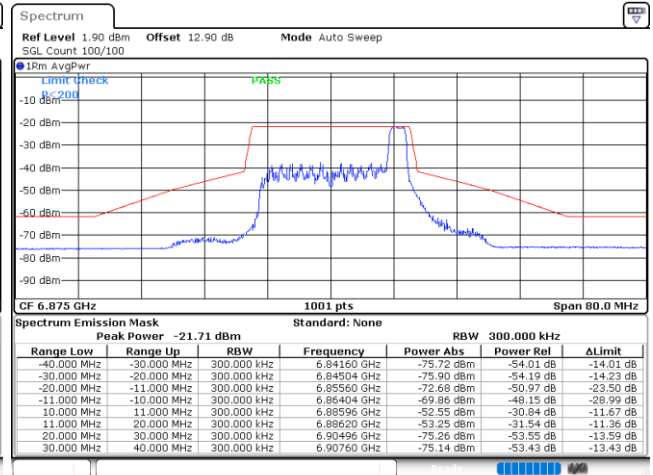


Date: 28 JUN.2022 22:55:53

Plot on Channel 6895MHz

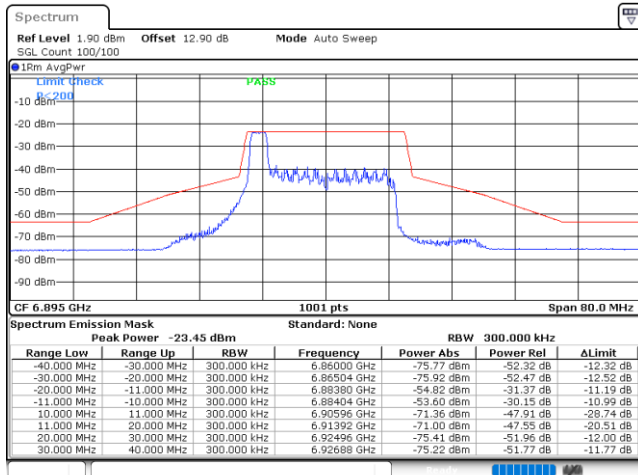

Date: 28 JUN.2022 23:09:05


Plot on Channel 6995MHz

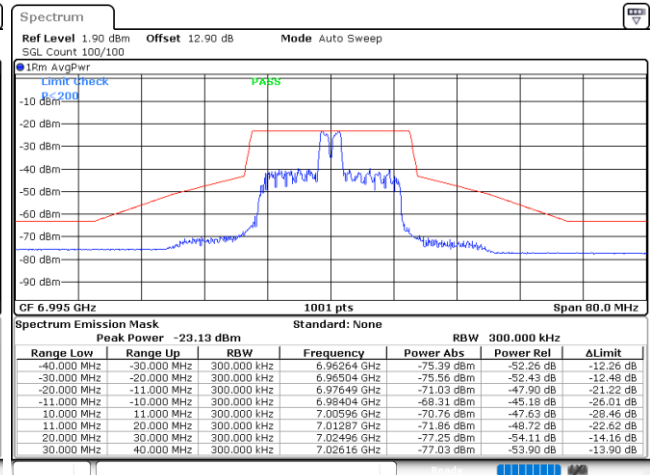

Date: 28 JUN.2022 23:24:11




Plot on Channel 7095MHz

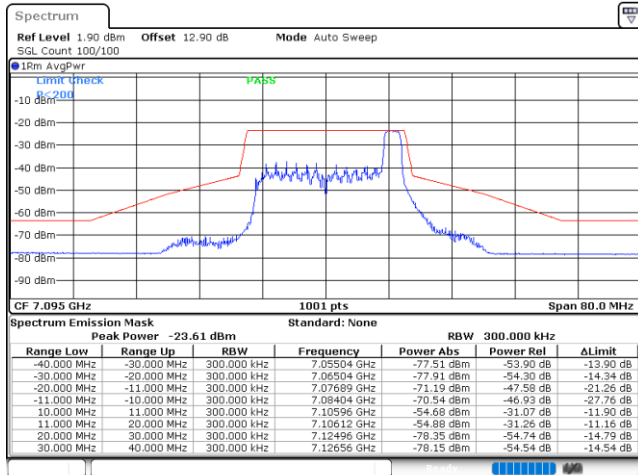

Date: 28 JUN.2022 23:35:06

Plot on Channel 7115MHz

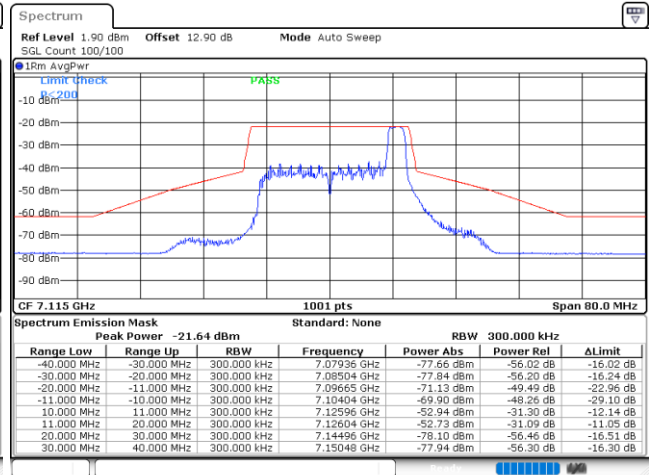


Date: 28 JUN.2022 23:46:47




EUT Mode : 802.11ax HE20 52RU

Plot on Channel 5955MHz

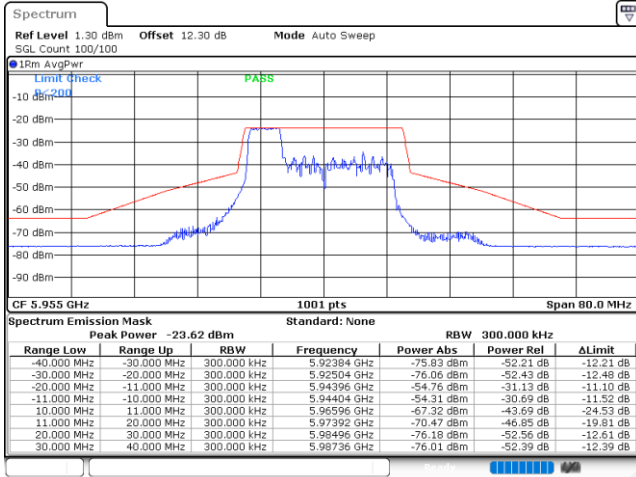


Date: 28 JUN.2022 20:42:12

Plot on Channel 6195MHz

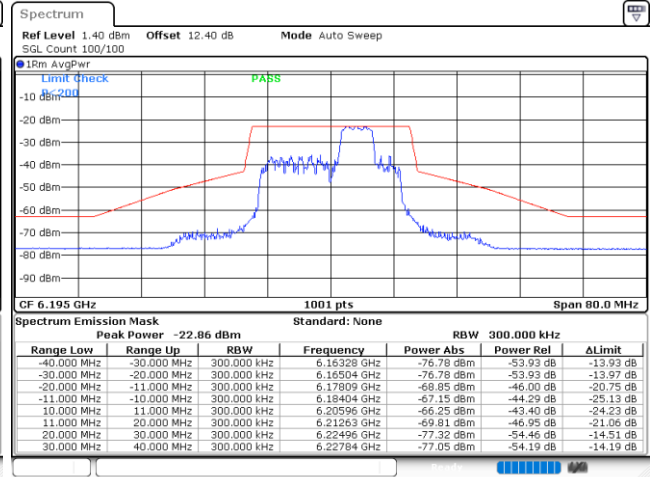


Date: 28 JUN.2022 20:52:37

Plot on Channel 6415MHz

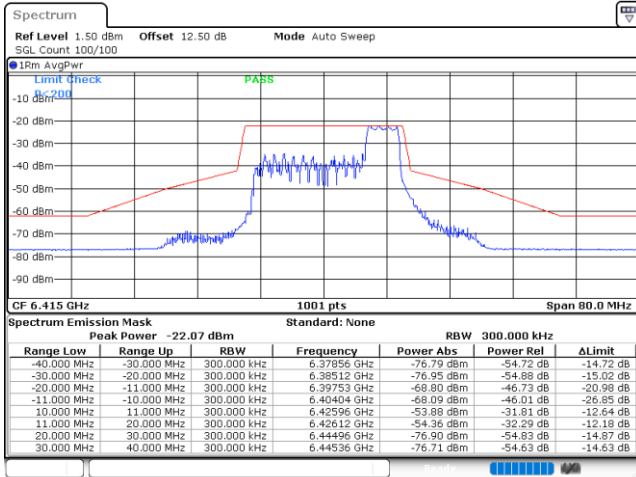

Date: 28 JUN.2022 21:04:07


Plot on Channel 6435MHz

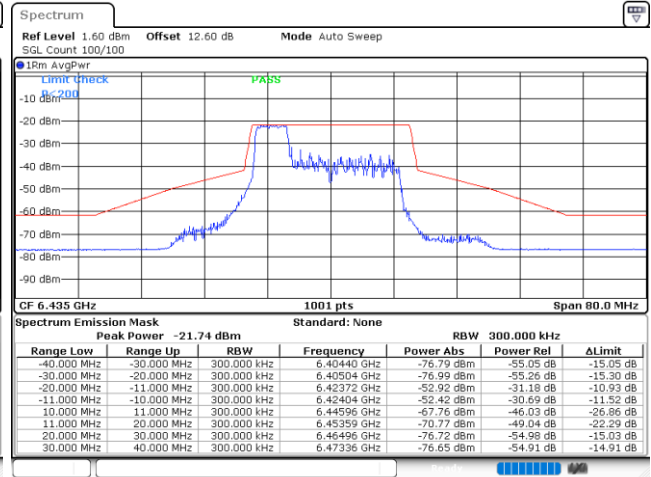

Date: 28 JUN.2022 21:11:02




Plot on Channel 6475MHz

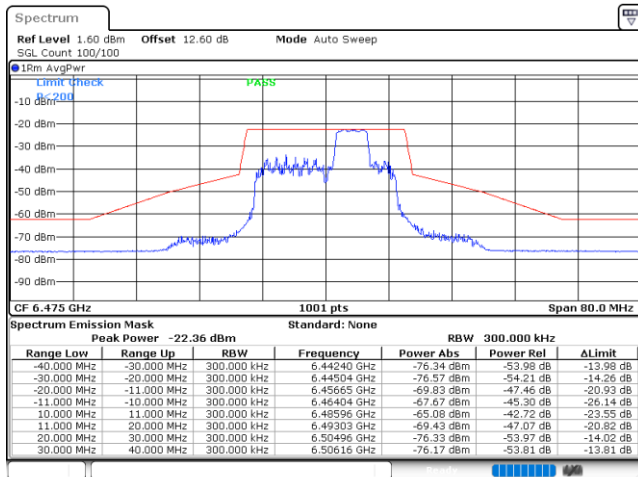


Date: 28 JUN.2022 21:33:19

Plot on Channel 6515MHz

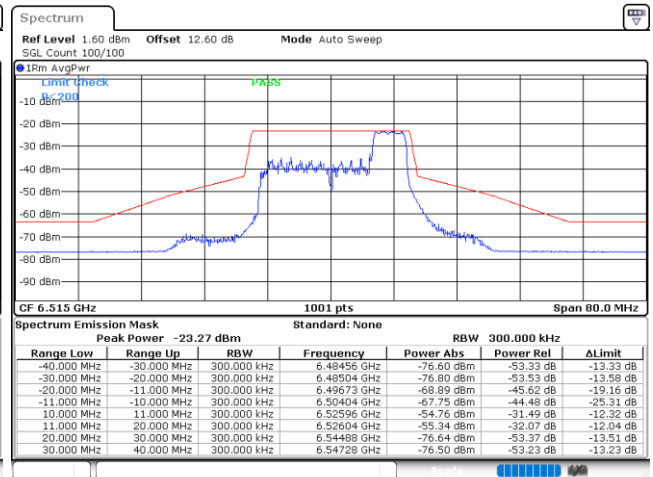


Date: 28 JUN.2022 21:44:48

Plot on Channel 6535MHz

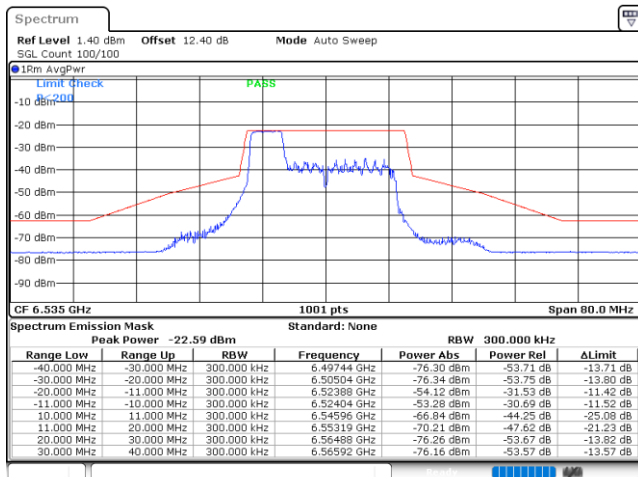

Date: 28 JUN.2022 22:26:46

Plot on Channel 6695MHz

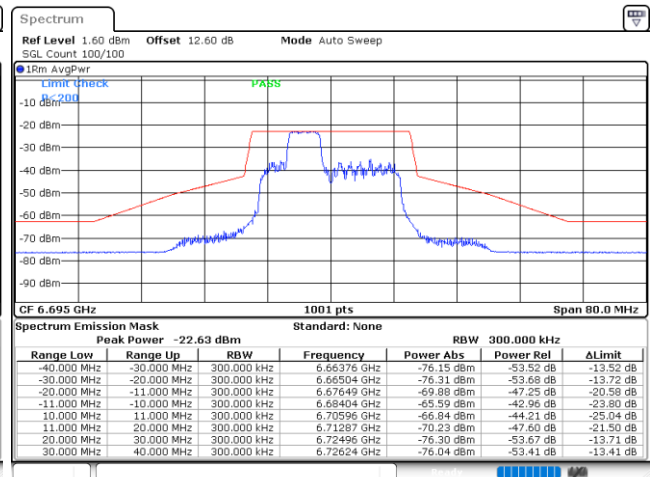

Date: 28 JUN.2022 22:35:44