



FCC RF Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Digital Media Player
MODEL NAME : C2H4R9
FCC ID : 2A4DH-4689
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Sep. 08, 2022 ~ Oct. 11, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

1.1 Applicant 5

1.2 Product Feature of Equipment Under Test..... 5

1.3 Product Specification of Equipment Under Test..... 5

1.4 Modification of EUT 6

1.5 Testing Location 7

1.6 Test Software..... 7

1.7 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

2.1 Carrier Frequency and Channel 8

2.2 Test Mode 10

2.3 Connection Diagram of Test System 12

2.4 Support Unit used in test configuration and system 13

2.5 EUT Operation Test Setup 13

2.6 Measurement Results Explanation Example..... 13

3 TEST RESULT 14

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 14

3.2 Maximum Conducted Output Power Measurement 18

3.3 Power Spectral Density Measurement 20

3.4 Unwanted Emissions Measurement 23

3.5 AC Conducted Emission Measurement..... 28

3.6 Antenna Requirements 30

4 LIST OF MEASURING EQUIPMENT 31

5 UNCERTAINTY OF EVALUATION 32

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX E. DUTY CYCLE PLOTS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR260819-01D	Rev. 01	Initial issue of report	Oct. 20, 2022



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1 ~ U-NII-2C	Limit for U-NII-3	Result
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	straddle channels > 500kHz (6dB Bandwidth)	> 500kHz (6dB Bandwidth)	Pass
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	≤ 30 dBm/500kHz	Pass
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass
3.6	15.203 & 15.407(a)	Antenna Requirement	N/A	N/A	Pass

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Amazon.com Services LLC
410 Terry Avenue N, Seattle, WA 98109-5210, United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Player
Model Name	C2H4R9
FCC ID	2A4DH-4689
SN	Radiation:G0G2DB01235200A9 Conduction: G0G2DB01235200A4 Conducted: P0G2RG012347408X

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p><5180 MHz ~ 5240 MHz> 802.11a : 17.67 dBm / 0.0585 W 802.11n HT20 : 16.55 dBm / 0.0452 W 802.11n HT40 : 15.69 dBm / 0.0371 W 802.11ac VHT20: 16.66 dBm / 0.0463 W 802.11ac VHT40: 15.75 dBm / 0.0376 W 802.11ac VHT80: 13.51 dBm / 0.0224 W</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 17.69 dBm / 0.0587 W 802.11n HT20 : 16.63 dBm / 0.0460 W 802.11n HT40 : 15.68 dBm / 0.0370 W 802.11ac VHT20: 16.64 dBm / 0.0461 W 802.11ac VHT40: 15.71 dBm / 0.0372 W 802.11ac VHT80: 13.49 dBm / 0.0223 W</p> <p><5500 MHz ~ 5720 MHz > 802.11a : 16.86 dBm / 0.0485 W 802.11n HT20 : 15.91 dBm / 0.0390 W 802.11n HT40 : 14.89 dBm / 0.0308 W 802.11ac VHT20: 15.92 dBm / 0.0391 W 802.11ac VHT40: 14.92 dBm / 0.0310 W 802.11ac VHT80: 14.02 dBm / 0.0252 W</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 17.05 dBm / 0.0507 W 802.11n HT20 : 15.87 dBm / 0.0386 W 802.11n HT40 : 15.15 dBm / 0.0327 W</p>



	802.11ac VHT20: 15.91 dBm / 0.0390 W 802.11ac VHT40: 15.16 dBm / 0.0328 W 802.11ac VHT80: 14.82 dBm / 0.0303 W
99% Occupied Bandwidth	<p><5180 MHz ~ 5240 MHz> 802.11a : 17.383 MHz 802.11ac VHT20 : 18.142 MHz 802.11ac VHT40 : 36.364 MHz 802.11ac VHT80 : 75.764 MHz</p> <p><5260 MHz ~ 5320 MHz> 802.11a : 17.343 MHz 802.11ac VHT20 : 18.102 MHz 802.11ac VHT40 : 36.444 MHz 802.11ac VHT80 : 75.604 MHz</p> <p><5500 MHz ~ 5720 MHz> 802.11a : 17.223 MHz 802.11ac VHT20 : 18.062 MHz 802.11ac VHT40 : 36.444 MHz 802.11ac VHT80 : 75.764 MHz</p> <p><5745 MHz ~ 5825 MHz> 802.11a : 17.223 MHz 802.11ac VHT20 : 18.022 MHz 802.11ac VHT40 : 36.444 MHz 802.11ac VHT80 : 75.764 MHz</p>
Antenna Type / Gain	<p><5180 MHz ~ 5240 MHz> PCB Antenna with gain 2.8 dBi</p> <p><5260 MHz ~ 5320 MHz> PCB Antenna with gain 3.0 dBi</p> <p><5500 MHz ~ 5720 MHz> PCB Antenna with gain 3.7 dBi</p> <p><5745 MHz ~ 5825 MHz> PCB Antenna with gain 3.4 dBi</p>
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11ac VHT20 /ac VHT40 by referring to their higher conducted power.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	Rohde&Schwarz	EMC32	10.60.0.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20 (Cover 11n HT20)	MCS0
802.11ac VHT40 (Cover 11n HT40)	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : WIFI(5G) Link+Adapter 1
Remark: For Radiated Test Cases, The tests were performed with Adapter 1.	

Simultaneous transmission
WIFI 802 11ac VHT80 Ch106 Tx+ Bluetooth LE(2Mbps) Tx Ch39



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

For AC Conducted Emission:

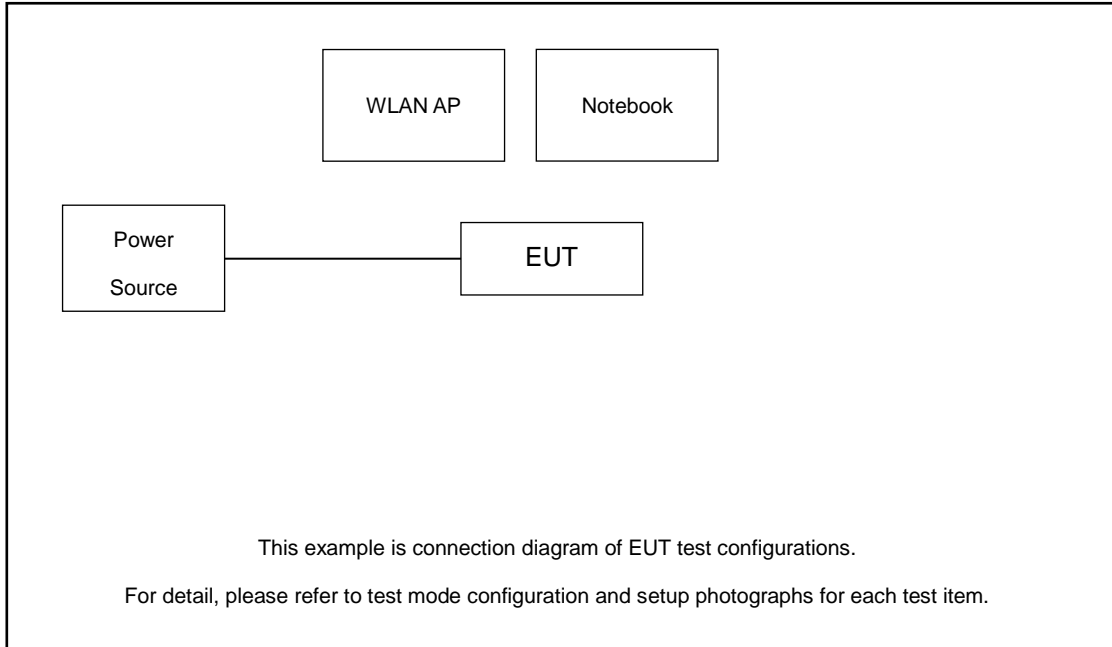

For Radiated Emission:

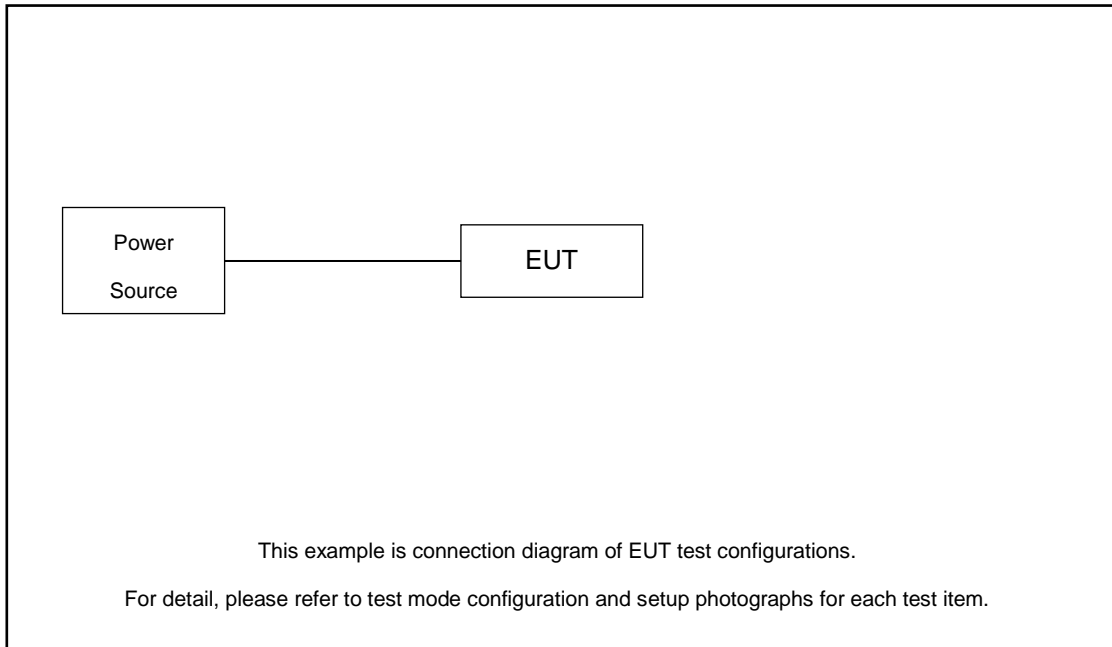



2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	WLAN AP	DIR-655	KA21R655B1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.75 dB and 10dB attenuator.

$$\begin{aligned}
\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
&= 6.75 + 10 = 16.75 \text{ (dB)}
\end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedures

- 1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW)
	<ol style="list-style-type: none"> 1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. 7. Measure and record the results in the test report.
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth
	<ol style="list-style-type: none"> 1. Set RBW = 100kHz. 2. Set the VBW ≥ 3 x RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the

emission.
6. Measure and record the results in the test report.

3.1.4 Test Setup


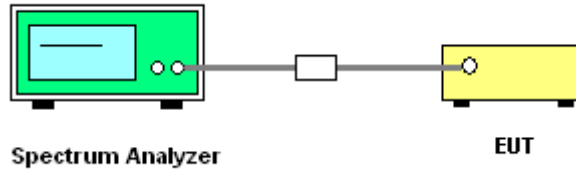



3.1.5 Test Result

Please refer to Appendix A.

3.1.6 Test Result of 6dB Bandwidth for Straddle Channels

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 1	
11a	6Mbps	1	144	5720	3.299	0.5	Pass
VHT20	MCS0	1	144	5720	3.899	0.5	Pass
VHT40	MCS0	1	142	5710	3.270	0.5	Pass
VHT80	MCS0	1	138	5690	3.360	0.5	Pass

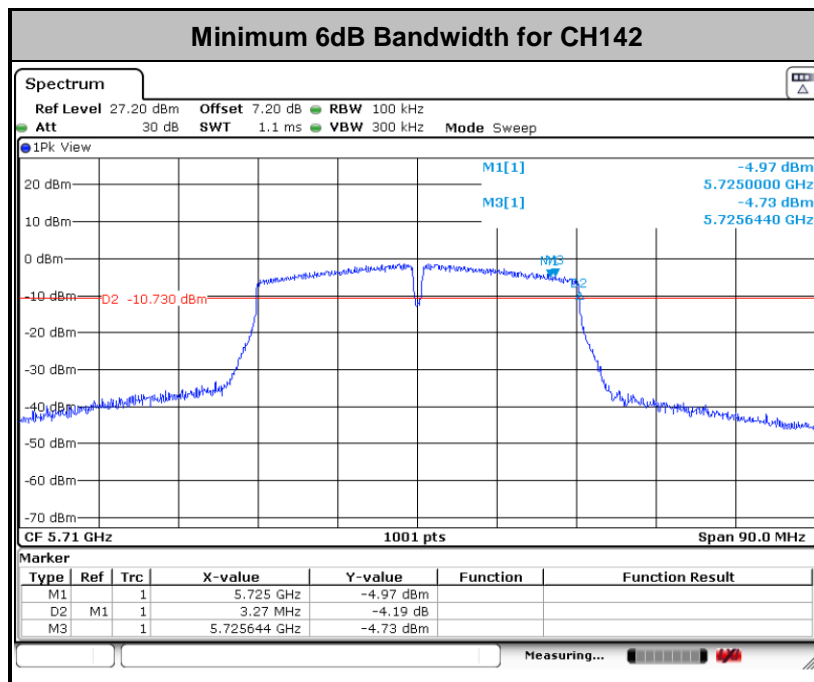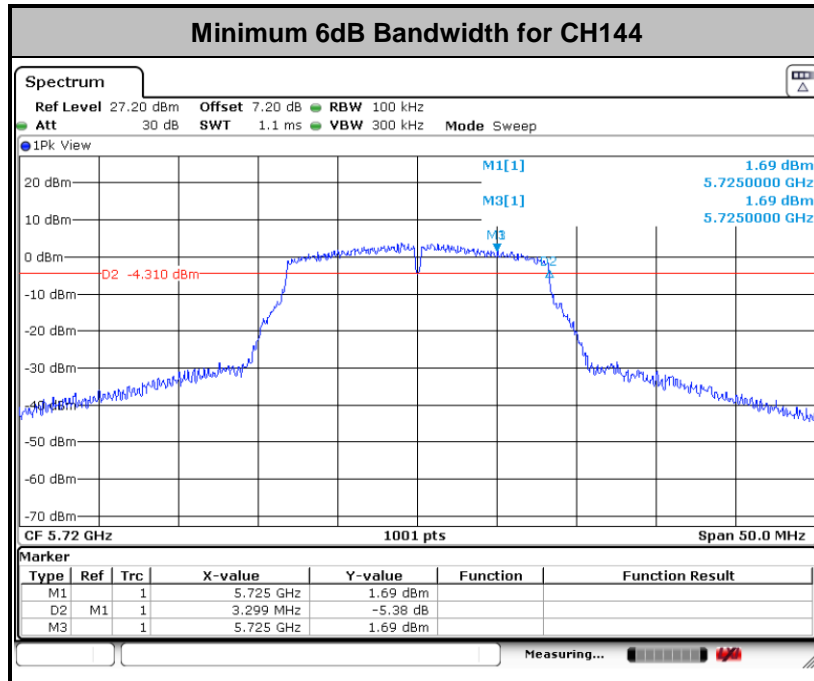

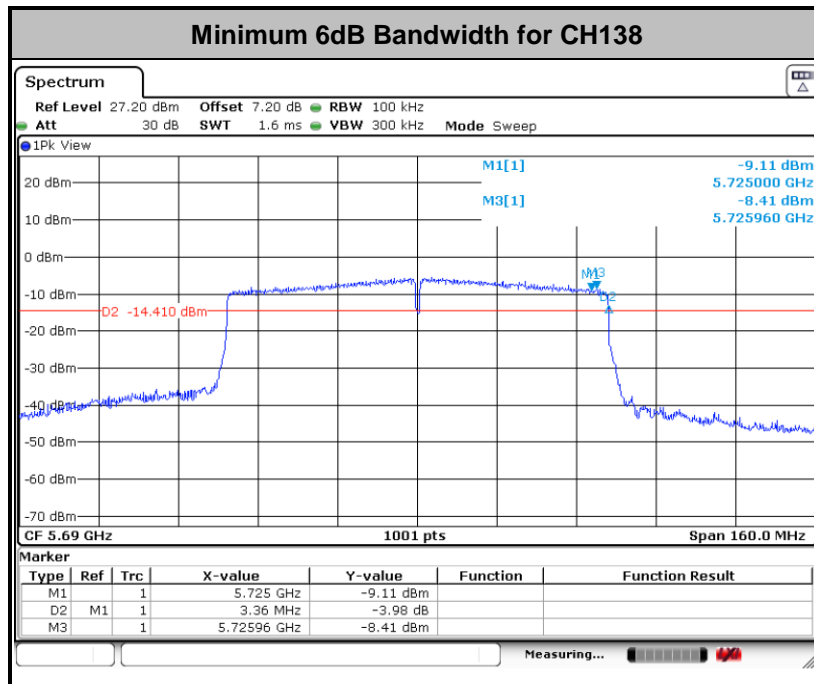



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

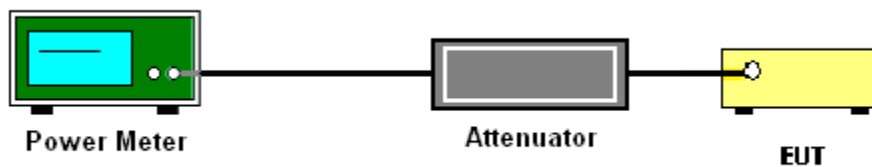

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band 5.725 - 5.85 GHz


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500 kHz.
- Set VBW \geq 2 MHz.
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

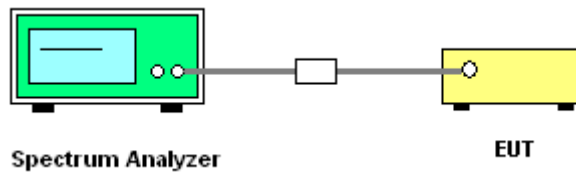

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
 - 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
 - (4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 3 MHz
 - Detector = power averaging (rms), set span/(# of points in sweep) \geq RBW/2.
 - Averaging type = power averaging(RMS)
 - The correction factor shall be offset is 10 log (1/x), where x is the duty cycle.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal

polarization and vertical polarization of the antenna.


5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

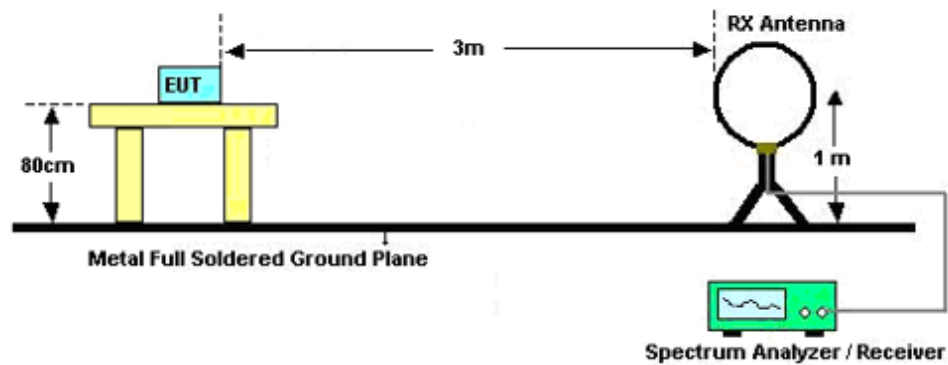

For radiated emissions from 30MHz to 1GHz

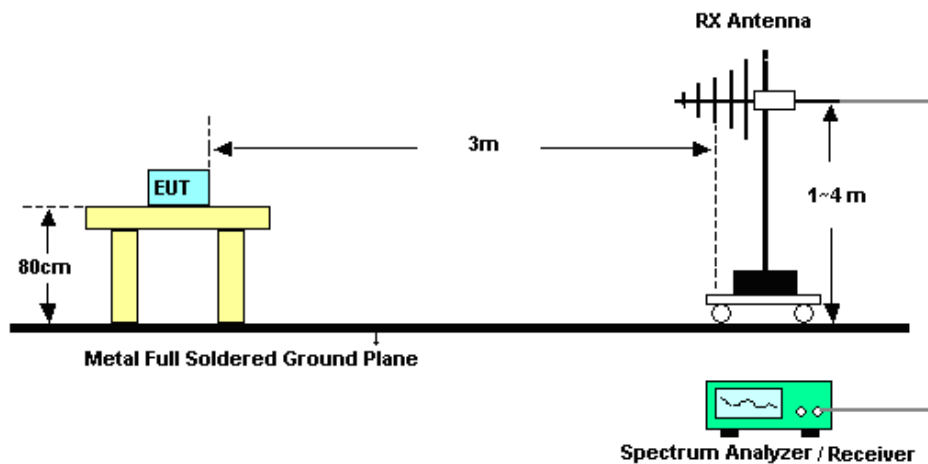

For radiated emissions above 1GHz

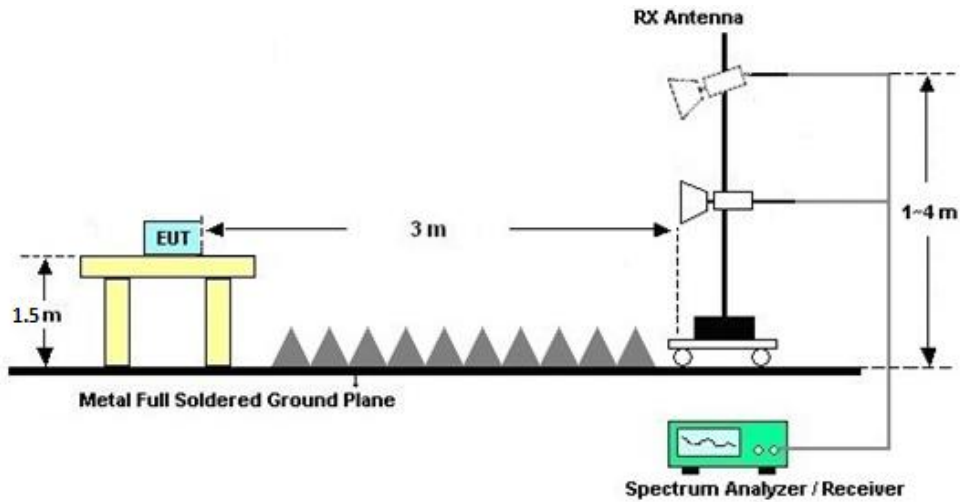

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C&D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C&D.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

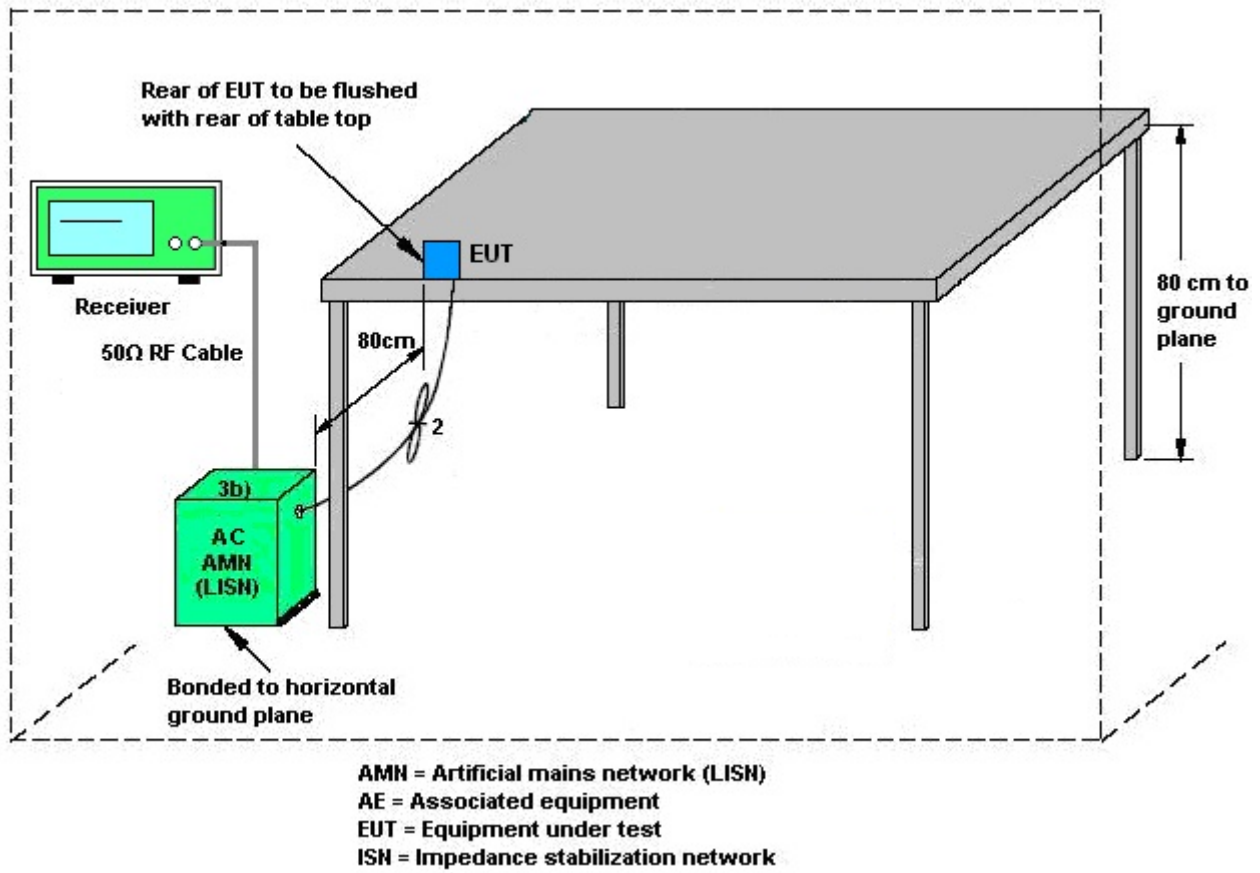

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Sep. 08, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Sep. 08, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Sep. 08, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max x 30dBm	Oct. 16, 2021	Oct. 11, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz-44GHz	Oct. 26, 2021	Oct. 11, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Oct. 11, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 24, 2022	Oct. 11, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 18, 2022	Oct. 11, 2022	Apr. 17, 2023	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Oct. 11, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 11, 2022	Oct. 11, 2022	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Oct. 11, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2082395	1Ghz-18Ghz	Jan. 05, 2022	Oct. 11, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5G Hz	Oct. 14, 2021	Oct. 11, 2022	Oct. 13, 2022	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 11, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 11, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 11, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Sep. 25, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Sep. 25, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Sep. 25, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Sep. 25, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.56 dB
Conducted Emissions	±0.92 dB
Occupied Channel Bandwidth	±0.03 %
Conducted Power Spectral Density	±0.54 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Gene Wang	Temperature:	21~25	°C
Test Date:	2022.9.8	Relative Humidity:	51~54	%
Tool & Version		Test Site		

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	0.00	-	17.11	-		24.00	-	2.80	-	Pass
11a	6Mbps	1	44	5220	0.00	-	17.53	-		24.00	-	2.80	-	Pass
11a	6Mbps	1	48	5240	0.00	-	17.67	-		24.00	-	2.80	-	Pass
HT20	MCS0	1	36	5180	0.00	-	16.43	-		24.00	-	2.80	-	Pass
HT20	MCS0	1	44	5220	0.00	-	16.51	-		24.00	-	2.80	-	Pass
HT20	MCS0	1	48	5240	0.00	-	16.55	-		24.00	-	2.80	-	Pass
HT40	MCS0	1	38	5190	0.00	-	15.53	-		24.00	-	2.80	-	Pass
HT40	MCS0	1	46	5230	0.00	-	15.69	-		24.00	-	2.80	-	Pass
VHT20	MCS0	1	36	5180	0.00	-	16.59	-		24.00	-	2.80	-	Pass
VHT20	MCS0	1	44	5220	0.00	-	16.53	-		24.00	-	2.80	-	Pass
VHT20	MCS0	1	48	5240	0.00	-	16.66	-		24.00	-	2.80	-	Pass
VHT40	MCS0	1	38	5190	0.00	-	15.56	-		24.00	-	2.80	-	Pass
VHT40	MCS0	1	46	5230	0.00	-	15.75	-		24.00	-	2.80	-	Pass
VHT80	MCS0	1	42	5210	0.00	-	13.51	-		24.00	-	2.80	-	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	0.00	-	17.69	-		23.94	-	3.00	-	26.99	Pass
11a	6Mbps	1	60	5300	0.00	-	17.61	-		23.96	-	3.00	-	26.99	Pass
11a	6Mbps	1	64	5320	0.00	-	17.63	-		23.96	-	3.00	-	26.99	Pass
HT20	MCS0	1	52	5260	0.00	-	16.63	-		23.98	-	3.00	-	26.99	Pass
HT20	MCS0	1	60	5300	0.00	-	16.60	-		23.98	-	3.00	-	26.99	Pass
HT20	MCS0	1	64	5320	0.00	-	16.58	-		23.98	-	3.00	-	26.99	Pass
HT40	MCS0	1	54	5270	0.00	-	15.68	-		23.98	-	3.00	-	26.99	Pass
HT40	MCS0	1	62	5310	0.00	-	15.65	-		23.98	-	3.00	-	26.99	Pass
VHT20	MCS0	1	52	5260	0.00	-	16.64	-		23.98	-	3.00	-	26.99	Pass
VHT20	MCS0	1	60	5300	0.00	-	16.62	-		23.98	-	3.00	-	26.99	Pass
VHT20	MCS0	1	64	5320	0.00	-	16.61	-		23.98	-	3.00	-	26.99	Pass
VHT40	MCS0	1	54	5270	0.00	-	15.71	-		23.98	-	3.00	-	26.99	Pass
VHT40	MCS0	1	62	5310	0.00	-	15.66	-		23.98	-	3.00	-	26.99	Pass
VHT80	MCS0	1	58	5290	0.00	-	13.49	-		23.98	-	3.00	-	26.99	Pass

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	0.00	-	16.79	-		23.96	-	3.70	-	26.99	Pass
11a	6Mbps	1	116	5580	0.00	-	16.86	-		23.94	-	3.70	-	26.99	Pass
11a	6Mbps	1	140	5700	0.00	-	16.72	-		23.94	-	3.70	-	26.99	Pass
HT20	MCS0	1	100	5500	0.00	-	15.65	-		23.98	-	3.70	-	26.99	Pass
HT20	MCS0	1	116	5580	0.00	-	15.91	-		23.98	-	3.70	-	26.99	Pass
HT20	MCS0	1	140	5700	0.00	-	15.64	-		23.98	-	3.70	-	26.99	Pass
HT40	MCS0	1	102	5510	0.00	-	14.89	-		23.98	-	3.70	-	26.99	Pass
HT40	MCS0	1	110	5550	0.00	-	14.75	-		23.98	-	3.70	-	26.99	Pass
HT40	MCS0	1	134	5670	0.00	-	14.45	-		23.98	-	3.70	-	26.99	Pass
VHT20	MCS0	1	100	5500	0.00	-	15.75	-		23.98	-	3.70	-	26.99	Pass
VHT20	MCS0	1	116	5580	0.00	-	15.92	-		23.98	-	3.70	-	26.99	Pass
VHT20	MCS0	1	140	5700	0.00	-	15.72	-		23.98	-	3.70	-	26.99	Pass
VHT40	MCS0	1	102	5510	0.00	-	14.92	-		23.98	-	3.70	-	26.99	Pass
VHT40	MCS0	1	110	5550	0.00	-	14.76	-		23.98	-	3.70	-	26.99	Pass
VHT40	MCS0	1	134	5670	0.00	-	14.47	-		23.98	-	3.70	-	26.99	Pass
VHT80	MCS0	1	106	5530	0.00	-	13.64	-		23.98	-	3.70	-	26.99	Pass
VHT80	MCS0	1	122	5610	0.00	-	14.02	-		23.98	-	3.70	-	26.99	Pass

FCC U-NII-2C straddle channel single antenna															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	144	5720	0.00	-	16.65	-		23.96	-	3.70	-	26.99	Pass
HT20	MCS0	1	144	5720	0.00	-	15.59	-		23.98	-	3.70	-	26.99	Pass
HT40	MCS0	1	142	5710	0.00	-	14.77	-		23.98	-	3.70	-	26.99	Pass
VHT20	MCS0	1	144	5720	0.00	-	15.68	-		23.98	-	3.70	-	26.99	Pass
VHT40	MCS0	1	142	5710	0.00	-	14.79	-		23.98	-	3.70	-	26.99	Pass
VHT80	MCS0	1	138	5690	0.00	-	13.41	-		23.98	-	3.70	-	26.99	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.00		17.02	-		30.00	-	3.40	-	Pass
11a	6Mbps	1	157	5785	0.00		17.05	-		30.00	-	3.40	-	Pass
11a	6Mbps	1	165	5825	0.00		16.76	-		30.00	-	3.40	-	Pass
HT20	MCS0	1	149	5745	0.00		15.87	-		30.00	-	3.40	-	Pass
HT20	MCS0	1	157	5785	0.00		15.83	-		30.00	-	3.40	-	Pass
HT20	MCS0	1	165	5825	0.00		15.78	-		30.00	-	3.40	-	Pass
HT40	MCS0	1	151	5755	0.00		14.86	-		30.00	-	3.40	-	Pass
HT40	MCS0	1	159	5795	0.00		15.15	-		30.00	-	3.40	-	Pass
VHT20	MCS0	1	149	5745	0.00		15.89	-		30.00	-	3.40	-	Pass
VHT20	MCS0	1	157	5785	0.00		15.91	-		30.00	-	3.40	-	Pass
VHT20	MCS0	1	165	5825	0.00		15.79	-		30.00	-	3.40	-	Pass
VHT40	MCS0	1	151	5755	0.00		14.96	-		30.00	-	3.40	-	Pass
VHT40	MCS0	1	159	5795	0.00		15.16	-		30.00	-	3.40	-	Pass
VHT80	MCS0	1	155	5775	0.00		14.82	-		30.00	-	3.40	-	Pass



Emission Bandwidth

Test Result


TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.20	5169.92	5190.12		
		5220	20.72	5209.68	5230.40		
		5240	20.48	5229.64	5250.12		
		5260	20.28	5249.72	5270.00		
		5300	20.56	5289.84	5310.40		
		5320	20.96	5309.68	5330.64		
		5500	20.32	5489.80	5510.12		
		5580	20.56	5569.76	5590.32		
		5700	20.08	5690.00	5710.08		
		5720	20.20	5710.00	5730.20		
		5720_UNII-2C	15	5710.00	5725		
		5720_UNII-3	5.2	5725	5730.20		
		5745	20.20	5734.96	5755.16		
		5785	20.04	5775.00	5795.04		
		5825	20.24	5814.84	5835.08		
11AC20SISO	Ant1	5180	20.64	5169.68	5190.32		
		5220	20.48	5209.76	5230.24		
		5240	20.20	5230.04	5250.24		
		5260	20.56	5249.64	5270.20		
		5300	20.44	5289.84	5310.28		
		5320	20.36	5309.84	5330.20		
		5500	20.20	5489.92	5510.12		
		5580	20.24	5569.88	5590.12		
		5700	20.56	5689.68	5710.24		
		5720	20.56	5709.76	5730.32		
		5720_UNII-2C	15.24	5709.76	5725		
		5720_UNII-3	5.32	5725	5730.32		
		5745	20.20	5734.92	5755.12		
		5785	20.36	5774.80	5795.16		
		5825	20.28	5814.76	5835.04		
11AC40SISO	Ant1	5190	41.12	5169.52	5210.64		
		5230	41.36	5209.36	5250.72		
		5270	41.20	5249.36	5290.56		





		5310	40.88	5289.60	5330.48		
		5510	40.88	5489.84	5530.72		
		5550	40.80	5529.60	5570.40		
		5670	40.96	5649.60	5690.56		
		5710	41.12	5689.60	5730.72		
		5710_UNII-2C	35.4	5689.60	5725		
		5710_UNII-3	5.72	5725	5730.72		
		5755	41.20	5734.28	5775.48		
		5795	41.12	5774.44	5815.56		
11AC80SISO	Ant1	5210	81.44	5169.20	5250.64		
		5290	81.76	5249.20	5330.96		
		5530	81.44	5489.36	5570.80		
		5610	81.12	5569.68	5650.80		
		5690	81.60	5649.36	5730.96		
		5690_UNII-2C	75.64	5649.36	5725		
		5690_UNII-3	5.96	5725	5730.96		
		5775	81.44	5734.52	5815.96		




Test Graphs

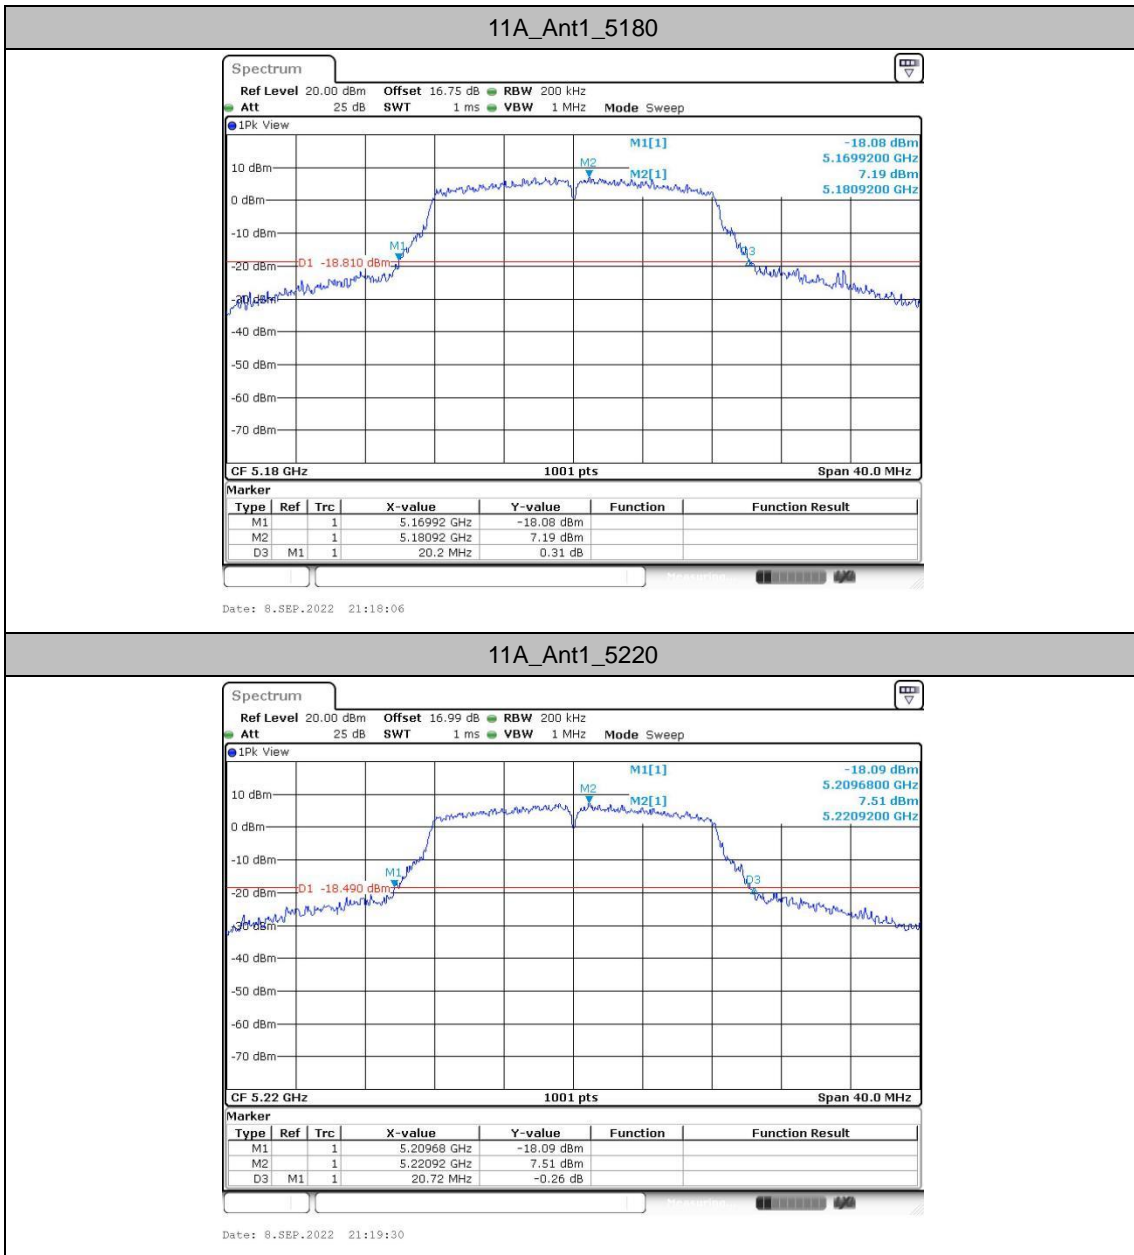


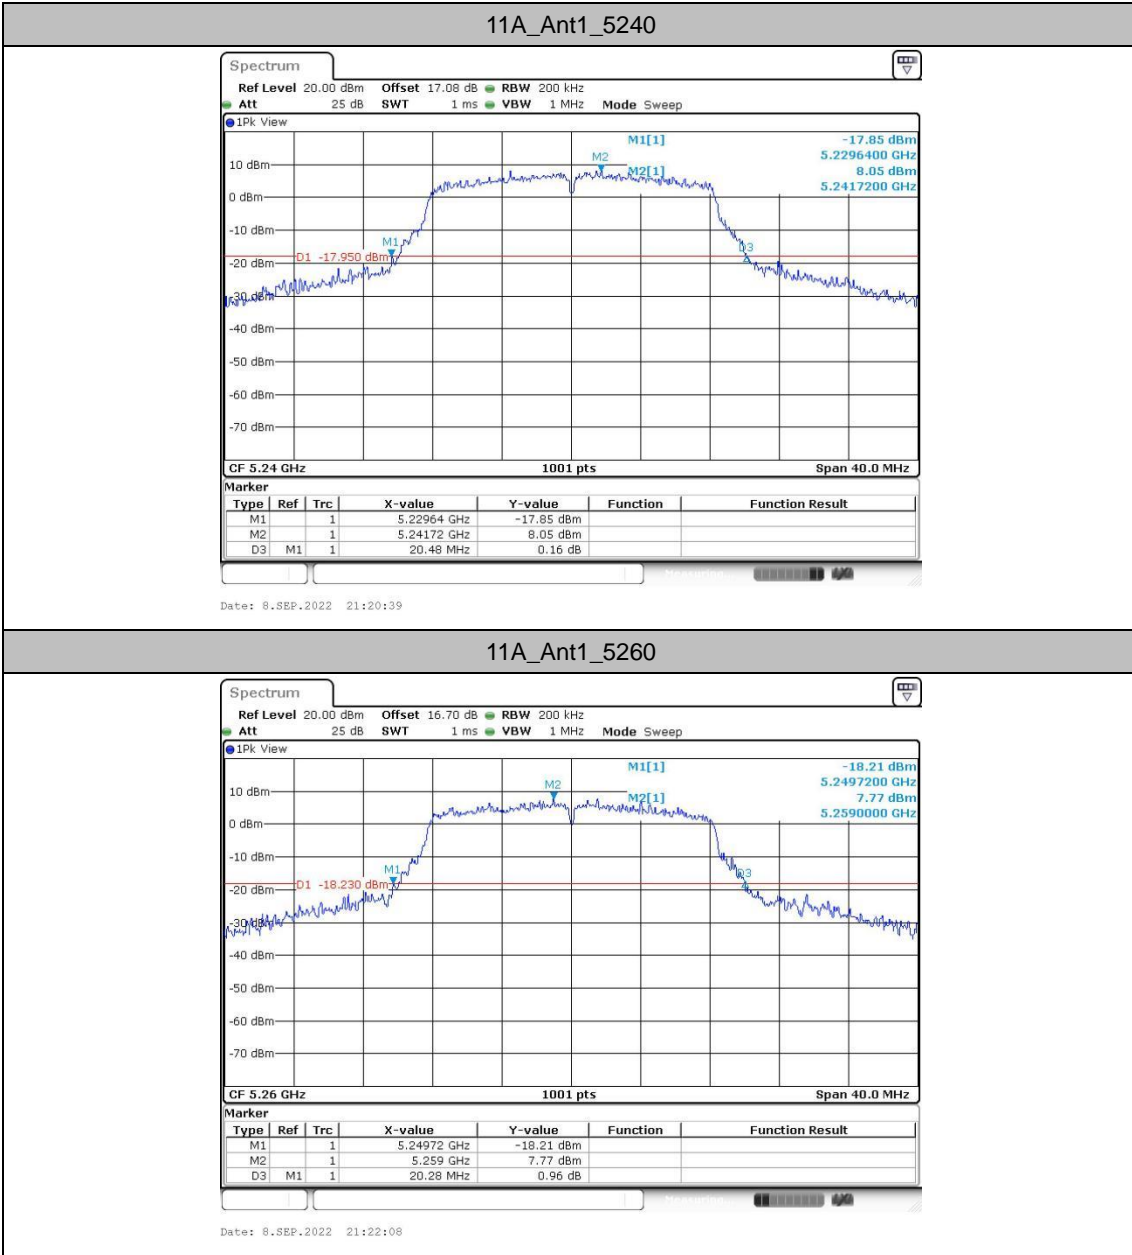


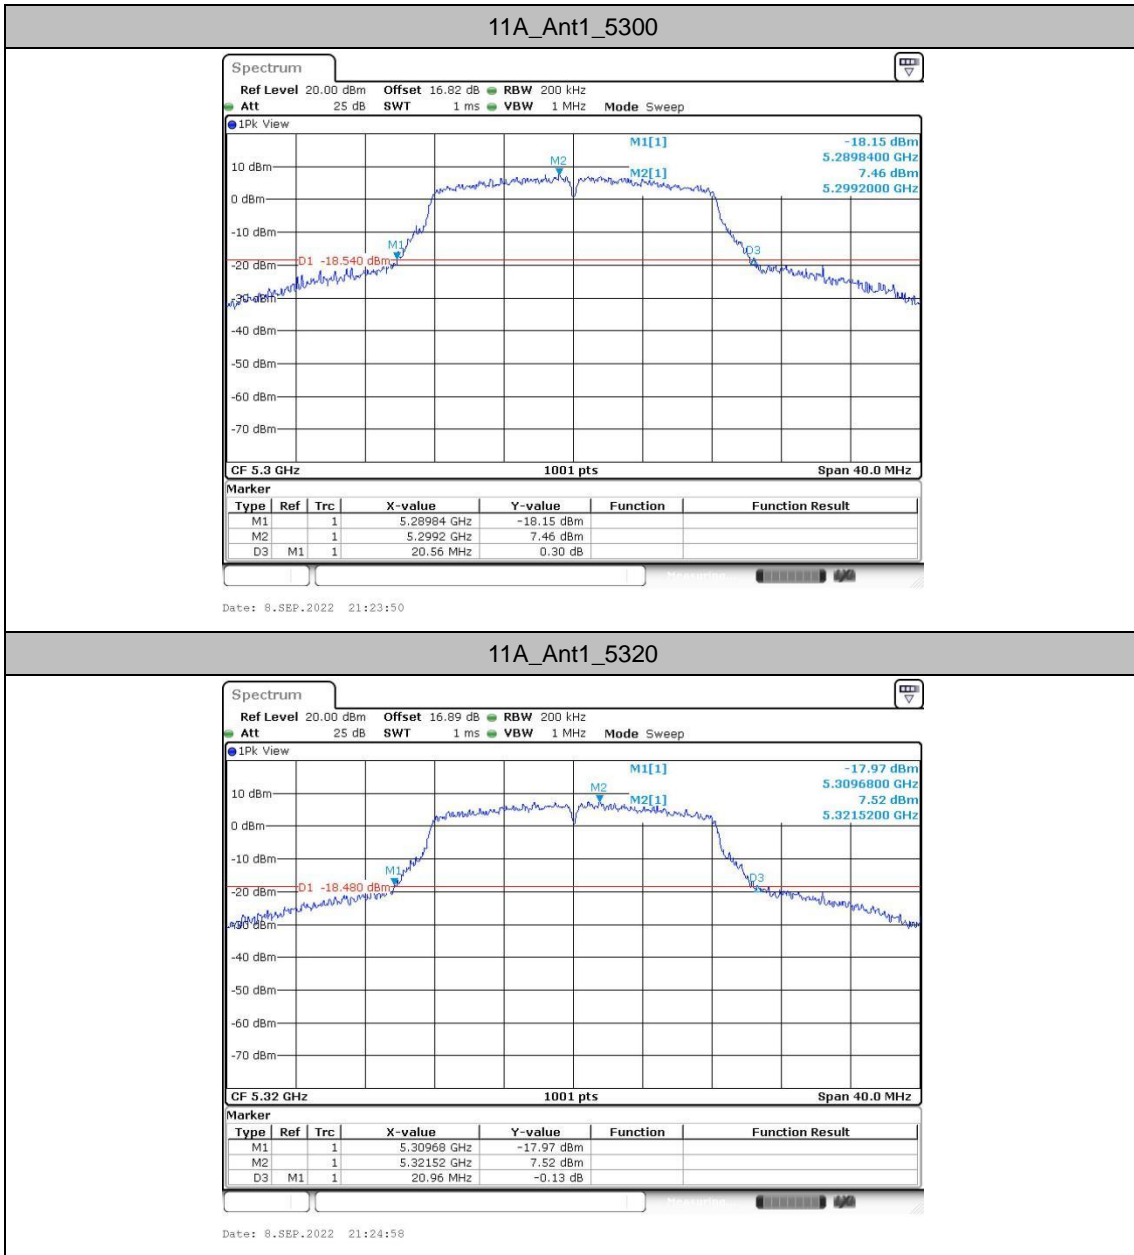


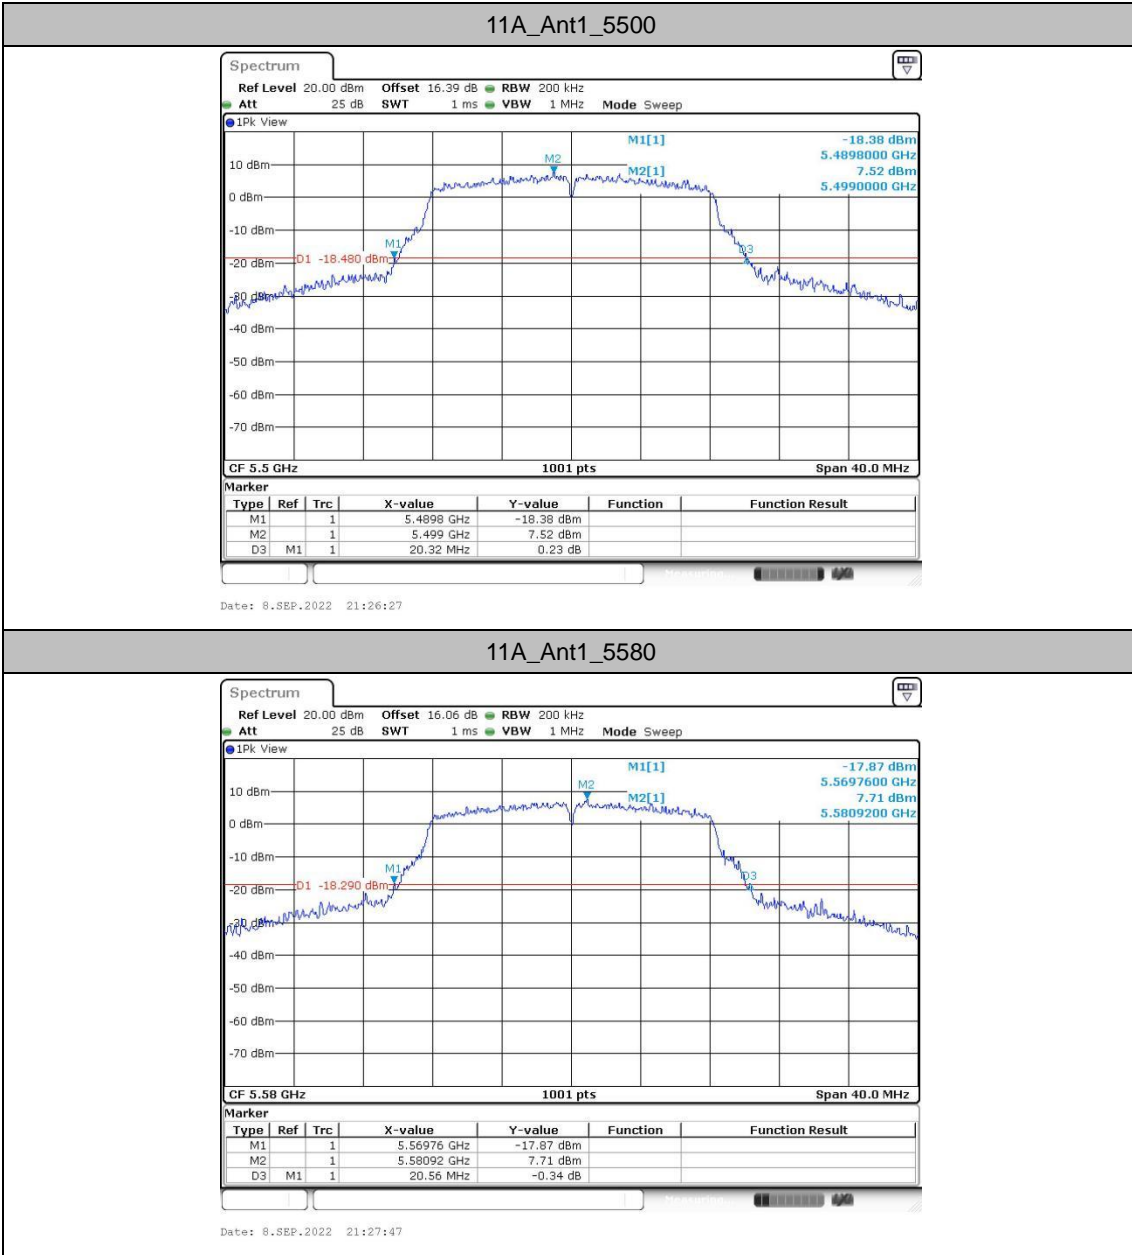



11A_Ant1_5580

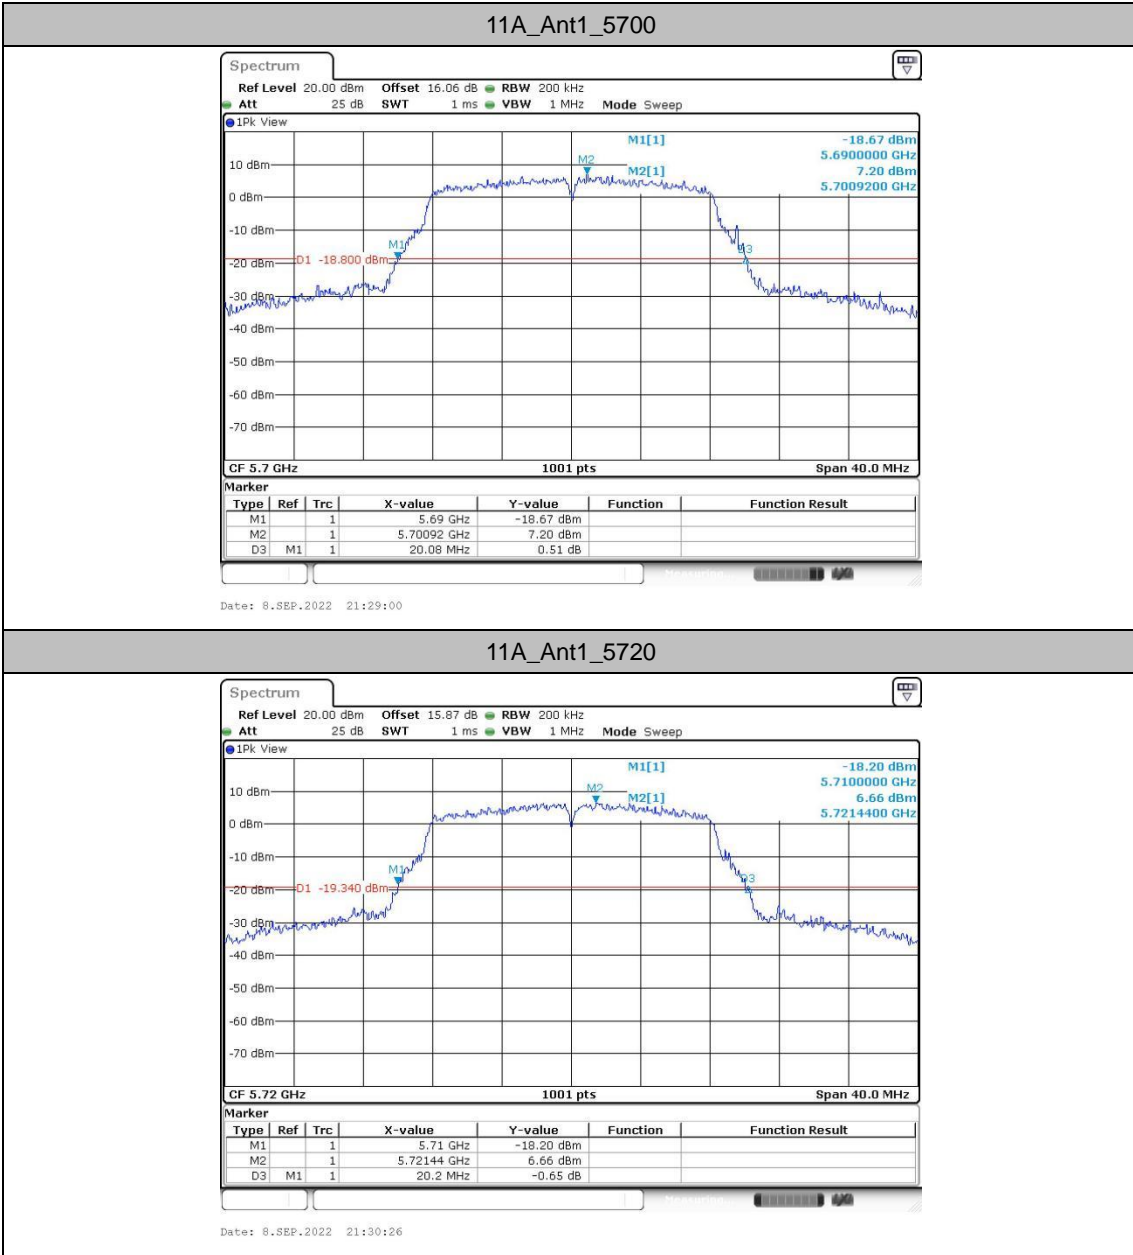


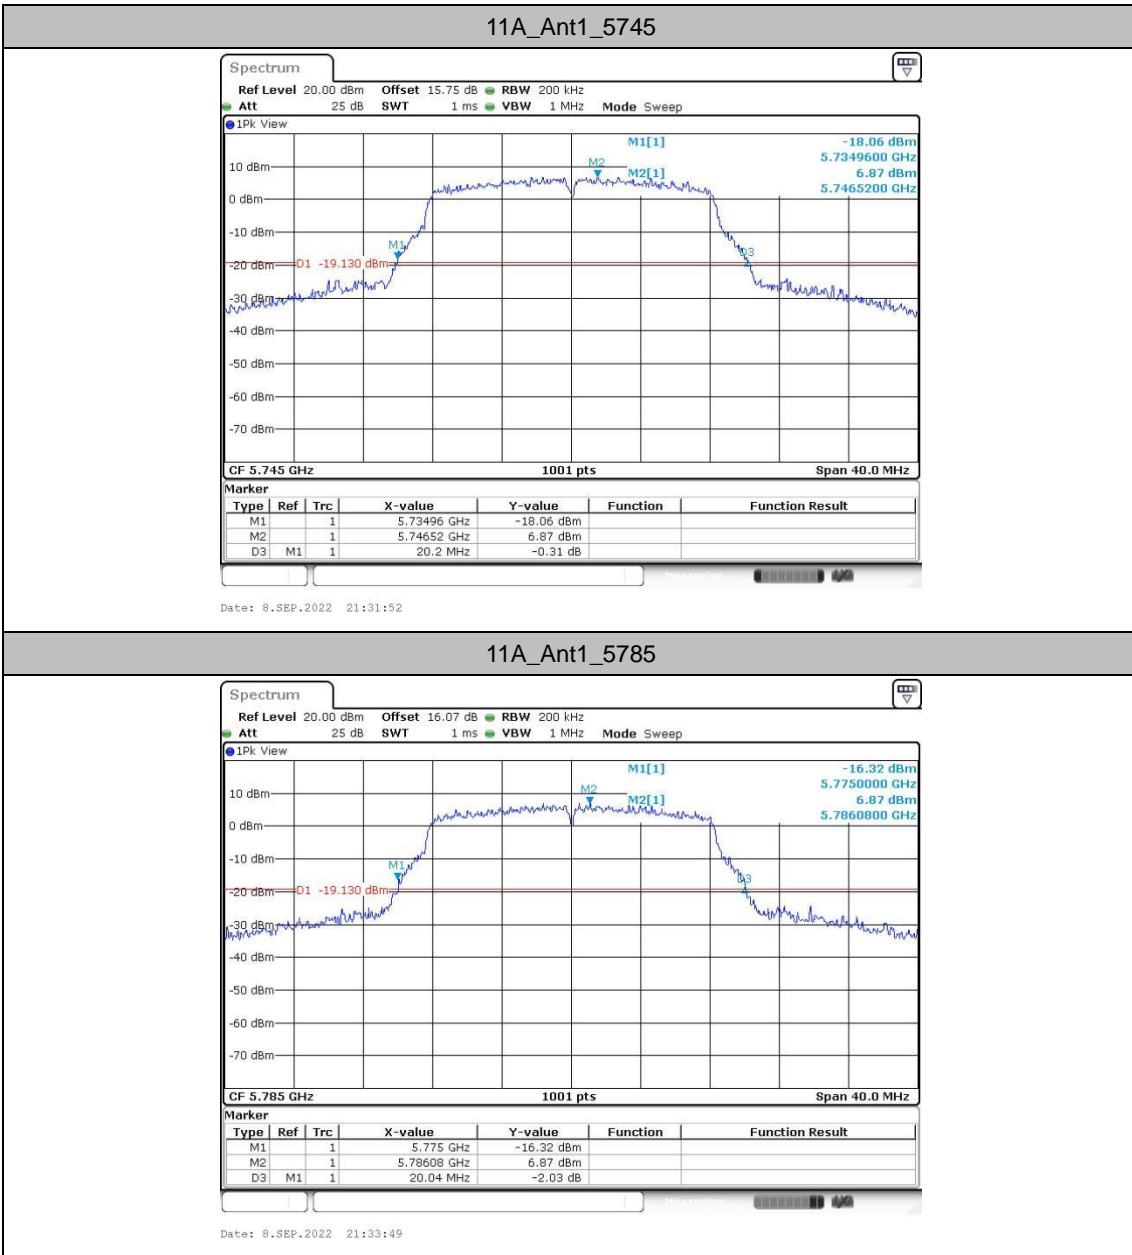


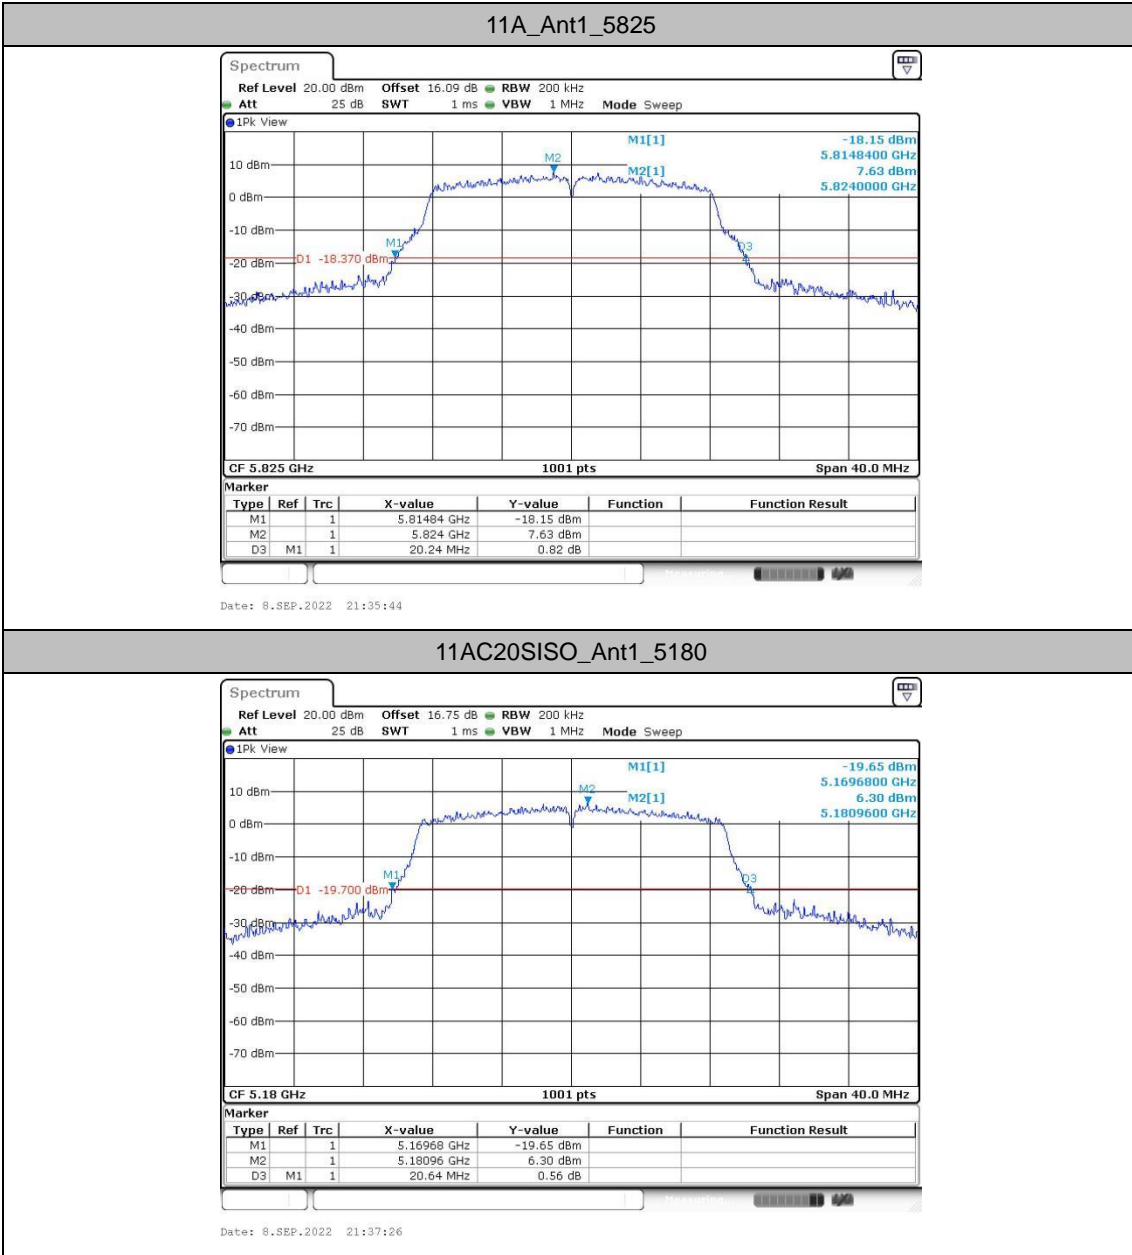


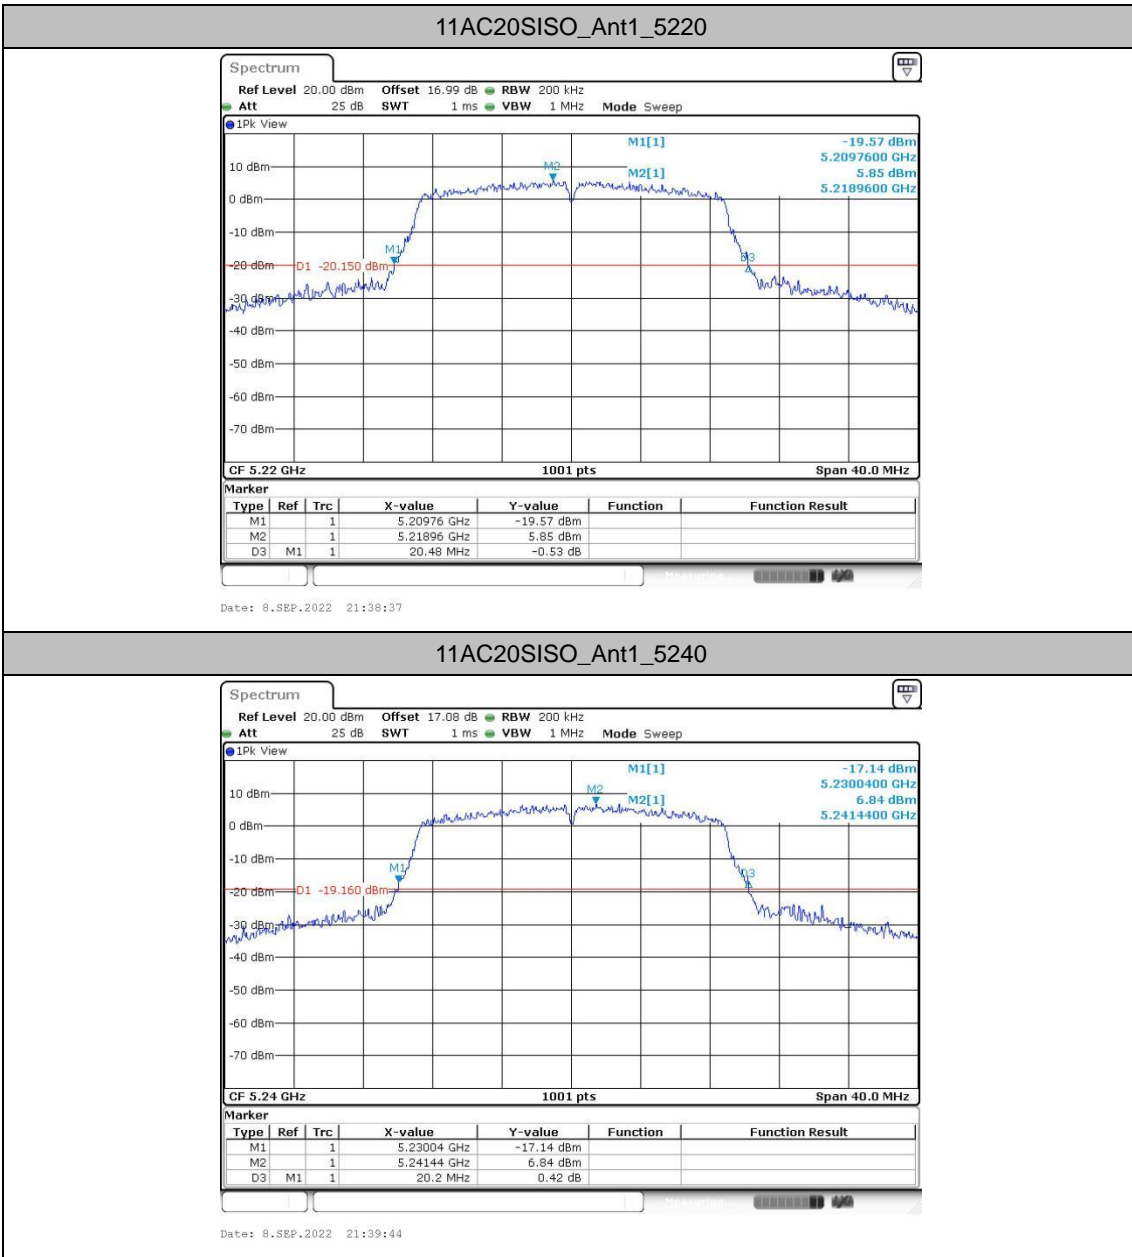


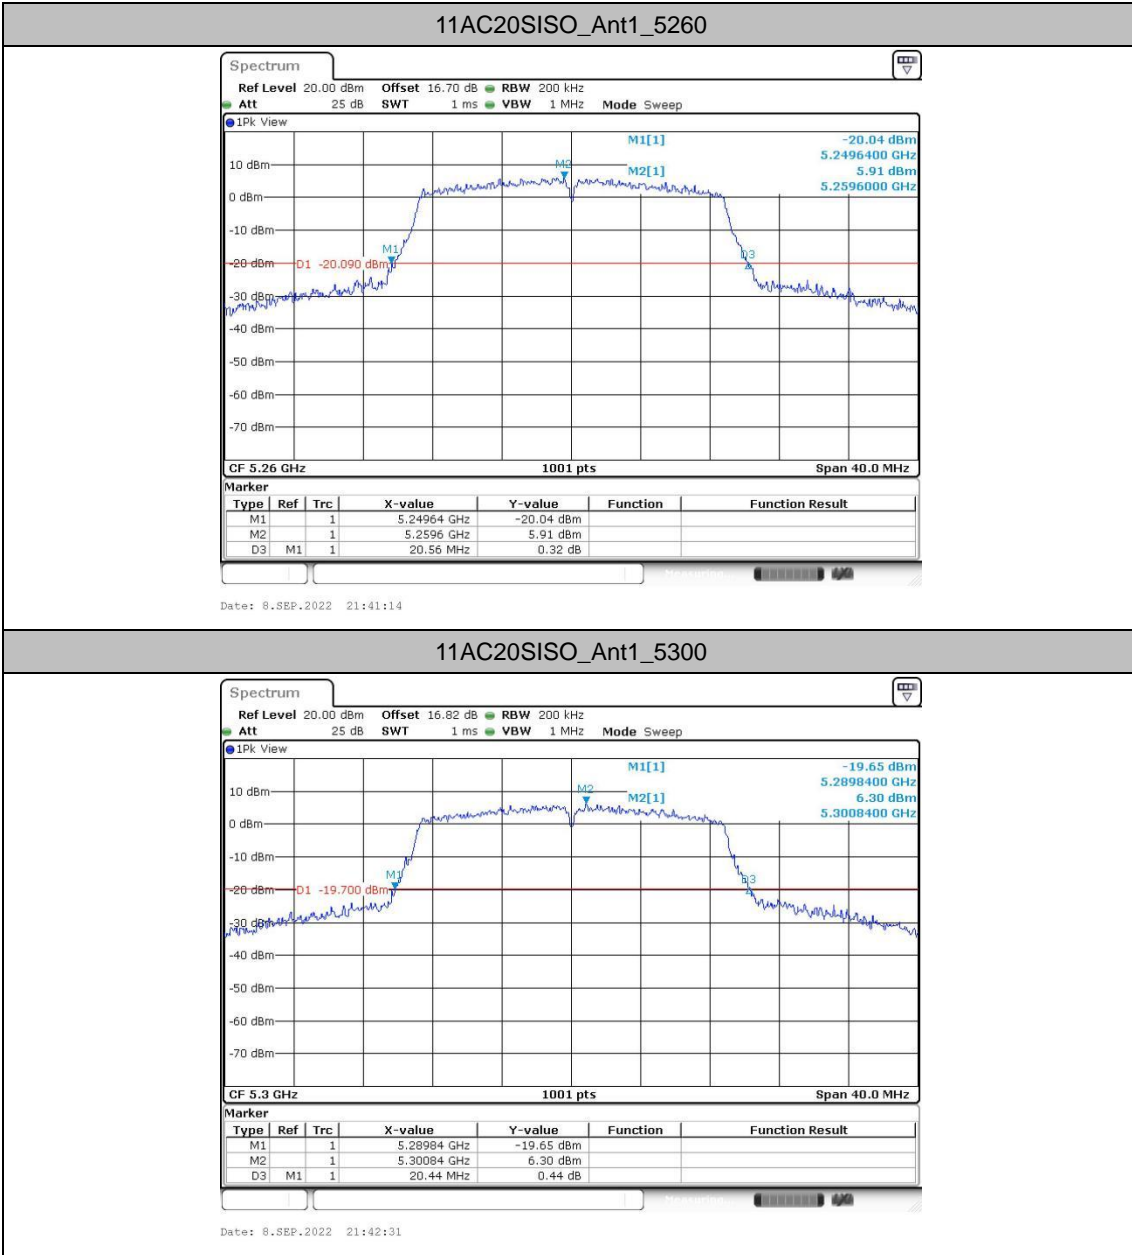


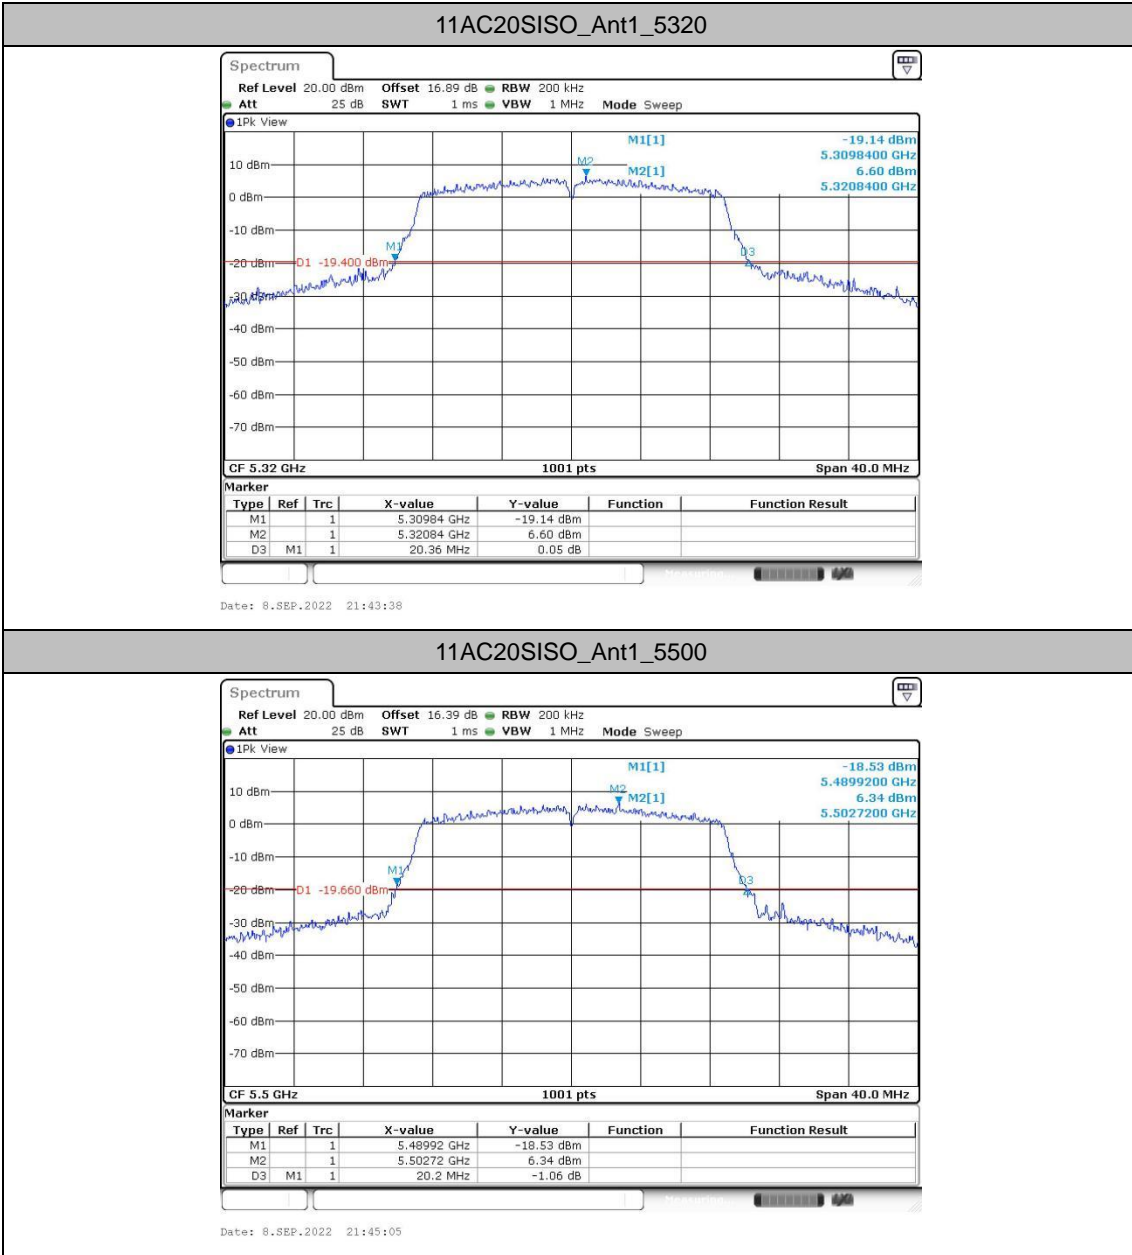


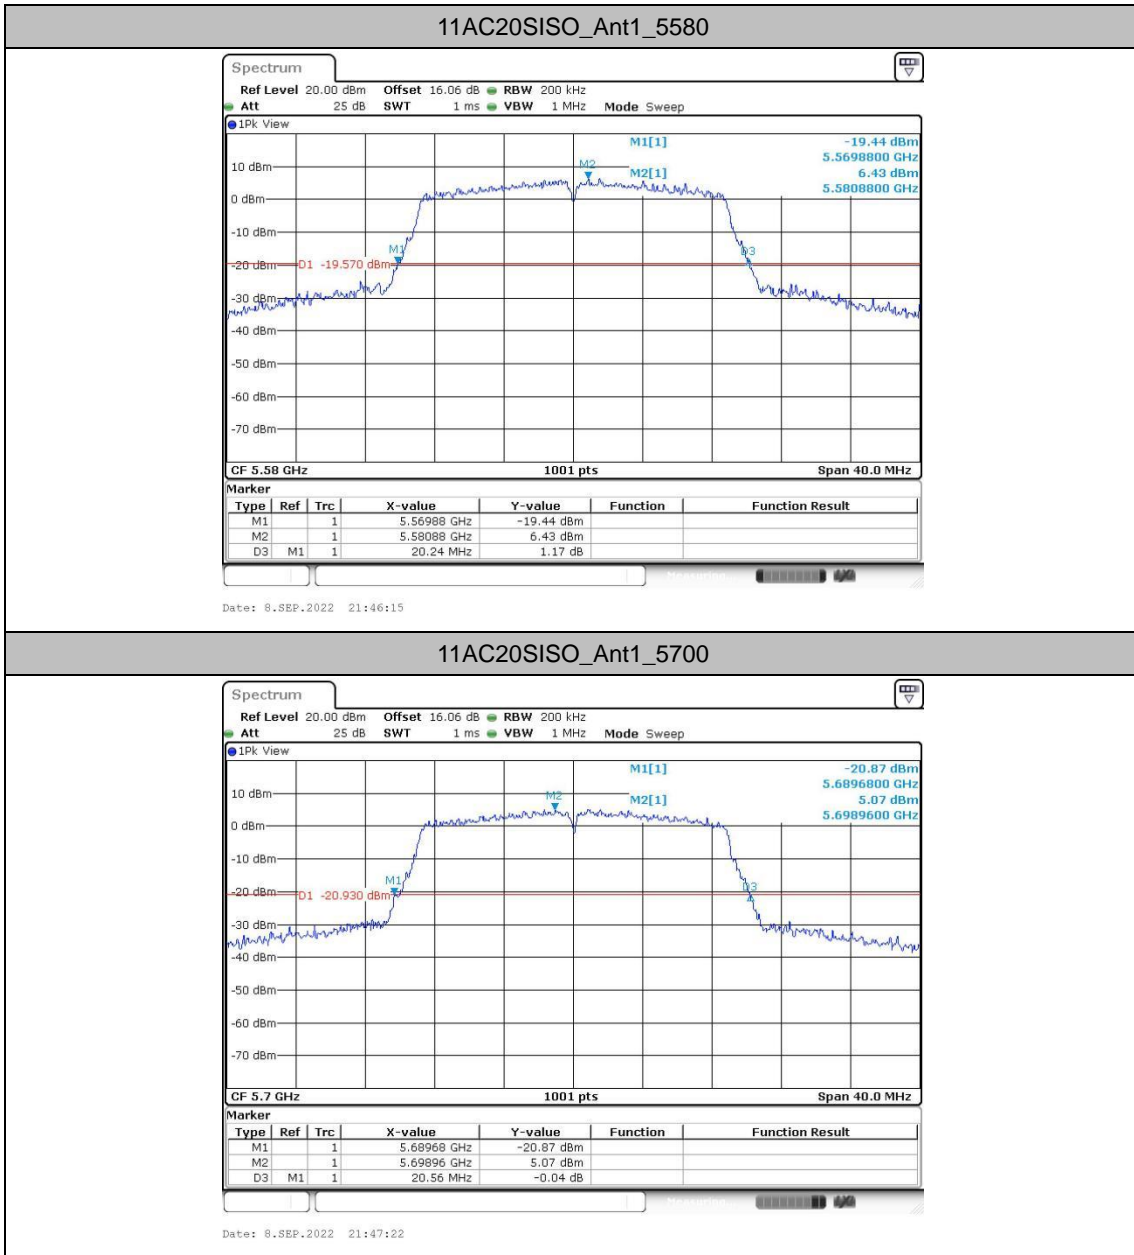


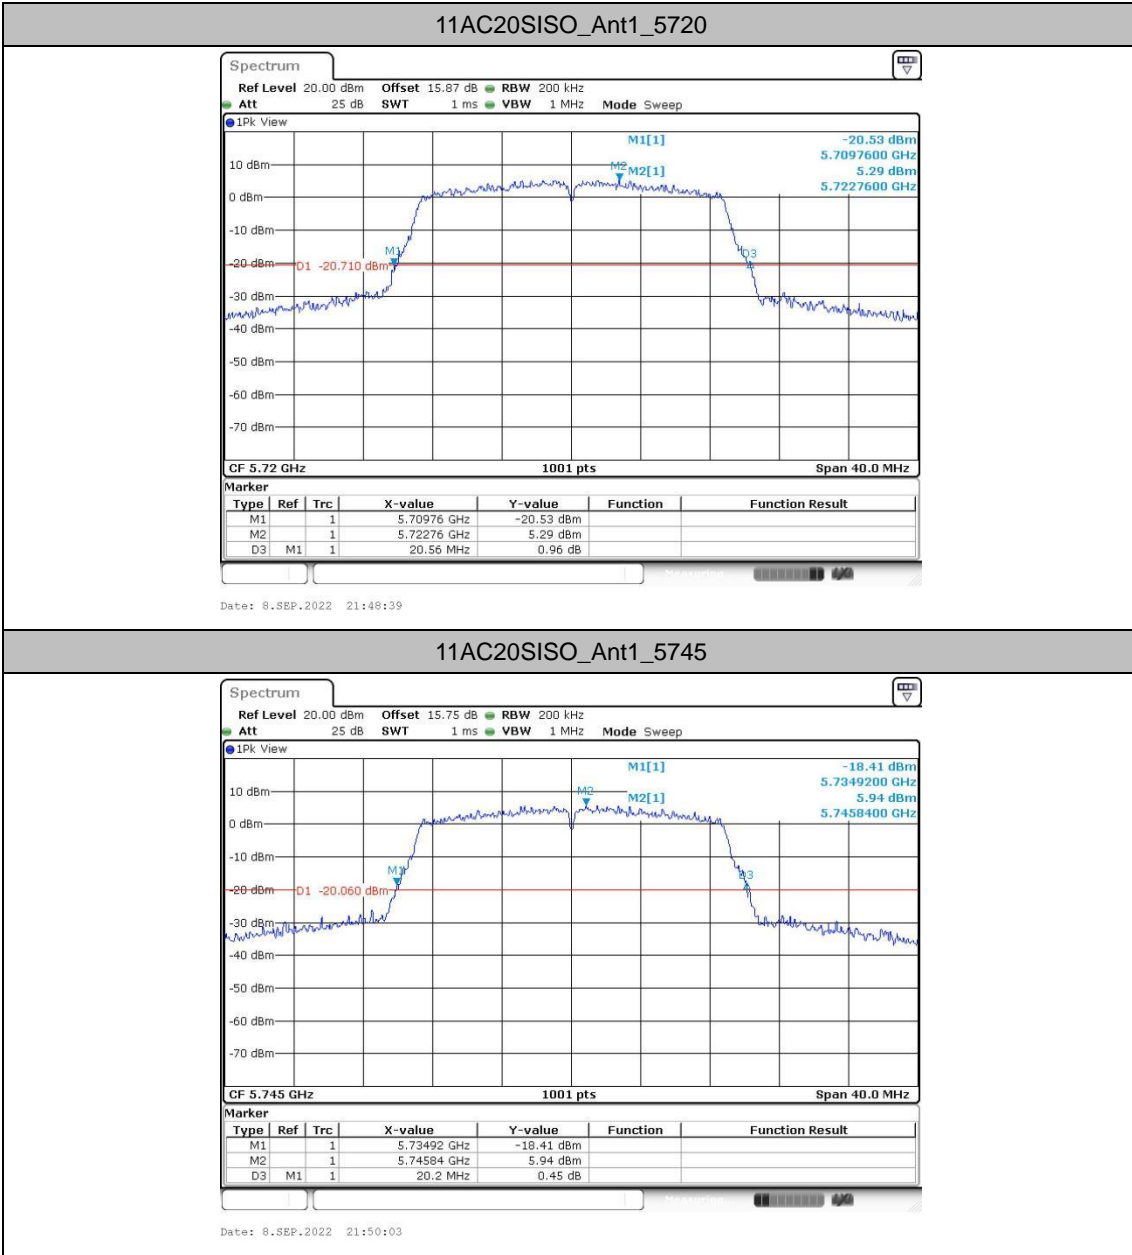


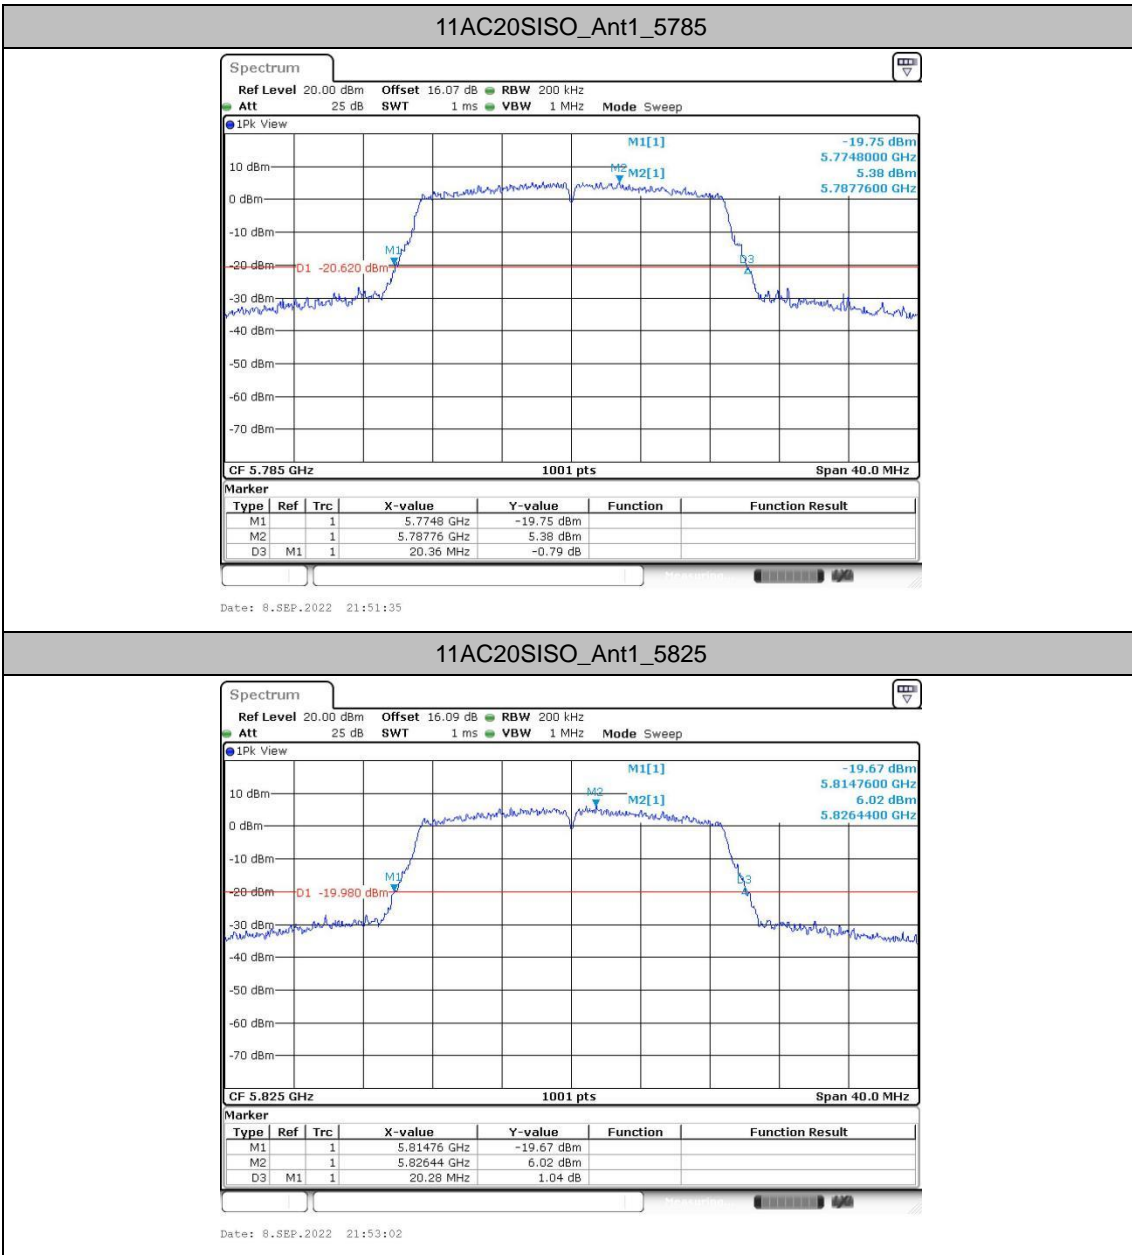


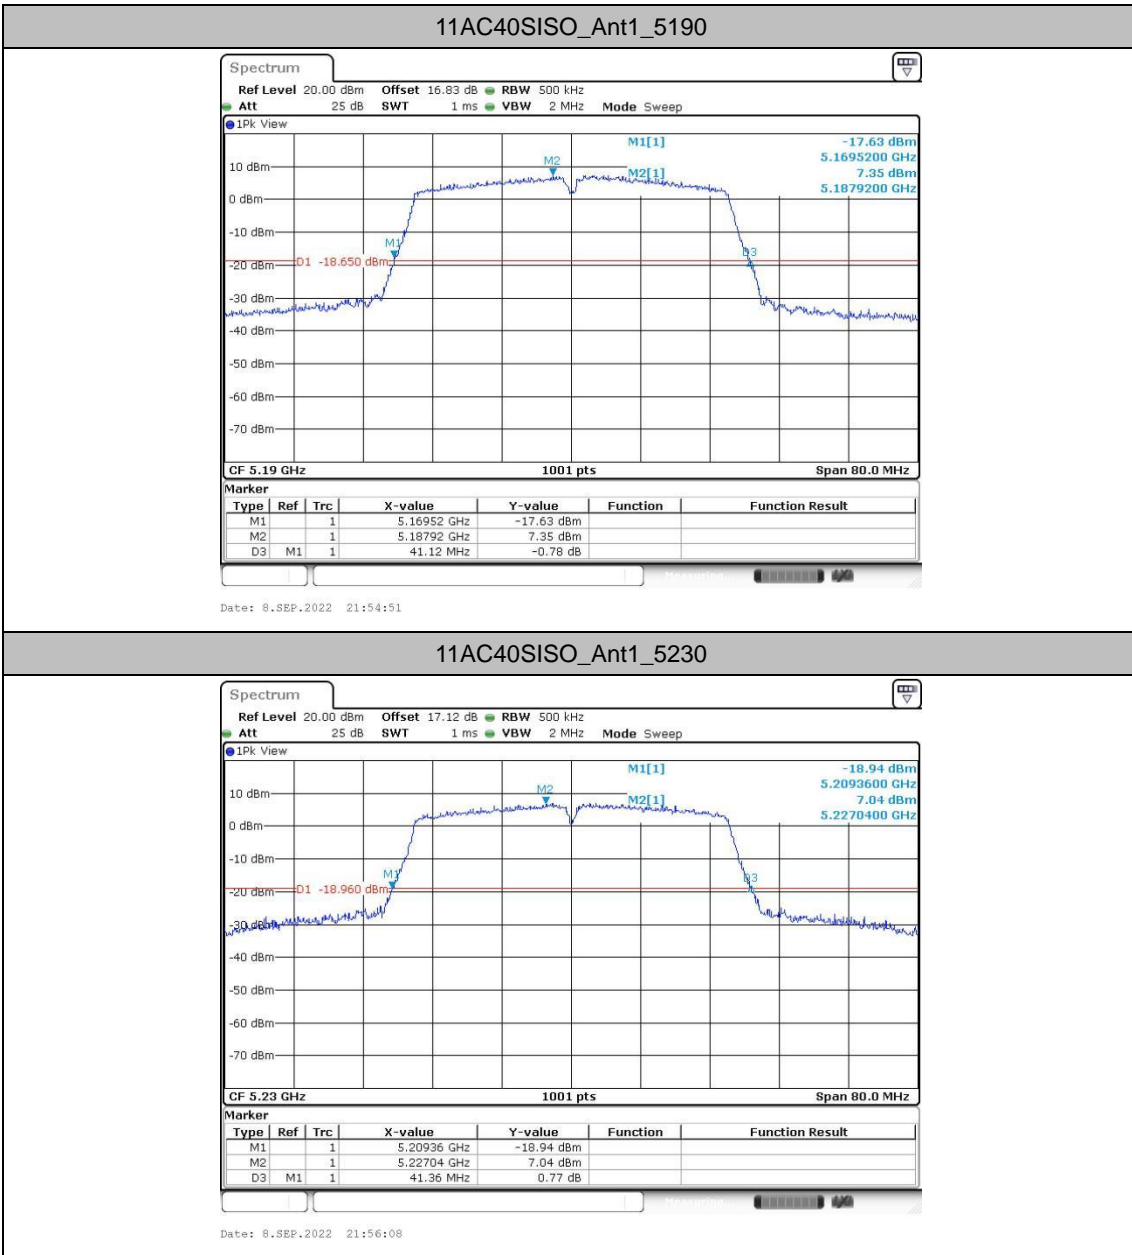


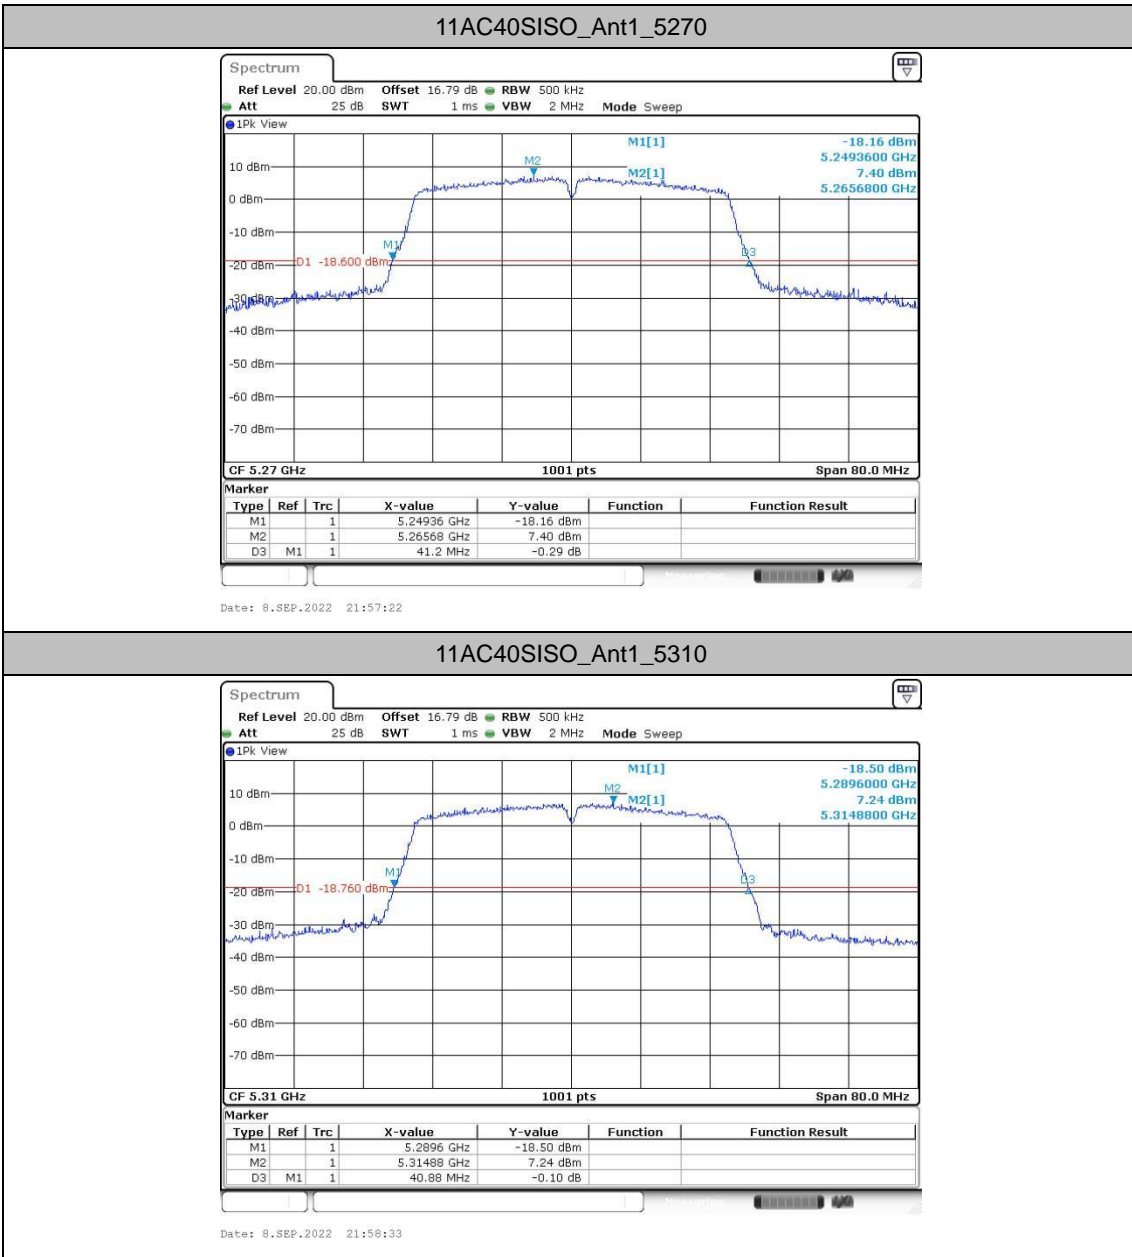


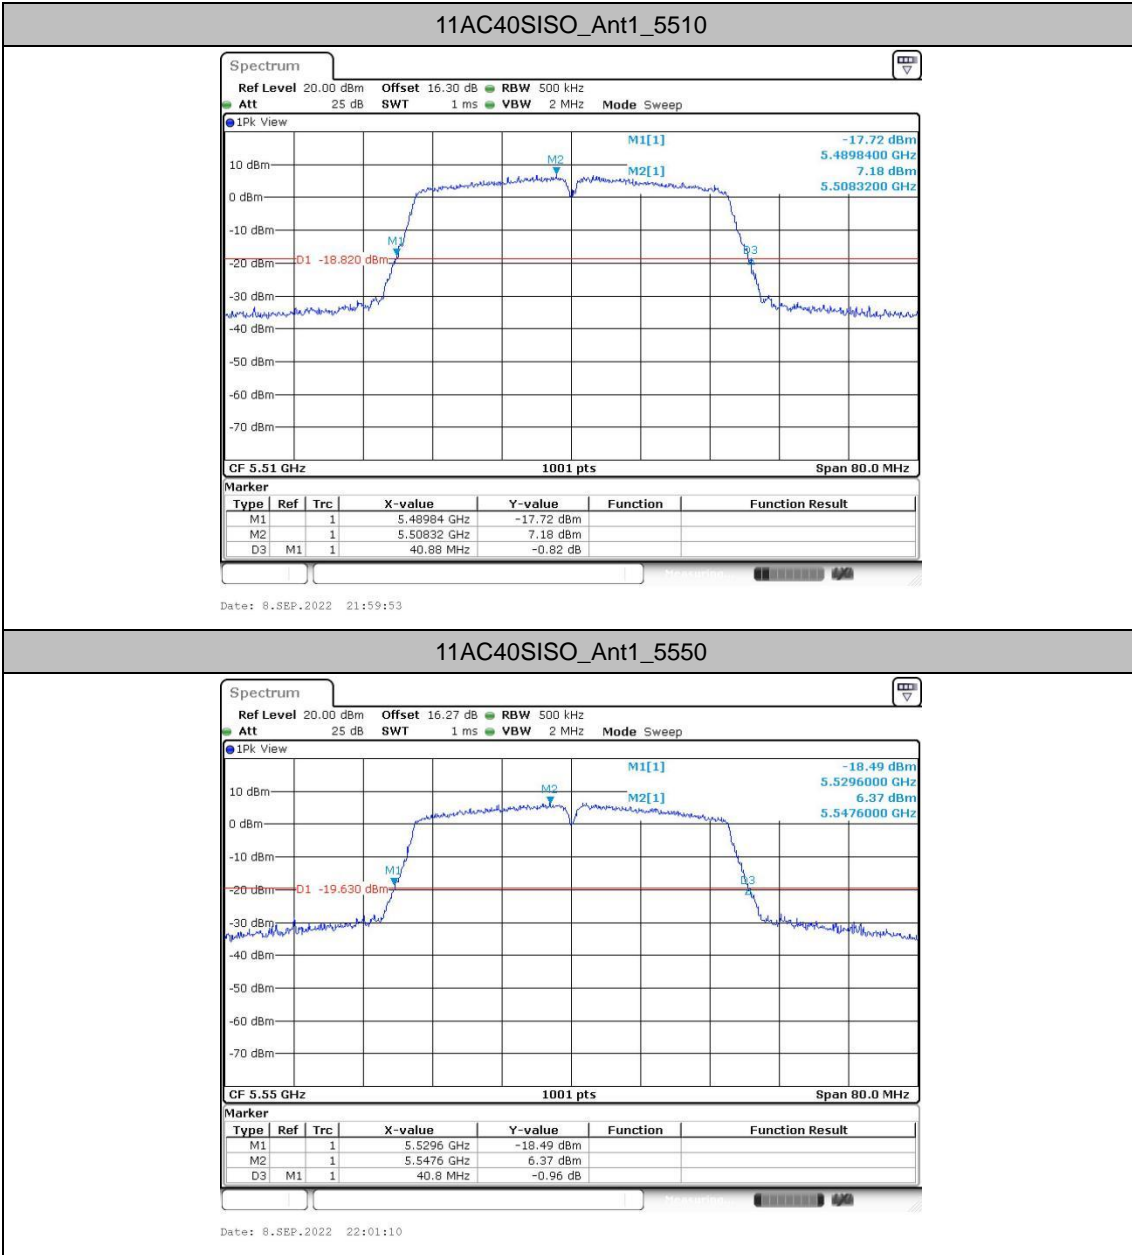


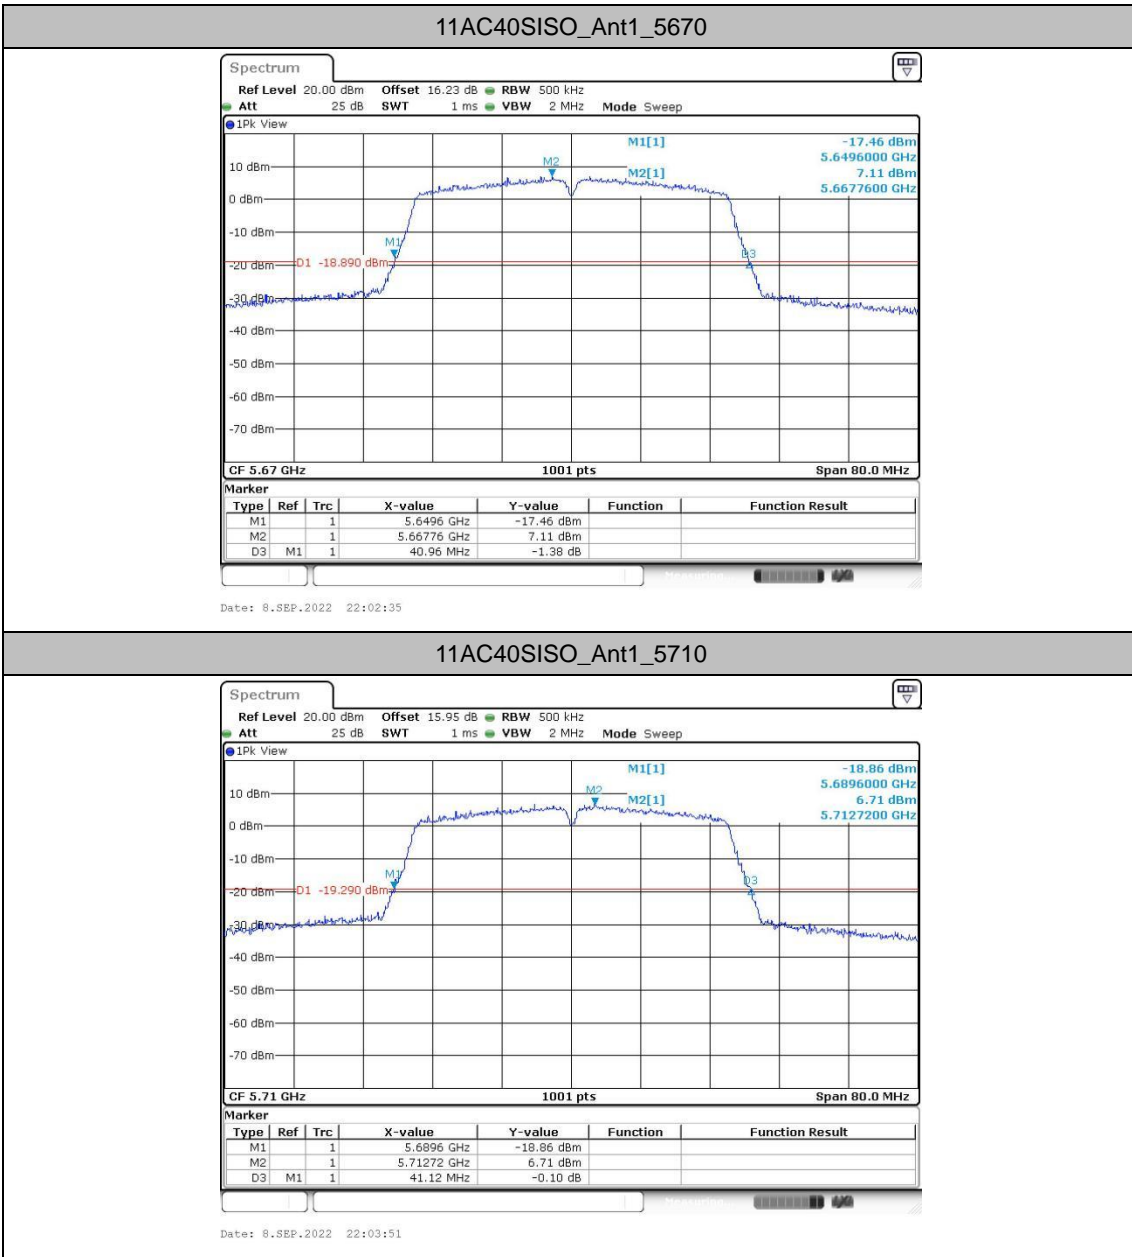

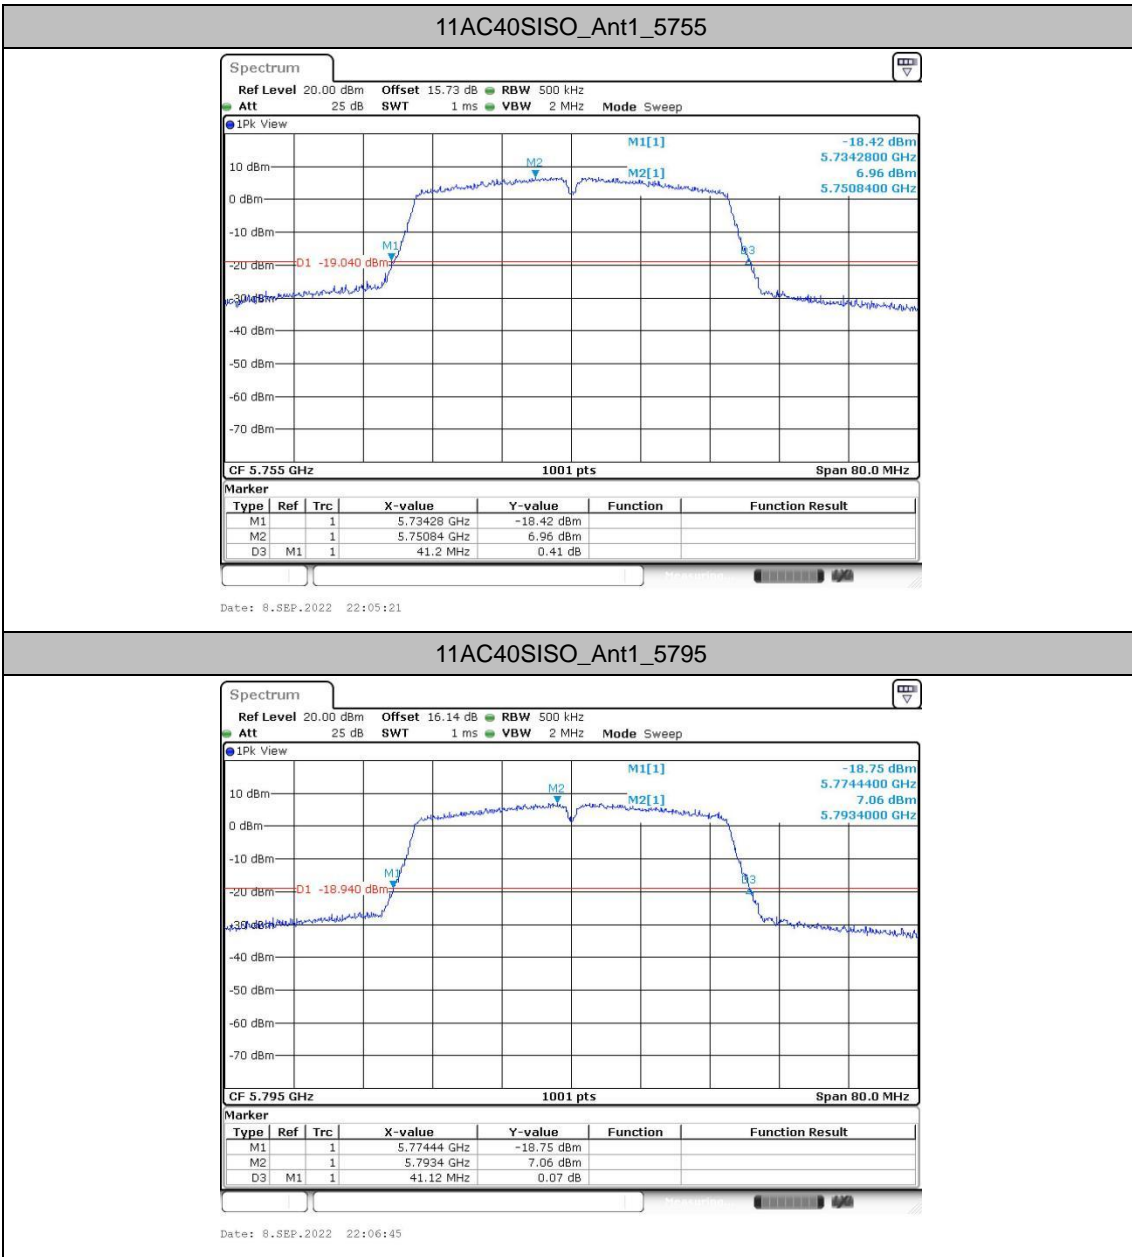

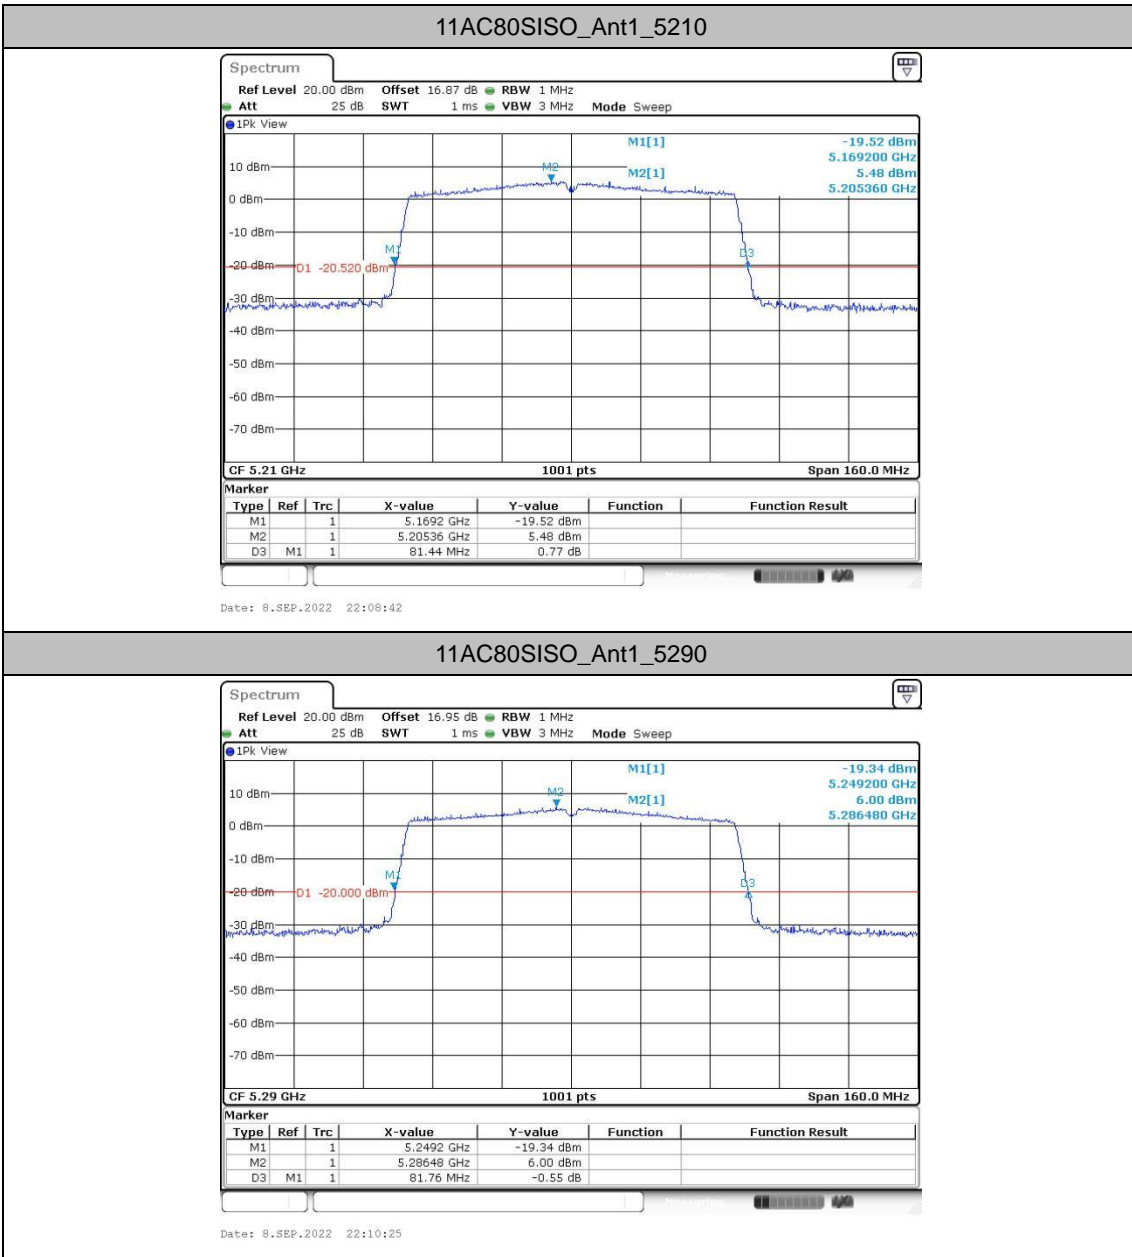

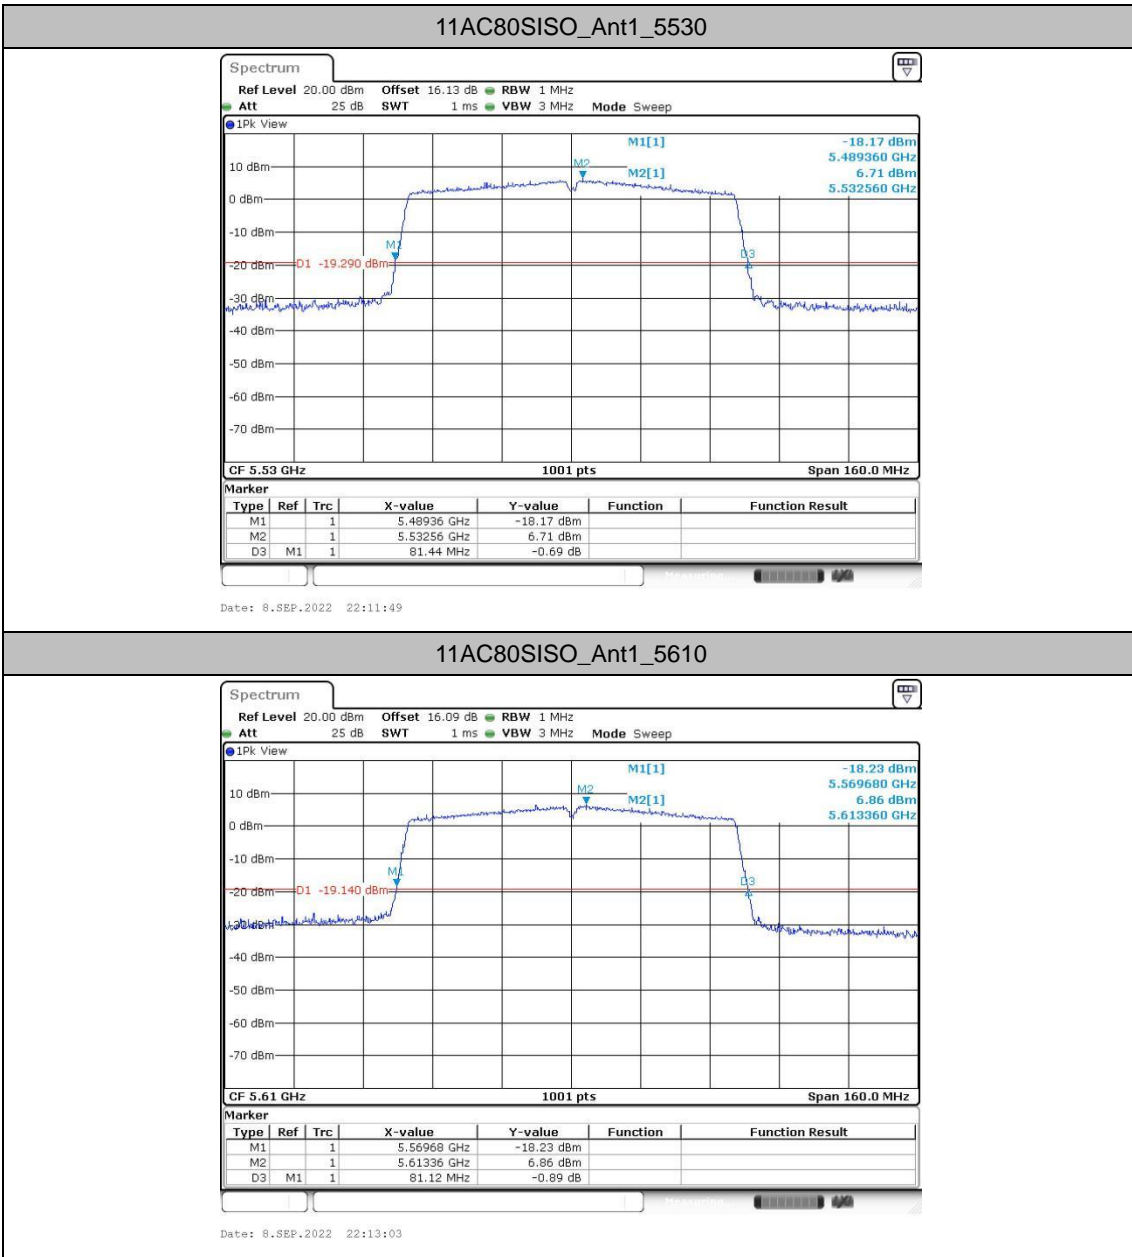

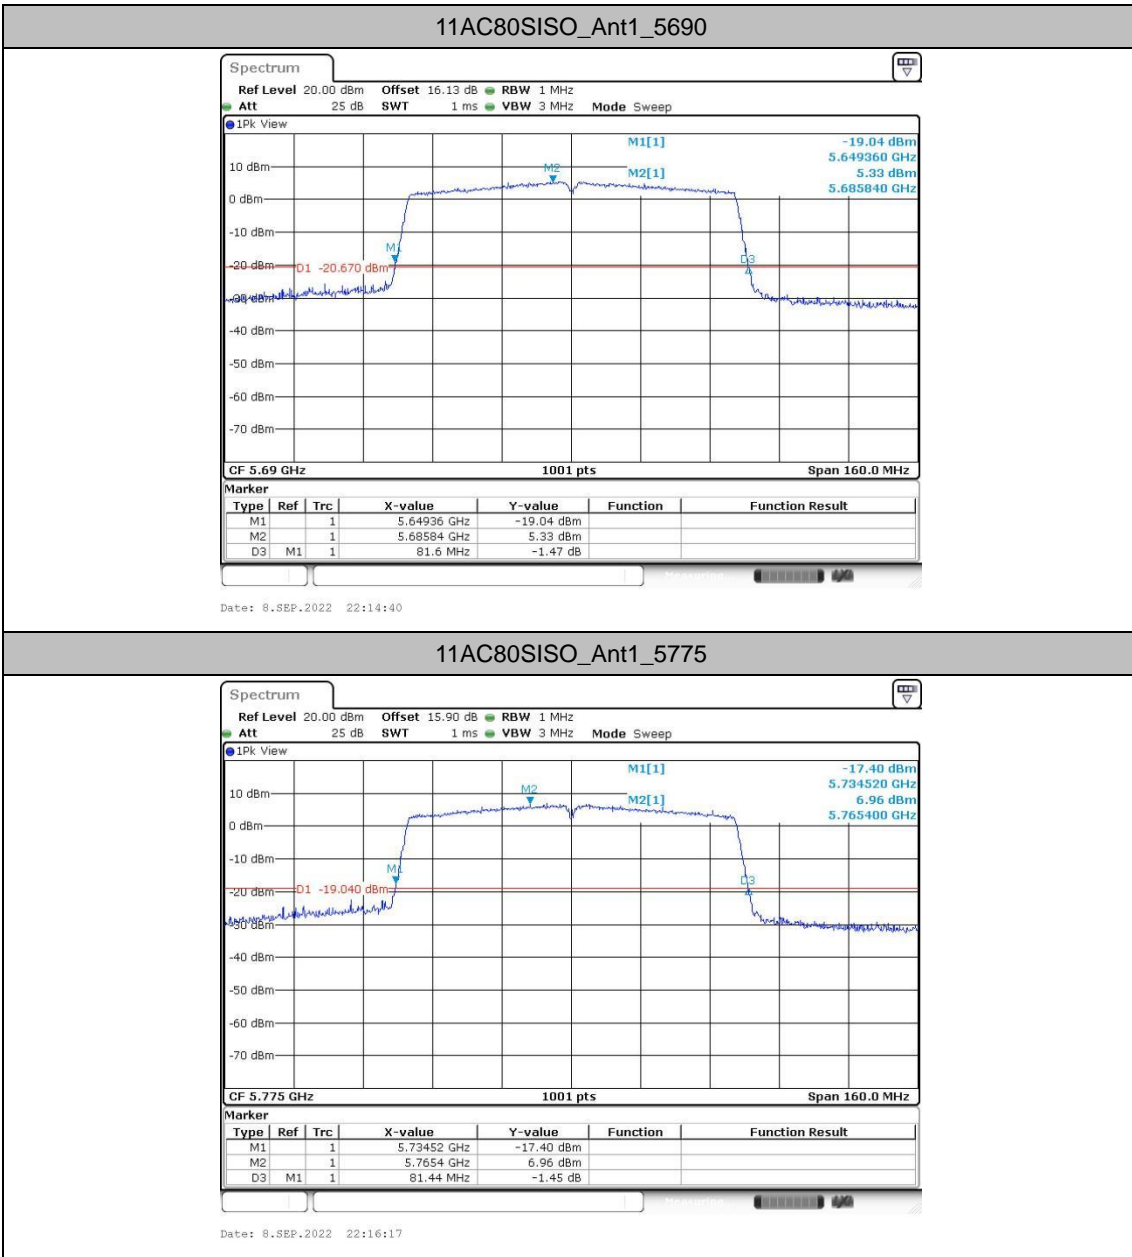



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.303	5171.3686	5188.6713		
		5220	17.383	5211.2887	5228.6713		
		5240	17.223	5231.4486	5248.6713		
		5260	17.223	5251.3686	5268.5914		
		5300	17.303	5291.3686	5308.6713		
		5320	17.343	5311.3686	5328.7113		
		5500	17.183	5491.4086	5508.5914		
		5580	17.223	5571.4086	5588.6314		
		5700	17.183	5691.4486	5708.6314		
		5720	17.183	5711.4486	5728.6314		
		5720_UNII-2C	13.551	5711.4486	5725		
		5720_UNII-3	3.631	5725	5728.6314		
		5745	17.183	5736.4086	5753.5914		
		5785	17.223	5776.4086	5793.6314		
		5825	17.223	5816.3686	5833.5914		
11AC20SISO	Ant1	5180	18.062	5171.0090	5189.0709		
		5220	18.142	5210.9291	5229.0709		
		5240	17.982	5231.0490	5249.0310		
		5260	18.022	5250.9690	5268.9910		
		5300	18.062	5290.9690	5309.0310		
		5320	18.102	5310.9690	5329.0709		
		5500	18.062	5490.9690	5509.0310		
		5580	18.062	5571.0090	5589.0709		
		5700	18.022	5691.0090	5709.0310		
		5720	17.982	5711.0490	5729.0310		
		5720_UNII-2C	13.951	5711.0490	5725		
		5720_UNII-3	4.031	5725	5729.0310		
		5745	18.022	5736.0090	5754.0310		
		5785	18.022	5775.9690	5793.9910		
		5825	18.022	5815.9690	5833.9910		
11AC40SISO	Ant1	5190	36.204	5171.9381	5208.1419		
		5230	36.364	5211.8581	5248.2218		
		5270	36.444	5251.7782	5288.2218		
		5310	36.364	5291.7782	5328.1419		



		5510	36.284	5491.8581	5528.1419		
		5550	36.204	5531.8581	5568.0619		
		5670	36.284	5651.8581	5688.1419		
		5710	36.444	5691.7782	5728.2218		
		5710_UNII-2C	33.222	5691.7782	5725		
		5710_UNII-3	3.222	5725	5728.2218		
		5755	36.444	5736.7782	5773.2218		
		5795	36.364	5776.8581	5813.2218		
11AC80SISO	Ant1	5210	75.764	5172.1179	5247.8821		
		5290	75.604	5252.1179	5327.7223		
		5530	75.445	5492.2777	5567.7223		
		5610	75.604	5572.2777	5647.8821		
		5690	75.764	5652.2777	5728.0420		
		5690_UNII-2C	72.722	5652.2777	5725		
		5690_UNII-3	3.042	5725	5728.0420		
		5775	75.764	5737.1179	5812.8821		



Test Graphs

